



TEST REPORT

Product Name: Microphone
FCC ID: 2BNGG-CREATORMIC
Trademark: N/A
Model Number: CreatorMic, K8, K9, K11, K35, K15, J11, J13, K13, K10, SX29, J28, SX88, SX19, SX5, SX6, SX8, SX9, SX10, SX12, SX21, SX23, SX25, SX26, SX31, SX32, SX39, SX63, SX66, SX85, SX960, K35 Pro, K60, K61, SX16, K81, K83, K91, K93, K62, SX86, K10, K65, K66, SX20, K80, K90, LT-09
Prepared For: Vice City Audio LLC
Address: 750 NE 113th St, Biscayne Park FL 33161
Manufacturer: Shenzhen Gaodashang Electronics Co., Ltd.
Address: 1501-2, Building C, Jinsheng Fortune Plaza, Ma'an Hill, Shajing Street, Baoan District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Dec. 27, 2024
Sample tested Date: Dec. 27, 2024 to Jan. 13, 2025
Issue Date: Jan. 13, 2025
Report No.: CTB24122705501RF03
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration.....	7
4.3 Support Equipment.....	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit.....	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup.....	27
8.2 Limit.....	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup.....	35
9.2 Limit.....	35
9.3 Test procedure	35
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH.....	39
10.1 Block Diagram Of Test Setup.....	39
10.2 Limit.....	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup.....	43
11.2 Limit.....	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup.....	47
12.2 Limit.....	47
12.3 Test procedure	47
12.4 Test Result	47
13. DWELL TIME.....	49
13.1 Block Diagram Of Test Setup.....	49
13.2 Limit.....	49
13.3 Test procedure	49
13.4 Test Result	49

14. PSEUDORANDOM FREQUENCY	53
14.1 Limit.....	53
14.2 Test procedure.....	53
14.3 Test Result.....	53
15. ANTENNA REQUIREMENT.....	54
16. EUT TEST SETUP PHOTOGRAPHS.....	55

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB24122705501RF03	Jan. 13, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): CreatorMic, K8, K9, K11, K35, K15, J11, J13, K13, K10, SX29, J28, SX88, SX19, SX5, SX6, SX8, SX9, SX10, SX12, SX21, SX23, SX25, SX26, SX31, SX32, SX39, SX63, SX66, SX85, SX960, K35 Pro, K60, K61, SX16, K81, K83, K91, K93, K62, SX86, K10, K65, K66, SX20, K80, K90, LT-09

Model Description: All the model are the same circuit and RF module, only different for model name. Test sample model: CreatorMic

Bluetooth Version: Bluetooth 5.4

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 7.8dBm

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna installation: Bluetooth: Ceramic Antenna

Antenna Gain: Bluetooth: 2.67dBi

Ratings: DC 5V charging from adapter
DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	AE

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/6/28


10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

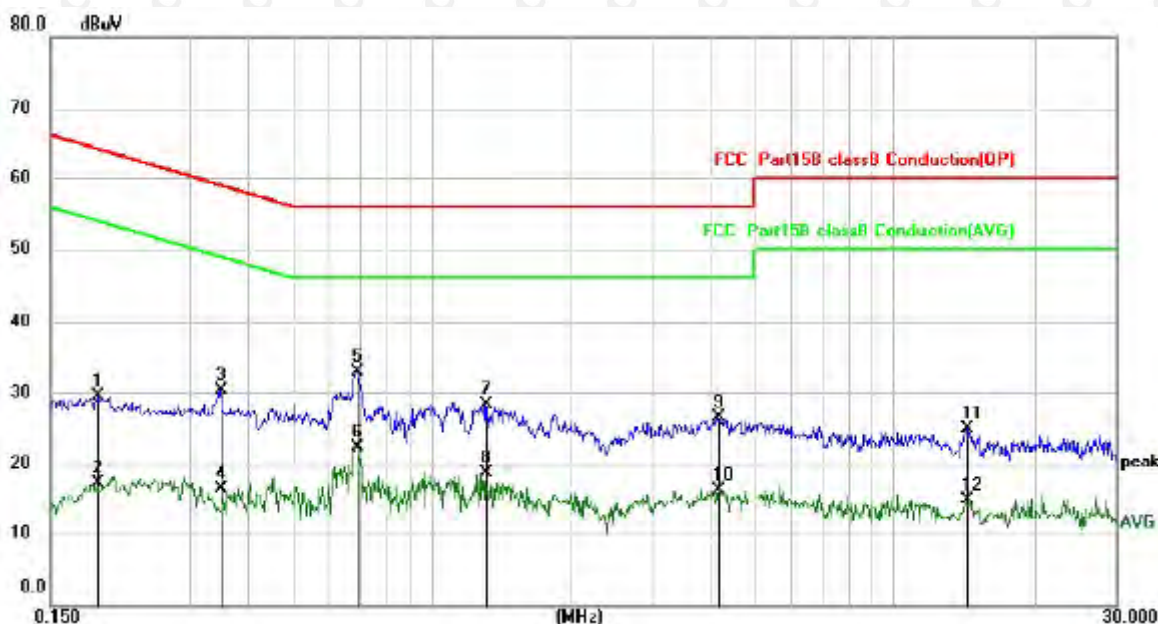


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1900	18.85	10.75	29.60	64.04	-34.44	QP
2		0.1900	6.55	10.75	17.30	54.04	-36.74	AVG
3		0.3500	19.64	10.61	30.25	58.96	-28.71	QP
4		0.3500	5.87	10.61	16.48	48.96	-32.48	AVG
5	*	0.6900	22.15	10.71	32.86	56.00	-23.14	QP
6		0.6900	11.60	10.71	22.31	46.00	-23.69	AVG
7		1.3140	17.12	11.15	28.27	56.00	-27.73	QP
8		1.3140	7.51	11.15	18.66	46.00	-27.34	AVG
9		4.1619	14.46	12.06	26.52	56.00	-29.48	QP
10		4.1619	4.31	12.06	16.37	46.00	-29.63	AVG
11		14.3058	11.67	13.33	25.00	60.00	-35.00	QP
12		14.3058	1.54	13.33	14.87	50.00	-35.13	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

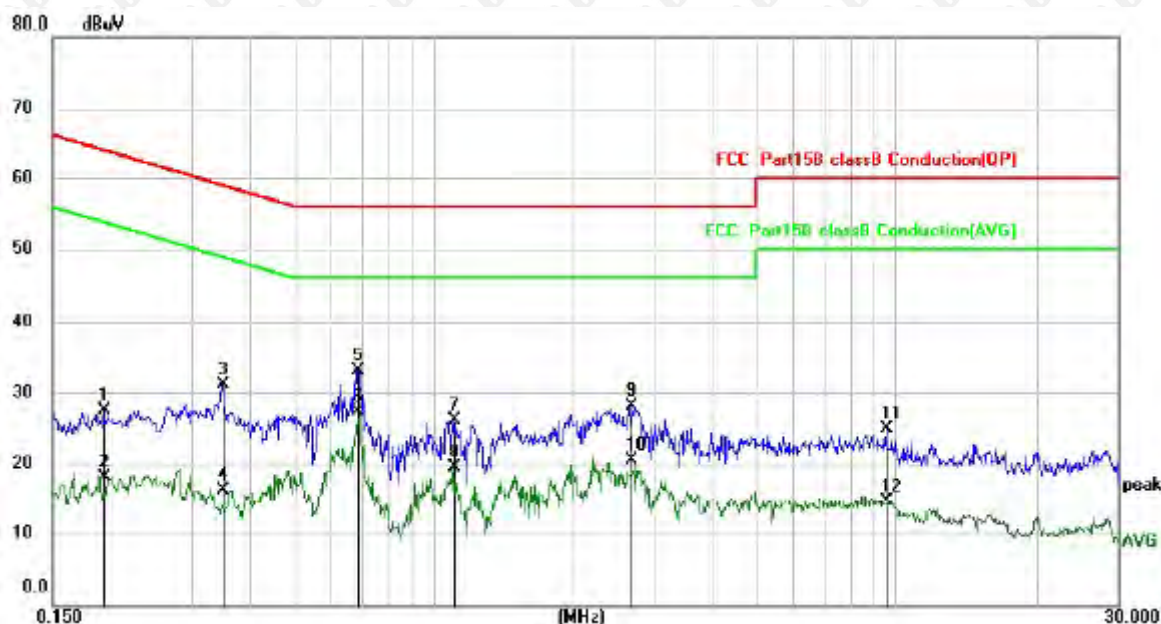

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1940	16.69	10.73	27.42	63.86	-36.44	QP
2		0.1940	7.46	10.73	18.19	53.86	-35.67	AVG
3		0.3500	20.48	10.61	31.09	58.96	-27.87	QP
4		0.3500	5.70	10.61	16.31	48.96	-32.65	AVG
5		0.6860	22.44	10.71	33.15	56.00	-22.85	QP
6	*	0.6860	16.56	10.71	27.27	46.00	-18.73	AVG
7		1.1100	15.13	11.02	26.15	56.00	-29.85	QP
8		1.1100	8.57	11.02	19.59	46.00	-26.41	AVG
9		2.6900	16.46	11.73	28.19	56.00	-27.81	QP
10		2.6900	8.79	11.73	20.52	46.00	-25.48	AVG
11		9.5777	11.73	13.20	24.93	60.00	-35.07	QP
12		9.5777	1.48	13.20	14.68	50.00	-35.32	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

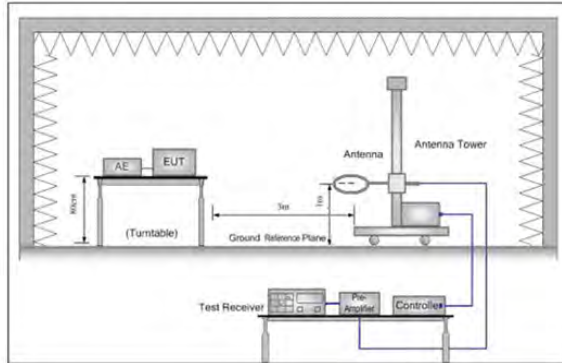


Figure 1. Below 30MHz

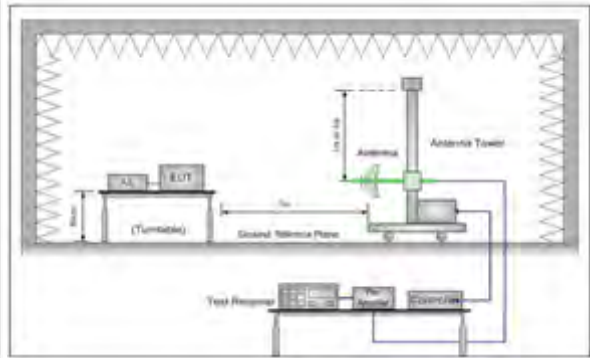


Figure 2. 30MHz to 1GHz

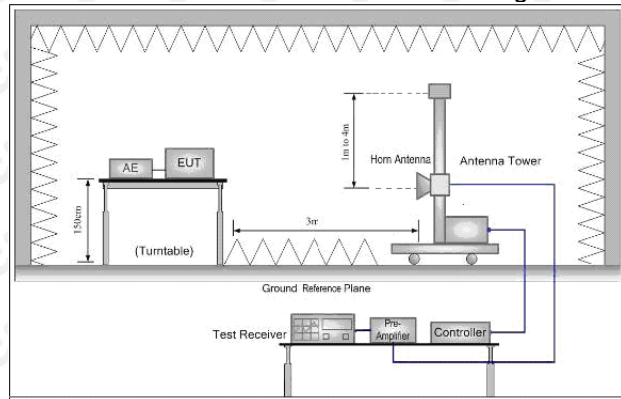


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		39.7146	25.65	-6.88	18.77	40.00	-21.23	QP
2		158.6677	24.64	-1.10	23.54	43.50	-19.96	QP
3		298.2681	25.74	-2.93	22.81	46.00	-23.19	QP
4		483.0618	25.43	1.66	27.09	46.00	-18.91	QP
5		768.7481	23.61	6.77	30.38	46.00	-15.62	QP
6	*	957.1148	25.02	8.66	33.68	46.00	-12.32	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		49.0145	26.65	-6.65	20.00	40.00	-20.00	QP
2		102.3597	27.59	-9.01	18.58	43.50	-24.92	QP
3		158.6677	26.39	-1.10	25.29	43.50	-18.21	QP
4		495.9344	26.09	2.02	28.11	46.00	-17.89	QP
5		762.0385	27.26	6.64	33.90	46.00	-12.10	QP
6	*	948.7610	27.41	8.60	36.01	46.00	-9.99	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	59.27	-3.65	55.62	74.00	-18.38	peak
4804	49.68	-3.65	46.03	54.00	-7.97	AVG
7206	59.25	-0.95	58.30	74.00	-15.70	peak
7206	41.85	-0.95	40.90	54.00	-13.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	59.23	-3.65	55.58	74.00	-18.42	peak
4804	50.88	-3.65	47.23	54.00	-6.77	AVG
7206	60.05	-0.95	59.10	74.00	-14.90	peak
7206	41.87	-0.95	40.92	54.00	-13.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	57.89	-3.54	54.35	74.00	-19.65	peak
4882.00	48.59	-3.54	45.05	54.00	-8.95	AVG
7323.00	57.75	-0.81	56.94	74.00	-17.06	peak
7323.00	42.32	-0.81	41.51	54.00	-12.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	57.48	-3.54	53.94	74.00	-20.06	peak
4882.00	48.86	-3.54	45.32	54.00	-8.68	AVG
7323.00	57.48	-0.81	56.67	74.00	-17.33	peak
7323.00	41.12	-0.81	40.31	54.00	-13.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	57.10	-3.43	53.67	74.00	-20.33	peak
4960	47.21	-3.44	43.77	54.00	-10.23	AVG
7440	60.89	-0.77	60.12	74.00	-13.88	peak
7440	40.12	-0.77	39.35	54.00	-14.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.16	-3.43	54.73	74.00	-19.27	peak
4960	48.22	-3.44	44.78	54.00	-9.22	AVG
7440	59.25	-0.77	58.48	74.00	-15.52	peak
7440	39.76	-0.77	38.99	54.00	-15.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.59	-5.81	50.78	74.00	-23.22	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.06	-5.84	49.22	74.00	-24.78	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.89	-5.81	50.08	74.00	-23.92	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.34	-5.84	50.50	74.00	-23.50	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.94	-5.81	50.13	74.00	-23.87	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.13	-6.06	48.07	74.00	-25.93	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.95	-5.81	51.14	74.00	-22.86	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.58	-6.06	47.52	74.00	-26.48	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.82	-5.81	50.01	74.00	-23.99	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.82	-5.84	48.98	74.00	-25.02	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.55	-5.81	50.74	74.00	-23.26	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.60	-5.84	48.76	74.00	-25.24	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.15	-5.81	51.34	74.00	-22.66	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.05	-6.06	49.99	74.00	-24.01	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.04	-5.81	49.23	74.00	-24.77	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.55	-6.06	47.49	74.00	-26.51	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

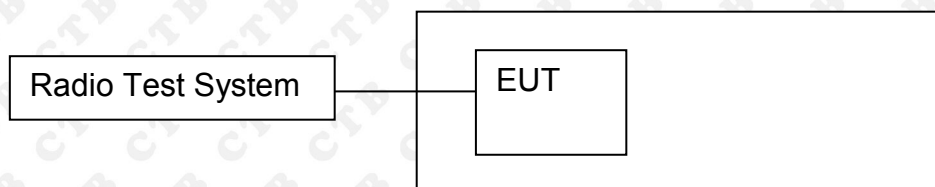


8.2 Limit




In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result

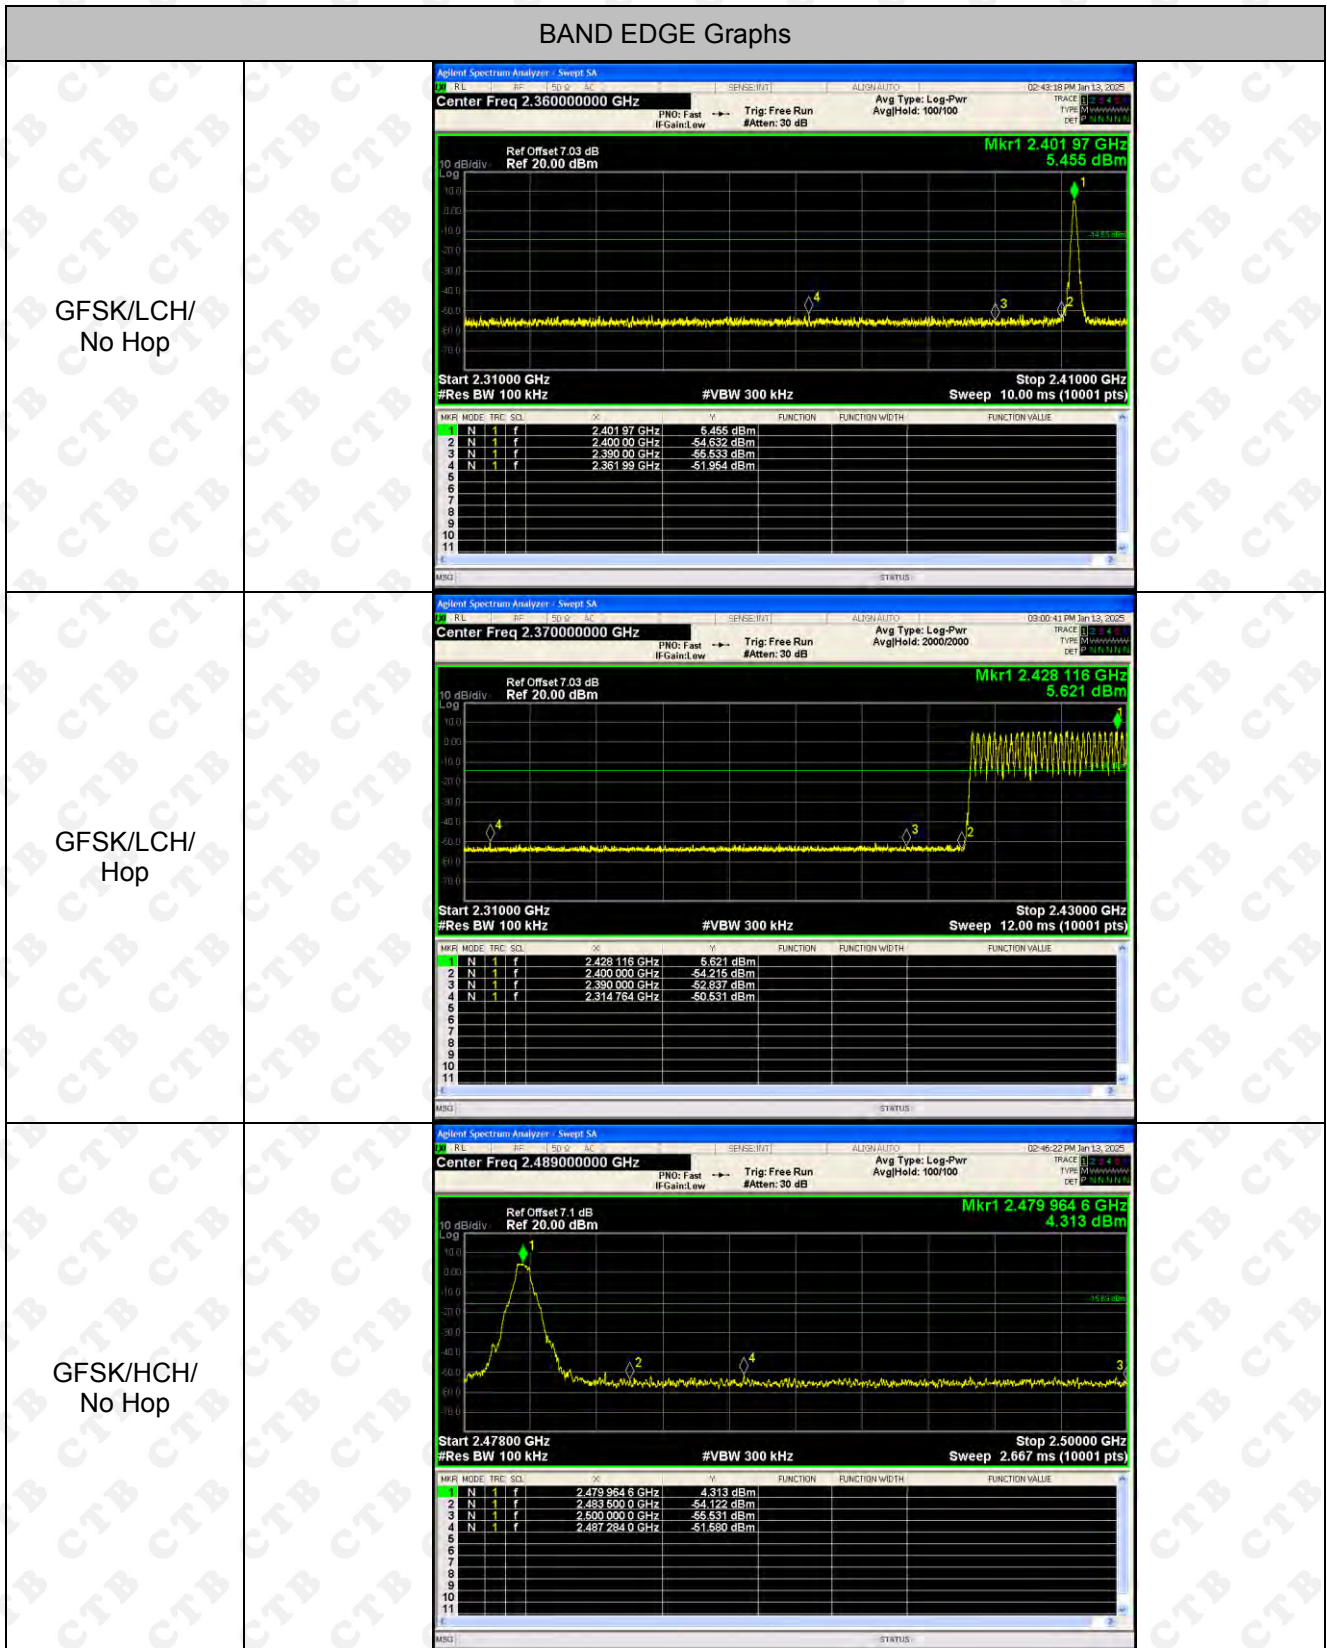

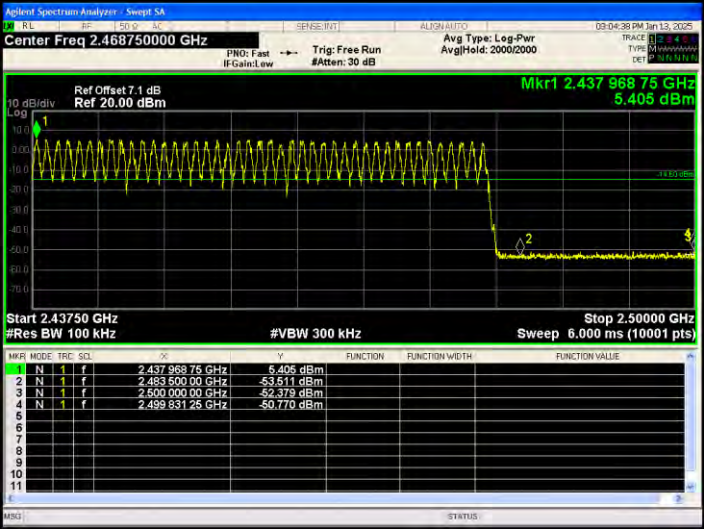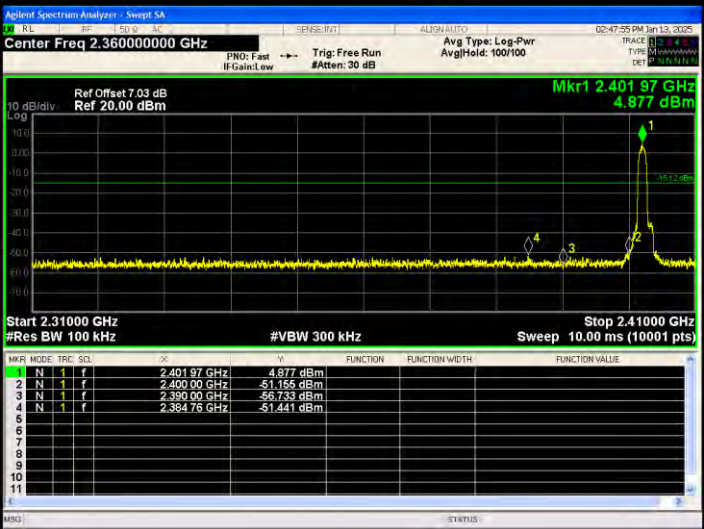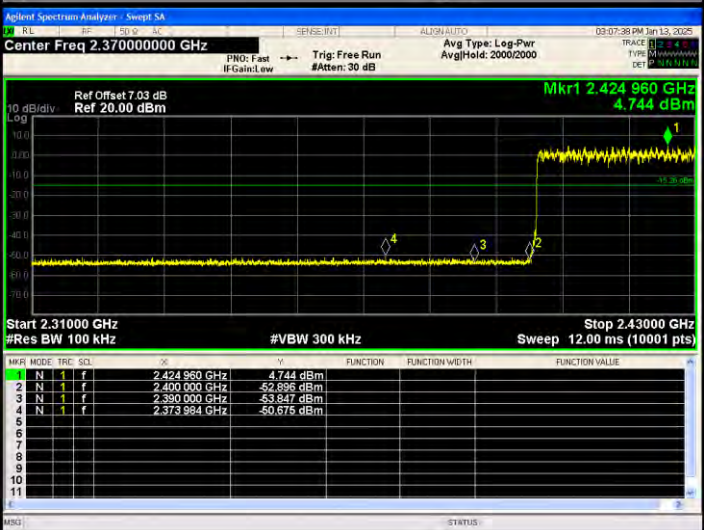
<p>GFSK/HCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.437 988 75 GHz 5.405 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 988 75 GHz</td><td>5.405 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 00 GHz</td><td>-53.611 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-52.379 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.499 831 26 GHz</td><td>-50.770 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 988 75 GHz	5.405 dBm				2	N	1	f	2.483 500 00 GHz	-53.611 dBm				3	N	1	f	2.500 000 00 GHz	-52.379 dBm				4	N	1	f	2.499 831 26 GHz	-50.770 dBm				5									6									7									8									9									10									11								
MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.437 988 75 GHz	5.405 dBm																																																																																																								
2	N	1	f	2.483 500 00 GHz	-53.611 dBm																																																																																																								
3	N	1	f	2.500 000 00 GHz	-52.379 dBm																																																																																																								
4	N	1	f	2.499 831 26 GHz	-50.770 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.401 97 GHz 4.877 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 97 GHz</td><td>4.877 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-51.155 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-56.733 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.384 76 GHz</td><td>-51.441 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 97 GHz	4.877 dBm				2	N	1	f	2.400 00 GHz	-51.155 dBm				3	N	1	f	2.390 00 GHz	-56.733 dBm				4	N	1	f	2.384 76 GHz	-51.441 dBm				5									6									7									8									9									10									11								
MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.401 97 GHz	4.877 dBm																																																																																																								
2	N	1	f	2.400 00 GHz	-51.155 dBm																																																																																																								
3	N	1	f	2.390 00 GHz	-56.733 dBm																																																																																																								
4	N	1	f	2.384 76 GHz	-51.441 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>$\pi/4$DQPSK/LCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.370000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.424 960 GHz 4.744 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.424 960 GHz</td><td>4.744 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-52.898 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-53.847 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.373 984 GHz</td><td>-50.675 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.424 960 GHz	4.744 dBm				2	N	1	f	2.400 000 GHz	-52.898 dBm				3	N	1	f	2.390 000 GHz	-53.847 dBm				4	N	1	f	2.373 984 GHz	-50.675 dBm				5									6									7									8									9									10									11								
MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.424 960 GHz	4.744 dBm																																																																																																								
2	N	1	f	2.400 000 GHz	-52.898 dBm																																																																																																								
3	N	1	f	2.390 000 GHz	-53.847 dBm																																																																																																								
4	N	1	f	2.373 984 GHz	-50.675 dBm																																																																																																								
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

<p>$\pi/4$DQPSK/HCH/ No Hop</p>		<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 015 2 GHz</td> <td>3.635 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 600 0 GHz</td> <td>-57.007 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.600 000 0 GHz</td> <td>-55.096 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.497 936 4 GHz</td> <td>-51.250 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 015 2 GHz	3.635 dBm				2	N	1	f	2.483 600 0 GHz	-57.007 dBm				3	N	1	f	2.600 000 0 GHz	-55.096 dBm				4	N	1	f	2.497 936 4 GHz	-51.250 dBm				
MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.480 015 2 GHz	3.635 dBm																																											
2	N	1	f	2.483 600 0 GHz	-57.007 dBm																																											
3	N	1	f	2.600 000 0 GHz	-55.096 dBm																																											
4	N	1	f	2.497 936 4 GHz	-51.250 dBm																																											
<p>$\pi/4$DQPSK/HCH/ Hop</p>		<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.444 993 75 GHz</td> <td>4.864 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.039 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-53.404 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.491 793 75 GHz</td> <td>-50.023 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.444 993 75 GHz	4.864 dBm				2	N	1	f	2.483 500 0 GHz	-53.039 dBm				3	N	1	f	2.500 000 0 GHz	-53.404 dBm				4	N	1	f	2.491 793 75 GHz	-50.023 dBm				
MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.444 993 75 GHz	4.864 dBm																																											
2	N	1	f	2.483 500 0 GHz	-53.039 dBm																																											
3	N	1	f	2.500 000 0 GHz	-53.404 dBm																																											
4	N	1	f	2.491 793 75 GHz	-50.023 dBm																																											
<p>8DPSK/LCH/No Hop</p>		<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 05 GHz</td> <td>3.334 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-51.715 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.380 00 GHz</td> <td>-55.592 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.369 14 GHz</td> <td>-52.224 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 05 GHz	3.334 dBm				2	N	1	f	2.400 00 GHz	-51.715 dBm				3	N	1	f	2.380 00 GHz	-55.592 dBm				4	N	1	f	2.369 14 GHz	-52.224 dBm				
MFR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.402 05 GHz	3.334 dBm																																											
2	N	1	f	2.400 00 GHz	-51.715 dBm																																											
3	N	1	f	2.380 00 GHz	-55.592 dBm																																											
4	N	1	f	2.369 14 GHz	-52.224 dBm																																											




RF Conducted Spurious Emissions Graphs


GFSK/LCH



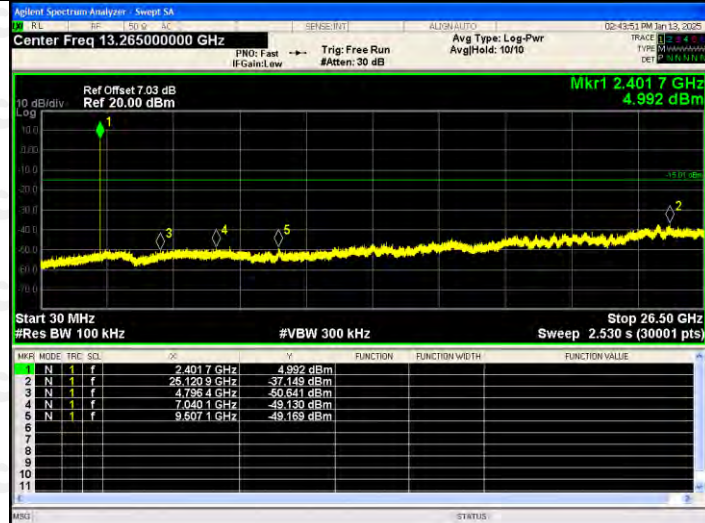



GFSK/MCH

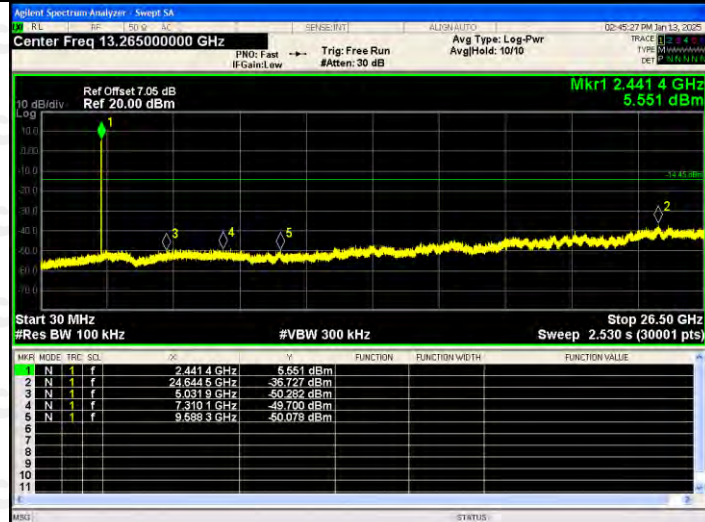

GFSK/HCH

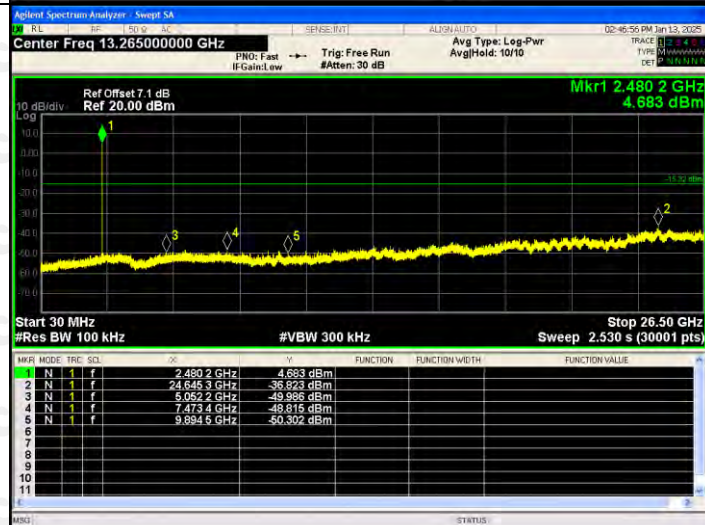

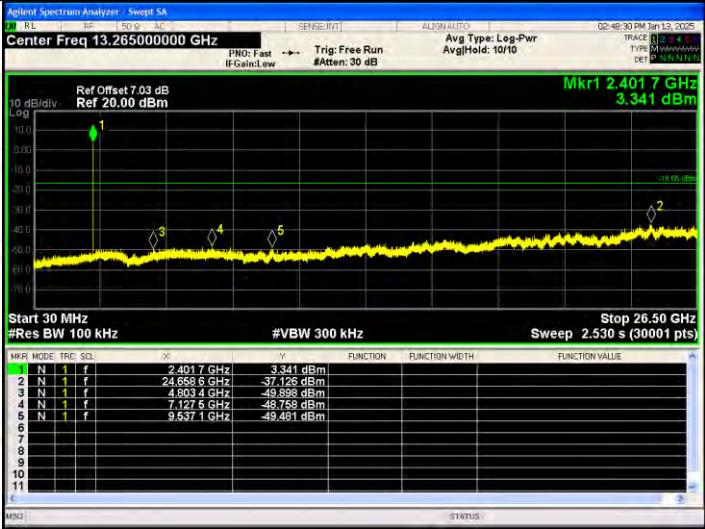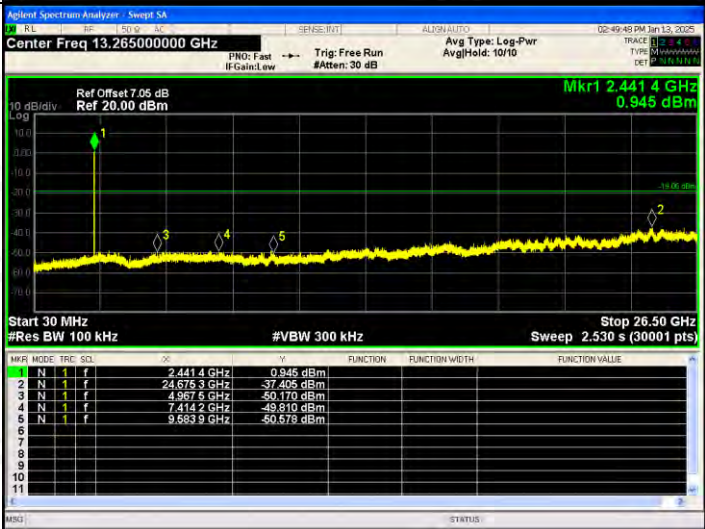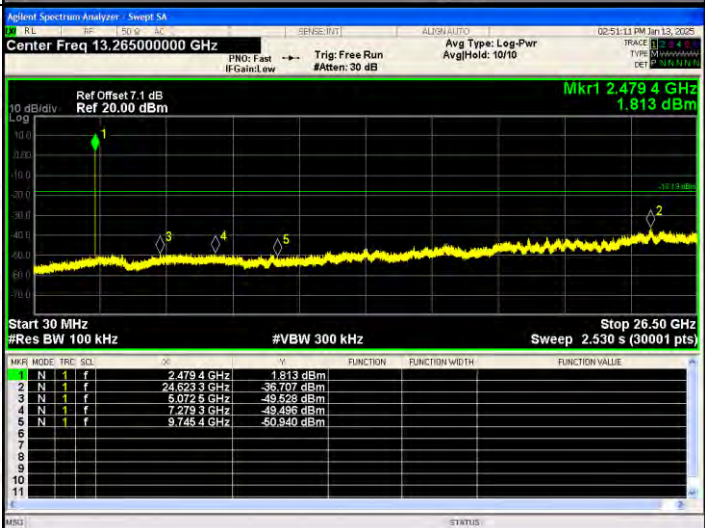
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SCF</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td></td> <td></td> <td></td> <td>3.341 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.653 GHz</td> <td></td> <td></td> <td></td> <td>-37.126 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8034 GHz</td> <td></td> <td></td> <td></td> <td>-49.898 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1275 GHz</td> <td></td> <td></td> <td></td> <td>-48.768 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5371 GHz</td> <td></td> <td></td> <td></td> <td>-49.481 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SCF	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz				3.341 dBm	2	N	1	f	24.653 GHz				-37.126 dBm	3	N	1	f	4.8034 GHz				-49.898 dBm	4	N	1	f	7.1275 GHz				-48.768 dBm	5	N	1	f	9.5371 GHz				-49.481 dBm
MNR	MODE	TRF	SCF	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz				3.341 dBm																																															
2	N	1	f	24.653 GHz				-37.126 dBm																																															
3	N	1	f	4.8034 GHz				-49.898 dBm																																															
4	N	1	f	7.1275 GHz				-48.768 dBm																																															
5	N	1	f	9.5371 GHz				-49.481 dBm																																															
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SCF</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td></td> <td></td> <td></td> <td>0.945 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.673 GHz</td> <td></td> <td></td> <td></td> <td>-37.485 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9675 GHz</td> <td></td> <td></td> <td></td> <td>-50.170 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4142 GHz</td> <td></td> <td></td> <td></td> <td>-49.810 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5839 GHz</td> <td></td> <td></td> <td></td> <td>-50.678 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SCF	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz				0.945 dBm	2	N	1	f	24.673 GHz				-37.485 dBm	3	N	1	f	4.9675 GHz				-50.170 dBm	4	N	1	f	7.4142 GHz				-49.810 dBm	5	N	1	f	9.5839 GHz				-50.678 dBm
MNR	MODE	TRF	SCF	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz				0.945 dBm																																															
2	N	1	f	24.673 GHz				-37.485 dBm																																															
3	N	1	f	4.9675 GHz				-50.170 dBm																																															
4	N	1	f	7.4142 GHz				-49.810 dBm																																															
5	N	1	f	9.5839 GHz				-50.678 dBm																																															
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SCF</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4794 GHz</td> <td></td> <td></td> <td></td> <td>1.813 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.693 GHz</td> <td></td> <td></td> <td></td> <td>-36.707 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0726 GHz</td> <td></td> <td></td> <td></td> <td>-49.528 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2793 GHz</td> <td></td> <td></td> <td></td> <td>-49.496 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7454 GHz</td> <td></td> <td></td> <td></td> <td>-50.940 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SCF	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4794 GHz				1.813 dBm	2	N	1	f	24.693 GHz				-36.707 dBm	3	N	1	f	5.0726 GHz				-49.528 dBm	4	N	1	f	7.2793 GHz				-49.496 dBm	5	N	1	f	9.7454 GHz				-50.940 dBm
MNR	MODE	TRF	SCF	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4794 GHz				1.813 dBm																																															
2	N	1	f	24.693 GHz				-36.707 dBm																																															
3	N	1	f	5.0726 GHz				-49.528 dBm																																															
4	N	1	f	7.2793 GHz				-49.496 dBm																																															
5	N	1	f	9.7454 GHz				-50.940 dBm																																															
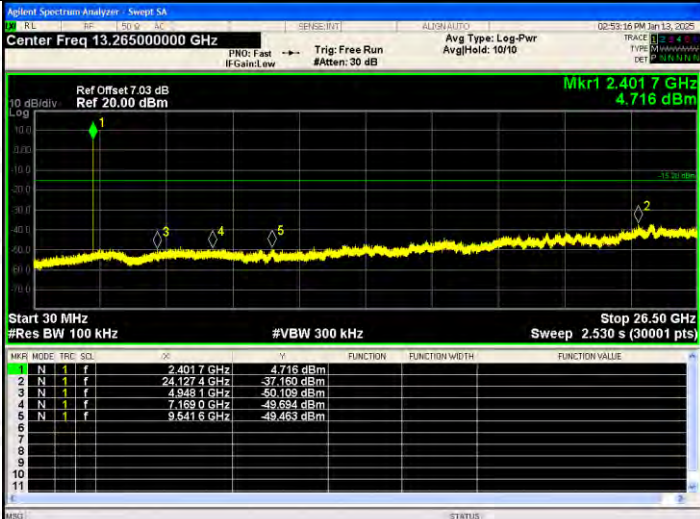
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>POW</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4017 GHz</td> <td>4.716 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.1274 GHz</td> <td>-37.160 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.9481 GHz</td> <td>-50.109 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.1690 GHz</td> <td>-49.694 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.6416 GHz</td> <td>-49.463 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4017 GHz	4.716 dBm				2	N	24.1274 GHz	-37.160 dBm				3	N	4.9481 GHz	-50.109 dBm				4	N	7.1690 GHz	-49.694 dBm				5	N	9.6416 GHz	-49.463 dBm			
MNR	MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4017 GHz	4.716 dBm																																								
2	N	24.1274 GHz	-37.160 dBm																																								
3	N	4.9481 GHz	-50.109 dBm																																								
4	N	7.1690 GHz	-49.694 dBm																																								
5	N	9.6416 GHz	-49.463 dBm																																								
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>POW</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4414 GHz</td> <td>3.344 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.6896 GHz</td> <td>-36.372 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.7522 GHz</td> <td>-49.399 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.4804 GHz</td> <td>-49.112 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.8698 GHz</td> <td>-50.027 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4414 GHz	3.344 dBm				2	N	24.6896 GHz	-36.372 dBm				3	N	4.7522 GHz	-49.399 dBm				4	N	7.4804 GHz	-49.112 dBm				5	N	9.8698 GHz	-50.027 dBm			
MNR	MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4414 GHz	3.344 dBm																																								
2	N	24.6896 GHz	-36.372 dBm																																								
3	N	4.7522 GHz	-49.399 dBm																																								
4	N	7.4804 GHz	-49.112 dBm																																								
5	N	9.8698 GHz	-50.027 dBm																																								
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>POW</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4802 GHz</td> <td>1.049 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.6659 GHz</td> <td>-36.610 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>5.0955 GHz</td> <td>-50.092 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.5995 GHz</td> <td>-49.432 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.9598 GHz</td> <td>-50.203 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4802 GHz	1.049 dBm				2	N	24.6659 GHz	-36.610 dBm				3	N	5.0955 GHz	-50.092 dBm				4	N	7.5995 GHz	-49.432 dBm				5	N	9.9598 GHz	-50.203 dBm			
MNR	MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4802 GHz	1.049 dBm																																								
2	N	24.6659 GHz	-36.610 dBm																																								
3	N	5.0955 GHz	-50.092 dBm																																								
4	N	7.5995 GHz	-49.432 dBm																																								
5	N	9.9598 GHz	-50.203 dBm																																								

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

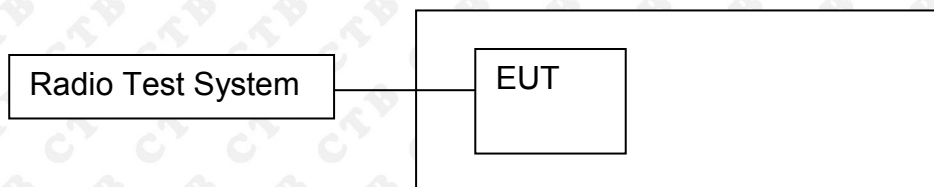

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	5.814	20.97	PASS
	MCH	5.621	20.97	PASS
	HCH	4.784	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	7.693	20.97	PASS
	MCH	7.472	20.97	PASS
	HCH	6.573	20.97	PASS
EDR mode (8DPSK)	LCH	7.800	20.97	PASS
	MCH	7.734	20.97	PASS
	HCH	7.018	20.97	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.402 05 GHz 5.814 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.440 96 GHz 5.621 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.479 94 GHz 4.784 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>
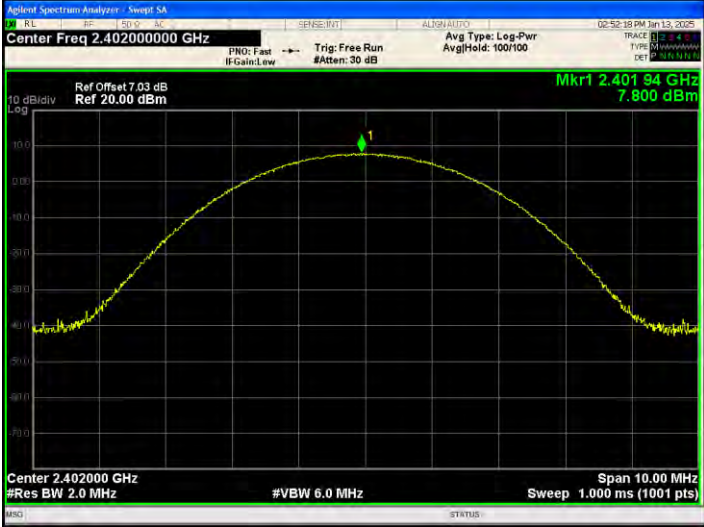
<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.402 03 GHz 7.693 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.441 13 GHz 7.472 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.479 74 GHz 6.573 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>8DPSK/LCH</p>	
<p>8DPSK /MCH</p>	
<p>8DPSK /HCH</p>	

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

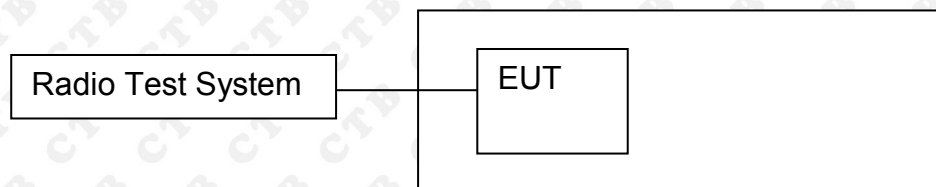

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.935	PASS
	Mid channel	0.935	PASS
	High channel	0.930	PASS
π/4DQPSK	Low channel	1.317	PASS
	Mid channel	1.315	PASS
	High channel	1.328	PASS
8DPSK	Low channel	1.316	PASS
	Mid channel	1.304	PASS
	High channel	1.315	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.03 dB Ref 27.03 dBm</p> <p>Mkr3 2.402418 GHz -17.137 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 798.75 kHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -49.088 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 935.4 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.05 dB Ref 27.05 dBm</p> <p>Mkr3 2.441421 GHz -16.929 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 816.61 kHz</p> <p>Total Power 11.6 dBm</p> <p>Transmit Freq Error -46.562 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 934.6 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.1 dB Ref 27.10 dBm</p> <p>Mkr3 2.480418 GHz -17.767 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 834.23 kHz</p> <p>Total Power 10.9 dBm</p> <p>Transmit Freq Error -46.928 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 930.1 kHz</p> <p>x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3: 2.402615 GHz</p> <p>-17.843 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td>1.1887 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-43.853 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.317 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	1.1887 MHz			Transmit Freq Error	OBW Power	99.00 %	-43.853 kHz			x dB Bandwidth	x dB	-20.00 dB	1.317 MHz		
Occupied Bandwidth	Total Power	12.3 dBm																	
1.1887 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-43.853 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.317 MHz																			
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB</p> <p>Ref: 27.05 dBm</p> <p>Mkr3: 2.441614 GHz</p> <p>-17.579 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td>1.1815 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-43.844 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.315 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.2 dBm	1.1815 MHz			Transmit Freq Error	OBW Power	99.00 %	-43.844 kHz			x dB Bandwidth	x dB	-20.00 dB	1.315 MHz		
Occupied Bandwidth	Total Power	12.2 dBm																	
1.1815 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-43.844 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.315 MHz																			
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB</p> <p>Ref: 27.10 dBm</p> <p>Mkr3: 2.480618 GHz</p> <p>-20.142 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.3 dBm</td> </tr> <tr> <td>1.1824 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-45.828 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.328 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	11.3 dBm	1.1824 MHz			Transmit Freq Error	OBW Power	99.00 %	-45.828 kHz			x dB Bandwidth	x dB	-20.00 dB	1.328 MHz		
Occupied Bandwidth	Total Power	11.3 dBm																	
1.1824 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-45.828 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.328 MHz																			

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3: 2.402616 GHz</p> <p>-19.206 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td>1.1958 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-41.632 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.316 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	1.1958 MHz			Transmit Freq Error	OBW Power	99.00 %	-41.632 kHz			x dB Bandwidth	x dB	-20.00 dB	1.316 MHz			
Occupied Bandwidth	Total Power	12.4 dBm																		
1.1958 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-41.632 kHz																				
x dB Bandwidth	x dB	-20.00 dB																		
1.316 MHz																				
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB</p> <p>Ref: 27.05 dBm</p> <p>Mkr3: 2.441608 GHz</p> <p>-19.249 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td>1.1931 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-44.216 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.304 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	1.1931 MHz			Transmit Freq Error	OBW Power	99.00 %	-44.216 kHz			x dB Bandwidth	x dB	-20.00 dB	1.304 MHz			
Occupied Bandwidth	Total Power	12.4 dBm																		
1.1931 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-44.216 kHz																				
x dB Bandwidth	x dB	-20.00 dB																		
1.304 MHz																				
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB</p> <p>Ref: 27.10 dBm</p> <p>Mkr3: 2.480608 GHz</p> <p>-18.318 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.4 dBm</td> </tr> <tr> <td>1.1952 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-49.780 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.315 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	11.4 dBm	1.1952 MHz			Transmit Freq Error	OBW Power	99.00 %	-49.780 kHz			x dB Bandwidth	x dB	-20.00 dB	1.315 MHz			
Occupied Bandwidth	Total Power	11.4 dBm																		
1.1952 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-49.780 kHz																				
x dB Bandwidth	x dB	-20.00 dB																		
1.315 MHz																				

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

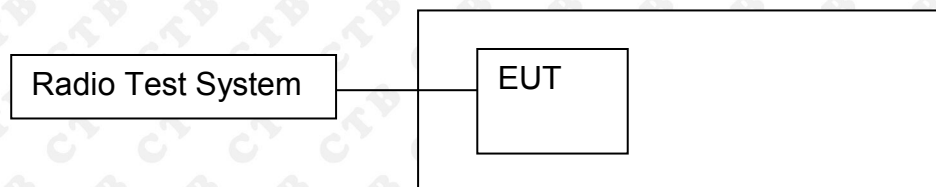

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.627	PASS
GFSK	MCH	0.998	0.631	PASS
GFSK	HCH	1.004	0.631	PASS
$\pi/4$ DQPSK	LCH	1.004	0.899	PASS
$\pi/4$ DQPSK	MCH	1.006	0.894	PASS
$\pi/4$ DQPSK	HCH	1.002	0.903	PASS
8DPSK	LCH	1.002	0.884	PASS
8DPSK	MCH	1.006	0.879	PASS
8DPSK	HCH	1.008	0.875	PASS

Test Graph

Graphs


<p>GFSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00000000 MHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz 0.250 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>SQL</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ 1</td> <td>f (dB)</td> <td>1.000 MHz (dB)</td> <td>0.250 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F 1</td> <td>f</td> <td>2.401860 GHz</td> <td>-1.192 dBm</td> <td></td> </tr> </tbody> </table>	MKR MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 1	f (dB)	1.000 MHz (dB)	0.250 dB		2	F 1	f	2.401860 GHz	-1.192 dBm	
MKR MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE														
1	Δ 1	f (dB)	1.000 MHz (dB)	0.250 dB															
2	F 1	f	2.401860 GHz	-1.192 dBm															
<p>GFSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 998.000000 kHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>ΔMkr1 998 kHz 0.332 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>SQL</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ 2</td> <td>f (dB)</td> <td>998 kHz (dB)</td> <td>0.332 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F 1</td> <td>f</td> <td>2.440860 GHz</td> <td>-0.821 dBm</td> <td></td> </tr> </tbody> </table>	MKR MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	f (dB)	998 kHz (dB)	0.332 dB		2	F 1	f	2.440860 GHz	-0.821 dBm	
MKR MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE														
1	Δ 2	f (dB)	998 kHz (dB)	0.332 dB															
2	F 1	f	2.440860 GHz	-0.821 dBm															
<p>GFSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00400000 MHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.004 MHz 0.678 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>SQL</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ 2</td> <td>f (dB)</td> <td>1.004 MHz (dB)</td> <td>0.678 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F 1</td> <td>f</td> <td>2.478852 GHz</td> <td>-1.061 dBm</td> <td></td> </tr> </tbody> </table>	MKR MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	f (dB)	1.004 MHz (dB)	0.678 dB		2	F 1	f	2.478852 GHz	-1.061 dBm	
MKR MODE	FREQ	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE														
1	Δ 2	f (dB)	1.004 MHz (dB)	0.678 dB															
2	F 1	f	2.478852 GHz	-1.061 dBm															

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.004000000 MHz Ref Offset 7.03 dB Ref 20.00 dBm ΔMkr1 1.004 MHz -0.202 dB Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>f</td> <td>(A)</td> <td>1.004 MHz (A)</td> <td>-0.202 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td></td> <td>2.492 018 GHz</td> <td>-1.138 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	f	(A)	1.004 MHz (A)	-0.202 dB			2	F	f		2.492 018 GHz	-1.138 dBm		
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	f	(A)	1.004 MHz (A)	-0.202 dB																				
2	F	f		2.492 018 GHz	-1.138 dBm																				
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.006000000 MHz Ref Offset 7.05 dB Ref 20.00 dBm ΔMkr1 1.006 MHz 0.101 dB Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>f</td> <td>(A)</td> <td>1.006 MHz (A)</td> <td>0.101 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td></td> <td>2.441 018 GHz</td> <td>-1.444 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	f	(A)	1.006 MHz (A)	0.101 dB			2	F	f		2.441 018 GHz	-1.444 dBm		
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	f	(A)	1.006 MHz (A)	0.101 dB																				
2	F	f		2.441 018 GHz	-1.444 dBm																				
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.002000000 MHz Ref Offset 7.1 dB Ref 20.00 dBm ΔMkr1 1.002 MHz -0.570 dB Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>f</td> <td>(A)</td> <td>1.002 MHz (A)</td> <td>-0.570 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>f</td> <td></td> <td>2.479 016 GHz</td> <td>-1.247 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	f	(A)	1.002 MHz (A)	-0.570 dB			2	F	f		2.479 016 GHz	-1.247 dBm		
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	f	(A)	1.002 MHz (A)	-0.570 dB																				
2	F	f		2.479 016 GHz	-1.247 dBm																				

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.00200000 MHz Ref Offset 7.03 dB Ref 20.00 dBm ΔMkr1 1.002 MHz -0.002 dB Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>F</th> <th>(A)</th> <th>(A)</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.002 MHz</td> <td>(A)</td> <td>-0.002 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.492 020 GHz</td> <td></td> <td>-1.288 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	F	F	(A)	(A)	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)	-0.002 dB				2	F	1	f		2.492 020 GHz		-1.288 dBm			
MKR	MODE	TRC	SCL	F	F	(A)	(A)	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(A)	1.002 MHz	(A)	-0.002 dB																											
2	F	1	f		2.492 020 GHz		-1.288 dBm																											
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.006000000 MHz Ref Offset 7.05 dB Ref 20.00 dBm ΔMkr1 1.006 MHz -0.533 dB Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>F</th> <th>(A)</th> <th>(A)</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.006 MHz</td> <td>(A)</td> <td>-0.533 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 018 GHz</td> <td></td> <td>-0.501 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	F	F	(A)	(A)	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.006 MHz	(A)	-0.533 dB				2	F	1	f		2.441 018 GHz		-0.501 dBm			
MKR	MODE	TRC	SCL	F	F	(A)	(A)	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(A)	1.006 MHz	(A)	-0.533 dB																											
2	F	1	f		2.441 018 GHz		-0.501 dBm																											
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.008000000 MHz Ref Offset 7.1 dB Ref 20.00 dBm ΔMkr1 1.008 MHz -0.788 dB Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>F</th> <th>(A)</th> <th>(A)</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.008 MHz</td> <td>(A)</td> <td>-0.788 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 018 GHz</td> <td></td> <td>-1.356 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	F	F	(A)	(A)	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.008 MHz	(A)	-0.788 dB				2	F	1	f		2.479 018 GHz		-1.356 dBm			
MKR	MODE	TRC	SCL	F	F	(A)	(A)	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(A)	1.008 MHz	(A)	-0.788 dB																											
2	F	1	f		2.479 018 GHz		-1.356 dBm																											

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

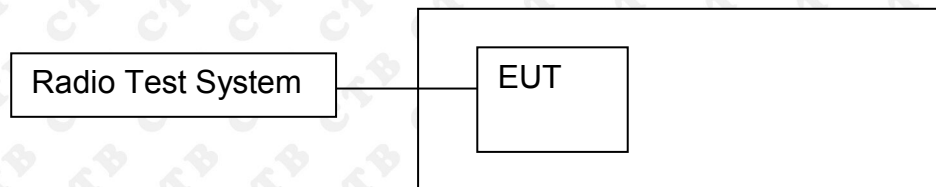

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Test Graph

Graphs


GFSK/Hop

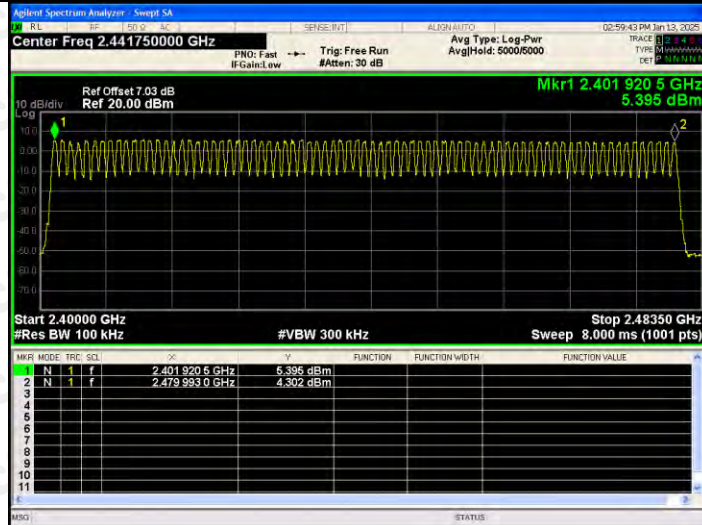

π /4DQPSK/Hop

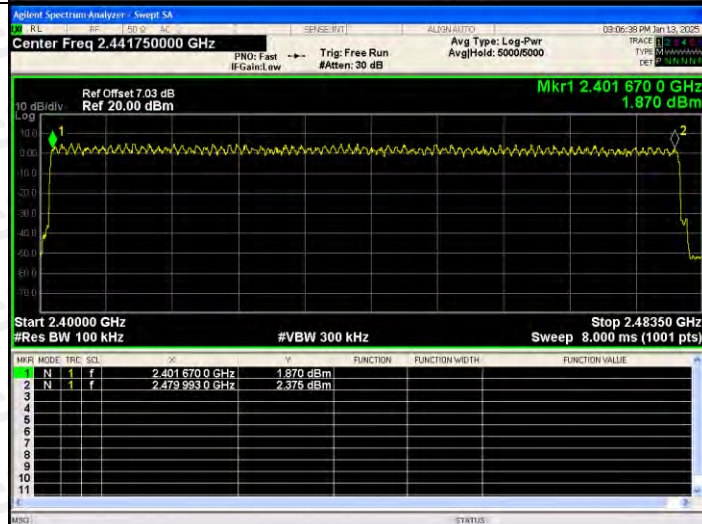


8DPSK/Hop

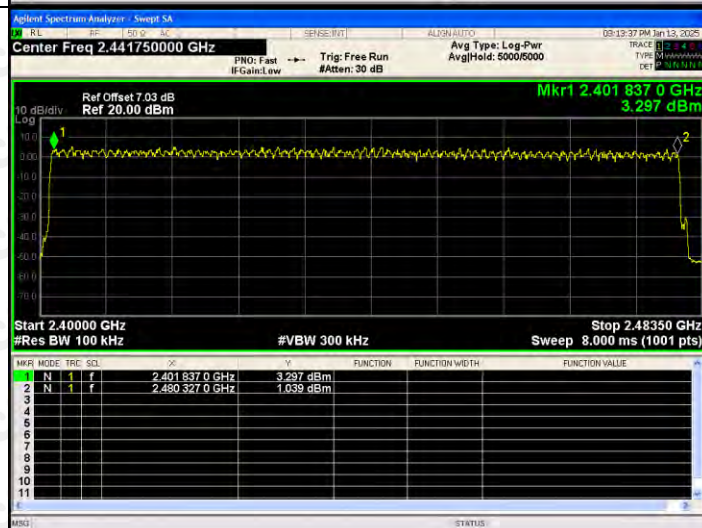

13. DWELL TIME

13.1 Block Diagram Of Test Setup

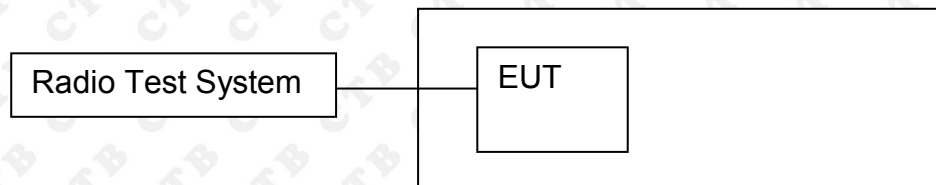

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.368	117.76	400	PASS
	DH1	MCH	0.367	117.44	400	PASS
	DH1	HCH	0.368	117.76	400	PASS
	DH3	LCH	1.628	260.48	400	PASS
	DH3	MCH	1.63	260.8	400	PASS
	DH3	HCH	1.629	260.64	400	PASS
	DH5	LCH	2.879	307.093	400	PASS
	DH5	MCH	2.88	307.2	400	PASS
	DH5	HCH	2.88	307.2	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


Test Graph



GFSK_DH3/LCH

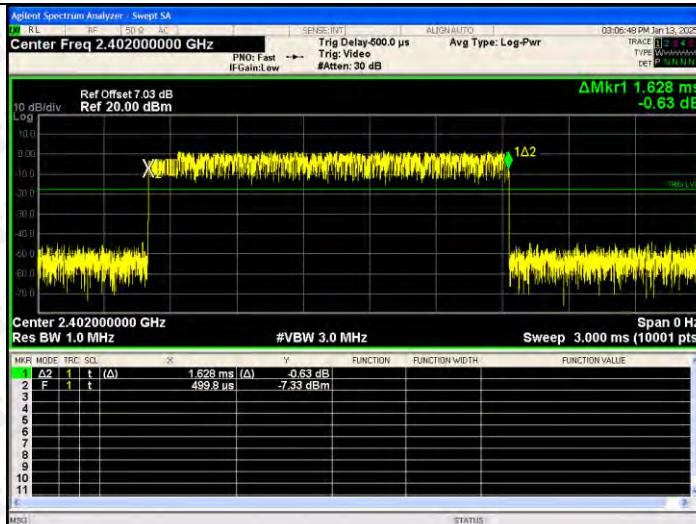


GFSK_DH3/MCH

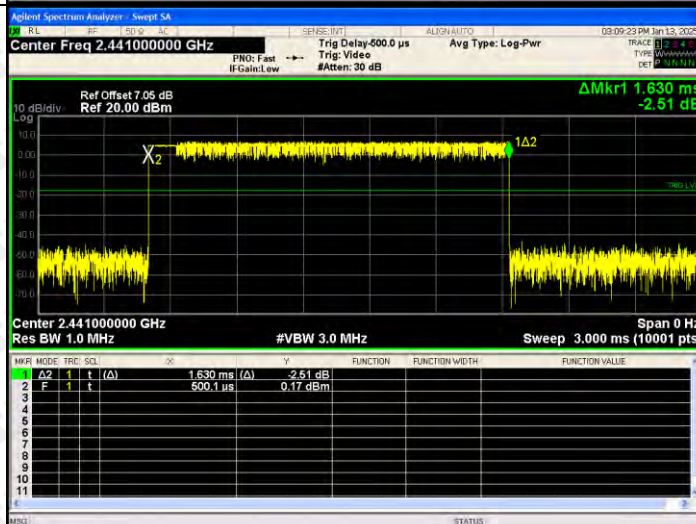

GFSK_DH3/HCH



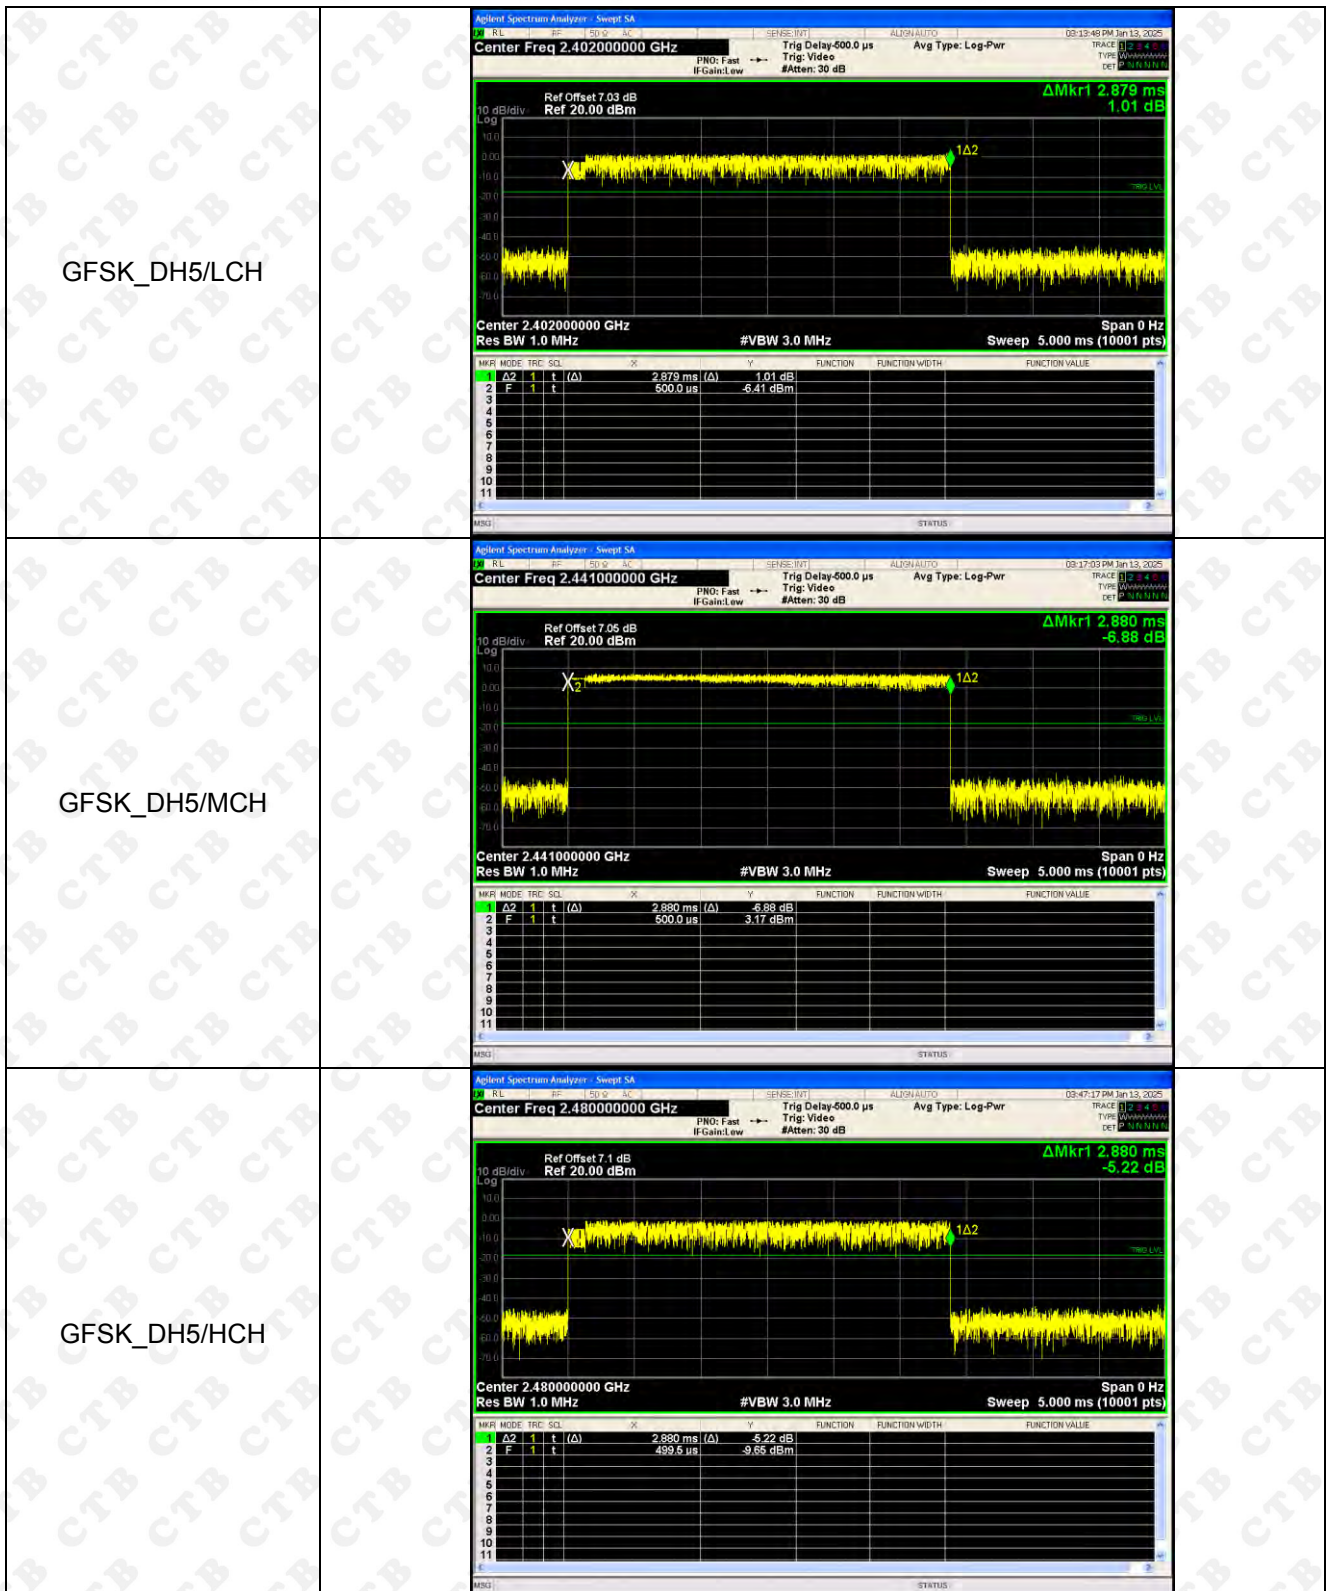

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

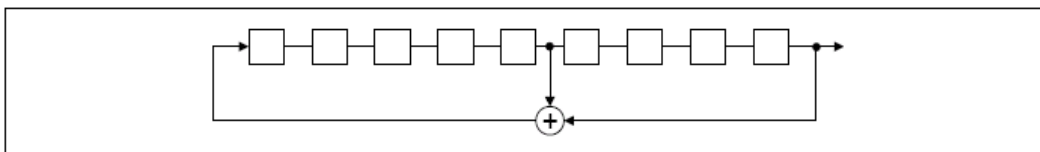

An example of Pseudorandom Frequency Hopping Sequence as follow:

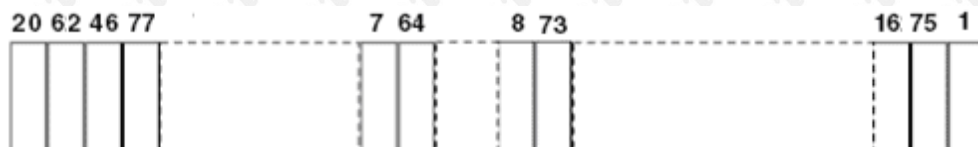

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The EUT antenna is Ceramic antenna. The best case gain of the antenna is 2.67dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

Below 1G



Above 1G



Conducted emission



※※※※ END OF REPORT ※※※※