

Getting Started


Intercom Connection

The Tusk Frequency can be in a group of up to 15 units. This allows for seamless communication to you and your group. Connection can be done by adding units to your current group or by finding a new group to connect to.

✚ Adding to current intercom group




Hold Mute for 5 Seconds this will make the LED flash blue/red. Then click the Mute button once, this will make the LED flash White. Once the Unit is flashing white it is able to accept new members into the current group. This will last 90 Seconds.

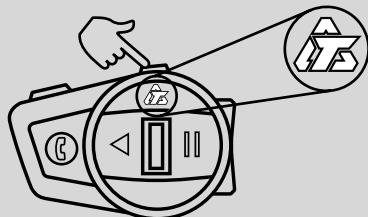

WiFi Intercom Group Searching



Hold Mute for 5 Seconds, the Unit will flash red and blue for 90 Seconds, showing that it is searching for a current group. This process is to join a group.




Once all units are flashing white, hold mute 5 seconds to close out pairing on each unit, or let time out.

Getting Started

Intercom

While communicating with the Tusk Frequency intercom, the unit uses Digital Audio Suppression to eliminate Wind, Engine Noise, and ambient background noise.

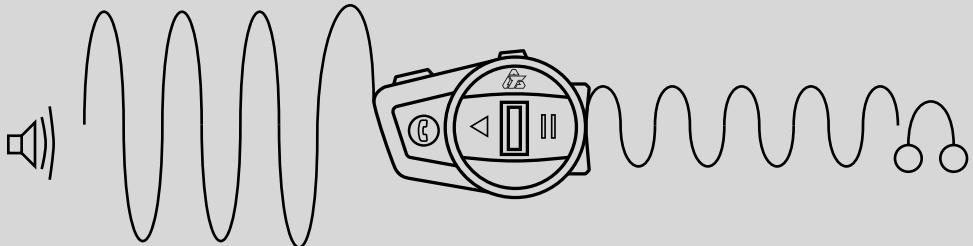


This D.A.S. system is fantastic for high speed applications like side by sides and motorcycle riding. Having these sounds suppressed dramatically help communication.

Grouping Reset

WHY - If the current group needs to be cleared from the Unit. Device will forget current group.

HOW - Hold the Mute button for 10 seconds, the LED indicator will begin flashing red/blue while holding the button. Once the Unit turns white, release the Button then hold it again for another 5 seconds. The white led status will change once this has finished clearing the group.




 10 Sec + 5 Sec -Unit will clear the group connection.

Factory Reset

WHY - If you wish to reset all variables and connections back to factory default

HOW - While the unit is on, Hold the PTT and Mute button for 10 seconds. This will reset all changeable unit settings back to factory defaults, like Volume, Connections, Mic detection, and other changeable items



 10 Sec -Unit wont flash green when reset.

The Unit/La Unidad

Unit Breakdown



L.E.D Indicator

Displays the status of the Tusk Intercom.

No Connection

 LED will flash every 3 Seconds

The Unit does not have any connection to any device or other unit.



Power Off

 LED will flash Red twice per second

The unit is shut down.



Phone Connection

 LED will flash every 3 Seconds

The Unit has a connection to a Bluetooth Device.



Unit Connection

 LED will flash every 3 Seconds

The Unit has intercom connection to another unit/group.



Phone and Unit Connection

The unit has a connection to a phone and to another unit/group.



Add New Intercoms

The Unit is looking for a new unit to add to the current intercom group.



Updating Firmware

The Unit is in the process of being updated.



Battery Level Low

The battery is below 20%



Battery Level Very Low

The battery is below 10%



Information

Charging

It is recommended that you fully charge the Tusk Intercom before use.

Charge Time	Percent	Time
10 Minutes	20%	1 Hour
30 Minutes	50%	2 Hours
1 Hour	80%	4 Hour
1.5 Hours	100%	8 Hour

Wireless Updates

For the best Tusk Frequency experience, we recommend consistency checking for updates. Ensuring the Tusk Unit stays up to date can make your user experience much smoother.

Operating Temperatures

To ensure best use of the Tusk Frequency Intercom, it is best to operate the unit at safe temperatures

Nominal operating range Below 0°C (32°F)
Nominal operating range 0-70°C (32°F-158°F)
Nominal operating range Above 70°C (158°F)

Information

IP Rating

Dust Protection: The device is completely protected against dust ingress. This ensures that no dust particles can enter the enclosure, providing full protection for internal components.

- **Water Protection:** The device can withstand immersion in water up to 1 meter deep for up to 30 minutes. This means it is safe to use in environments where it might be exposed to temporary submersion or heavy rain.

Usage Recommendations:

- Ensure all seals and covers are properly closed before exposing the device to dust or water.
- Do not immerse the device in water deeper than 1 meter or for longer than 30 minutes.
- After exposure to water, dry the device thoroughly before opening any covers or compartments.

Maintenance:

- Regularly check seals and covers for wear and tear.
- Replace any damaged seals to maintain the IP67 protection level

Information

2-Way Radio

Seamless communication with our 2-way radios, boasting an impressive range of up to 50 miles. Whether you're on an adventure or just need to stay in touch, these radios ensure you're never out of reach. By integrating the Tusk Dash Hub with a mobile radio, you can effortlessly connect with someone far away, making it perfect for both personal and professional use.

Radios that support this feature.



Midland
MXT-275



Midland
MXT-575



Vero VGC
VR-N7500

RADIO

INFOGRAPHIC OR IMAGES HERE FOR RADIO

Dash Hub

INFOGRAPHIC OR IMAGES HERE FOR DASH

Information

Copyrights

This product is fully owned and operated by Rocky Mountain ATV/MC.

For further information on this product, please contact us at
rockymountainatv.com

Warranty

This product comes with a warranty that Kevin is going to decide

Information

Proper Disposal

- This product contains a lithium-ion battery.
- Do not dispose of this product in regular household waste or in a fire.
- Contact your local waste management authority to find out how to dispose of the product in your area.



Compliance of Local Laws

This product meets all the requirements of the FCC and has been certified with the FCC.

Information

FCC Statement of Compliance

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: this equipment has been test and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful inference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with guarantee that interference wil not occur in a particular installation. If this equipment does cause harmful interference to radio or television receptions, which is found by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/tv technician for help.

Caution: The user is cautioned that changes or modifications not expressly approved byu the party responsible for compliance could void the user's authority to operate the equipment.

FCC RF Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Information

ISED Statement of Compliance (English)

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Déclaration de conformité ISED (Français)

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : 1) L'appareil ne doit pas produire de brouillage; 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

ISED RF Exposure Statement (English)

This device complies with ISED radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Déclaration d'exposition aux RF de l'ISED (Français)

Cet appareil est conforme aux limites d'exposition aux radiations de l'ISED établies pour un environnement non contrôlé.

Ce transmetteur ne doit pas être co-localisé ou fonctionner en conjonction avec une autre antenne ou un autre transmetteur.

Information