

Appendix

Test Data

for BTEK241227139A01E01

Start date	2025/2/13	Finish date	2025/2/13
Temperature	22.0℃	Humidity	44%
RF specifications	BLE-125 kbps	Test Engineer	Zora



Table of Contents

1. -6dB Bandwidth.....	3
2. 99% Occupied Bandwidth	5
3. Duty Cycle.....	7
4. Peak Output Power	9
5. Power Spectral Density.....	11
6. Bandedge.....	13
7. Spurious Emission.....	15





BTEK241227139A01-T01 S8 2.13

FCC_BLE (Part15.247) Test Data

1. -6dB Bandwidth

Condition	Antenna	Rate	Frequency (MHz)	-6dB BW(kHz)	limit(kHz)	Result
NVNT	ANT1	125 kbps	2402.00	680.93	500	Pass
NVNT	ANT1	125 kbps	2440.00	684.94	500	Pass
NVNT	ANT1	125 kbps	2480.00	695.43	500	Pass

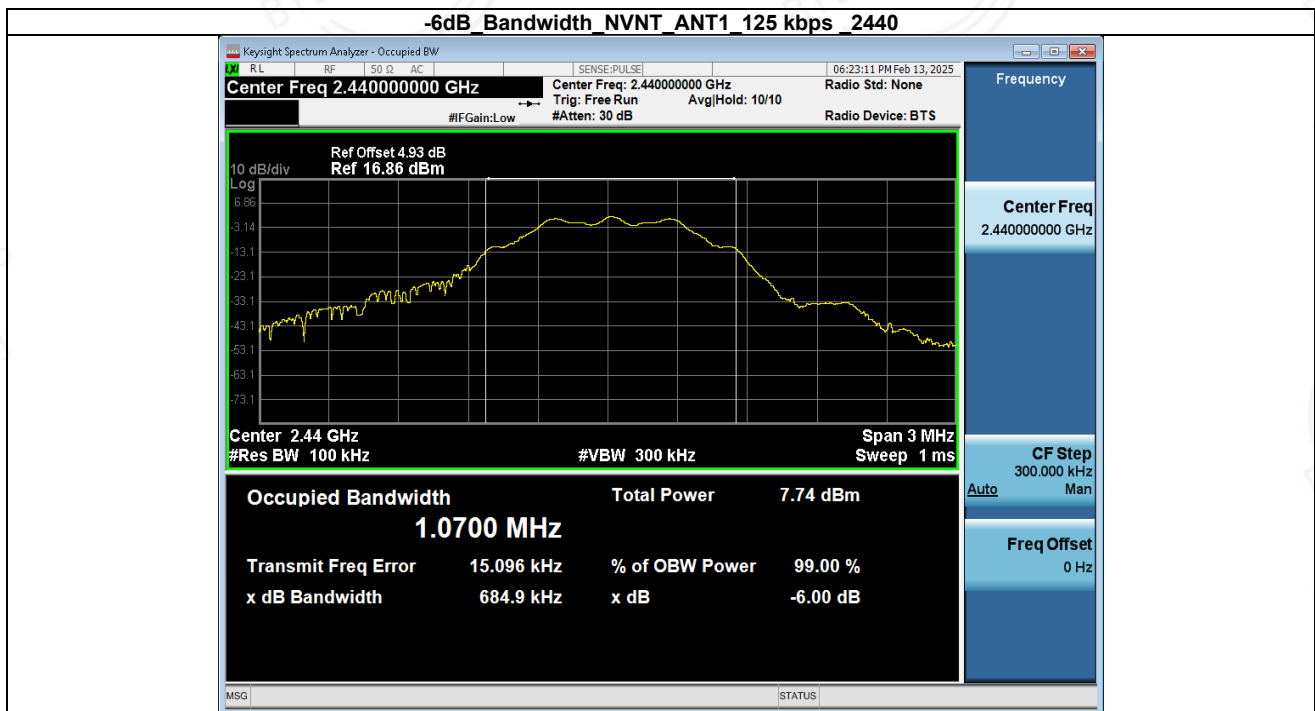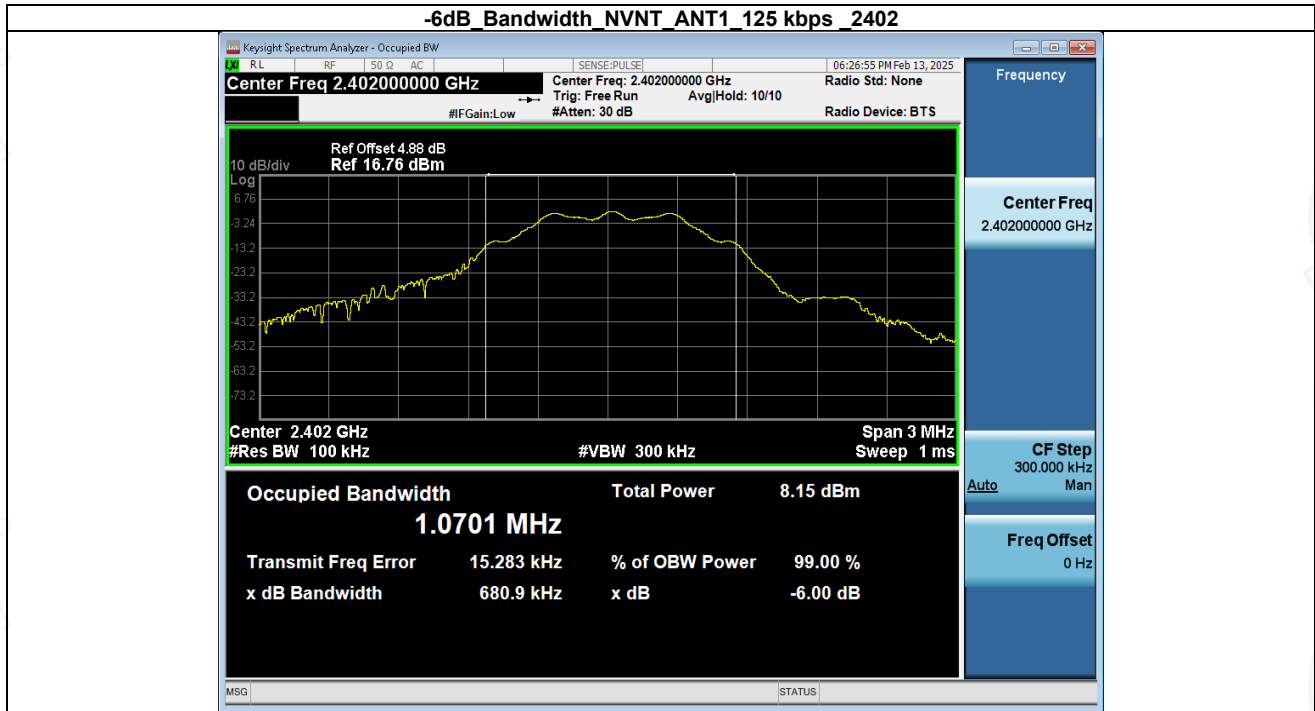





2. 99% Occupied Bandwidth

Condition	Antenna	Rate	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	125 kbps	2402.00	1.049
NVNT	ANT1	125 kbps	2440.00	1.049
NVNT	ANT1	125 kbps	2480.00	1.050

99% Occupied Bandwidth NVNT ANT1 125 kbps 2402

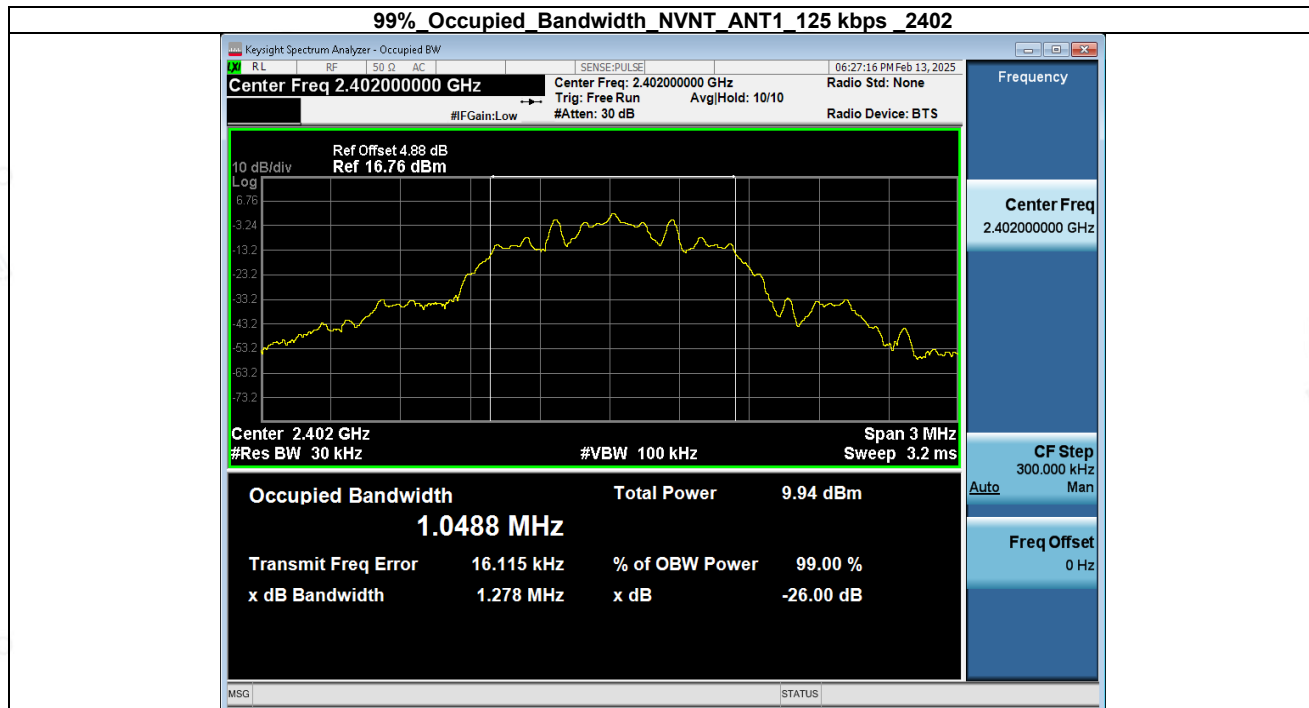

99% Occupied Bandwidth NVNT ANT1 125 kbps 2440

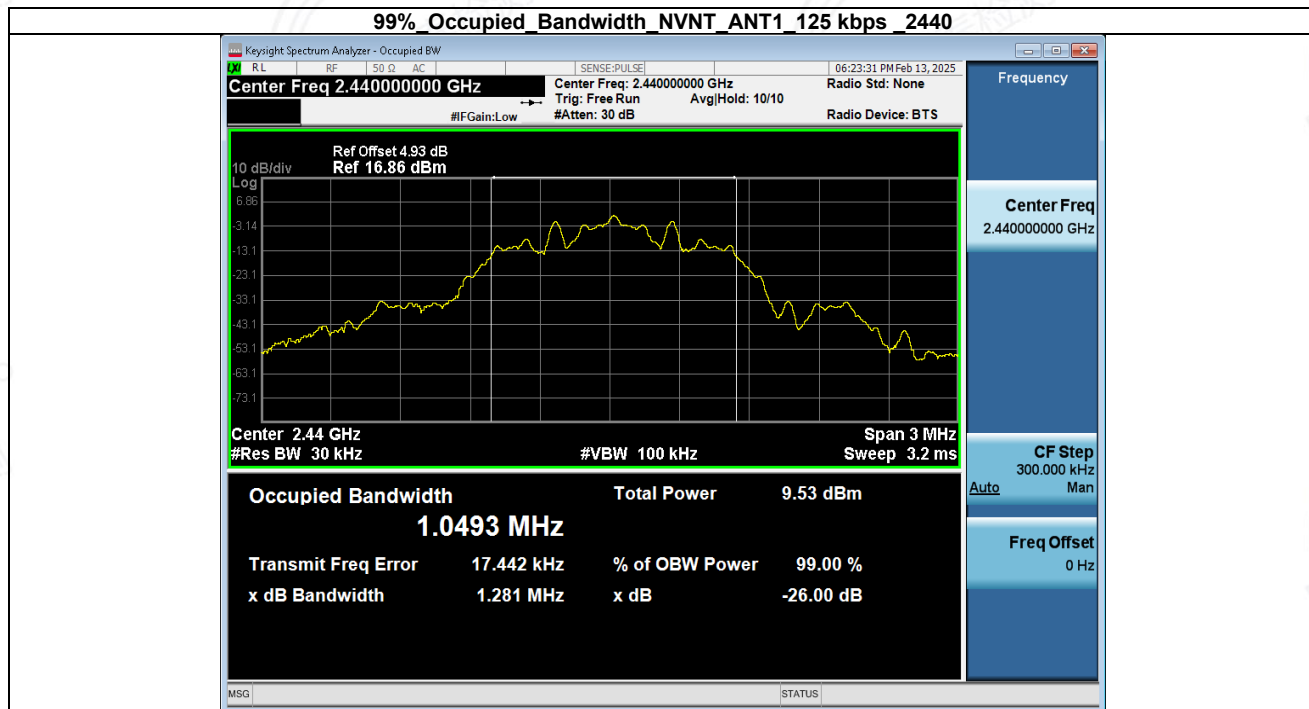



99% Occupied Bandwidth NVNT ANT1 125 kbps 2480






3. Duty Cycle

Condition	Antenna	Rate	Frequency (MHz)	Dutycycle(%)	Duty_factor
NVNT	ANT1	125 kbps	2402.00	56.99	2.44
NVNT	ANT1	125 kbps	2440.00	56.99	2.44
NVNT	ANT1	125 kbps	2480.00	56.78	2.46

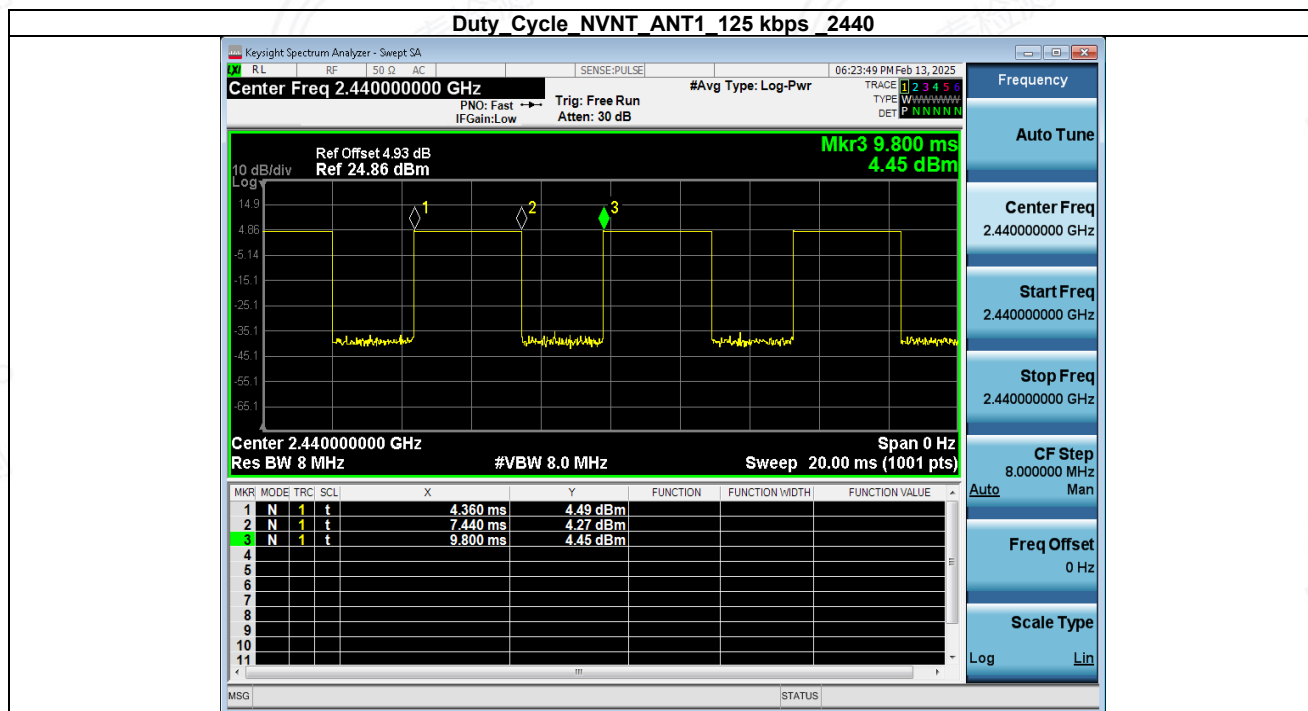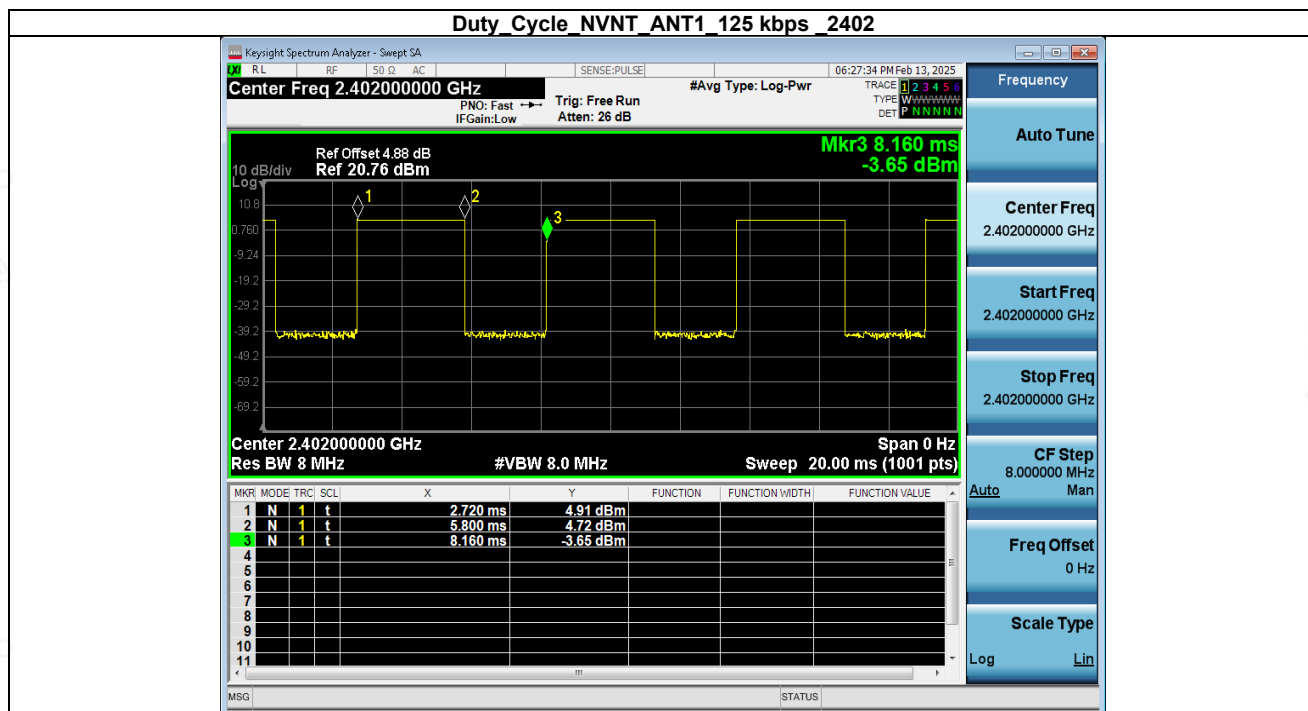

Duty Cycle_NVNT_ANT1_125 kbps_2480



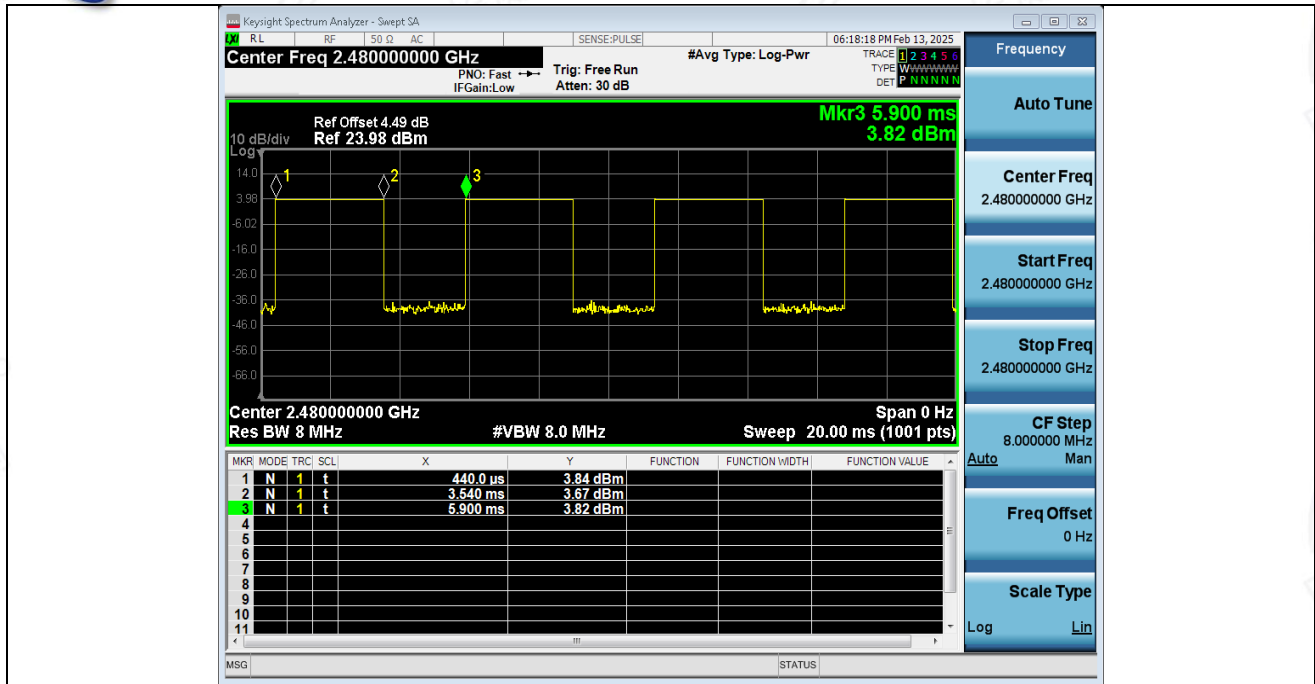

4. Peak Output Power

Condition	Antenna	Rate	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	125 kbps	2402.00	4.78	3.01	1000	Pass
NVNT	ANT1	125 kbps	2440.00	4.36	2.73	1000	Pass
NVNT	ANT1	125 kbps	2480.00	3.78	2.39	1000	Pass

Peak Output Power NVNT_ANT1_125 kbps_2402



Peak Output Power NVNT_ANT1_125 kbps_2440



Peak Output Power NVNT_ANT1_125 kbps_2480





5. Power Spectral Density

Condition	Antenna	Rate	Frequency (MHz)	Power Spectral Density(dBm/3kHz)	Limit(dBm/3kHz)	Result
NVNT	ANT1	125 kbps	2402.00	-1.44	8	Pass
NVNT	ANT1	125 kbps	2440.00	-1.88	8	Pass
NVNT	ANT1	125 kbps	2480.00	-2.61	8	Pass

Power Spectral Density NVNT ANT1 125 kbps 2402



Power Spectral Density NVNT ANT1 125 kbps 2440



Power Spectral Density NVNT ANT1 125 kbps 2480






6. Bandedge

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark_freq(MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	125 kbps	2402.00	2397.780	1.643	-39.569	-18.357	Pass
NVNT	ANT1	125 kbps	2480.00	2483.675	0.443	-40.679	-19.557	Pass

1 Reference_Level_NVNT_ANT1_125_kbps_2402




2 Bandedge_NVNT_ANT1_125_kbps_2402

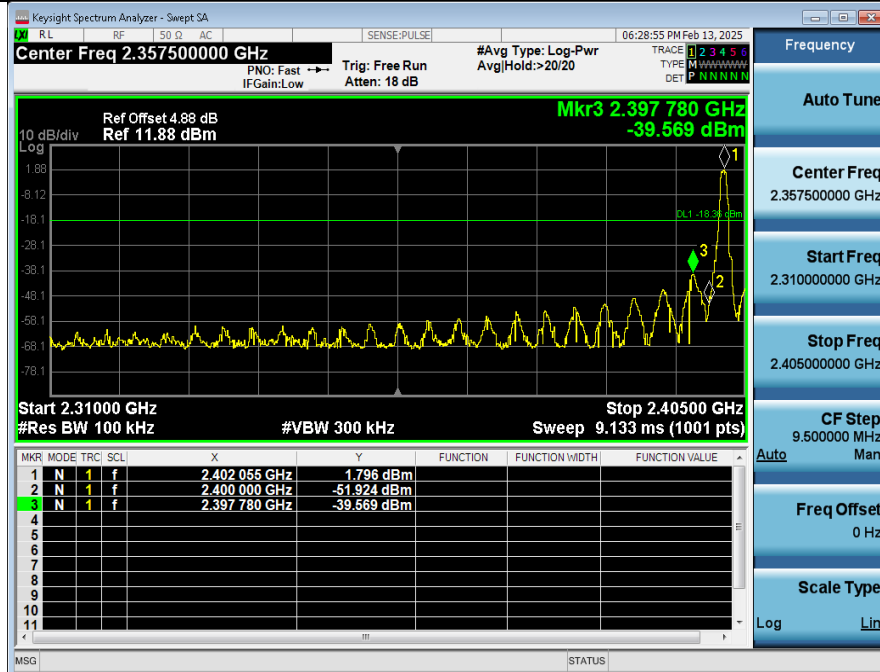


1 Reference_Level_NVNT_ANT1_125_kbps_2480



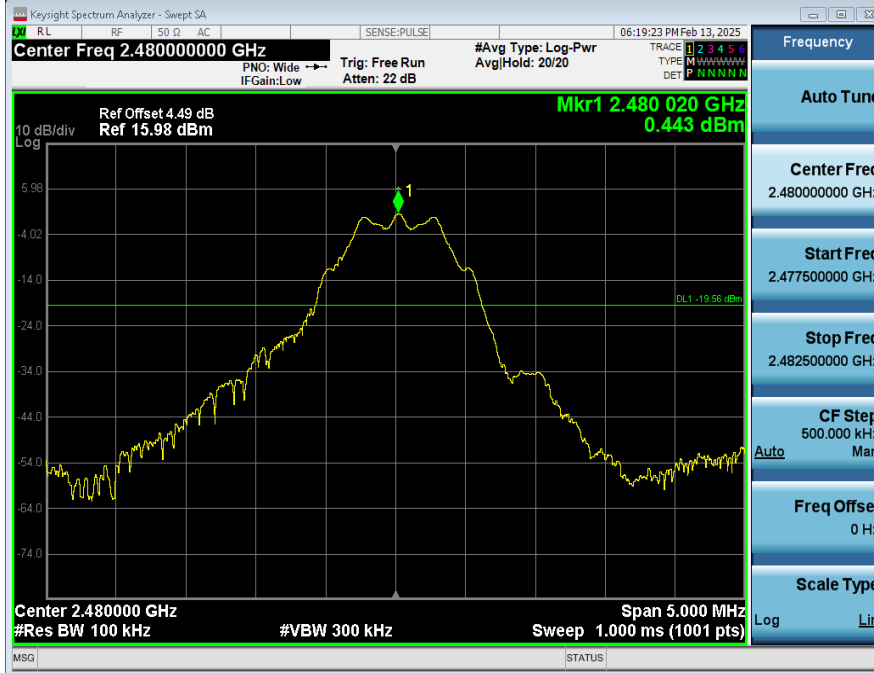

2_Bandedge_NVNT_ANT1_125 kbps_2480

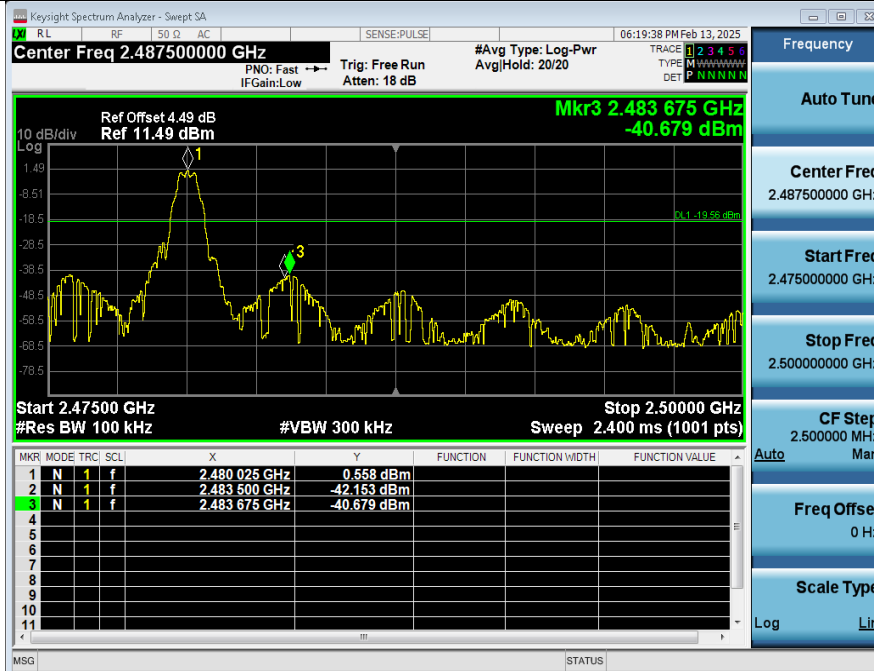


7. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Ref_level(dBm)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	125 kbps	2402.00	1.643	-52.855	-18.357	Pass
NVNT	ANT1	125 kbps	2440.00	1.308	-51.423	-18.692	Pass
NVNT	ANT1	125 kbps	2480.00	0.443	-38.706	-19.557	Pass

1 Reference_Level_NVNT_ANT1_125 kbps_2402



2 Spurious Emission_NVNT_ANT1_125 kbps_2402

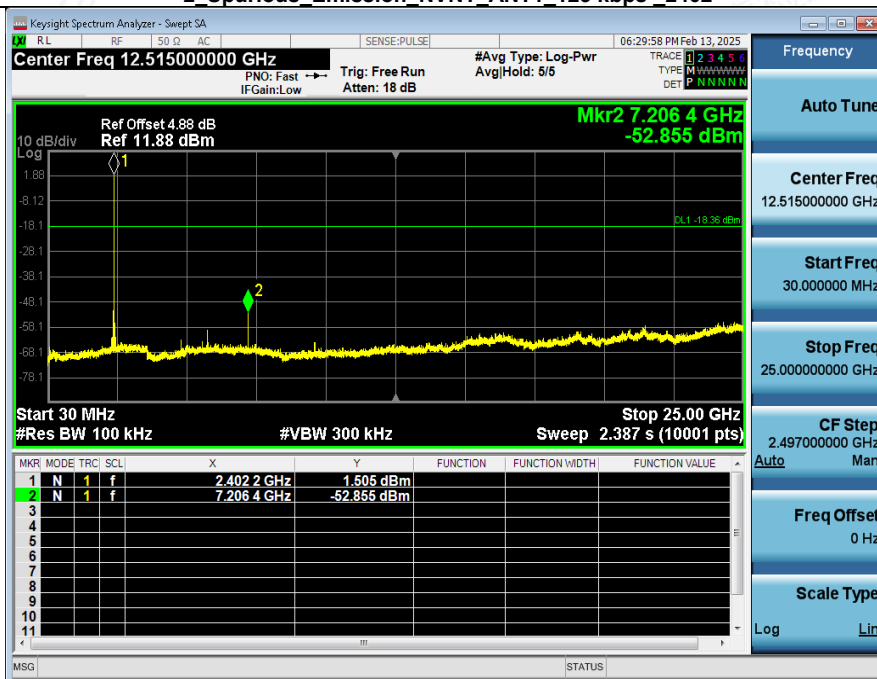


1 Reference_Level_NVNT_ANT1_125 kbps_2440






2_Spurious_Emission_NVNT_ANT1_125 kbps_2440

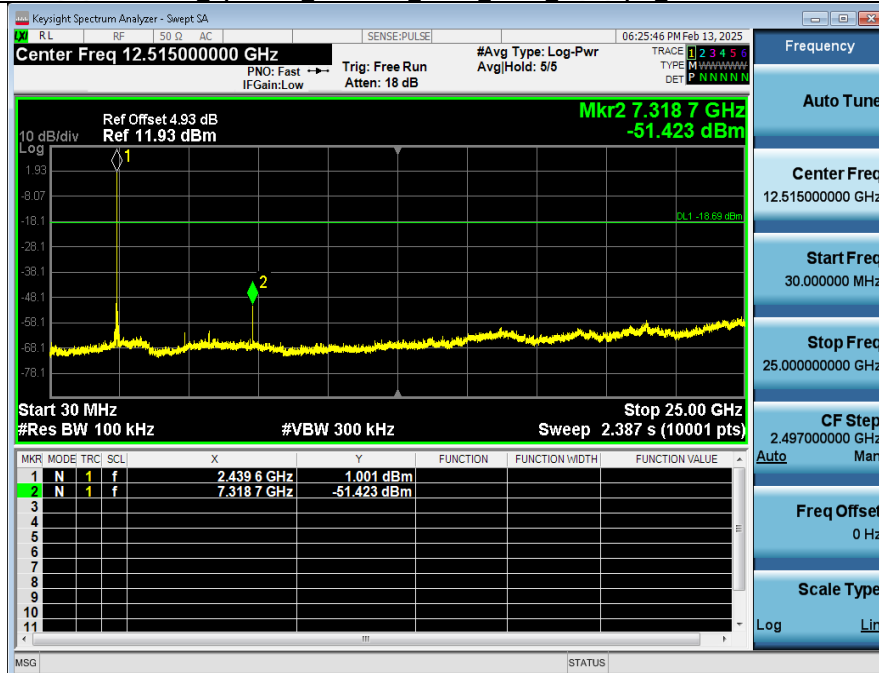

1_Reference_Level_NVNT_ANT1_125 kbps_2480



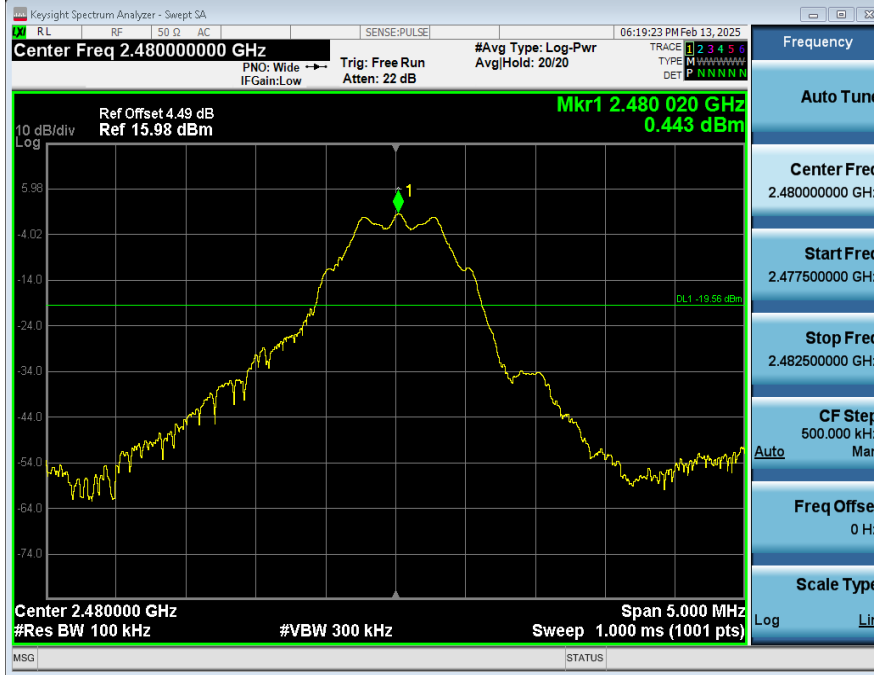

2_Spurious_Emission_NVNT_ANT1_125_kbps_2480

