

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.146	2.501	85.81	0.66	0.06
		2440	2.146	2.499	85.87	0.66	0.00
		2480	2.146	2.501	85.81	0.66	0.03


1.2 Test Graph

1.2.1 Ant1

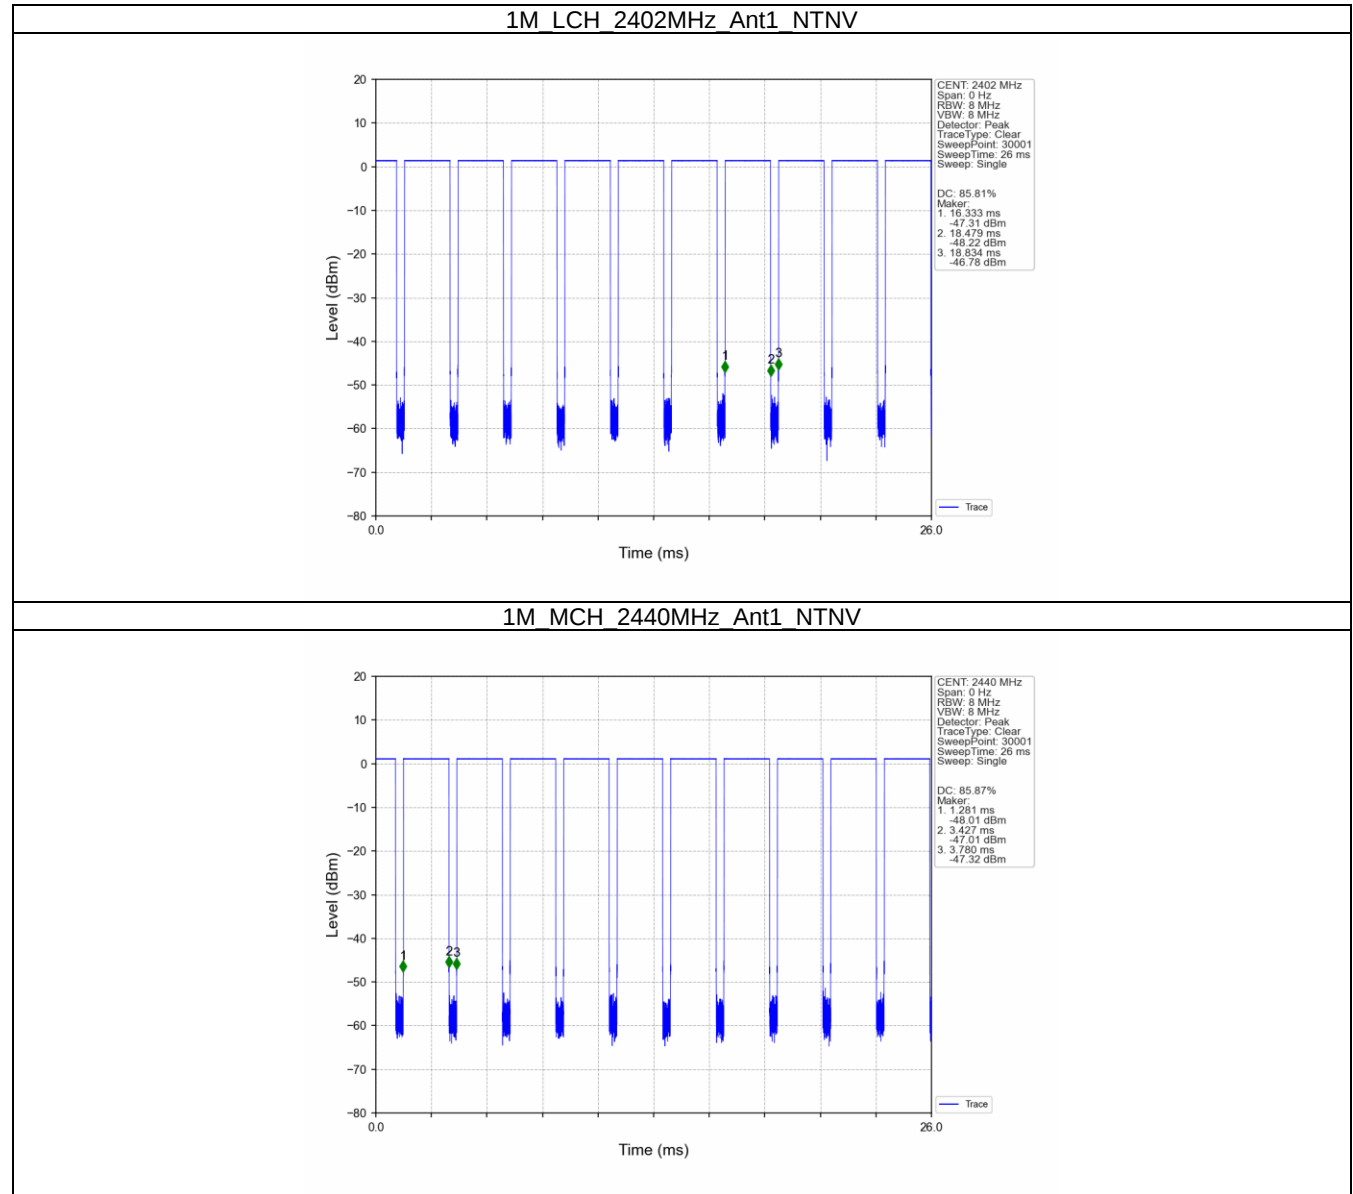



1M_HCH_2480MHz_Ant1_NTNV

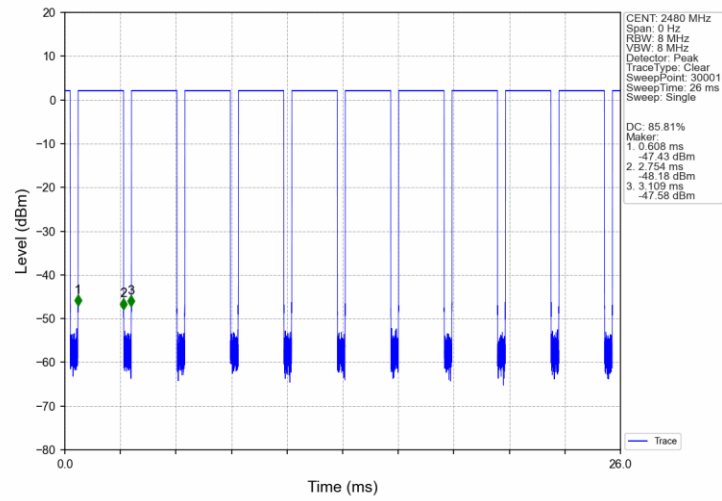

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.032	/	Pass
		2440	1	1.031	/	Pass
		2480	1	1.031	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.668	≥ 0.5	Pass
		2440	1	0.663	≥ 0.5	Pass
		2480	1	0.669	≥ 0.5	Pass


2.2 Test Graph

2.2.1 OBW

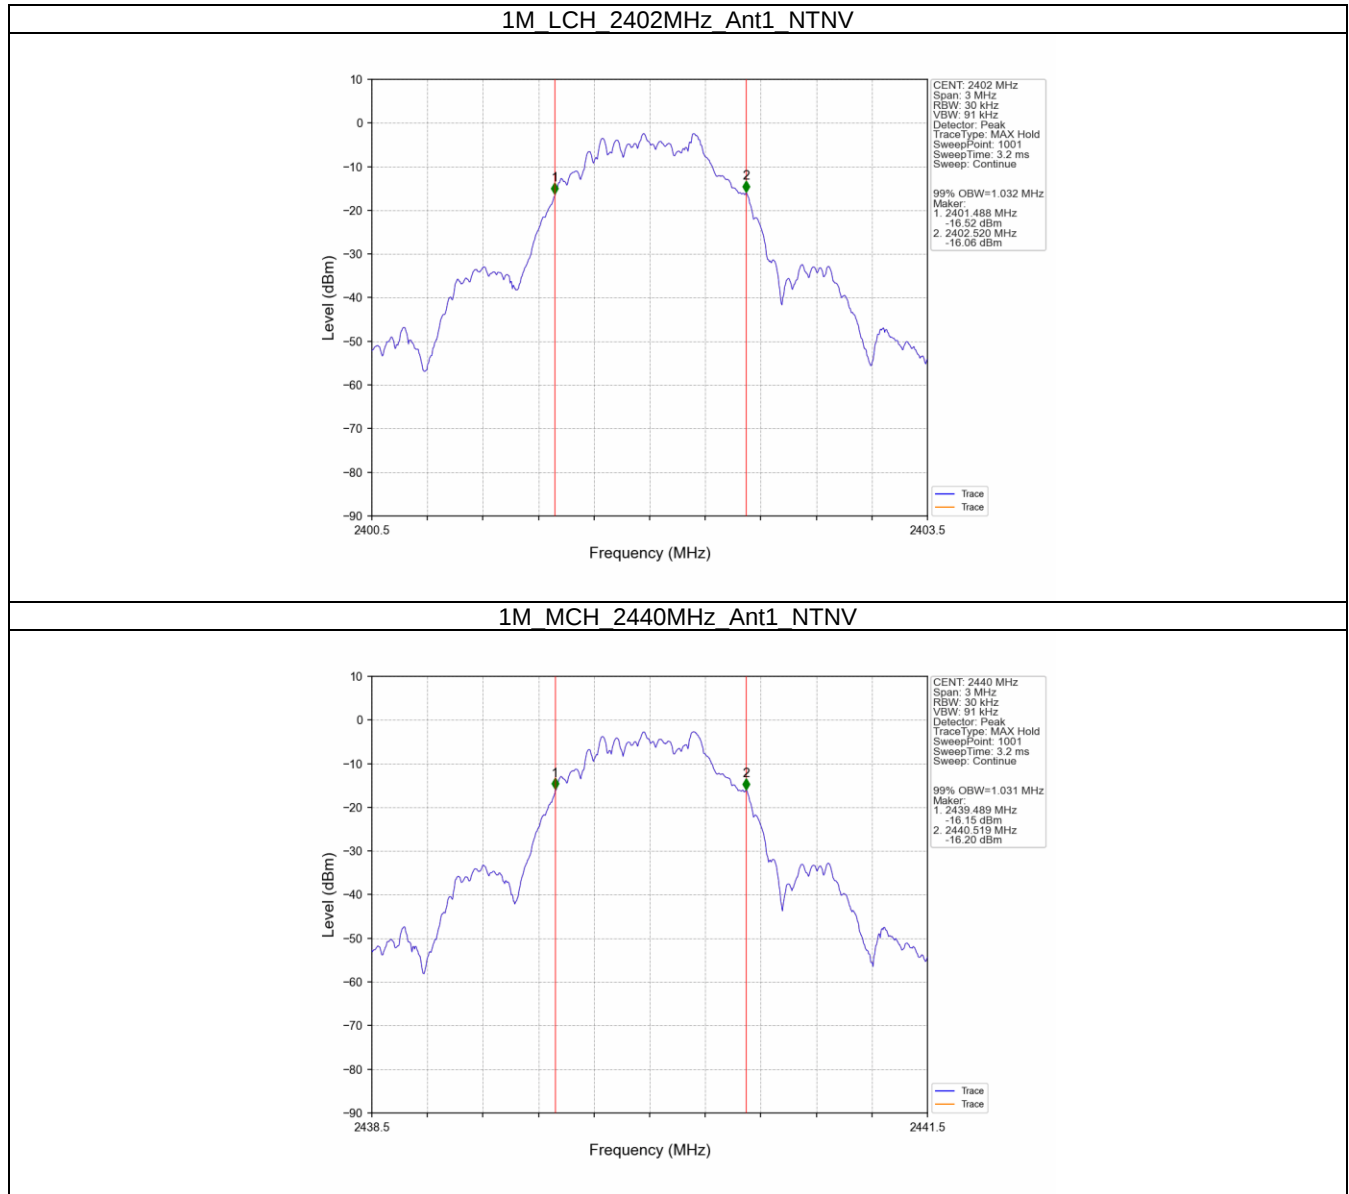




1M_HCH_2480MHz_Ant1_NTNV

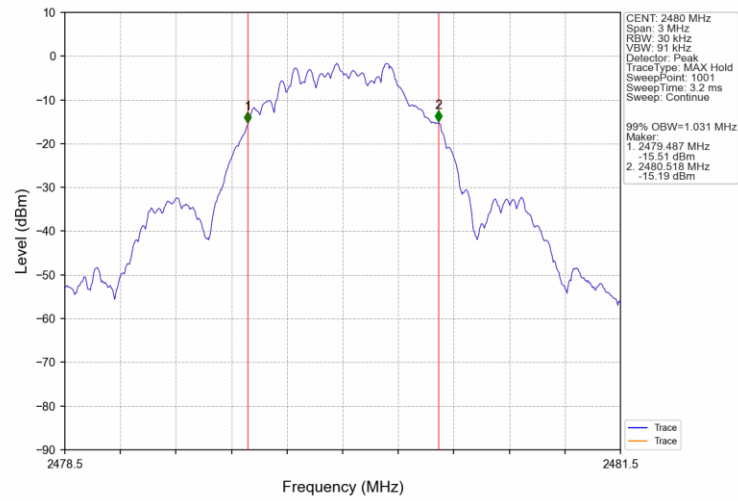


2.2.2 6dB BW


1M LCH 2402MHz Ant1 NTN

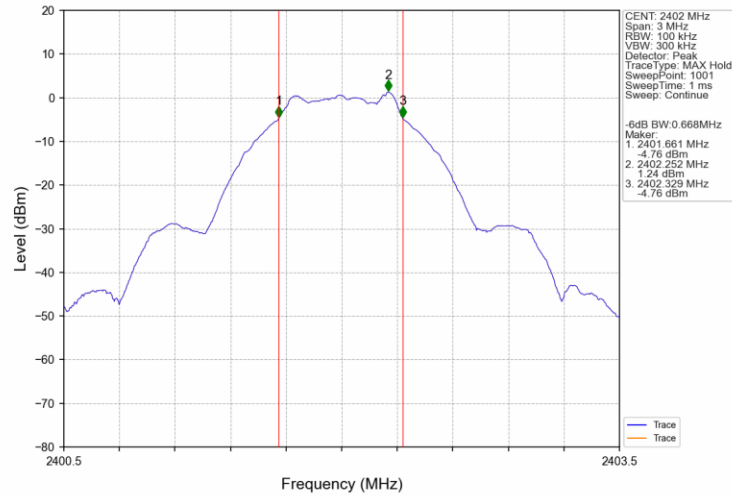

1M MCH 2440MHz Ant1 NTN

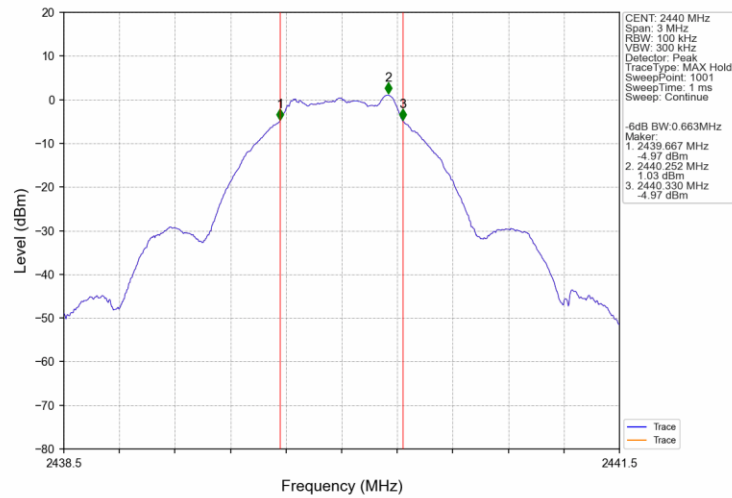

1M_HCH_2480MHz_Ant1_NTNV

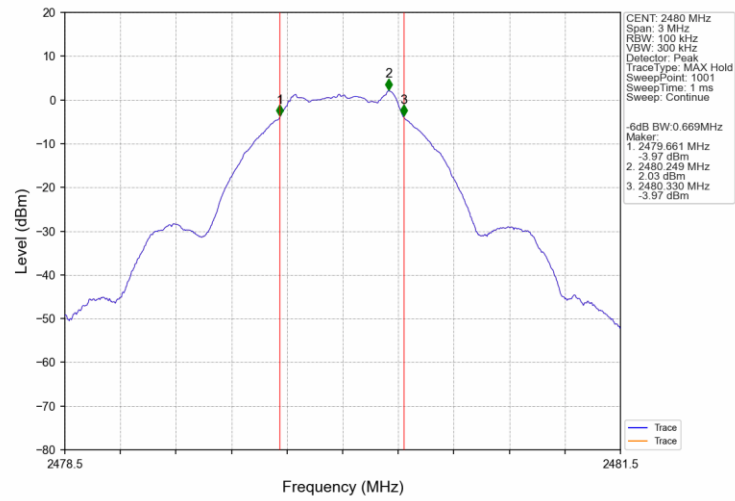

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	1.35	≤ 30	Pass
		2440	1.30	≤ 30	Pass
		2480	2.13	≤ 30	Pass

Note1: Antenna Gain: Ant1: 1.82dBi;


3.2 Test Graph

3.2.1 Power

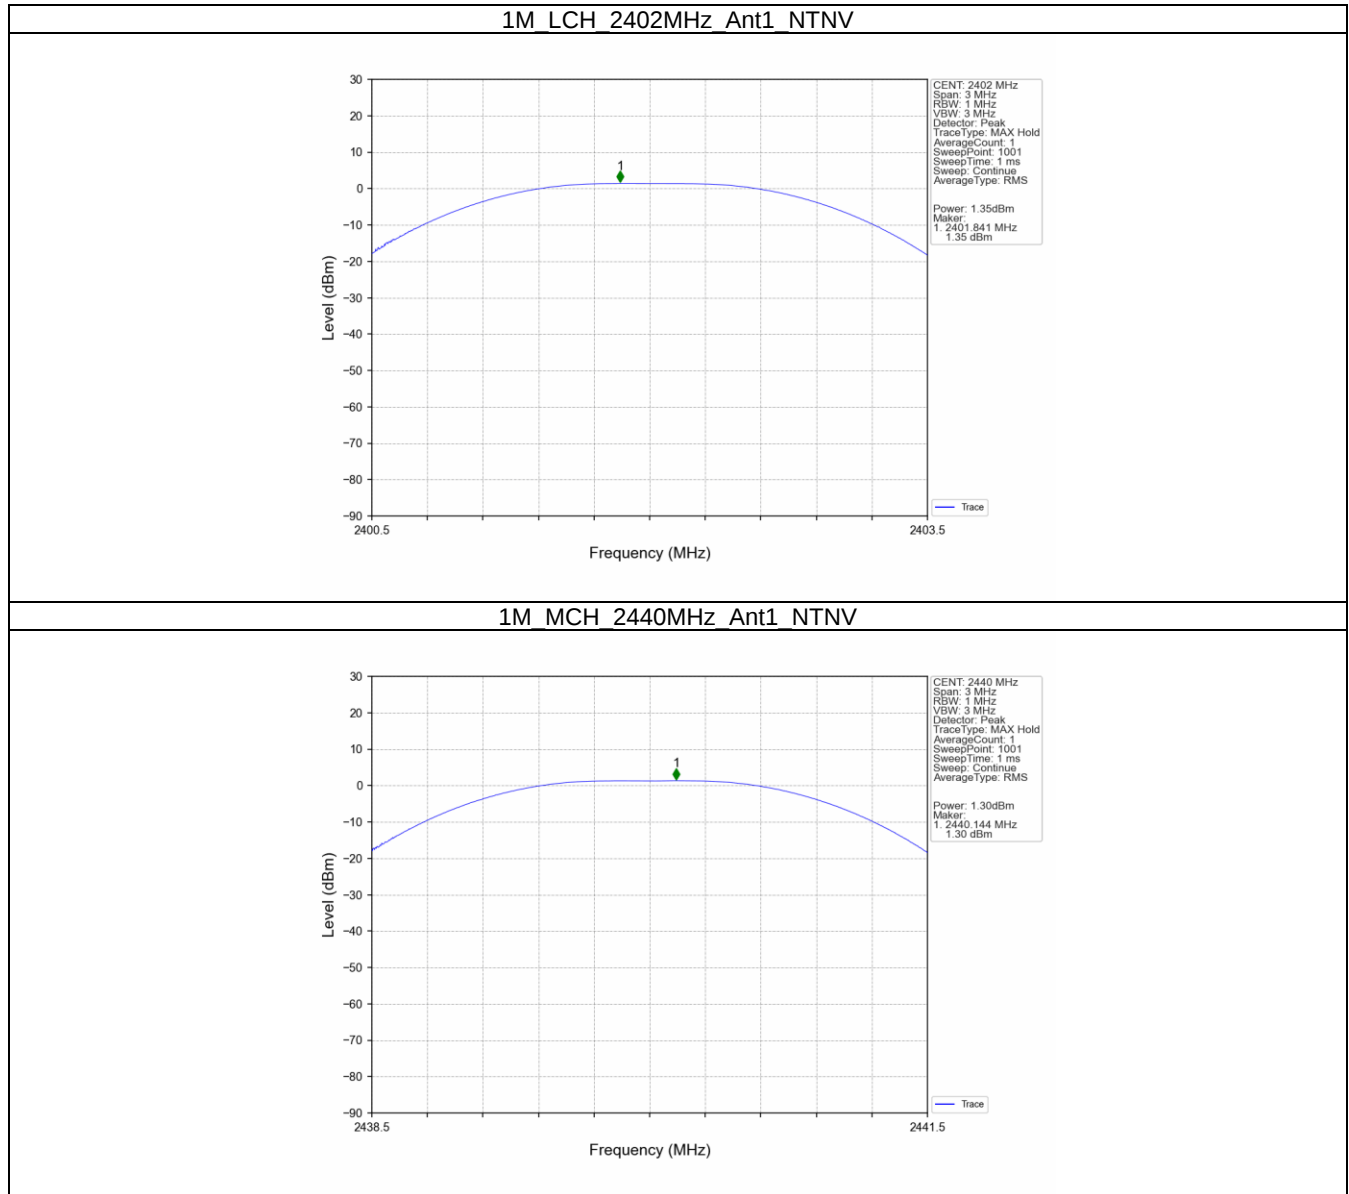



1M_HCH_2480MHz_Ant1_NTNV

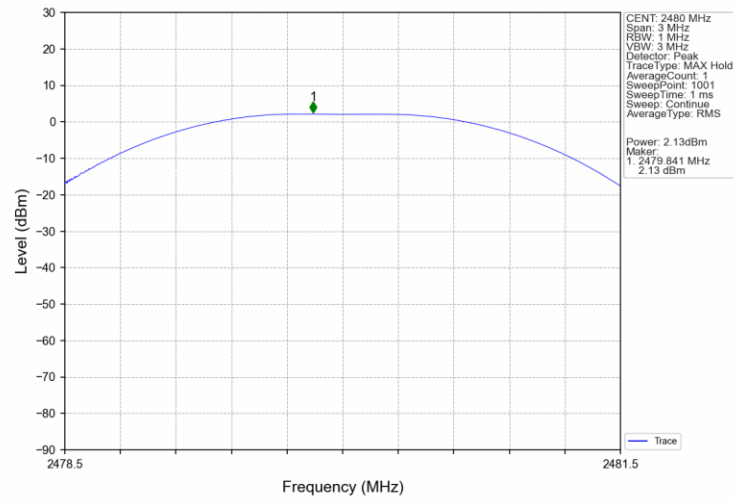

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-14.76	<=8	Pass
		2440	-14.98	<=8	Pass
		2480	-14.06	<=8	Pass

Note1: Antenna Gain: Ant1: 1.82dBi;


4.2 Test Graph

4.2.1 PSD

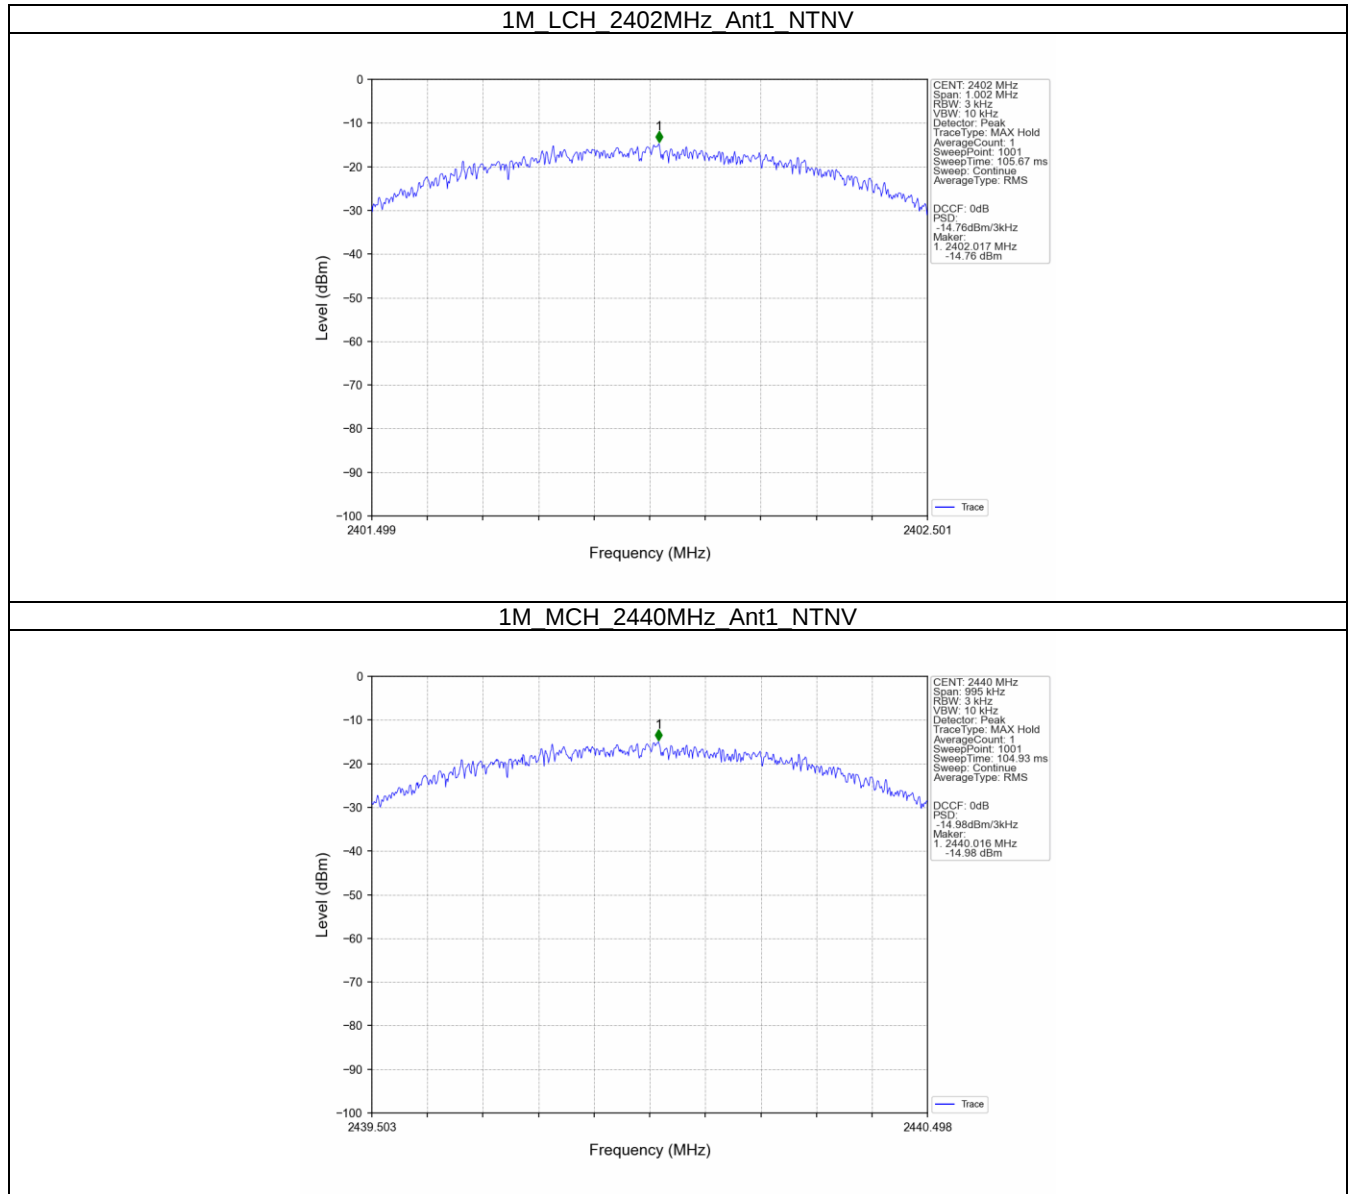



1M_HCH_2480MHz_Ant1_NTNV

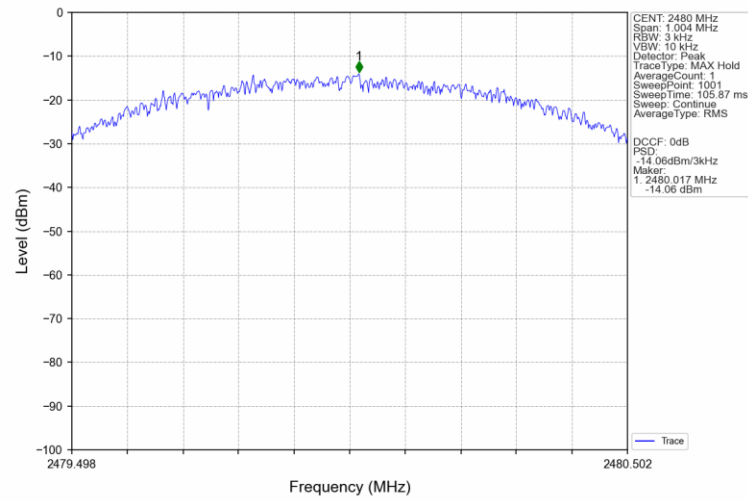

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	Tx Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	1.24
		2440	1	1.24
		2480	1	2.04
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	1.24	-18.76	Pass
		2440	1	1.24	-18.76	Pass
		2480	1	2.04	-17.96	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph

5.2.1 Ref

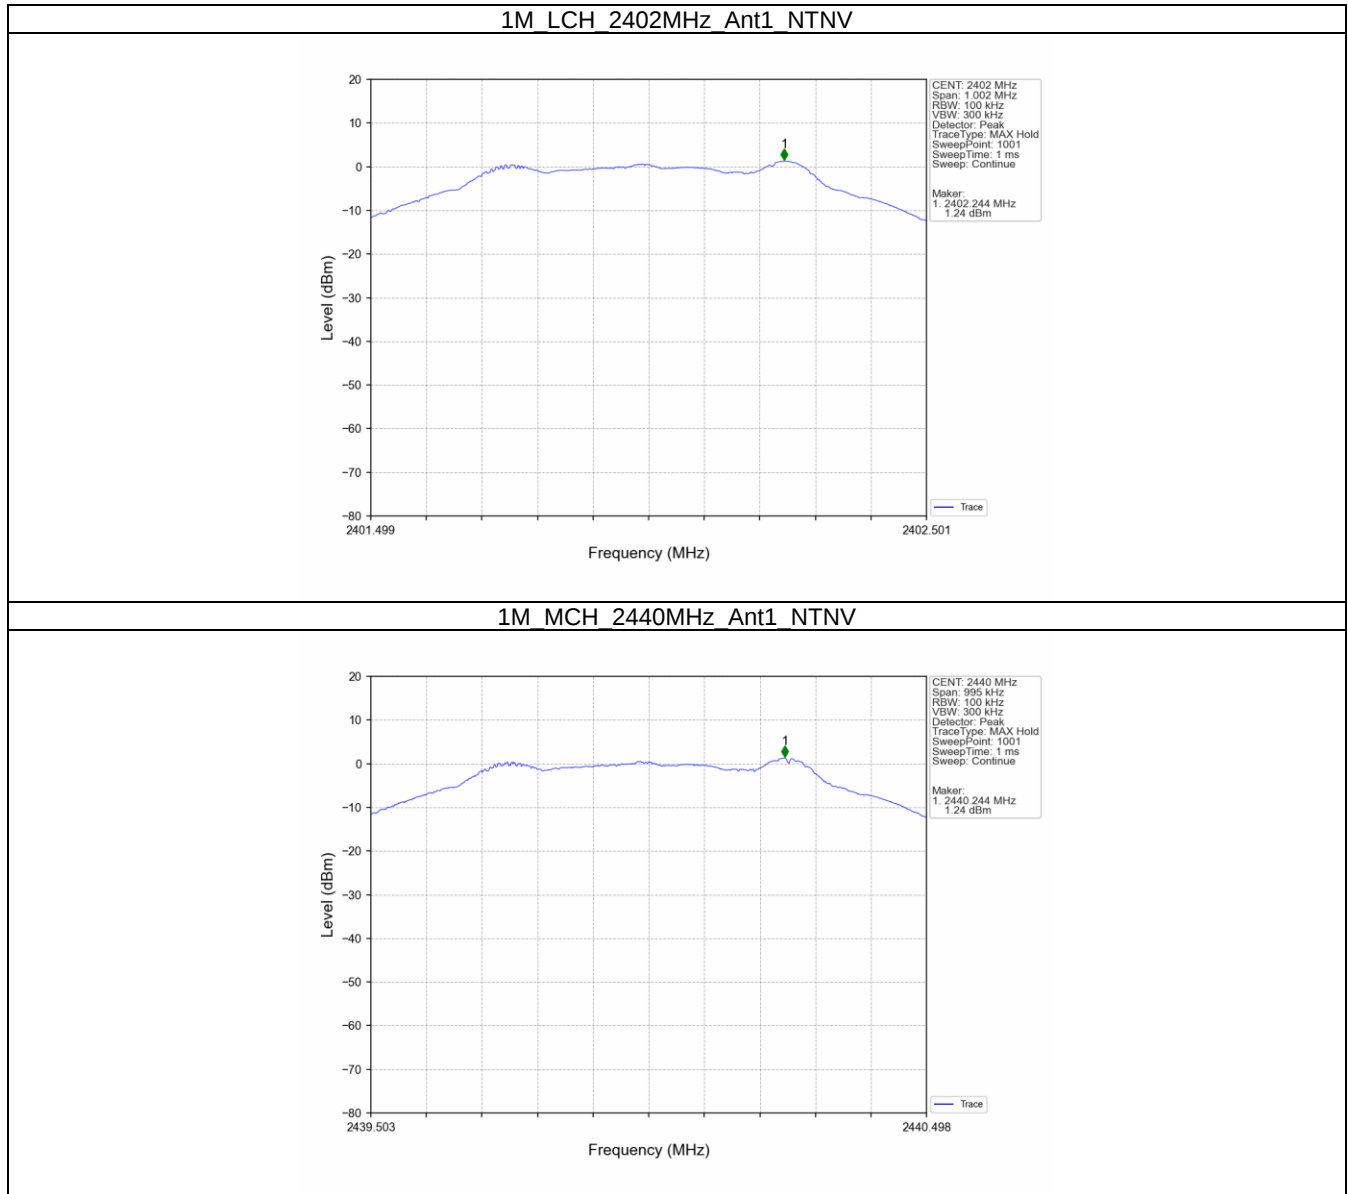


1M_HCH_2480MHz_Ant1_NTNV

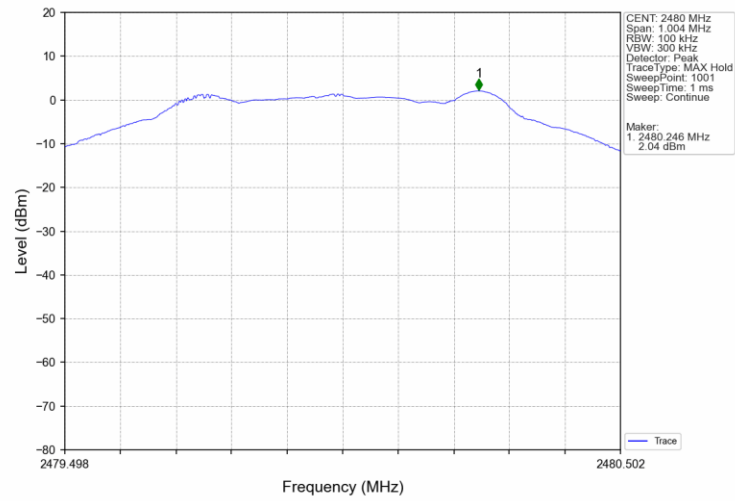


5.2.2 CSE


1M LCH 2402MHz Ant1 NTV

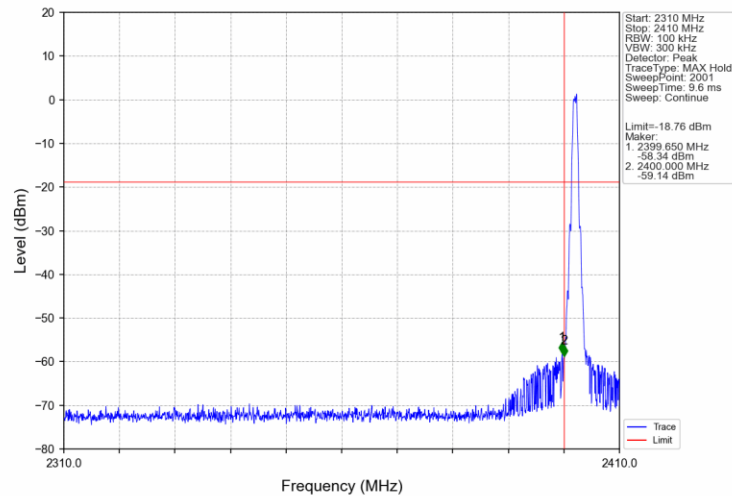


1M LCH 2402MHz Ant1 NTV

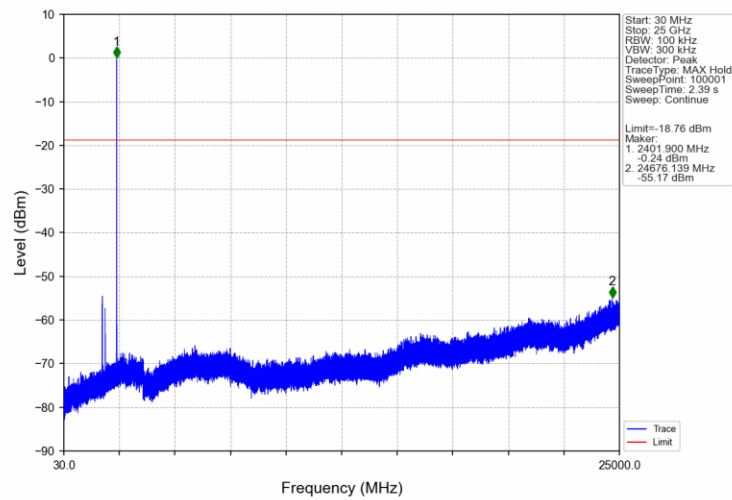


1M_MCH_2440MHz_Ant1_NTNV

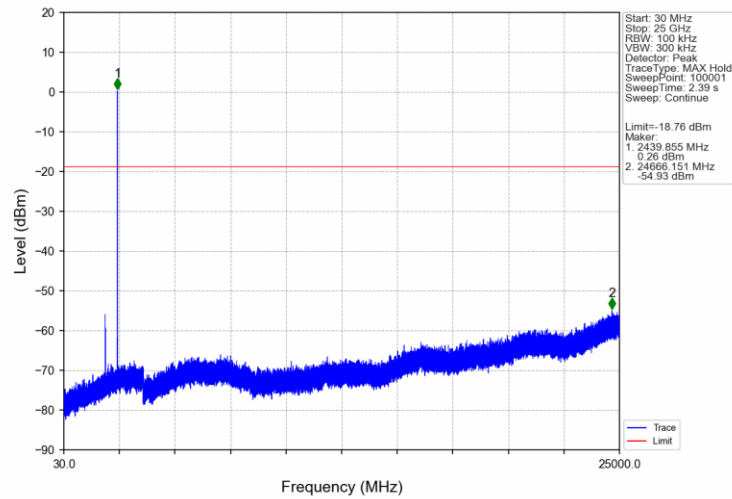

1M_HCH_2480MHz_Ant1_NTNV

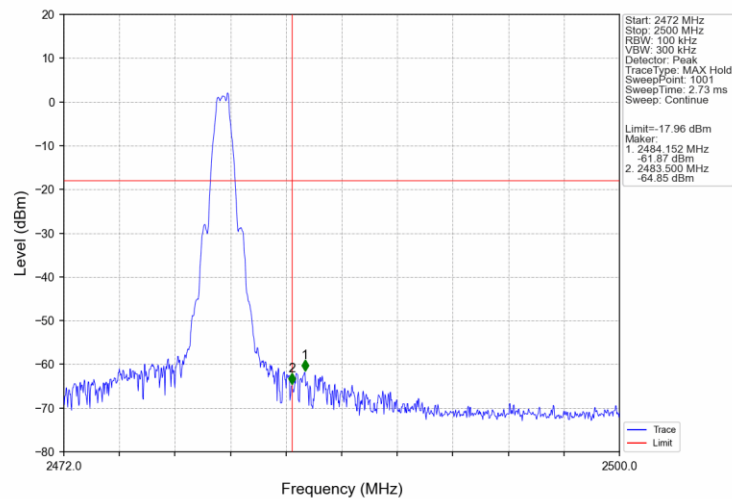

1M_HCH_2480MHz_Ant1_NTNV

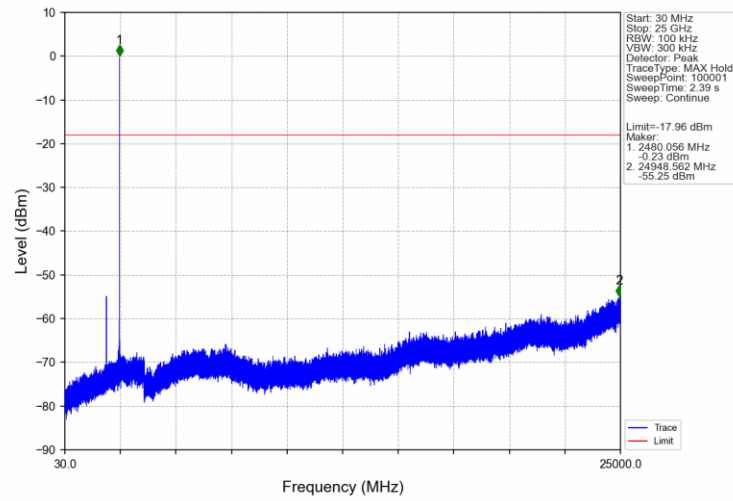

6. Form731

6.1 Test Result

6.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0016	2.13