



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: Desktop speaker

Test Model: XLT999

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jerry Chu
Supervised by:	Nick Peng






A.1 -20dB Bandwidth

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	1.025	/	Pass
		2441	DH5	1	1.042	/	Pass
		2480	DH5	1	1.029	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.312	/	Pass
		2441	2DH5	1	1.323	/	Pass
		2480	2DH5	1	1.325	/	Pass
8DPSK	SISO	2402	3DH5	1	1.310	/	Pass
		2441	3DH5	1	1.306	/	Pass
		2480	3DH5	1	1.304	/	Pass






GFSK_DH5_LCH_2402MHz_Ant1_NTNV

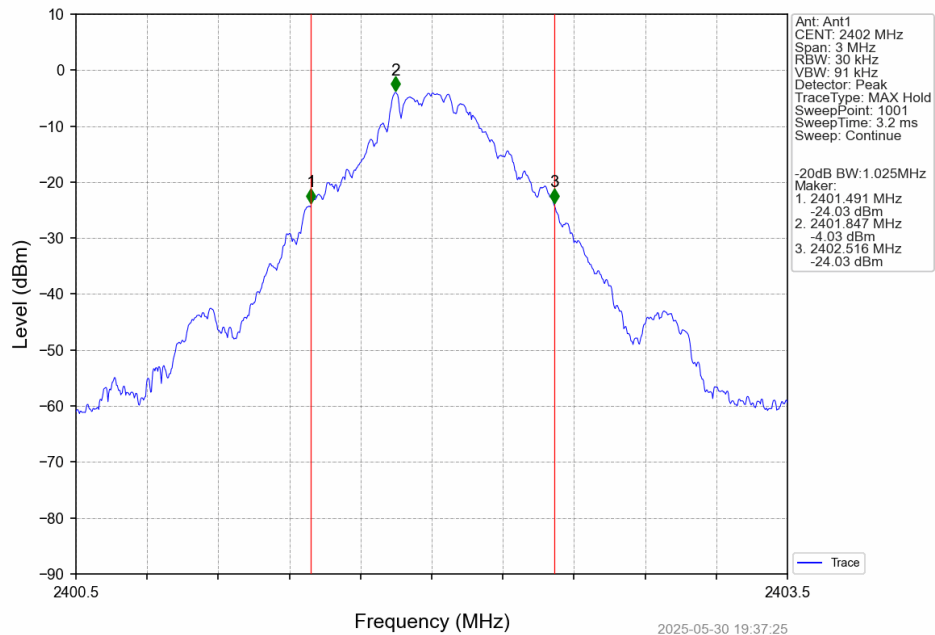


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

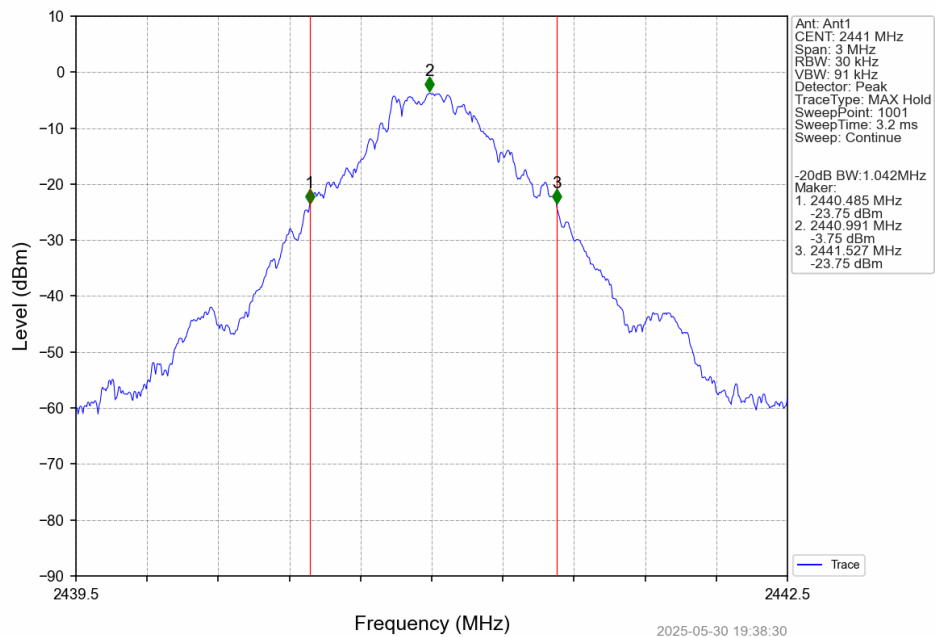




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

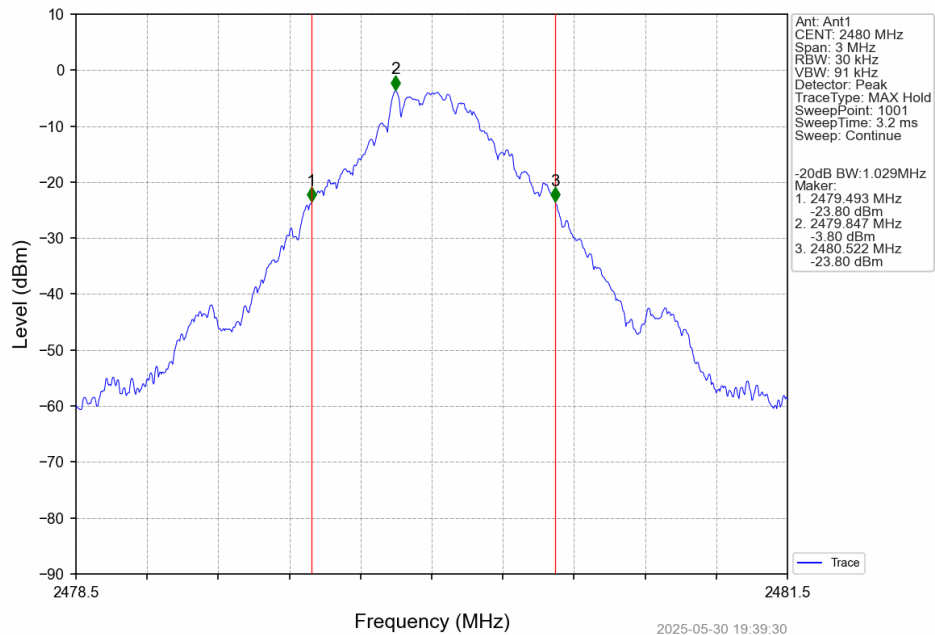


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

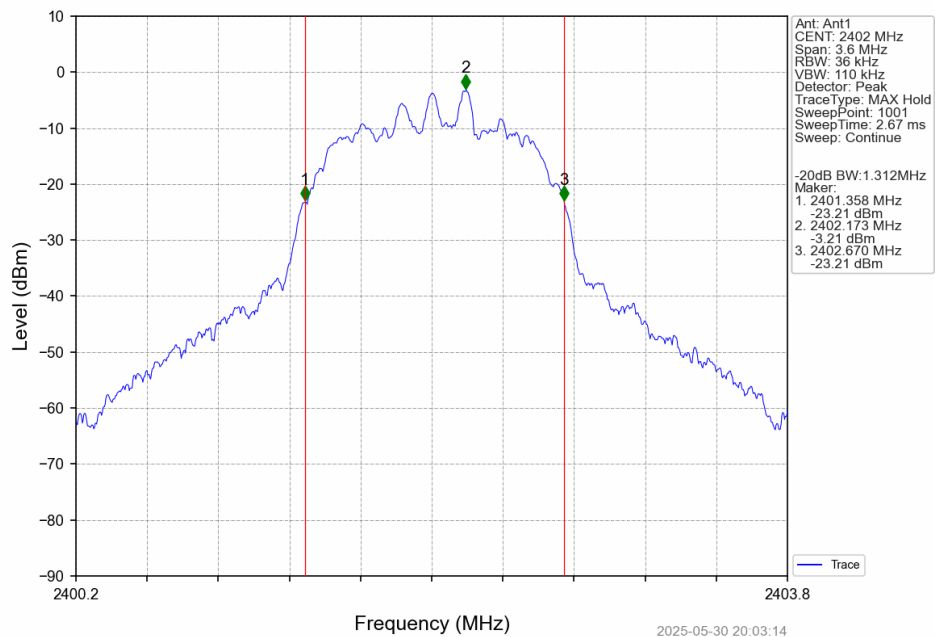




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

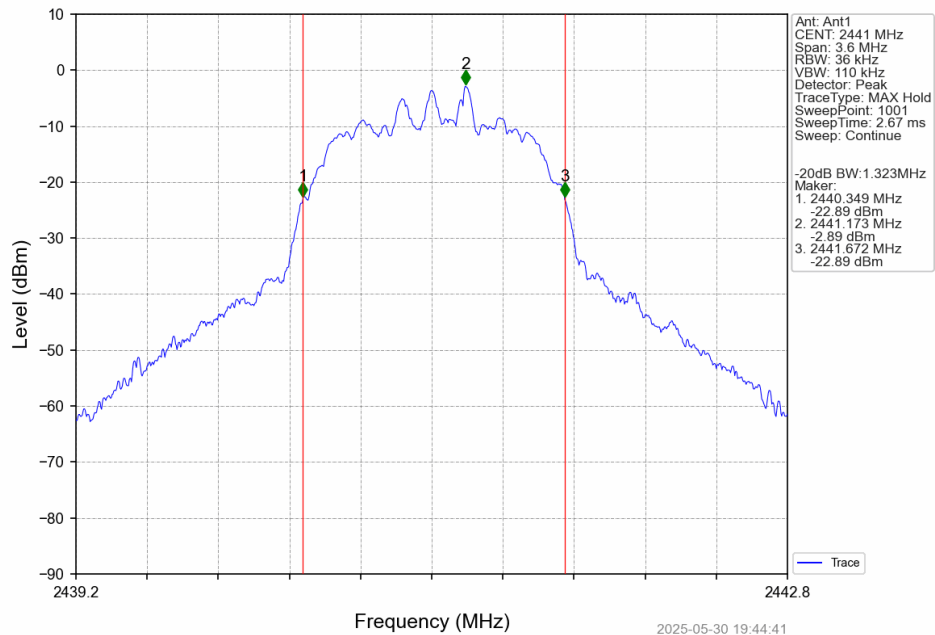


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

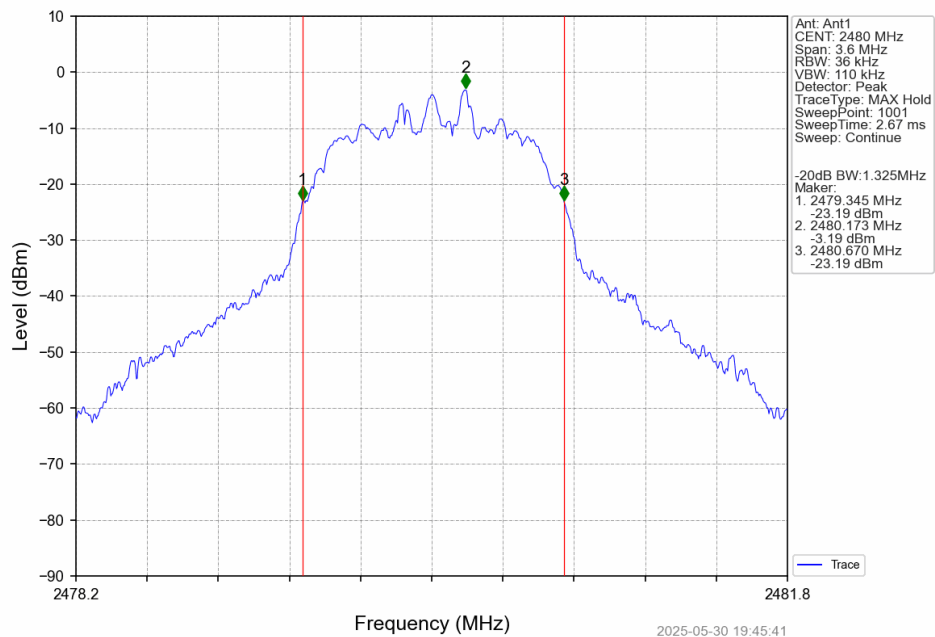





8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

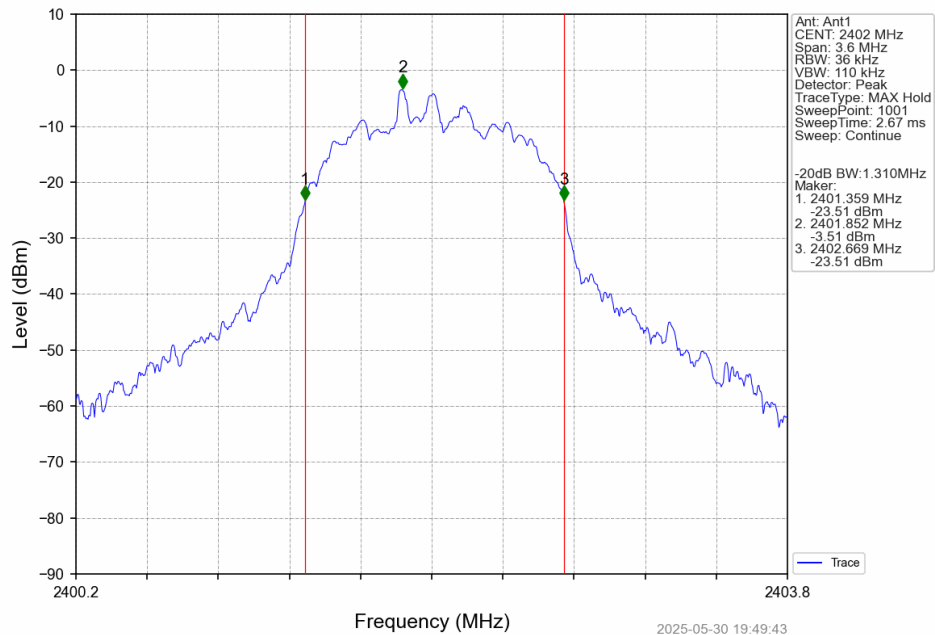

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

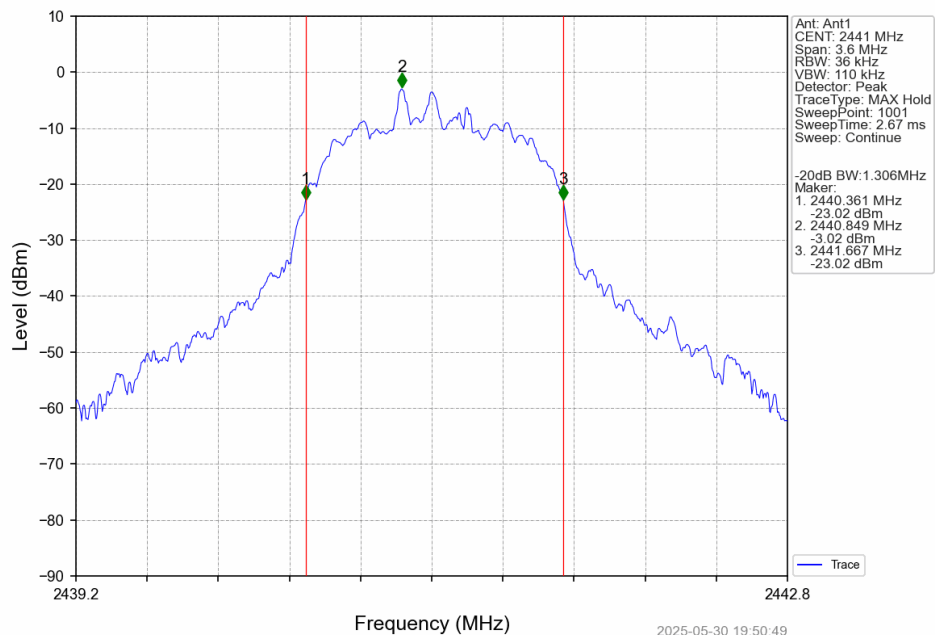

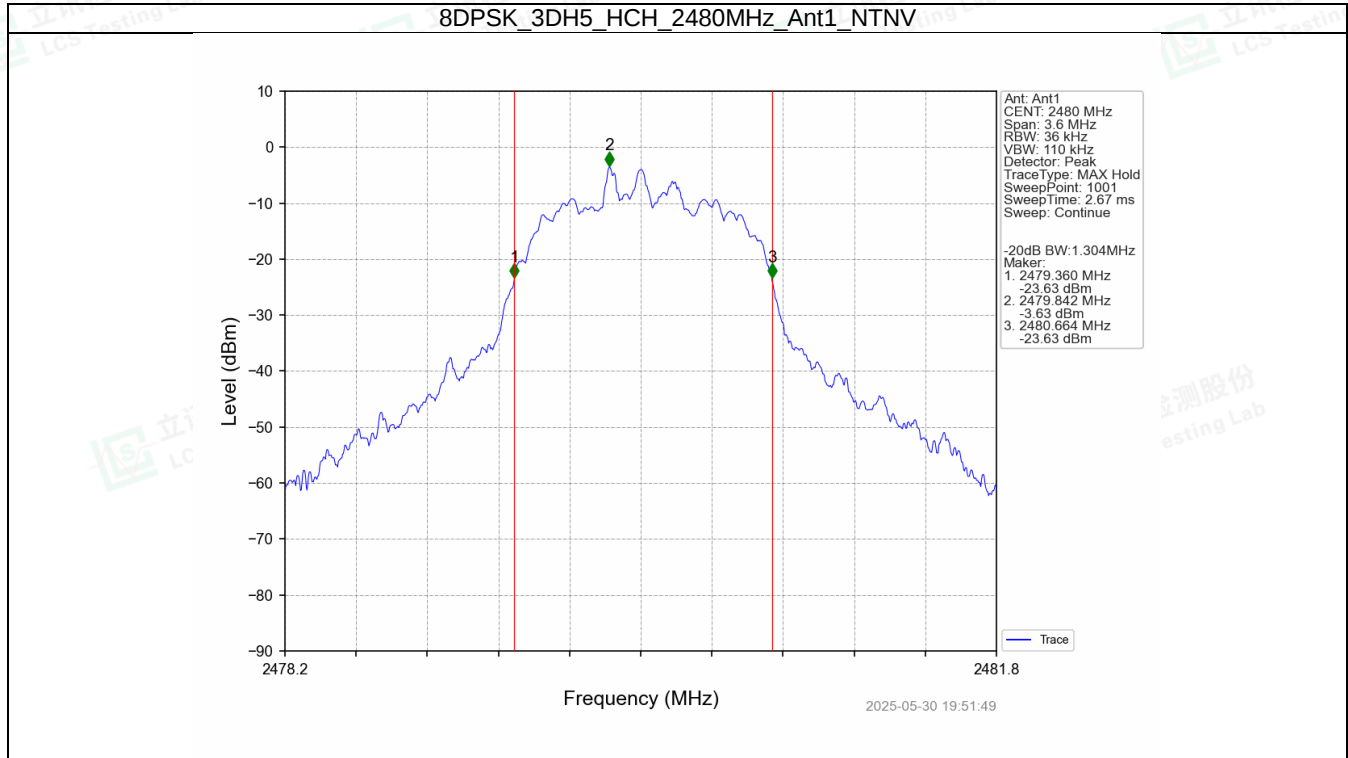




A.2 Maximum Peak Conducted Output Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-1.68	≤ 20.97	Pass
		2441	DH5	-1.34	≤ 20.97	Pass
		2480	DH5	-1.57	≤ 20.97	Pass
Pi/4DQPSK	SISO	2402	2DH5	-1.68	≤ 20.97	Pass
		2441	2DH5	-0.46	≤ 20.97	Pass
		2480	2DH5	-0.69	≤ 20.97	Pass
8DPSK	SISO	2402	3DH5	-0.38	≤ 20.97	Pass
		2441	3DH5	-0.02	≤ 20.97	Pass
		2480	3DH5	-0.25	≤ 20.97	Pass






GFSK_DH5_LCH_2402MHz_Ant1_NTNV

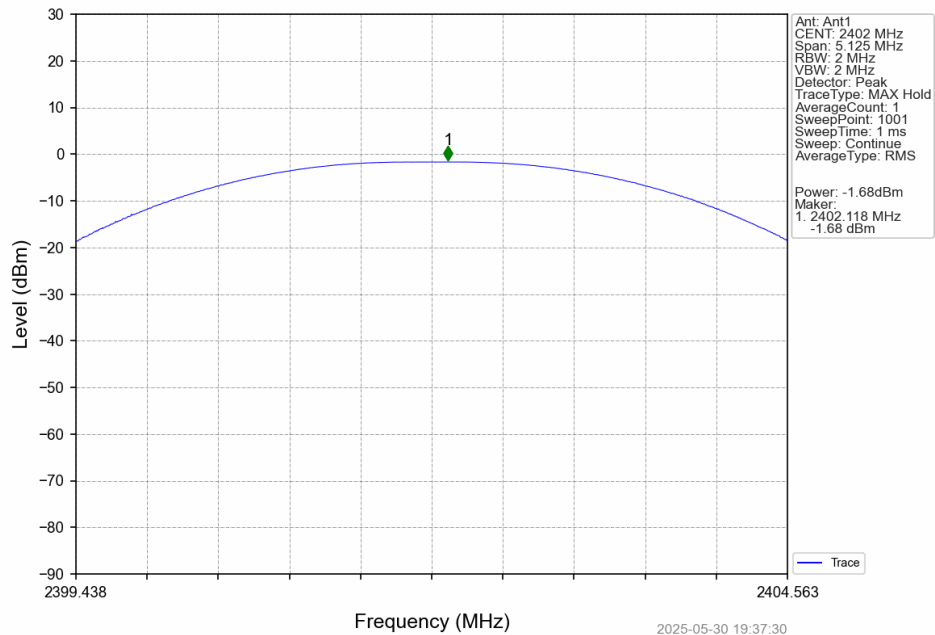


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

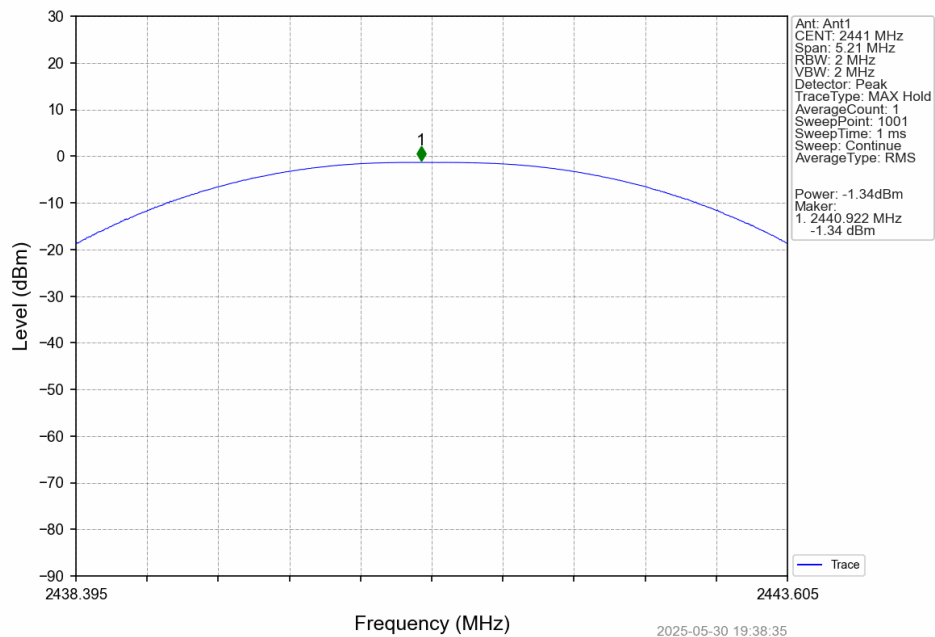




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

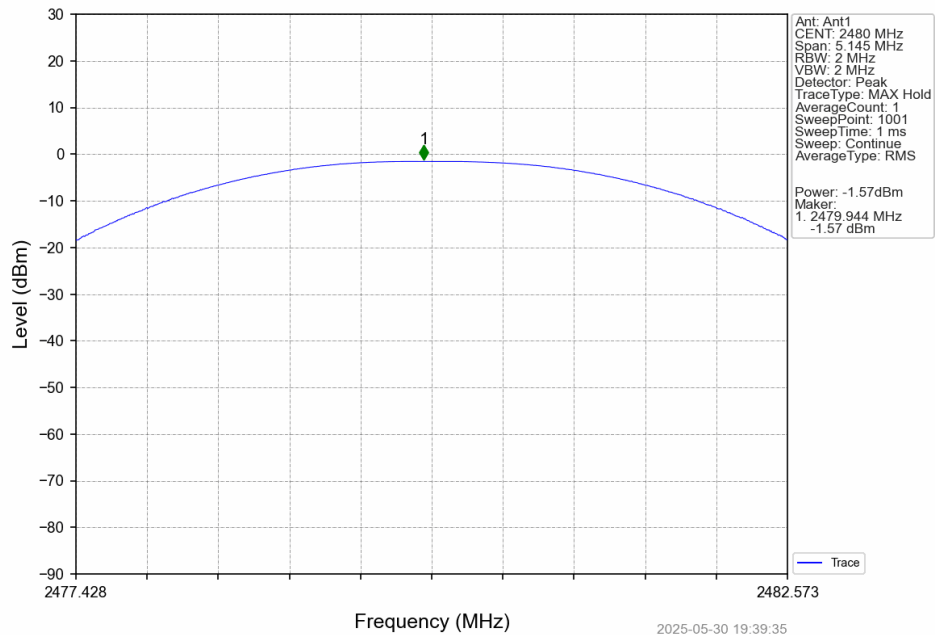


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

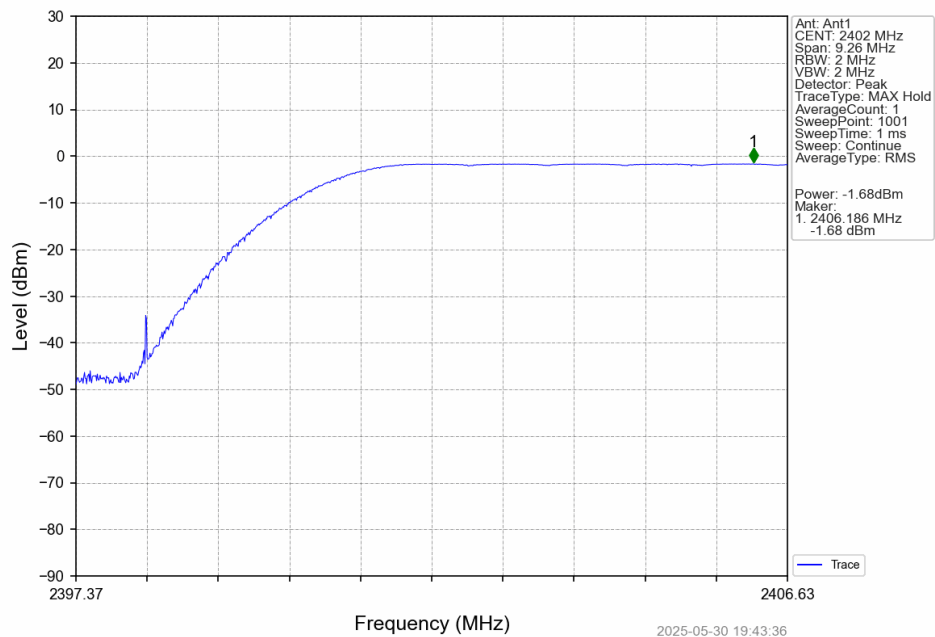




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

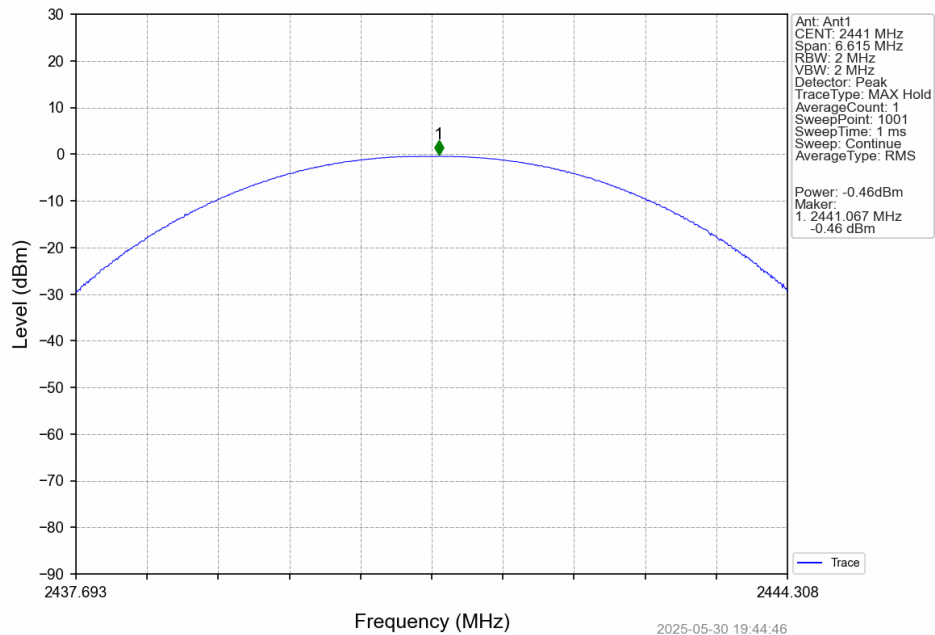


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

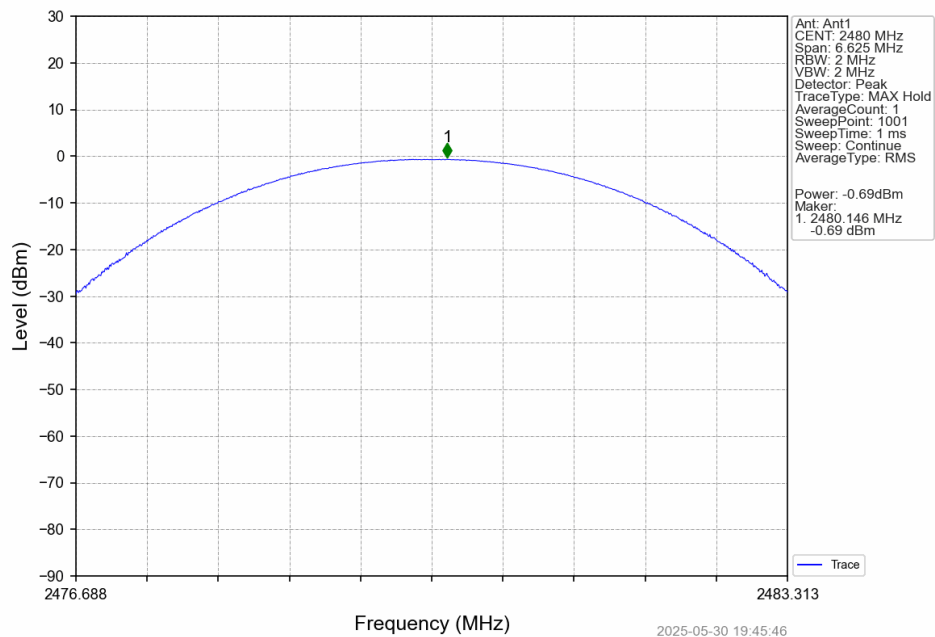





8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

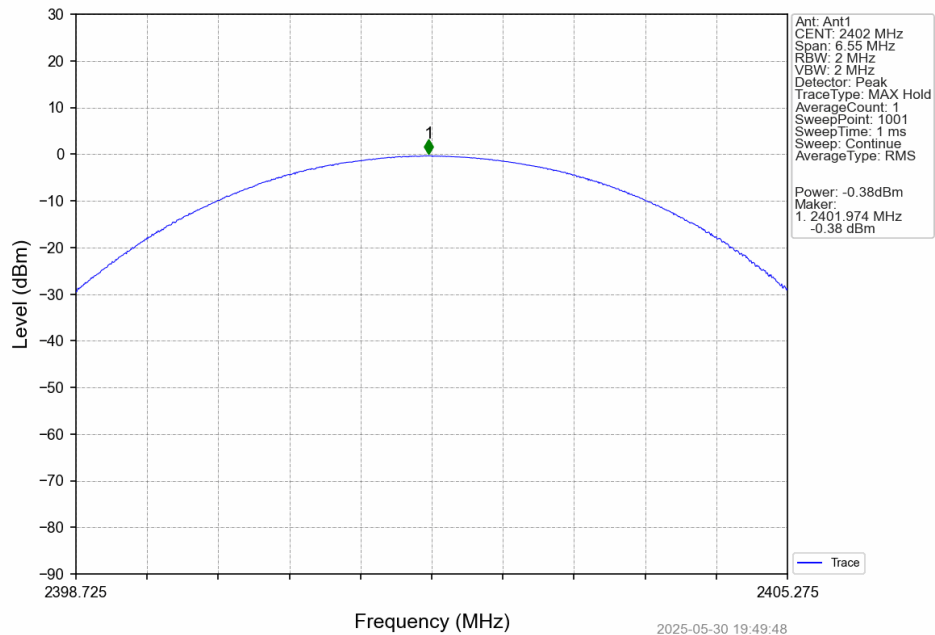

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

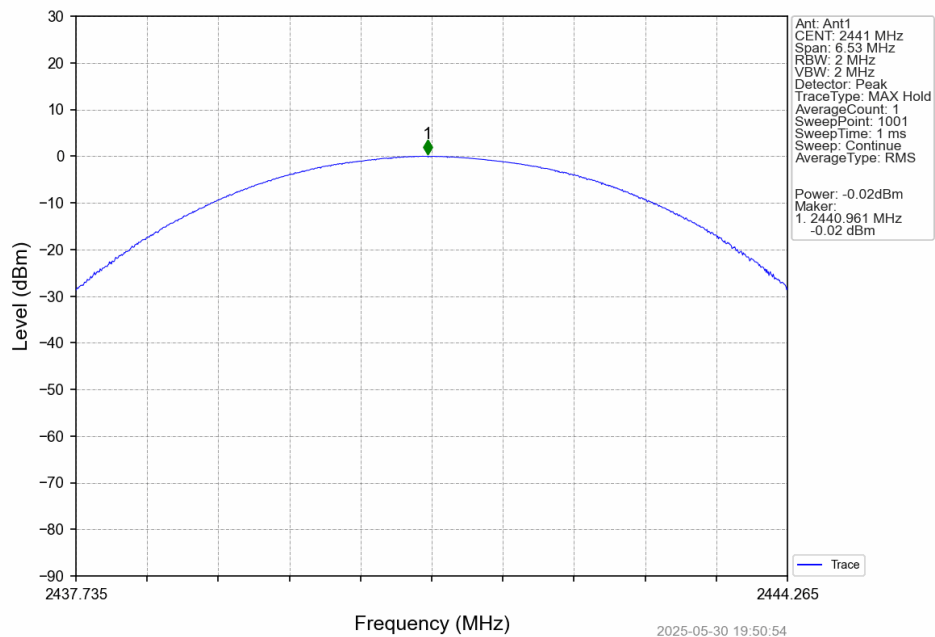

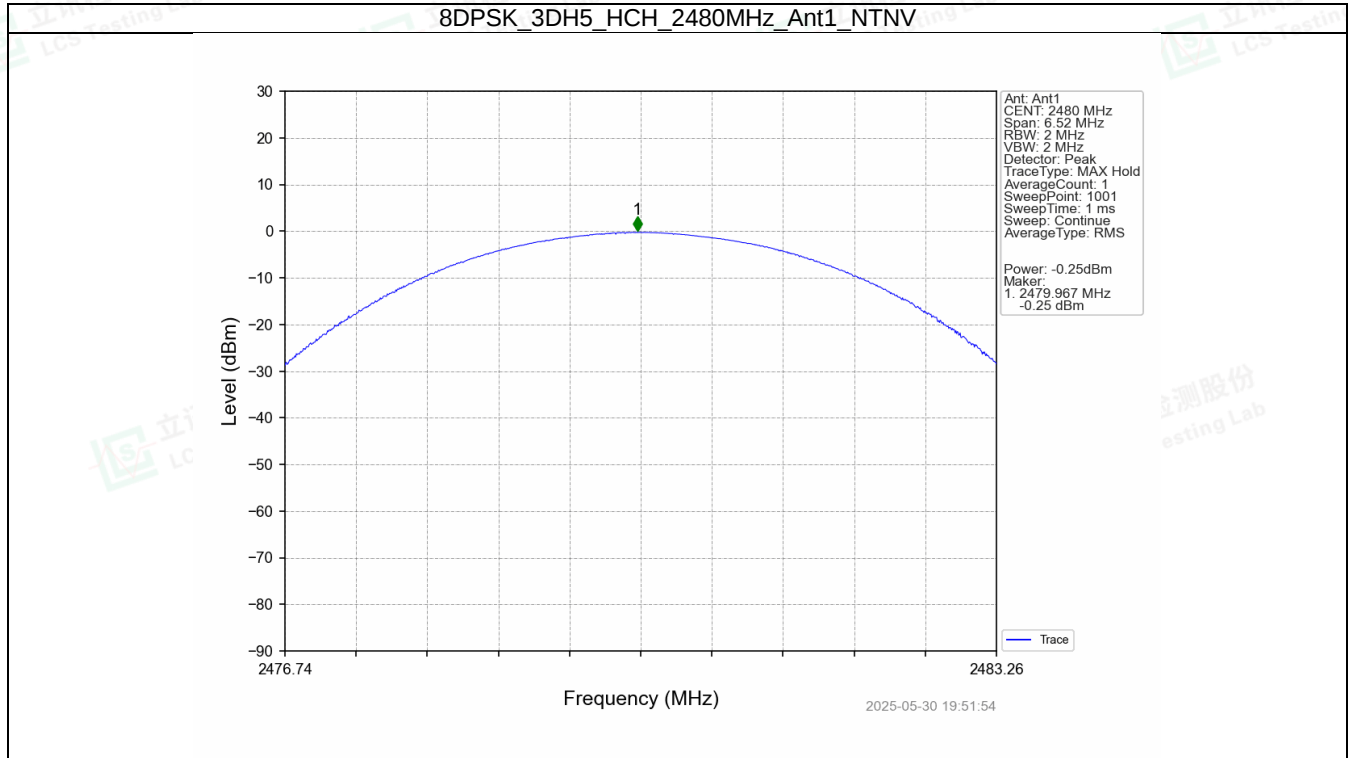




A.3 Carrier Frequencies Separation

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.042	≥ 0.695	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.325	≥ 0.883	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.310	≥ 0.873	Pass






GFSK_DH5_HOPP_Ant1_NTNV

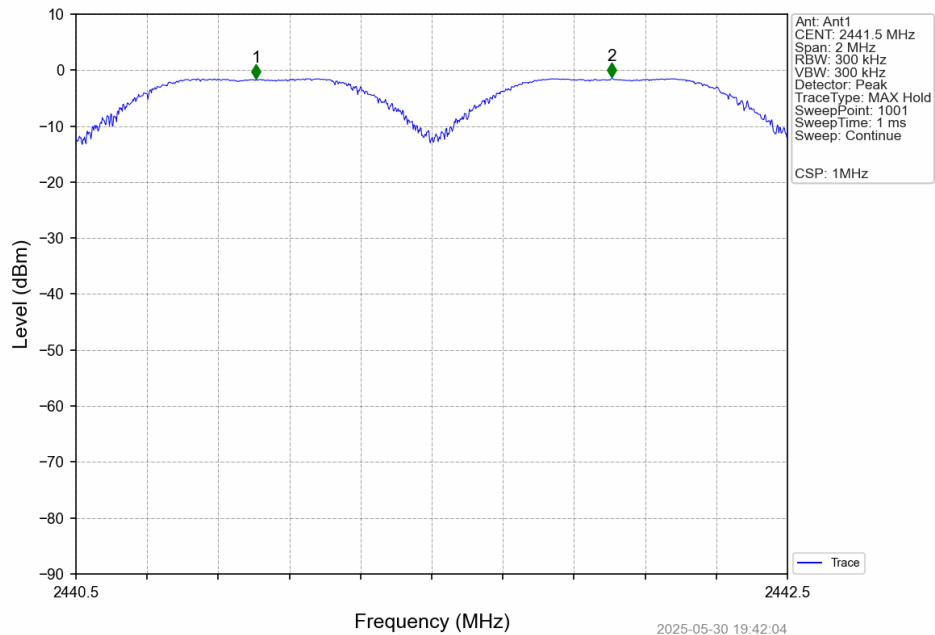

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

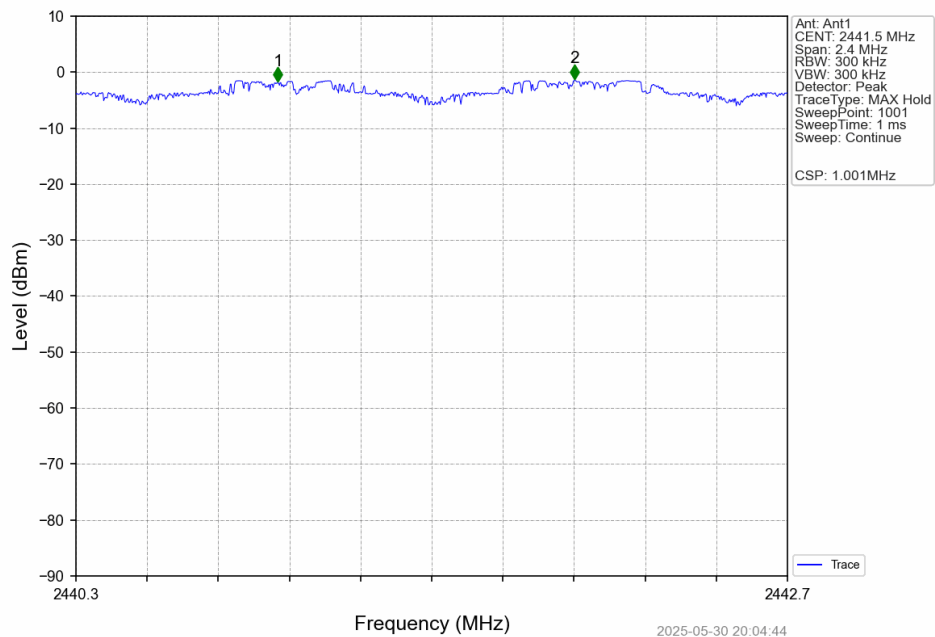


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

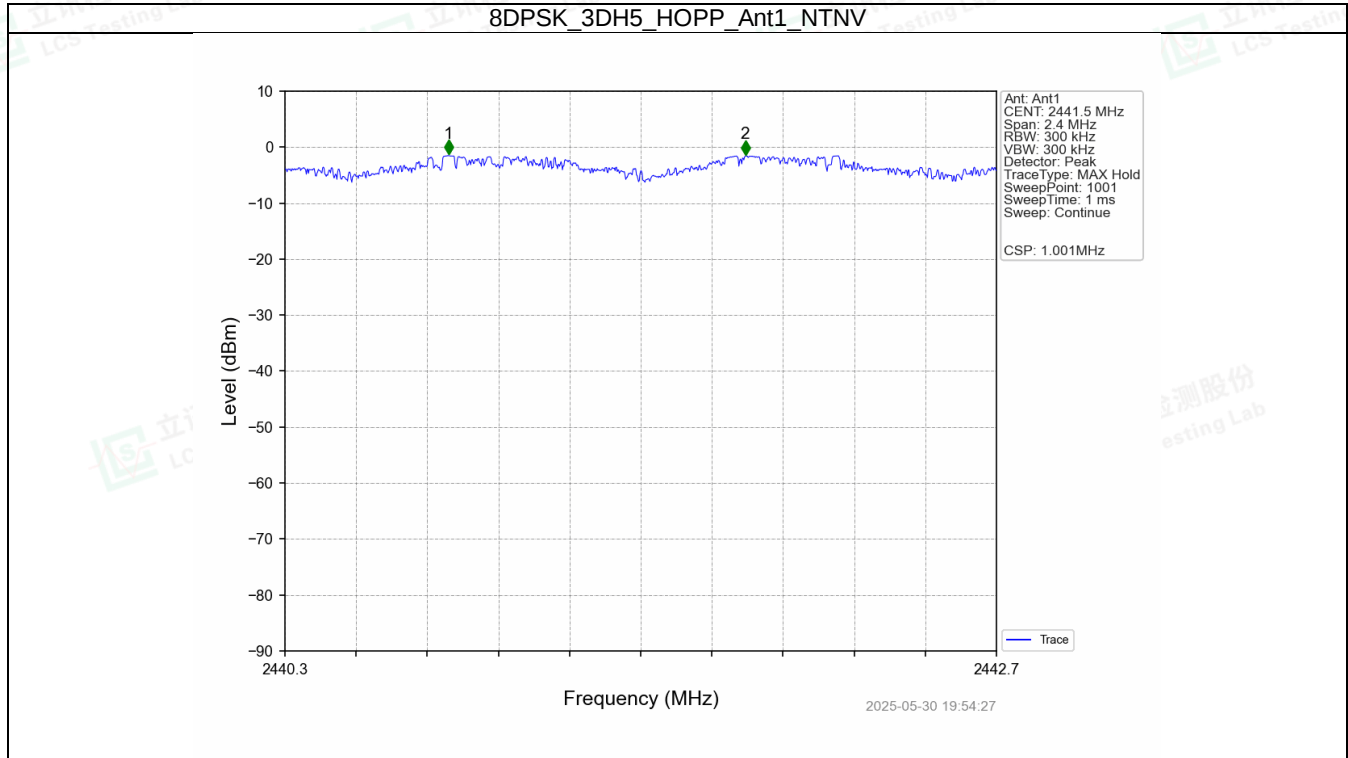




A.4 Dwell Time

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH5	2.892	31.600	101	292.092	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	2.898	31.600	114	330.372	<=400	Pass
8DPSK	SISO	HOPP	3DH5	2.900	31.600	87	252.300	<=400	Pass






GFSK_DH5_HOPP_Ant1_NTNV

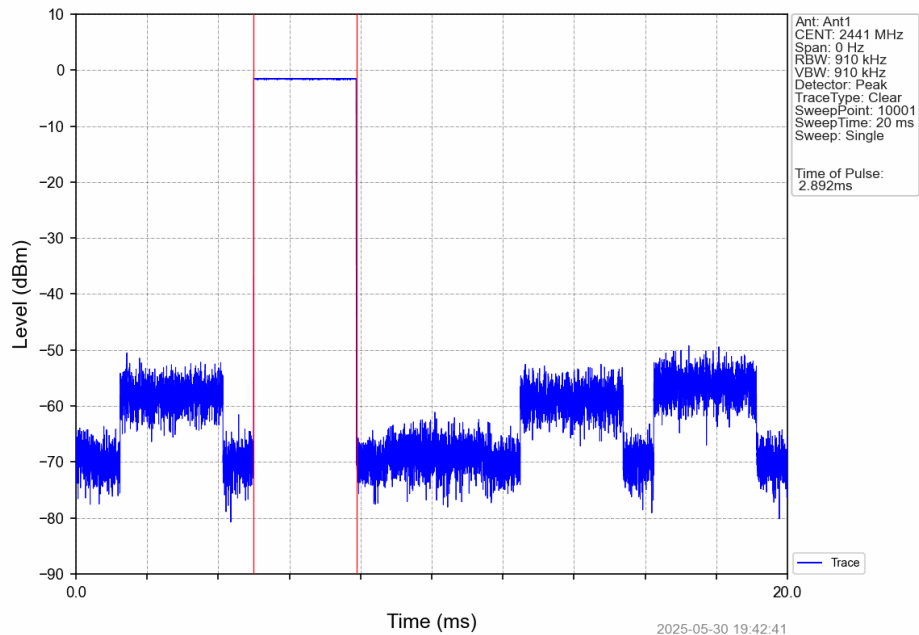


GFSK_DH5_HOPP_Ant1_NTNV

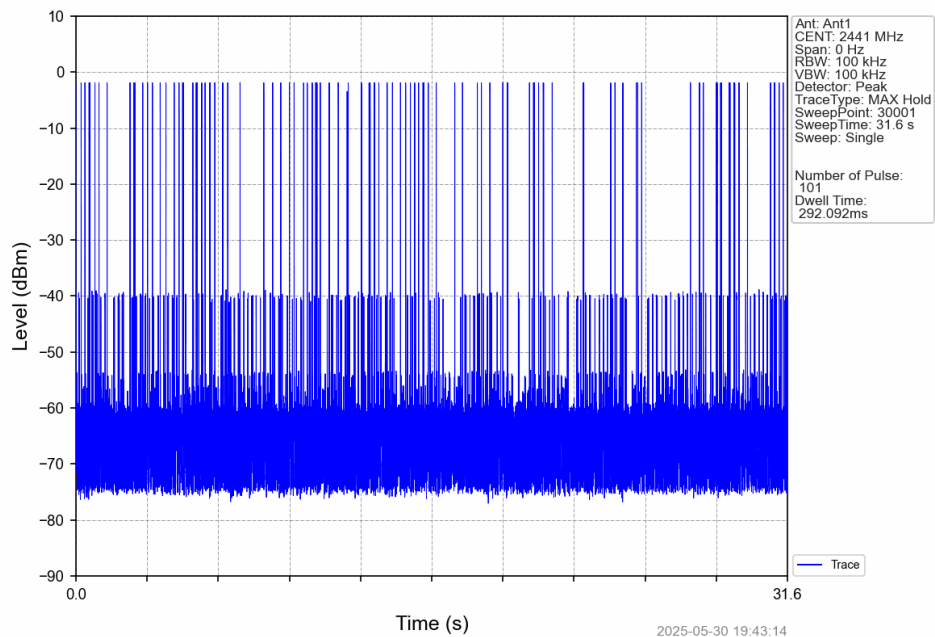




Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

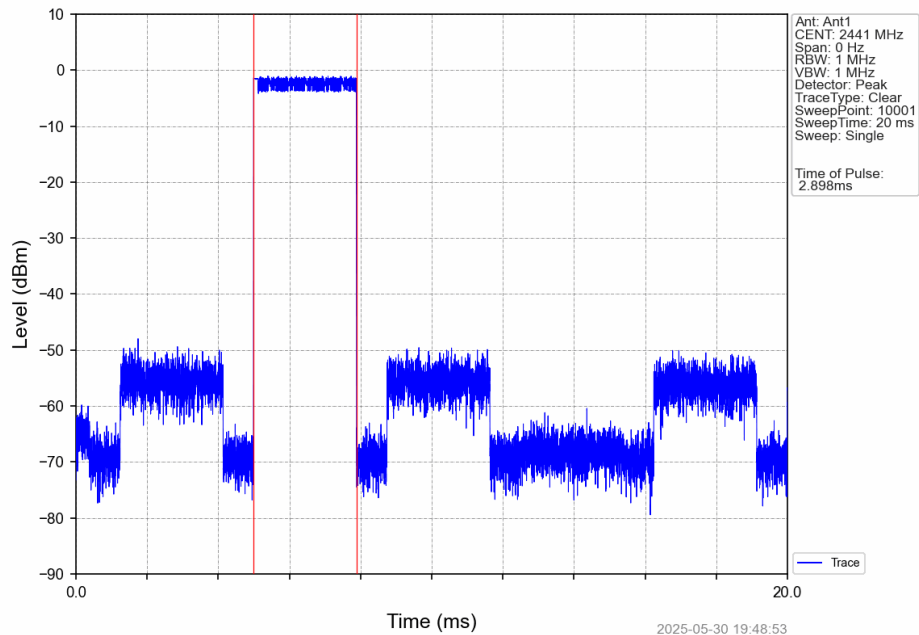


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

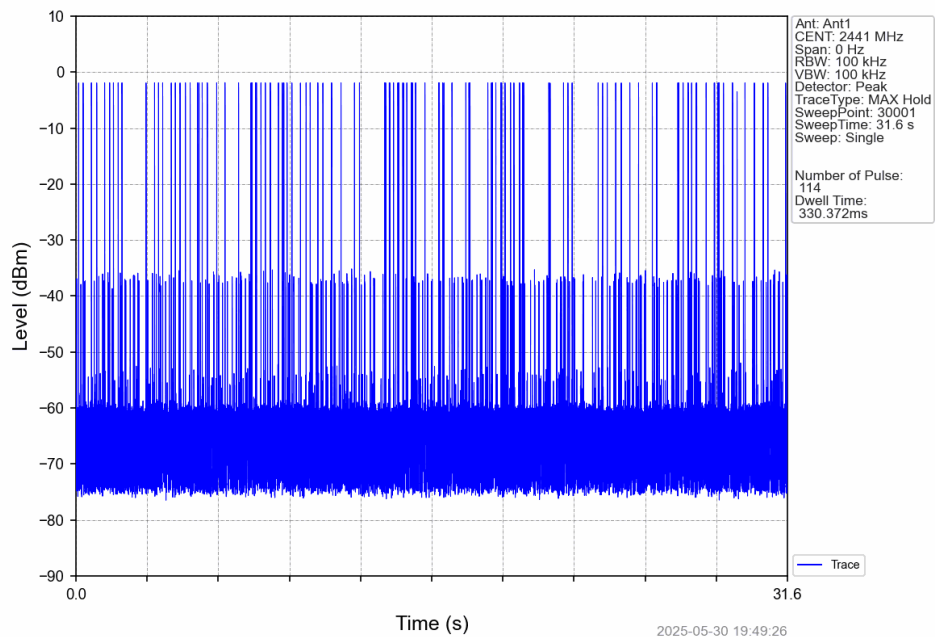




8DPSK_3DH5_HOPP_Ant1_NTNV

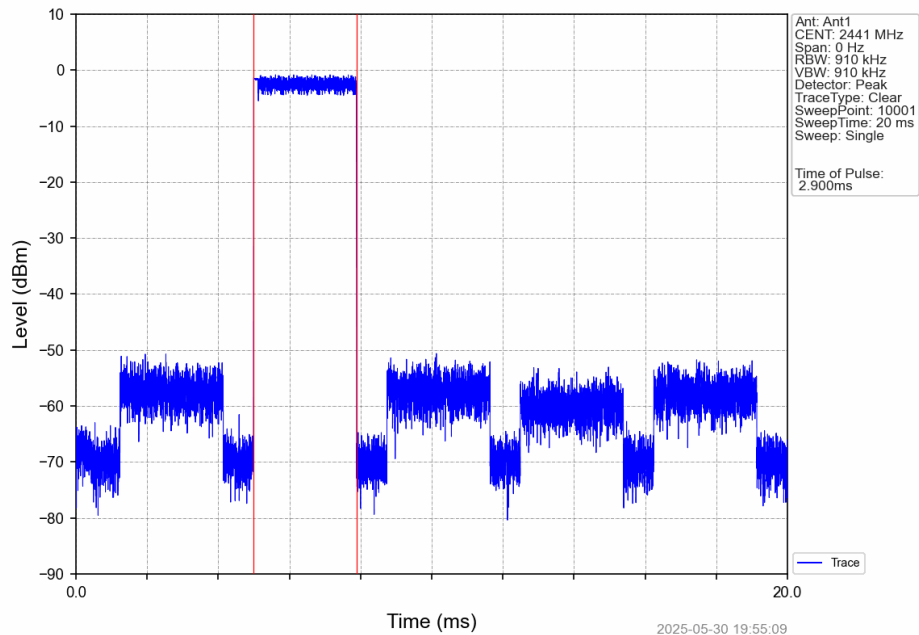

8DPSK_3DH5_HOPP_Ant1_NTNV

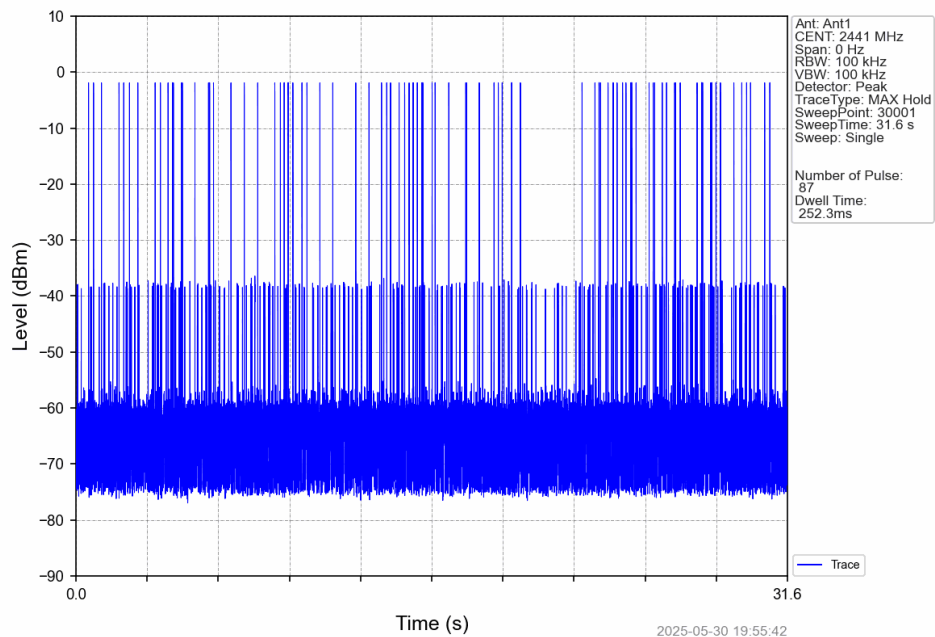




A.5 Number of Hopping Channel

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass







GFSK_DH5_HOPP_Ant1_NTNV

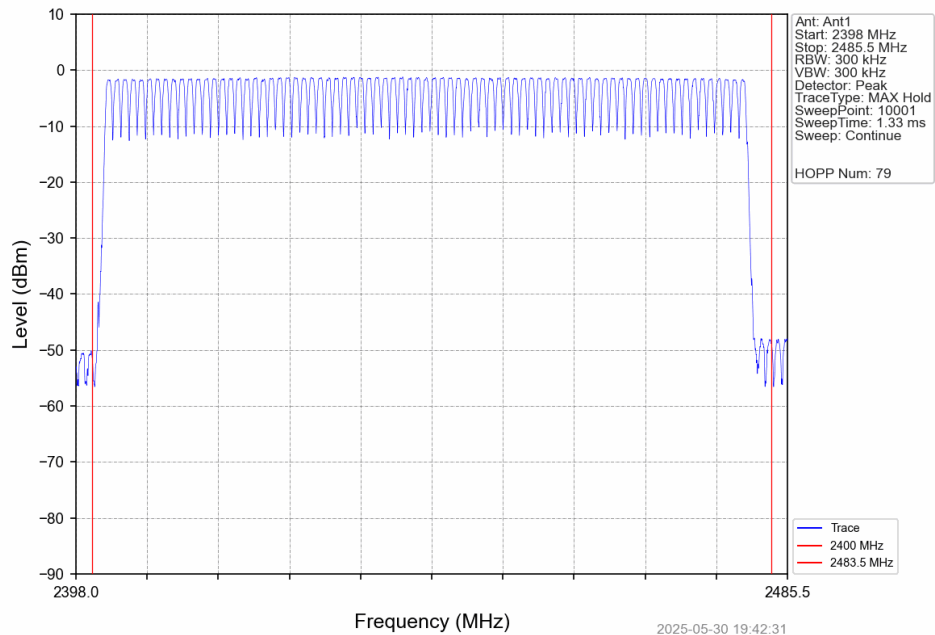

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

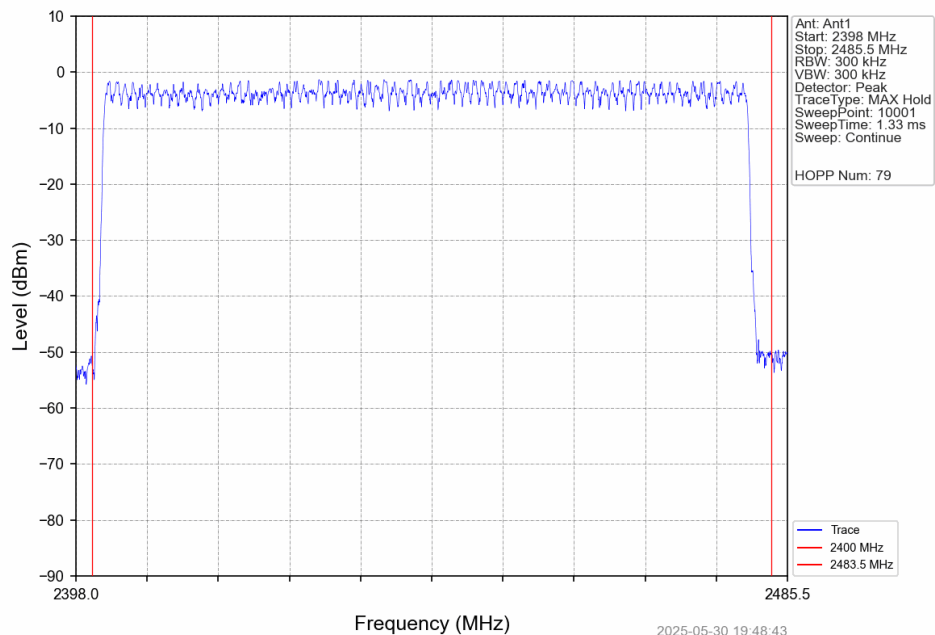

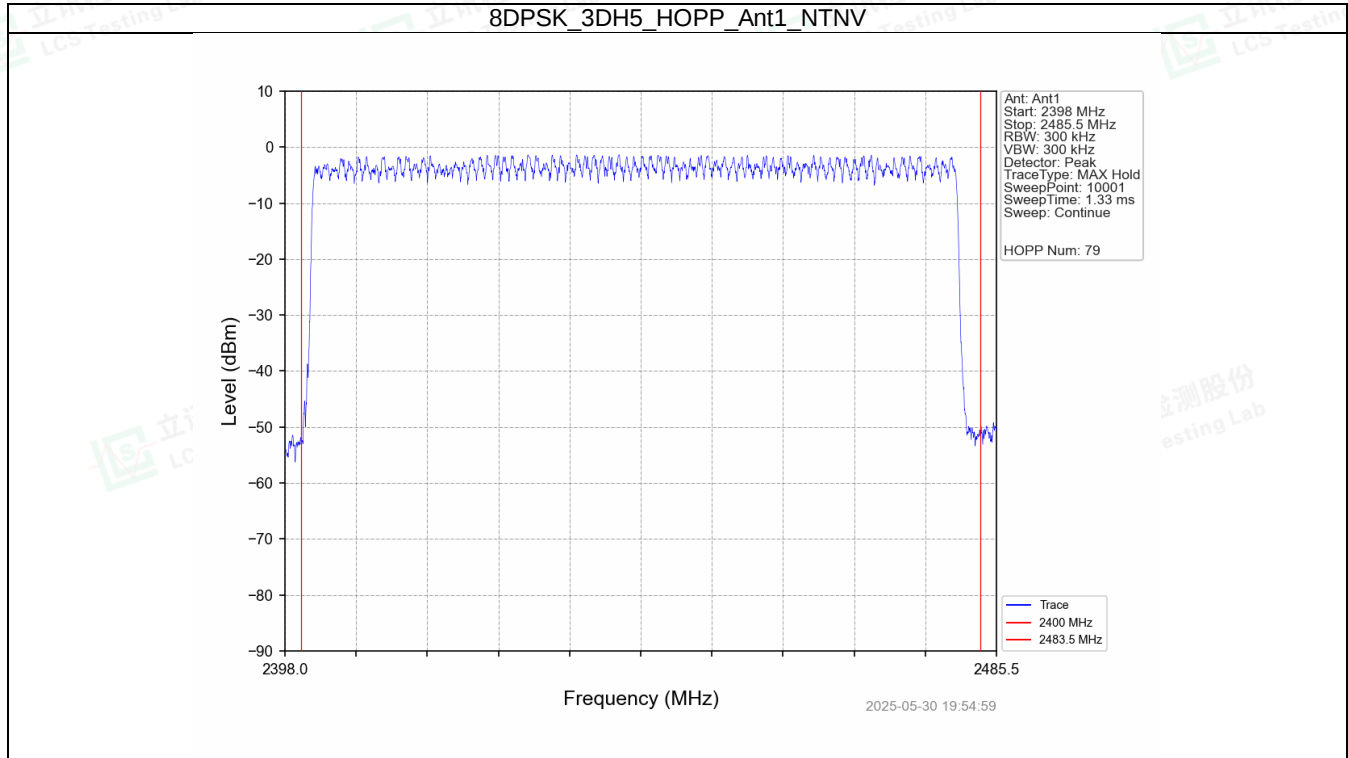



A.6 Band Edge


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	-1.77	-21.77	Pass
		2441	DH5	1	-1.48	-21.48	Pass
		2480	DH5	1	-1.70	-21.70	Pass
		HOPP	DH5	1	-1.39	-21.39	Pass
					-1.39	-21.39	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-1.76	-21.76	Pass
		2441	2DH5	1	-1.47	-21.47	Pass
		2480	2DH5	1	-1.71	-21.71	Pass
		HOPP	2DH5	1	-1.54	-21.54	Pass
					-1.54	-21.54	Pass
8DPSK	SISO	2402	3DH5	1	-1.77	-21.77	Pass
		2441	3DH5	1	-1.48	-21.48	Pass
		2480	3DH5	1	-1.72	-21.72	Pass
		HOPP	3DH5	1	-1.42	-21.42	Pass
					-1.42	-21.42	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.






GFSK_DH5_LCH_2402MHz_Ant1_NTNV

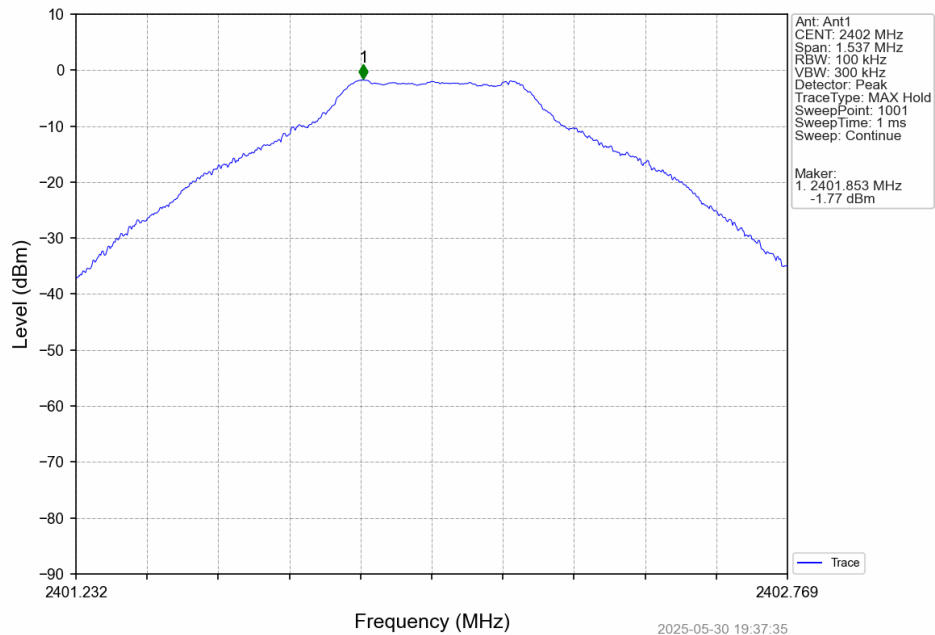


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

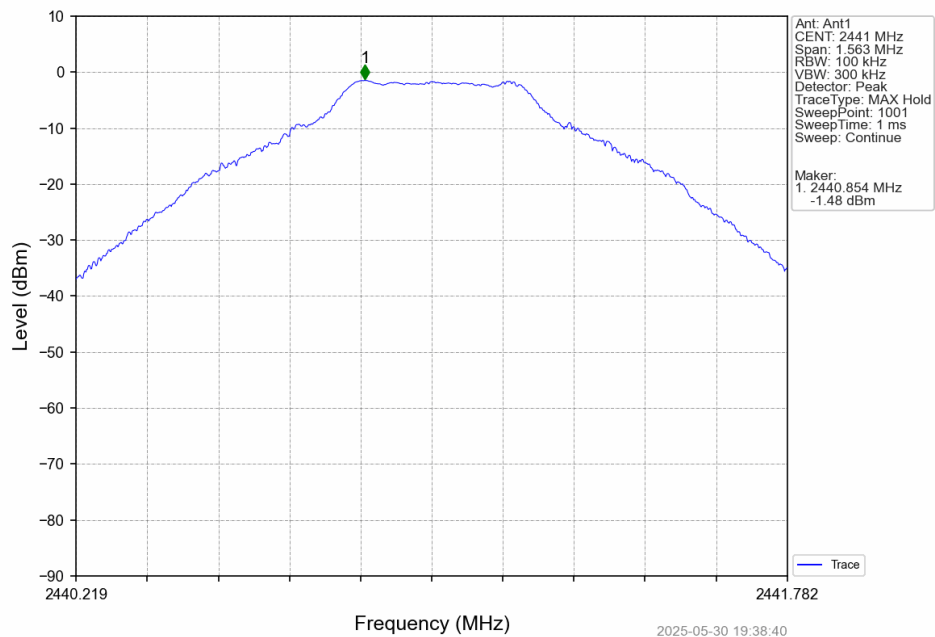




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

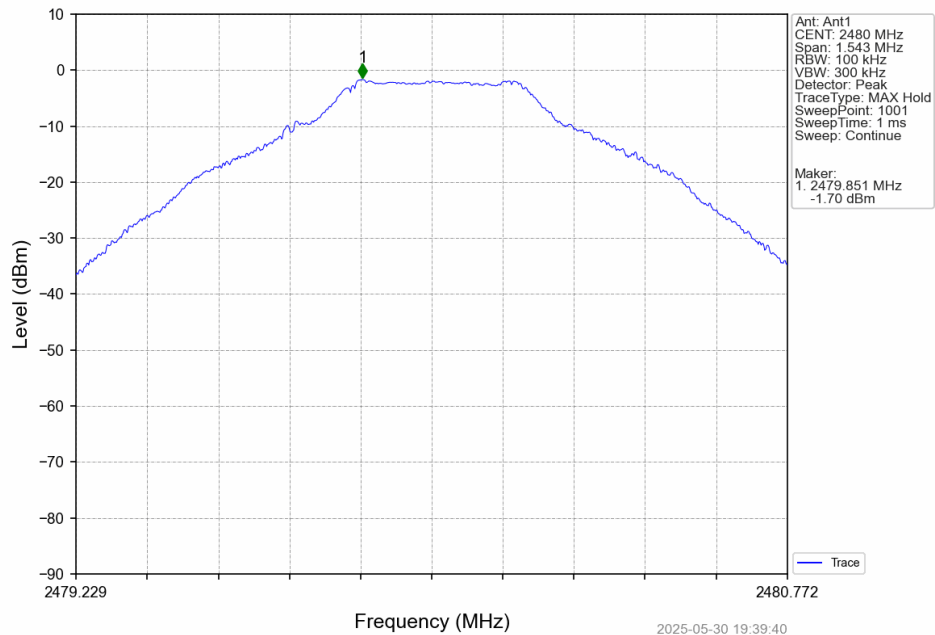


GFSK_DH5_HOPP_2440MHz_Ant1_NTNV

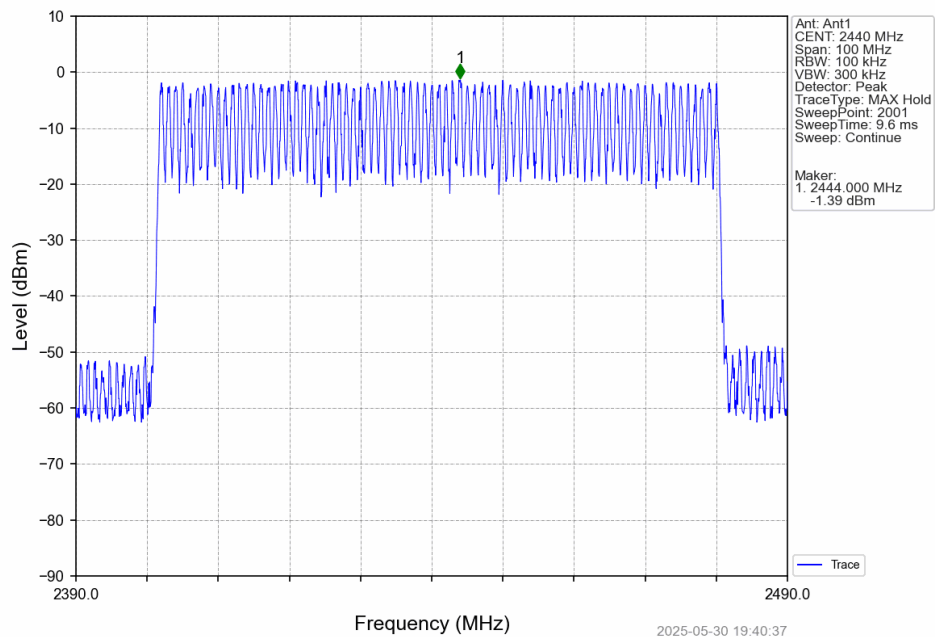




GFSK_DH5_HOPP_Ant1_NTNV

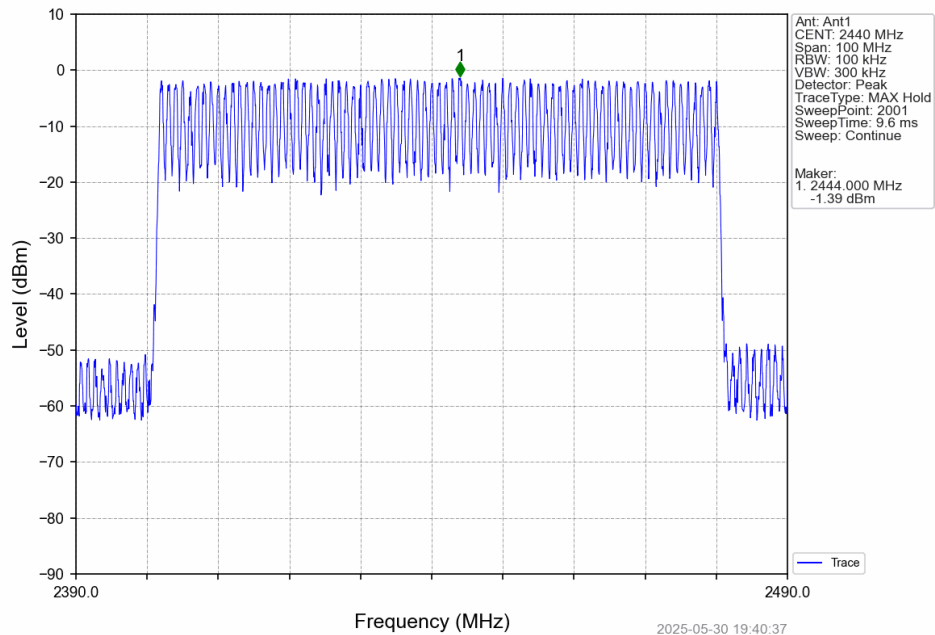


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

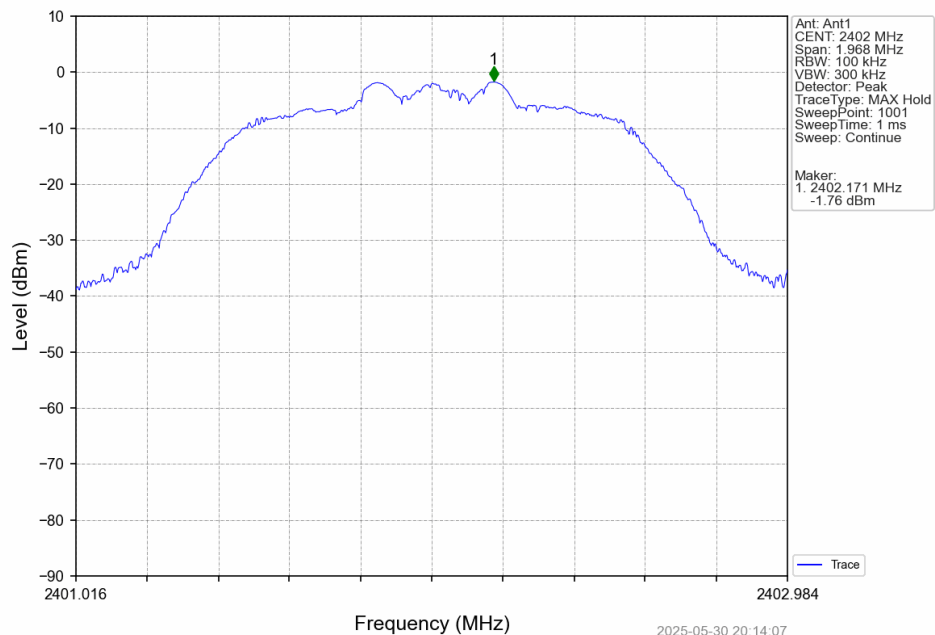




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

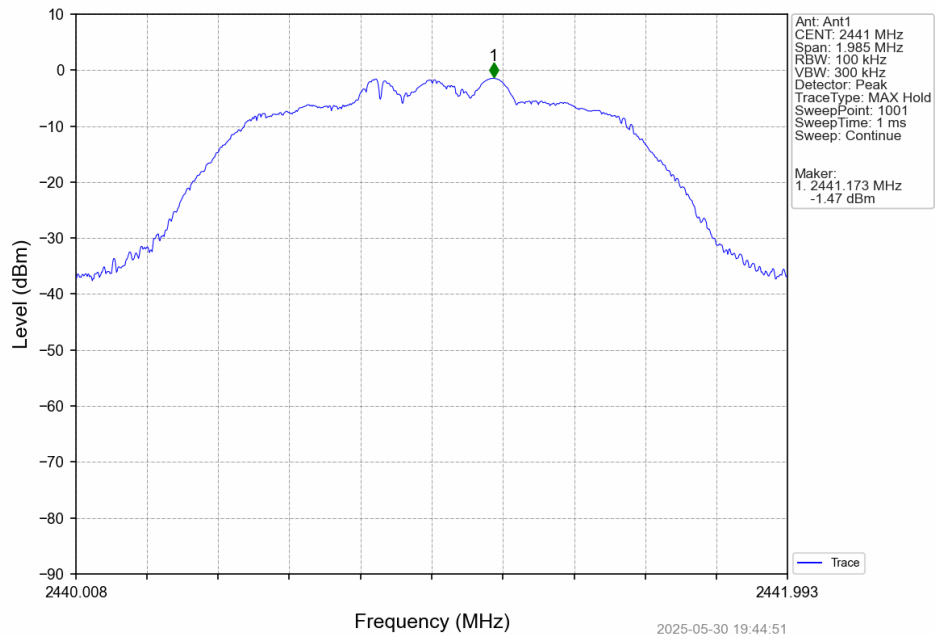


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

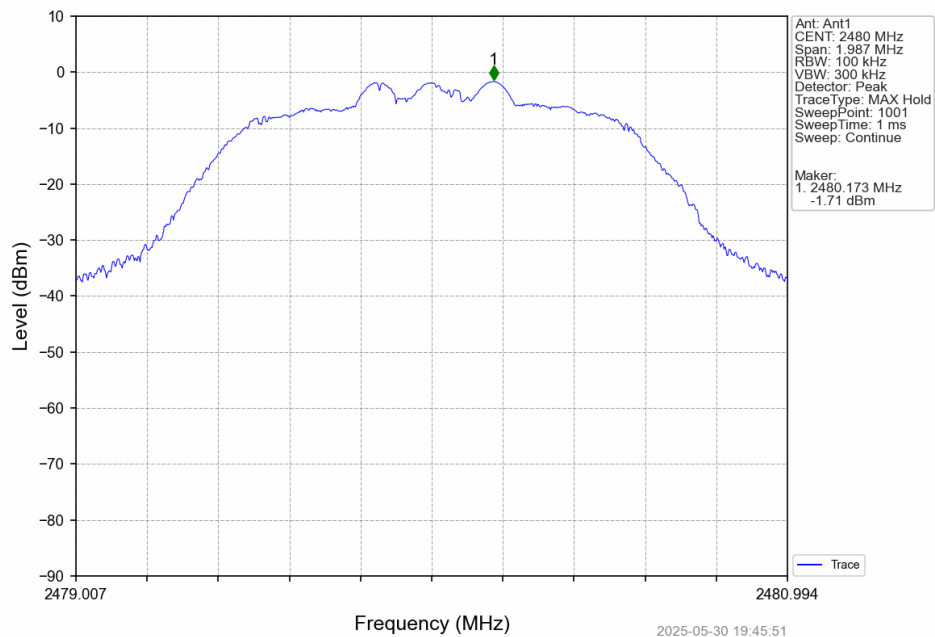




Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

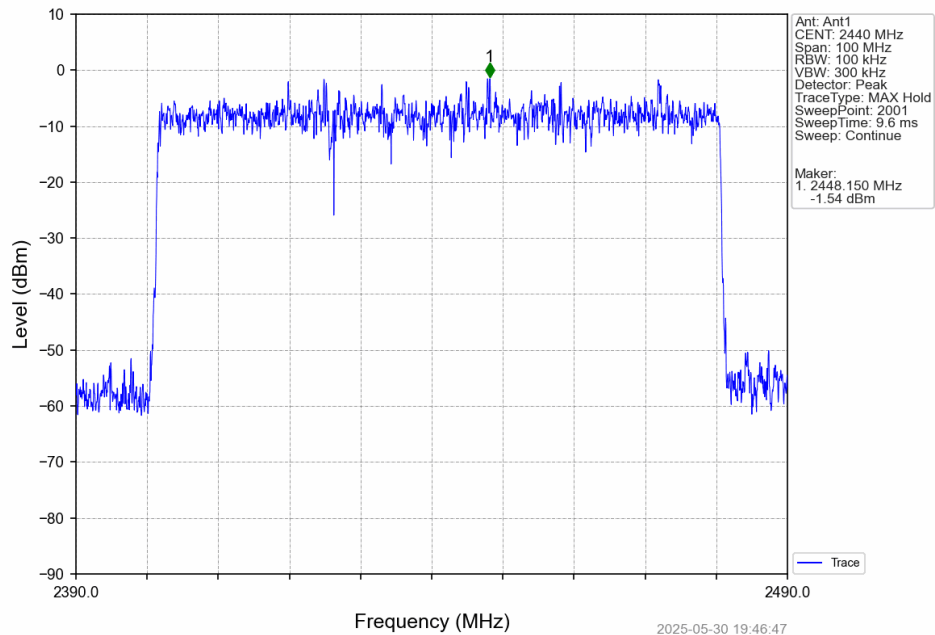


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

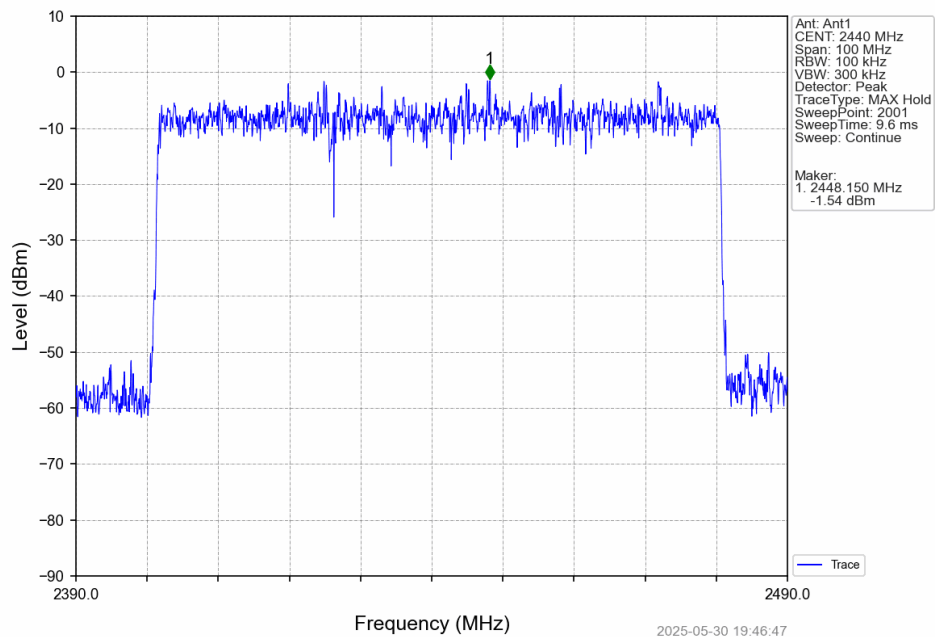




8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

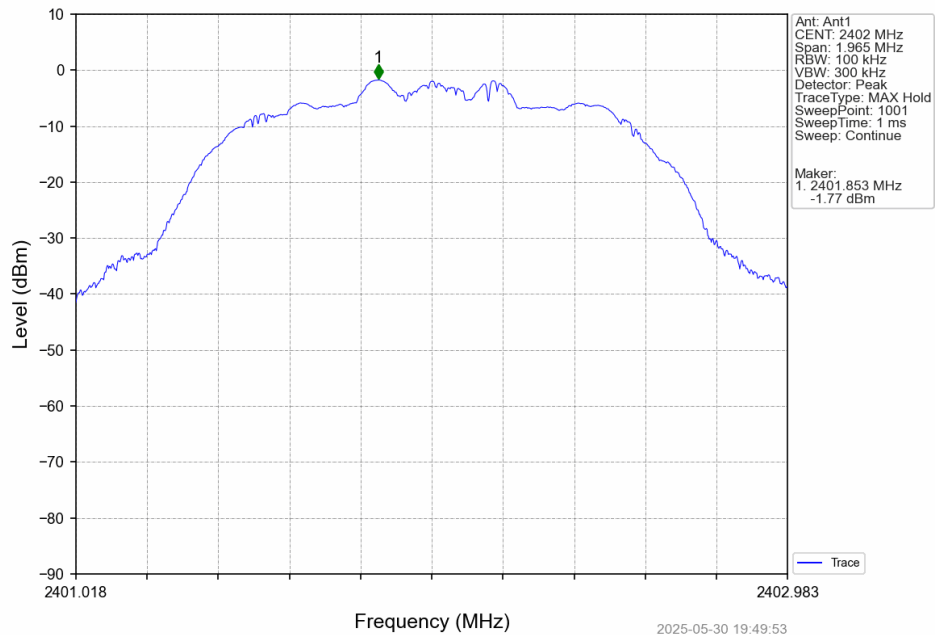


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

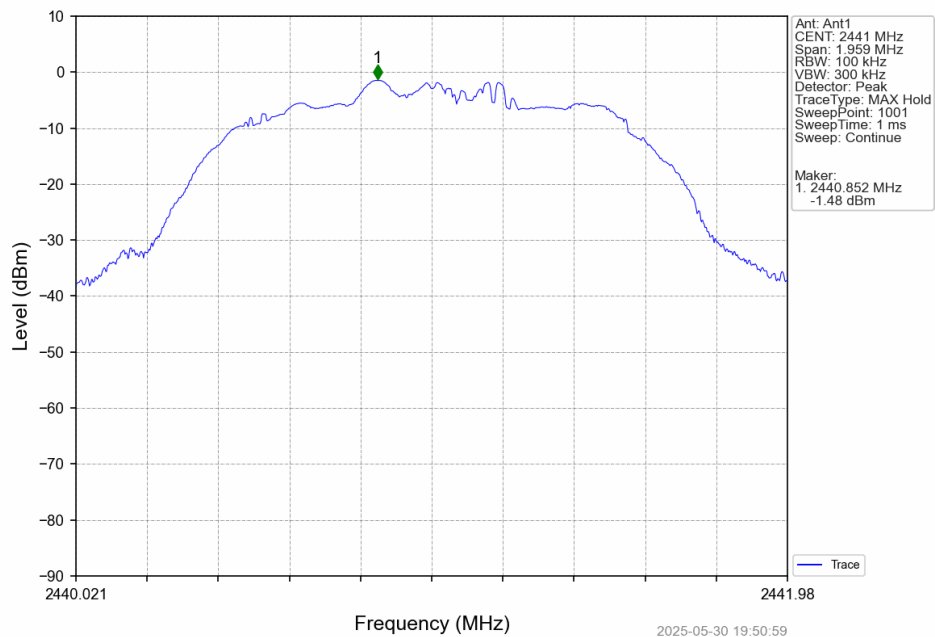





8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

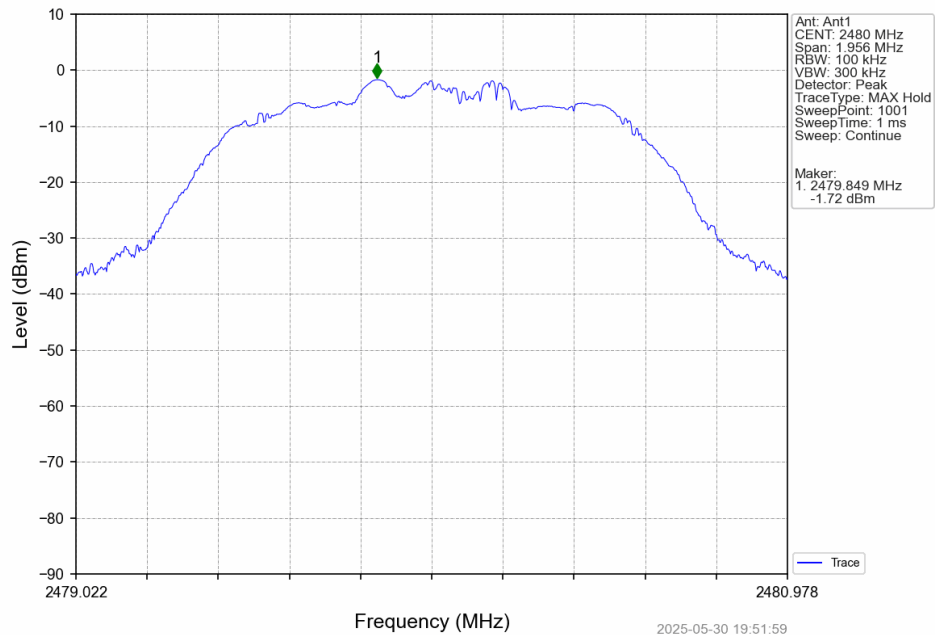


8DPSK_3DH5_HOPP_Ant1_NTNV

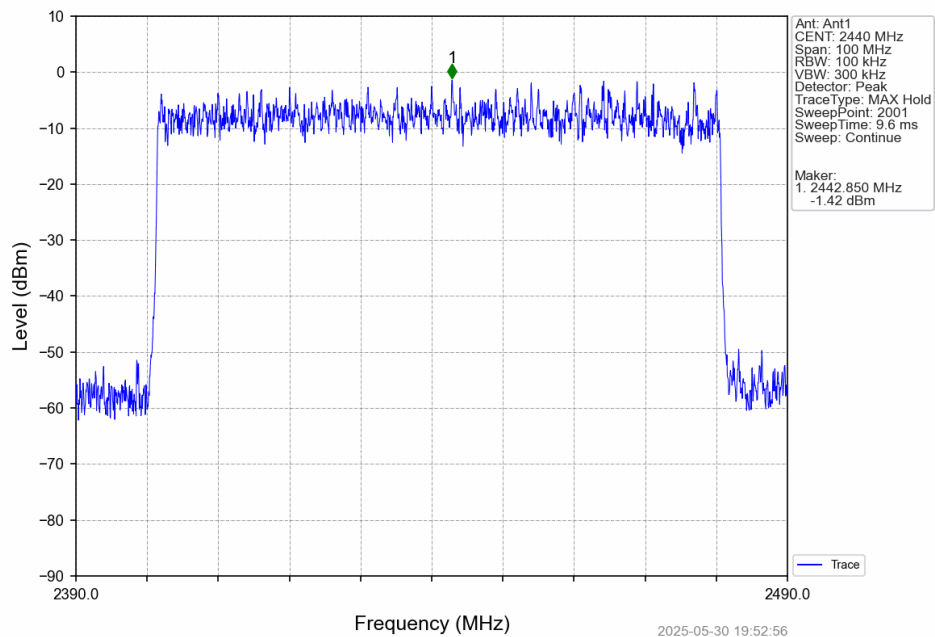

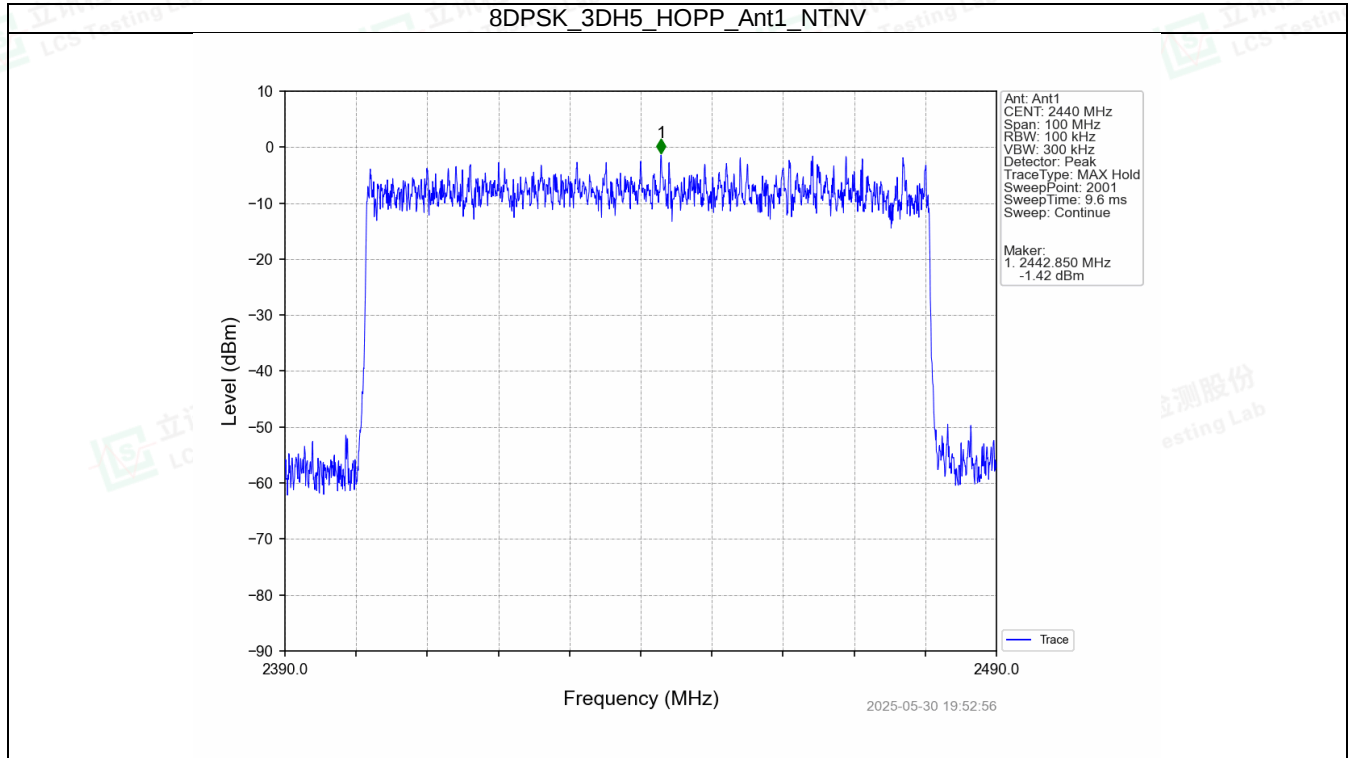




GFSK_DH5_LCH_2402MHz_Ant1_NTNV

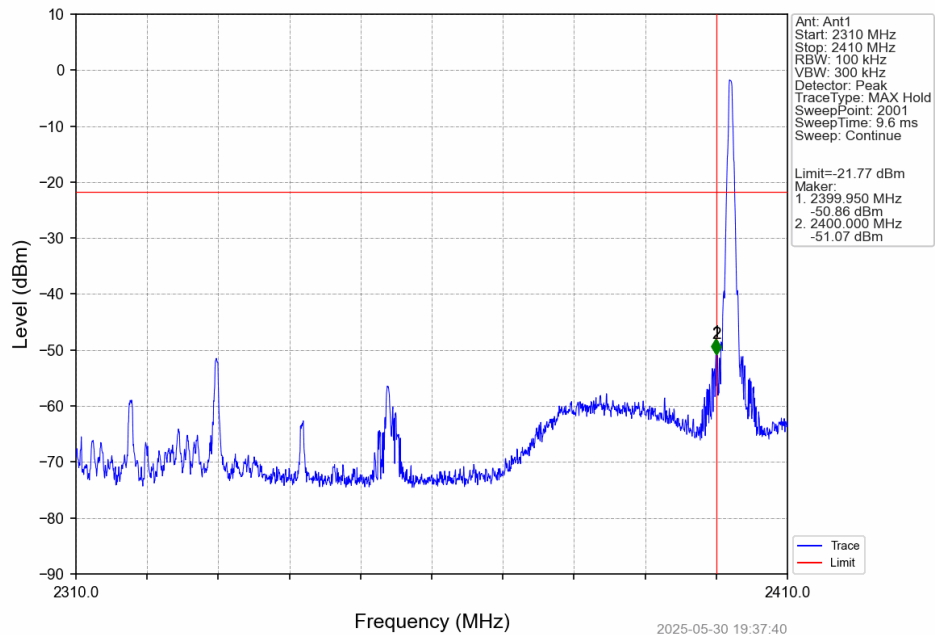


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

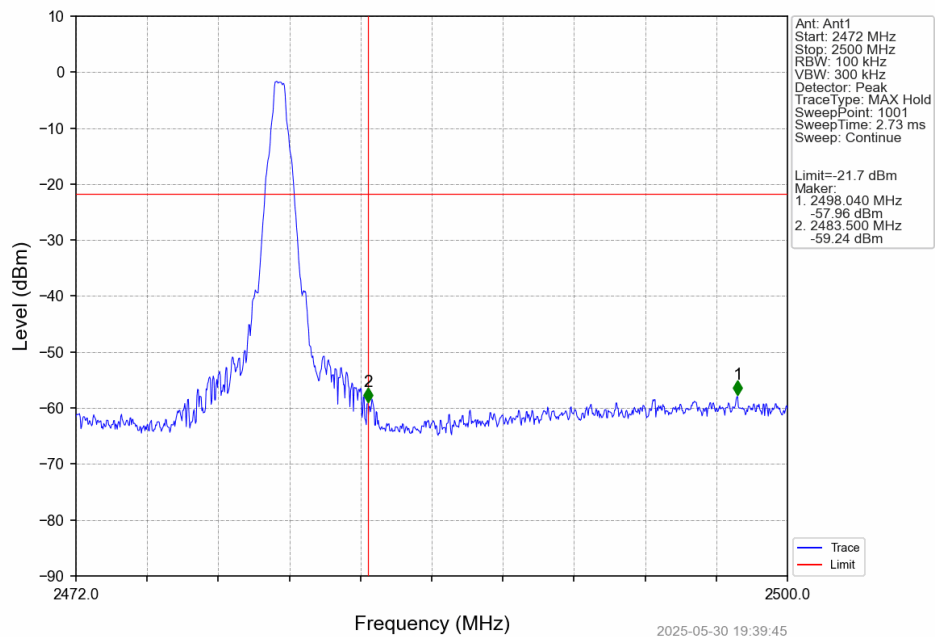




GFSK_DH5_HOPP_Ant1_NTNV

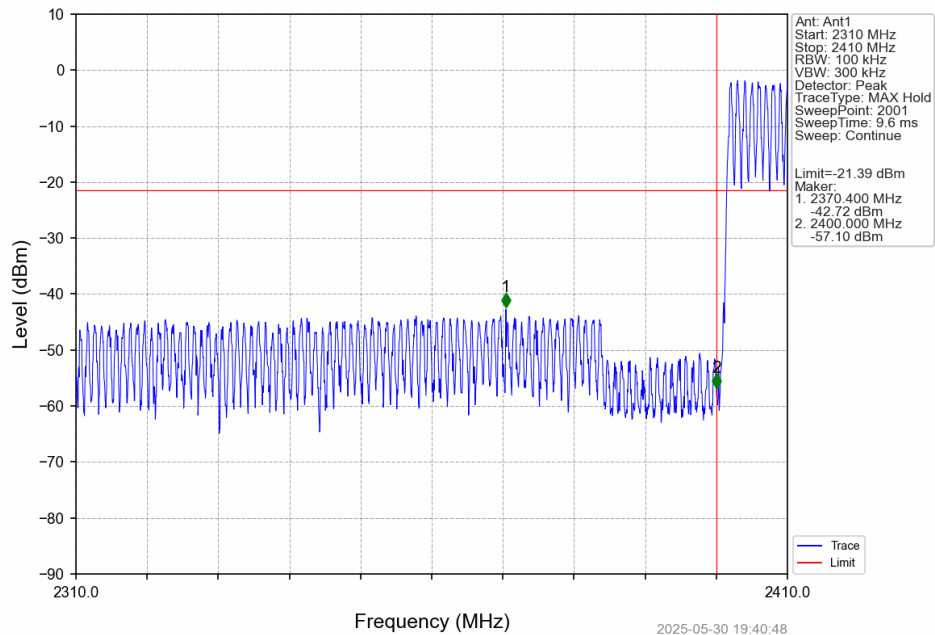

GFSK_DH5_HOPP_Ant1_NTNV

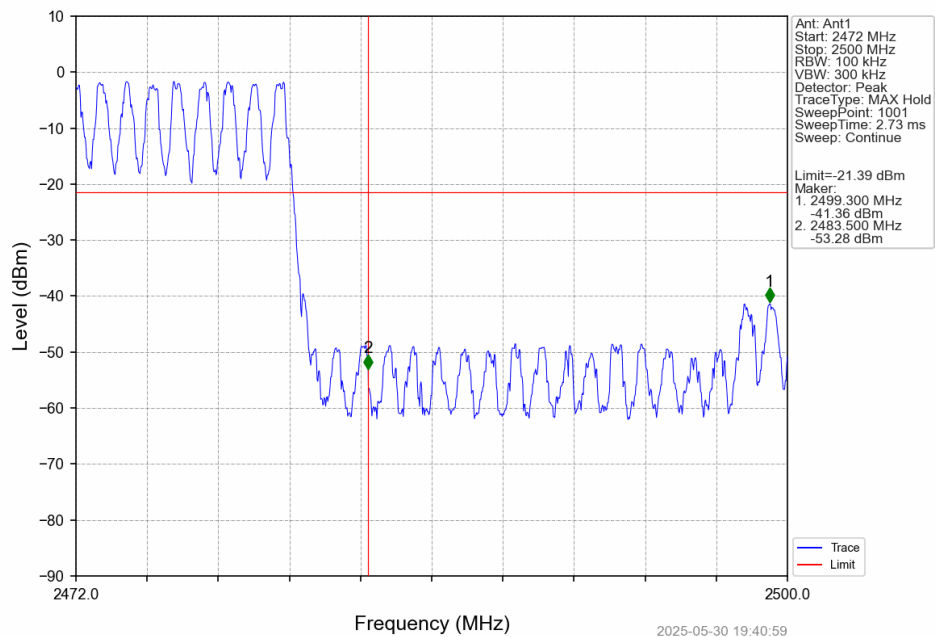

Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

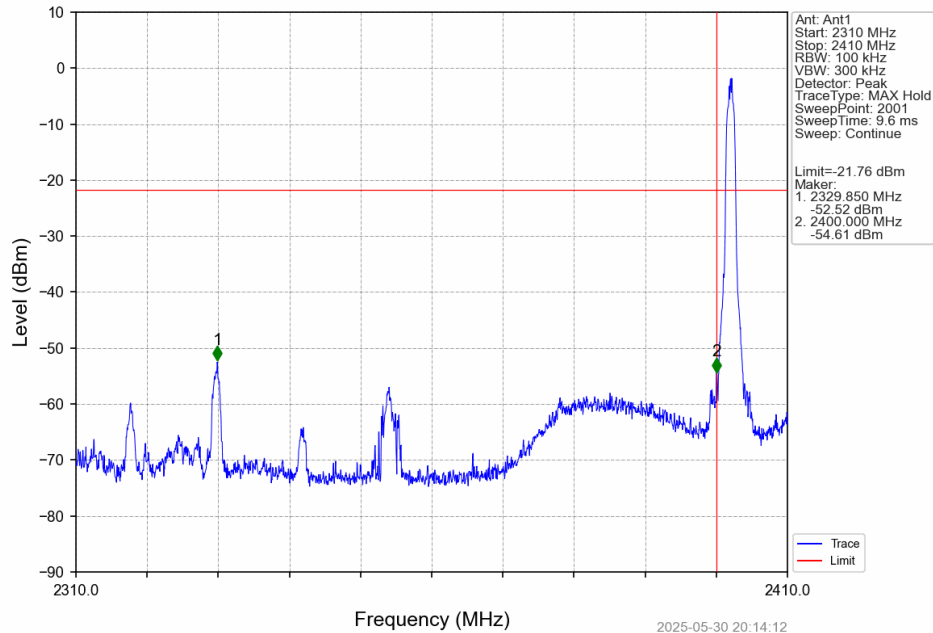


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

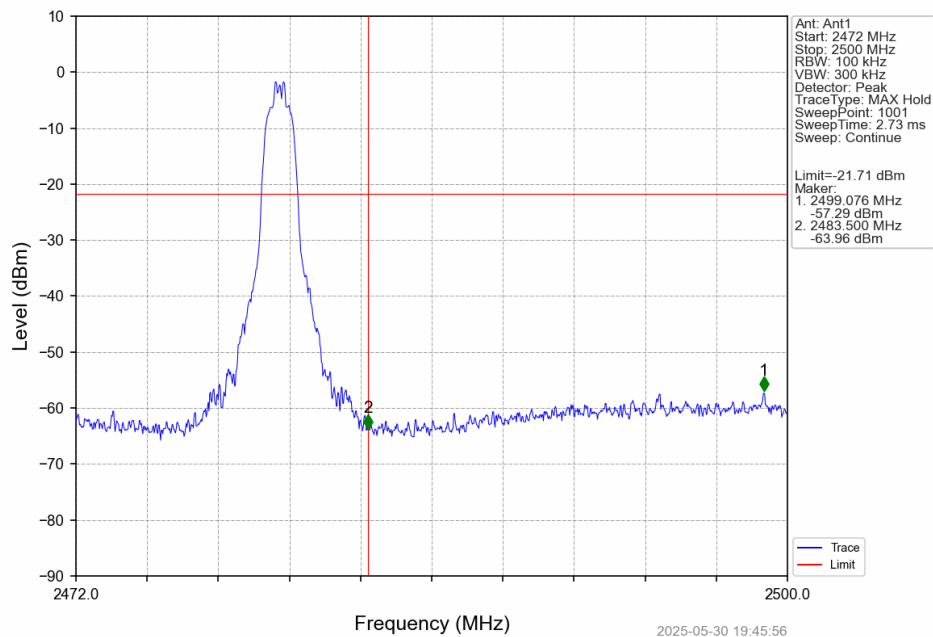


Pi/4DQPSK_2DH5_HOPP_2480MHz_Ant1_NTNV



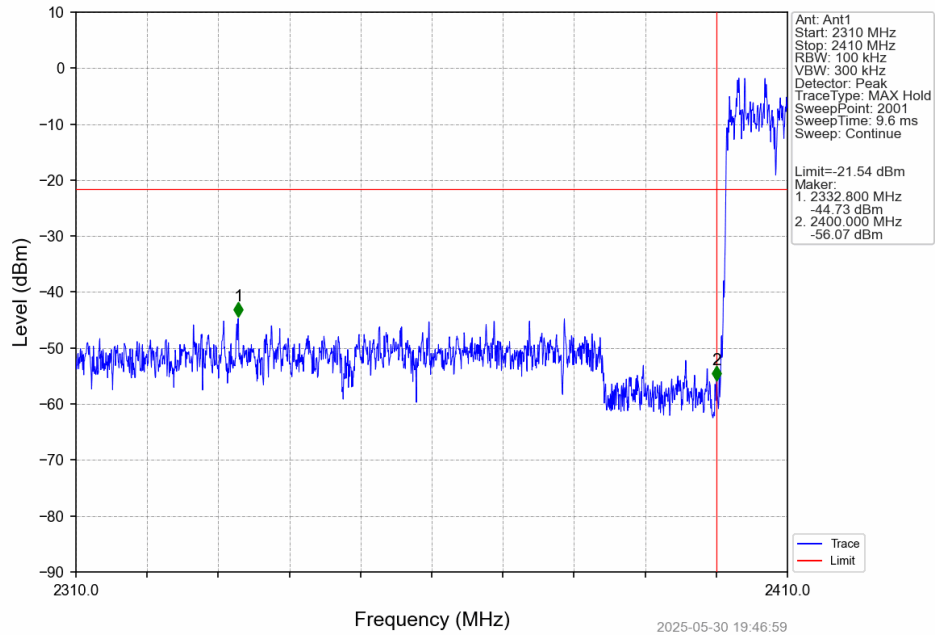


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

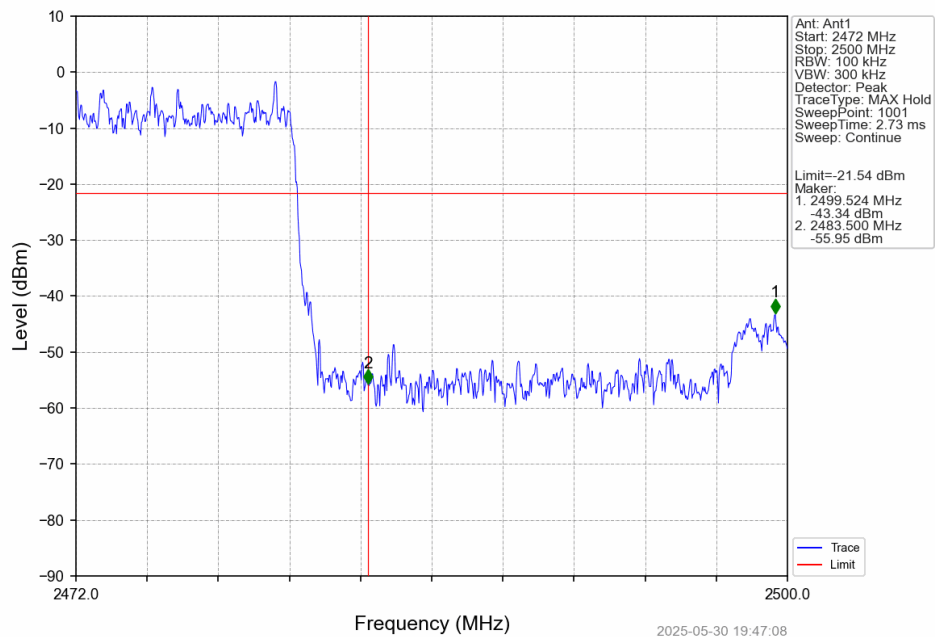




8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

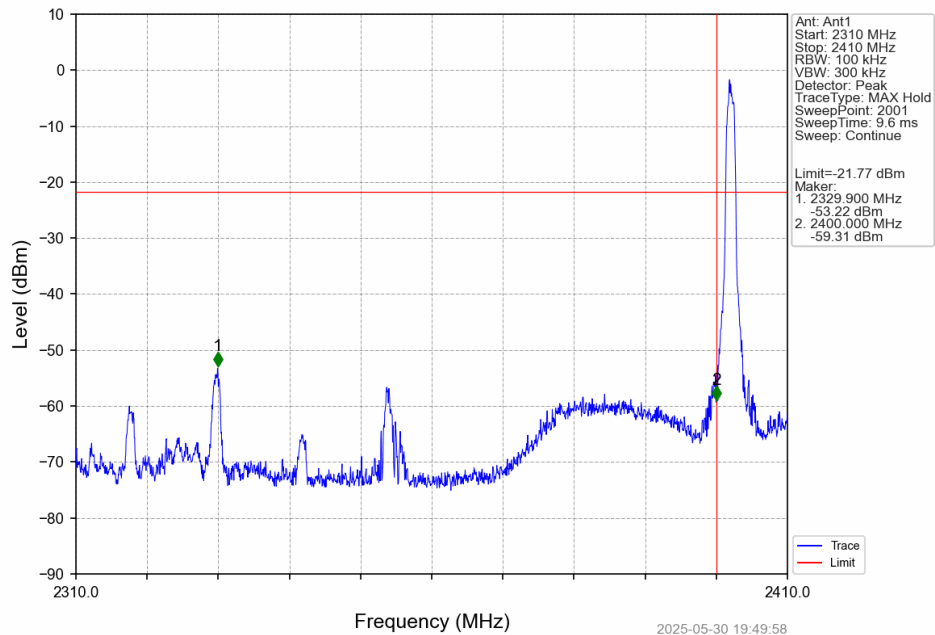



8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

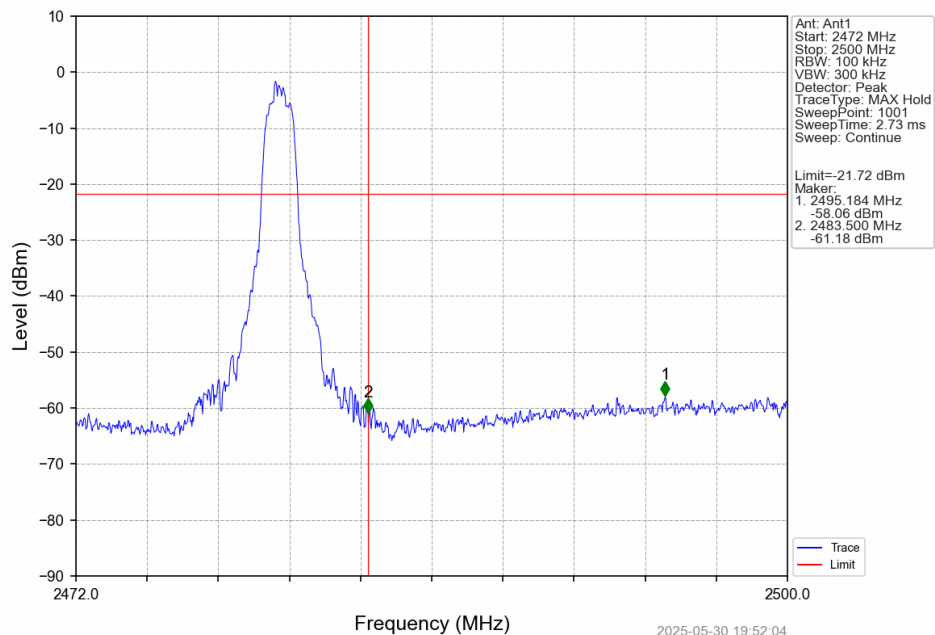

8DPSK_3DH5_HOPP_Ant1_NTNV



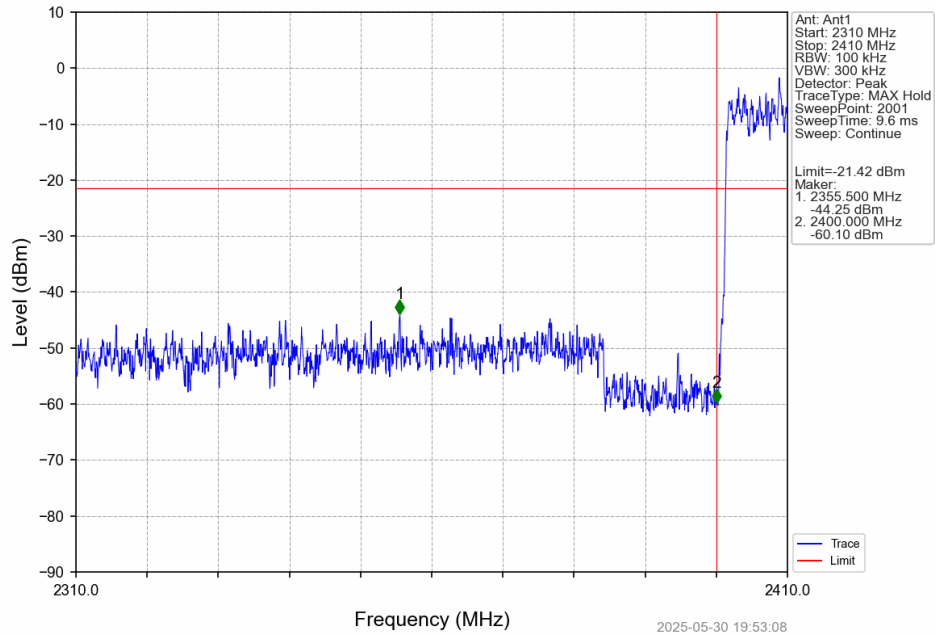

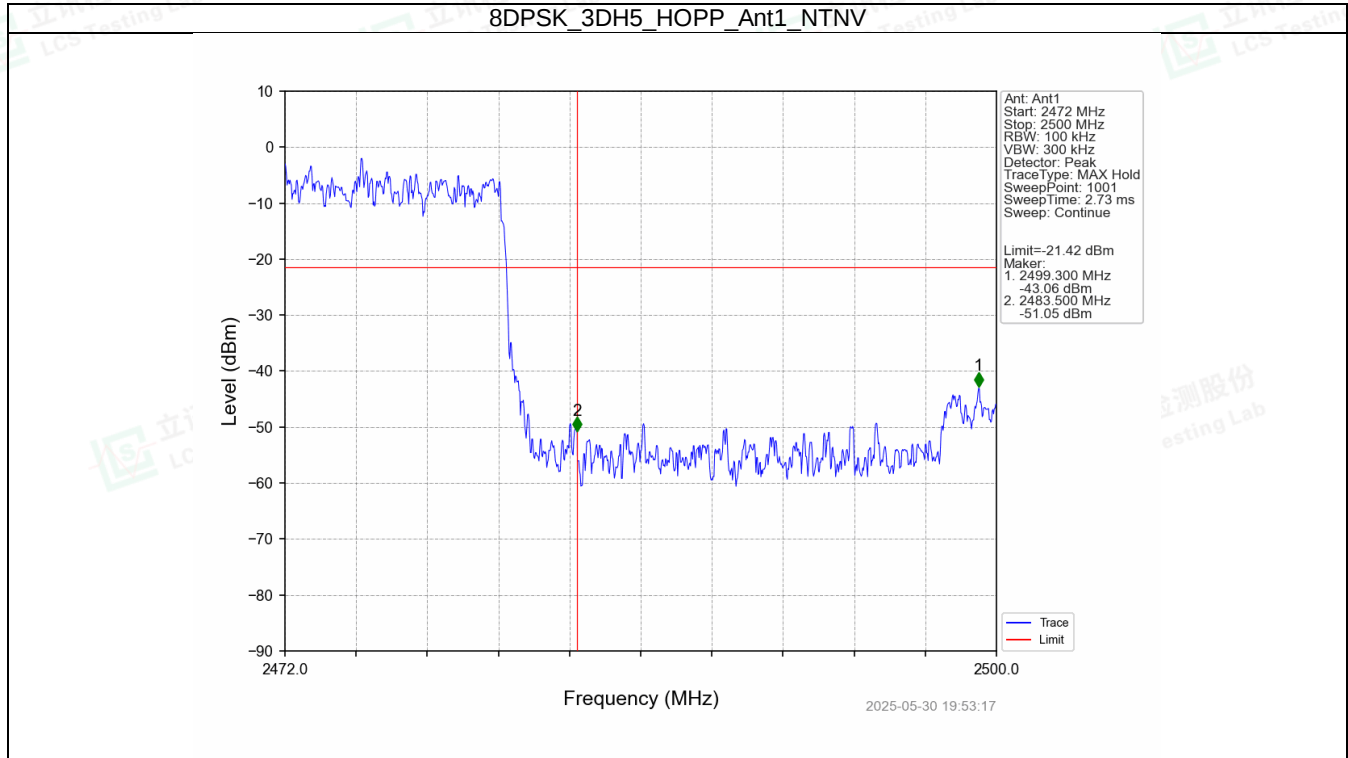



A.7 Conducted RF Spurious Emission


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-1.77
		2441	DH5	1	-1.48
		2480	DH5	1	-1.70
		HOPP	DH5	1	-1.39
					-1.39
Pi/4DQPSK	SISO	2402	2DH5	1	-1.76
		2441	2DH5	1	-1.47
		2480	2DH5	1	-1.71
		HOPP	2DH5	1	-1.54
					-1.54
8DPSK	SISO	2402	3DH5	1	-1.77
		2441	3DH5	1	-1.48
		2480	3DH5	1	-1.72
		HOPP	3DH5	1	-1.42
					-1.42

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.






GFSK_DH5_LCH_2402MHz_Ant1_NTNV

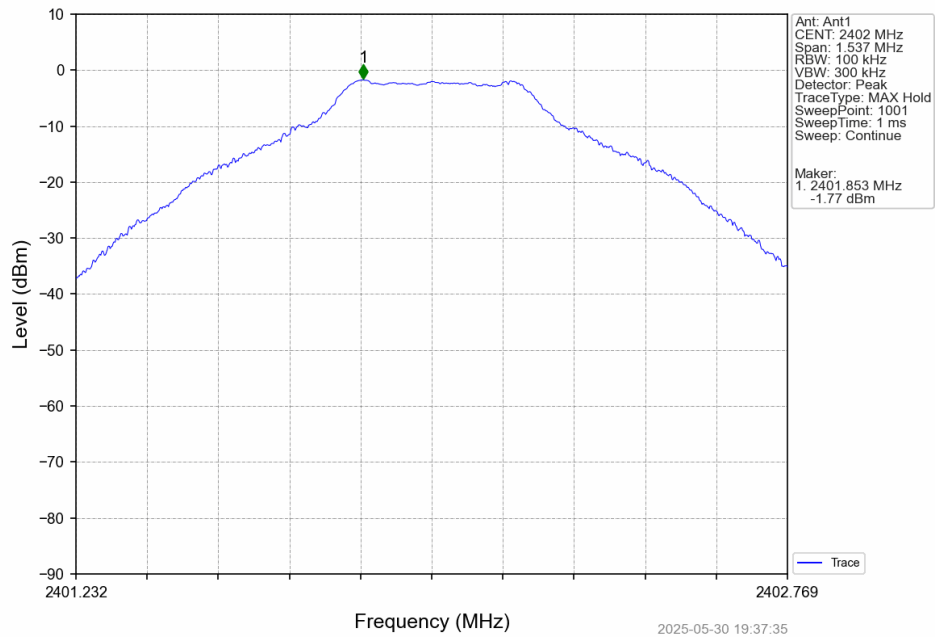


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

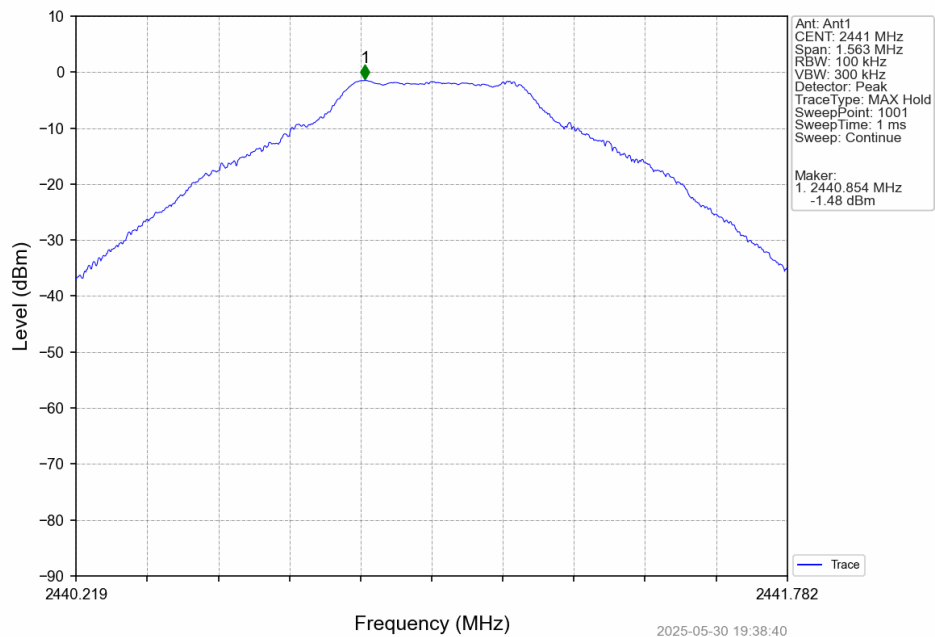




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

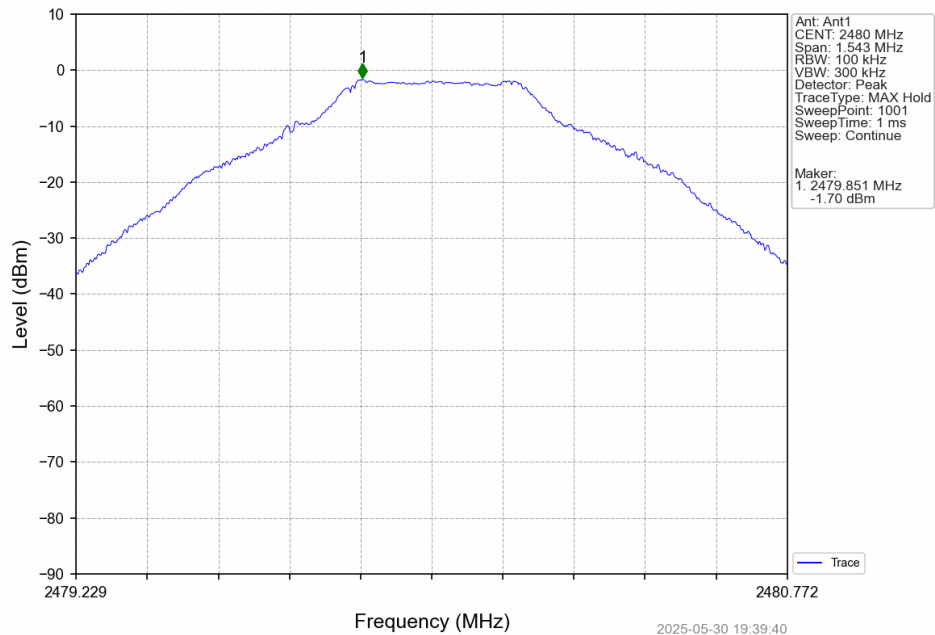


GFSK_DH5_HOPP_2440MHz_Ant1_NTNV

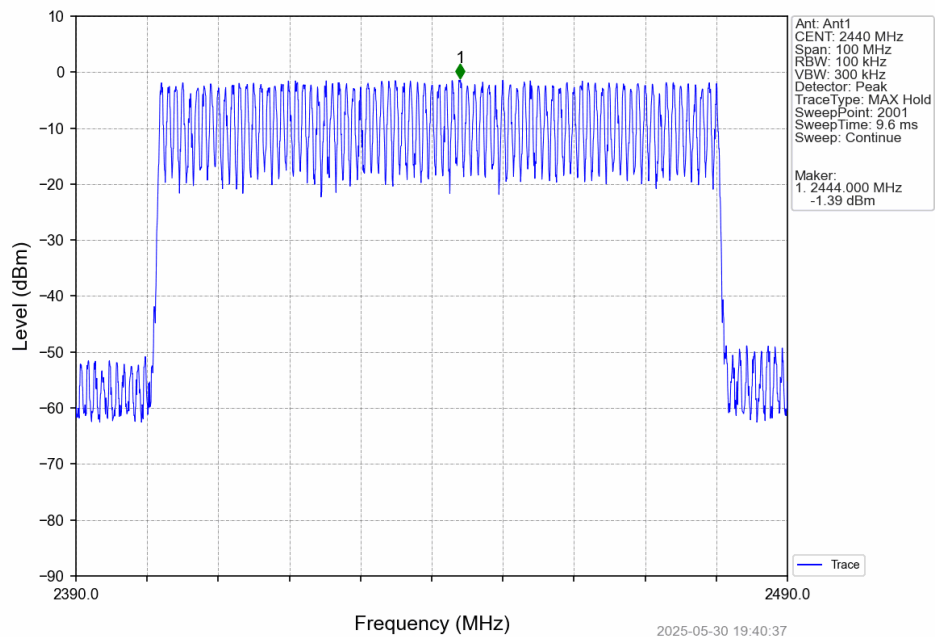




GFSK_DH5_HOPP_Ant1_NTNV

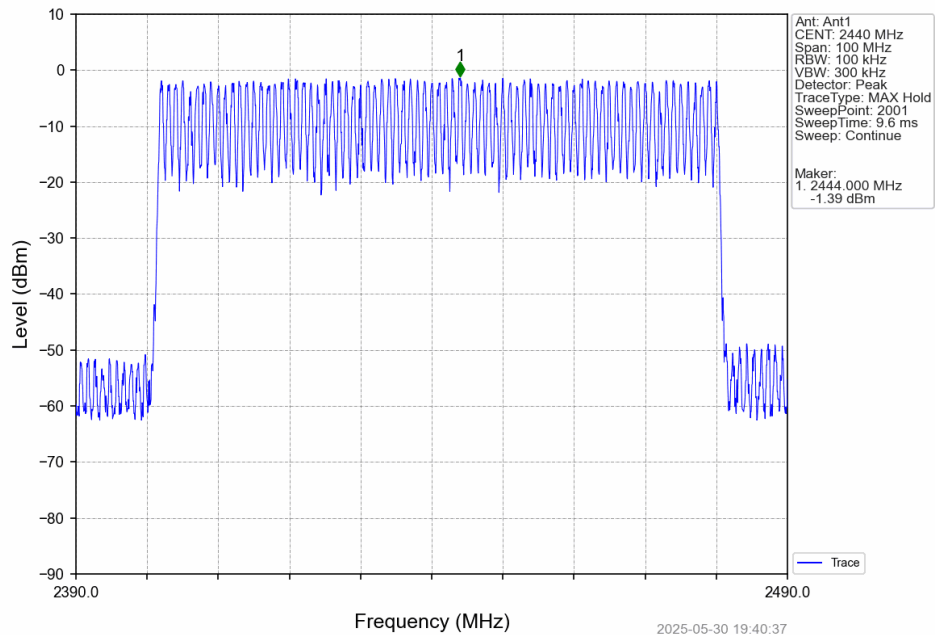


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

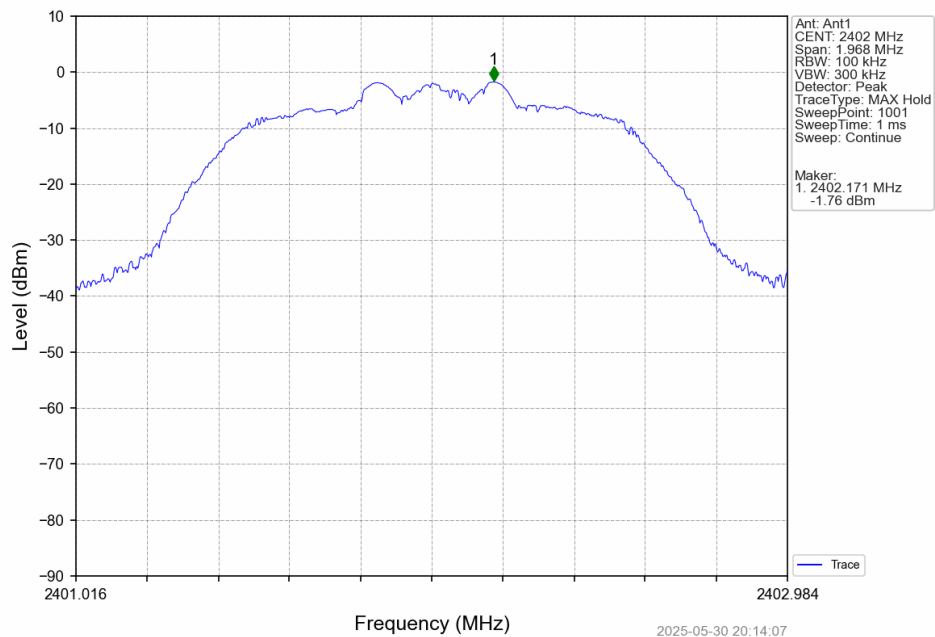




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

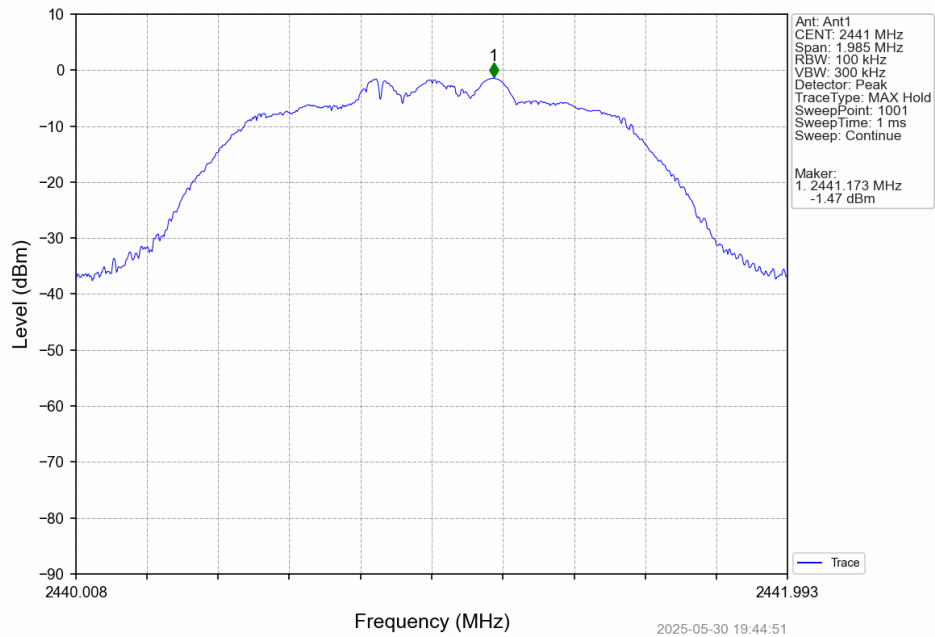


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

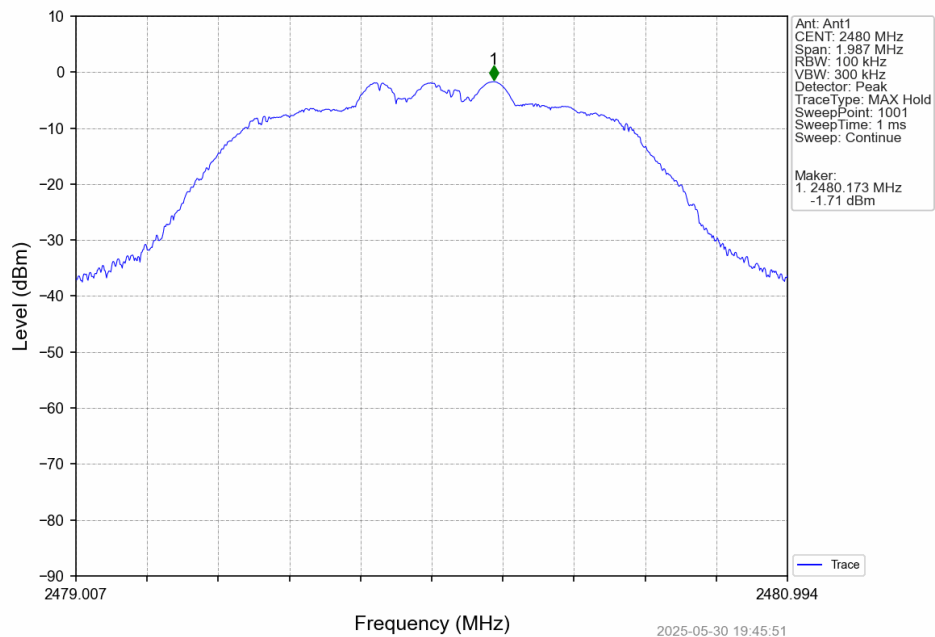




Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

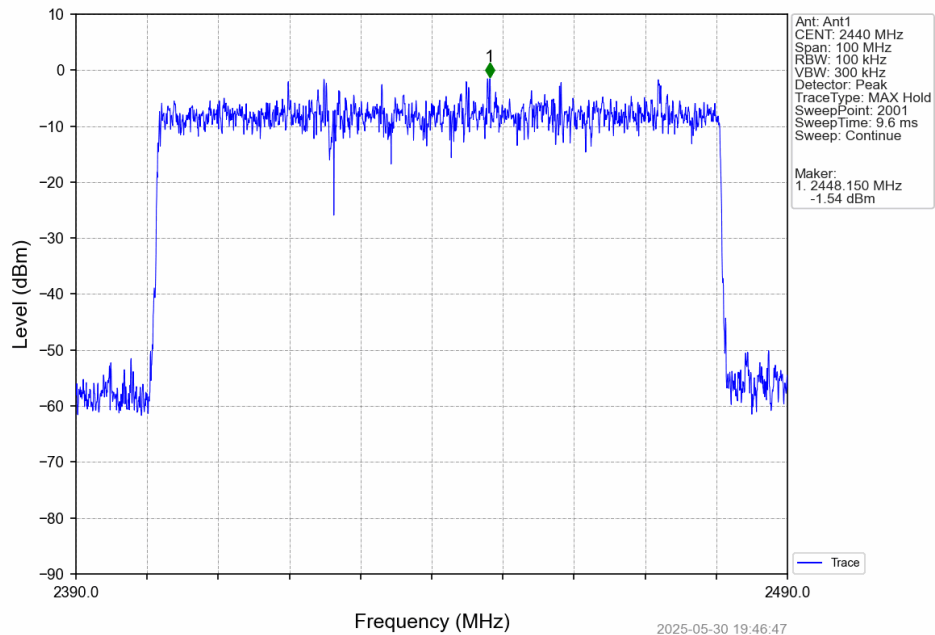


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

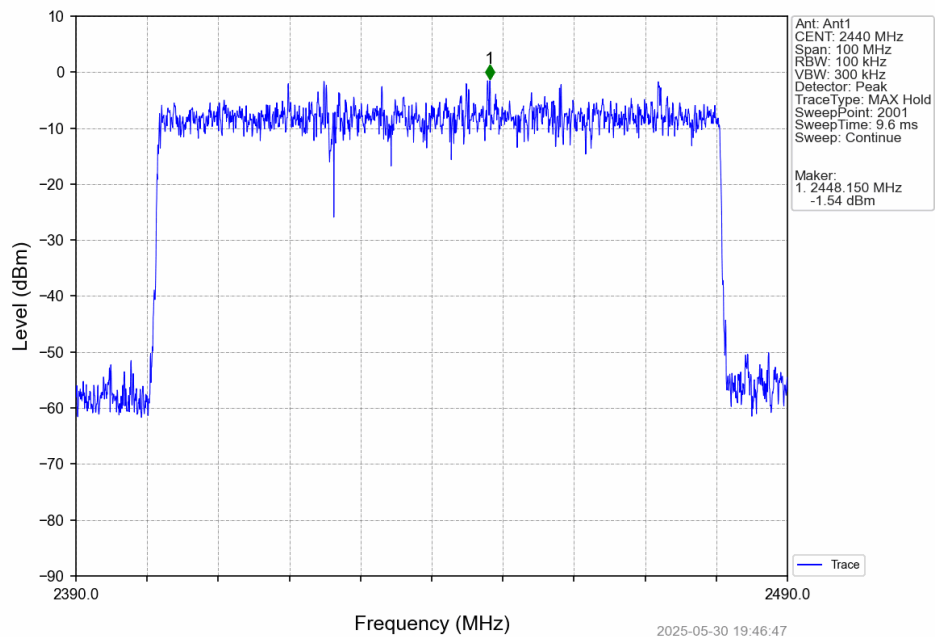




8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

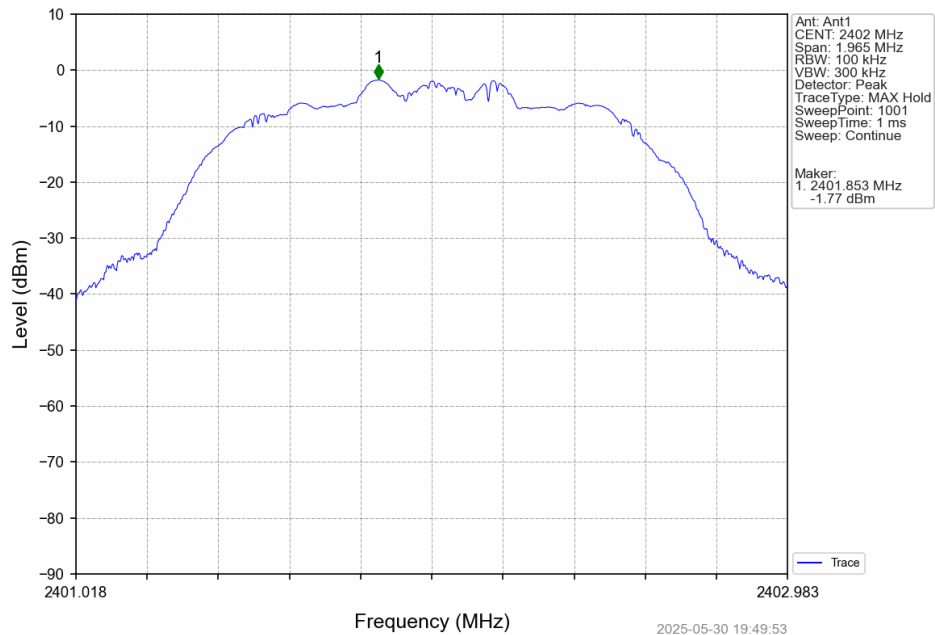


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

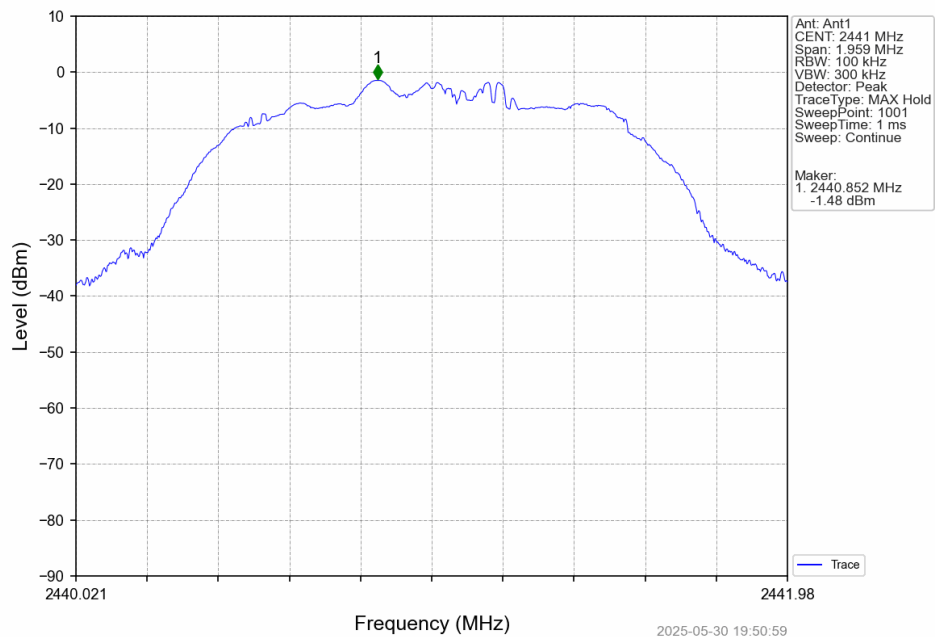




8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

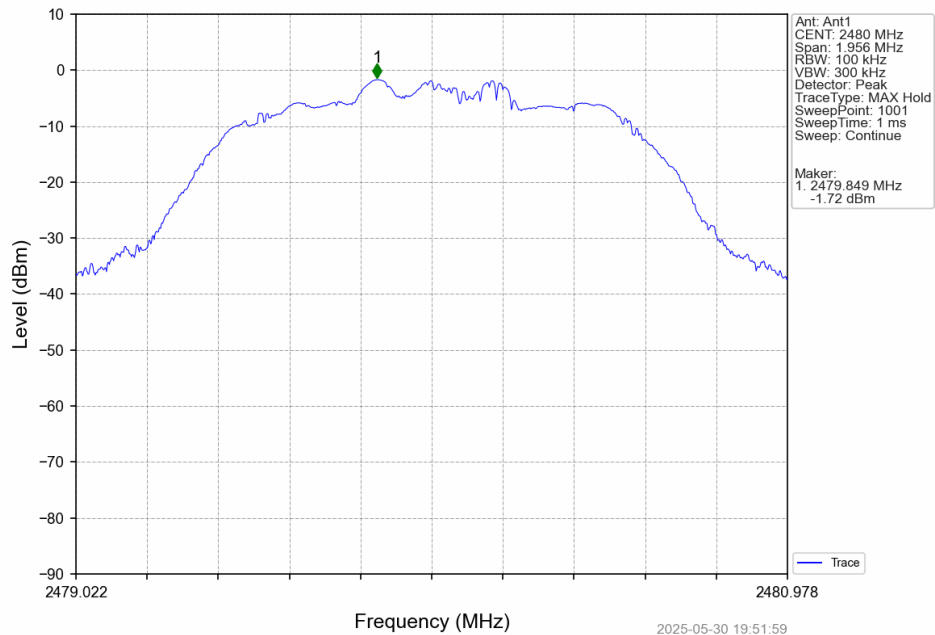

8DPSK_3DH5_HOPP_Ant1_NTNV

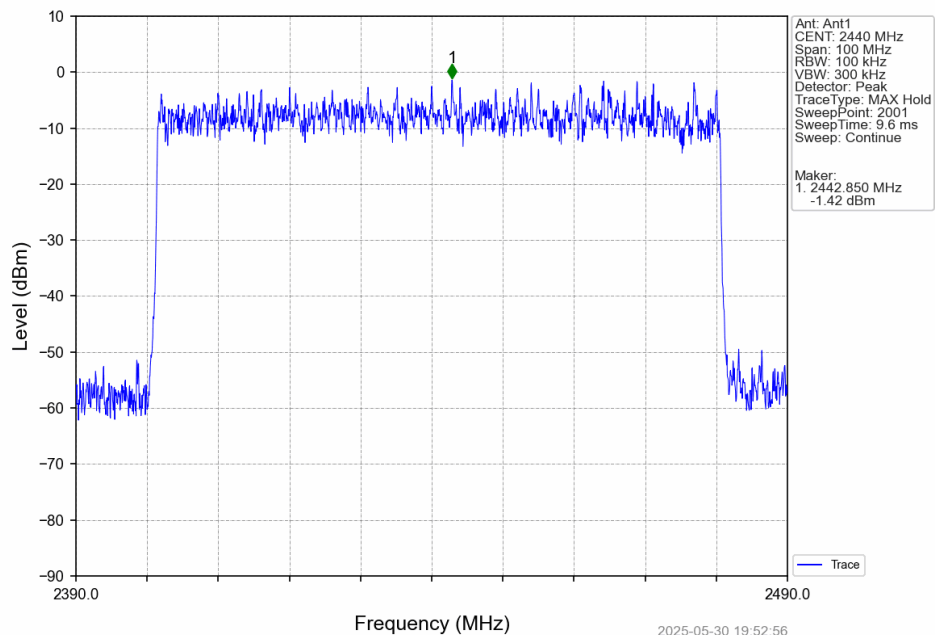


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

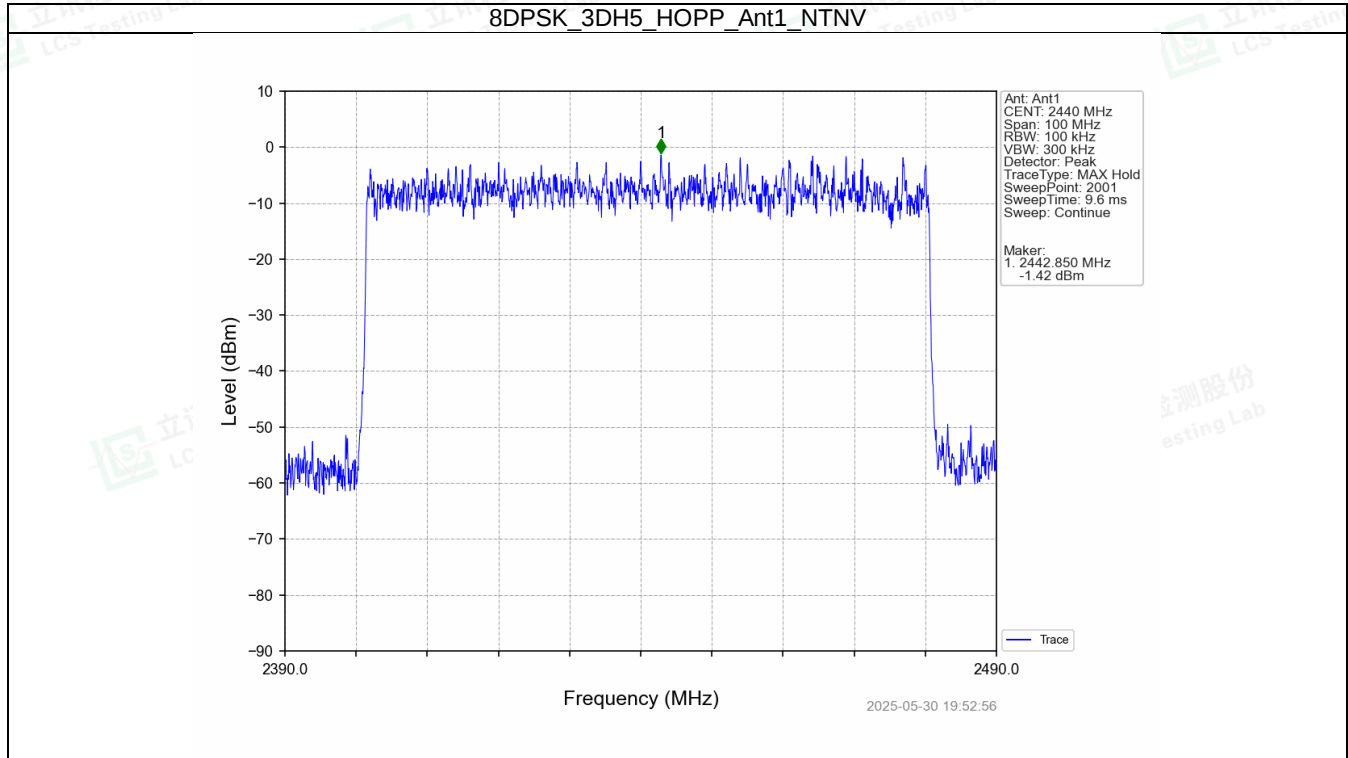




GFSK_DH5_LCH_2402MHz_Ant1_NTNV

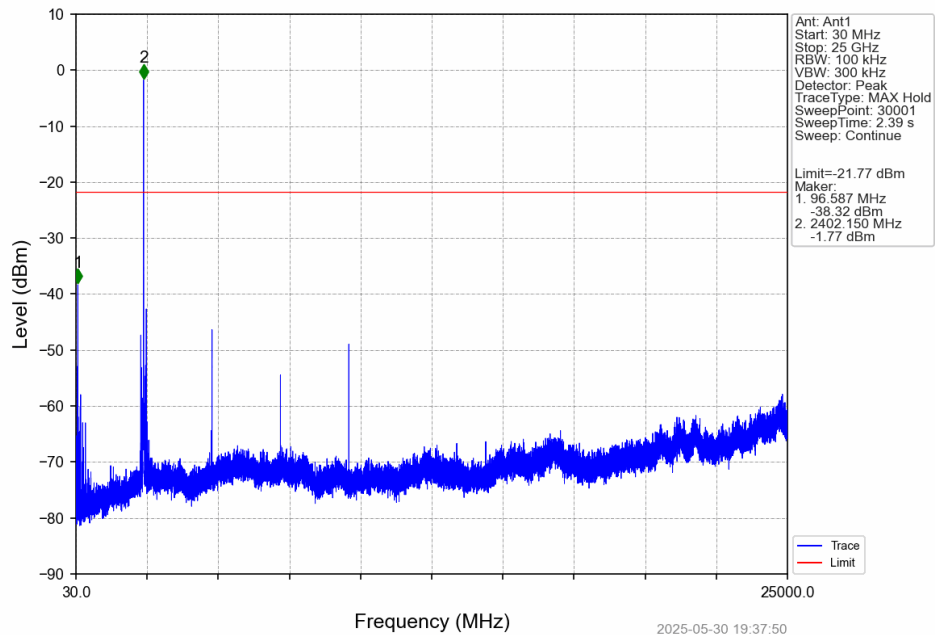

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

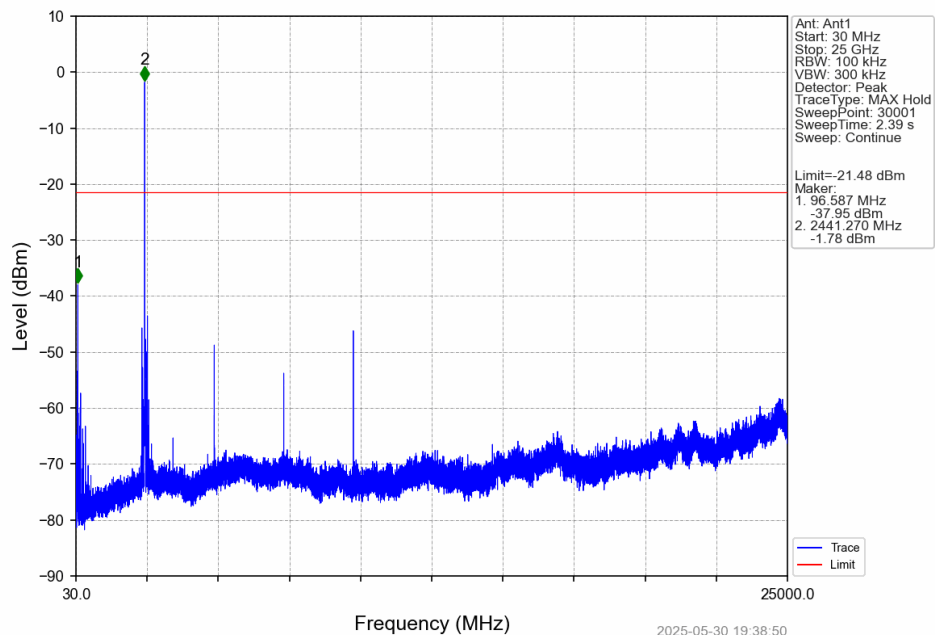

GFSK_DH5_HCH_2480MHz_Ant1_NTNV




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

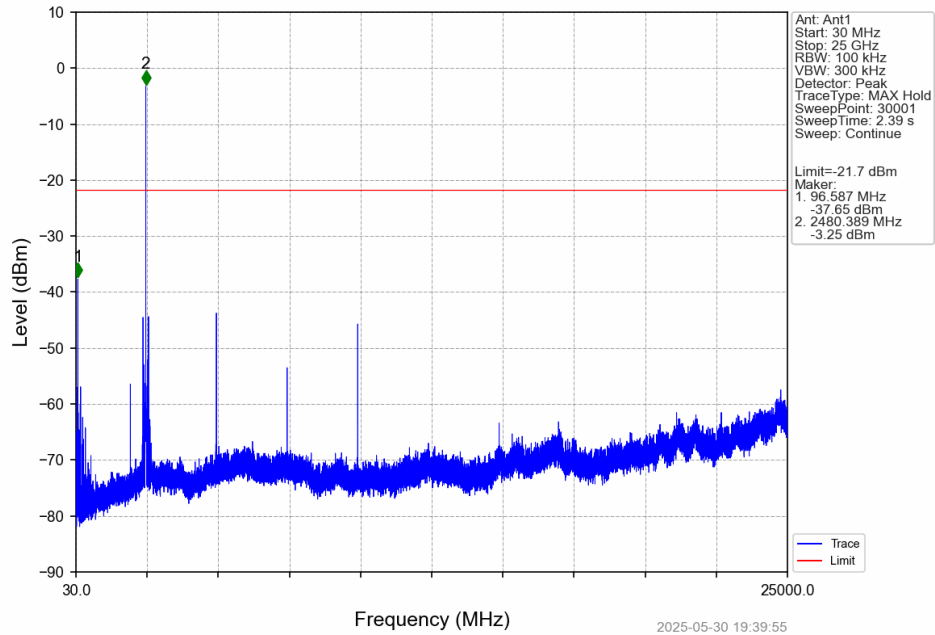


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

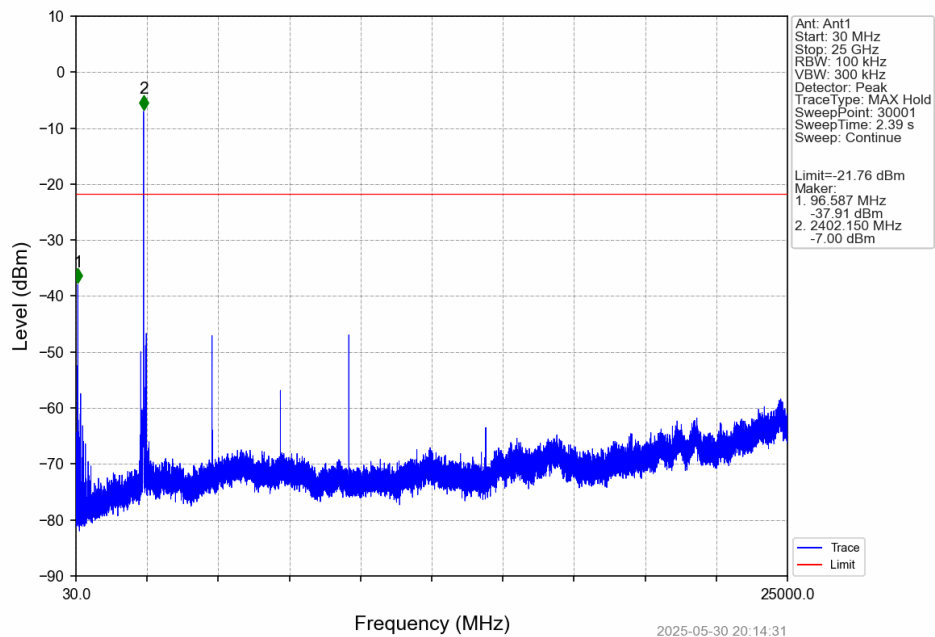


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV



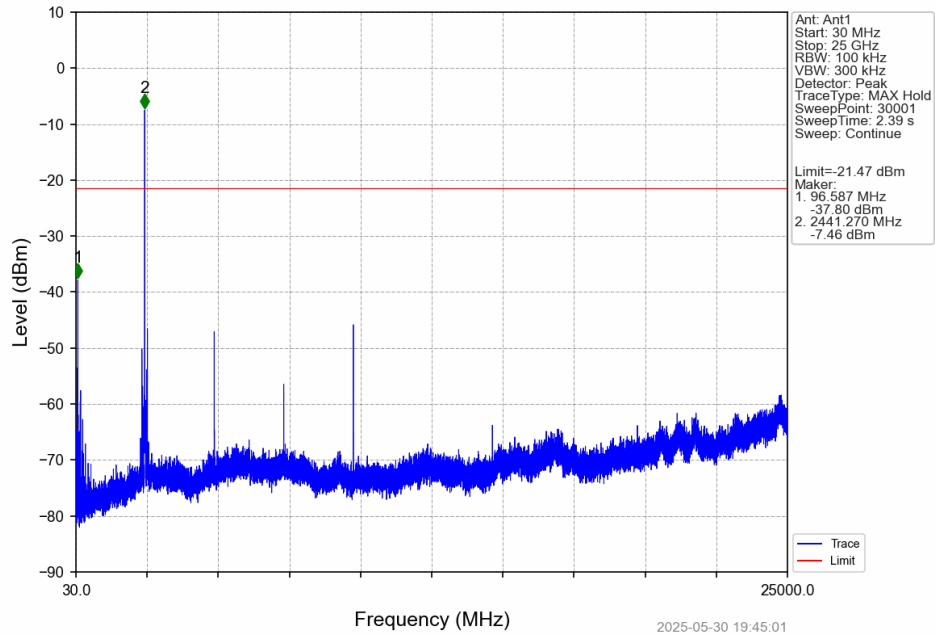


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

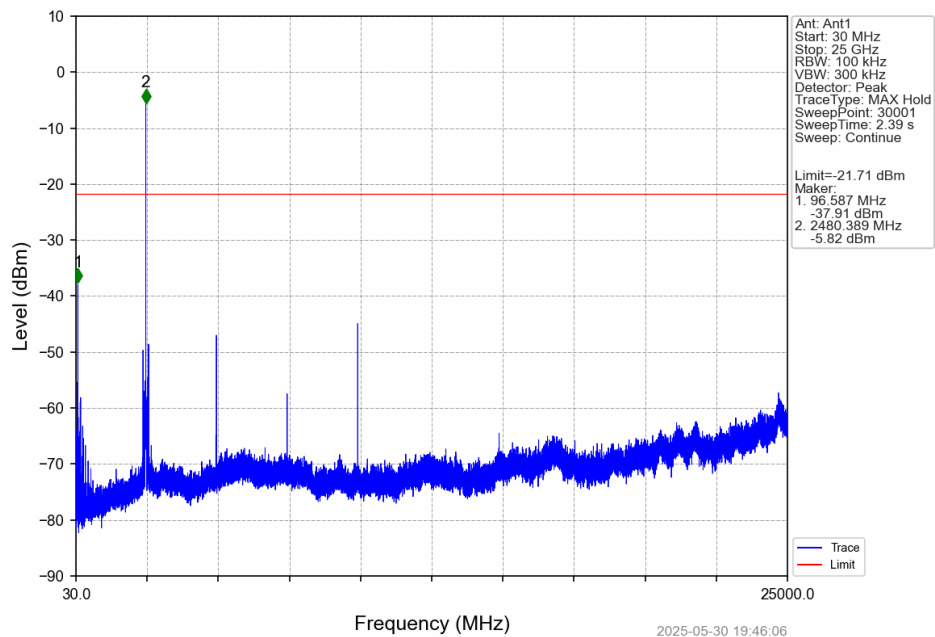


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV



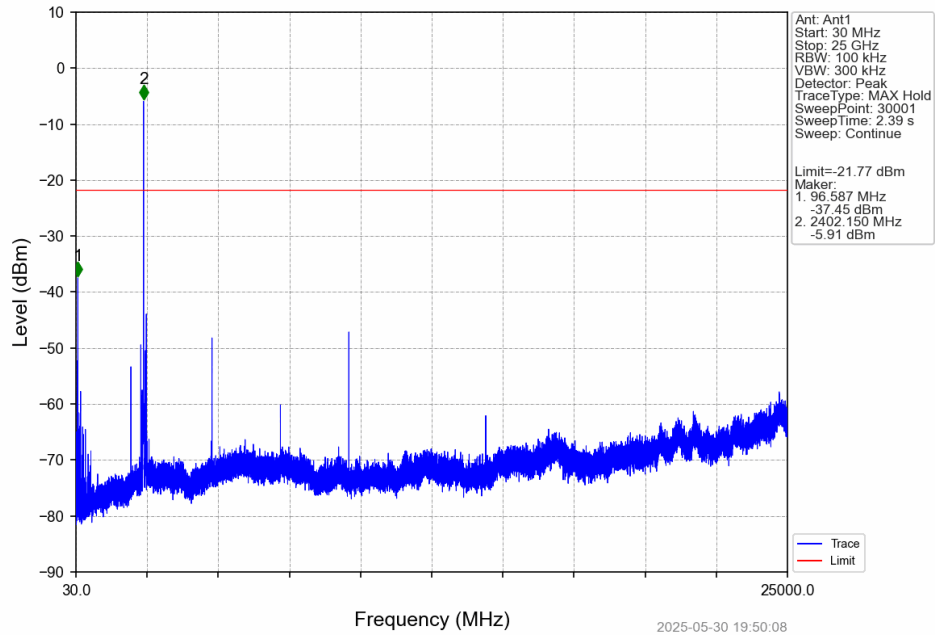


8DPSK 3DH5_MCH_2441MHz_Ant1_NTNV

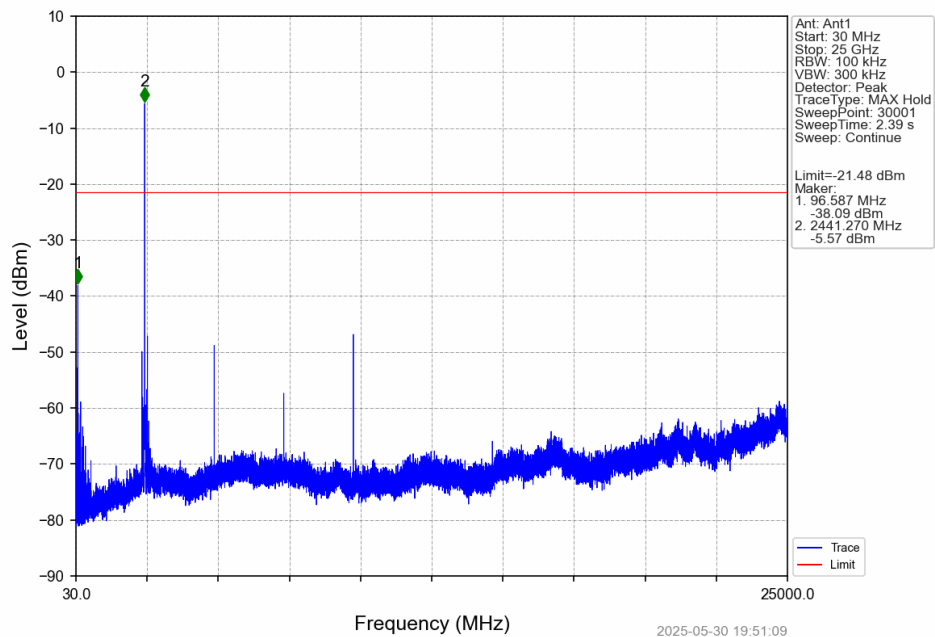

8DPSK 3DH5_HCH_2480MHz_Ant1_NTNV




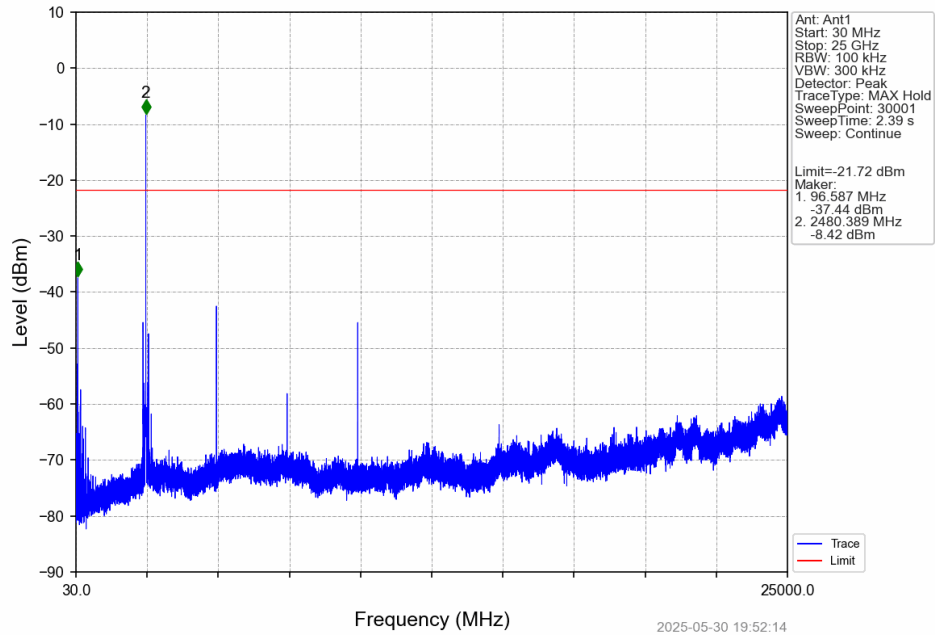





A.8 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.6	1.1	0.34
NVNT	1-DH5	2441	Ant1	77.6	1.1	0.34
NVNT	1-DH5	2480	Ant1	77.6	1.1	0.34
NVNT	2-DH5	2402	Ant1	77.33	1.12	0.34
NVNT	2-DH5	2441	Ant1	77.33	1.12	0.34
NVNT	2-DH5	2480	Ant1	76.43	1.17	0.36
NVNT	3-DH5	2402	Ant1	77.07	1.13	0.35
NVNT	3-DH5	2441	Ant1	77.28	1.12	0.35
NVNT	3-DH5	2480	Ant1	77.28	1.12	0.35



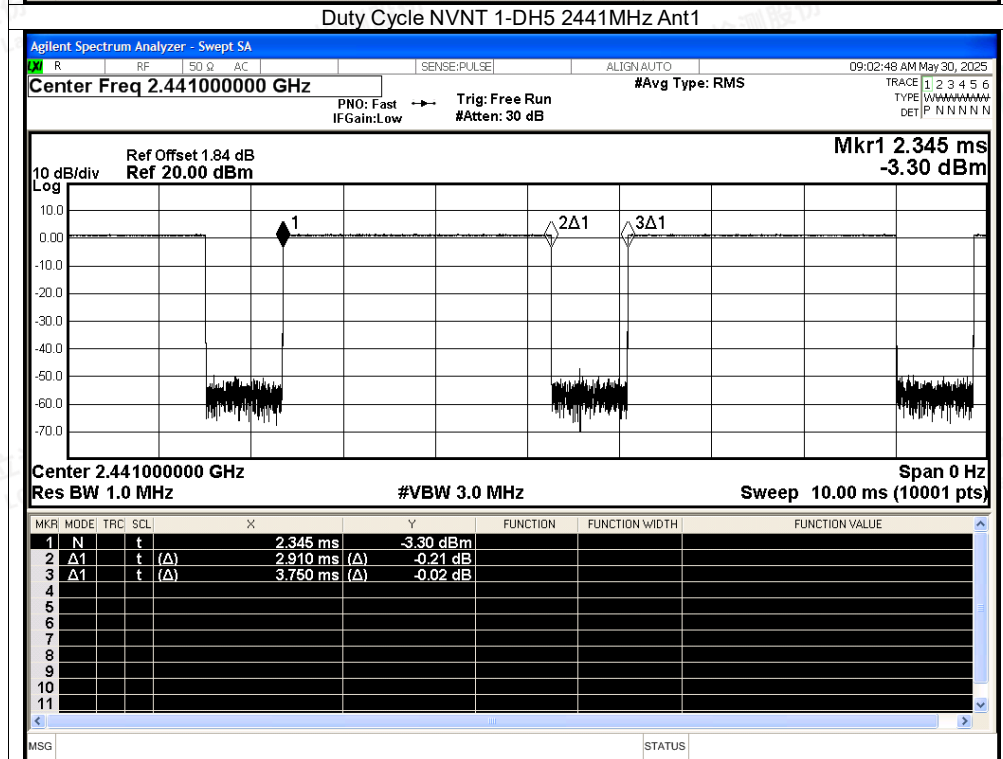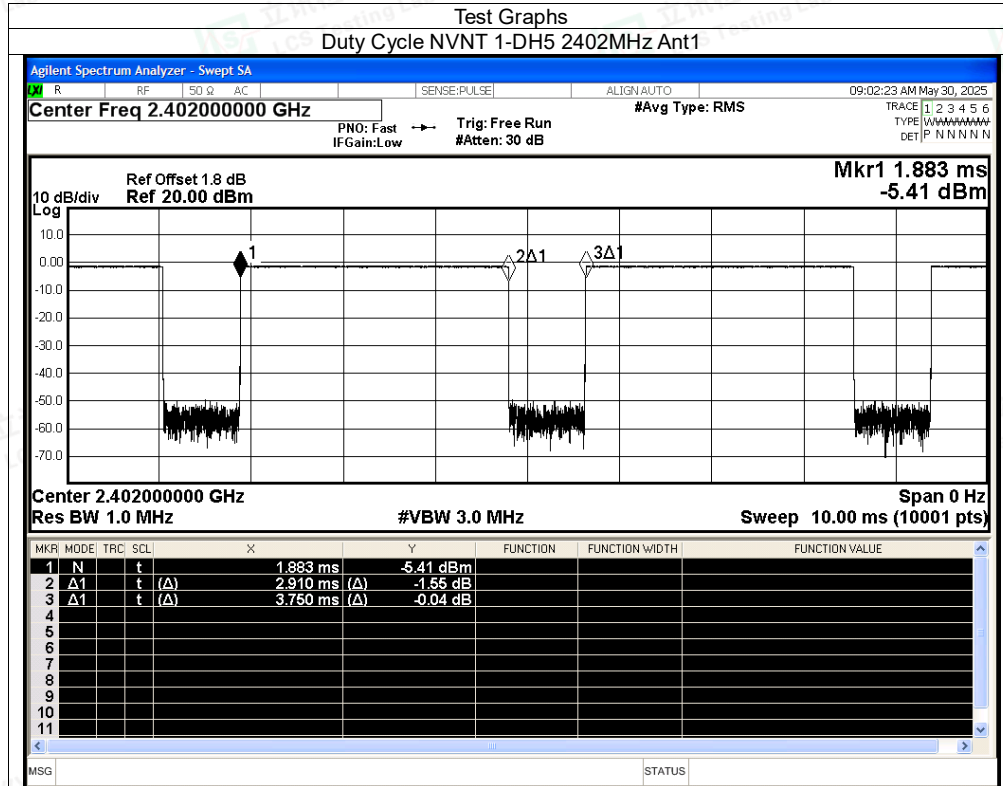

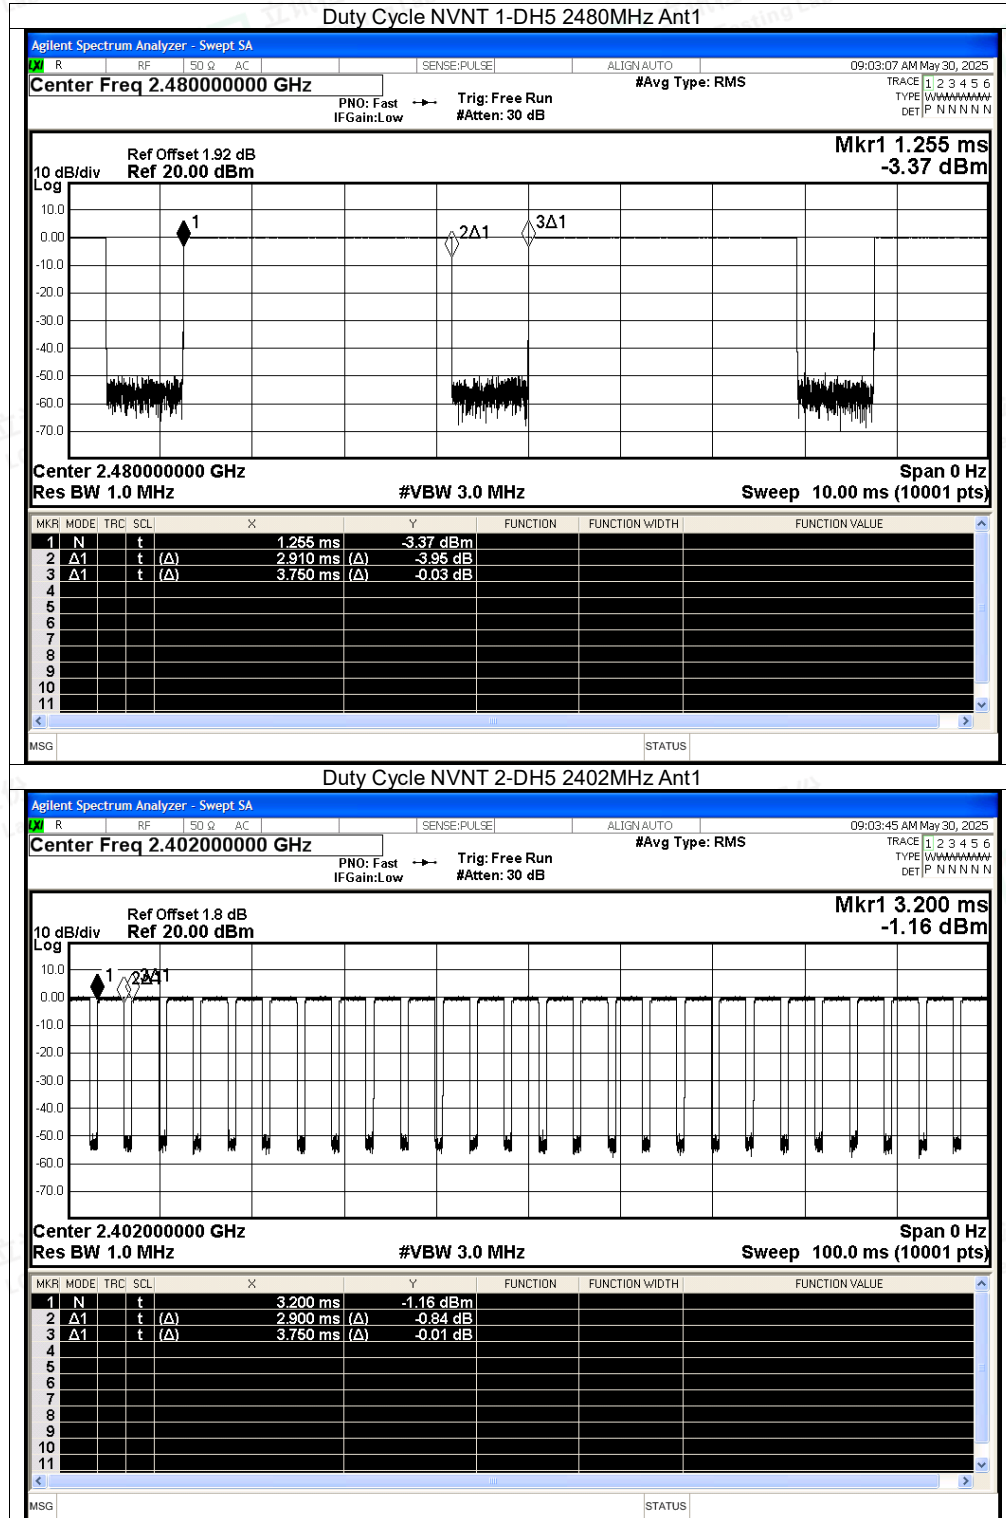




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

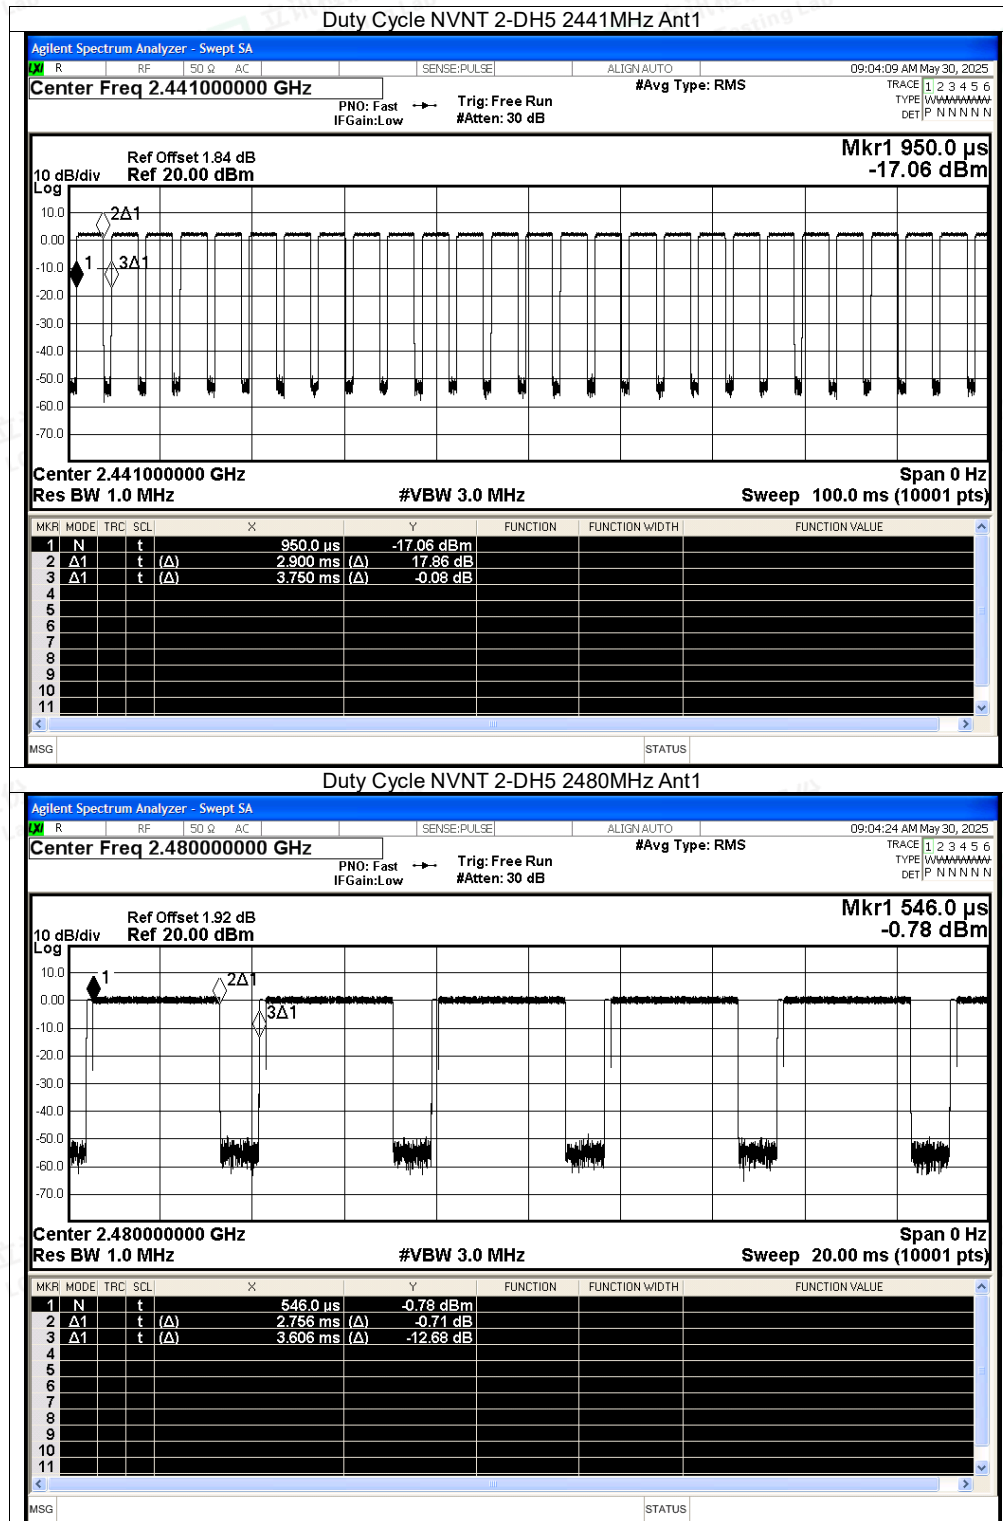

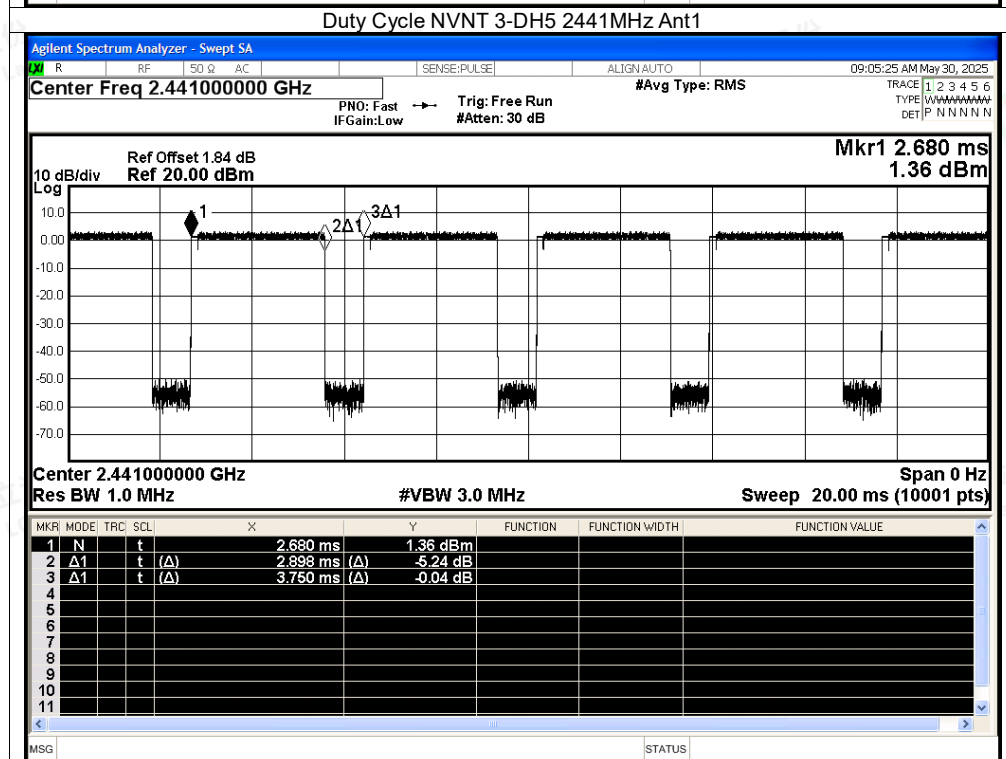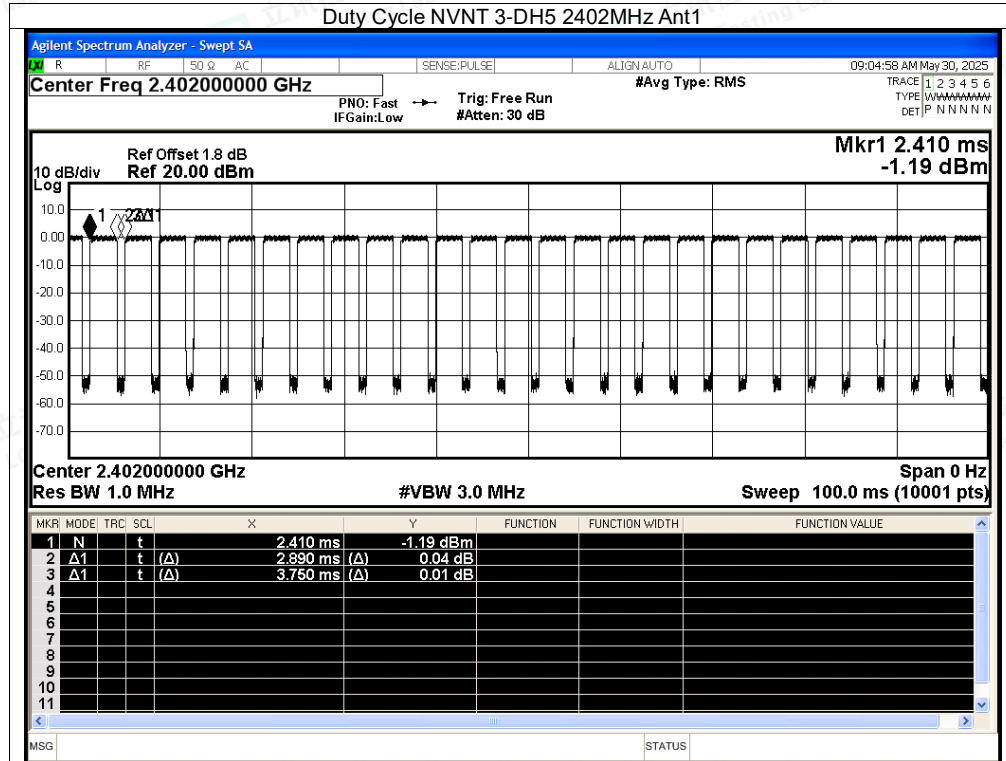


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

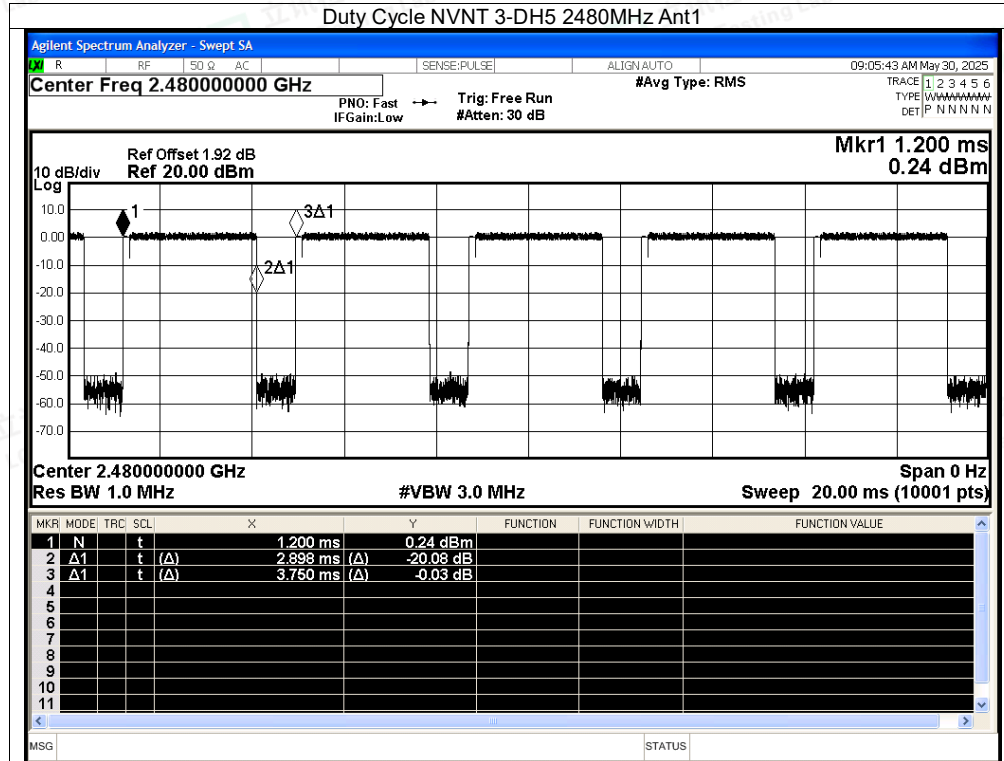



A.9 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-50.94	2	-	46.32	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-59.43	2	1.1	38.93	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2383.824	-47.71	2	-	49.55	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2382.192	-58	2	1.1	40.36	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-50.07	2	-	47.19	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-59.46	2	1.1	38.9	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-48.53	2	-	48.73	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-57.66	2	1.1	40.7	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2484.064	-37.44	2	-	59.82	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.992	-55.75	2	1.1	42.61	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-48.75	2	-	48.51	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-58.07	2	1.1	40.29	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-50.88	2	-	46.38	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-59.06	2	1.12	39.32	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2382.672	-45.85	2	-	51.41	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2367.216	-57.97	2	1.12	40.41	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-50.84	2	-	46.42	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-58.36	2	1.12	40.02	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-45.52	2	-	51.74	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-56.58	2	1.17	41.85	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.776	-36.9	2	-	60.36	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.752	-56.17	2	1.17	42.26	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-51.11	2	-	46.15	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-57.9	2	1.17	40.53	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-49.78	2	-	47.48	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-58.81	2	1.13	39.58	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2330.544	-47.77	2	-	49.49	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2349.264	-57.86	2	1.13	40.53	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-49.67	2	-	47.59	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-58.69	2	1.13	39.7	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-45.28	2	-	51.98	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-57.29	2	1.12	41.09	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2486.632	-40.02	2	-	57.24	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.608	-54.97	2	1.12	43.41	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-51.32	2	-	45.94	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-58.58	2	1.12	39.8	Average	54	Pass





Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

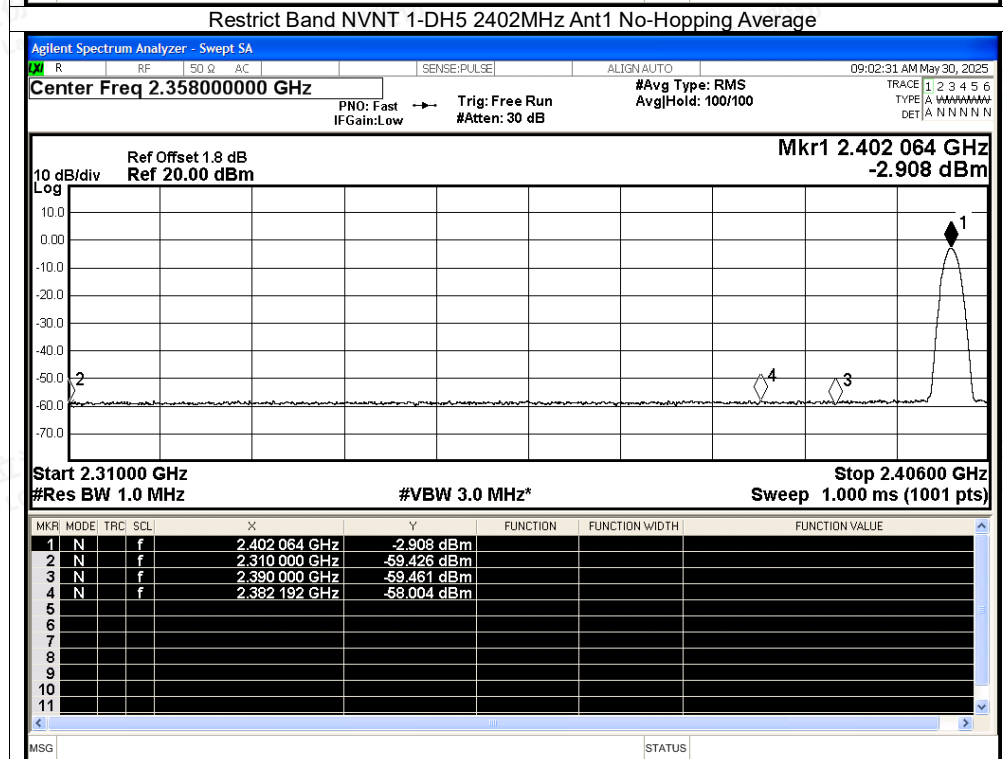
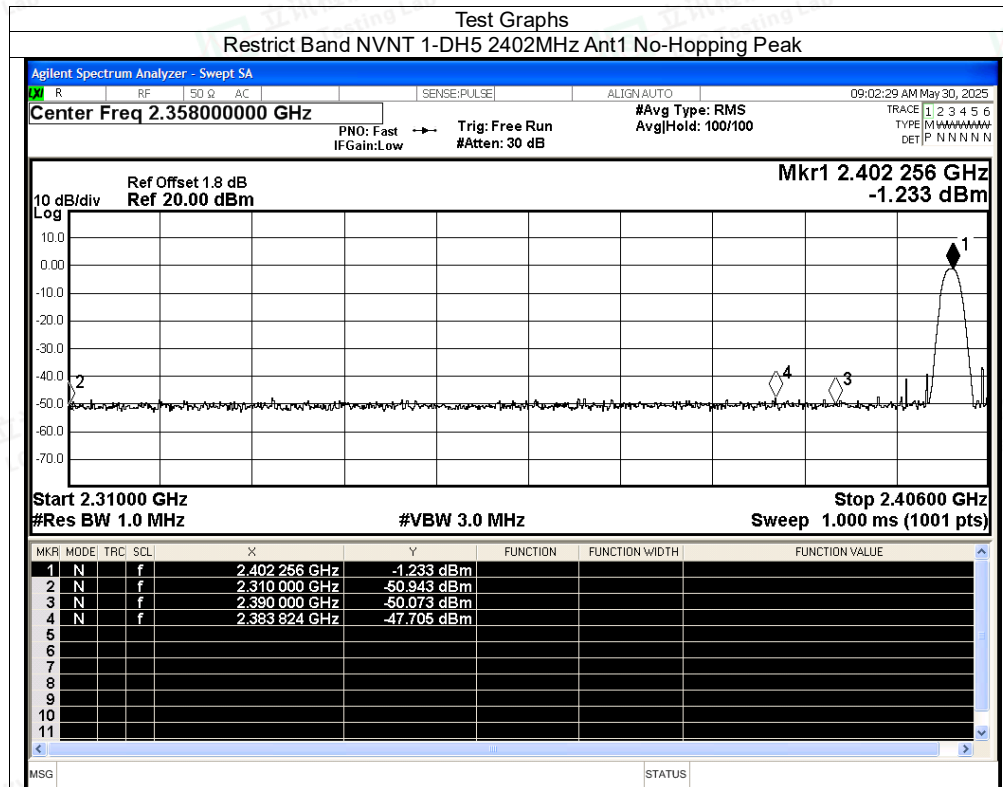


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

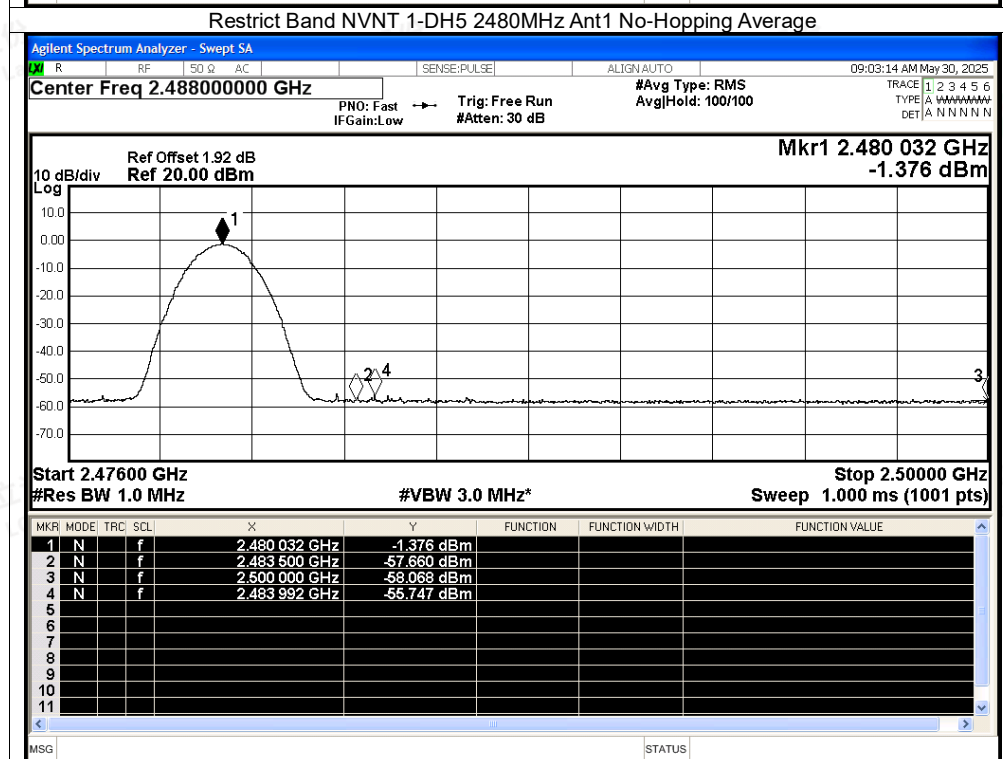
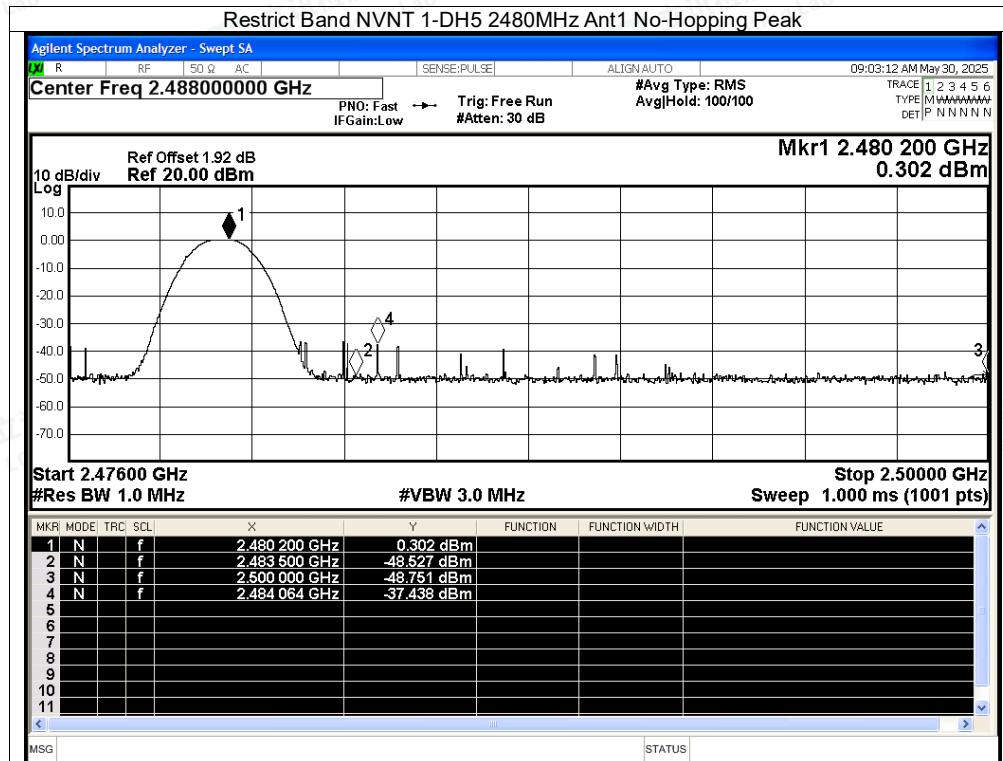


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

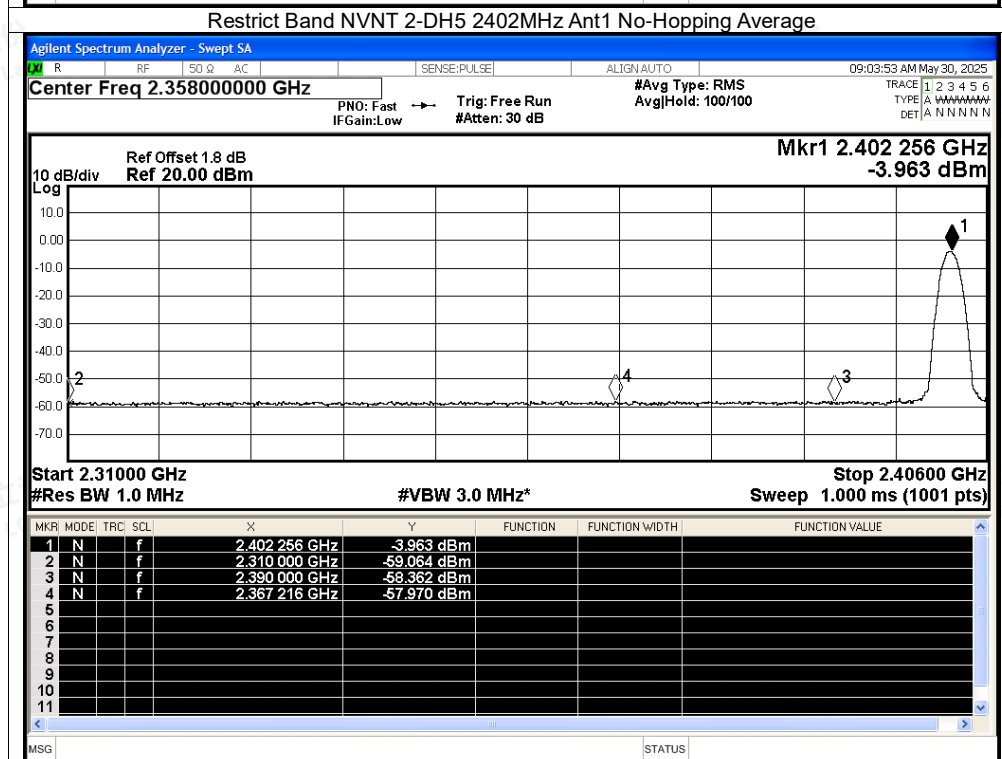
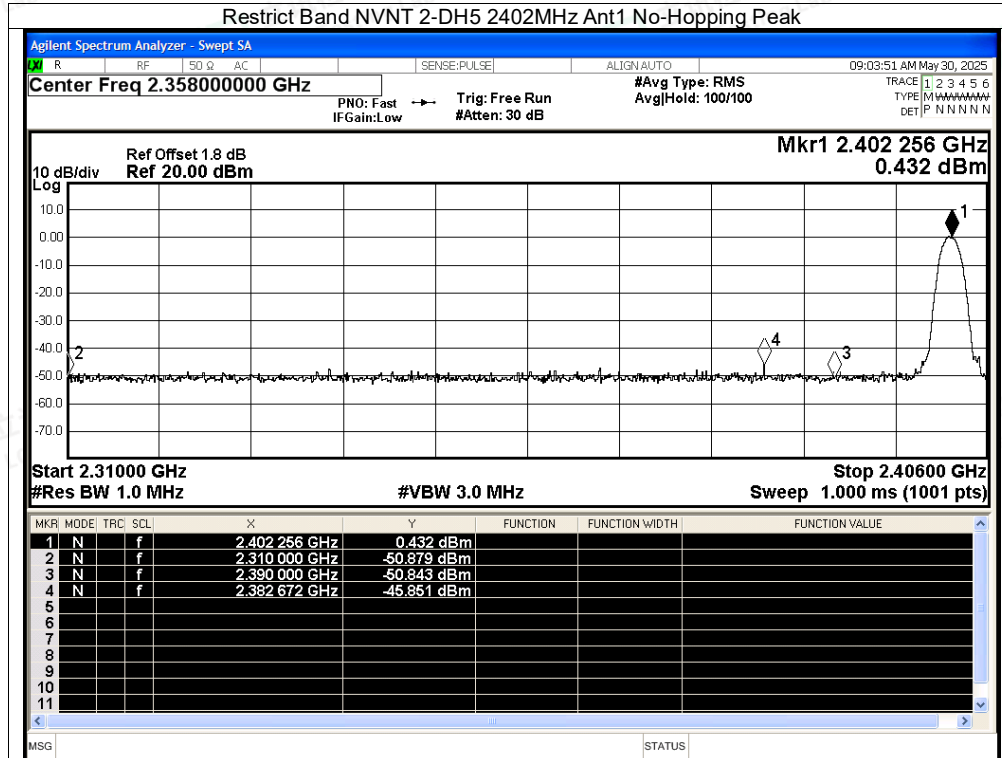


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

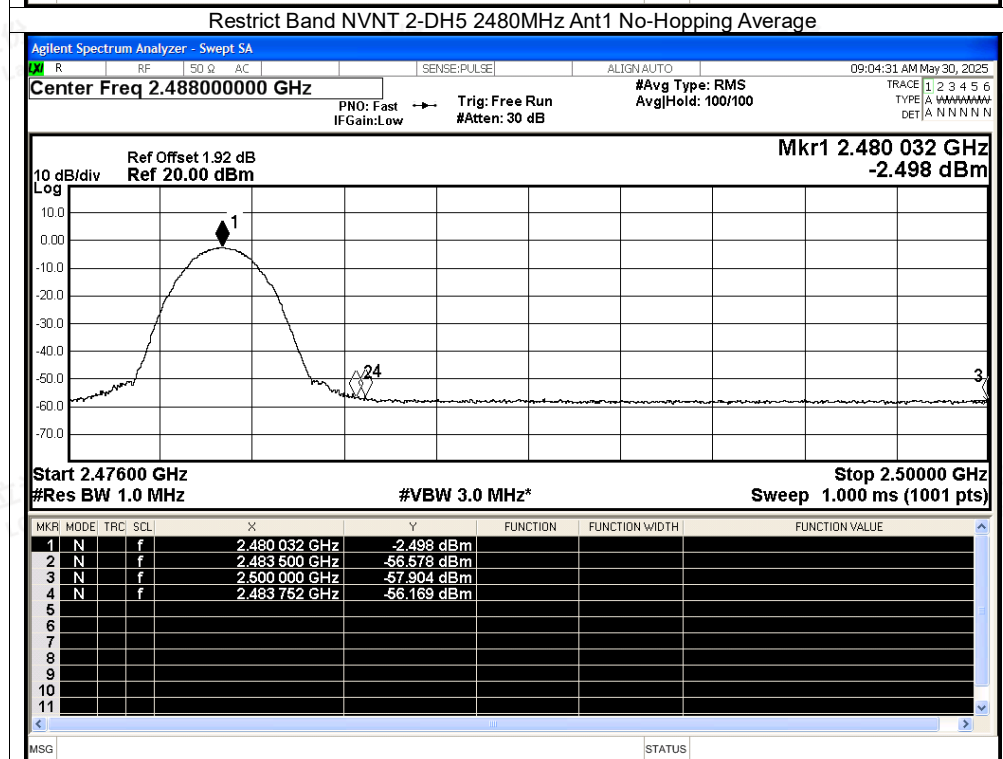
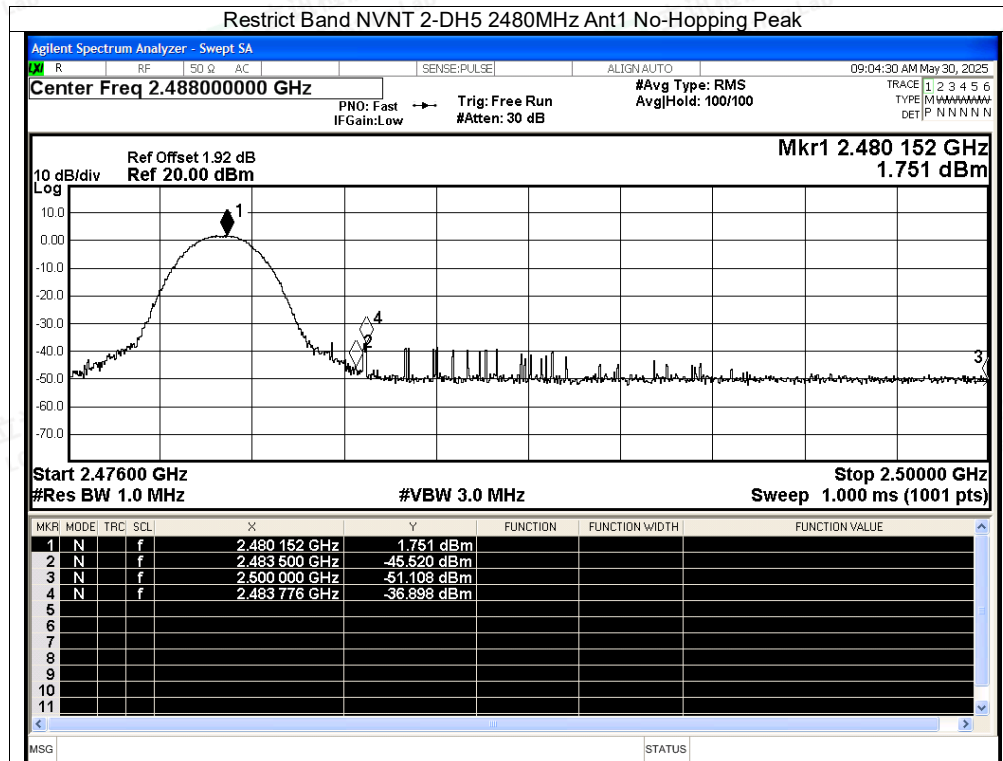


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

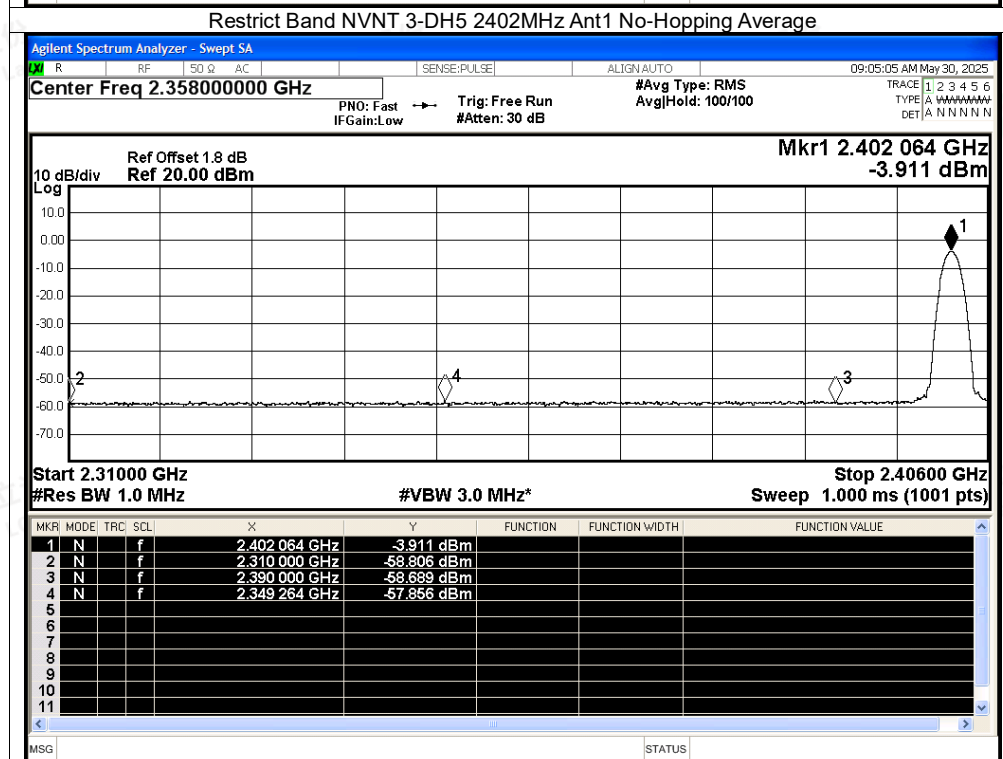
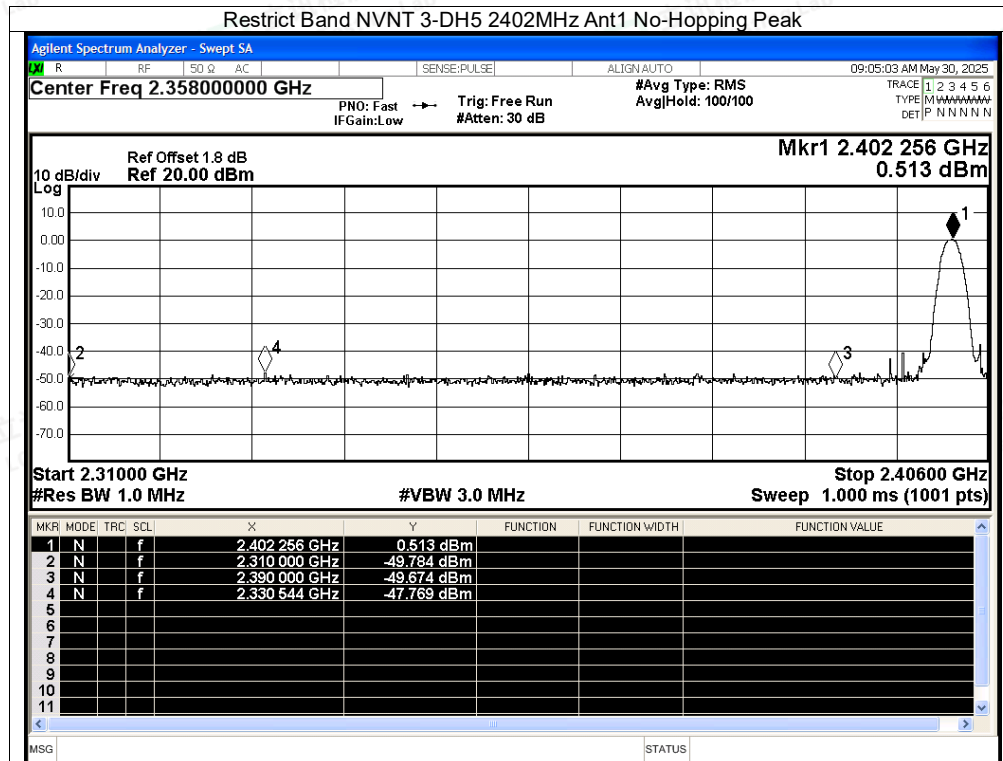


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

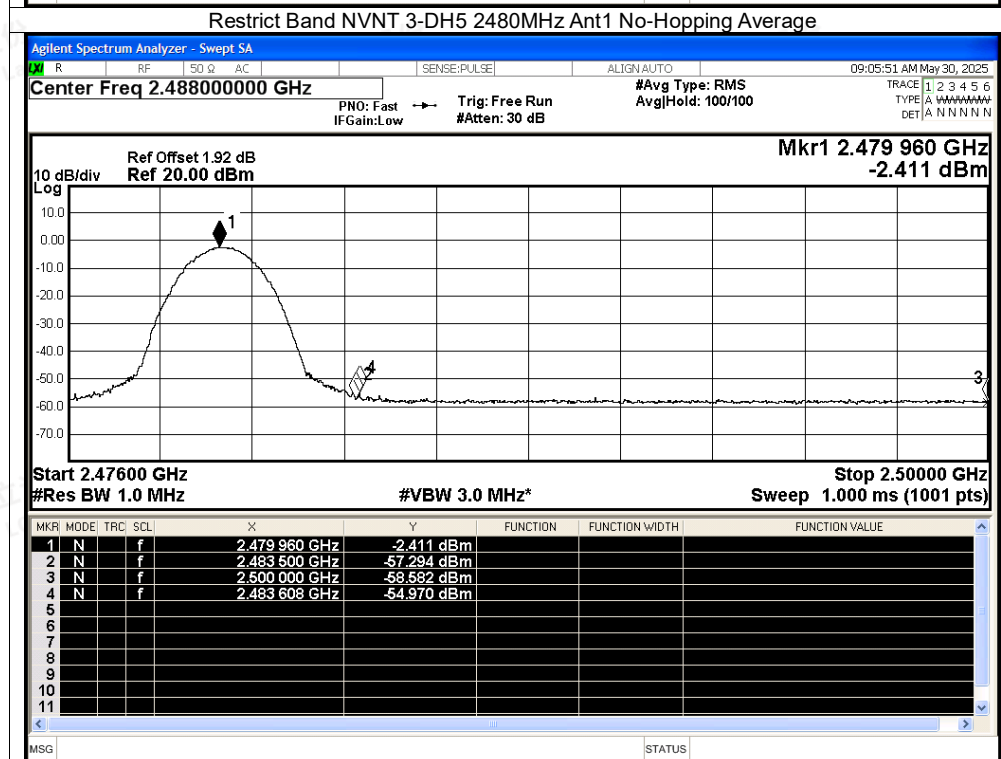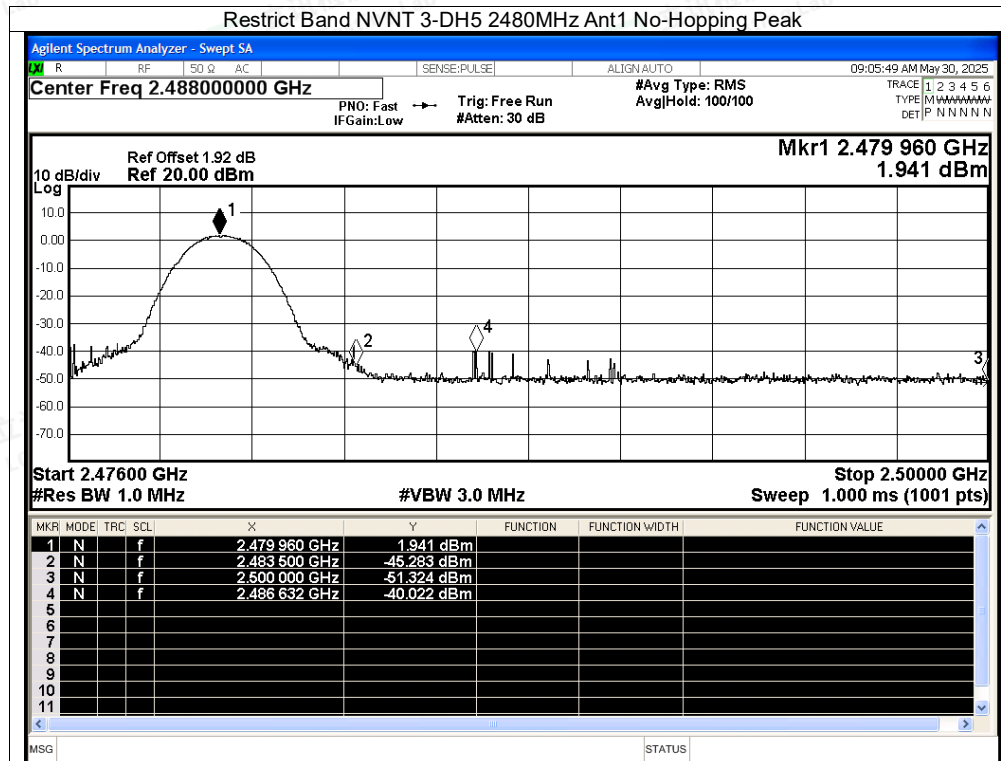

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity