

Antenna Specification

Manufacturer: Zhongshan Mairuiou Optoelectronic Technology Co., Ltd

Manufacturer Address: Building B, Area A, No.1 Longtang Heng Street,
Xinqianjin Village, Tanzhou Town, Zhongshan City, Guangdong Province, China

射频性能测量报告

RF Performance Test Report


客户名称 Customer Name	深圳润洋电子有限公司	项目名称 Project Name	NYFZ-S110-981-0B	料号 P/N	
频段 Band	433MHz	测试日期 Test Date	2024/3/28		

天线测试设备简介

Antenna Test Equipment Introduction

测试天线输入特性使用 Agilent E5071C and Agilent 5062A 矢量网络分析仪；辐射特性利用 Satimo 三维近场暗室进行测试，并分别使用 8960 E5515 和 Agilent E4438C 进行了分析。暗房的测试坐标如下：

Test of antenna input characteristics using Agilent E5071C and Agilent 5062A vector network analyzer; The radiation pattern of the antenna are tested using the Satimo starlab 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

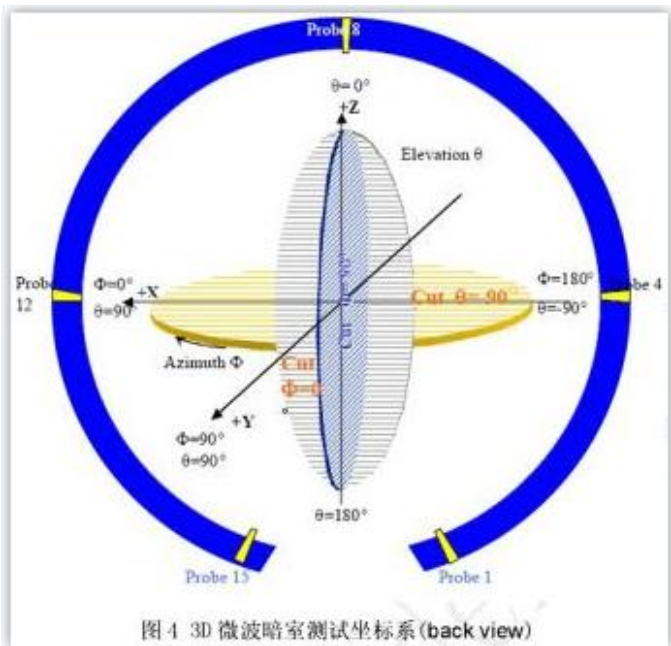


1. S11 参数测量/ *S11 Parameter-VSWR*

使用一根 50Ω 同轴电缆连接到天线，然后该电缆连接到网络分析仪测量 S11 参数，被测量产品远离金属至少 20 厘米。


Measuring Method is a 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.

S11 Parameter

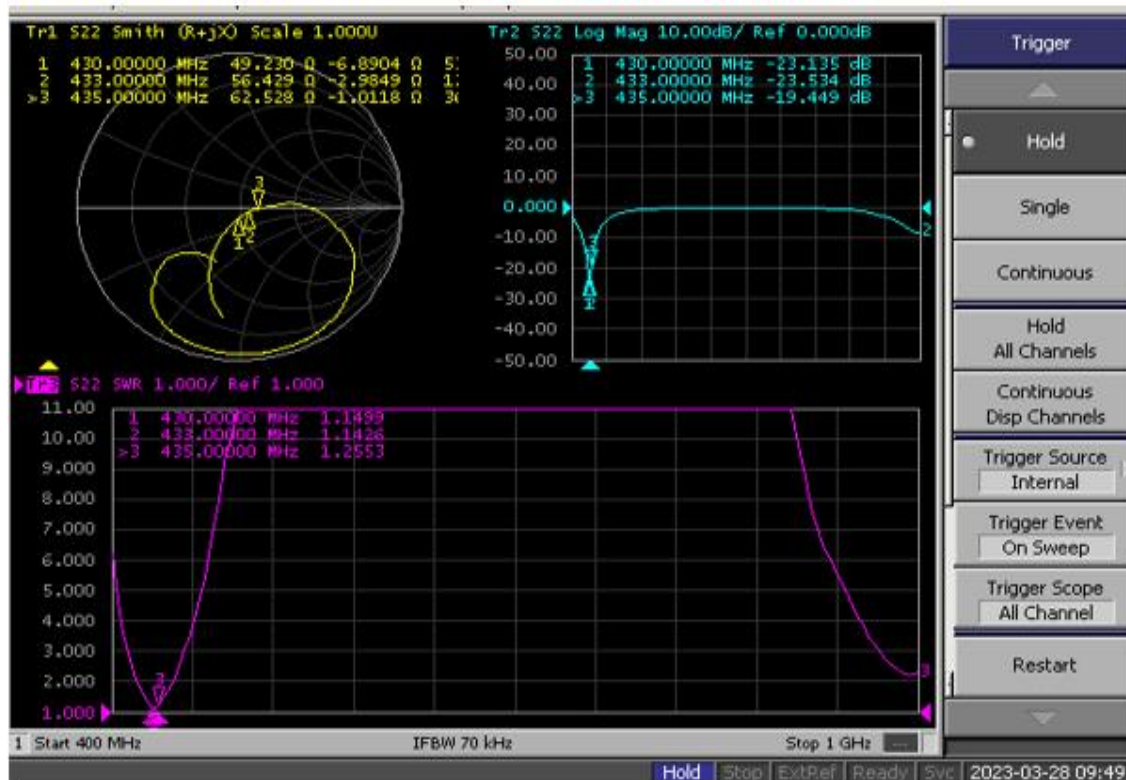


Frequency(MHz)	430	433	435
VSWR	1.14	1.14	1.25

2. 天线匹配网络/Antenna Matching Network

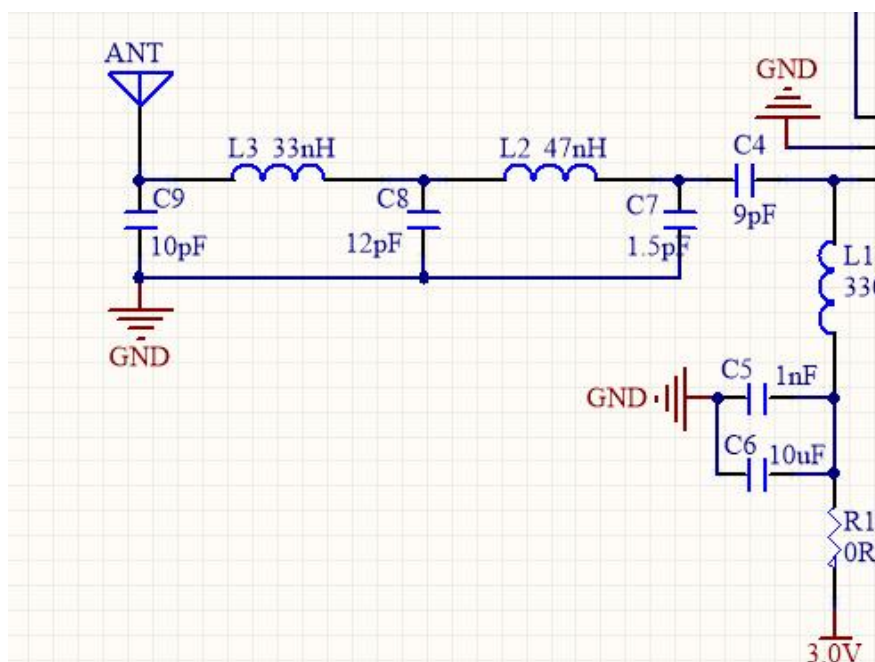


PCB板端匹配电路未改动


2D Pattern

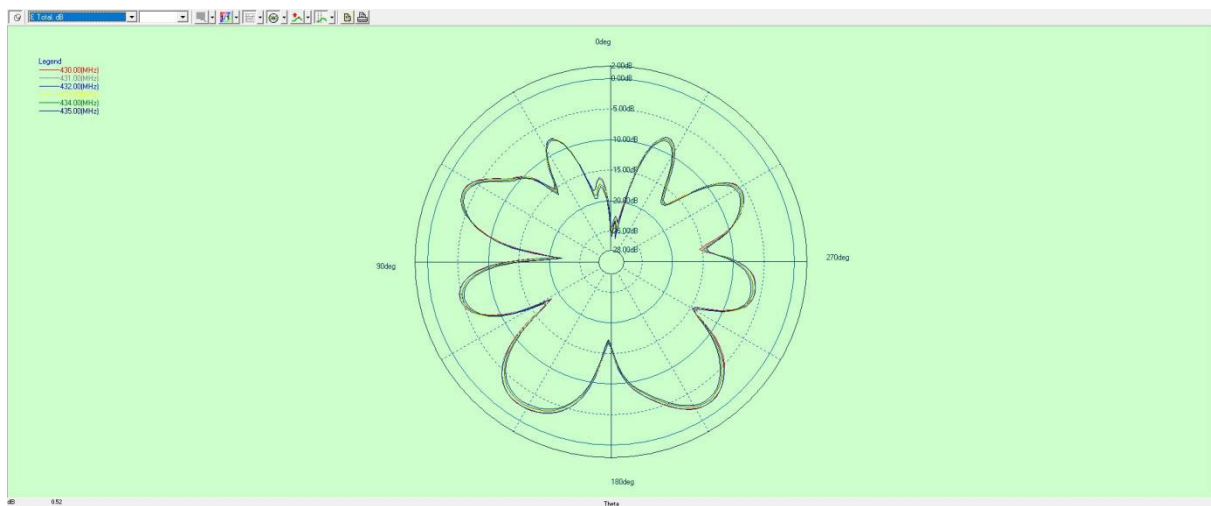

$\Phi = 0$

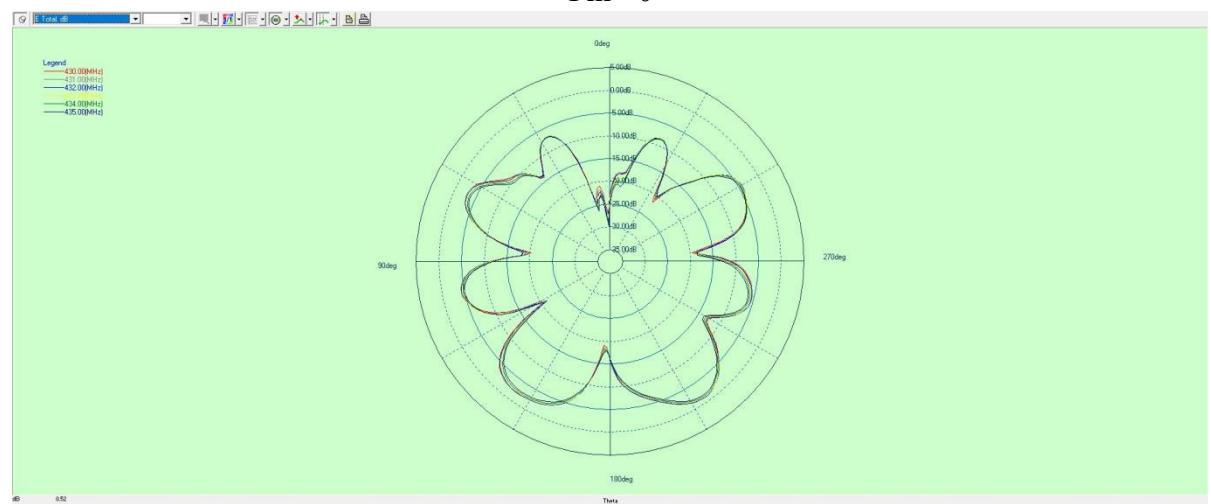

$\Phi = 90$

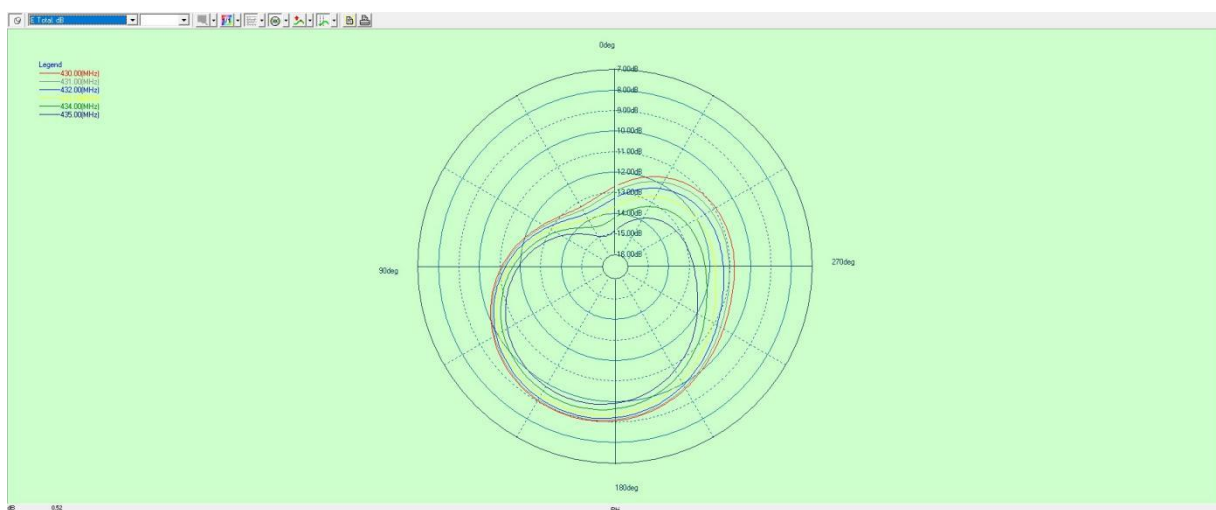

$\Theta = 90$

3. Gain & Efficiency-ANT

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
430	21.27	-1.33
433	21.66	-1.22
435	20.19	-1.53

4. Antenna size

