



## USER MANUAL

CLOCK/ALARM WIRELESS CHARGER

Model: HT-506

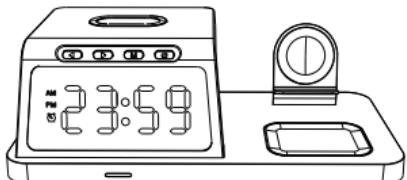

CE FC RoHS  
MADE IN CHINA



### 1. Function Overview

Wireless charger  
Alarm clock  
Time display

### 2. Operation

#### 1. Arrangement of function keys



#### 2. Time setting

(when the time interface is displayed, operate as follows)

- 2.1 Long press [ M ]: Enter 12/24 hour setting in turn, then short press to proceed, hour setting, minute setting, and exit time setting.

Short press  $\triangleleft$ : add hours, add minutes

Short press  $\triangleright$ : decrease the hour, decrease the minute

### 3. Alarm setting

- 3.1 When the time is displayed, short press [ M ] to enter the alarm setting (three groups of ALARM).
- 3.2 When entering the above setting mode, press  $\triangleleft$  to turn ALARM on and off; when ALARM is displayed, long press M to enter the ALARM time setting (AL1, AL2, AL3 in sequence), and press  $\triangleleft$   $\triangleright$  to set the ALARM time.

#### Notice:

- When the alarm rings, the ringing time is about 20s, and then it stops automatically. After about 10s of snooze, the alarm rings again for about 20s, and the alarm sound ends after the ringing.
- During the ringing period, you can press other keys to interrupt, after the interruption, the alarm will end

### 4. Display brightness (br) setting method

- When the time is displayed, short press  $\triangleright$ , to enter the display brightness (br) setting.
- Short press  $\triangleright$  to change 5 display brightness (br) modes.
- Press [ M ] to exit the display brightness (br) setting.

### 5. Display brightness (br) as follows:

- 0: Display brightness according to time;
- 1~4: The brightness increases in turn;
- 5: 5s screen-off mode.

In the setting mode, no button 10S returns to the display time state.

### 3. Specification

- Materials: ABS+Acrylic
- Dimension: 187x91x61 (mm)
- Color option: Black/White
- Input: DC 5V/3A 9V/3A (QC/PD)
- Wireless Output: 15W Max.
- Support: 3W/5W/7.5W/10W/15W
- Compatibility: all qi-enable phones
- Working Distance:  $\leq$  8mm
- Charging Efficiency: 75%-85%

### 4. Packing

- Clock/Alarm wireless charger
- USB C cable
- User's manual

#### Warning:

- It is not a toy, put it away from children.
- Don't use it while the temperature over 45°C.
- Don't put it in fire or other high temperature place.

**FCC WARNING**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation configurations of the transmitter and its antenna(s).