




Appendix A


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Final settingFor VBW (kHz)
NVNT	b	2412	Ant1	8.34	8.49	98.23	0	0.12	1
NVNT	b	2437	Ant1	8.34	8.49	98.23	0	0.12	1
NVNT	b	2462	Ant1	8.34	8.49	98.23	0	0.12	1
NVNT	g	2412	Ant1	1.38	1.42	97.18	0.12	0.73	1
NVNT	g	2437	Ant1	1.38	1.42	97.18	0.12	0.73	1
NVNT	g	2462	Ant1	1.38	1.42	97.18	0.12	0.73	1
NVNT	n20	2412	Ant1	1.29	1.33	96.99	0.13	0.78	1
NVNT	n20	2437	Ant1	1.29	1.33	96.99	0.13	0.78	1
NVNT	n20	2462	Ant1	1.29	1.33	96.99	0.13	0.78	1

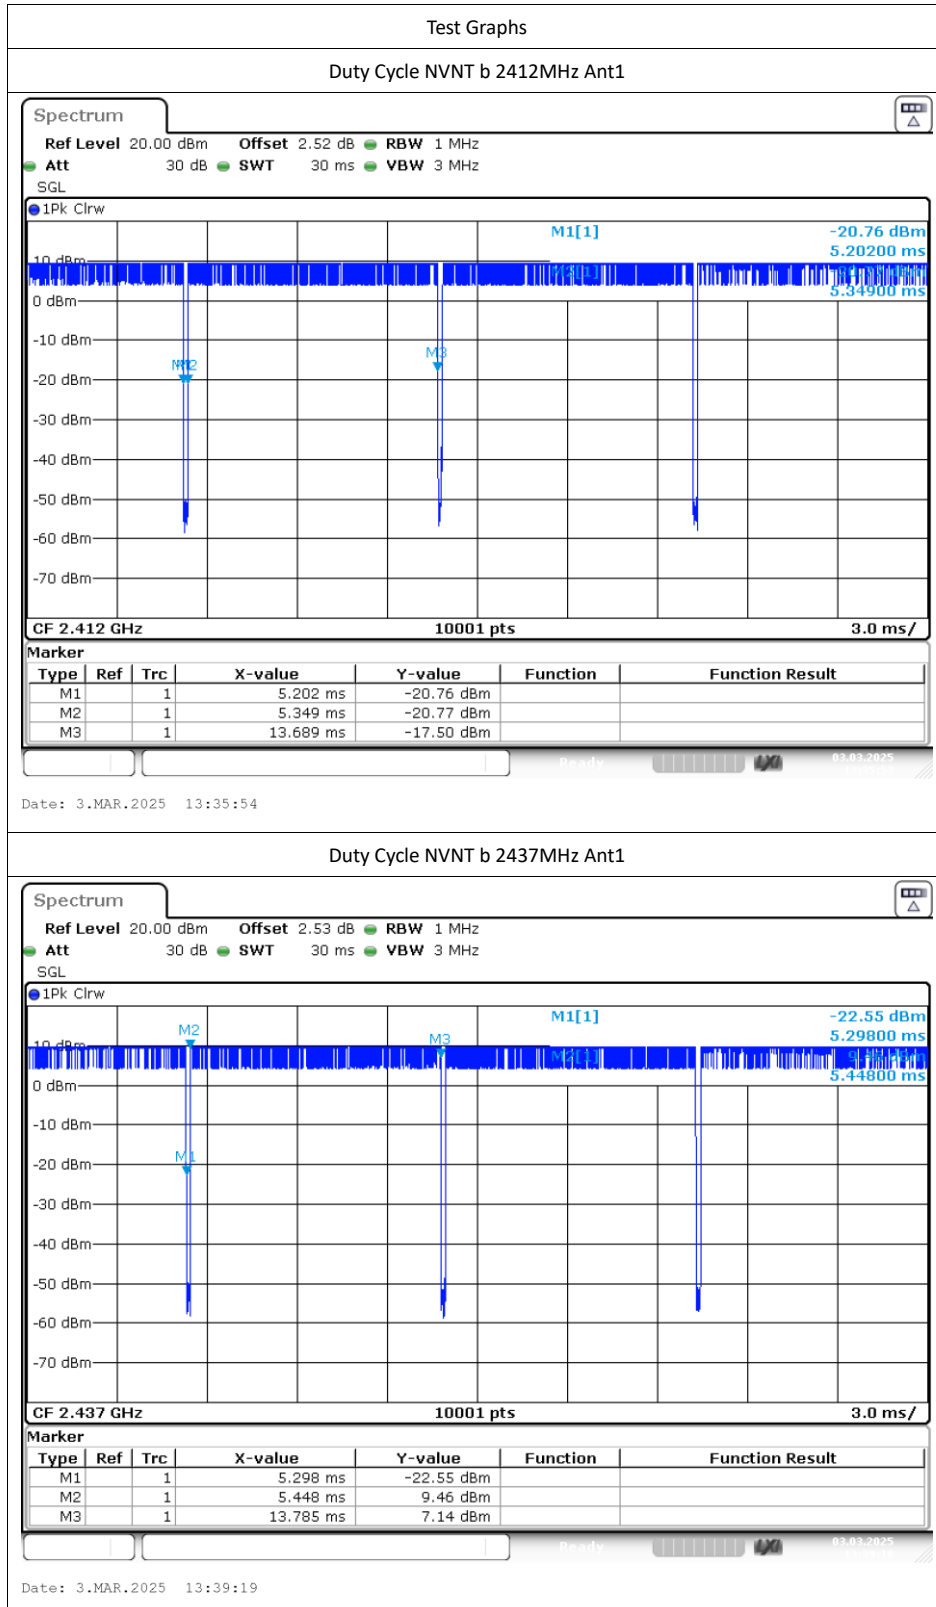

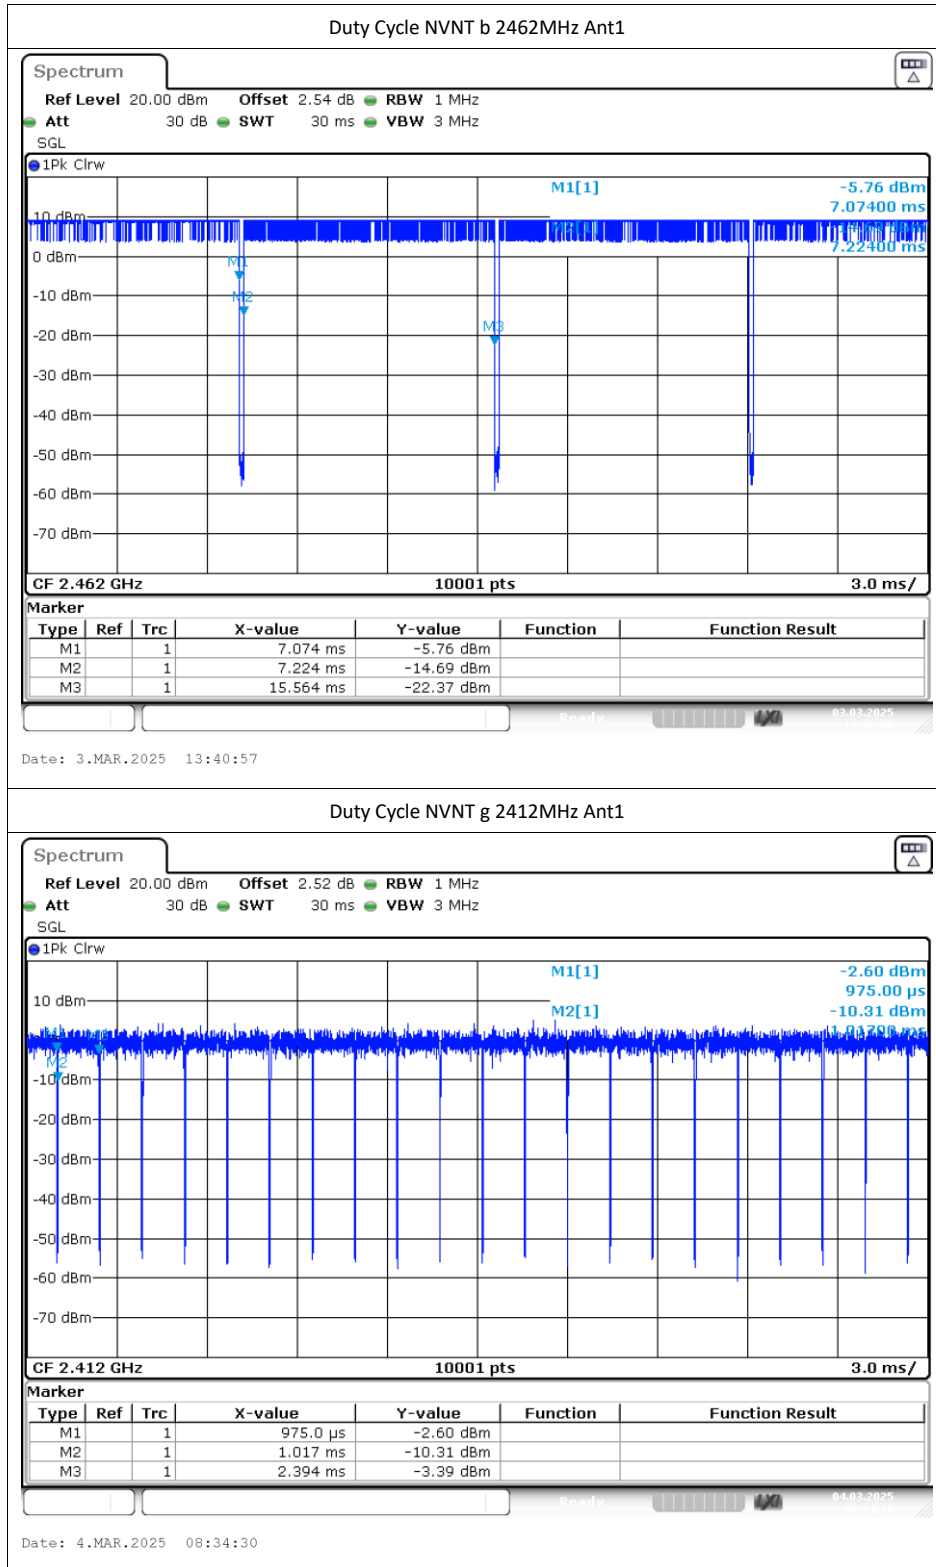

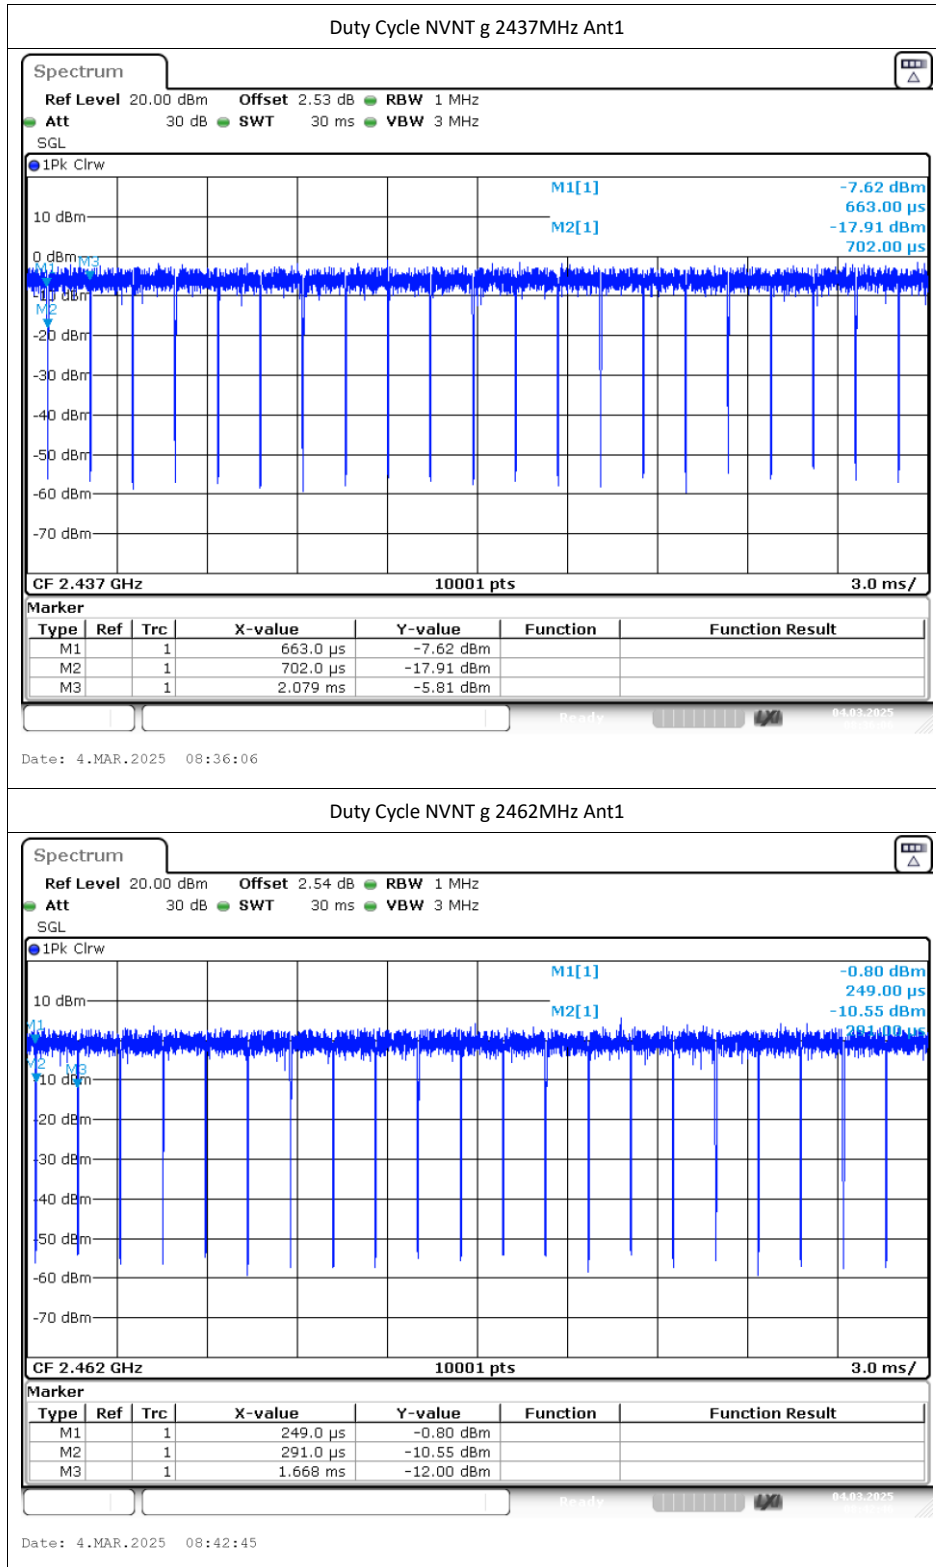

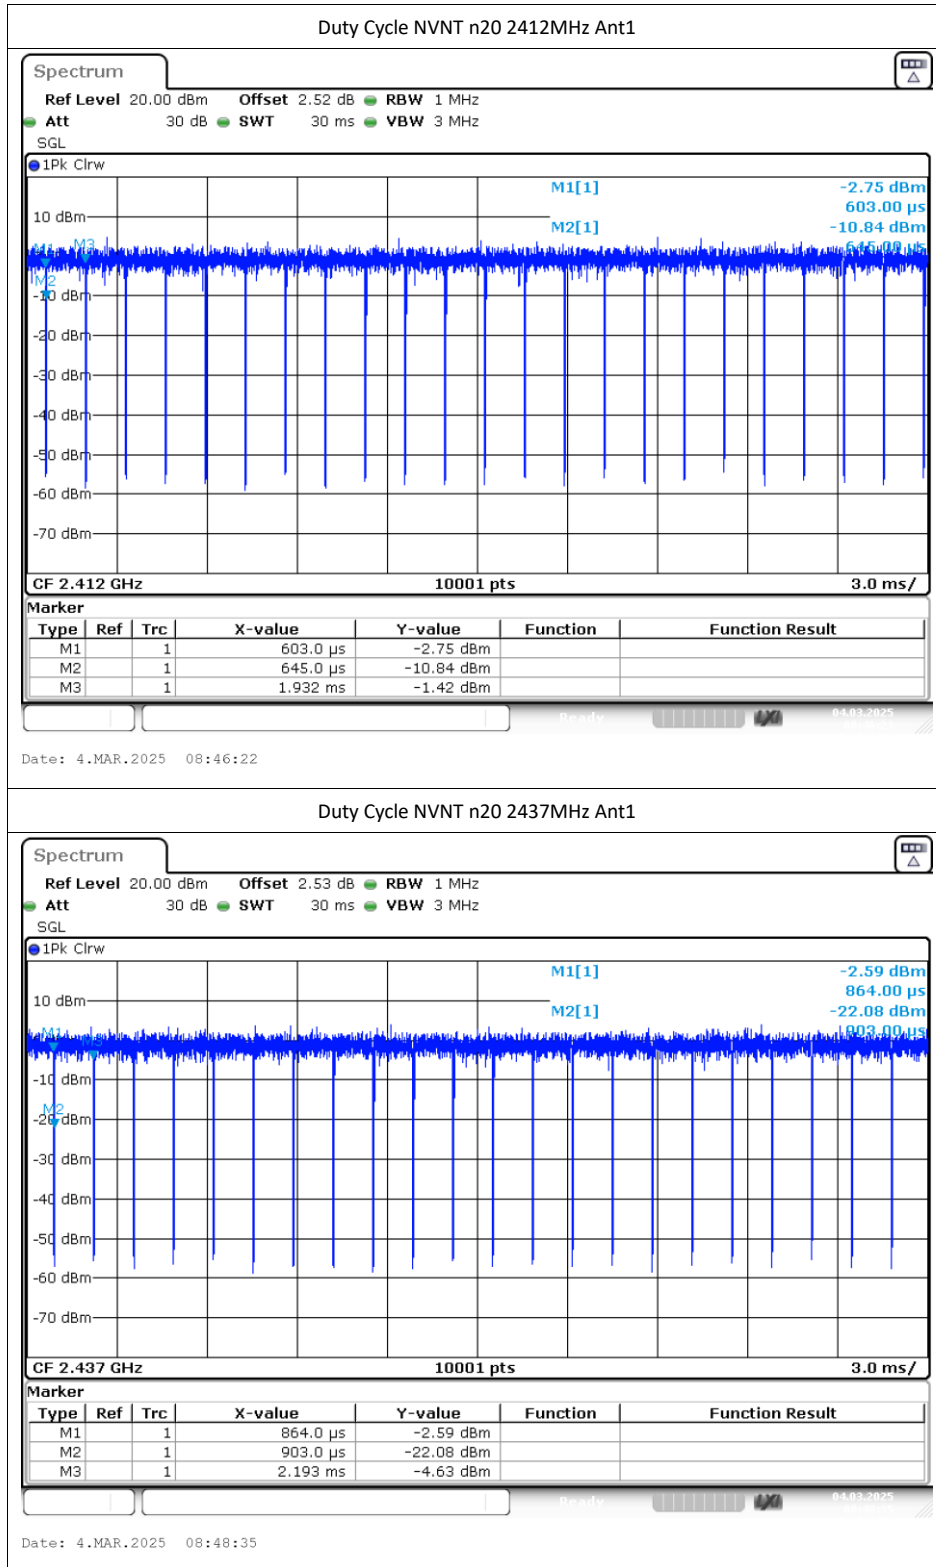


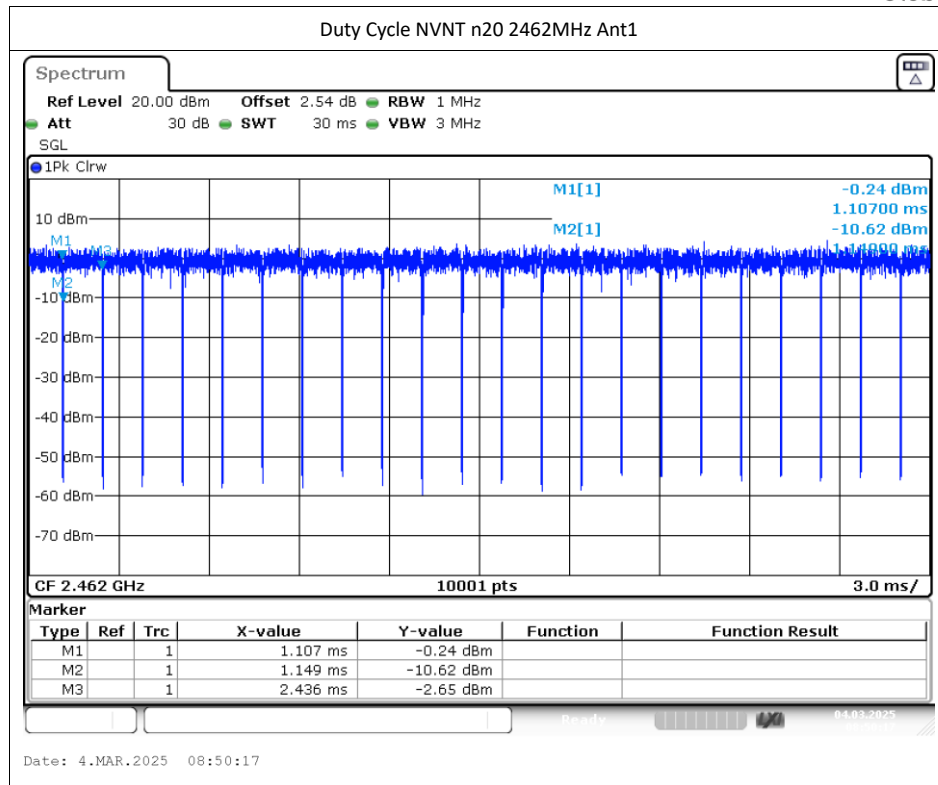




Maximum Conducted Output Power



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	18.44	0	18.44	30	Pass
NVNT	b	2437	Ant1	18.7	0	18.7	30	Pass
NVNT	b	2462	Ant1	18.27	0	18.27	30	Pass
NVNT	g	2412	Ant1	15.73	0	15.73	30	Pass
NVNT	g	2437	Ant1	15.17	0	15.17	30	Pass
NVNT	g	2462	Ant1	15.61	0	15.61	30	Pass
NVNT	n20	2412	Ant1	15.69	0	15.69	30	Pass
NVNT	n20	2437	Ant1	15.19	0	15.19	30	Pass
NVNT	n20	2462	Ant1	15.82	0	15.82	30	Pass



-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.08	0.5	Pass
NVNT	b	2437	Ant1	9.57	0.5	Pass
NVNT	b	2462	Ant1	9.57	0.5	Pass
NVNT	g	2412	Ant1	16.32	0.5	Pass
NVNT	g	2437	Ant1	16.35	0.5	Pass
NVNT	g	2462	Ant1	16.32	0.5	Pass
NVNT	n20	2412	Ant1	17.04	0.5	Pass
NVNT	n20	2437	Ant1	17.07	0.5	Pass
NVNT	n20	2462	Ant1	17.04	0.5	Pass

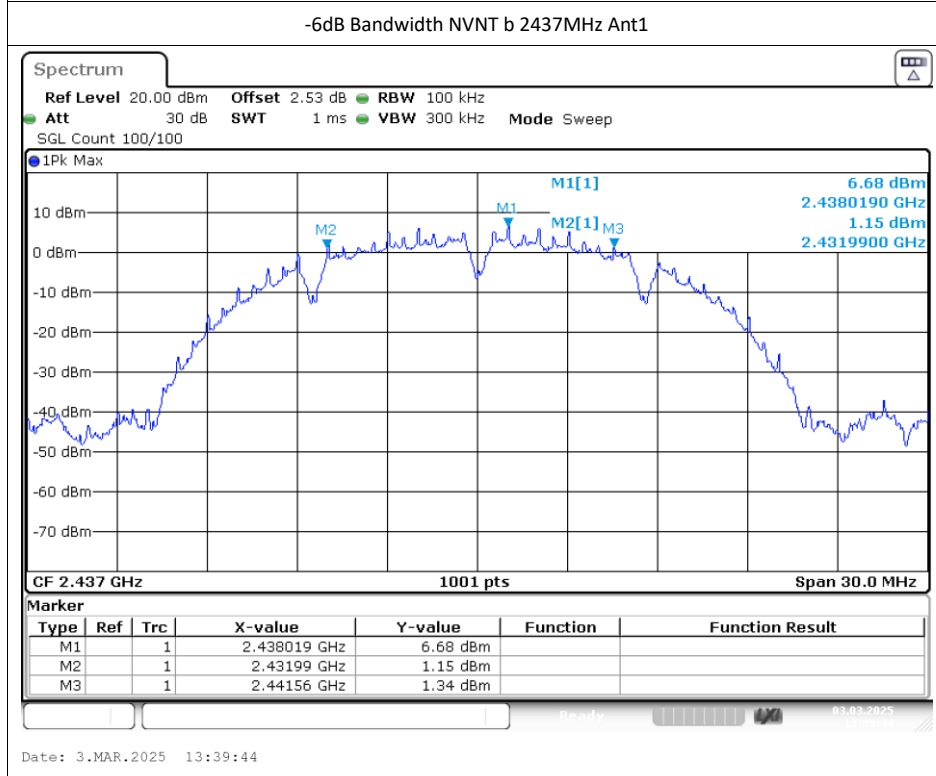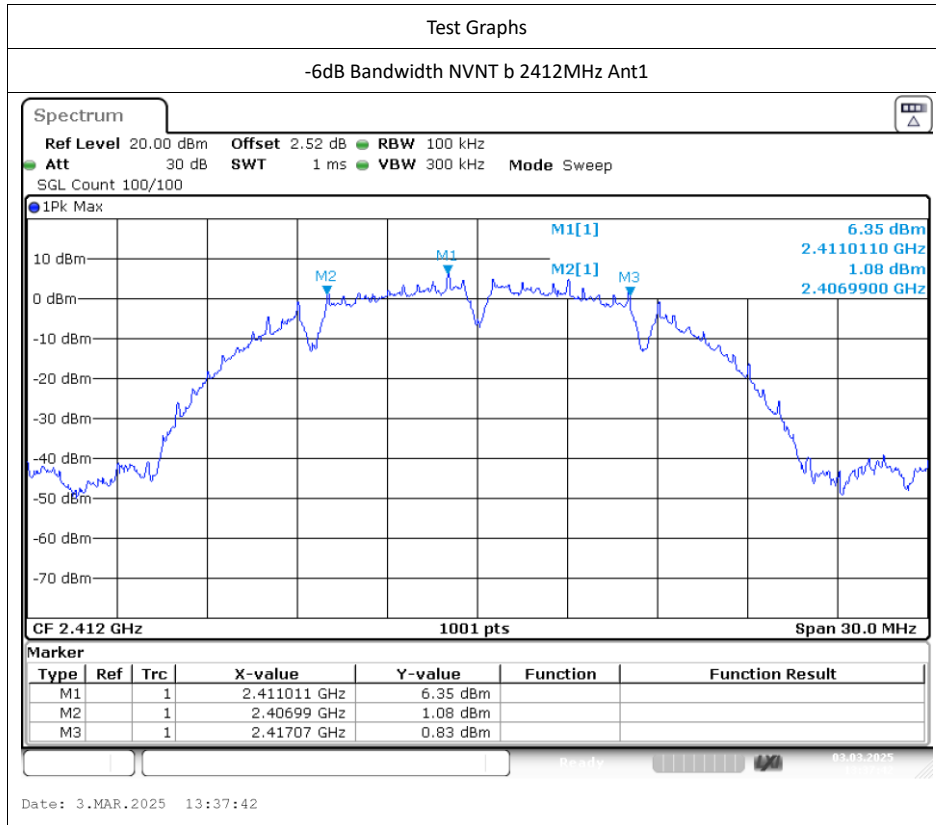

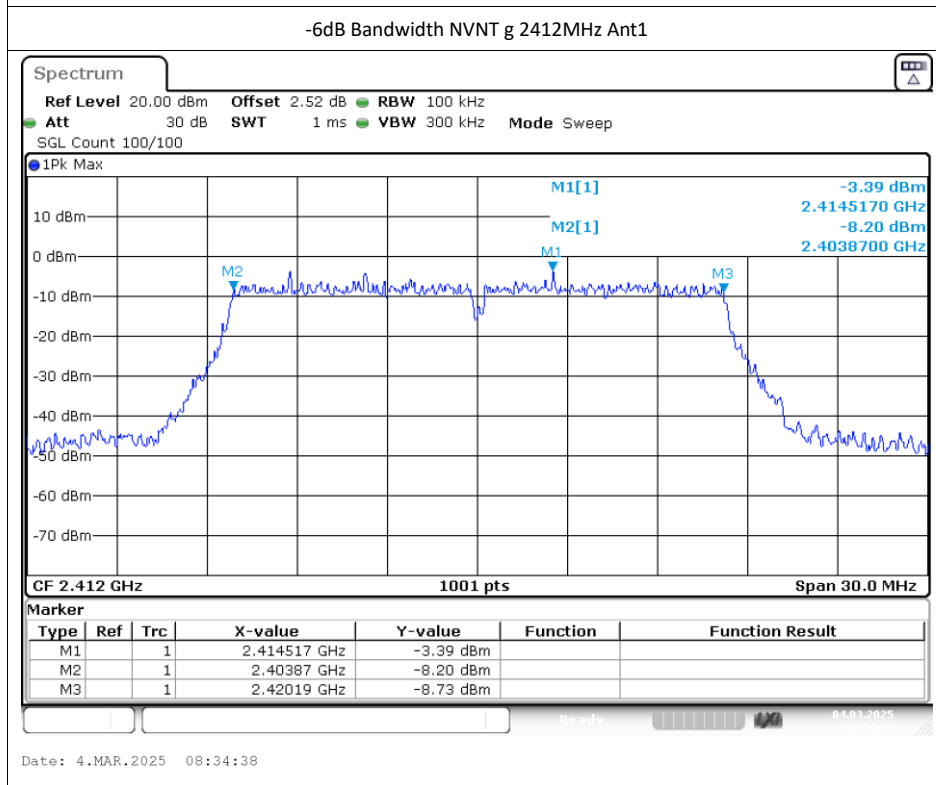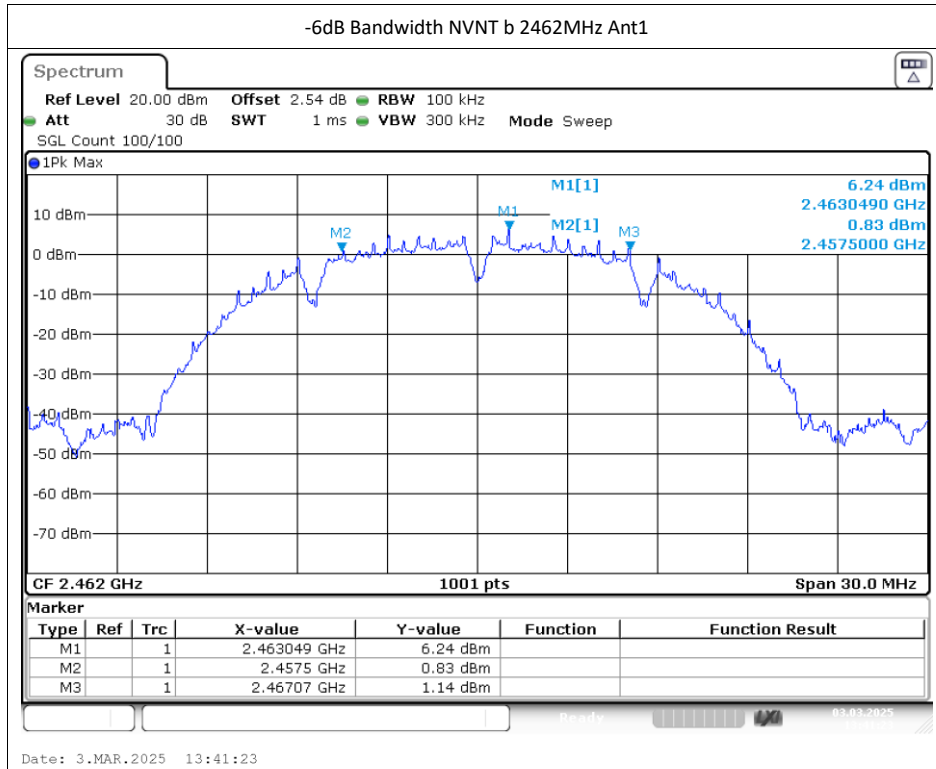

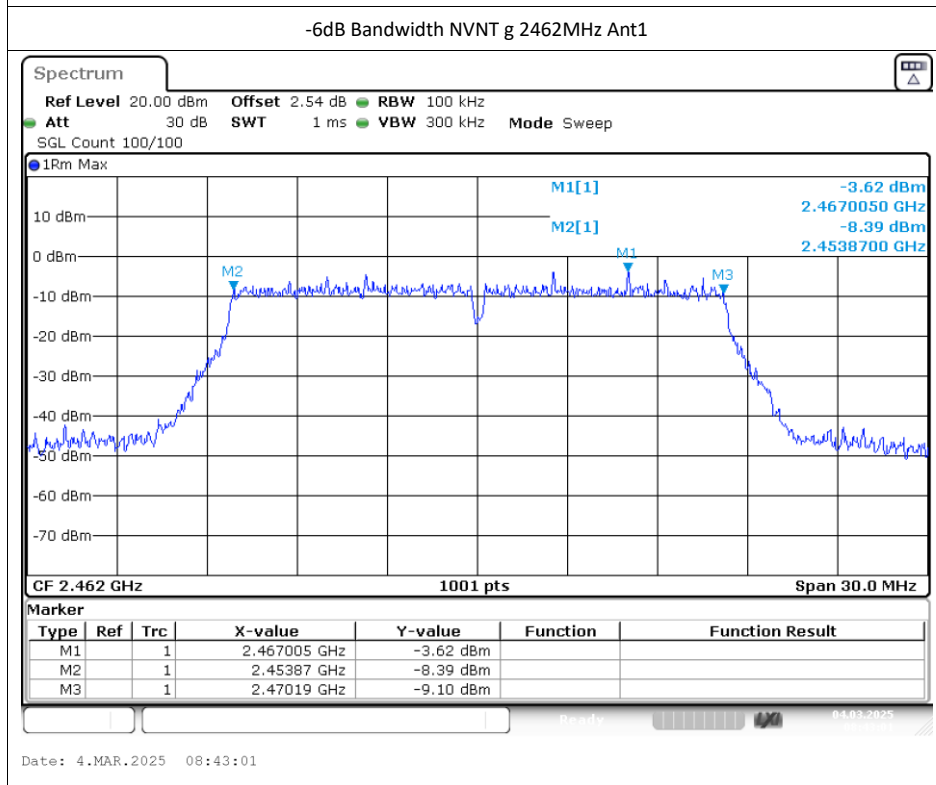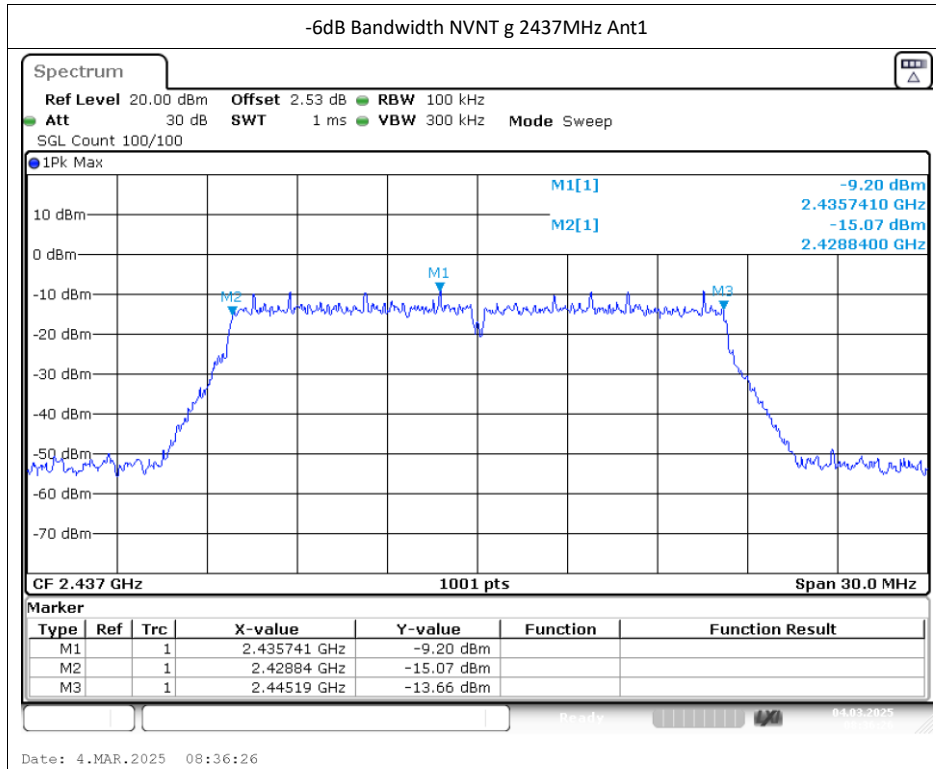

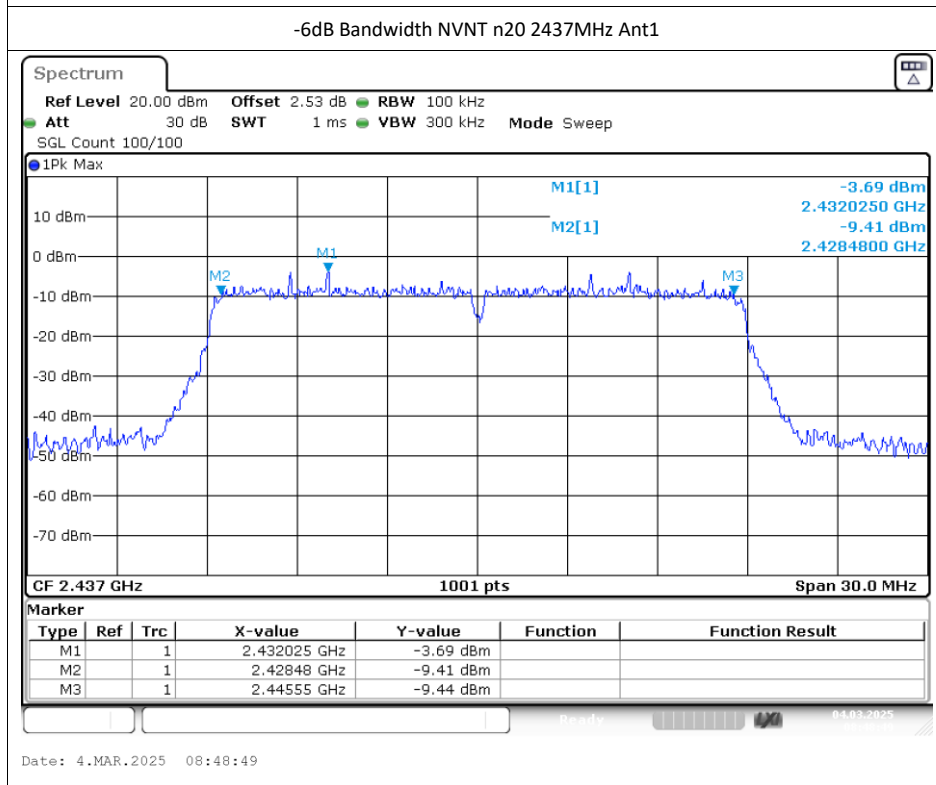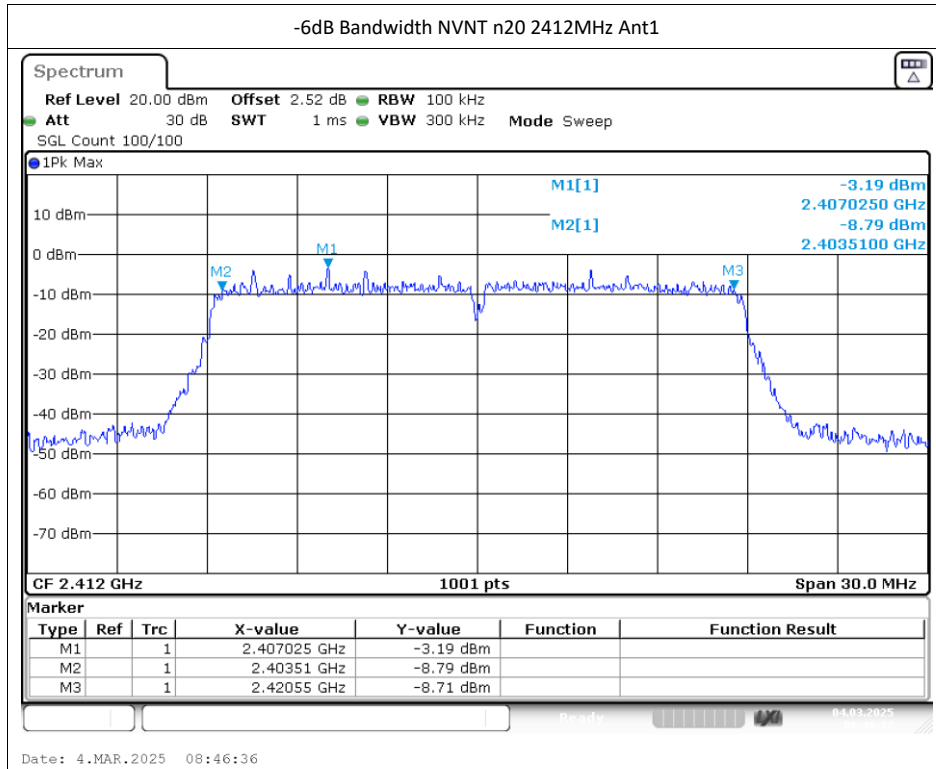

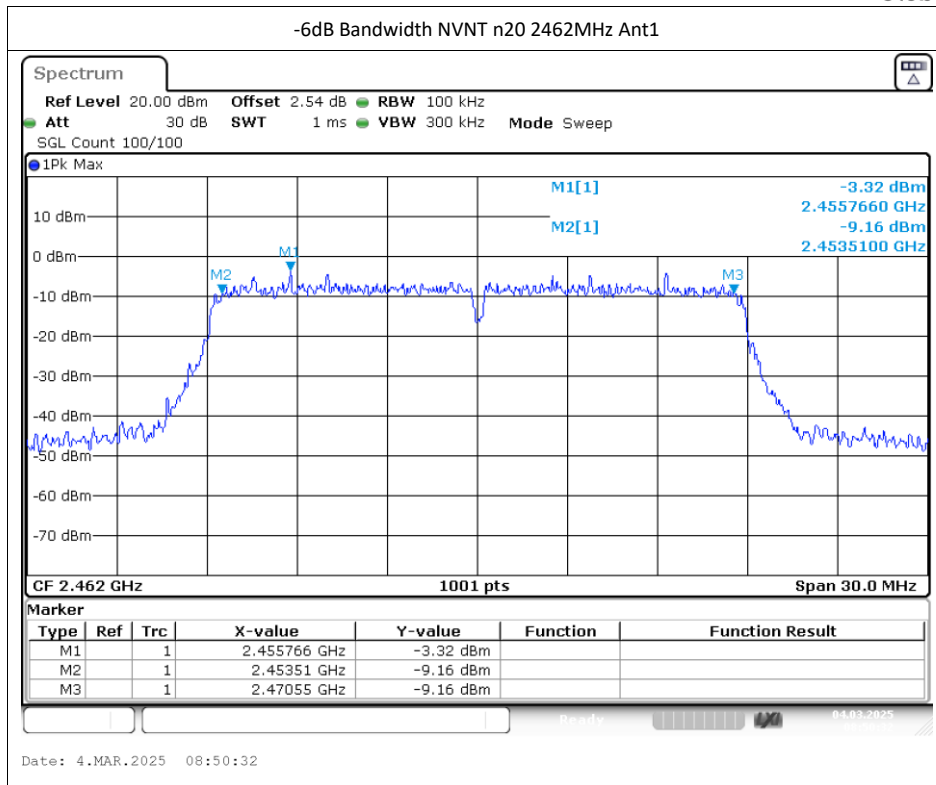

1Pk Max

M1[1]

-3.32 dBm

2.4557660 GHz

M2[1]

-9.16 dBm

2.4535100 GHz

CF 2.462 GHz

1001 pts

Span 30.0 MHz

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.455766 GHz	-3.32 dBm		
M2		1	2.45351 GHz	-9.16 dBm		
M3		1	2.47055 GHz	-9.16 dBm		



Date: 4.MAR.2025


08:50:32


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	14.925
NVNT	b	2437	Ant1	14.925
NVNT	b	2462	Ant1	14.925
NVNT	g	2412	Ant1	16.543
NVNT	g	2437	Ant1	16.543
NVNT	g	2462	Ant1	16.484
NVNT	n20	2412	Ant1	17.562
NVNT	n20	2437	Ant1	17.562
NVNT	n20	2462	Ant1	17.562

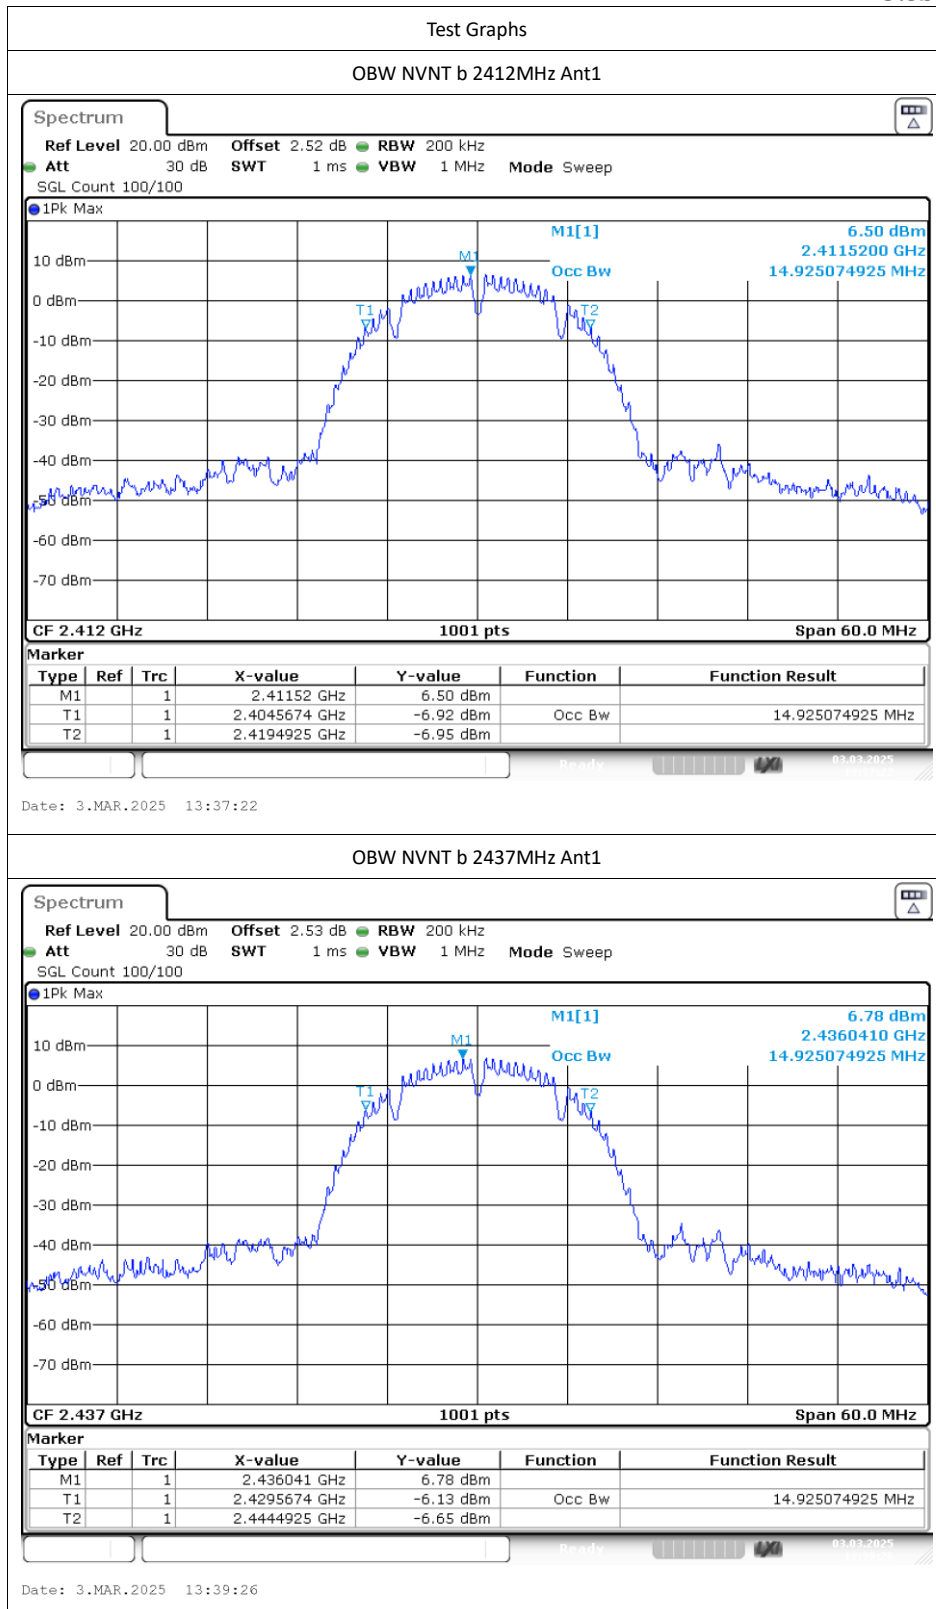

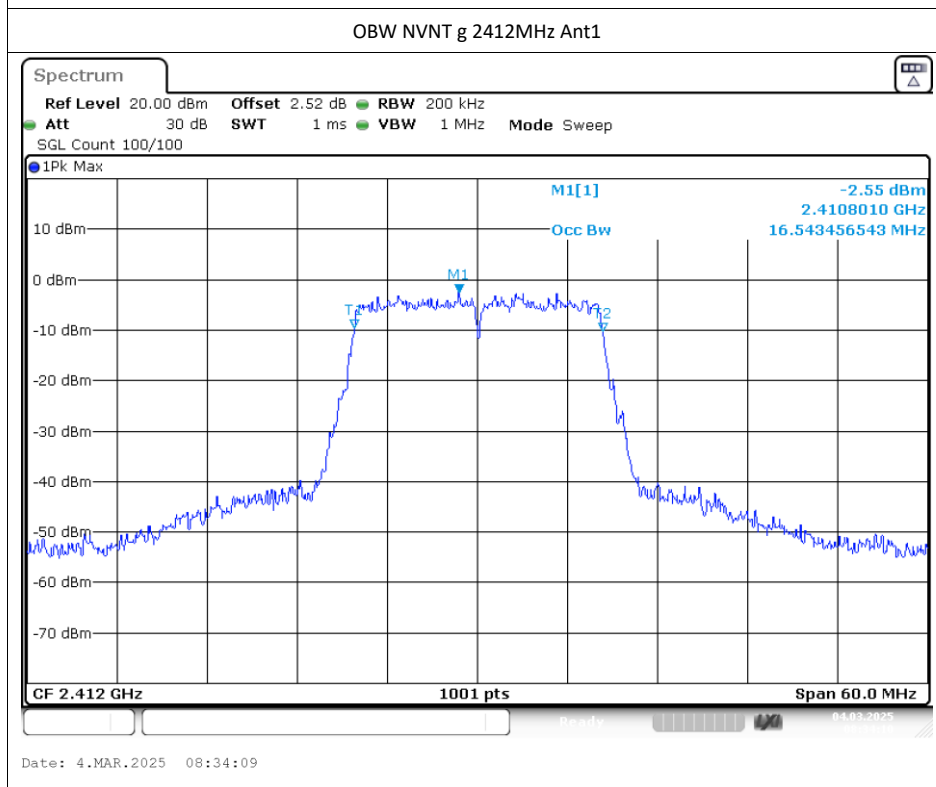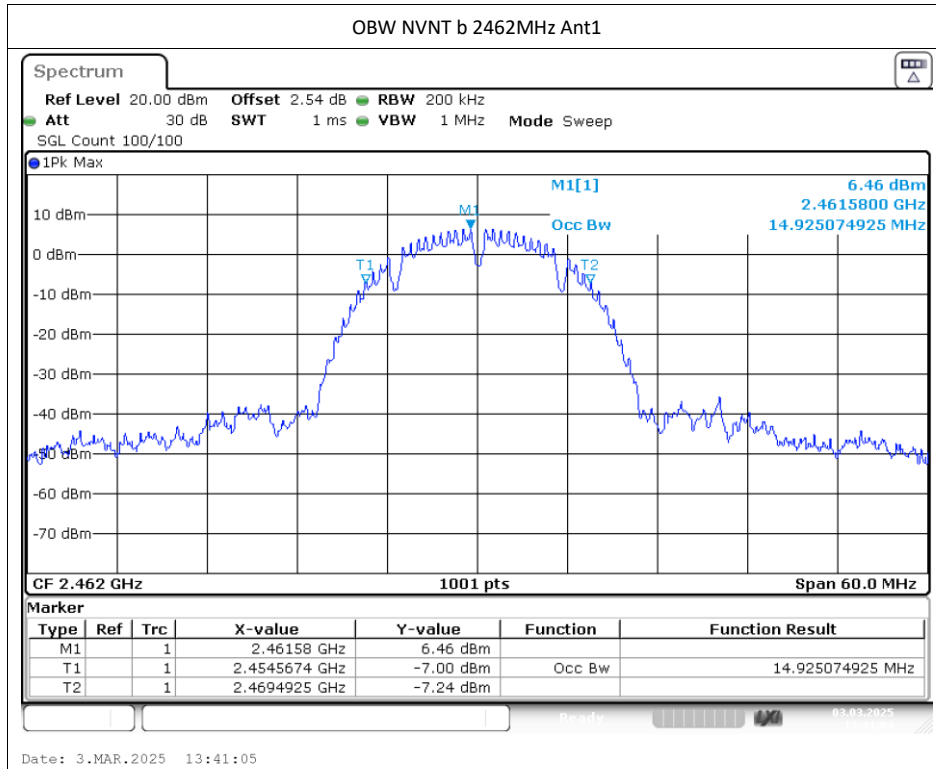

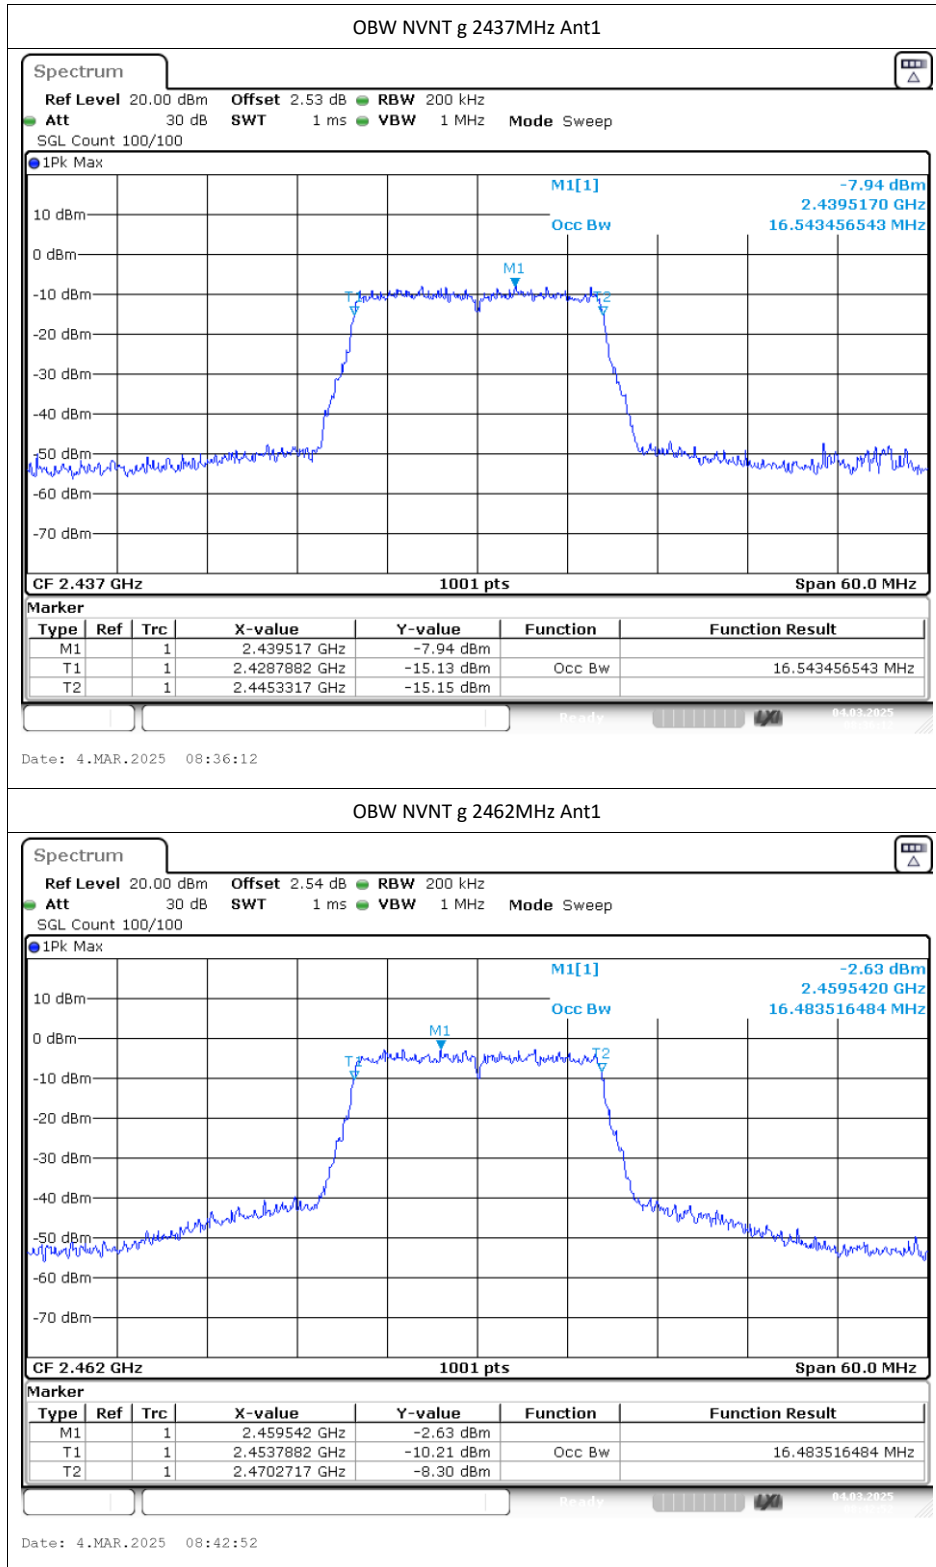


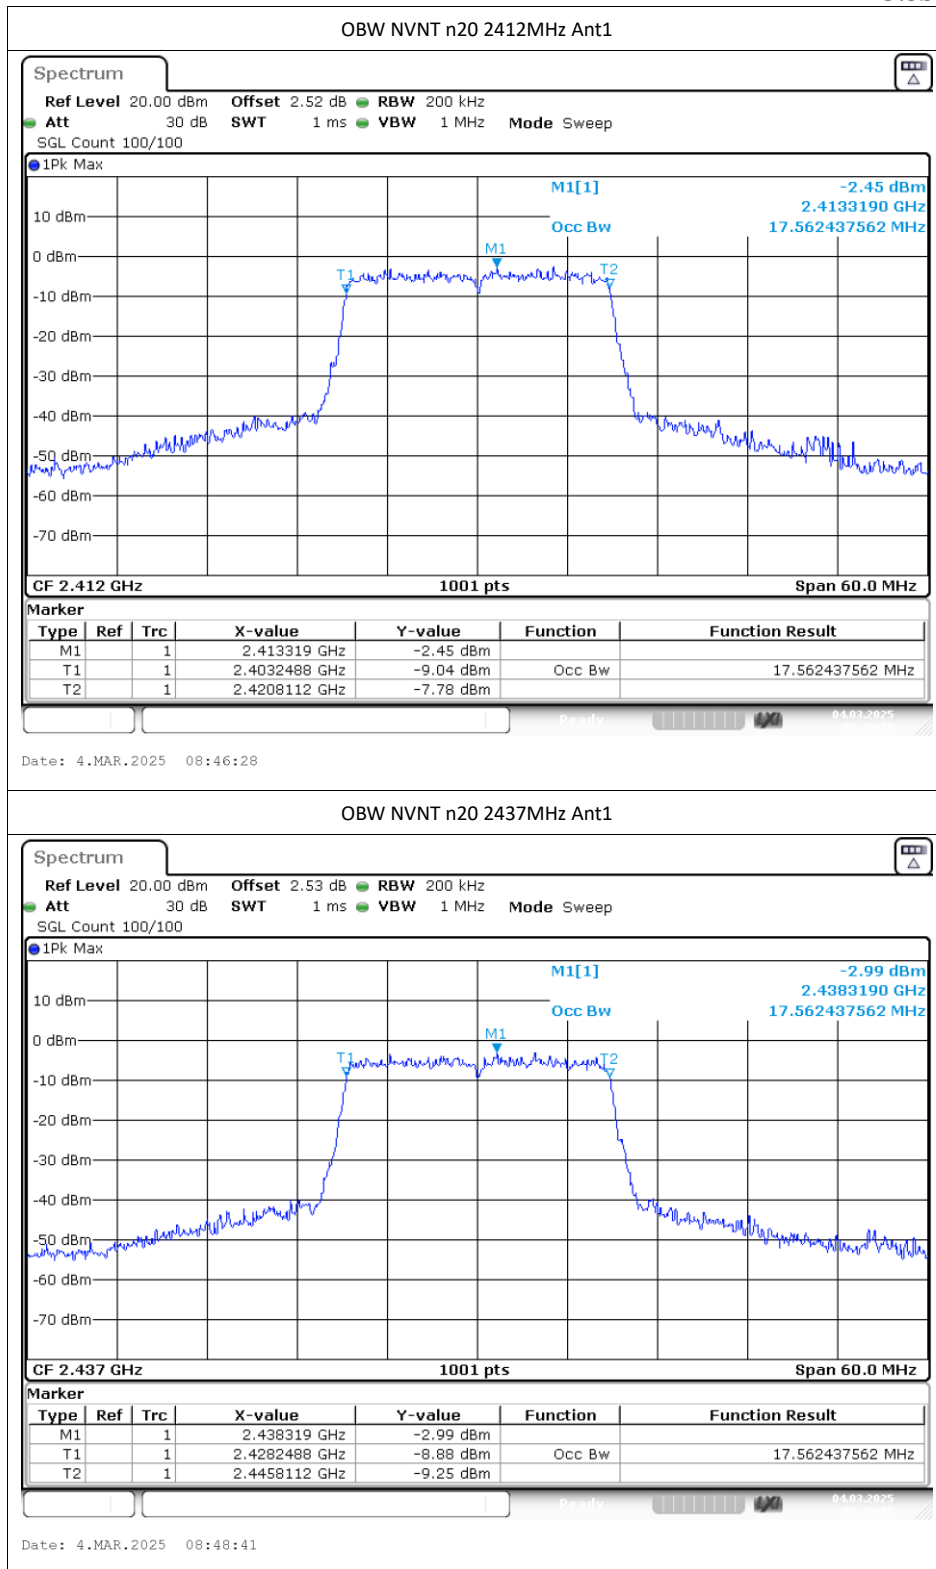


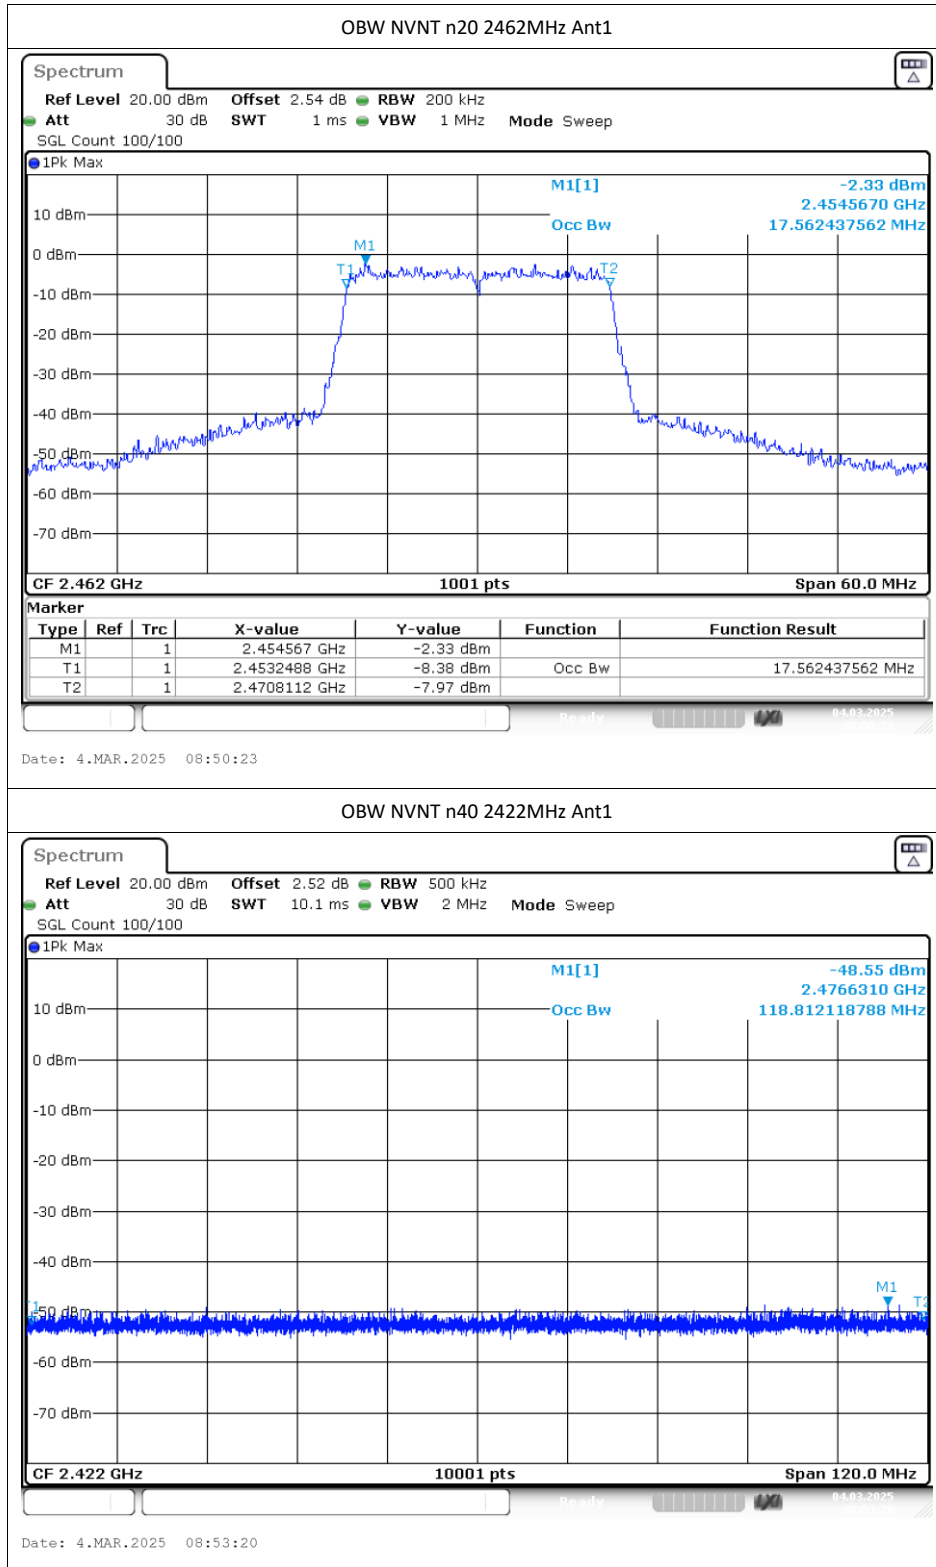




Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-5.28	0	-5.28	8	Pass
NVNT	b	2437	Ant1	-6.6	0	-6.6	8	Pass
NVNT	b	2462	Ant1	-5.46	0	-5.46	8	Pass
NVNT	g	2412	Ant1	-17.8	0	-17.8	8	Pass
NVNT	g	2437	Ant1	-17.65	0	-17.65	8	Pass
NVNT	g	2462	Ant1	-17.44	0	-17.44	8	Pass
NVNT	n20	2412	Ant1	-16.77	0	-16.77	8	Pass
NVNT	n20	2437	Ant1	-17.42	0	-17.42	8	Pass
NVNT	n20	2462	Ant1	-17.63	0	-17.63	8	Pass

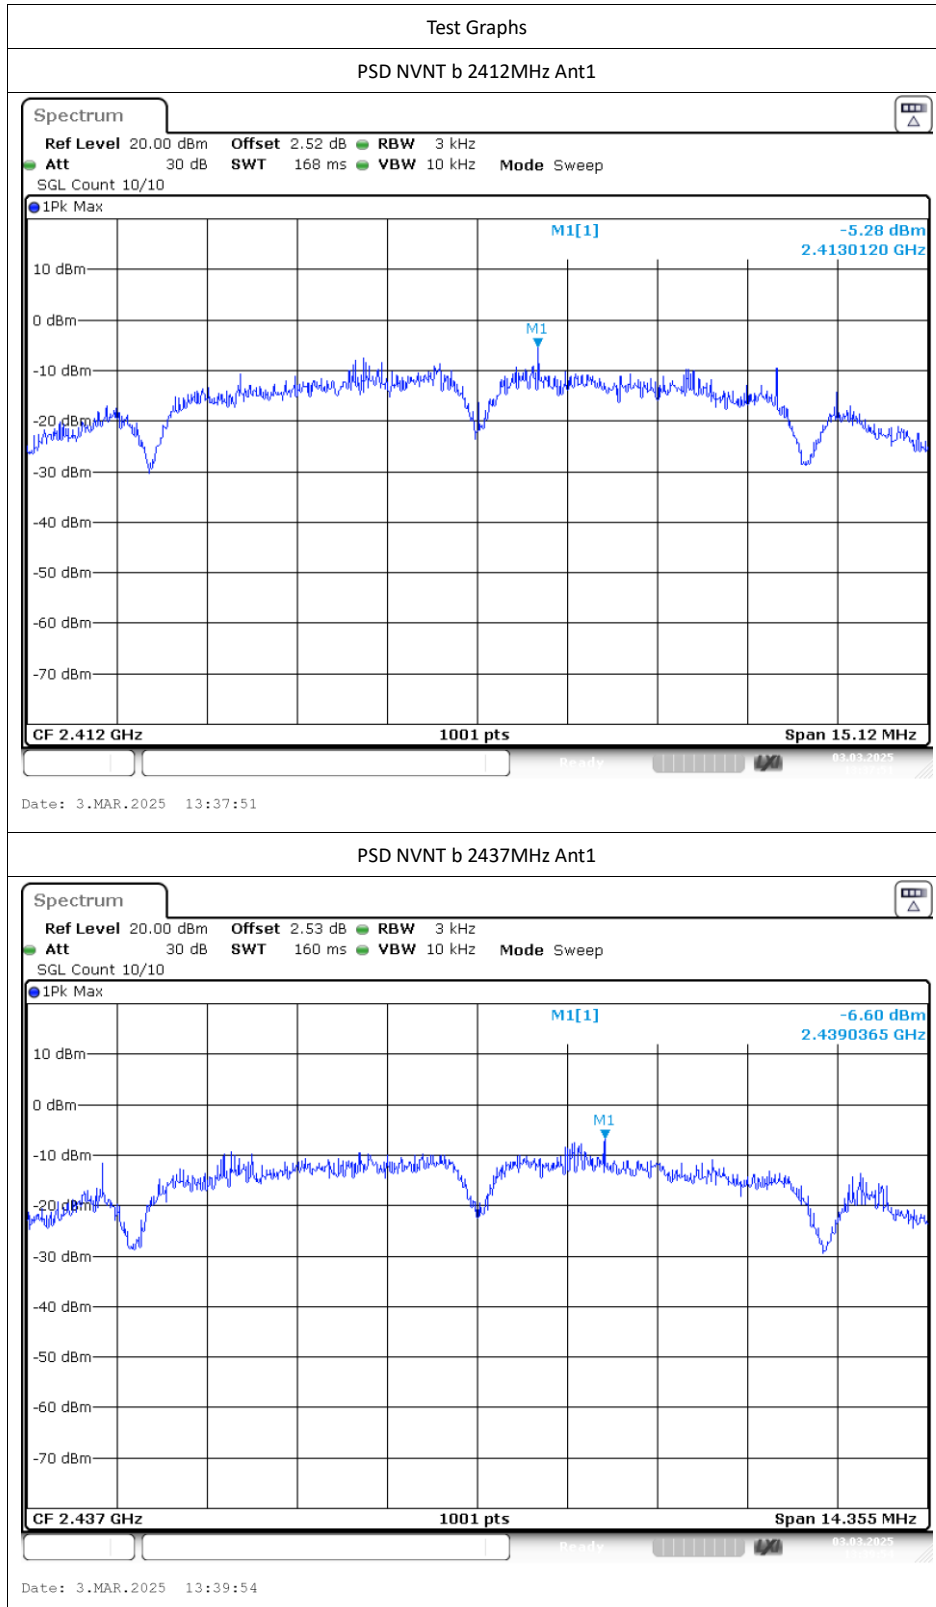

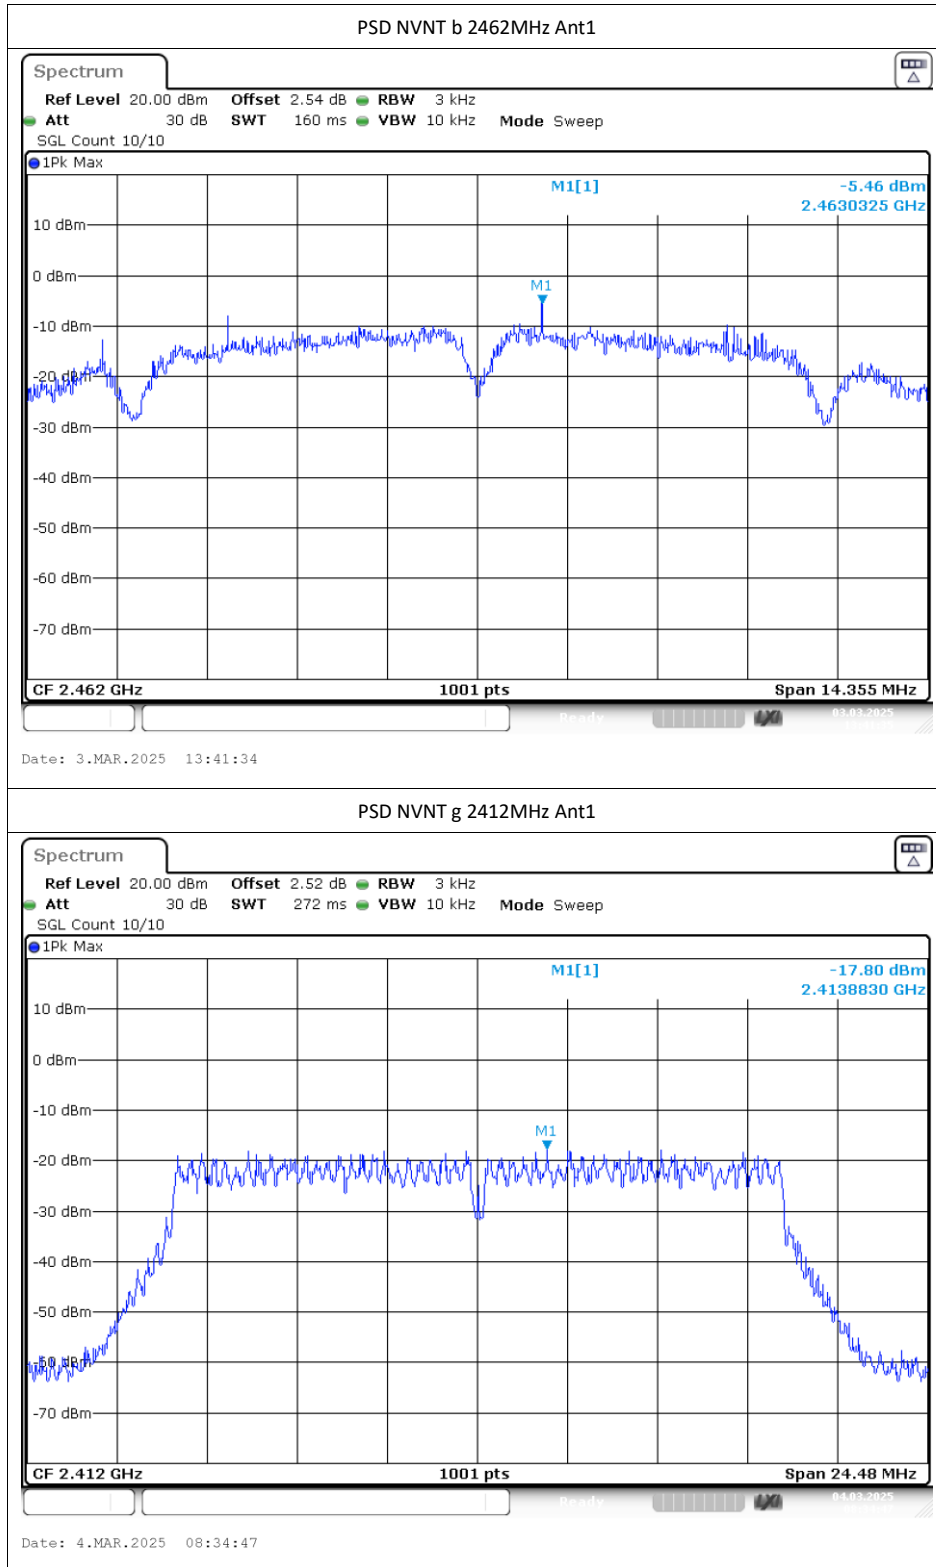

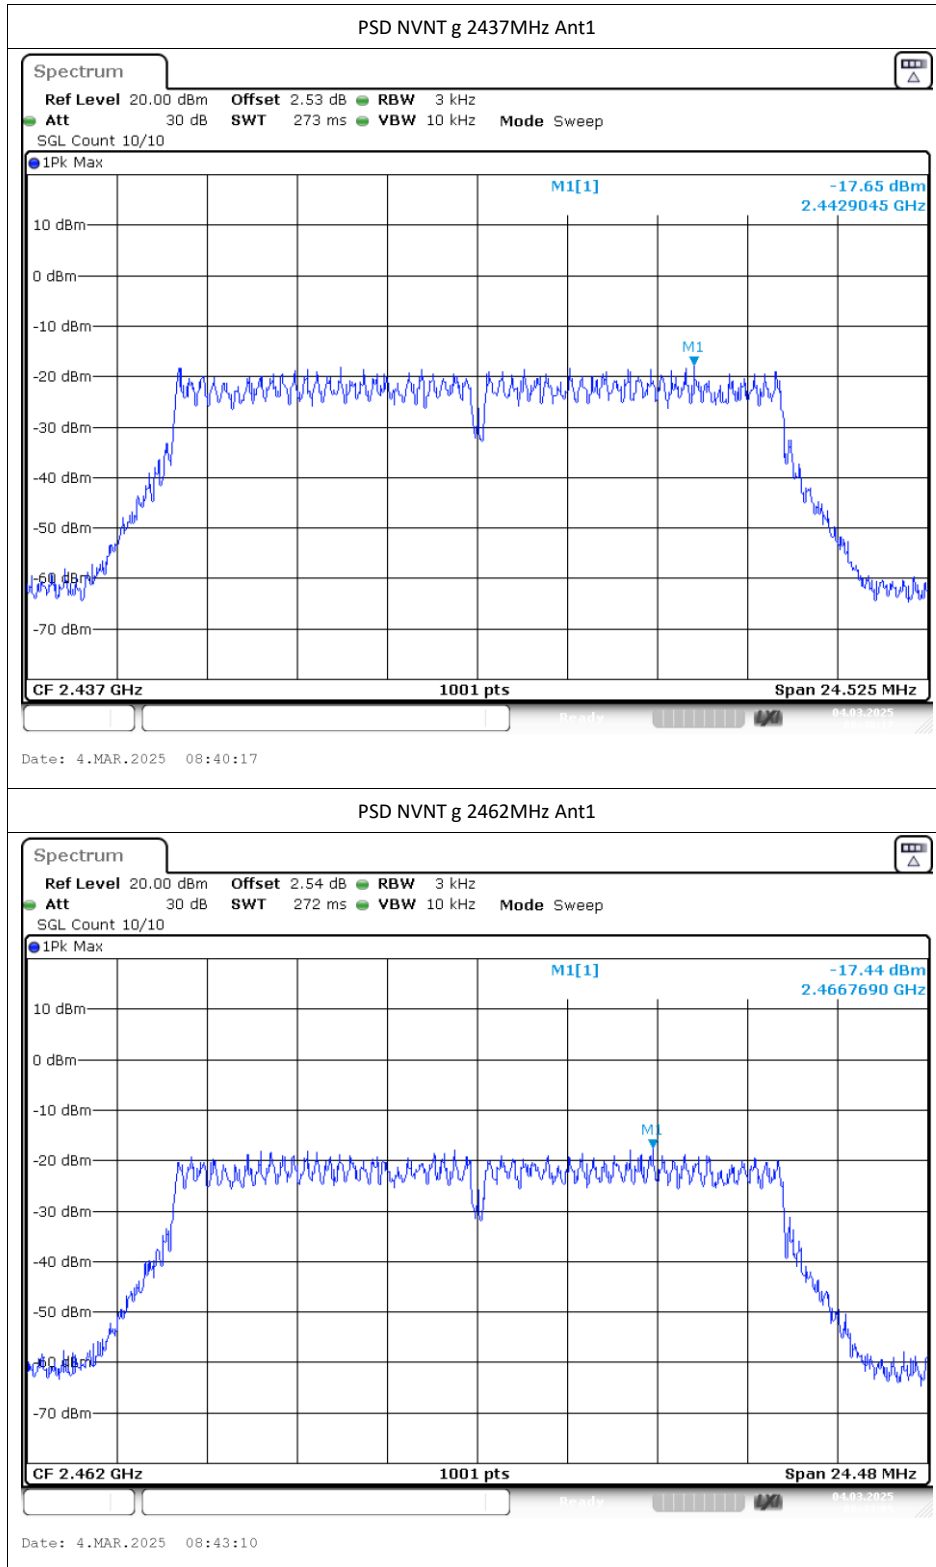


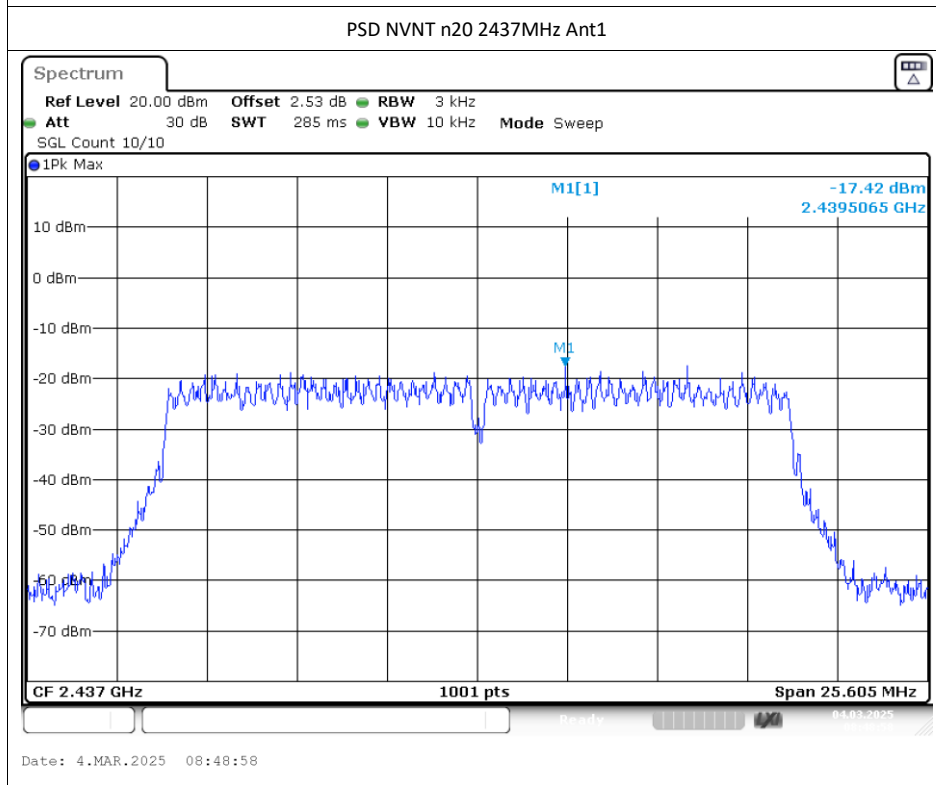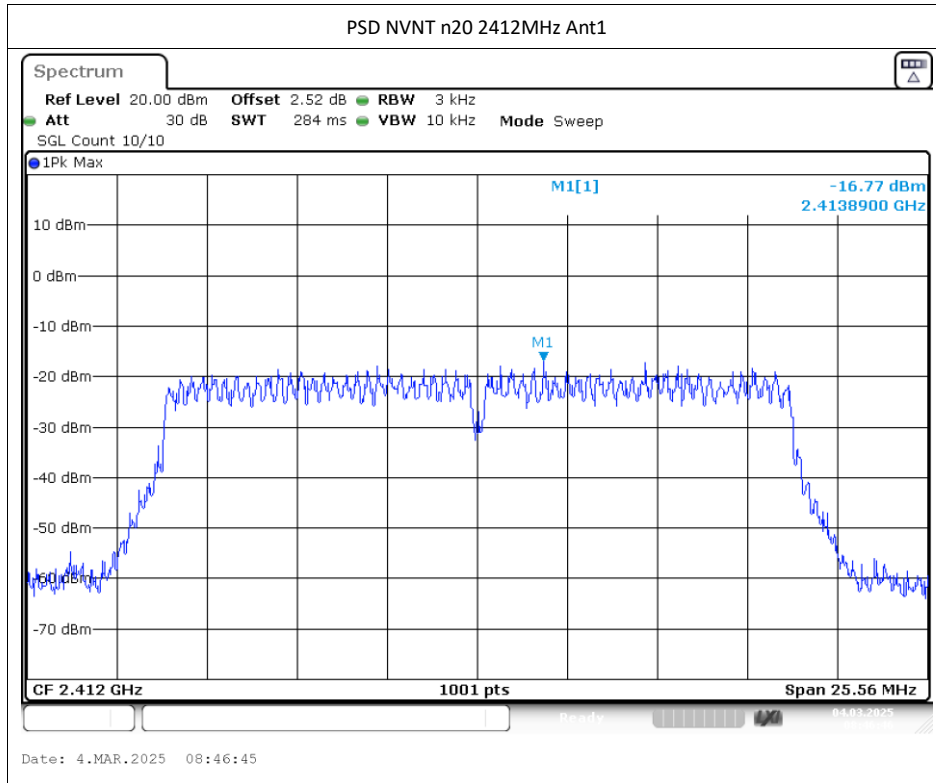


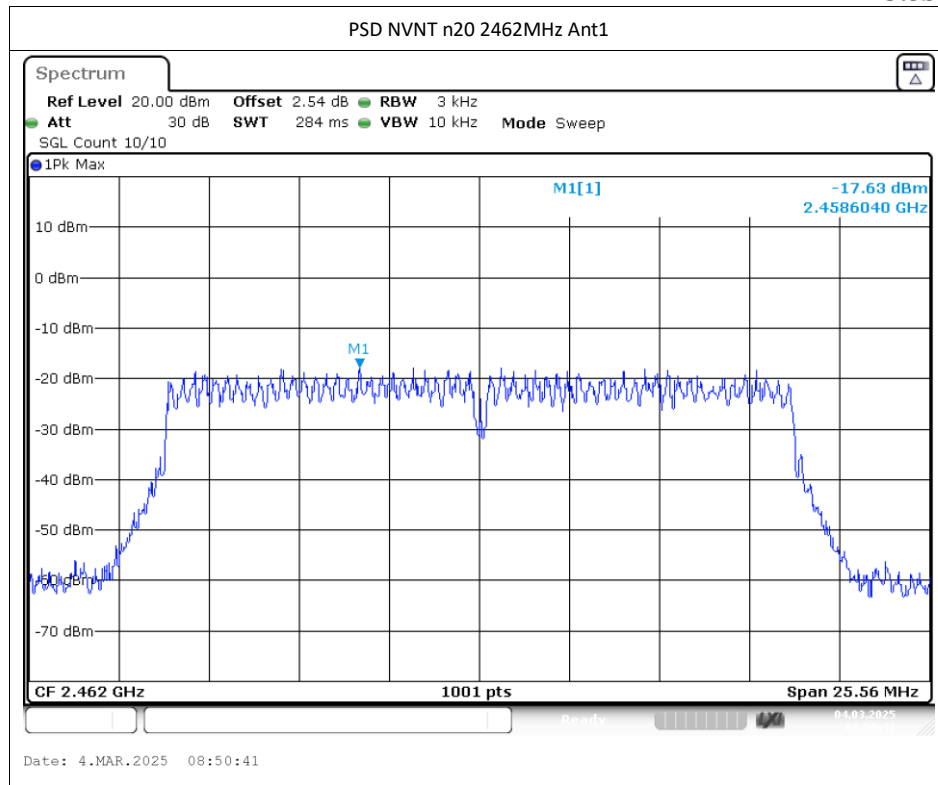



Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-46.21	-20	Pass
NVNT	b	2462	Ant1	-53.96	-20	Pass
NVNT	g	2412	Ant1	-39.92	-20	Pass
NVNT	g	2462	Ant1	-49.48	-20	Pass
NVNT	n20	2412	Ant1	-39.54	-20	Pass
NVNT	n20	2462	Ant1	-47.46	-20	Pass

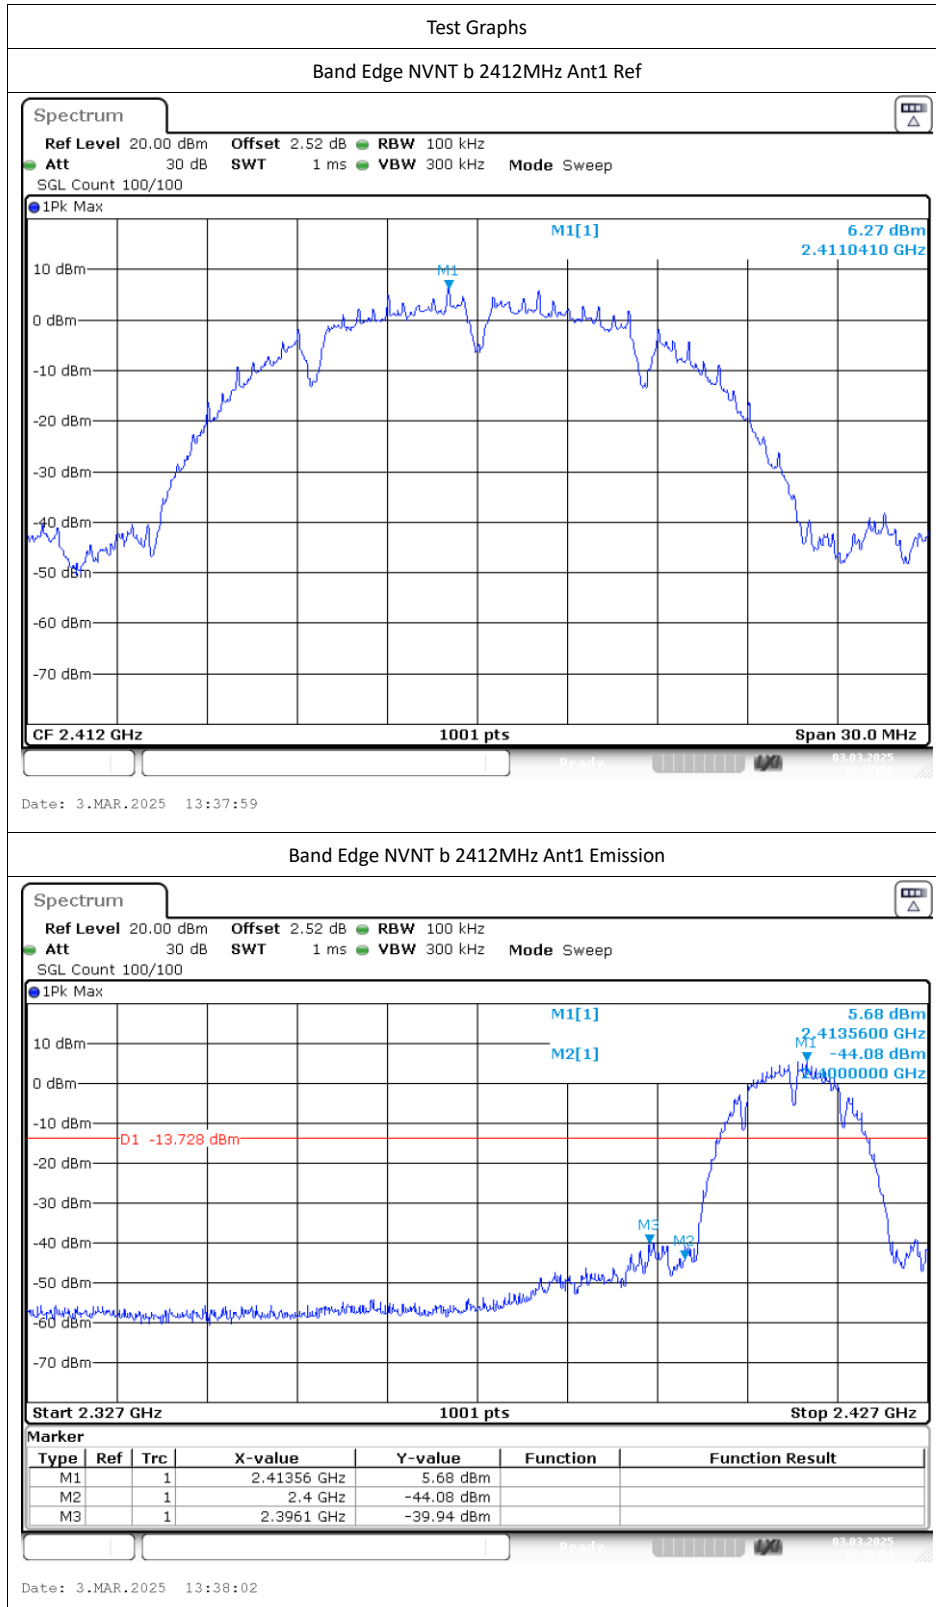


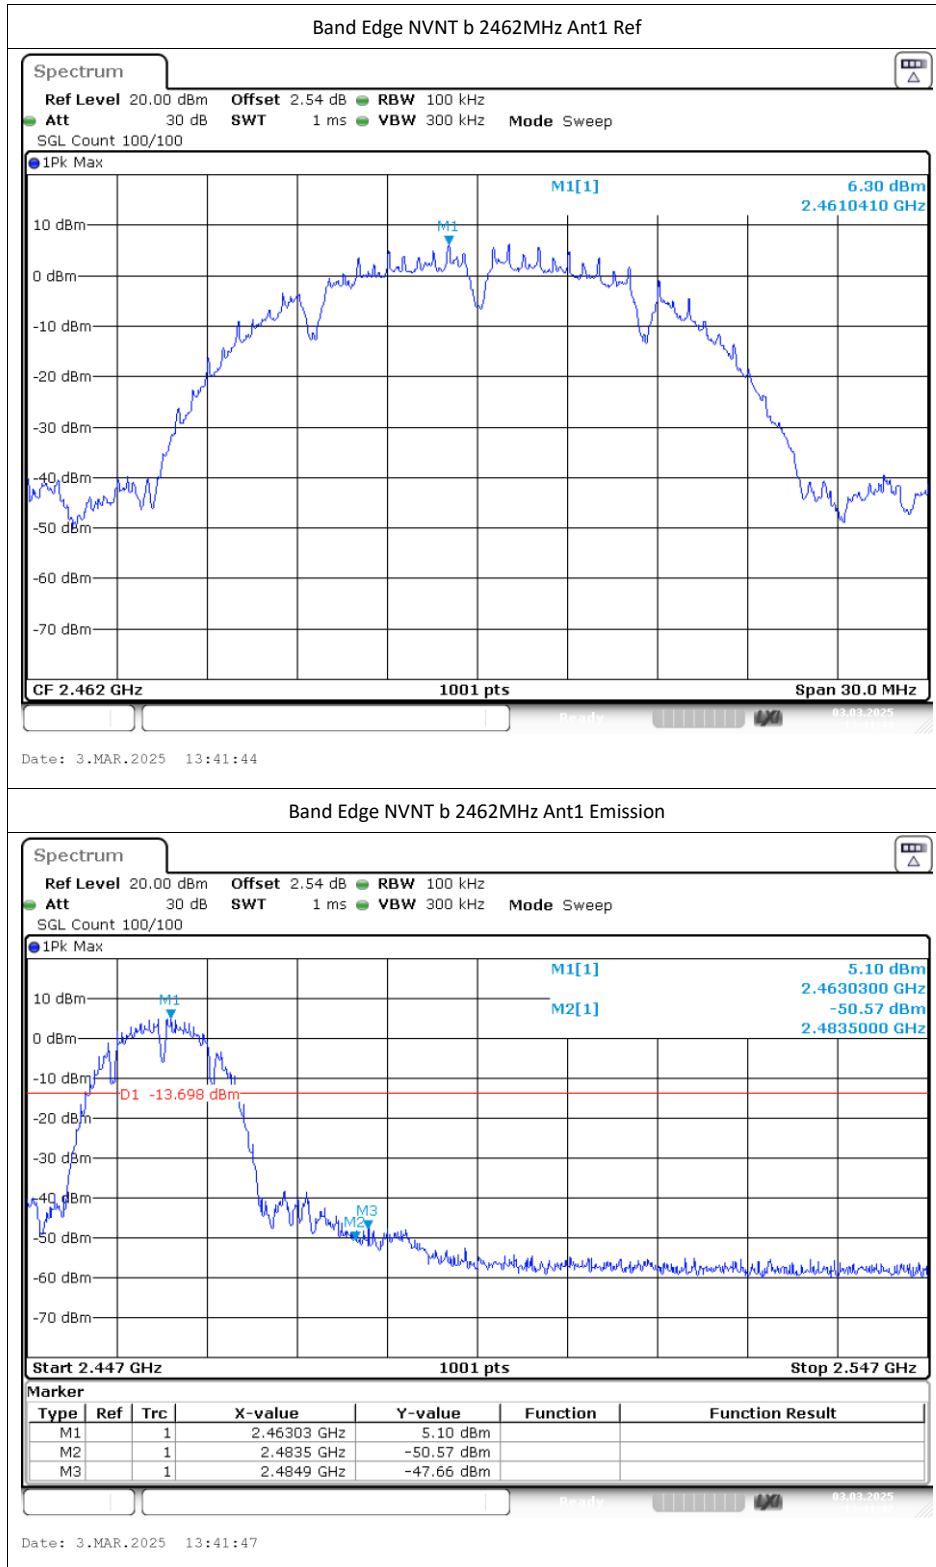

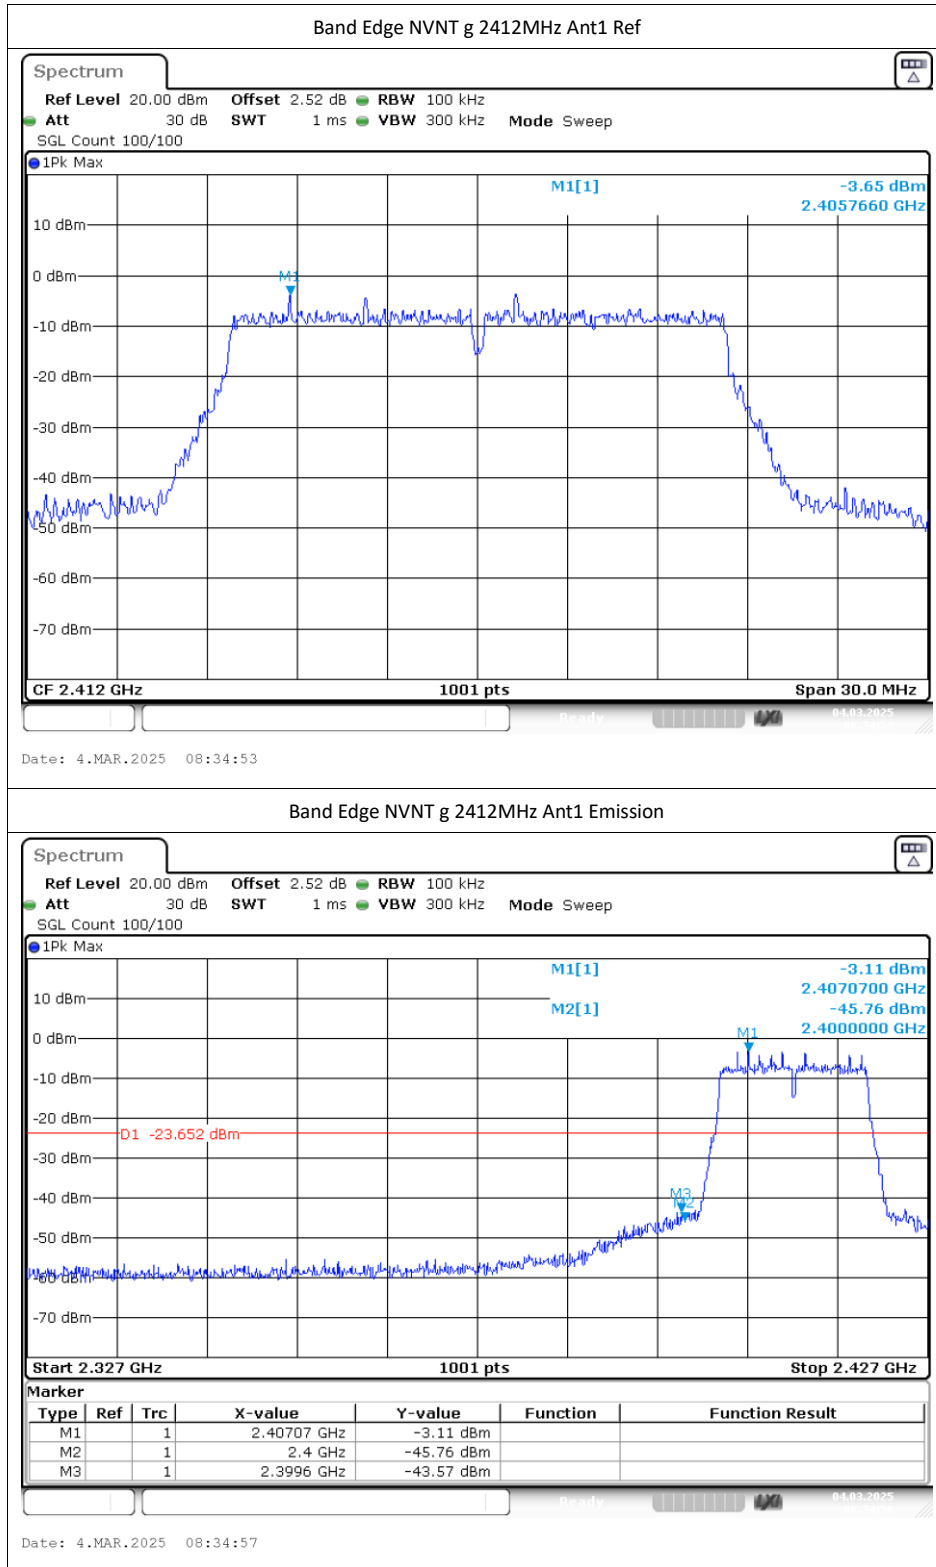

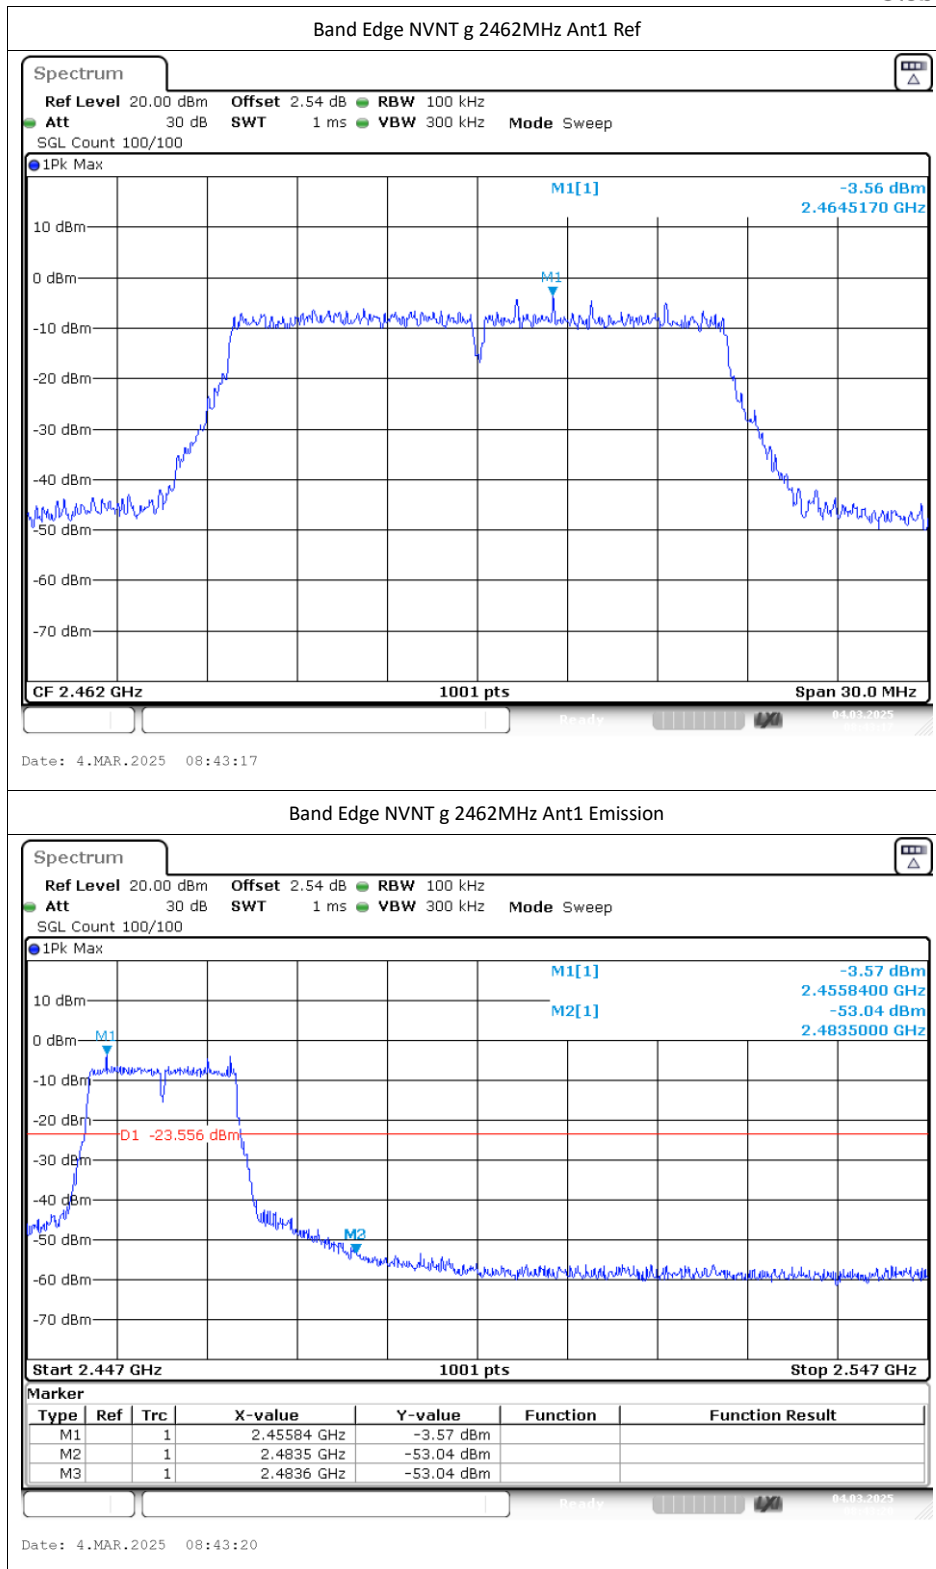

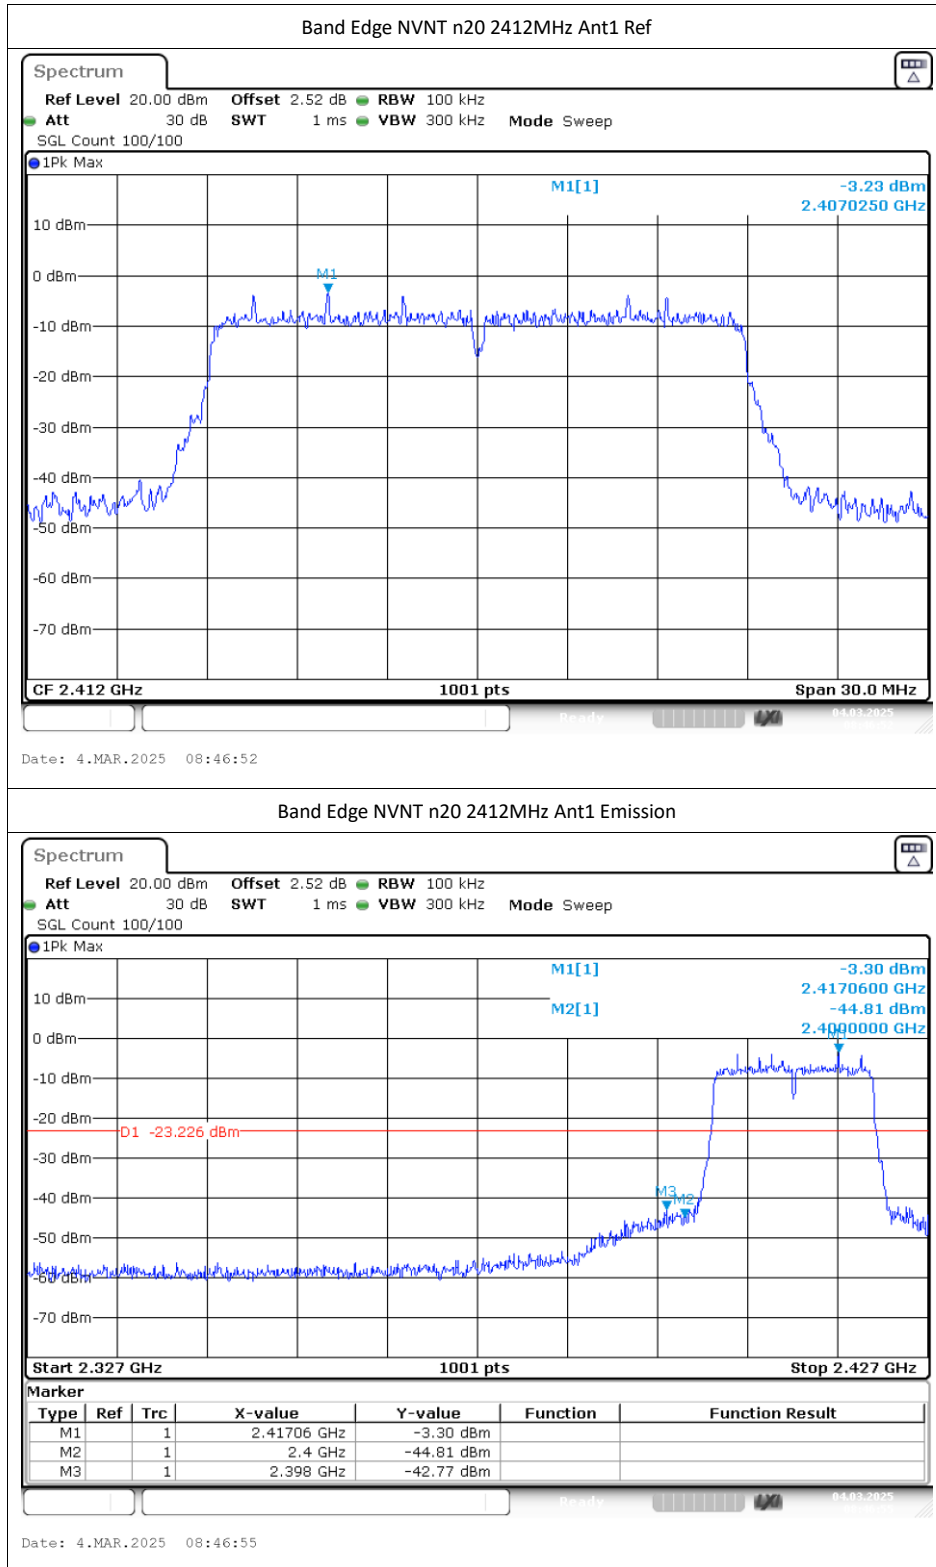

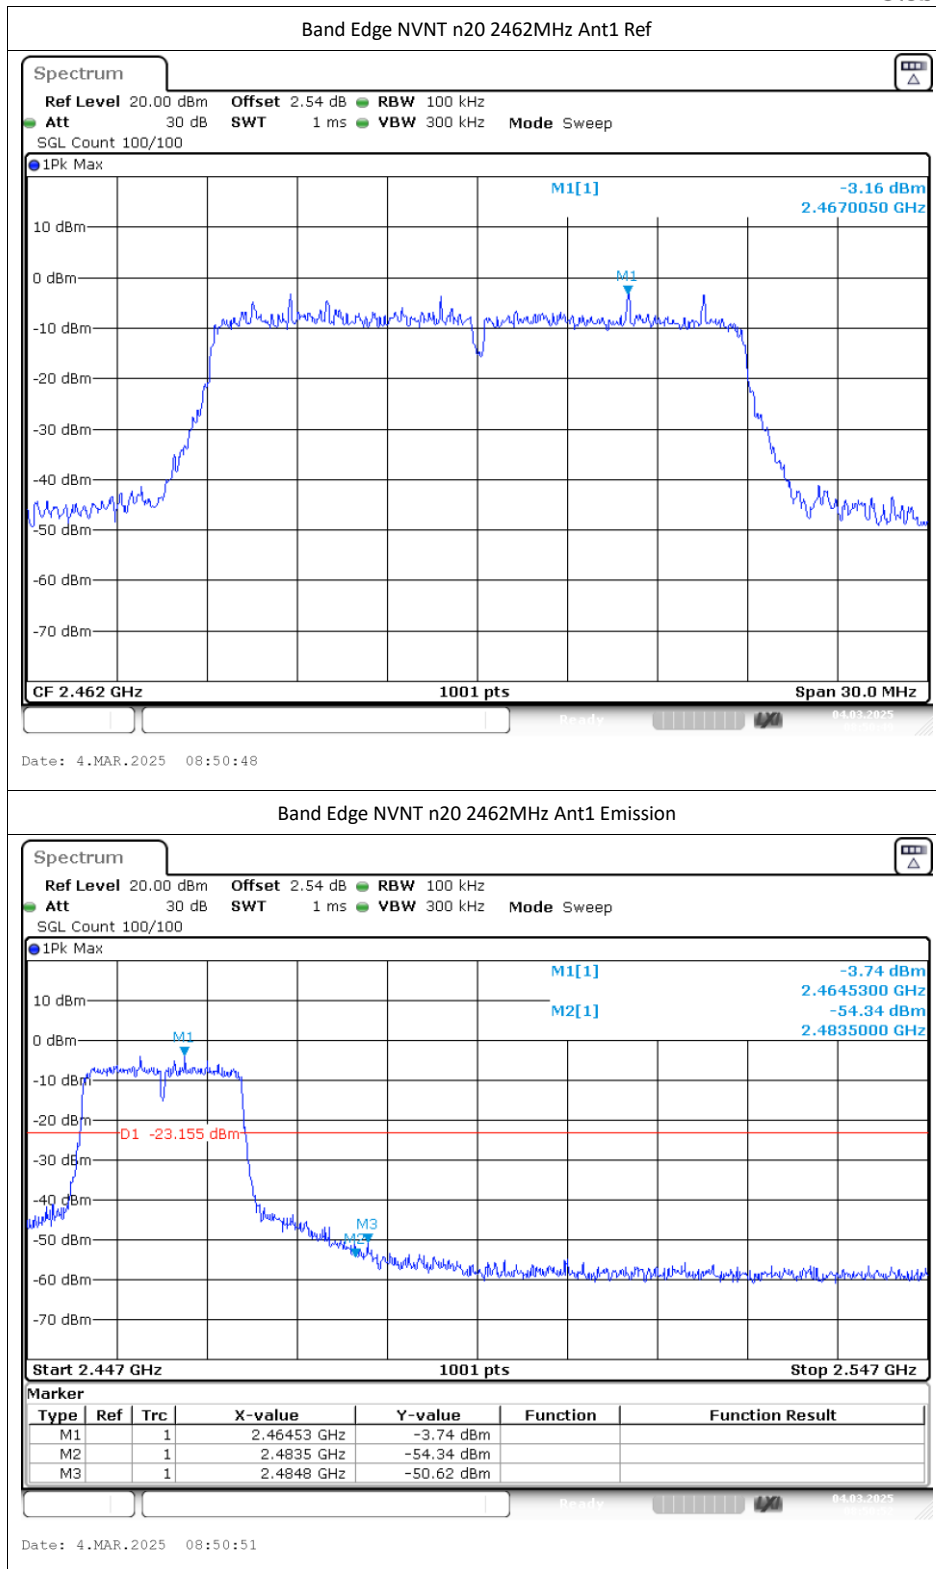

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-44.46	-20	Pass
NVNT	b	2437	Ant1	-46.6	-20	Pass
NVNT	b	2462	Ant1	-48.12	-20	Pass
NVNT	g	2412	Ant1	-46.27	-20	Pass
NVNT	g	2437	Ant1	-45.71	-20	Pass
NVNT	g	2462	Ant1	-46.4	-20	Pass
NVNT	n20	2412	Ant1	-47.12	-20	Pass
NVNT	n20	2437	Ant1	-46.41	-20	Pass
NVNT	n20	2462	Ant1	-44.04	-20	Pass

