




**骨传导蓝牙耳机**

使用指南及保修说明  
Operating instructions and Warranty description

**示意图**

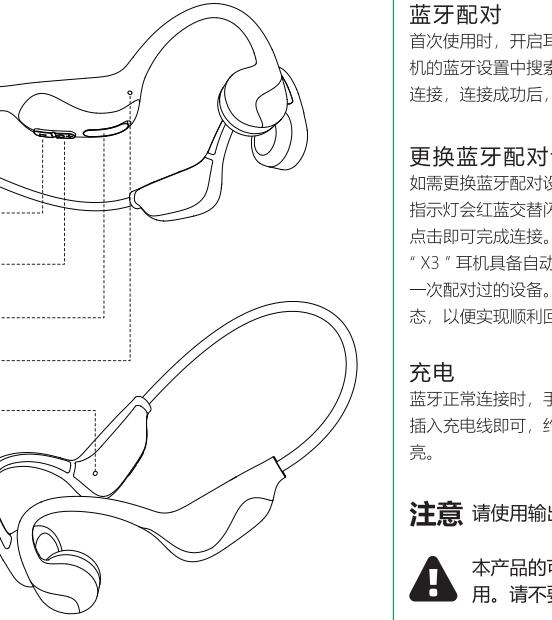

**使用说明**

**蓝牙配对**  
首次使用时，开启耳机，它将自动进入蓝牙配对状态。此时，在手机的蓝牙设置中搜索设备，即可找到名为“X3”的耳机。点击进行连接，连接成功后，耳机的指示灯将会熄灭。

**更换蓝牙配对设备及自动连接**  
如需更换蓝牙配对设备，先断开当前设备的蓝牙连接。此时，耳机指示灯会红蓝交替闪烁，其他设备便能搜索到名为“X3”的耳机，点击即可完成连接。

“X3”耳机具备自动回连功能。正常开机后，耳机会自动连接上最后一次配对过的设备。请确保前端设备（如手机）的蓝牙处于开启状态，以便实现顺利回连。

**充电**  
蓝牙正常连接时，手机显示耳机电量。若电量显示红色，需充电，插入充电线即可，约2小时充满。充电时红灯常亮，充满则蓝灯常亮。

**注意** 请使用输出5V1A及以内的充电头。

**!** 本产品的可充电电池必须妥善处理，以便回收利用。请不要将电池放入火中，以免引起爆炸。

**操作说明**

功能	操作	状态
开机	长按“O+”3-5秒	蓝灯亮1秒 红灯亮1秒
关机		
音量+	单击“O+”	蓝牙已连接
音量-	单击“-”	
下一曲	长按“O+”1秒	播放音乐
上一曲	长按“-”1秒	
暂停播放		音乐暂停播放
恢复播放	双击“O+”	
挂断电话		来电时
接听电话	单击“O+”	
拒接电话	长按“O+”2秒	通话中
手机/耳机听筒切换	长按“O+”1秒	
关/开耳机麦通话	3击“-”	
游戏/音乐模式切换	4击“O+”	蓝牙已连接

**指示灯**

搜索配对	红蓝灯交替闪烁
正在充电	红灯常亮
充满电量	蓝灯常亮

**AI智能语音控制** (手机需支持语音唤醒功能)

功能	操作	状态
语音控制	三击“O+”	蓝牙已连接

**说明** 在蓝牙连接状态中，三击“O+”，听到提示音后，就可以语音操控手机，节约操作手机的时间，快捷又智能。

例如您可以直接操控耳机问：  
现在几点钟.....今天天气.....  
导航去深圳世界之窗.....打电话给某某.....  
打开网易云音乐.....播放刘德华的冰雨.....下一曲.....音量降低.....  
打开美团.....打开喜马拉雅.....打开微信.....播放戏曲.....

**智能运动，轻松好玩**

**故障及排除**

**无法开机**  
确定耳机是否充满电量，按键是否误操作，同时充电激活。

**无法蓝牙连接**  
耳机指示灯是否处于红蓝交替闪阶段，如耳机处于蓝灯呼吸状，表示耳机与其他设备已经连接，需要断开当前连接设备。

**无法回连**  
确定前端（如手机蓝牙）是否正常开启。

**耳机音量较小**  
手机是否需加大音量，需要手机增加或减小音量。确认佩戴方式是否正确。

**产品参数**

型号：X3	版本：6.0
重量：≈27g	充电：≈2h
通话：-42dB	播放：≈8h&60%音量
距离：蓝牙10米	输入：5V/180mA
容量：220mAh	
协议：HFP A2DP AVRCP	

**注意事项**

**保养与清洁**：

- 耳机切不可浸入水中，否则极易因短路而损坏。
- 如何长时间不使用，请至少一个月充满一次电。
- 请不要私自拆装产品上任何部件，如发现产品有缺陷请立即停止使用，并联系销售方售后处理。
- 每次运动后请将耳机擦拭干净，特别是充电口位置，要及时处理干净，防止汗水，盐水腐蚀充电口，影响产品寿命。
- 产品远离火源、热源、冷冻源、化学品、严禁暴力撞击拆装挤压产品。
- 请使用输出5V1A及以内的充电头。

**产品保修卡**  
该卡为产品保修凭证，请妥善保管

产品名称：	产品型号：
购买日期：	客户名称：
联系方式：	

**产品维修记录**


日期	不良项	方案



**Bone conduction Bluetooth headphones**

Instructions for usage and warranty  
Operating instructions and Warranty description

**Schematic diagram**

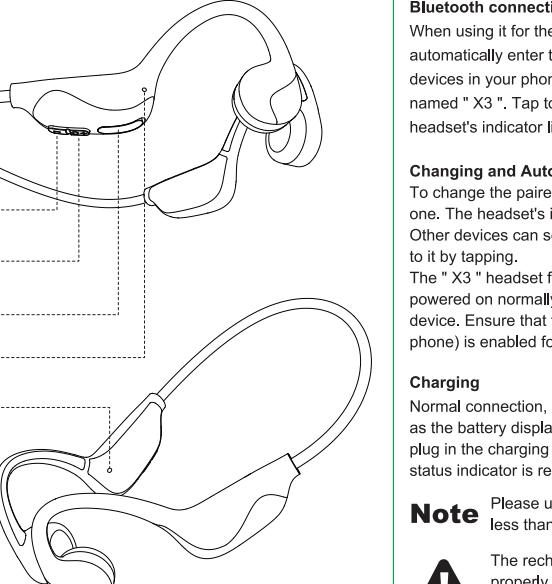

**Instructions**

**Bluetooth connection**  
When using it for the first time, turn on the headset. It will automatically enter the Bluetooth pairing state. Then, search for devices in your phone's Bluetooth settings, and you'll find the headset named "X3". Tap to connect. Once connected successfully, the headset's indicator light will turn off.

**Changing and Auto-reconnecting Bluetooth Pairing Devices**  
To change the paired Bluetooth device, first disconnect the current one. The headset's indicator will then flash red and blue alternately. Other devices can search for the headset named "X3" and connect to it by tapping.

The "X3" headset features an auto-reconnect function. When powered on normally, it will automatically connect to the last paired device. Ensure that the Bluetooth of the front-end device (e.g., mobile phone) is enabled for a successful reconnection.

**Charging**  
Normal connection, the phone will display the earphone battery, such as the battery display red, that is, the meter show the need to charge, plug in the charging line to charge, about 2 hours to fill, charging status indicator is red light, full charge often blue light.

**Note** Please use a USB power adapter with an output of 5V less than 1A.

**!** The rechargeable battery of this product must be properly disposed of for recycling. Please do not place the battery in a fire to avoid explosion.

**Operating instruction**

Function	Operation	Status
Power on	Press 'O+' for 3-5s	The blue light stays on for 1s. The red light stays on for 1s.
Power off		
Volume +	Click 'O+'	Bluetooth is connected
Volume -	Click ' - '	
Next song	Press 'O+' for 1s	Music playing
Previous song	Press ' - ' for 1s	
Pause		Music pause
Resume	Double click 'O+'	
Hang up		Phone calls in
Answer the call	Click 'O+'	
Decline the call	Press 'O+' for 2s	
Switch between Phone/Headset earpieces	Press 'O+' for 1s	On the phone
Turn Off/On headset mic for calls	3-click ' - '	
Switch between Game/Music mode	4-click 'O+'	Bluetooth is connected

**Indicator**

Search for a match	Red and blue lights flash alternately
Charging	Normally on red light
Finished charging	Normally on blue light

**AI intelligent voice control** (Phone needs to support voice wake-up function)

Function	Operation	Status
Voice control	3-click 'O+'	Bluetooth is connected

When the Bluetooth is already connected, triple-click the 'O+' button. After hearing the prompt tone, you can activate the function of voice-controlling the mobile phone. This operation can not only significantly save the operation time but also make the process of using the mobile phone more convenient and intelligent.

For example: You can directly control the earphone and ask: What time is it now.....Today's weather.....Navigate to Taipei 101.....Call someone .....

**Smart exercise, easy and full of fun**

**Troubleshooting**

**Unable to boot**  
Determine whether the headset is fully charged, whether the button is misoperated, and then charge and activate.

**Unable to connect to Bluetooth**  
Whether the headphone indicator is in the alternately flashing stage of red and blue, such as the headphone is in the breathing state of blue light, Indicates that the headset has been connected to other devices and needs to disconnect the current connected device.

**Can't back to even**  
Make sure the front end (e.g., Bluetooth) is open properly.

**Headphone volume is low**  
Whether the phone increases the volume, the phone needs to increase or decrease the volume. Wearing a way Whether it is right.

**Product parameter**

Model: X3	Version: 6.0
weight: ≈27g	Battery: 220mAh
Input: 5V/180mA	Charging time: ≈2h
Call parameters: -42dB	
Distance: Bluetooth 10 meter	
Operating time : ≈8h@60% Volume	
Profile: HFP A2DP AVRCP	

**Care and cleaning**

- The product cannot be soaked in water, otherwise it will short-circuit and burn out.
- If not used for a long time, please fully charge it at least once a month.
- Do not disassemble any part of the product without permission. If you find that the earphone is defective, please stop using it.
- Keep the product away from fire, heat, freezing, and chemicals. Do not immerse the earphone in water, and do not wipe it with chemicals such as aromatherapy water.
- Store in a cool, dry place. Do not expose the product to direct sunlight for a long time.
- Please use a USB power adapter with an output of 5V less than 1A.

**Product warranty card**  
This card is a product warranty certificate, please keep it properly.

Product name:	Product model:
Purchase date:	Client name:
Contact:	

**Product maintenance records**

Date	Bad phenomenon	Solution

95mm

70mm

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radiation Exposure statement

The device has been evaluatec to mee general RF exposure requirement. The device can be used in portable exposure condition without restriction.