




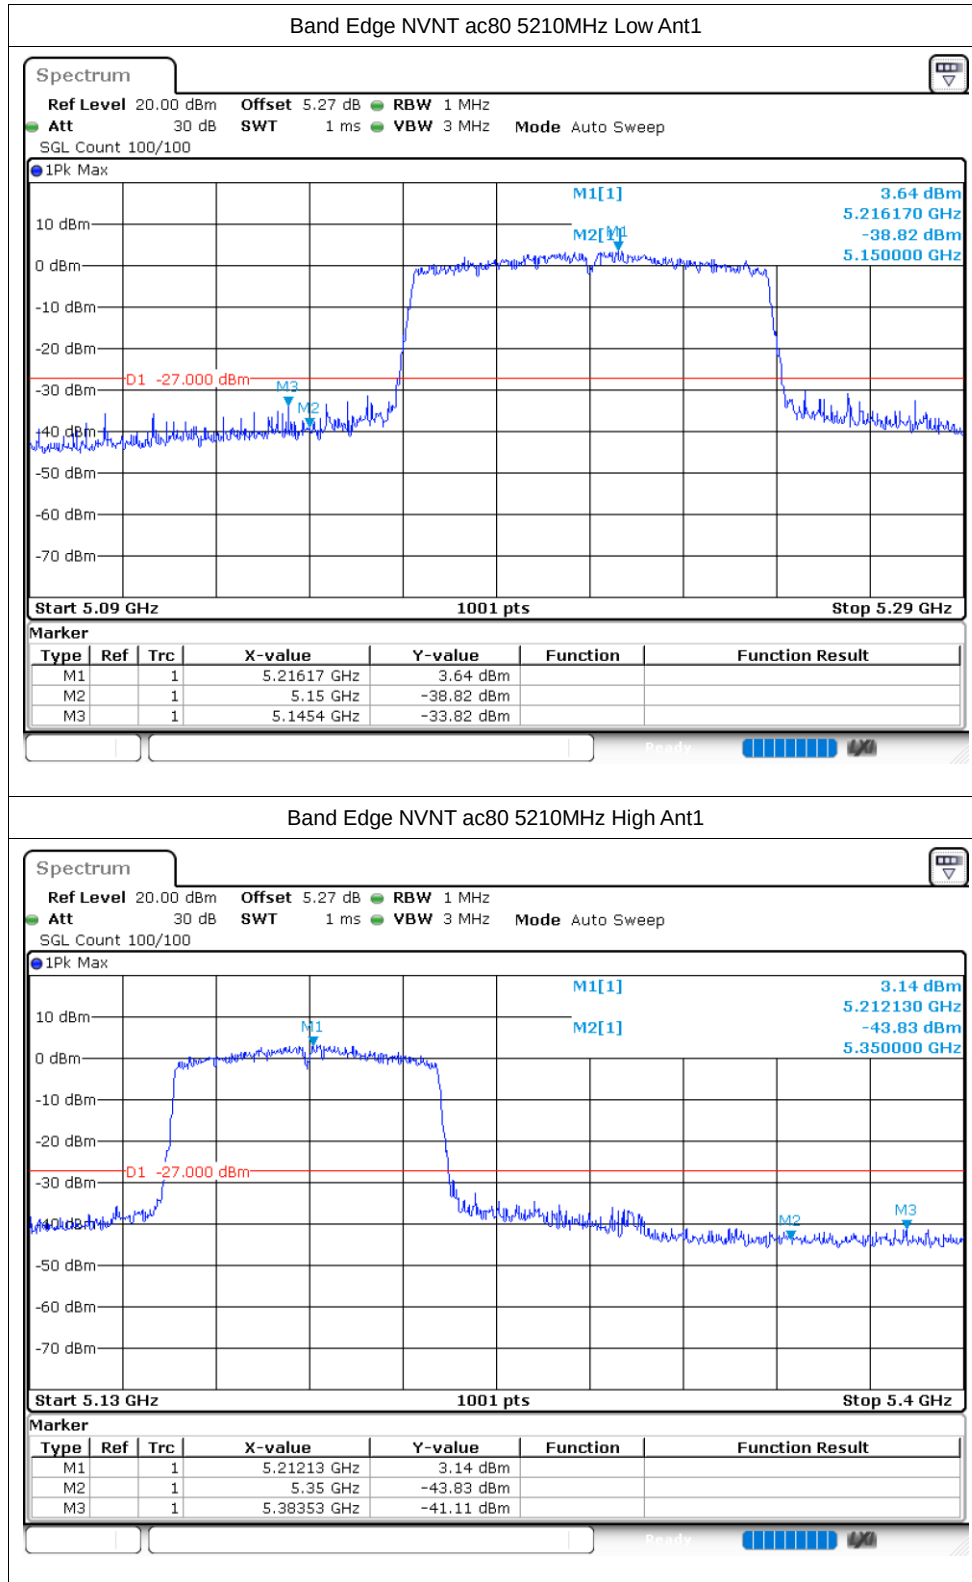



Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-32.84	-27	Pass
NVNT	a	5200	Ant1	-32.66	-27	Pass
NVNT	a	5240	Ant1	-32.86	-27	Pass
NVNT	n20	5180	Ant1	-33	-27	Pass
NVNT	n20	5200	Ant1	-33.23	-27	Pass
NVNT	n20	5240	Ant1	-33.69	-27	Pass
NVNT	n40	5190	Ant1	-33.47	-27	Pass
NVNT	n40	5230	Ant1	-32.93	-27	Pass
NVNT	ac20	5180	Ant1	-32.73	-27	Pass
NVNT	ac20	5200	Ant1	-33.2	-27	Pass
NVNT	ac20	5240	Ant1	-33.14	-27	Pass
NVNT	ac40	5190	Ant1	-33.03	-27	Pass
NVNT	ac40	5230	Ant1	-33.9	-27	Pass
NVNT	ac80	5210	Ant1	-33.26	-27	Pass

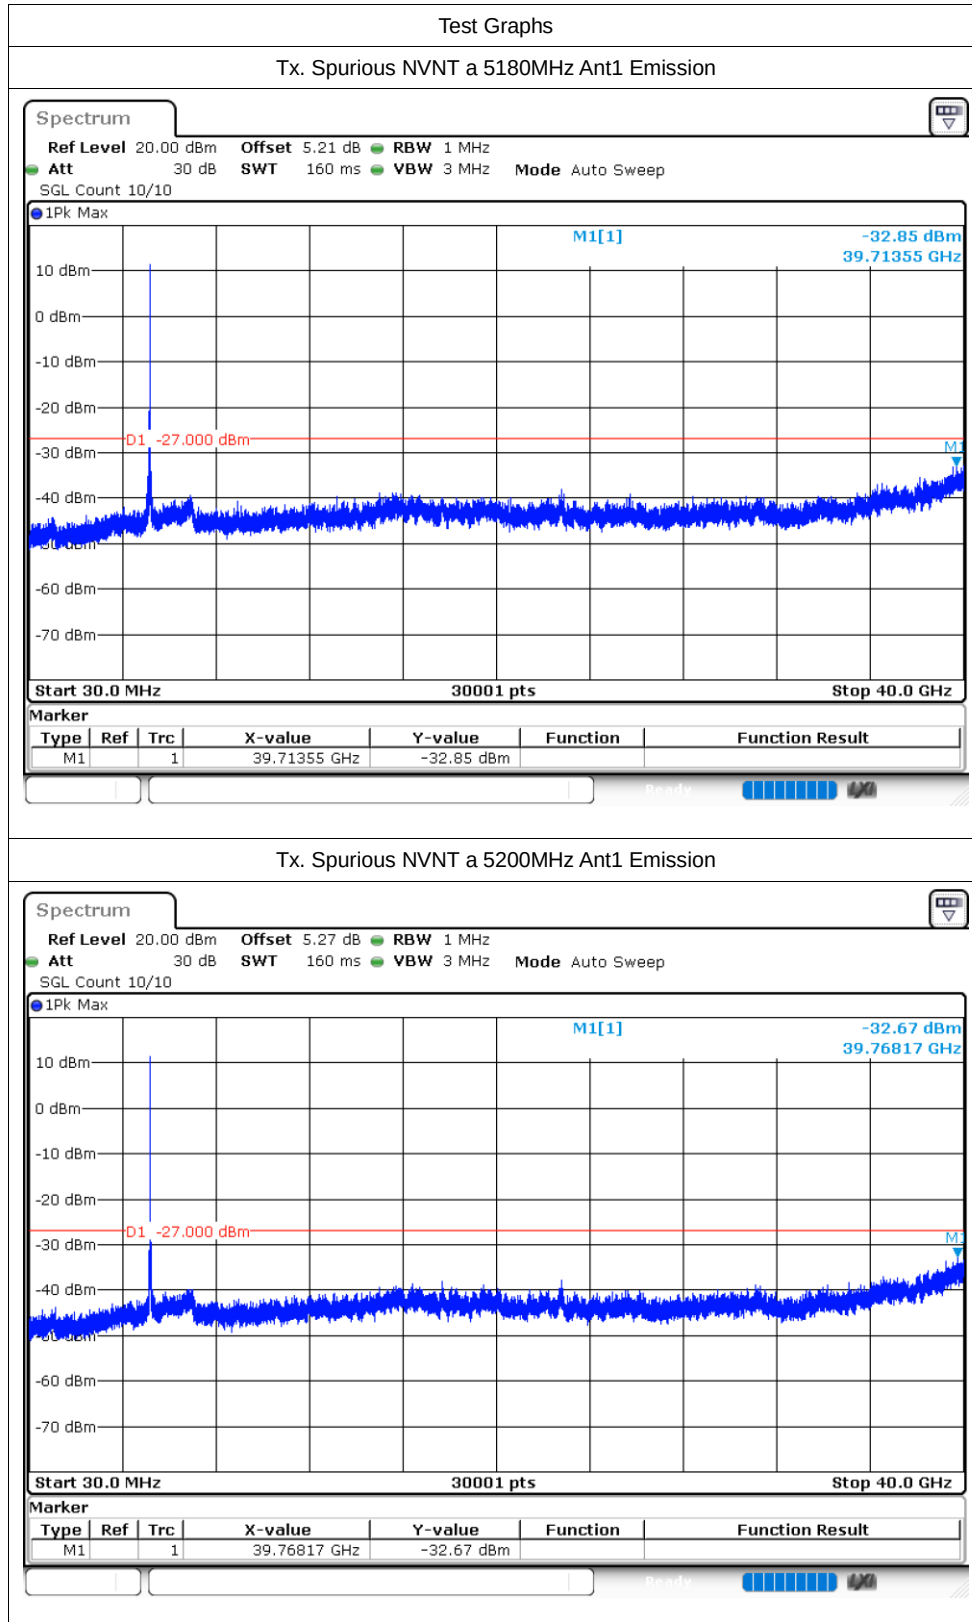


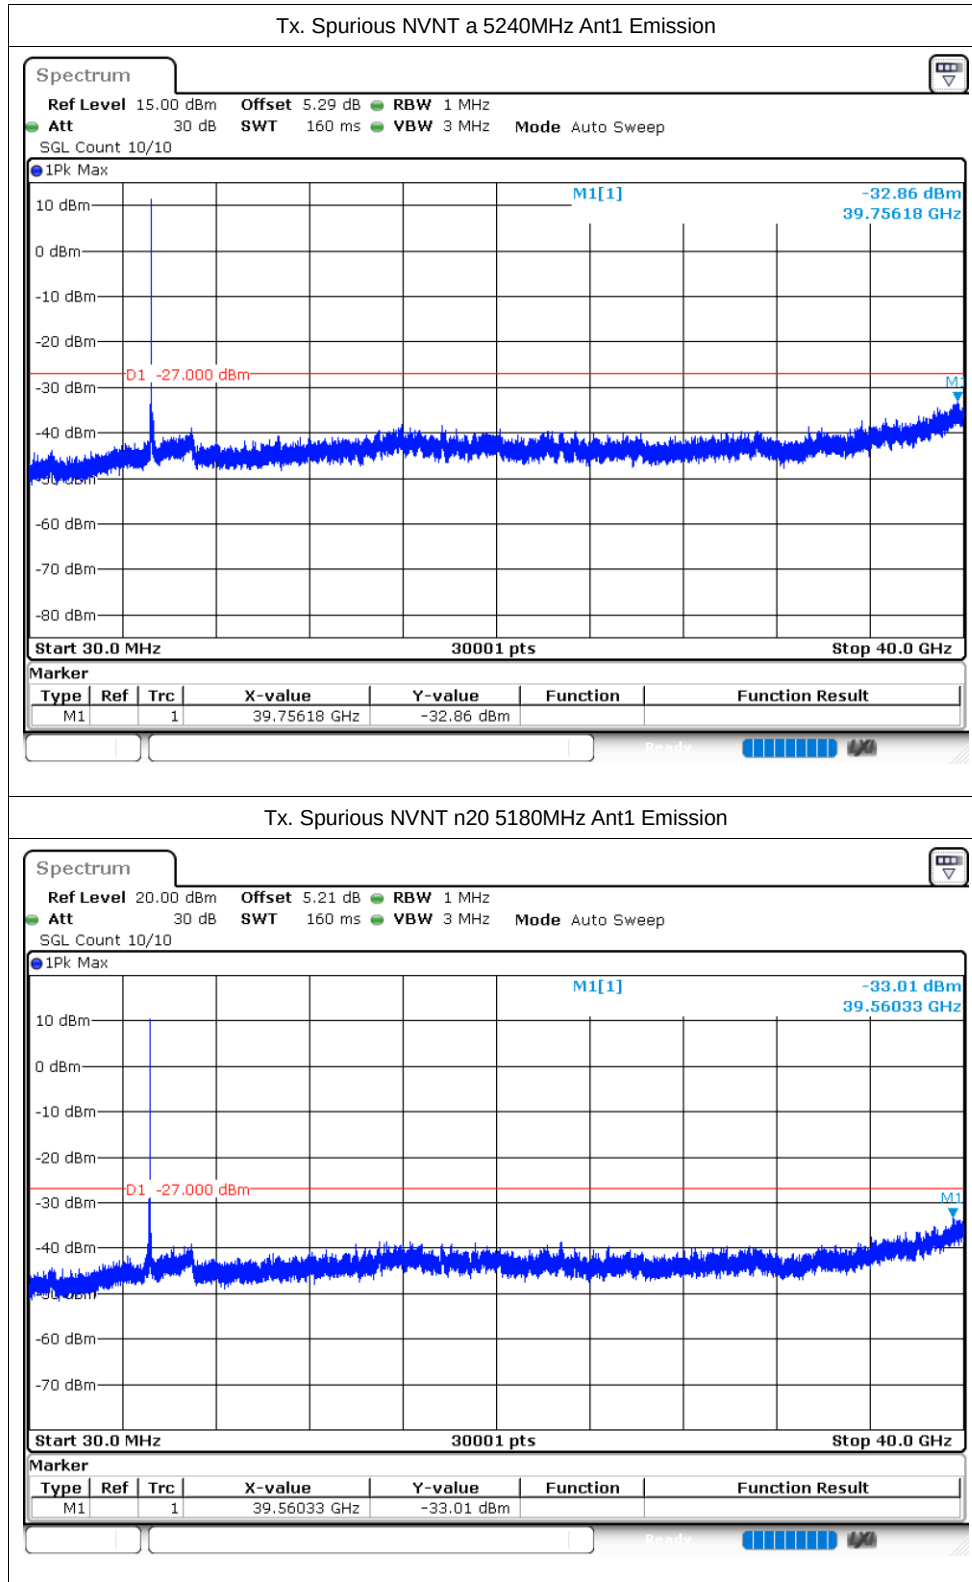


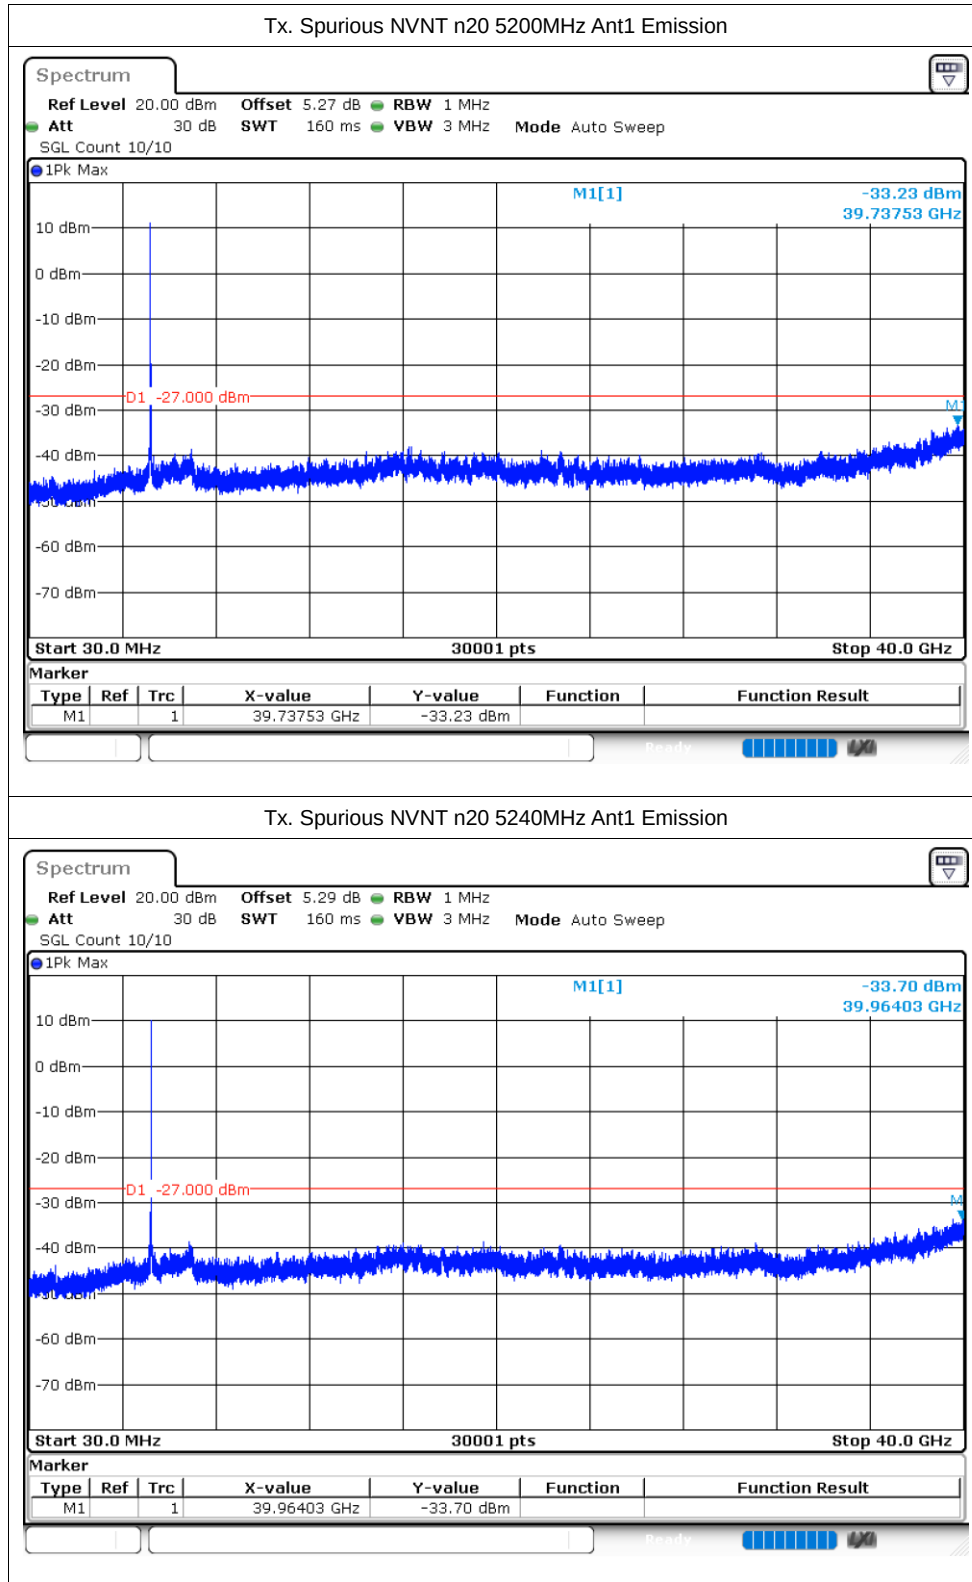

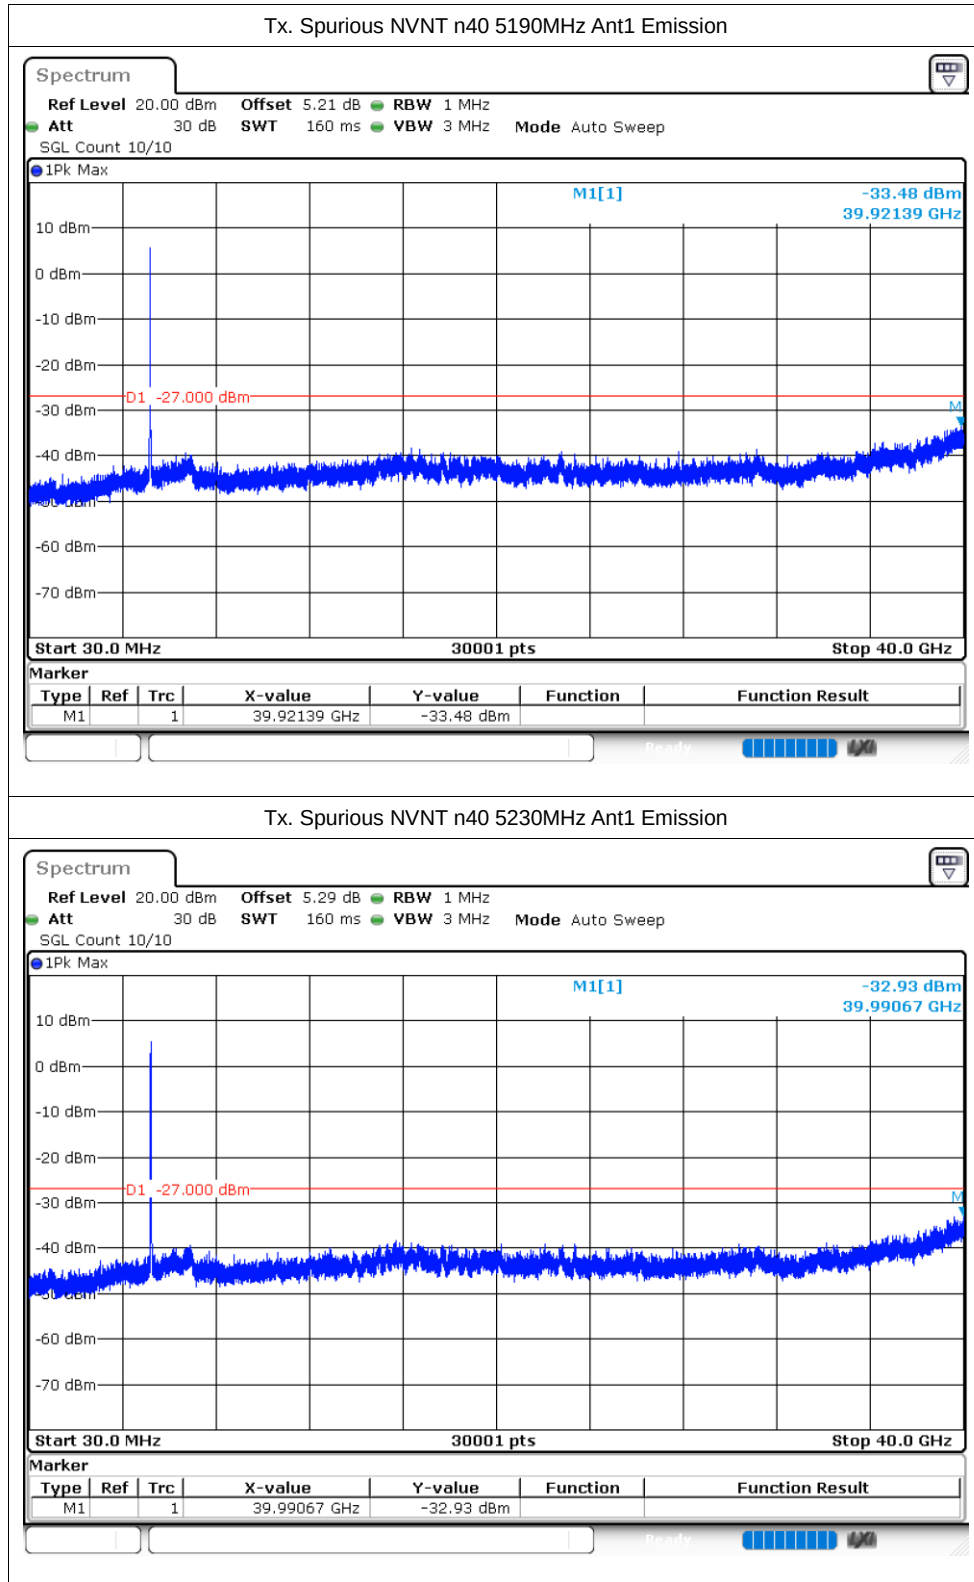

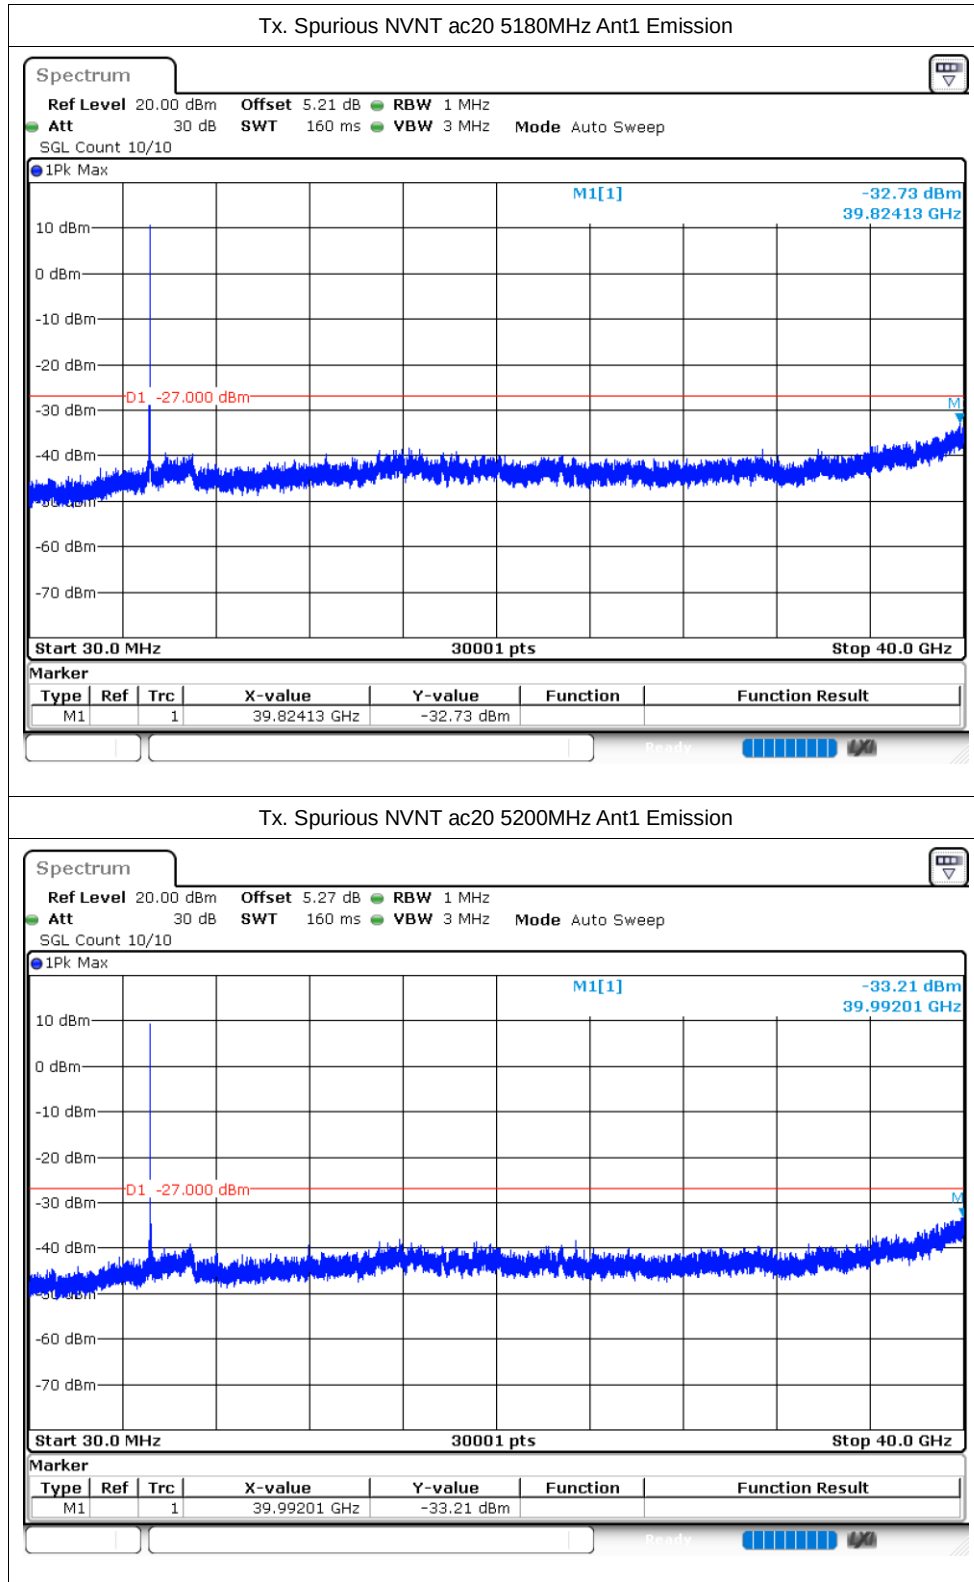

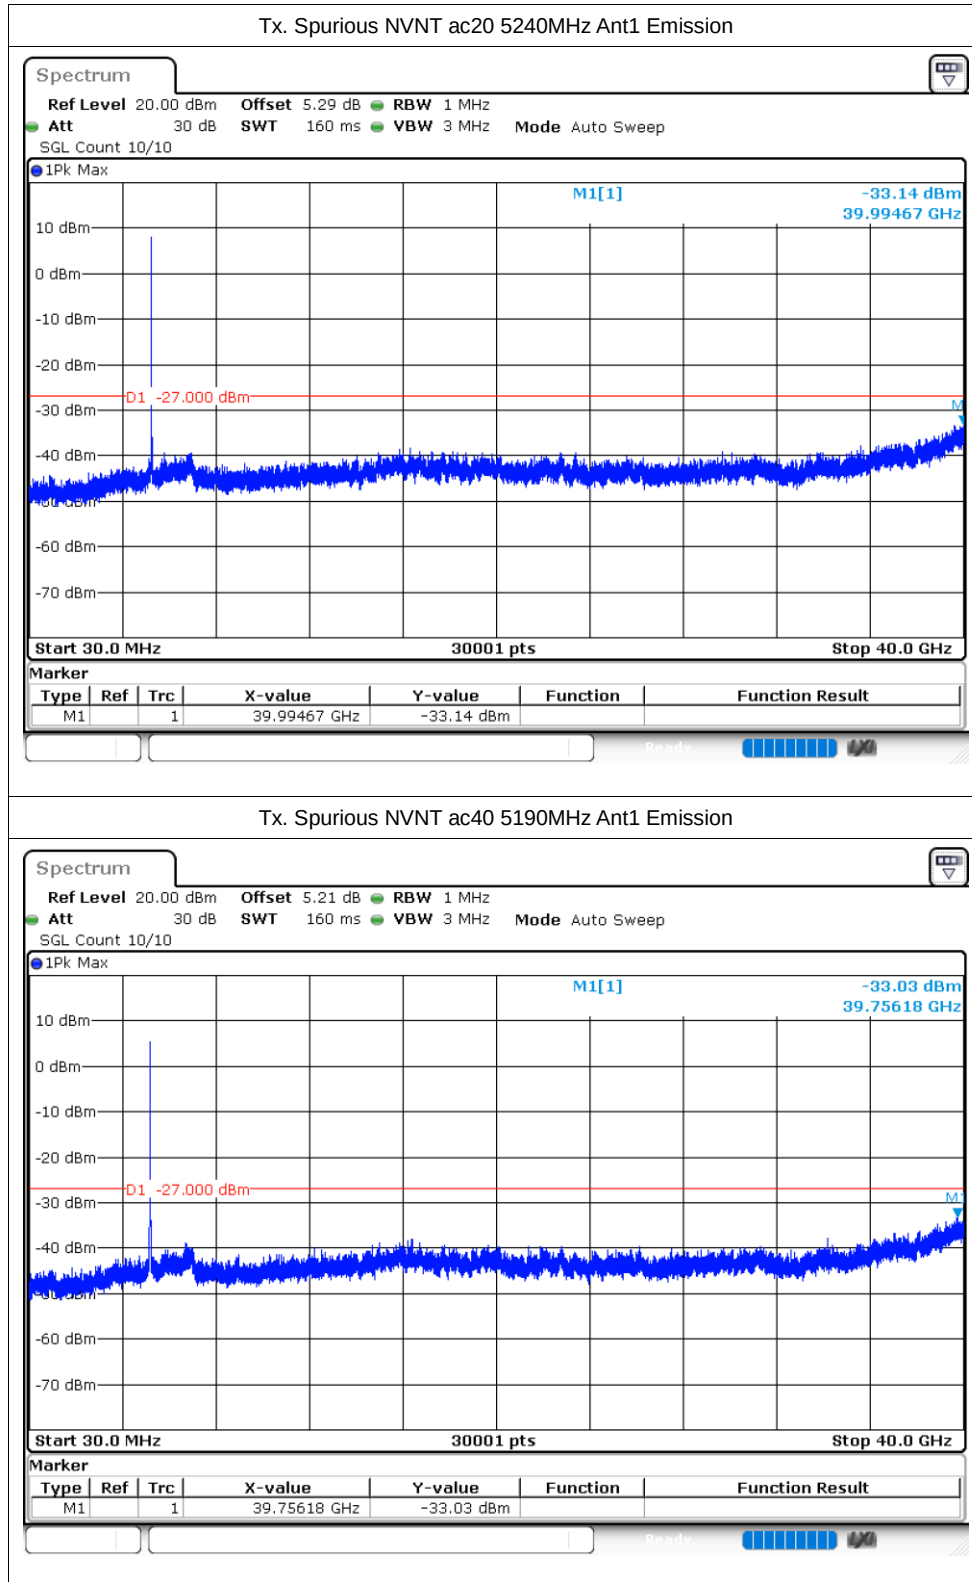

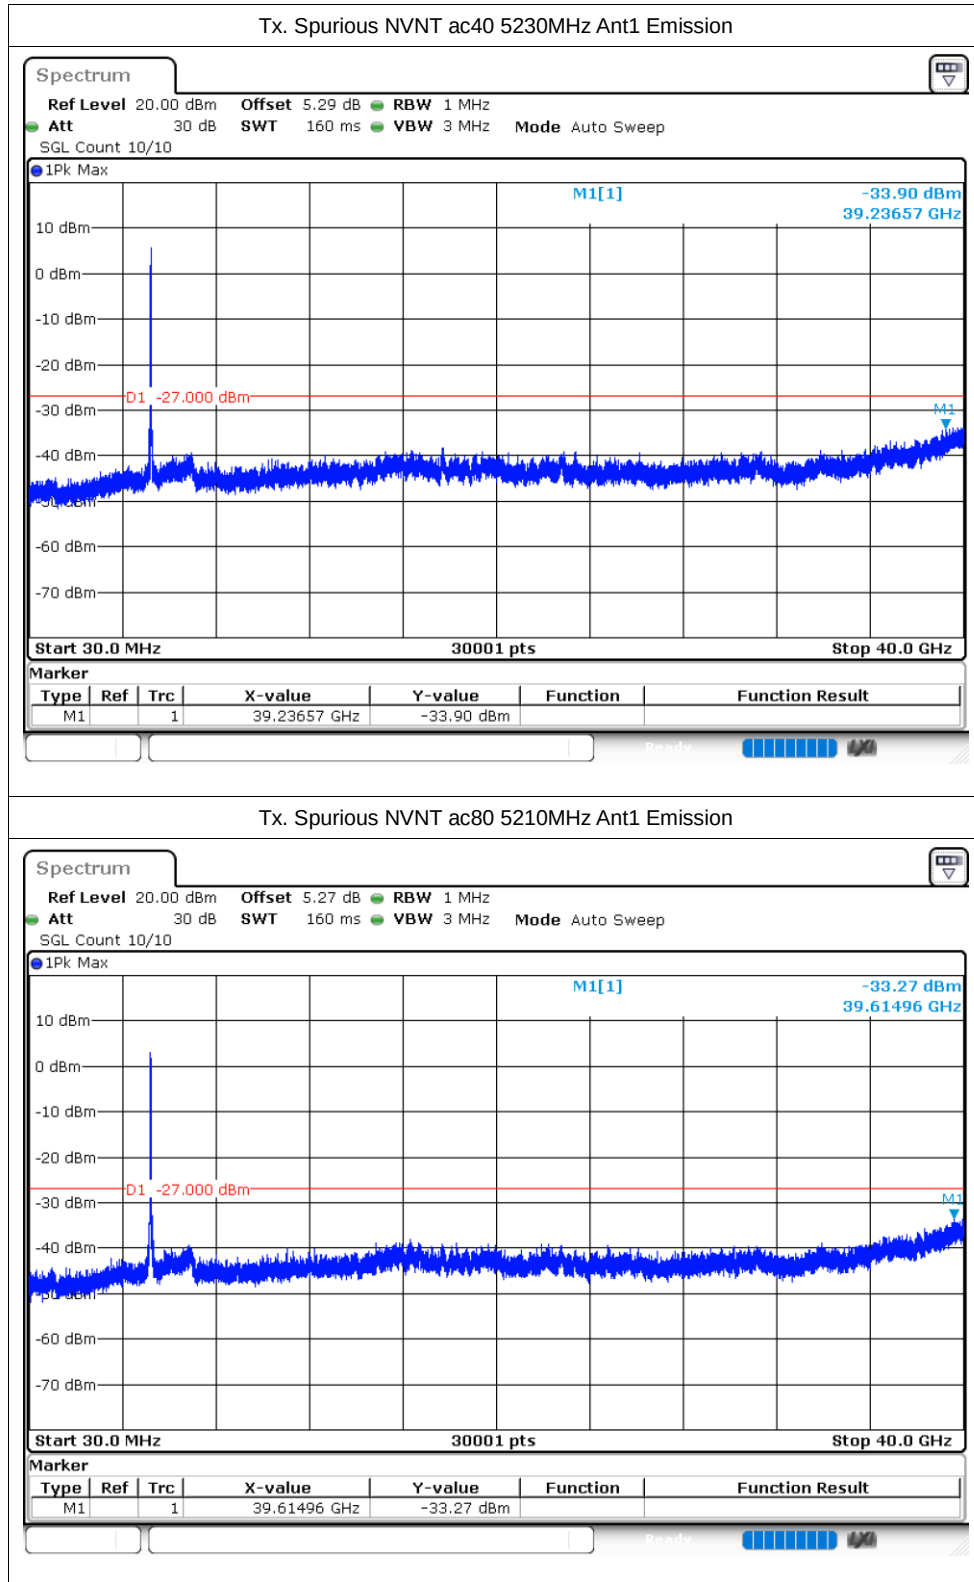


5.8G:

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	97.57	0.11	0.72
NVNT	a	5785	Ant1	97.63	0.1	0.72
NVNT	a	5825	Ant1	98.96	0.05	0.71
NVNT	n20	5745	Ant1	97.41	0.11	0.77
NVNT	n20	5785	Ant1	97.44	0.11	0.77
NVNT	n20	5825	Ant1	98.9	0.05	0.25
NVNT	n40	5755	Ant1	97.24	0.12	1.54
NVNT	n40	5795	Ant1	97.55	0.11	1.54
NVNT	ac20	5745	Ant1	97.47	0.11	0.76
NVNT	ac20	5785	Ant1	97.43	0.11	0.76
NVNT	ac20	5825	Ant1	97.44	0.11	0.76
NVNT	ac40	5755	Ant1	95.1	0.22	1.54
NVNT	ac40	5795	Ant1	95.13	0.22	1.54
NVNT	ac80	5775	Ant1	90.64	0.43	3.03


Test Graphs


Duty Cycle NVNT a 5745MHz Ant1

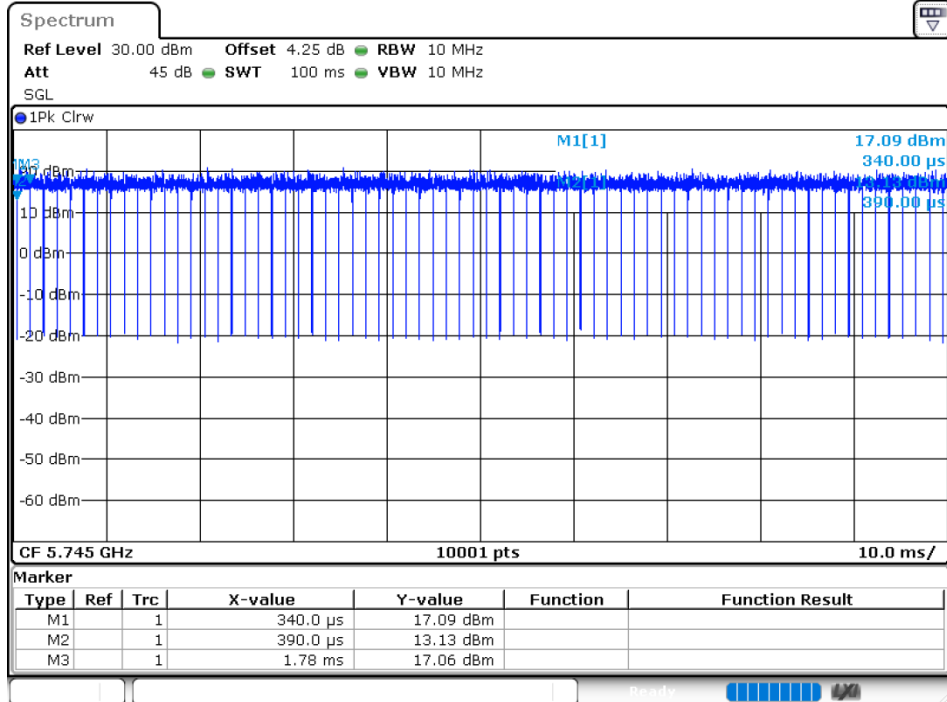



Duty Cycle NVNT a 5785MHz Ant1

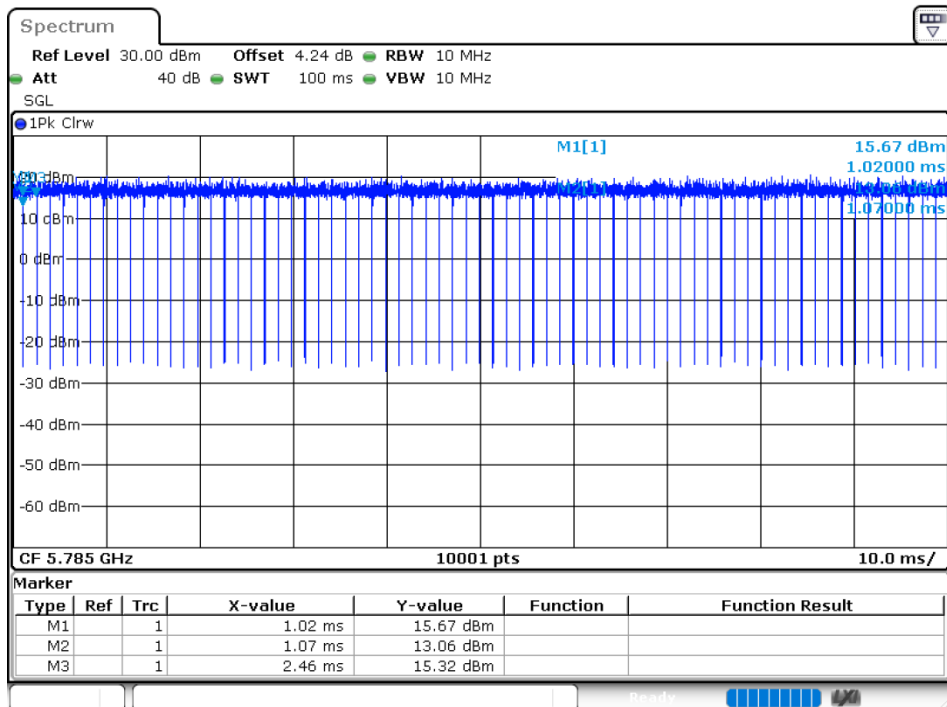


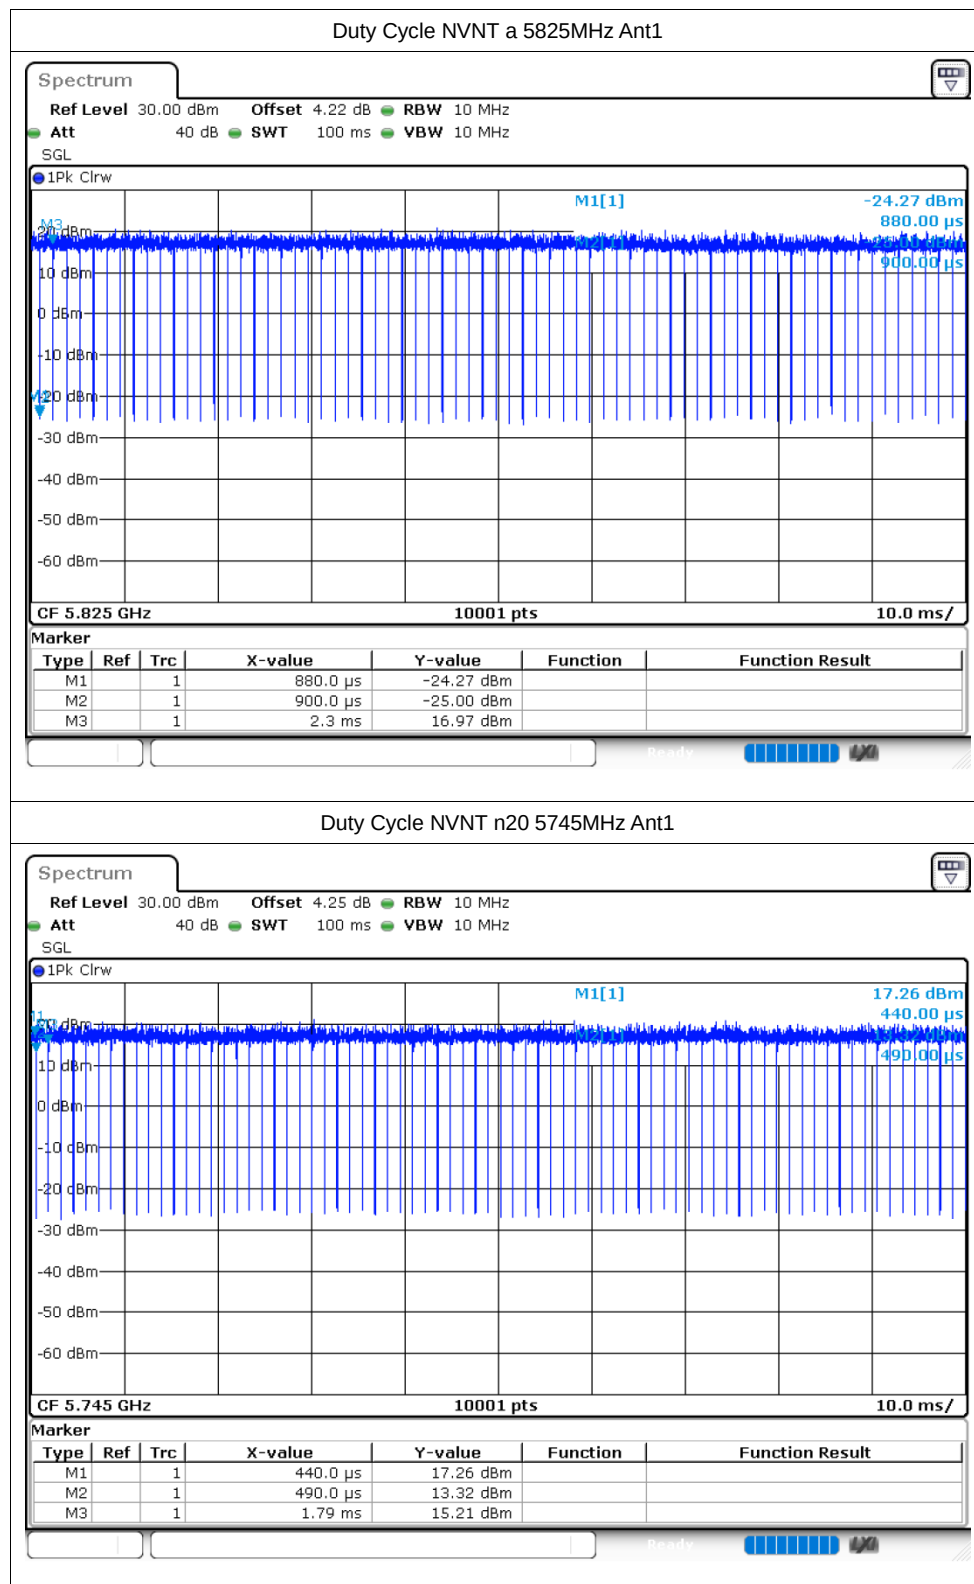


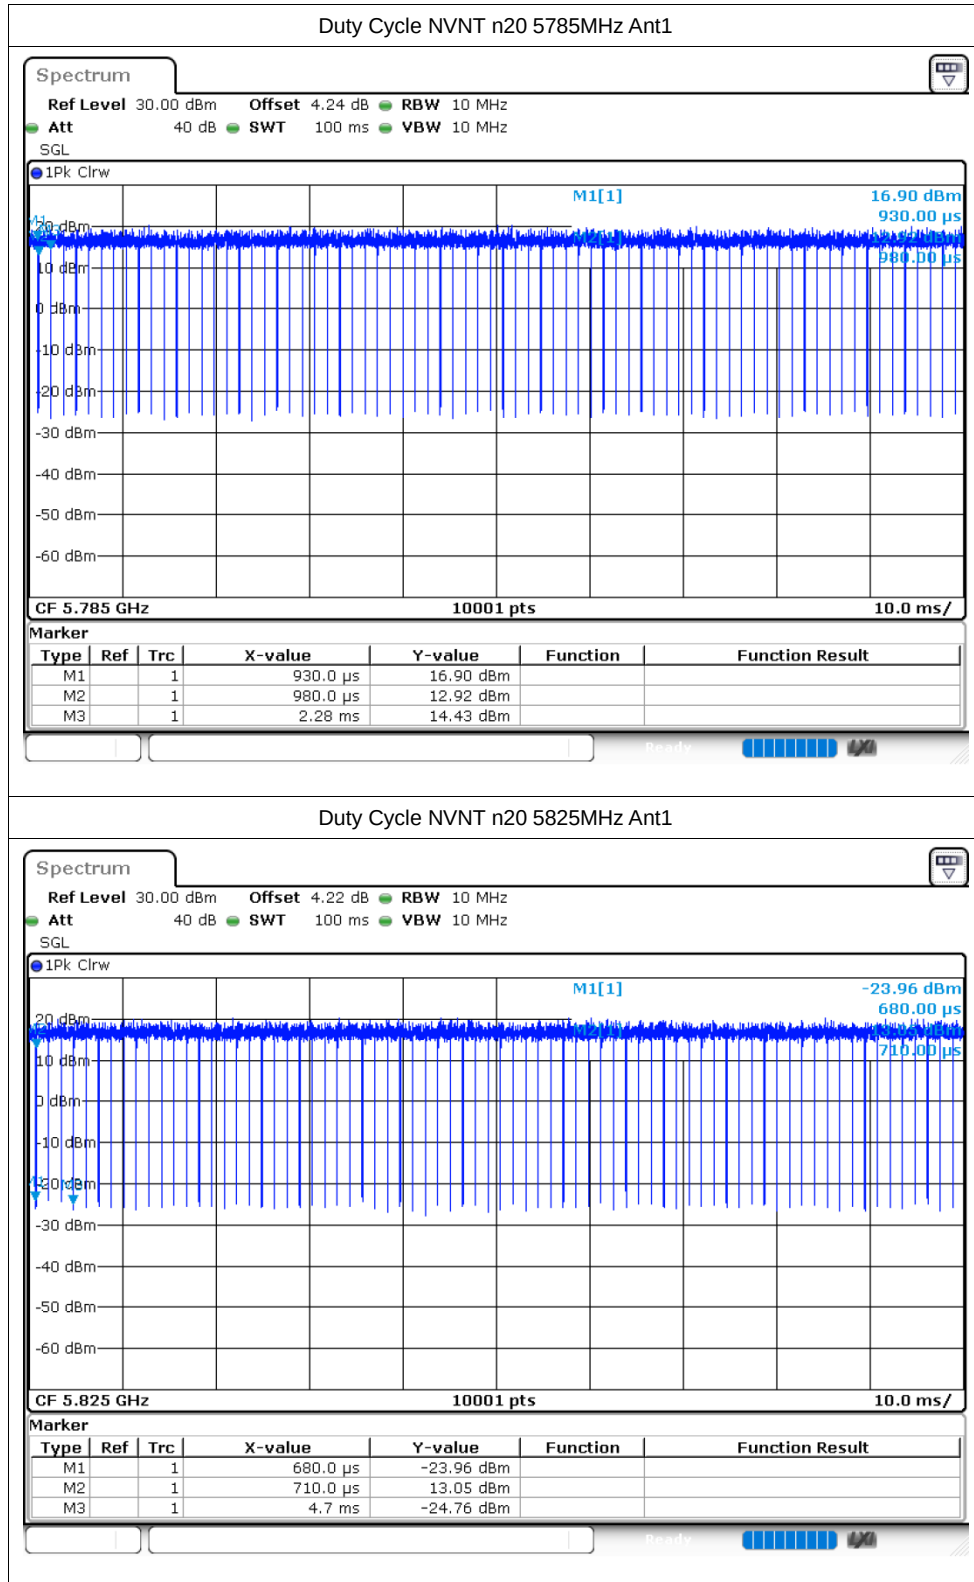

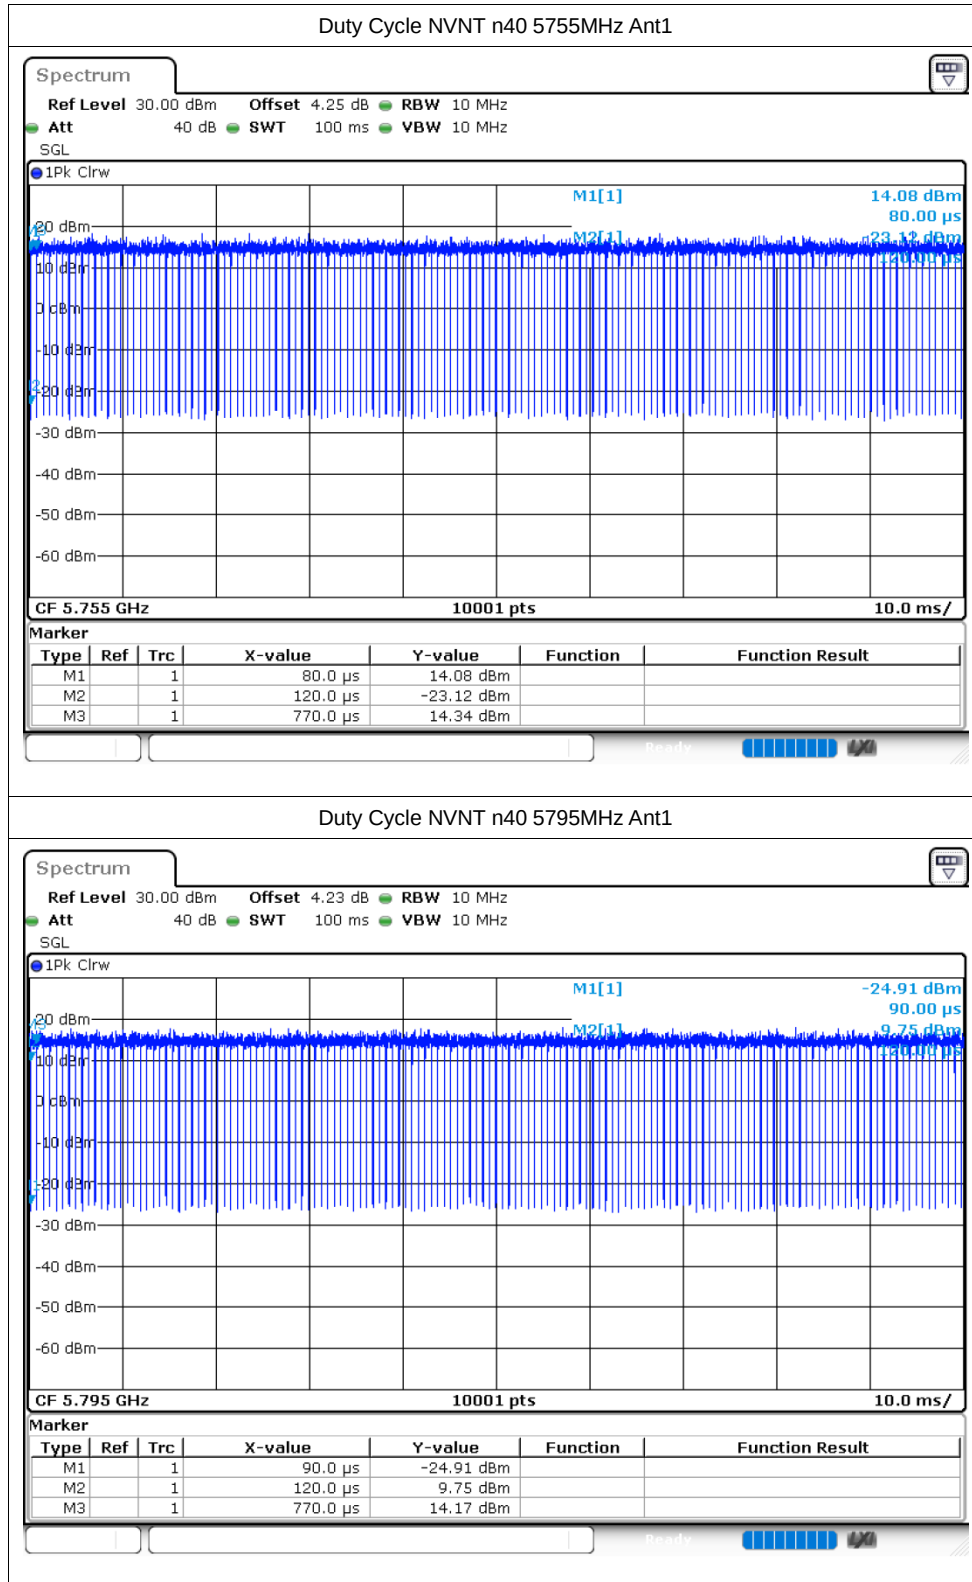

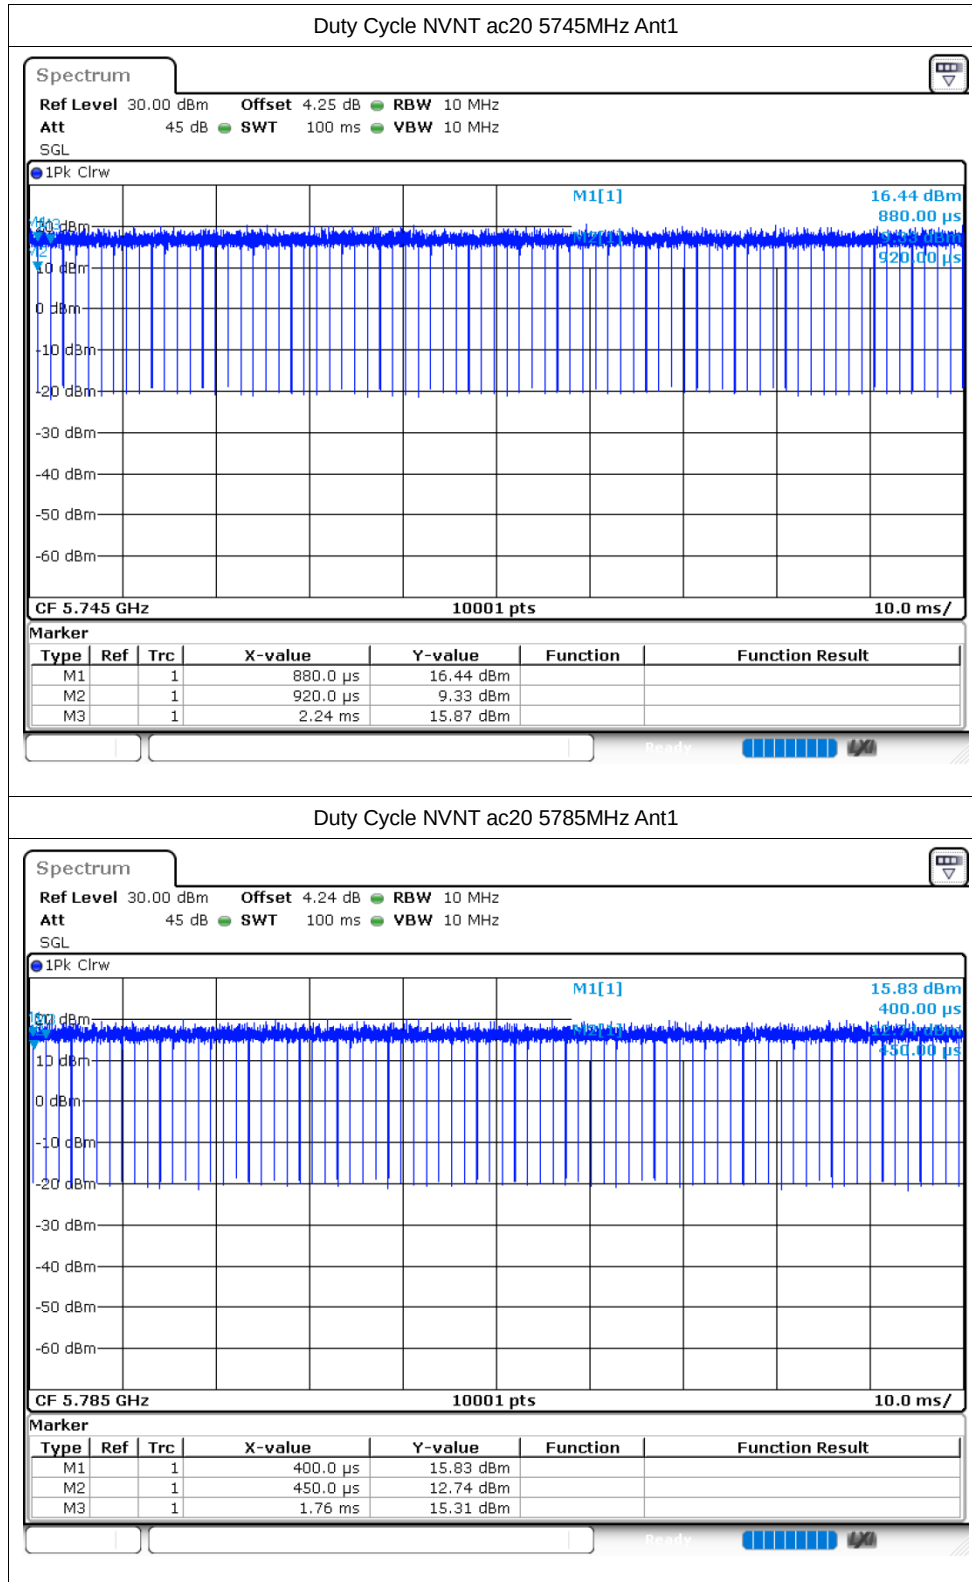

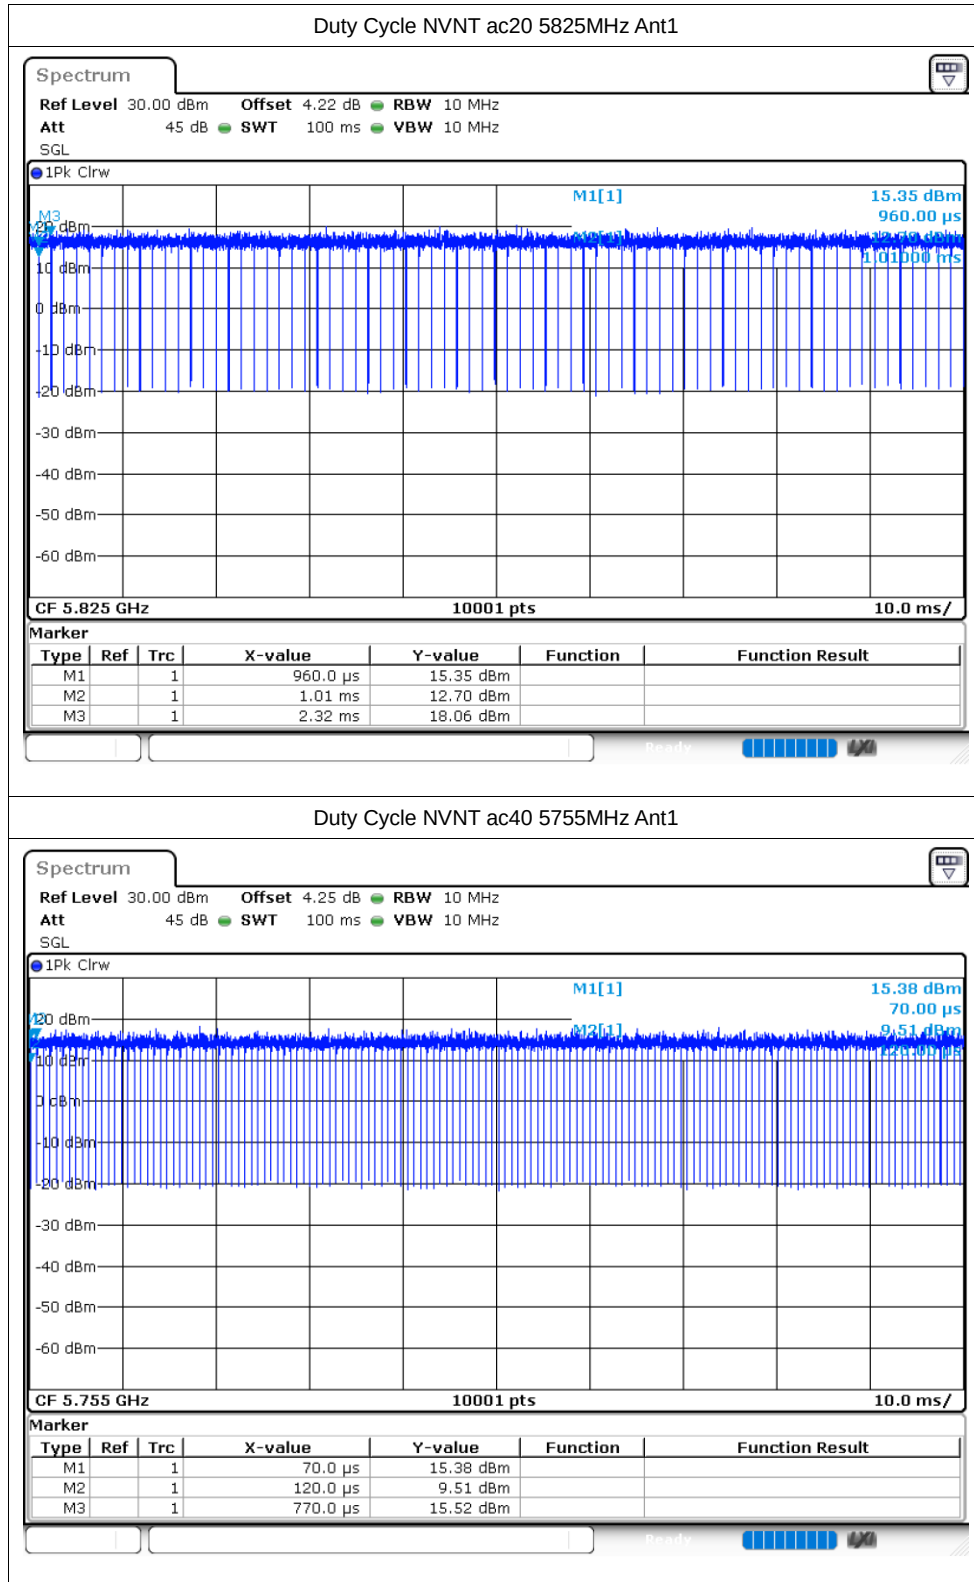

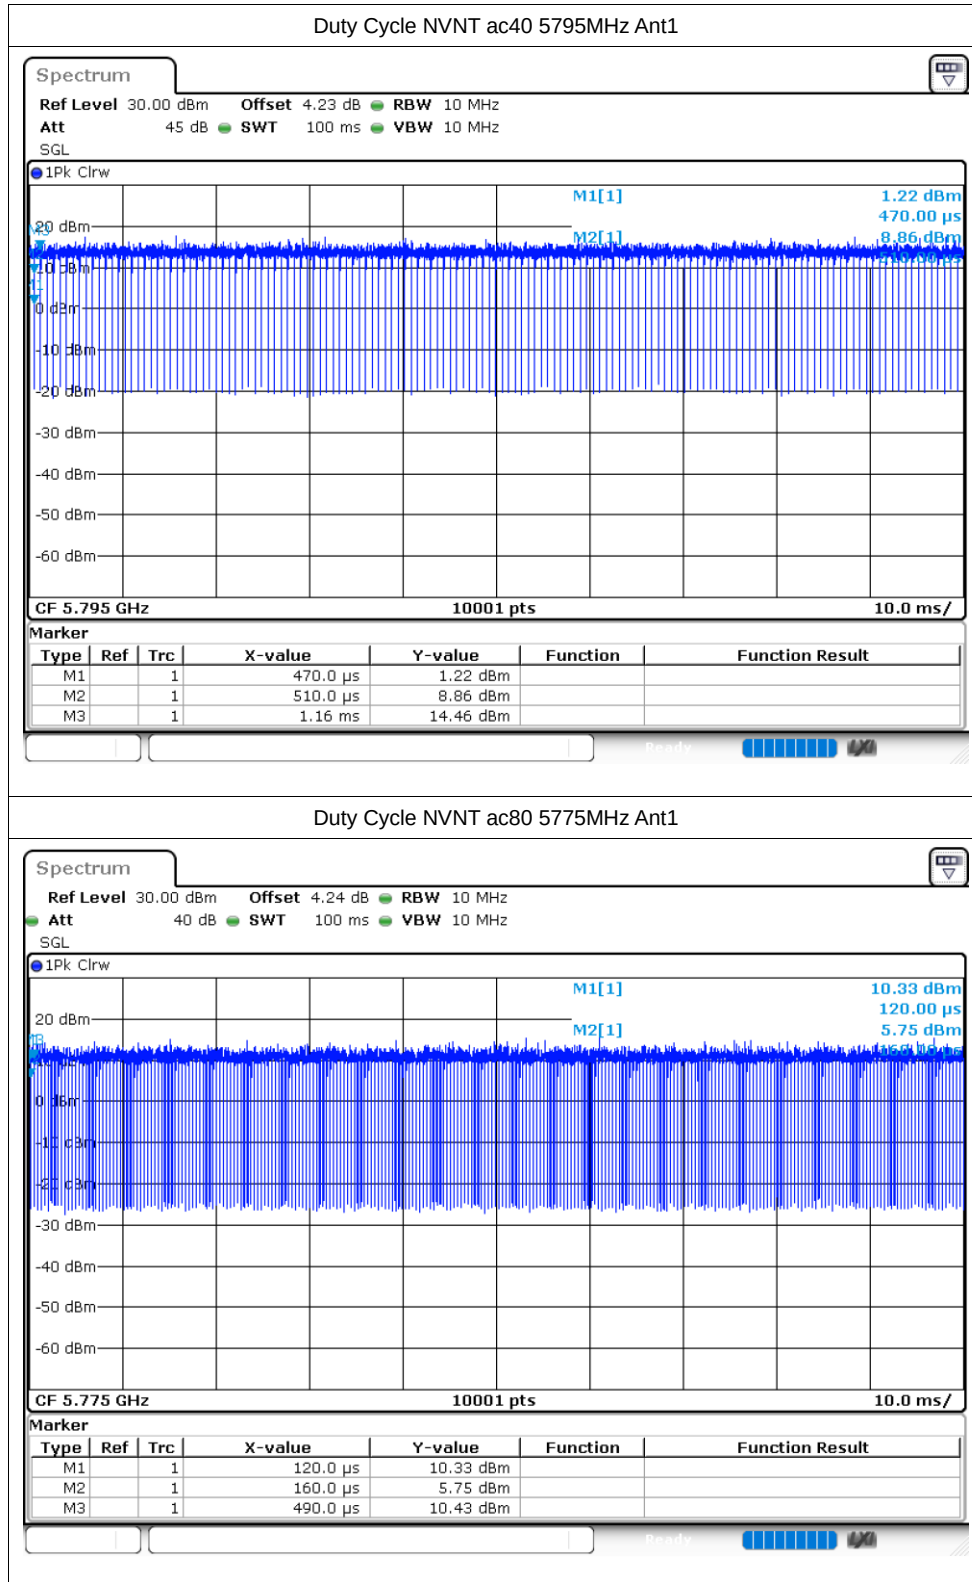

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.09	30	Pass
NVNT	a	5785	Ant1	12.09	30	Pass
NVNT	a	5825	Ant1	12.36	30	Pass
NVNT	n20	5745	Ant1	11.81	30	Pass
NVNT	n20	5785	Ant1	12.17	30	Pass
NVNT	n20	5825	Ant1	12.24	30	Pass
NVNT	n40	5755	Ant1	11.93	30	Pass
NVNT	n40	5795	Ant1	12.25	30	Pass
NVNT	ac20	5745	Ant1	11.87	30	Pass
NVNT	ac20	5785	Ant1	12.23	30	Pass
NVNT	ac20	5825	Ant1	12.18	30	Pass
NVNT	ac40	5755	Ant1	11.78	30	Pass
NVNT	ac40	5795	Ant1	12.18	30	Pass
NVNT	ac80	5775	Ant1	12.03	30	Pass

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	15.057	0.5	Pass
NVNT	a	5785	Ant1	15.894	0.5	Pass
NVNT	a	5825	Ant1	14.025	0.5	Pass
NVNT	n20	5745	Ant1	17.55	0.5	Pass
NVNT	n20	5785	Ant1	12.957	0.5	Pass
NVNT	n20	5825	Ant1	12.843	0.5	Pass
NVNT	n40	5755	Ant1	25.95	0.5	Pass
NVNT	n40	5795	Ant1	33.774	0.5	Pass
NVNT	ac20	5745	Ant1	15.012	0.5	Pass
NVNT	ac20	5785	Ant1	17.544	0.5	Pass
NVNT	ac20	5825	Ant1	13.317	0.5	Pass
NVNT	ac40	5755	Ant1	35.076	0.5	Pass
NVNT	ac40	5795	Ant1	35.046	0.5	Pass
NVNT	ac80	5775	Ant1	72.624	0.5	Pass


Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant1

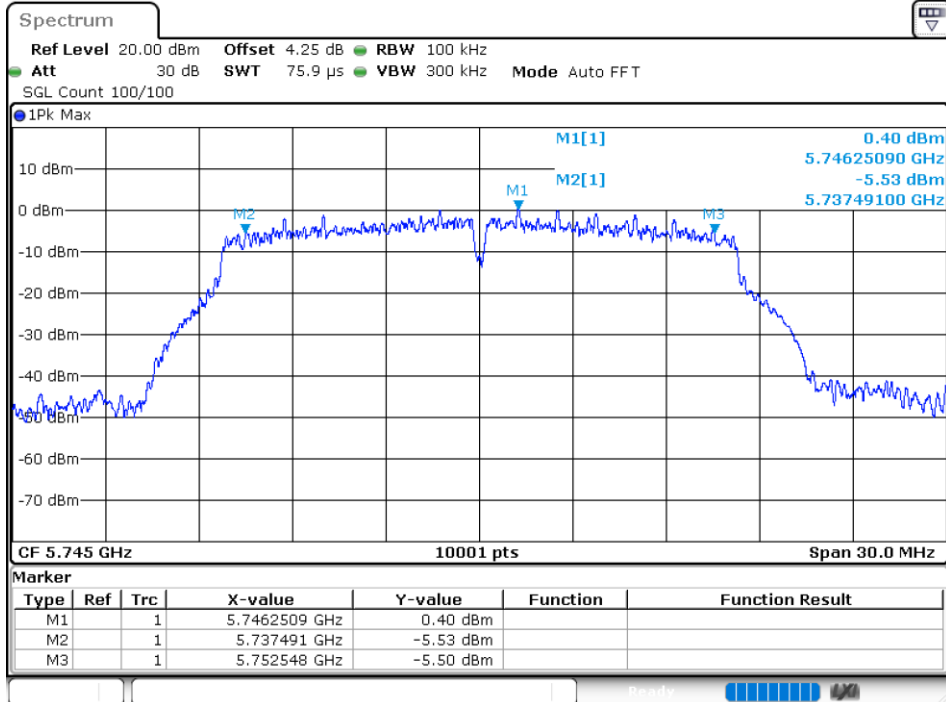



-6dB Bandwidth NVNT a 5785MHz Ant1

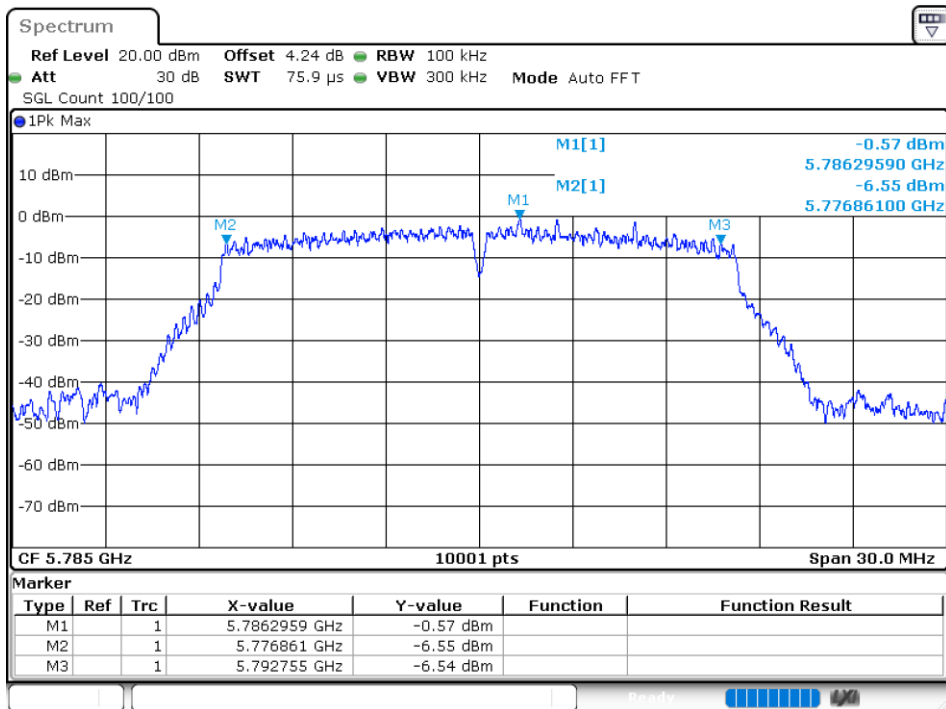


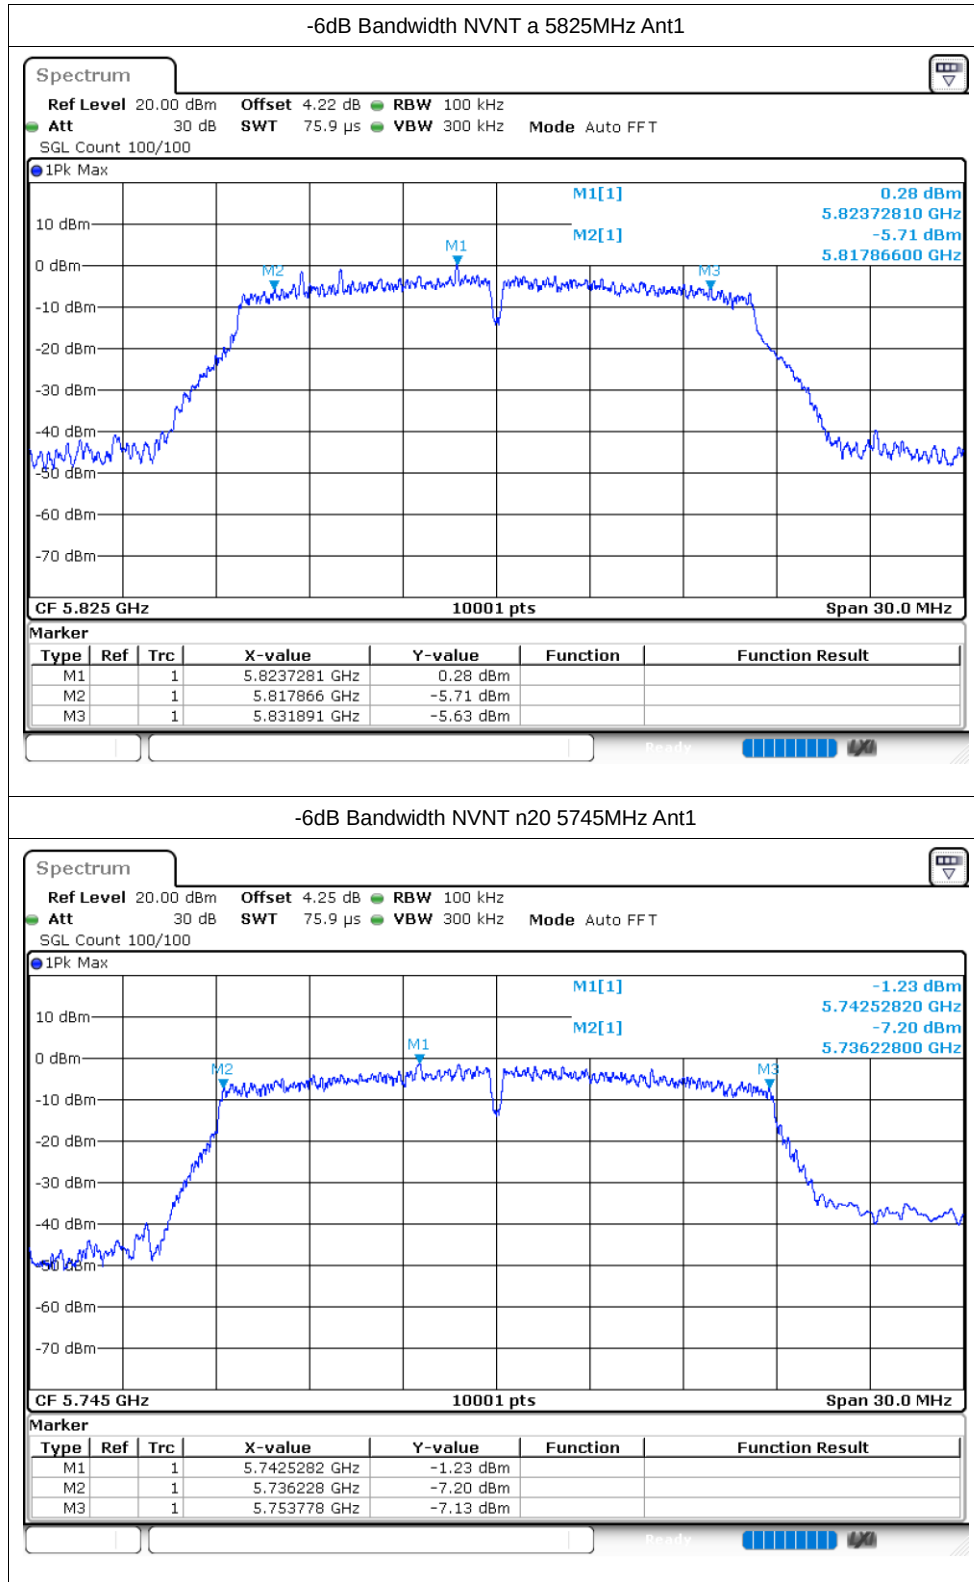


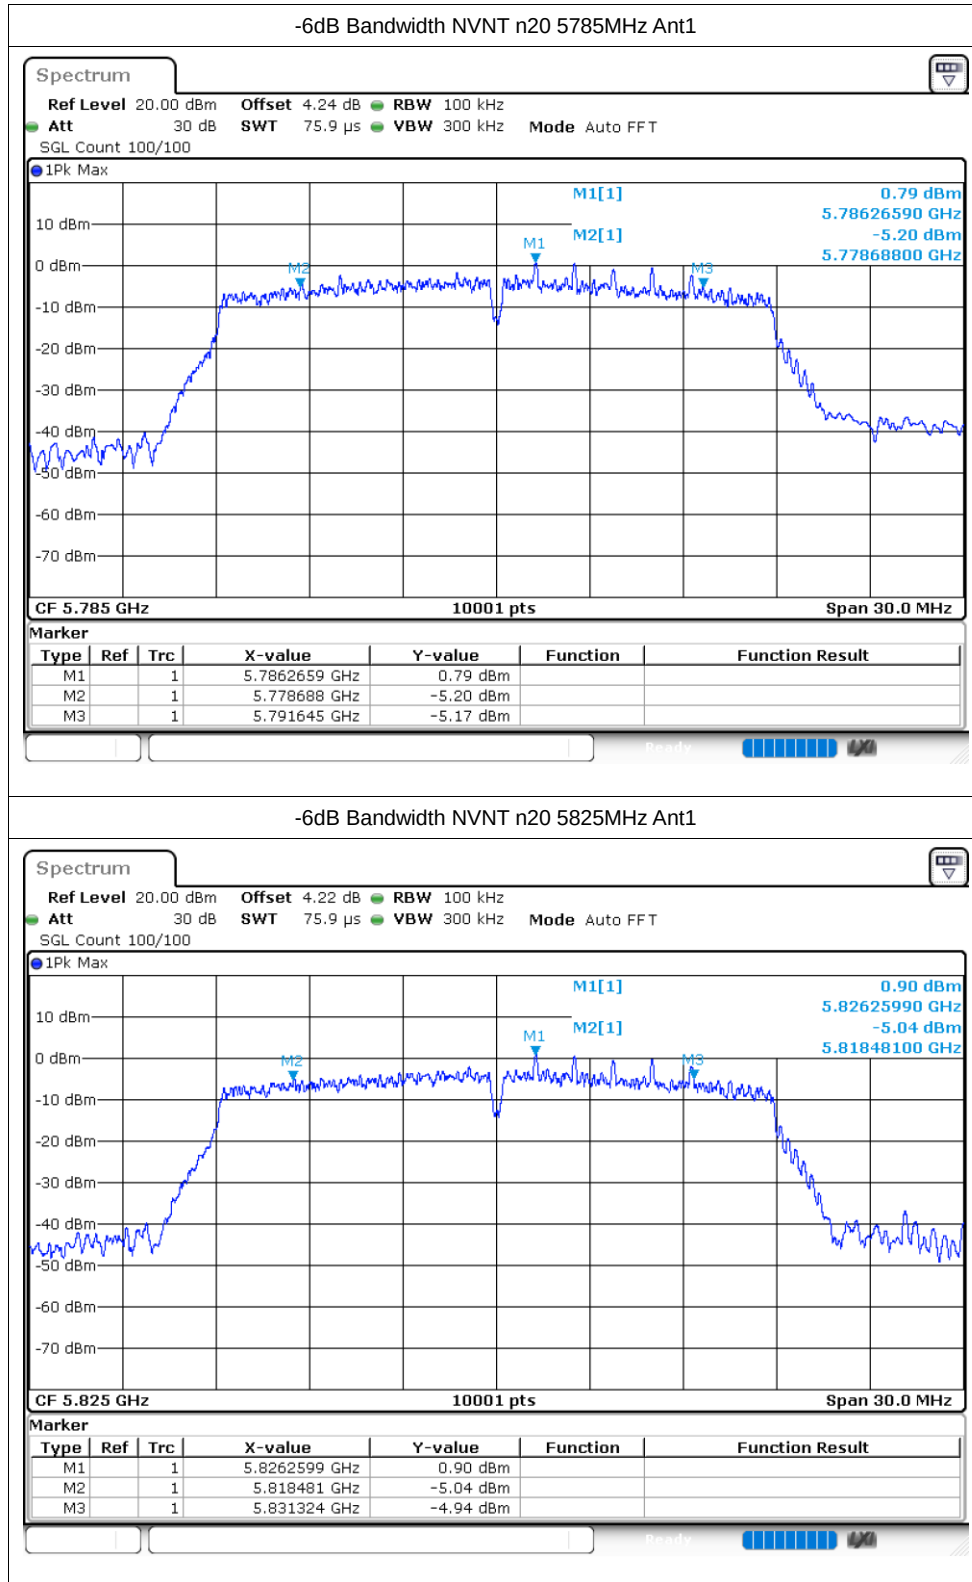

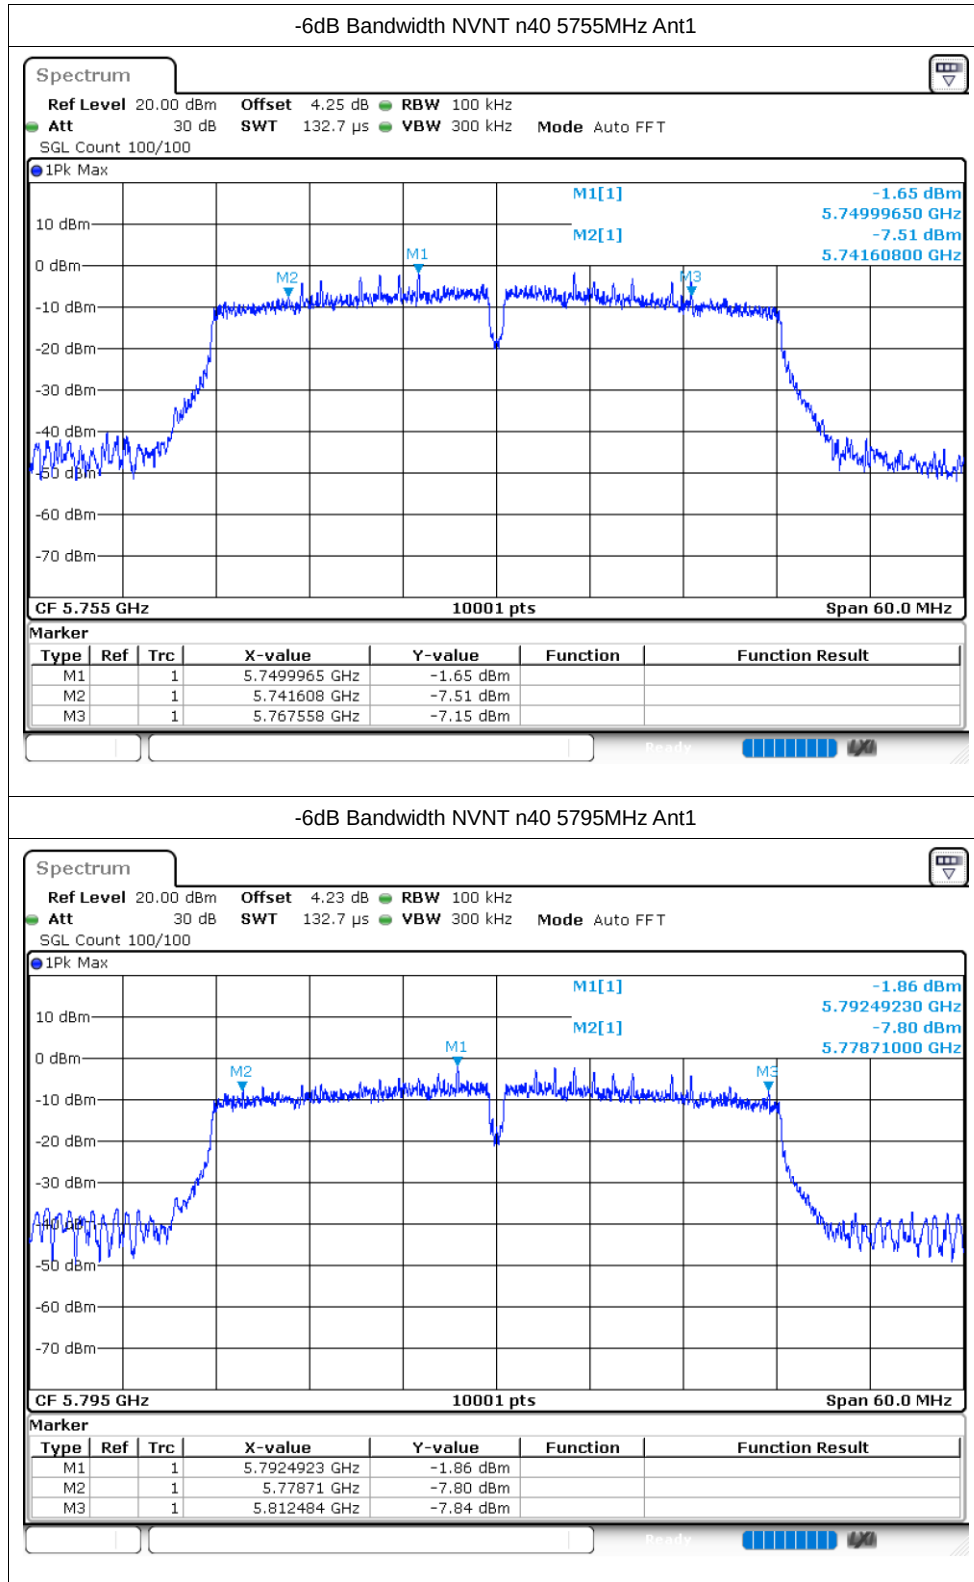

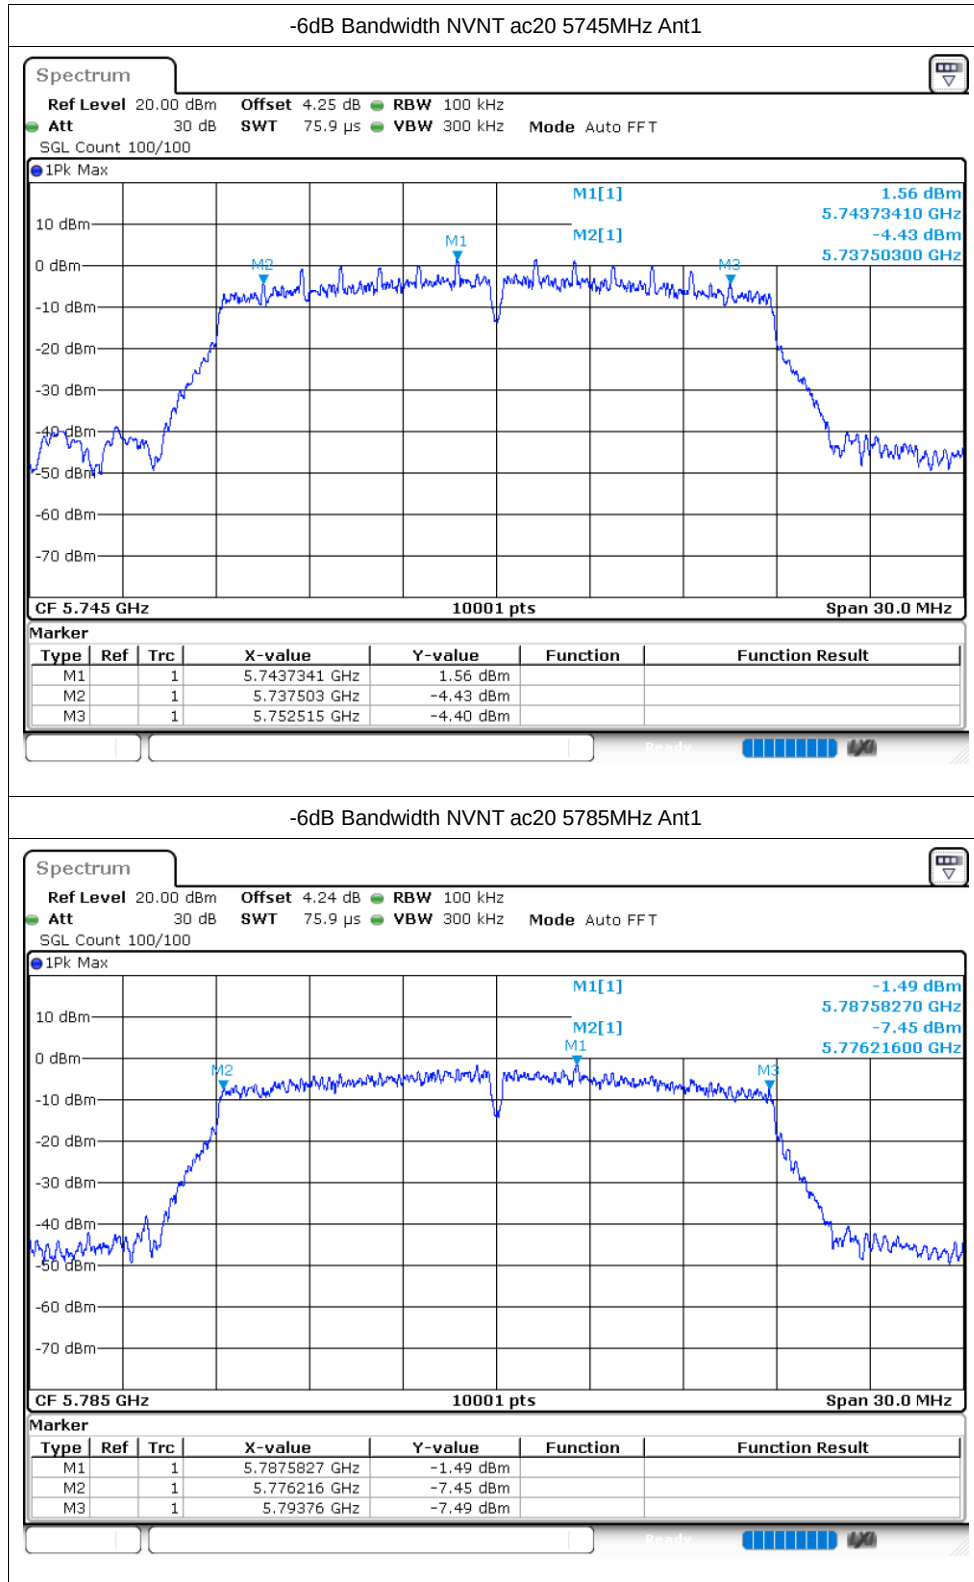

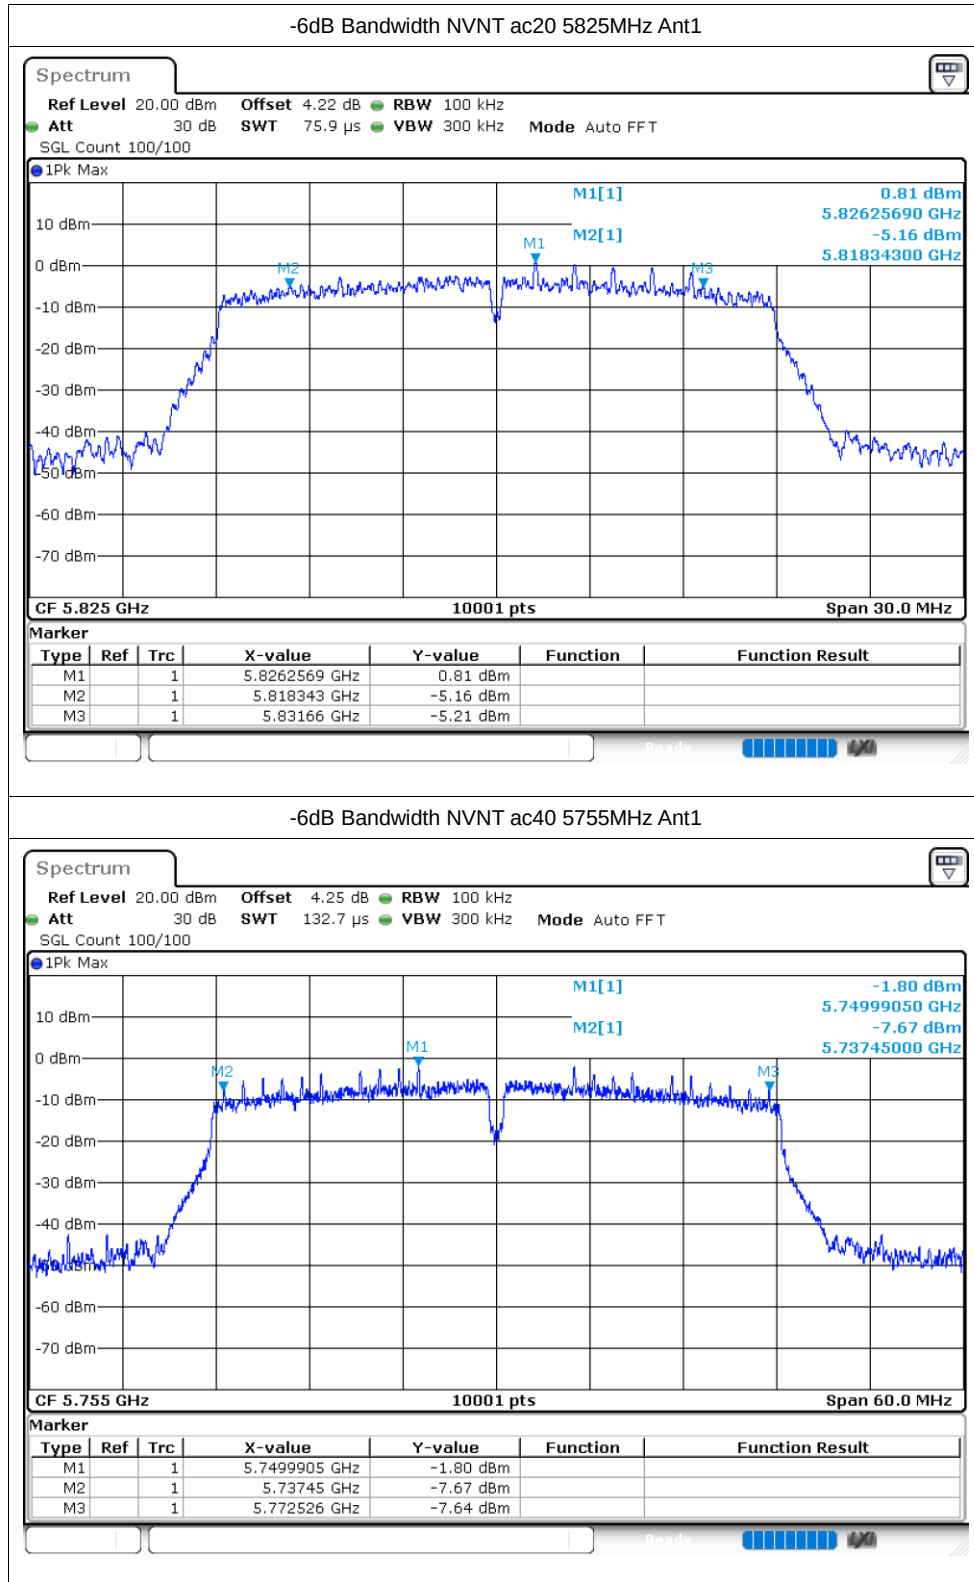

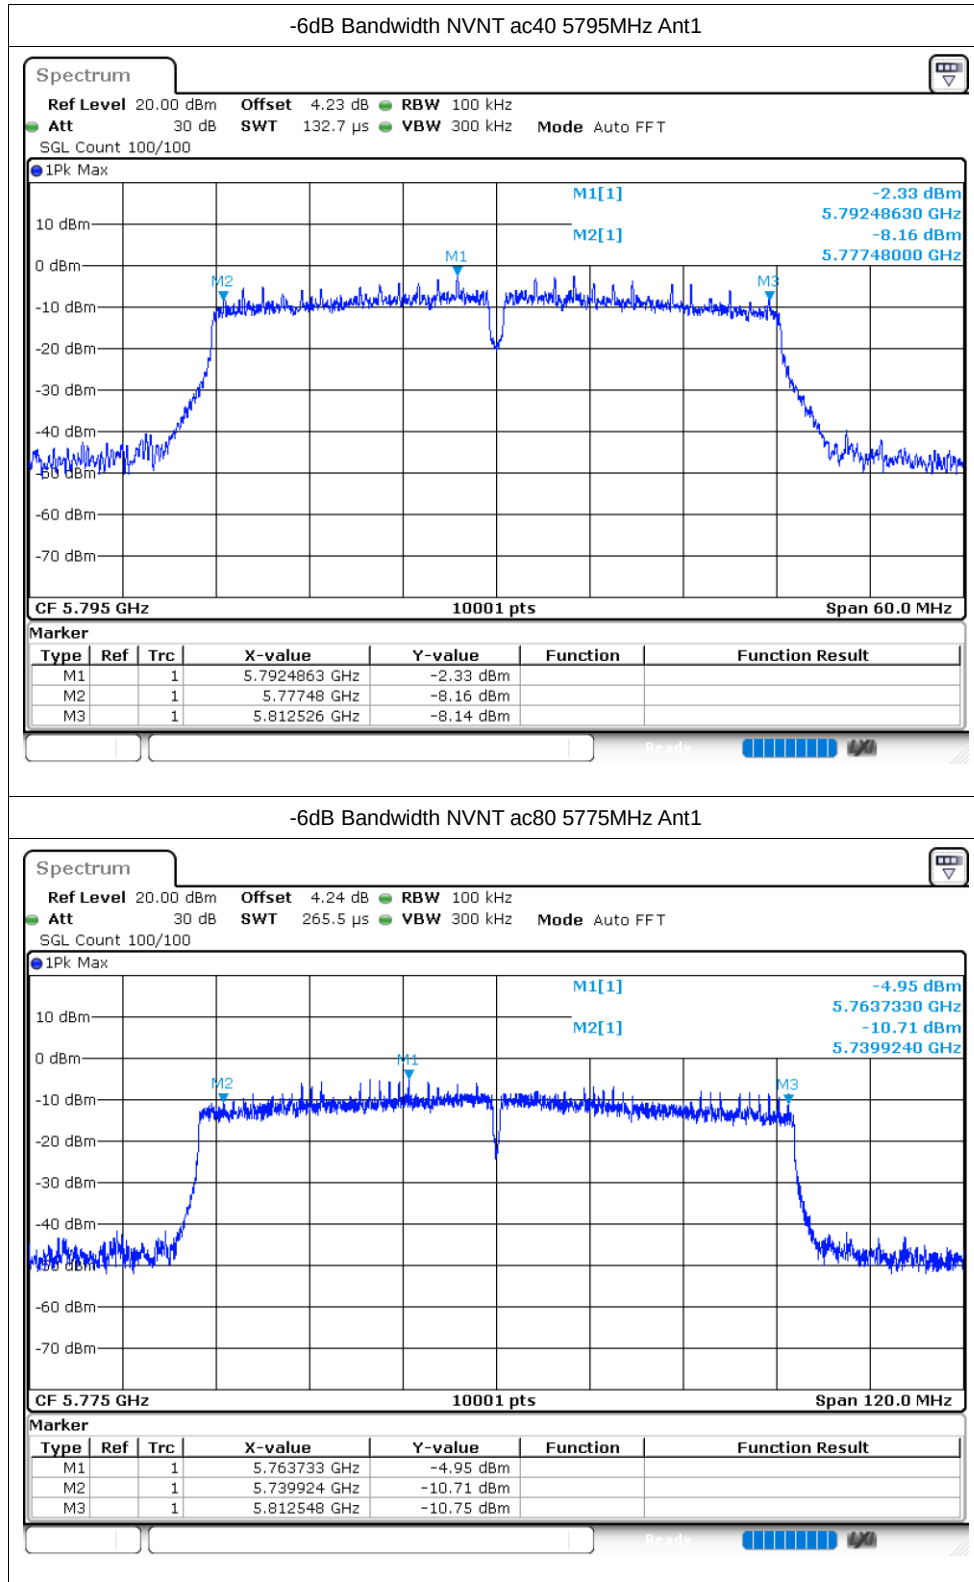


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.366
NVNT	a	5785	Ant1	16.294
NVNT	a	5825	Ant1	16.393
NVNT	n20	5745	Ant1	17.488
NVNT	n20	5785	Ant1	17.518
NVNT	n20	5825	Ant1	17.509
NVNT	n40	5755	Ant1	35.966
NVNT	n40	5795	Ant1	36.086
NVNT	ac20	5745	Ant1	17.47
NVNT	ac20	5785	Ant1	17.587
NVNT	ac20	5825	Ant1	17.527
NVNT	ac40	5755	Ant1	35.942
NVNT	ac40	5795	Ant1	36.074
NVNT	ac80	5775	Ant1	75.148


Test Graphs


OBW NVNT a 5745MHz Ant1

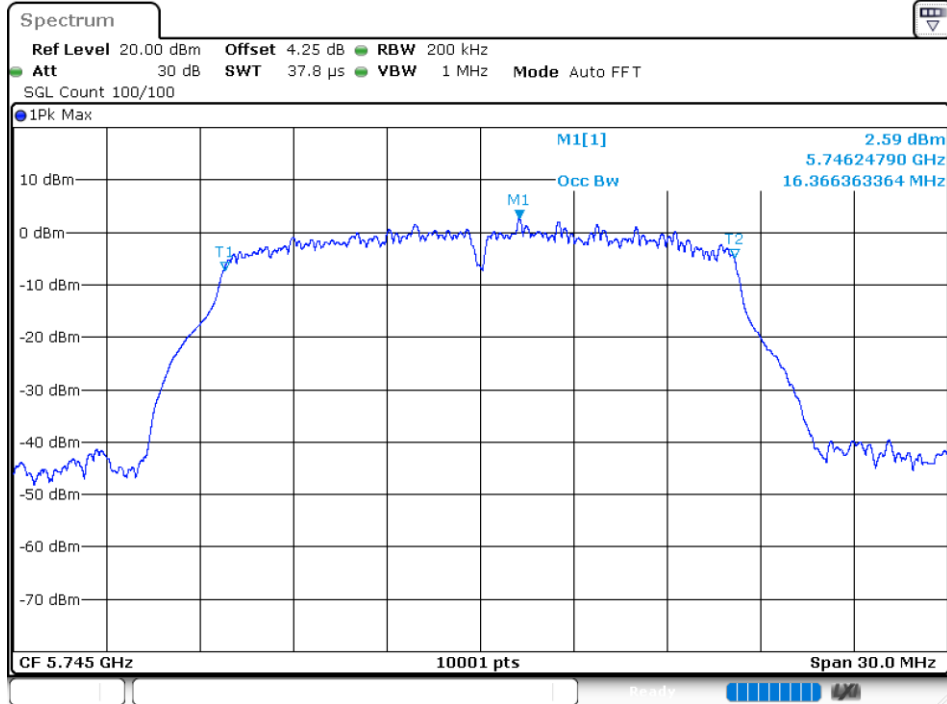



OBW NVNT a 5785MHz Ant1

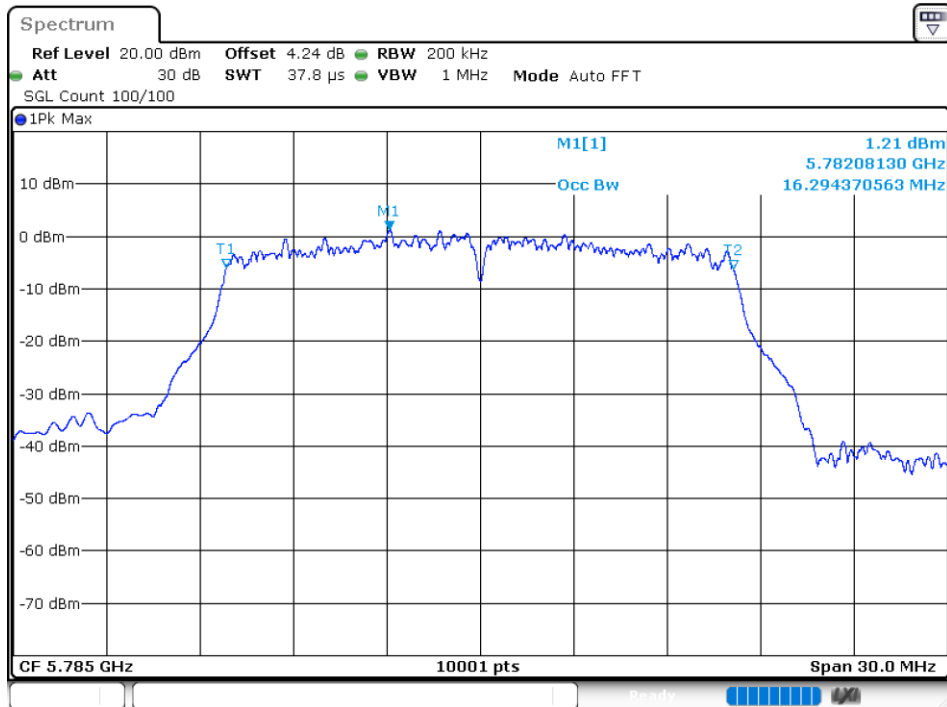


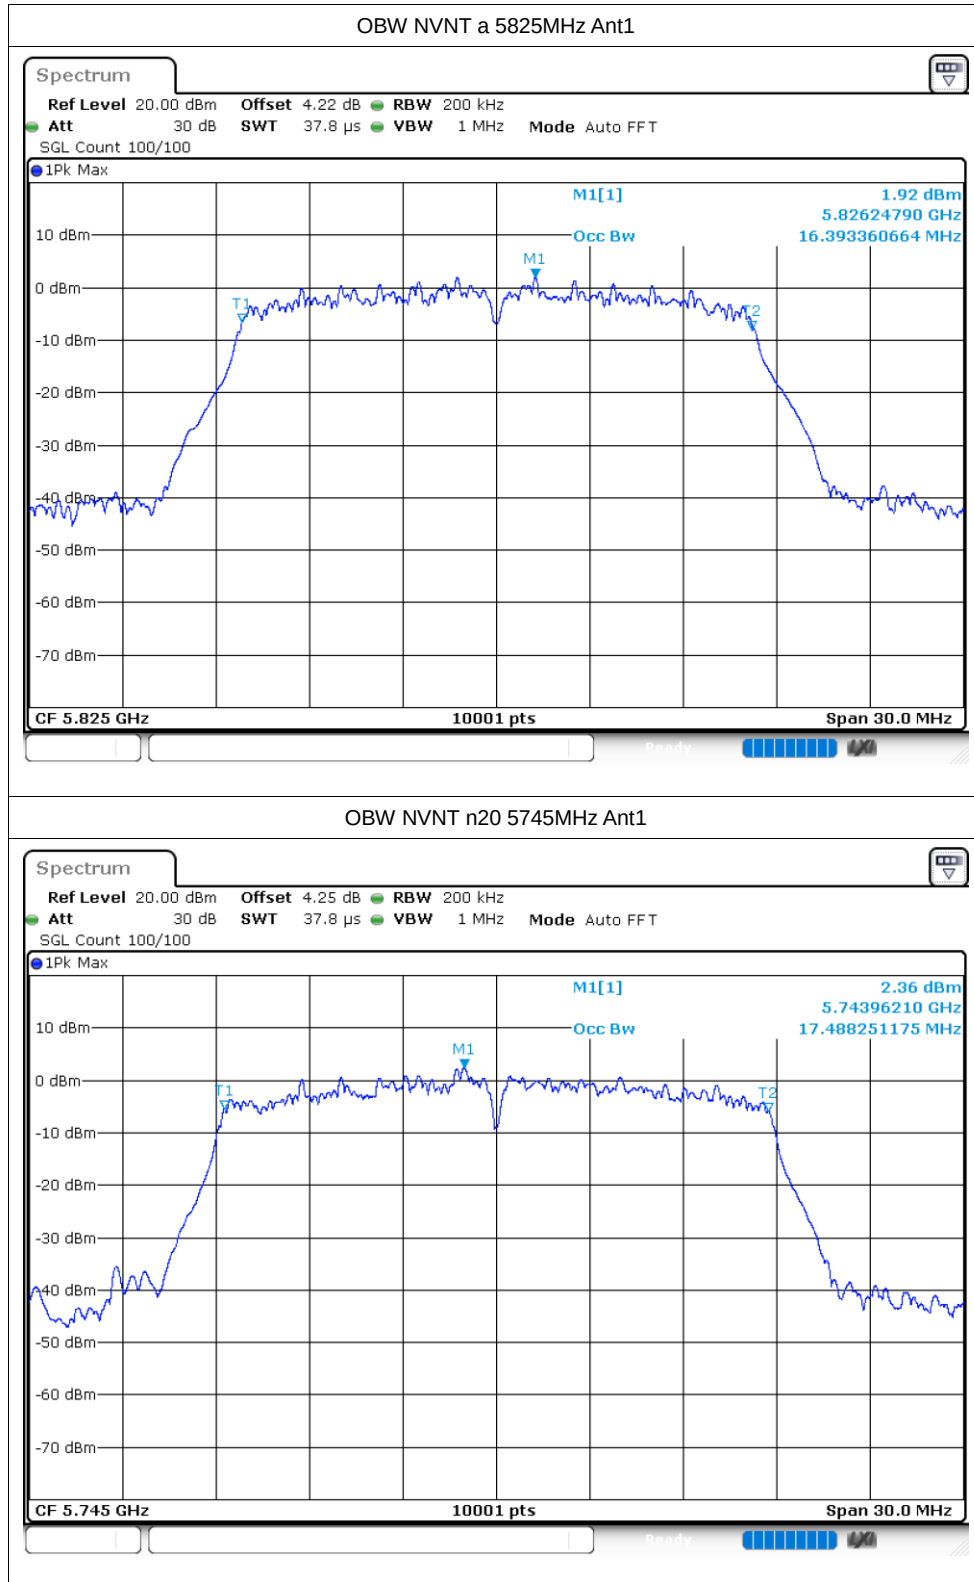


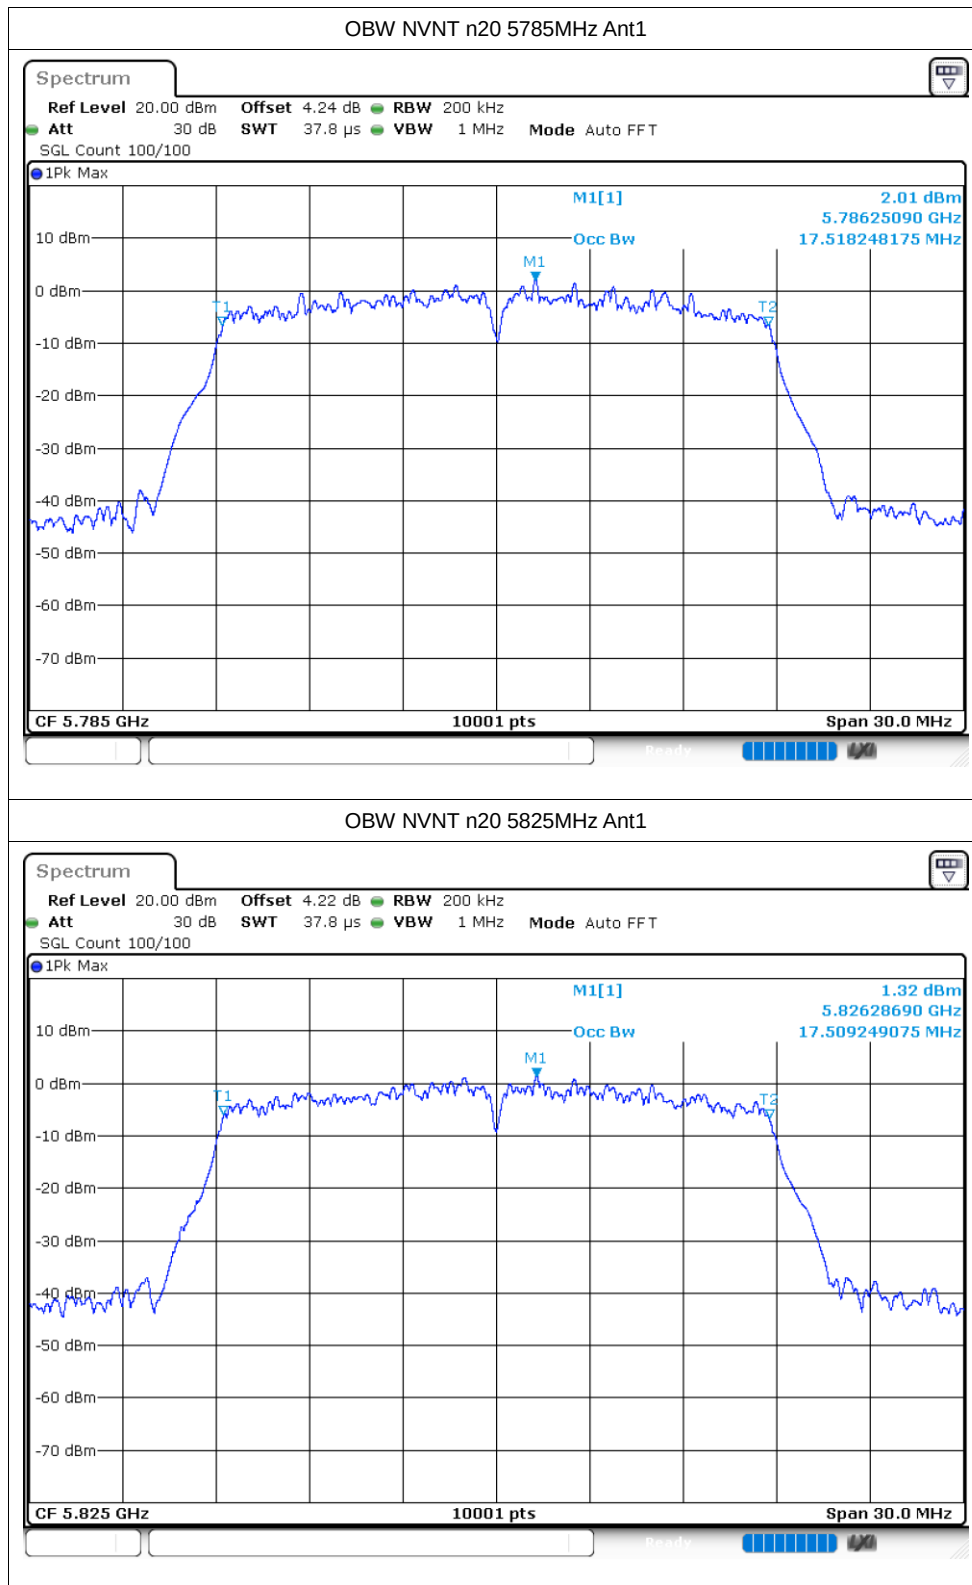

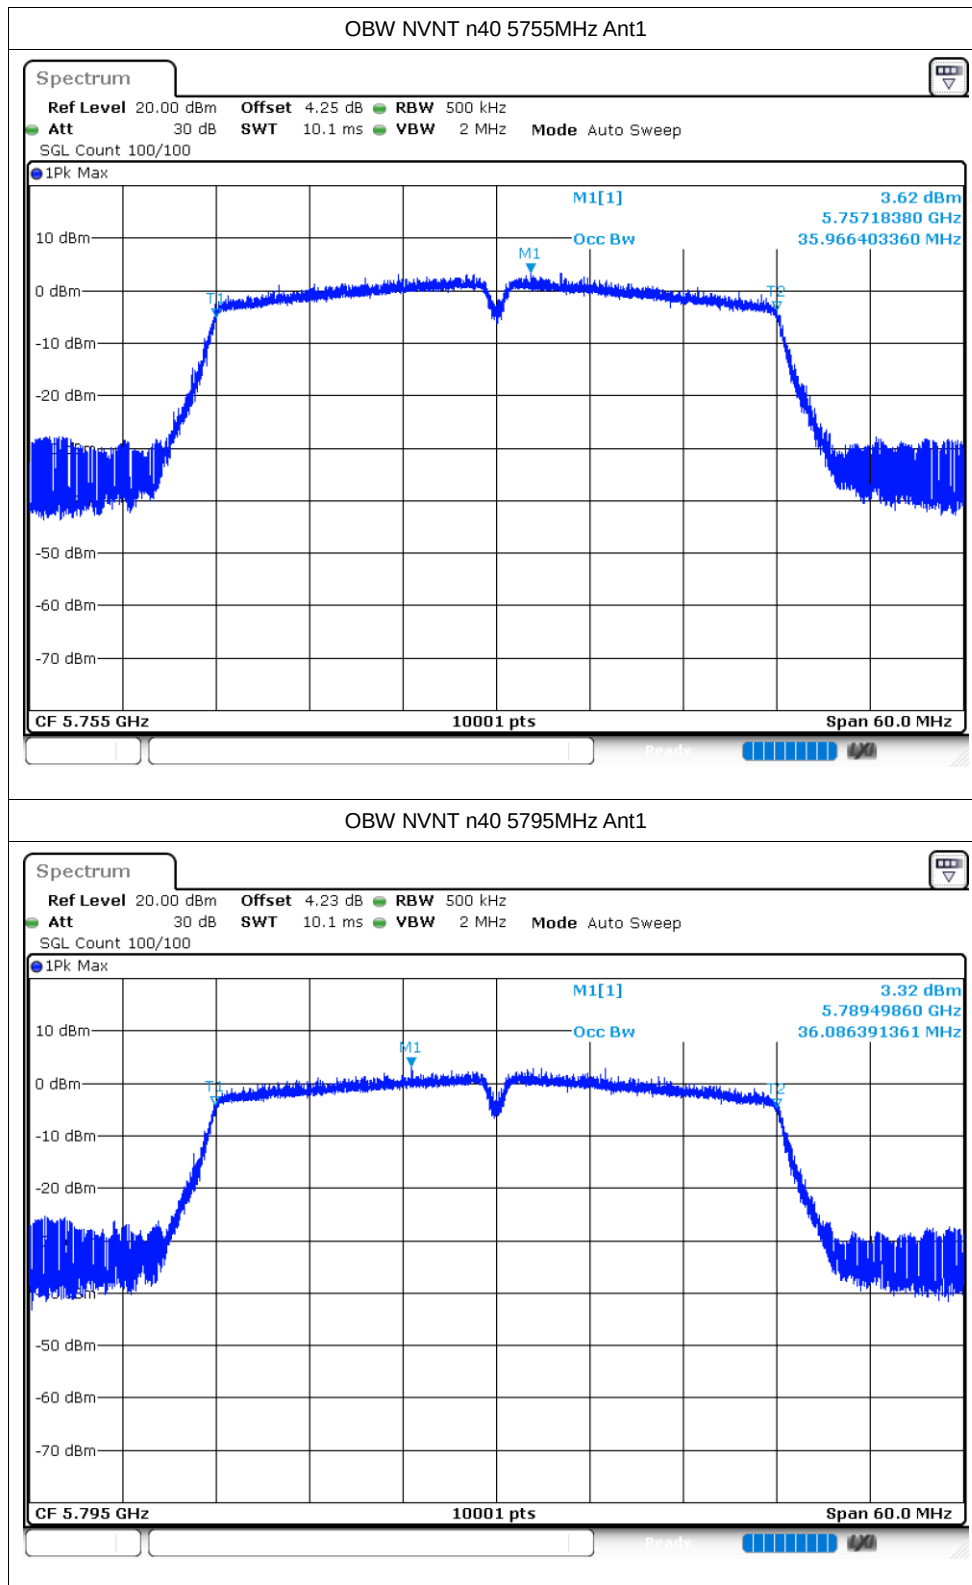

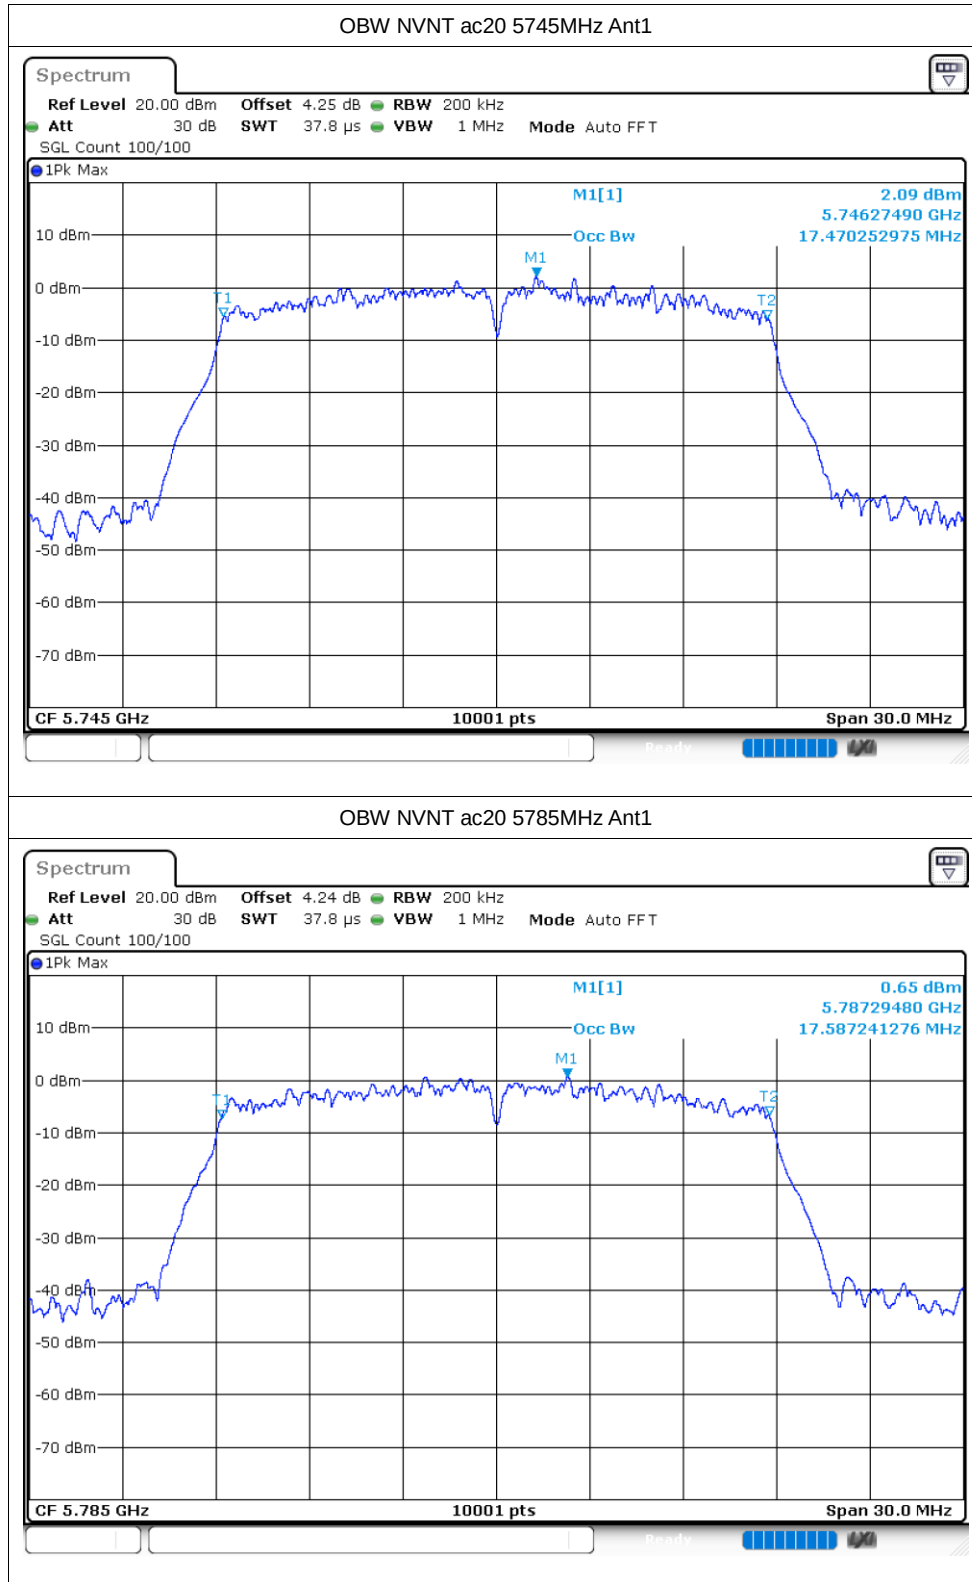

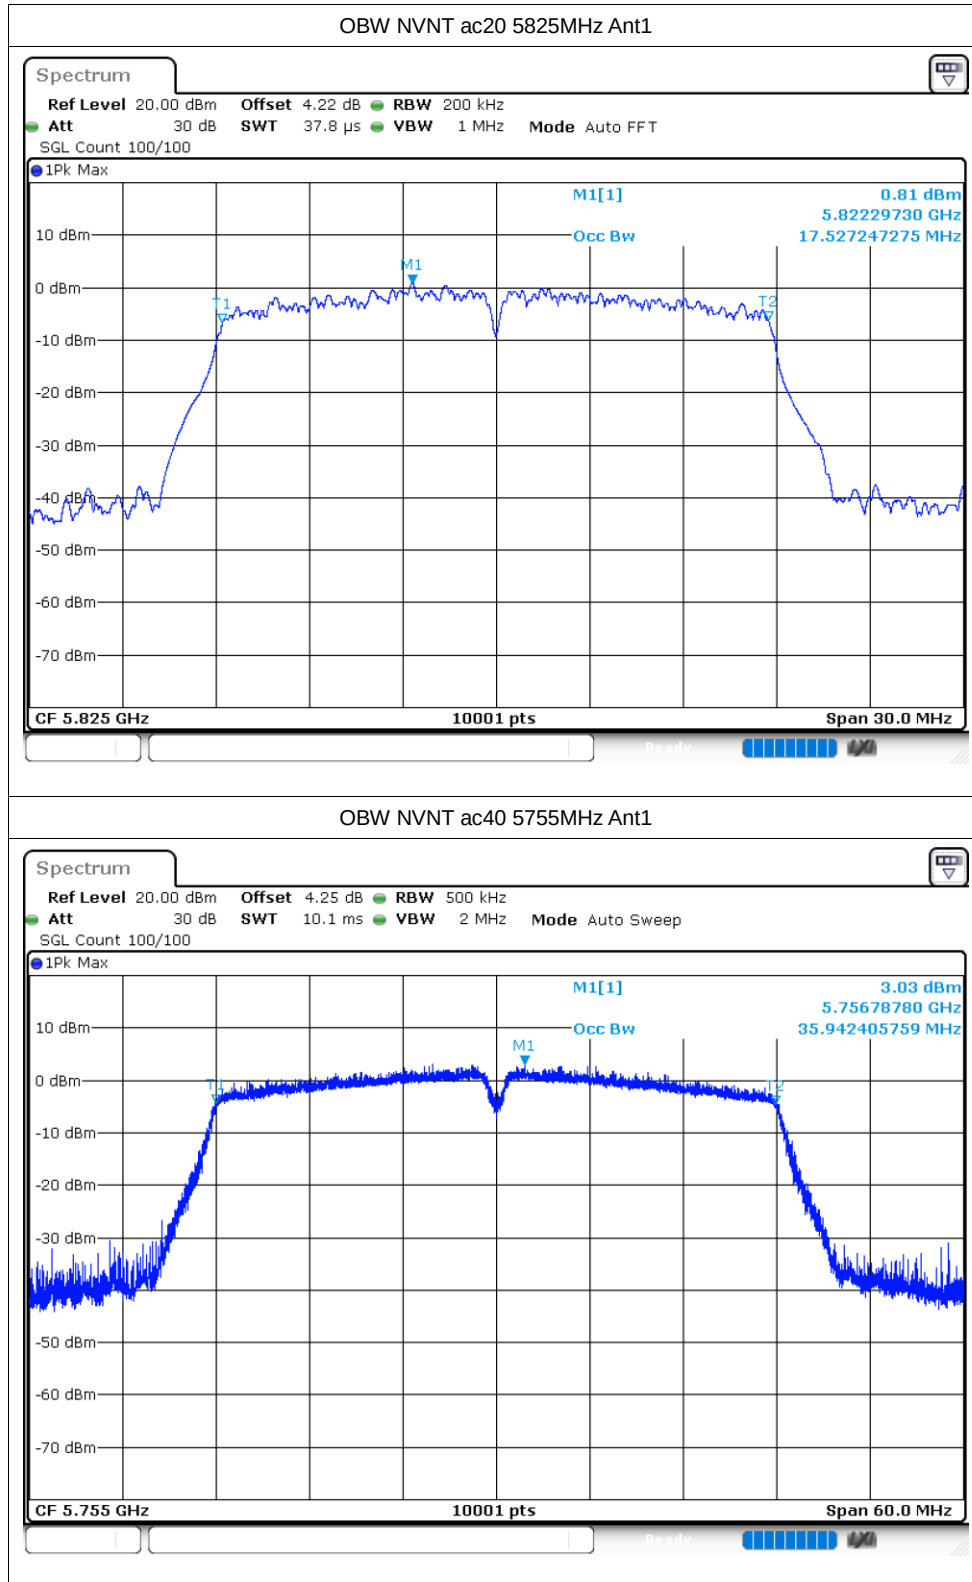

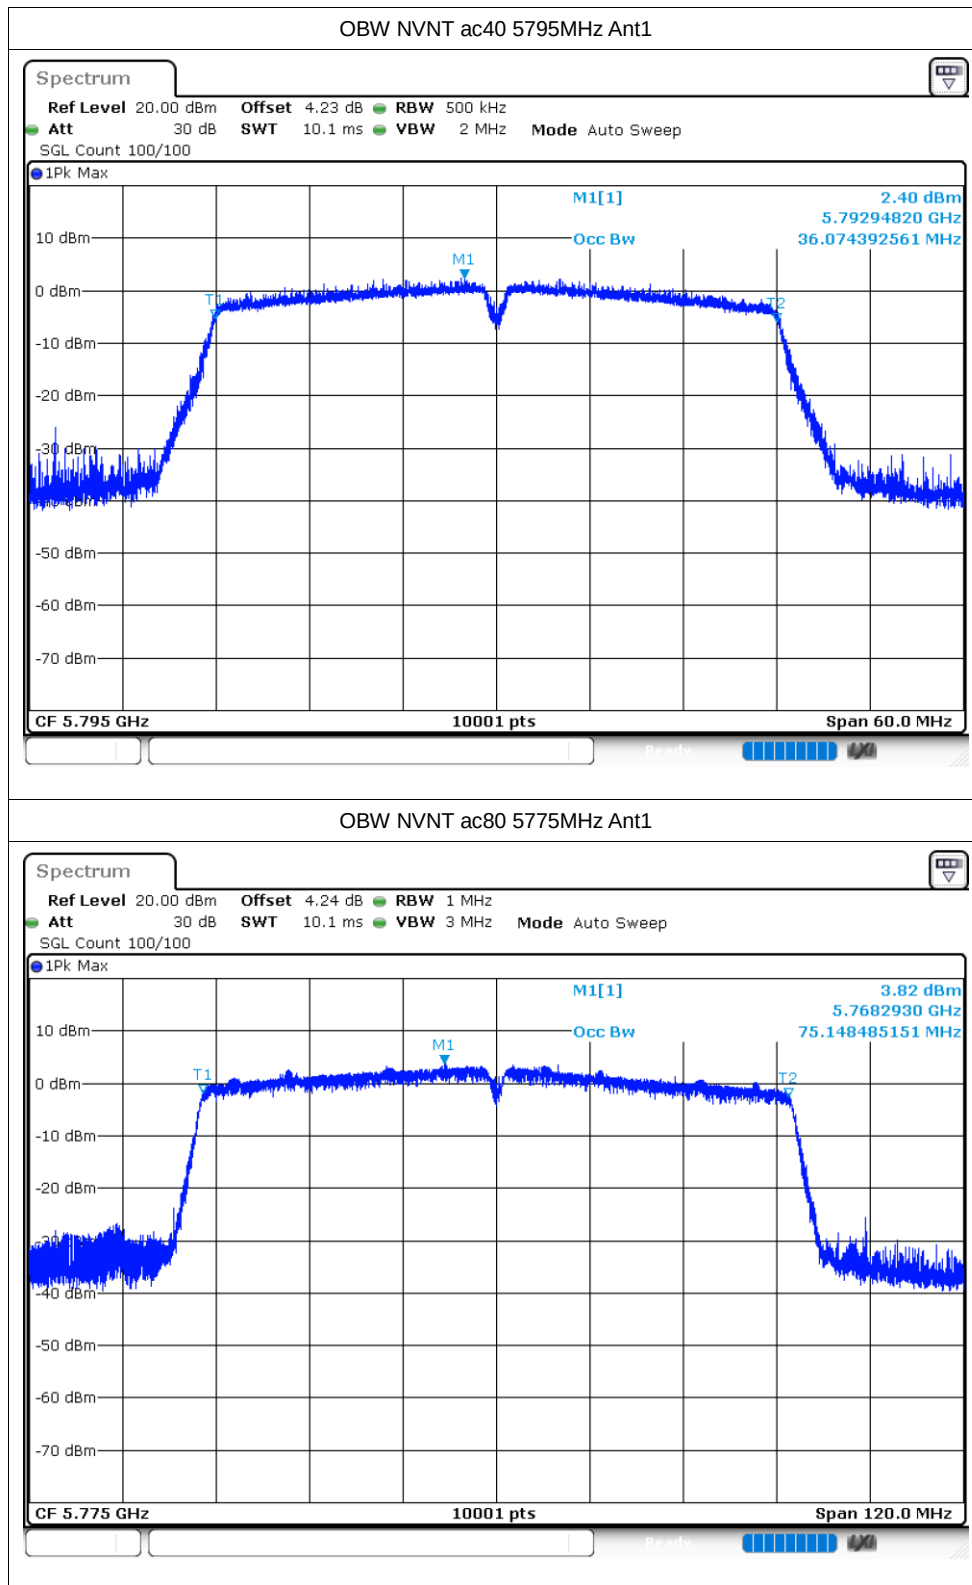


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	Ant1	-2.51	0.11	-2.4	30	Pass
NVNT	a	5785	Ant1	-3.27	0.1	-3.17	30	Pass
NVNT	a	5825	Ant1	-3.27	0.05	-3.22	30	Pass
NVNT	n20	5745	Ant1	-2.81	0.11	-2.7	30	Pass
NVNT	n20	5785	Ant1	-3.7	0.11	-3.59	30	Pass
NVNT	n20	5825	Ant1	-3.37	0.05	-3.32	30	Pass
NVNT	n40	5755	Ant1	-6.77	0.12	-6.65	30	Pass
NVNT	n40	5795	Ant1	-7.44	0.11	-7.33	30	Pass
NVNT	ac20	5745	Ant1	-2.75	0.11	-2.64	30	Pass
NVNT	ac20	5785	Ant1	-3.54	0.11	-3.43	30	Pass
NVNT	ac20	5825	Ant1	-3.56	0.11	-3.45	30	Pass
NVNT	ac40	5755	Ant1	-7.8	0.22	-7.58	30	Pass
NVNT	ac40	5795	Ant1	-7.56	0.22	-7.34	30	Pass
NVNT	ac80	5775	Ant1	-11.47	0.43	-11.04	30	Pass

Test Graphs

PSD NVNT a 5745MHz Ant1

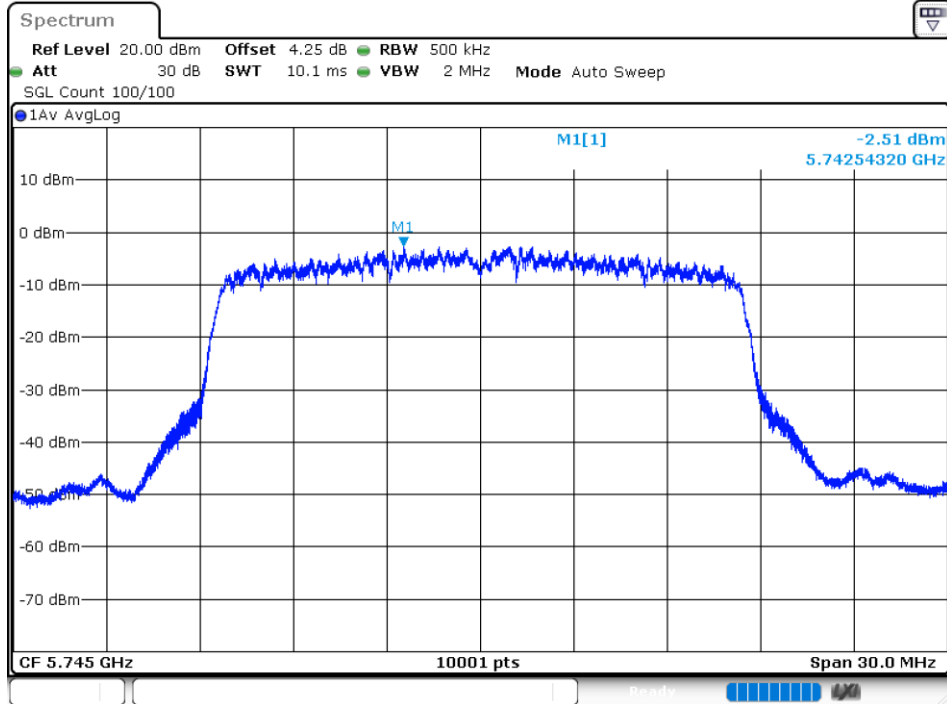

PSD NVNT a 5785MHz Ant1

