




The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.2 Test setup



7.3 Test Result

PASS

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations / data rates and antenna ports.

Following channel was selected for the final test as listed below.

26 dB emission bandwidth:


Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.960	5169.600	5190.560	---	---
11A	Ant1	5200	20.560	5189.960	5210.520	---	---
11A	Ant1	5240	20.600	5229.840	5250.440	---	---
11A	Ant1	5745	21.360	5734.360	5755.720	---	---
11A	Ant1	5785	20.520	5774.840	5795.360	---	---
11A	Ant1	5825	20.800	5814.640	5835.440	---	---
11N20SISO	Ant1	5180	21.680	5169.240	5190.920	---	---
11N20SISO	Ant1	5200	21.440	5189.120	5210.560	---	---
11N20SISO	Ant1	5240	21.600	5229.240	5250.840	---	---
11N20SISO	Ant1	5745	21.040	5734.440	5755.480	---	---
11N20SISO	Ant1	5785	21.560	5774.320	5795.880	---	---
11N20SISO	Ant1	5825	21.560	5814.120	5835.680	---	---
11N40SISO	Ant1	5190	38.480	5170.880	5209.360	---	---
11N40SISO	Ant1	5230	38.720	5210.880	5249.600	---	---
11N40SISO	Ant1	5755	38.640	5735.720	5774.360	---	---
11N40SISO	Ant1	5795	38.720	5775.720	5814.440	---	---



minimum 6 dB bandwidth:

TestMode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.320	5736.840	5753.160	0.5	PASS
11A	Ant1	5785	16.320	5776.840	5793.160	0.5	PASS
11A	Ant1	5825	16.280	5816.880	5833.160	0.5	PASS
11N20SISO	Ant1	5745	16.560	5736.840	5753.400	0.5	PASS
11N20SISO	Ant1	5785	17.040	5776.480	5793.520	0.5	PASS
11N20SISO	Ant1	5825	17.520	5816.240	5833.760	0.5	PASS
11N40SISO	Ant1	5755	35.040	5737.480	5772.520	0.5	PASS
11N40SISO	Ant1	5795	35.120	5777.400	5812.520	0.5	PASS

Test Graphs:

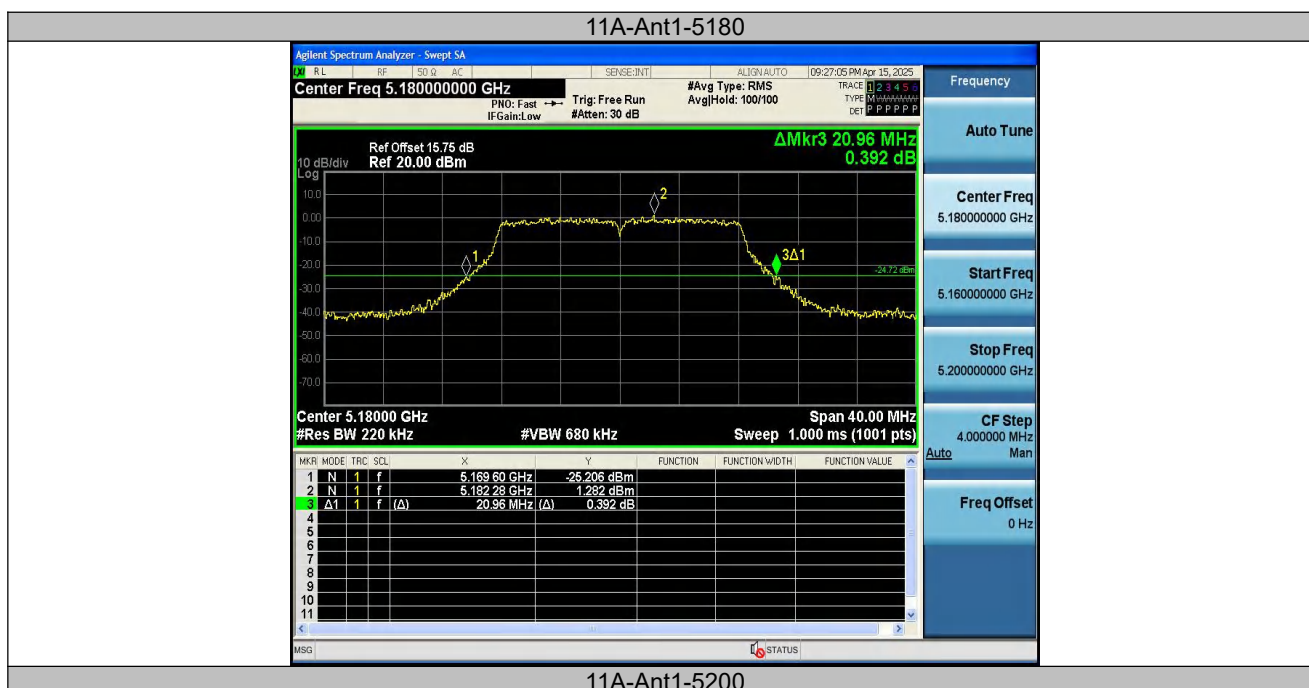



11A-Ant1-5240



11A-Ant1-5745



11A-Ant1-5785



11A-Ant1-5825



11N20SISO-Ant1-5180



11N20SISO-Ant1-5200



11N20SISO-Ant1-5240



11N20SISO-Ant1-5745



11N20SISO-Ant1-5785



11N20SISO-Ant1-5825



11N40SISO-Ant1-5190



11N40SISO-Ant1-5230



11N40SISO-Ant1-5755



11N40SISO-Ant1-5795





Min emission bandwidth Test Graphs:






11N20SISO-Ant1-5745-PASS




11N20SISO-Ant1-5785-PASS




11N20SISO-Ant1-5825-PASS

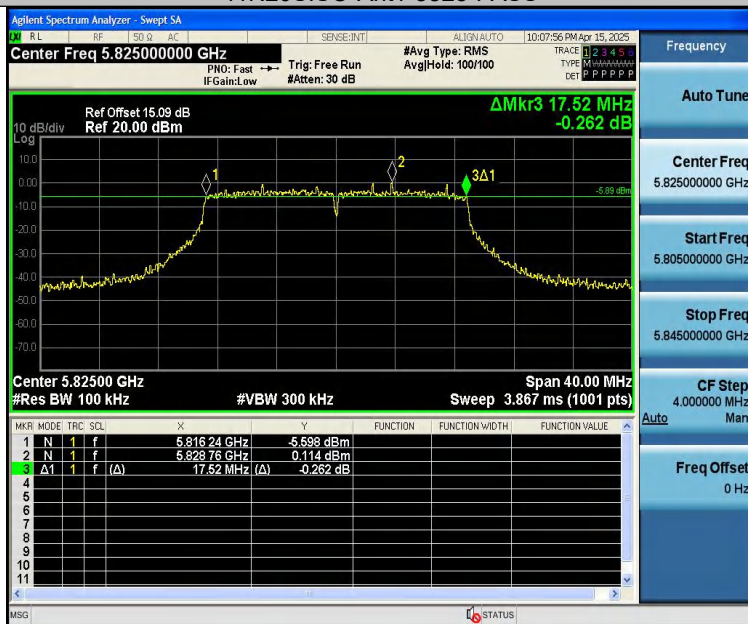

11N40SISO-Ant1-5755-PASS

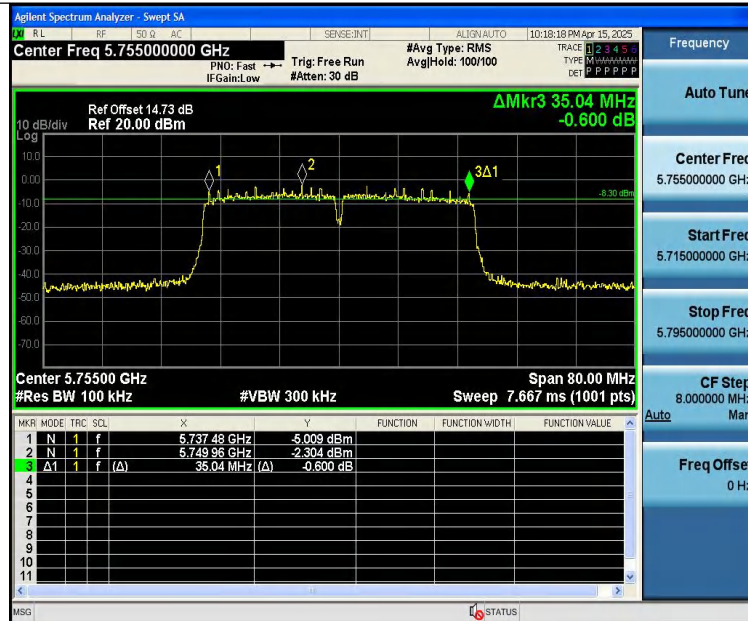

11N40SISO-Ant1-5795-PASS

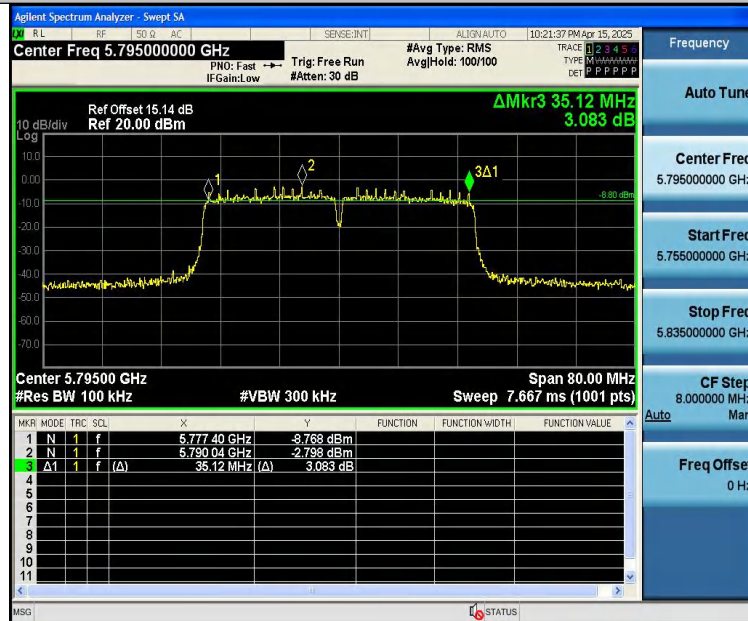




8 Maximum Conducted Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.407(a)
Test Method	: ANSI C63.10:2013
Test Limit	: For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.1 Test Setup

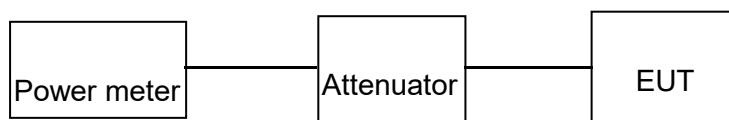

8.2 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, The use Power Meter 1. Place the EUT on a bench and set it in transmitting mode. 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a Power meter.



8.3 Test Result

Test Mode	Antenna	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	10.98	≤23.98	PASS
11A	Ant1	5200	13.27	≤23.98	PASS
11A	Ant1	5240	13.77	≤23.98	PASS
11A	Ant1	5745	11.10	≤30.00	PASS
11A	Ant1	5785	10.31	≤30.00	PASS
11A	Ant1	5825	10.50	≤30.00	PASS
11N20SISO	Ant1	5180	11.04	≤23.98	PASS
11N20SISO	Ant1	5200	11.85	≤23.98	PASS
11N20SISO	Ant1	5240	13.30	≤23.98	PASS
11N20SISO	Ant1	5745	10.03	≤30.00	PASS
11N20SISO	Ant1	5785	10.98	≤30.00	PASS
11N20SISO	Ant1	5825	11.47	≤30.00	PASS
11N40SISO	Ant1	5190	12.56	≤23.98	PASS
11N40SISO	Ant1	5230	13.66	≤23.98	PASS
11N40SISO	Ant1	5755	11.35	≤30.00	PASS
11N40SISO	Ant1	5795	10.88	≤30.00	PASS



9 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.2407(a)
Test Method	: ANSI C63.10:2013
Test Limit	: For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHzband. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations




9.1 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 and ANSI 63.10: 2013 Sec 10.3.7. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set the RBW to 1 MHz.
- b) Set the VBW to be at least 1 MHz (a VBW of 3 MHz is desirable).
- c) Set the frequency span to examine the spectrum across a convenient frequency segment (e.g., 600 MHz).
- d) Select the power averaging (rms) detector.
- e) Set the sweep time so that there is no more than a 1 ms integration period over each measurement bin.
- f) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

9.2 Test Setup

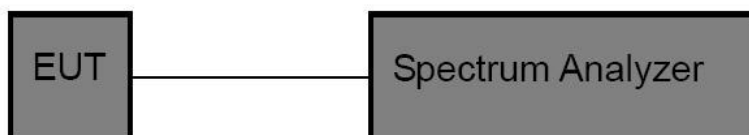



9.3 Test Result

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations / data rates and antenna ports.

Following channel was selected for the final test as listed below

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5200	2.27	≤11.00	PASS
11A	Ant1	5240	2.71	≤11.00	PASS
11N20SISO	Ant1	5180	-0.05	≤11.00	PASS
11N20SISO	Ant1	5200	0.7	≤11.00	PASS
11N20SISO	Ant1	5240	2.1	≤11.00	PASS
11N40SISO	Ant1	5190	-1.43	≤11.00	PASS
11N40SISO	Ant1	5230	-0.16	≤11.00	PASS


TestMode	Antenna	Frequency[MHz]	Result [dBm/300kHz]	Result [dBm/500kHz]	Result [dBm/500kHz]	Verdict
11A	Ant1	5745	-2.87	-0.65	≤30.00	PASS
11A	Ant1	5785	-3.16	-0.94	≤30.00	PASS
11A	Ant1	5825	-3.49	-1.27	≤30.00	PASS
11N20SISO	Ant1	5745	-3.93	-1.71	≤30.00	PASS
11N20SISO	Ant1	5785	-3.01	-0.79	≤30.00	PASS
11N20SISO	Ant1	5825	-2.61	-0.39	≤30.00	PASS
11N40SISO	Ant1	5755	-5.33	-3.11	≤30.00	PASS
11N40SISO	Ant1	5795	-5.58	-3.36	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

2. in the band 5.725–5.85 GHz the test RBW select 300kHz,so the measured result corrected by Result+10 log (500 kHz/300kHz).



Test Graphs:

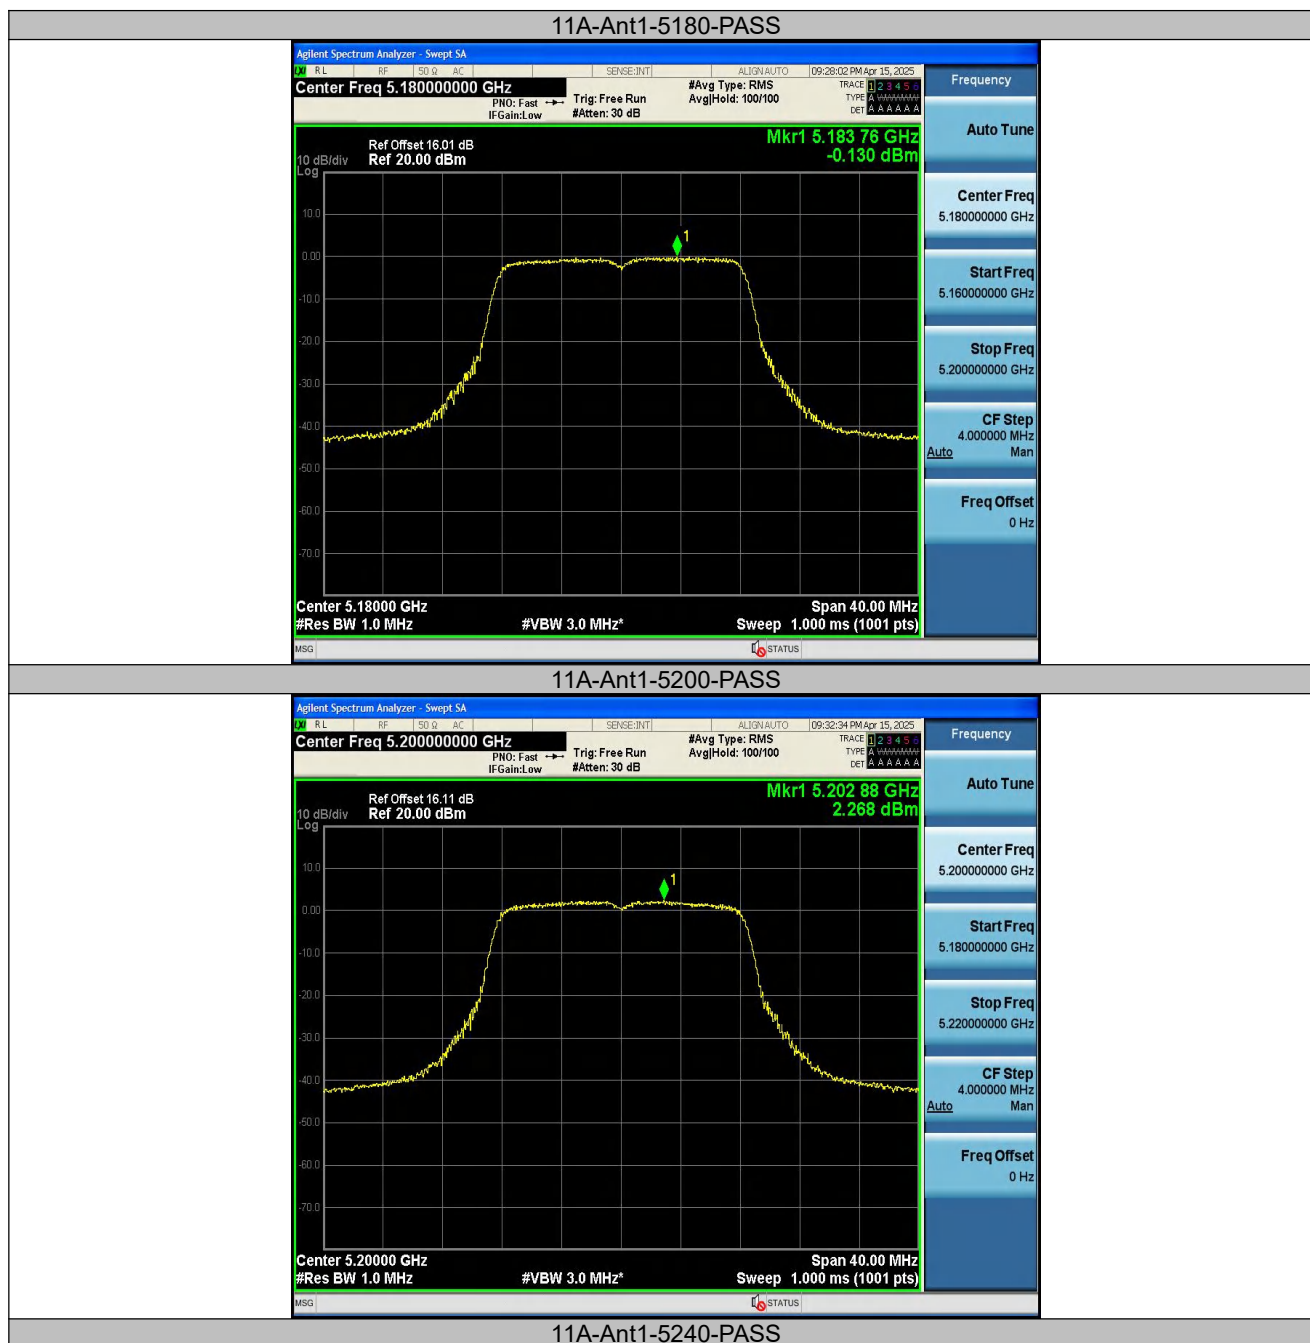



11A-Ant1-5745-PASS



11A-Ant1-5785-PASS



11A-Ant1-5825-PASS



11N20SISO-Ant1-5180-PASS



11N20SISO-Ant1-5200-PASS



11N20SISO-Ant1-5240-PASS



11N20SISO-Ant1-5745-PASS



11N20SISO-Ant1-5785-PASS



11N20SISO-Ant1-5825-PASS



11N40SISO-Ant1-5190-PASS



11N40SISO-Ant1-5230-PASS



11N40SISO-Ant1-5755-PASS



Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.



9.4 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.5 Result

The EUT'S antenna, permanent attached antenna, is FPC Antenna. The antenna's gain is 3.33 dBi and meets the requirement.

10 Frequency Stability


Test Requirement : FCC Part15 E Section 15.407 (g)

Test Limit
Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

10.1 Test Procedure

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

10.2 Test Setup

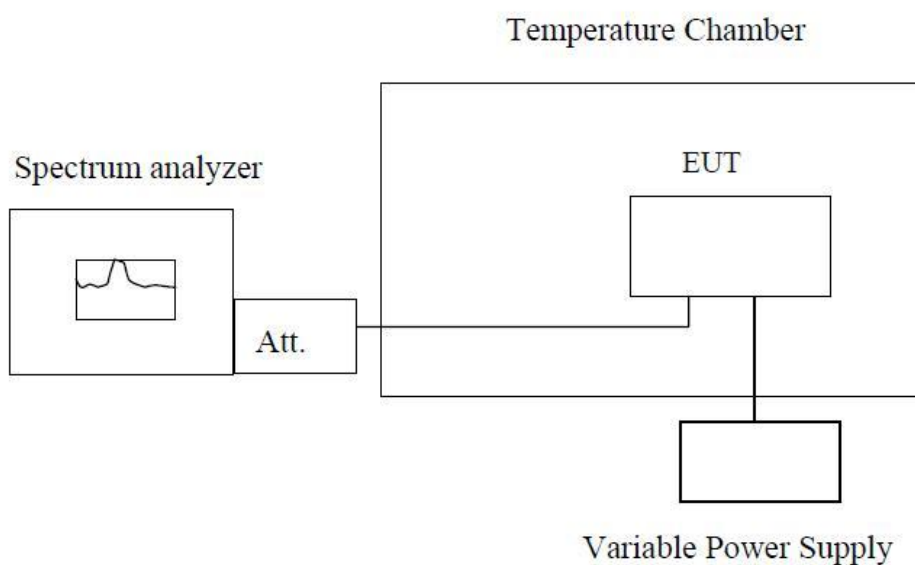



10.3 Test Result

TestMode	Antenna	Frequency [MHz]	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	Ant1	5180	NV	NT	-5000.00	-0.965251	20	PASS
11A	Ant1	5180	LV	NT	-5000.00	-0.965251	20	PASS
11A	Ant1	5180	HV	NT	-5000.00	-0.965251	20	PASS
11A	Ant1	5200	NV	NT	-8000.00	-1.538462	20	PASS
11A	Ant1	5200	LV	NT	-8000.00	-1.538462	20	PASS
11A	Ant1	5200	HV	NT	-8000.00	-1.538462	20	PASS
11A	Ant1	5240	NV	NT	-9000.00	-1.717557	20	PASS
11A	Ant1	5240	LV	NT	-9000.00	-1.717557	20	PASS
11A	Ant1	5240	HV	NT	-10000.00	-1.908397	20	PASS
11A	Ant1	5745	NV	NT	-10000.00	-1.740644	20	PASS
11A	Ant1	5745	LV	NT	-11000.00	-1.914708	20	PASS
11A	Ant1	5745	HV	NT	-11000.00	-1.914708	20	PASS
11A	Ant1	5785	NV	NT	-12000.00	-2.074330	20	PASS
11A	Ant1	5785	LV	NT	-12000.00	-2.074330	20	PASS
11A	Ant1	5785	HV	NT	-12000.00	-2.074330	20	PASS
11A	Ant1	5825	NV	NT	-13000.00	-2.231760	20	PASS
11A	Ant1	5825	LV	NT	-13000.00	-2.231760	20	PASS
11A	Ant1	5825	HV	NT	-13000.00	-2.231760	20	PASS
11N20SISO	Ant1	5180	NV	NT	-12000.00	-2.316602	20	PASS
11N20SISO	Ant1	5180	LV	NT	-12000.00	-2.316602	20	PASS
11N20SISO	Ant1	5180	HV	NT	-12000.00	-2.316602	20	PASS
11N20SISO	Ant1	5200	NV	NT	-12000.00	-2.307692	20	PASS
11N20SISO	Ant1	5200	LV	NT	-12000.00	-2.307692	20	PASS
11N20SISO	Ant1	5200	HV	NT	-12000.00	-2.307692	20	PASS
11N20SISO	Ant1	5240	NV	NT	-12000.00	-2.290076	20	PASS
11N20SISO	Ant1	5240	LV	NT	-12000.00	-2.290076	20	PASS
11N20SISO	Ant1	5240	HV	NT	-12000.00	-2.290076	20	PASS
11N20SISO	Ant1	5745	NV	NT	-14000.00	-2.436902	20	PASS
11N20SISO	Ant1	5745	LV	NT	-14000.00	-2.436902	20	PASS
11N20SISO	Ant1	5745	HV	NT	-14000.00	-2.436902	20	PASS
11N20SISO	Ant1	5785	NV	NT	-15000.00	-2.592913	20	PASS
11N20SISO	Ant1	5785	LV	NT	-14000.00	-2.420052	20	PASS
11N20SISO	Ant1	5785	HV	NT	-14000.00	-2.420052	20	PASS
11N20SISO	Ant1	5825	NV	NT	-14000.00	-2.403433	20	PASS
11N20SISO	Ant1	5825	LV	NT	-15000.00	-2.575107	20	PASS
11N20SISO	Ant1	5825	HV	NT	-15000.00	-2.575107	20	PASS
11N40SISO	Ant1	5190	NV	NT	-13000.00	-2.504817	20	PASS
11N40SISO	Ant1	5190	LV	NT	-13000.00	-2.504817	20	PASS
11N40SISO	Ant1	5190	HV	NT	-12000.00	-2.312139	20	PASS
11N40SISO	Ant1	5230	NV	NT	-13000.00	-2.485660	20	PASS
11N40SISO	Ant1	5230	LV	NT	-13000.00	-2.485660	20	PASS
11N40SISO	Ant1	5230	HV	NT	-13000.00	-2.485660	20	PASS
11N40SISO	Ant1	5755	NV	NT	-14000.00	-2.432667	20	PASS
11N40SISO	Ant1	5755	LV	NT	-15000.00	-2.606429	20	PASS
11N40SISO	Ant1	5755	HV	NT	-15000.00	-2.606429	20	PASS
11N40SISO	Ant1	5795	NV	NT	-15000.00	-2.588438	20	PASS
11N40SISO	Ant1	5795	LV	NT	-15000.00	-2.588438	20	PASS
11N40SISO	Ant1	5795	HV	NT	-15000.00	-2.588438	20	PASS



TestMode	Antenna	Channel	Temperature					Verdict
			Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	
11A	Ant1	5180	NV	-30	40000.00	7.722008	20	PASS
			NV	-20	40000.00	7.722008	20	PASS
			NV	-10	40000.00	7.722008	20	PASS
			NV	0	40000.00	7.722008	20	PASS
			NV	10	40000.00	7.722008	20	PASS
			NV	20	40000.00	7.722008	20	PASS
			NV	30	40000.00	7.722008	20	PASS
			NV	40	40000.00	7.722008	20	PASS
		5220	NV	50	40000.00	7.722008	20	PASS
			NV	-30	40000.00	7.662835	20	PASS
			NV	-20	40000.00	7.662835	20	PASS
			NV	-10	40000.00	7.662835	20	PASS
			NV	0	40000.00	7.662835	20	PASS
			NV	10	40000.00	7.662835	20	PASS
			NV	20	40000.00	7.662835	20	PASS
			NV	30	40000.00	7.662835	20	PASS
		5240	NV	40	40000.00	7.662835	20	PASS
			NV	50	40000.00	7.662835	20	PASS
			NV	-30	40000.00	7.633588	20	PASS
			NV	-20	40000.00	7.633588	20	PASS
			NV	-10	40000.00	7.633588	20	PASS
			NV	0	40000.00	7.633588	20	PASS
			NV	10	40000.00	7.633588	20	PASS
			NV	20	40000.00	7.633588	20	PASS
		5745	NV	30	40000.00	7.633588	20	PASS
			NV	40	40000.00	7.633588	20	PASS
			NV	50	40000.00	7.633588	20	PASS
			NV	-30	40000.00	6.962576	20	PASS
			NV	-20	40000.00	6.962576	20	PASS
			NV	-10	40000.00	6.962576	20	PASS
			NV	0	40000.00	6.962576	20	PASS
			NV	10	40000.00	6.962576	20	PASS
		5785	NV	20	40000.00	6.962576	20	PASS
			NV	30	40000.00	6.962576	20	PASS
			NV	40	40000.00	6.962576	20	PASS
			NV	50	40000.00	6.962576	20	PASS
			NV	-30	40000.00	6.914434	20	PASS
			NV	-20	40000.00	6.914434	20	PASS
			NV	-10	40000.00	6.914434	20	PASS
			NV	0	40000.00	6.914434	20	PASS
		5825	NV	10	40000.00	6.914434	20	PASS
			NV	20	40000.00	6.914434	20	PASS
			NV	30	40000.00	6.914434	20	PASS
			NV	40	40000.00	6.914434	20	PASS
			NV	50	40000.00	6.914434	20	PASS
			NV	-30	40000.00	6.866953	20	PASS
		5825	NV	-20	40000.00	6.866953	20	PASS
			NV	-10	40000.00	6.866953	20	PASS
			NV	0	40000.00	6.866953	20	PASS
			NV	10	40000.00	6.866953	20	PASS
			NV	20	40000.00	6.866953	20	PASS
			NV	30	40000.00	6.866953	20	PASS



			NV	30	40000.00	6.866953	20	PASS
			NV	40	40000.00	6.866953	20	PASS
			NV	50	40000.00	6.866953	20	PASS
			NV	50	40000.00	6.866953	20	PASS
11N20SISO	Ant1	5180	NV	-30	40000.00	7.722008	20	PASS
			NV	-20	40000.00	7.722008	20	PASS
			NV	-10	40000.00	7.722008	20	PASS
			NV	0	40000.00	7.722008	20	PASS
			NV	10	40000.00	7.722008	20	PASS
			NV	20	40000.00	7.722008	20	PASS
			NV	30	40000.00	7.722008	20	PASS
			NV	40	40000.00	7.722008	20	PASS
			NV	50	40000.00	7.722008	20	PASS
			NV	50	40000.00	7.722008	20	PASS
		5220	NV	-30	40000.00	7.662835	20	PASS
			NV	-20	40000.00	7.662835	20	PASS
			NV	-10	40000.00	7.662835	20	PASS
			NV	0	40000.00	7.662835	20	PASS
			NV	10	40000.00	7.662835	20	PASS
			NV	20	40000.00	7.662835	20	PASS
			NV	30	40000.00	7.662835	20	PASS
			NV	40	40000.00	7.662835	20	PASS
			NV	50	40000.00	7.662835	20	PASS
			NV	50	40000.00	7.662835	20	PASS
		5240	NV	-30	40000.00	7.633588	20	PASS
			NV	-20	40000.00	7.633588	20	PASS
			NV	-10	40000.00	7.633588	20	PASS
			NV	0	40000.00	7.633588	20	PASS
			NV	10	40000.00	7.633588	20	PASS
			NV	20	40000.00	7.633588	20	PASS
			NV	30	40000.00	7.633588	20	PASS
			NV	40	40000.00	7.633588	20	PASS
			NV	50	40000.00	7.633588	20	PASS
			NV	50	40000.00	7.633588	20	PASS
		5745	NV	-30	40000.00	6.962576	20	PASS
			NV	-20	40000.00	6.962576	20	PASS
			NV	-10	40000.00	6.962576	20	PASS
			NV	0	40000.00	6.962576	20	PASS
			NV	10	40000.00	6.962576	20	PASS
			NV	20	40000.00	6.962576	20	PASS
			NV	30	40000.00	6.962576	20	PASS
			NV	40	40000.00	6.962576	20	PASS
			NV	50	40000.00	6.962576	20	PASS
			NV	50	40000.00	6.962576	20	PASS
		5785	NV	-30	40000.00	6.914434	20	PASS
			NV	-20	40000.00	6.914434	20	PASS
			NV	-10	40000.00	6.914434	20	PASS
			NV	0	40000.00	6.914434	20	PASS
			NV	10	40000.00	6.914434	20	PASS
			NV	20	40000.00	6.914434	20	PASS
			NV	30	40000.00	6.914434	20	PASS
			NV	40	40000.00	6.914434	20	PASS
			NV	50	40000.00	6.914434	20	PASS
			NV	50	40000.00	6.914434	20	PASS
		5825	NV	-30	40000.00	6.866953	20	PASS
			NV	-20	40000.00	6.866953	20	PASS
			NV	-10	40000.00	6.866953	20	PASS
			NV	0	40000.00	6.866953	20	PASS
			NV	10	40000.00	6.866953	20	PASS
			NV	20	40000.00	6.866953	20	PASS
			NV	30	40000.00	6.866953	20	PASS
			NV	40	40000.00	6.866953	20	PASS



			NV	50	40000.00	6.866953	20	PASS
11N40SISO	Ant1	5190	NV	-30	40000.00	7.707129	20	PASS
			NV	-20	40000.00	7.707129	20	PASS
			NV	-10	40000.00	7.707129	20	PASS
			NV	0	40000.00	7.707129	20	PASS
			NV	10	40000.00	7.707129	20	PASS
			NV	20	40000.00	7.707129	20	PASS
			NV	30	40000.00	7.707129	20	PASS
			NV	40	40000.00	7.707129	20	PASS
			NV	50	40000.00	7.707129	20	PASS
		5230	NV	-30	40000.00	7.648184	20	PASS
			NV	-20	40000.00	7.648184	20	PASS
			NV	-10	40000.00	7.648184	20	PASS
			NV	0	40000.00	7.648184	20	PASS
			NV	10	40000.00	7.648184	20	PASS
			NV	20	40000.00	7.648184	20	PASS
			NV	30	40000.00	7.648184	20	PASS
			NV	40	40000.00	7.648184	20	PASS
			NV	50	40000.00	7.648184	20	PASS
		5755	NV	-30	40000.00	6.950478	20	PASS
			NV	-20	40000.00	6.950478	20	PASS
			NV	-10	40000.00	6.950478	20	PASS
			NV	0	40000.00	6.950478	20	PASS
			NV	10	40000.00	6.950478	20	PASS
			NV	20	40000.00	6.950478	20	PASS
			NV	30	40000.00	6.950478	20	PASS
			NV	40	40000.00	6.950478	20	PASS
			NV	50	40000.00	6.950478	20	PASS
		5795	NV	-30	40000.00	6.902502	20	PASS
			NV	-20	40000.00	6.902502	20	PASS
			NV	-10	40000.00	6.902502	20	PASS
			NV	0	40000.00	6.902502	20	PASS
			NV	10	40000.00	6.902502	20	PASS
			NV	20	40000.00	6.902502	20	PASS
			NV	30	40000.00	6.902502	20	PASS
			NV	40	40000.00	6.902502	20	PASS
			NV	50	40000.00	6.902502	20	PASS

11 Test Setup

Conducted Emissions



Radiated Spurious Emissions From 30MHz-1000MHz



Test frequency from Above 1GHz






12 EUT PHOTOS












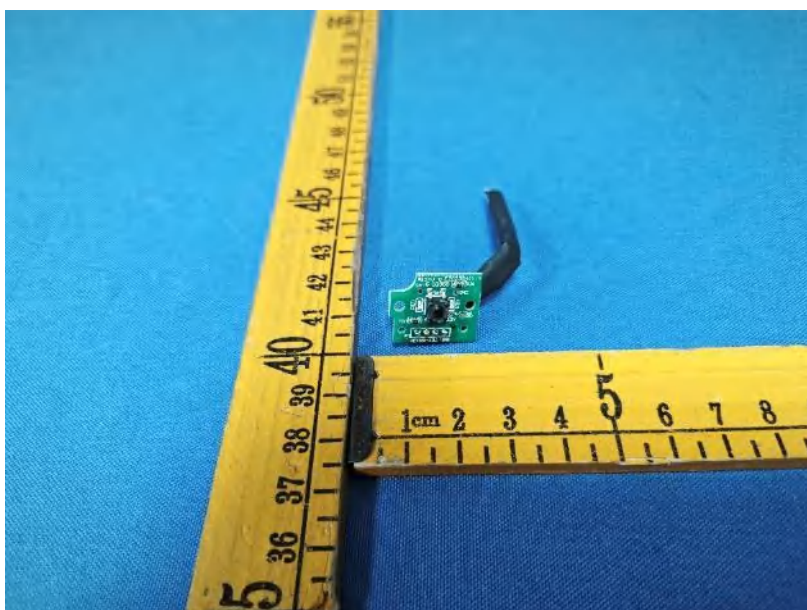


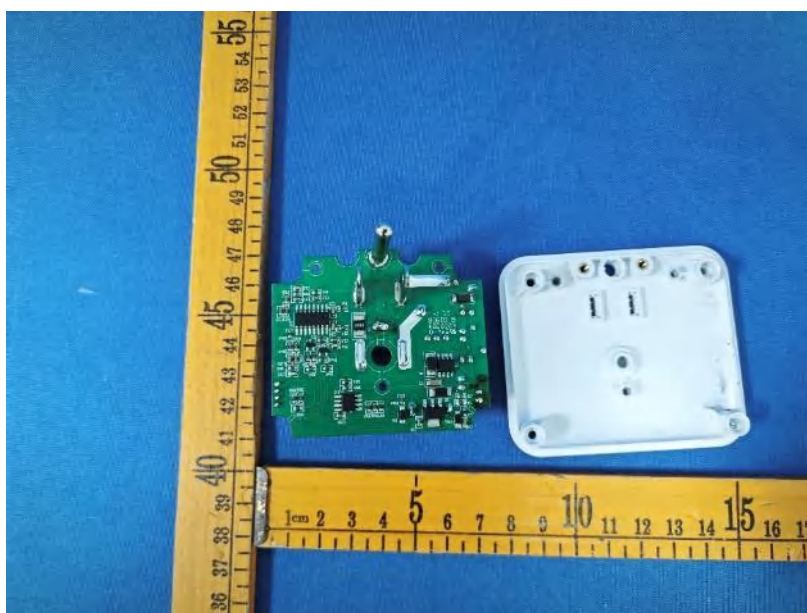
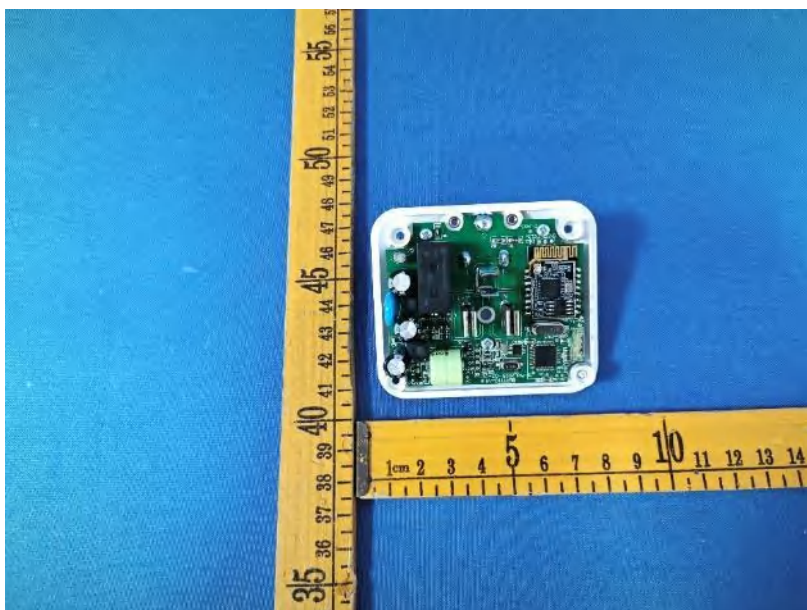


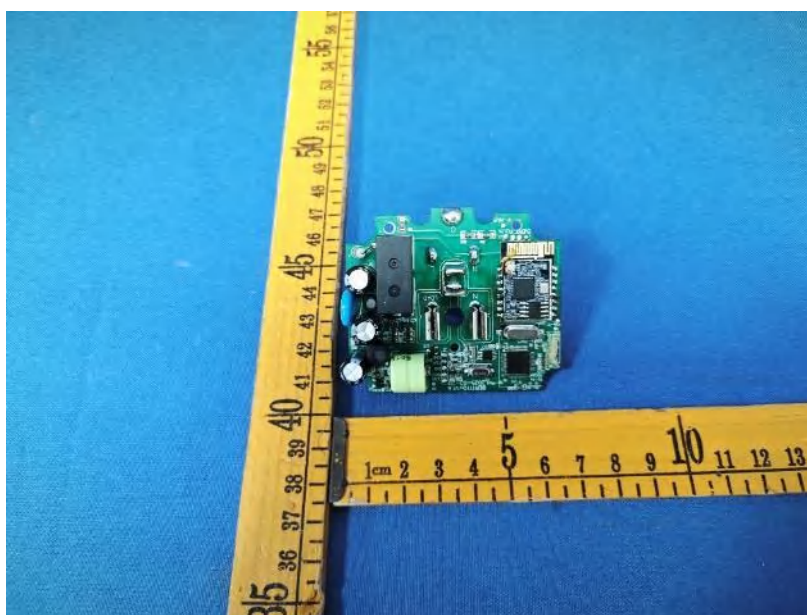
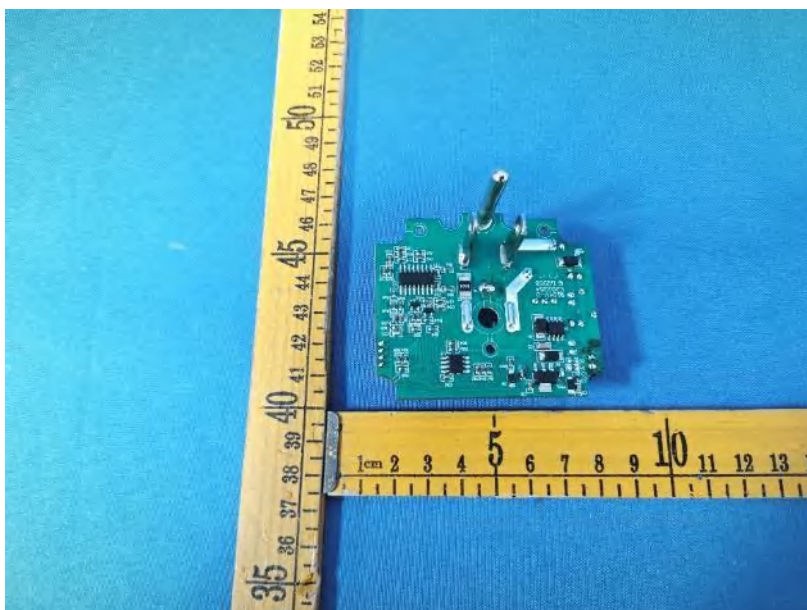





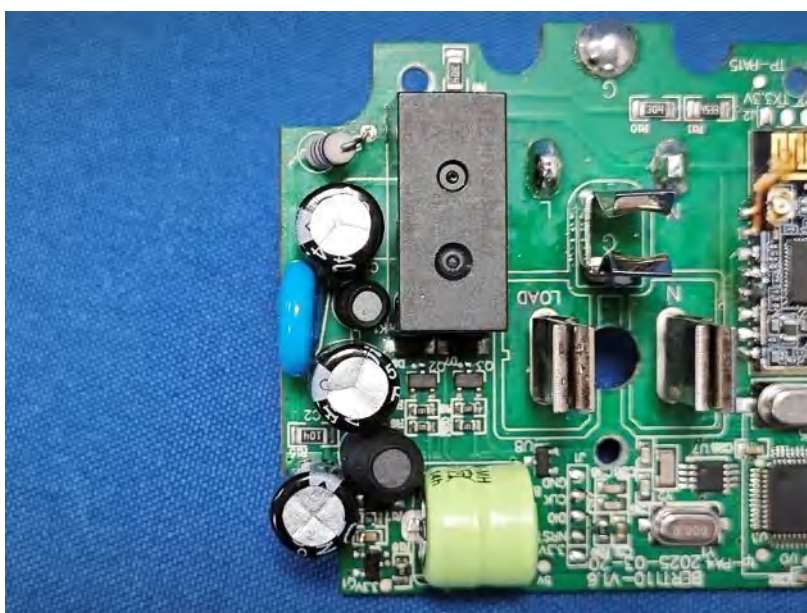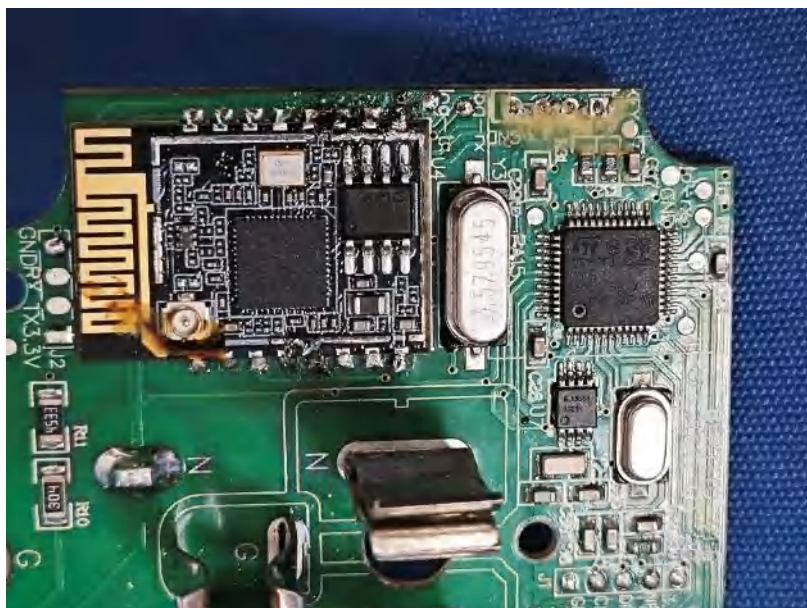


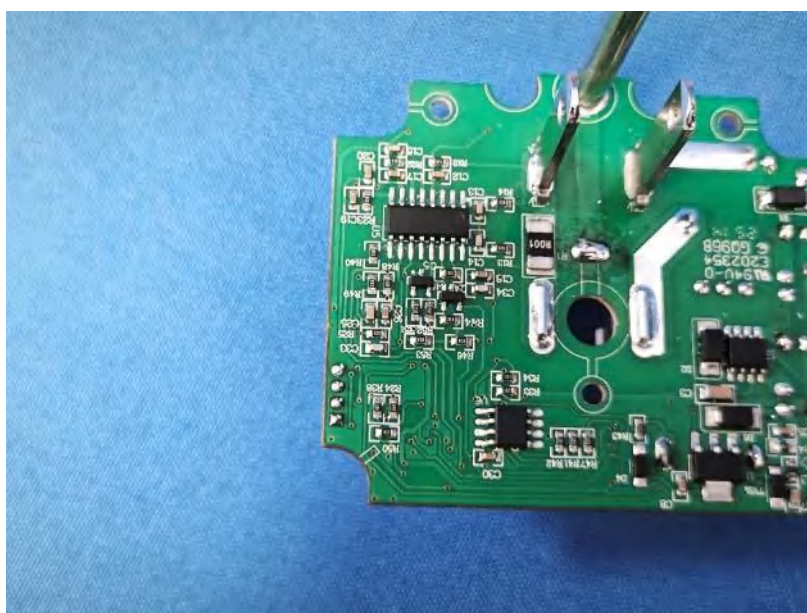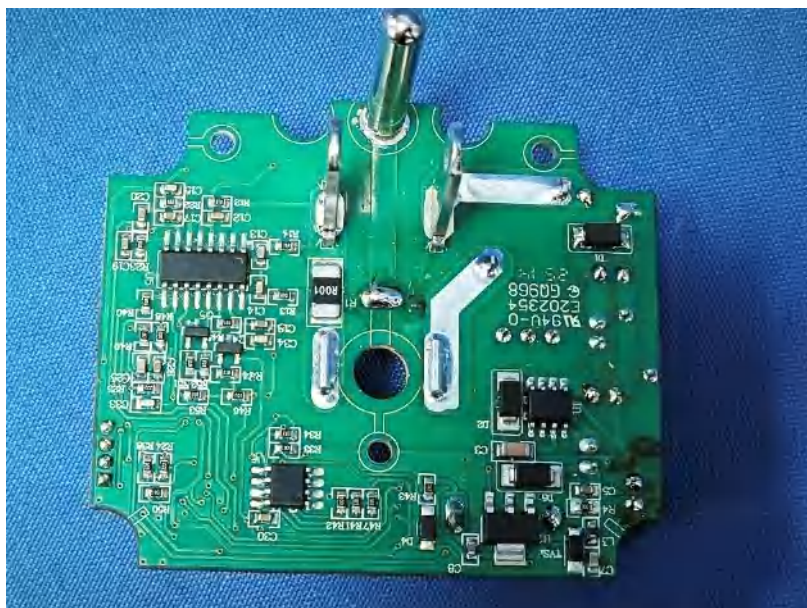

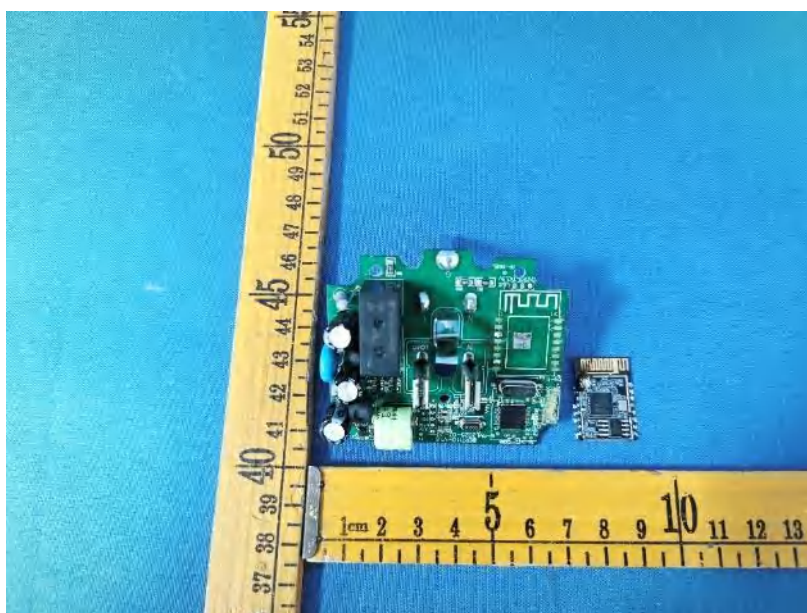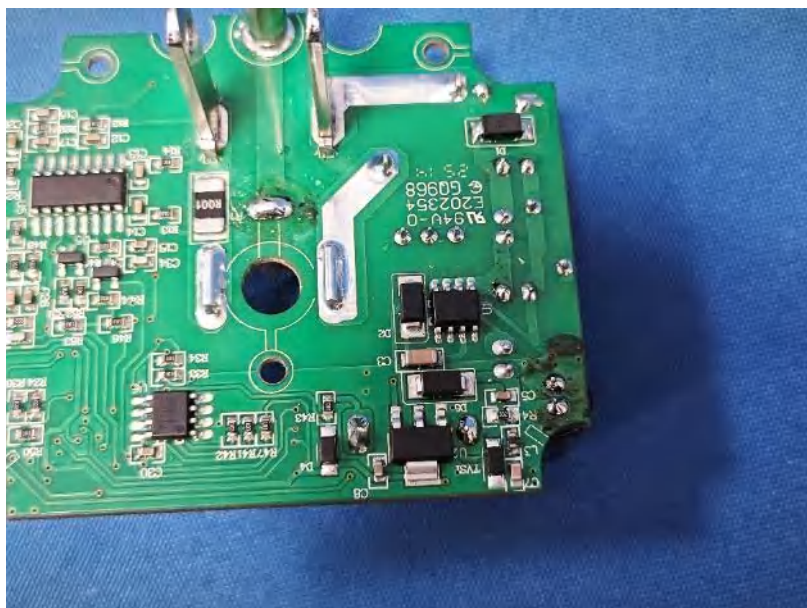

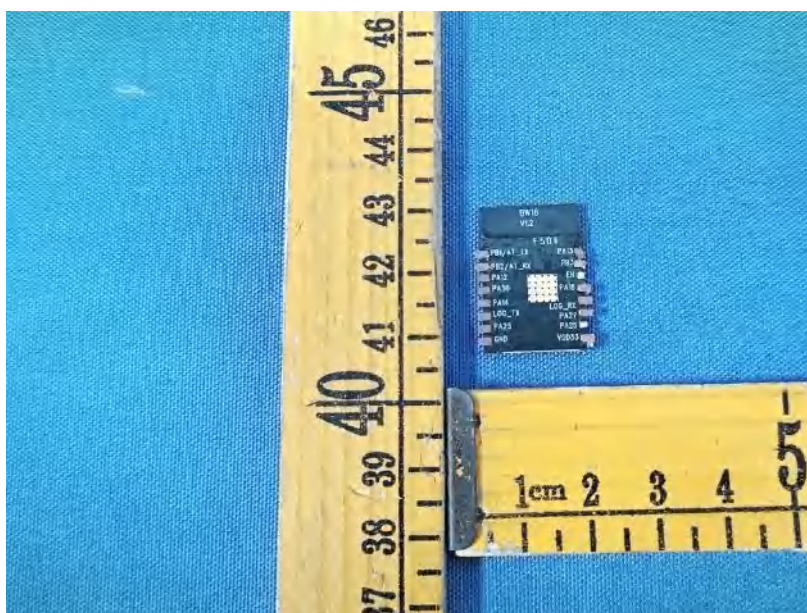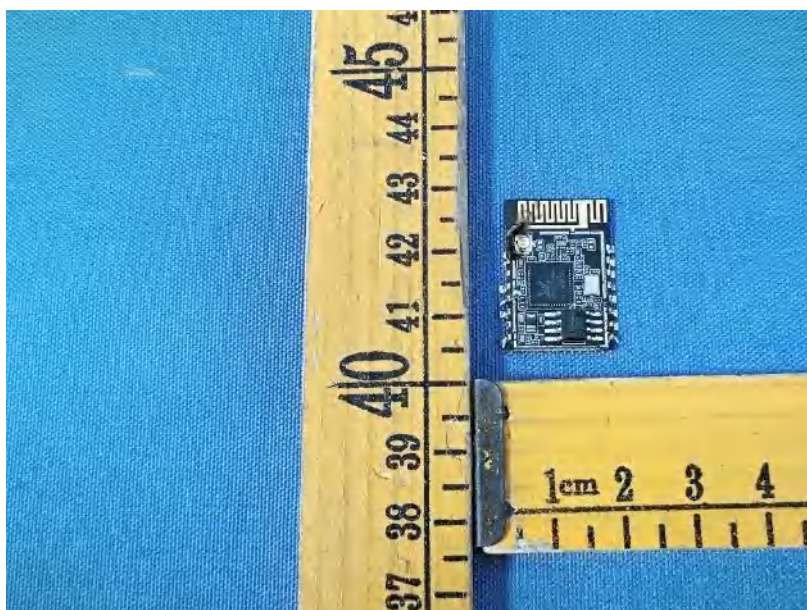

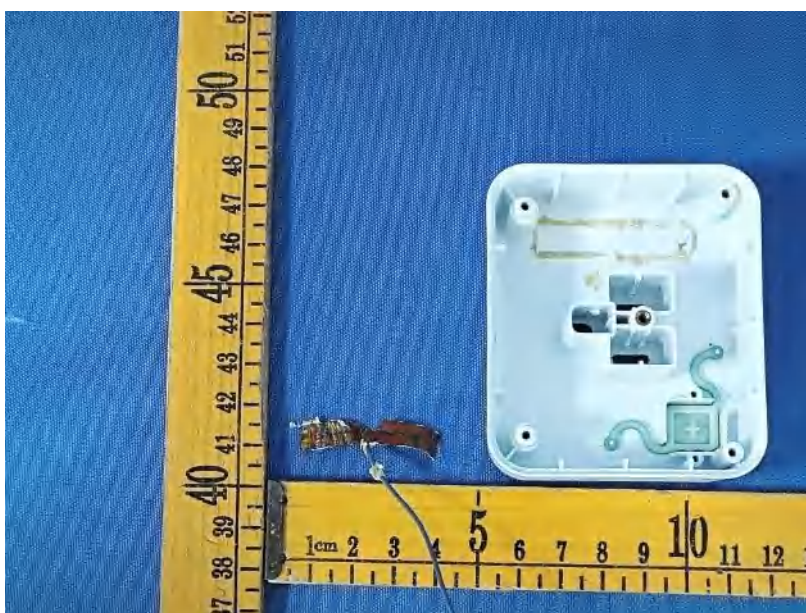

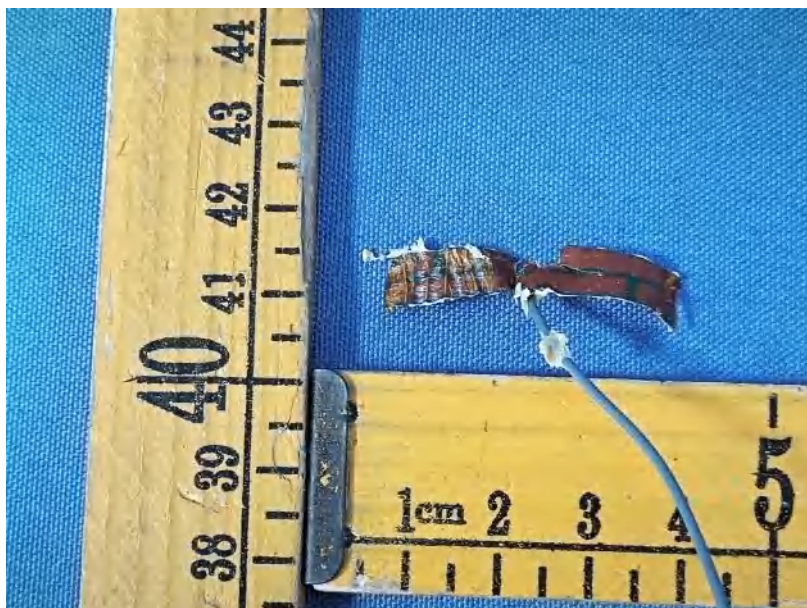

*****THE END REPORT*****