


## Product specification

### Quick Reference Date

|                            |                                    |  |
|----------------------------|------------------------------------|--|
|                            | Antenna module on the system board |  |
| Frequenc Range             | 2402 ~ 2480MHz                     |  |
| Ant. Port Input Pwr. (dBm) | 0 (Typ. BT class 2 output power)   |  |
| Tot. Rad. Pwr. (dBm)       | -1.35 (Input pwr – loss pwr)       |  |
| Peak EIRP(dBm)             | 1.35                               |  |
| Directivity (dBi)          | 1 (all direction antenna)          |  |
| Efficiency (dB)            | 6 0.2 %                            |  |
| Gain (dBi)                 | -0.52 (Avg Gain XY-plane)          |  |
| Maximum Gain (dBi)         | 1.68 (XZ-plane)                    |  |
| Minimum Gain (dBi)         | -0.48 (XY-plane)                   |  |
| Avg. Gain (dBi)            | -0.435(XY-plane)                   |  |
| Input Impedence(ohm)       | 50                                 |  |
| Polarization Type          | V ertical & H orizontal            |  |
| V . S .W . R               | < 1.4                              |  |

All the technical data and information contained herein are subject to change without prior notice

### Antenna Layout & module on the system board

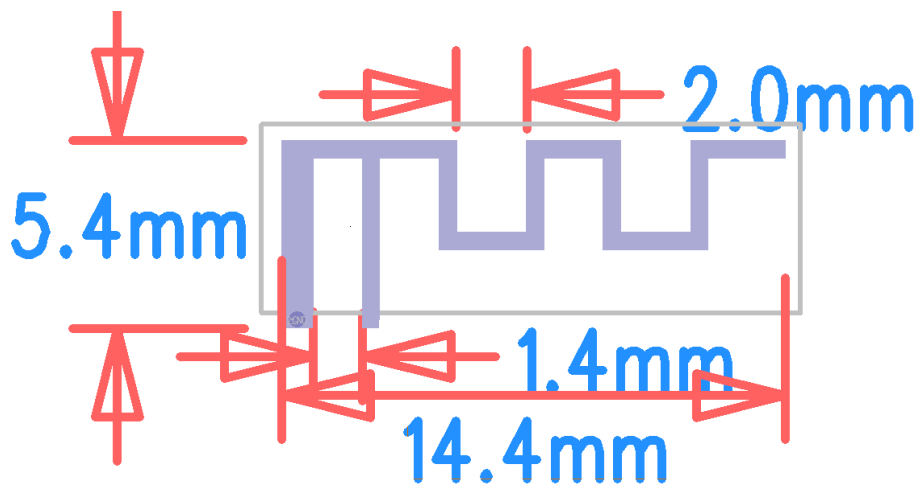


### Antenna Gain



Gain Table

| Unit in dBi @2.44GHz | XY-plane |       | XZ-plane |       | YZ-plane |       | Efficiency |
|----------------------|----------|-------|----------|-------|----------|-------|------------|
|                      | Peak     | Avg.  | Peak     | Avg.  | Peak     | Avg.  |            |
| Module Board         | 1.35     | -0.48 | 1.68     | -3.83 | 1.11     | -2.99 | 6 0.2 %    |


Return Loss

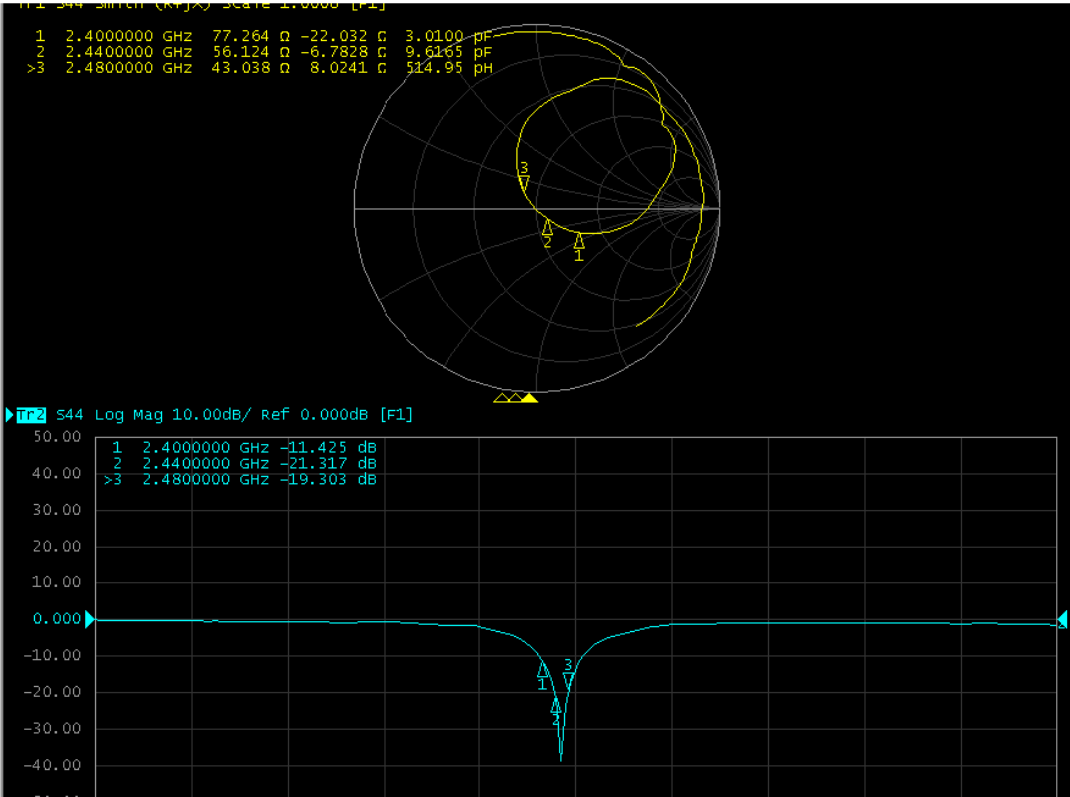


## The Environment of Antenna Radiation Pattern

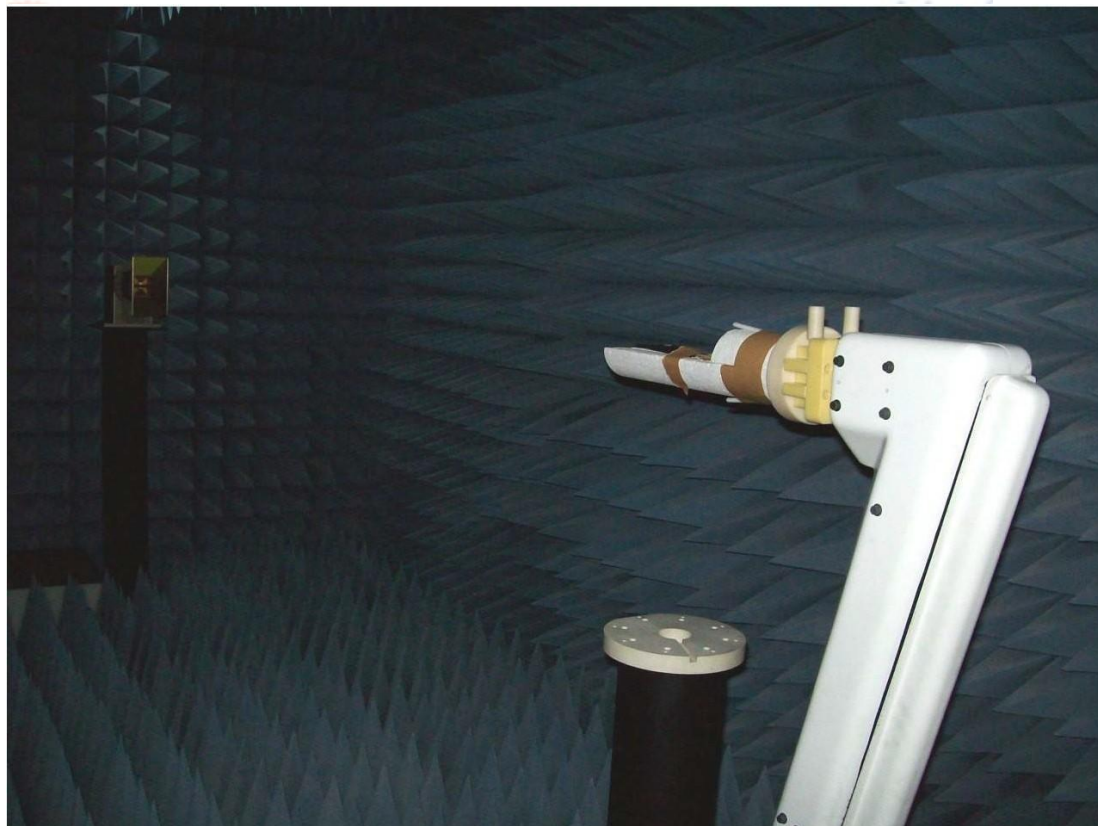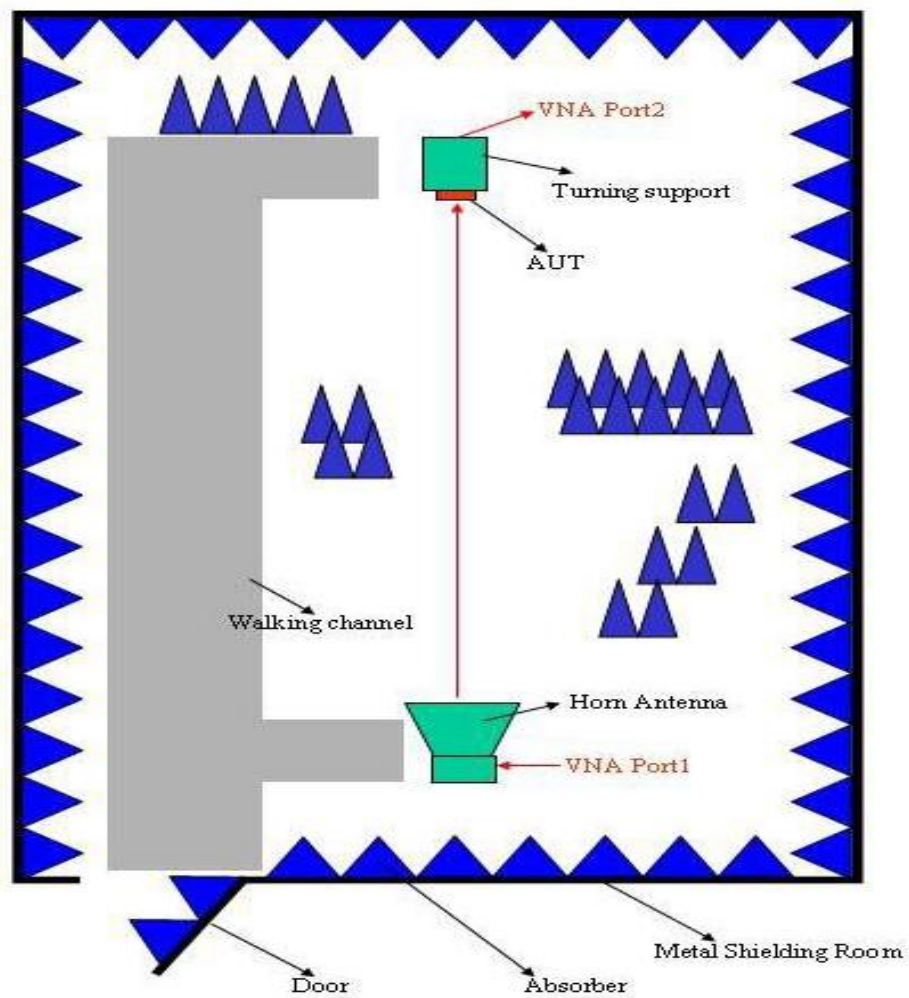


# 3D radiation pattern diagram

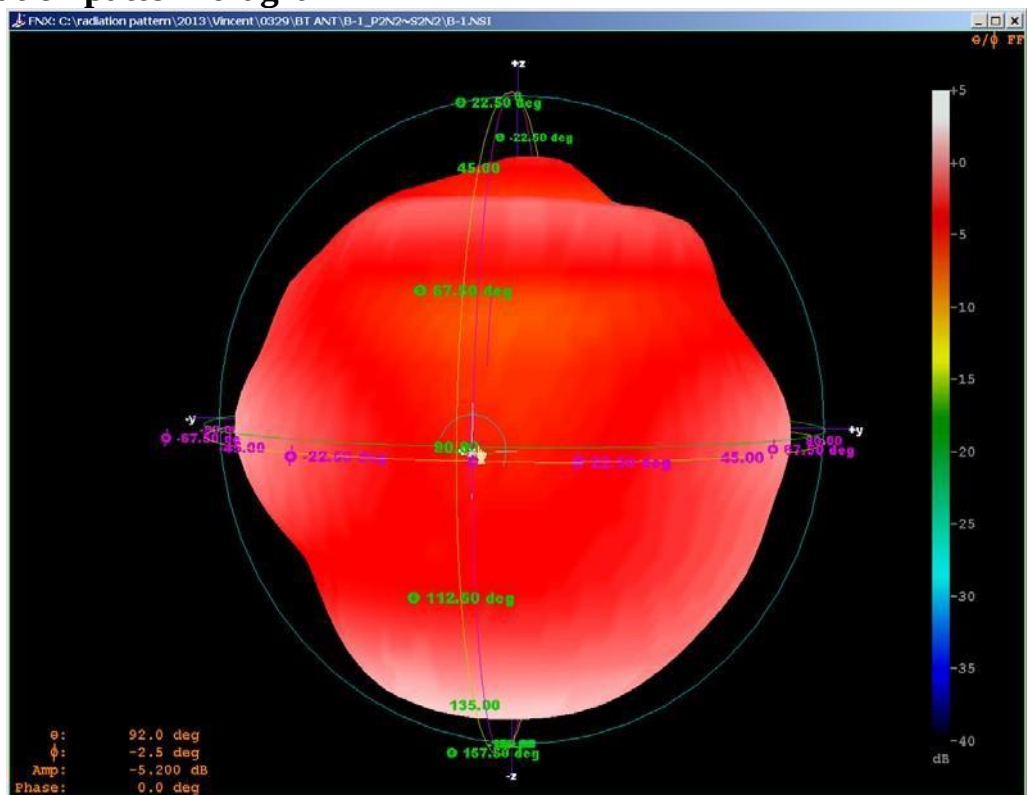

## XY-plane

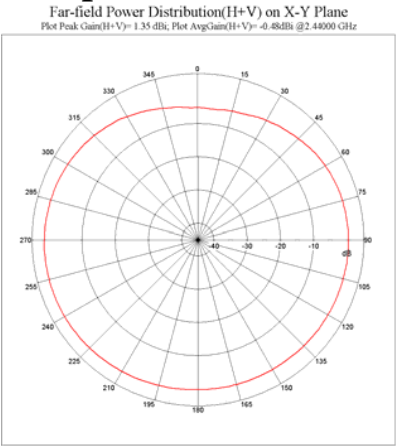

## XZ-plane

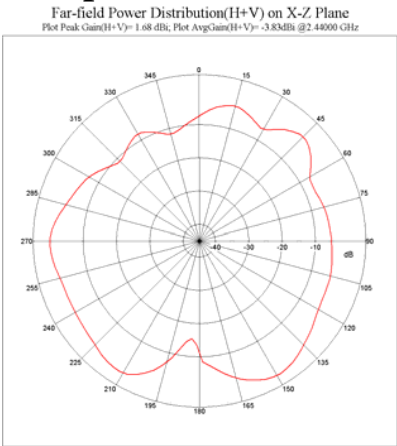

## YZ-plane

