



FCC Radio Test Report

FCC ID: 2BOS5AP9720

This report concerns: Original Grant

Project No. : 2502C254
Equipment : Wireless LAN Access Point
Brand Name : Aicheng
Test Model : AP9720
Series Model : N/A
Applicant : Zhejiang Aicheng Technology Development Co., Ltd.
Address : Room 427, 4th Floor, Building 3, No. 969 Wenyixi West Rd, Wuchang Street, Yuhang District, Hangzhou City, Zhejiang Province, China.
Manufacturer : Zhejiang Aicheng Technology Development Co., Ltd.
Address : Room 427, 4th Floor, Building 3, No. 969 Wenyixi West Road, Wuchang Street, Yuhang District, Hangzhou City, Zhejiang Province, China.
Factory : Joy Technology (ShenZhen) Corporation
Address : HengKeng Ind., Shangpai, Shangwu, Aiqun Rd., Shiyuan Town, Shenzhen 518108 China
Date of Receipt : Apr. 02, 2025
Date of Test : Apr. 07, 2025 ~ Jun. 23, 2025
Issued Date : Jul. 09, 2025
Report Version : R00
Test Sample : Engineering Sample No.: DG20250402120 for conducted, DG20250402121 for radiated.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Evan Yang
Evan Yang

Approved by : Chay . Cai
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	13
3.4 DUTY CYCLE	14
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
3.6 SUPPORT UNITS	17
3.7 CUSTOMER INFORMATION DESCRIPTION	18
4 . AC POWER LINE CONDUCTED EMISSIONS	19
4.1 LIMIT	19
4.2 TEST PROCEDURE	19
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	20
4.5 EUT OPERATION CONDITIONS	20
4.6 TEST RESULTS	20
5 . RADIATED EMISSIONS	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM TEST STANDARD	23
5.4 TEST SETUP	23
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	25
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	25
5.8 TEST RESULTS - ABOVE 1000 MHZ	25
6 . BANDWIDTH	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULTS	26
7 . MAXIMUM OUTPUT POWER	27
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM STANDARD	27
7.4 TEST SETUP	27
7.5 EUT OPERATION CONDITIONS	27
7.6 TEST RESULTS	27
8 . CONDUCTED SPURIOUS EMISSIONS	28
8.1 LIMIT	28
8.2 TEST PROCEDURE	28
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULTS	29
9 . POWER SPECTRAL DENSITY	30
9.1 LIMIT	30
9.2 TEST PROCEDURE	30
9.3 DEVIATION FROM STANDARD	30
9.4 TEST SETUP	30
9.5 EUT OPERATION CONDITIONS	30
9.6 TEST RESULTS	30
10 . MEASUREMENT INSTRUMENTS LIST	31
11 . EUT TEST PHOTO	34
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	40
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	43
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	48
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	51
APPENDIX E - BANDWIDTH	78
APPENDIX F - MAXIMUM OUTPUT POWER	83

Table of Contents	Page
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	88
APPENDIX H - POWER SPECTRAL DENSITY	97

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2502C254	R00	Original Report.	Jul. 09, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

For radiated emissions 1GHz-18GHz:

The test facilities used to collect the test data in this report is at the location of Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For others:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB03	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	55%	AC 120V/60Hz	Hayden Chen	May 23, 2025
Radiated Emissions -9kHz to 30 MHz	25°C	63%	AC 120V/60Hz	Hayden Chen	Apr. 29, 2025
Radiated Emissions -30MHz to 1000MHz	23°C	52%	AC 120V/60Hz	Calvin Wen	May 14, 2025
Radiated Emissions -Above 1GHz-18GHz	22-23°C	44-50%	AC 120V/60Hz	Allen Tong	May 06, 2025 Jun. 11, 2025
Radiated Emissions -Above 18GHz	21°C	51%	AC 120V/60Hz	Allen Tong	Apr. 27, 2025
Bandwidth	20°C	50%	PoE 48V	Arvin Tong	May 07, 2025
Maximum Output Power	23-25°C	53-60%	PoE 48V	Alex Yin	Apr. 24, 2025~ Jun. 13, 2025
Conducted Spurious Emissions	20°C	50%	PoE 48V	Arvin Tong	May 07, 2025
Power Spectral Density	20°C	50%	PoE 48V	Arvin Tong	May 07, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless LAN Access Point
Brand Name	Aicheng
Test Model	AP9720
Series Model	N/A
Model Difference(s)	N/A
Hardware Version	R02
Software Version	2.0.88-R-20250320.1606
Power Source	DC Voltage supplied from DC adapter (support unit) or supplied from PoE port.
Power Rating	PoE 48V \equiv 0.5A or DC 12V \equiv 2A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Technology	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps IEEE 802.11be: up to 688 Mbps
Maximum Output Power	IEEE 802.11b: 24.09 dBm (0.2564 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20) , IEEE 802.11be(EHT20)							
CH03 - CH09 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40), IEEE 802.11be(EHT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452	X	

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	Angeei	MD246001-01	PIFA	IPEX	4.1
2	Angeei	MD246001-01	PIFA	IPEX	4.1

Note:

- 1) This EUT supports CDD, and Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=4.1.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 4.1 + 10\log(2/1)\text{dBi} = 7.11$.
Then, the power spectral density limit is $8 - (7.11 - 6) = 6.89$.

4. Table for Antenna Configuration:

Operating Mode TX Mode	2TX
IEEE 802.11b	V(Ant. 1 + Ant. 2)
IEEE 802.11g	V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)	V(Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)	V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)	V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)	V(Ant. 1 + Ant. 2)

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX AX(HE20) Mode Channel 01/06/11
Mode 4	TX AX(HE40) Mode Channel 03/06/09
Mode 5	TX B Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test

Final Test Mode	Description
Mode 5	TX B Mode Channel 06

Radiated emissions test - Below 1GHz & Above 18 GHz

Final Test Mode	Description
Mode 5	TX B Mode Channel 06

Radiated emissions test - 1 GHz - 18 GHz

Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX AX(HE20) Mode Channel 01/06/11
Mode 4	TX AX(HE40) Mode Channel 03/06/09

Conducted test

Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX AX(HE20) Mode Channel 01/06/11
Mode 4	TX AX(HE40) Mode Channel 03/06/09

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11b Mode Channel 06 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (5) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.
- (6) IEEE 802.11ax mode and IEEE 802.11be mode only supports full RU, so only the full RU is evaluated and measured inside report.
- (7) HE20/HE40 covers HT20/HT40 and EHT20/EHT40, due to same modulation (in full RU). The power setting for 802.11n HT20/HT40 and 802.11be EHT20/EHT40 are the same or lower than 802.11ax HE20/HE40.

3.3 PARAMETERS OF TEST SOFTWARE

Test Software Version	IPOP_V4.0		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	20.5	20.5	20.5
IEEE 802.11g	18	20.5	17.5
IEEE 802.11ax(HE20)	17	20.5	16.5
Frequency (MHz)	2422	2437	2452
IEEE 802.11ax(HE40)	13	19.5	20.5


3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.


802.11b

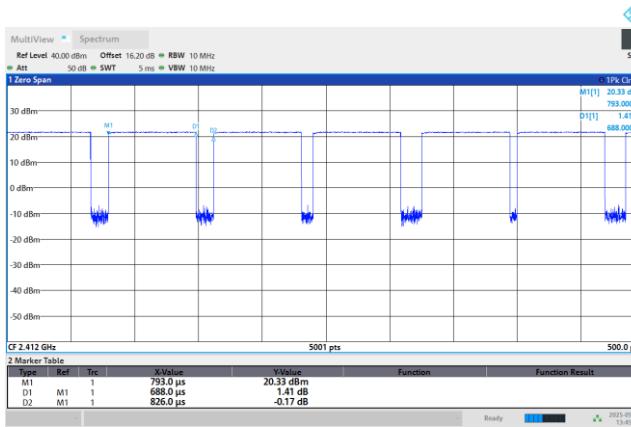

01:45:32 PM 05/07/2025

Duty cycle = $0.688 \text{ ms} / 0.826 \text{ ms} = 83.29\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.79 \text{ dB}$


802.11g

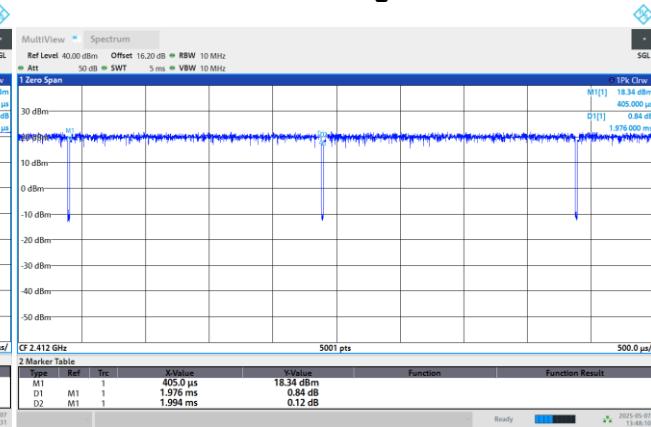

01:48:10 PM 05/07/2025

Duty cycle = $1.976 \text{ ms} / 1.994 \text{ ms} = 99.10\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$


802.11ax(HE20)

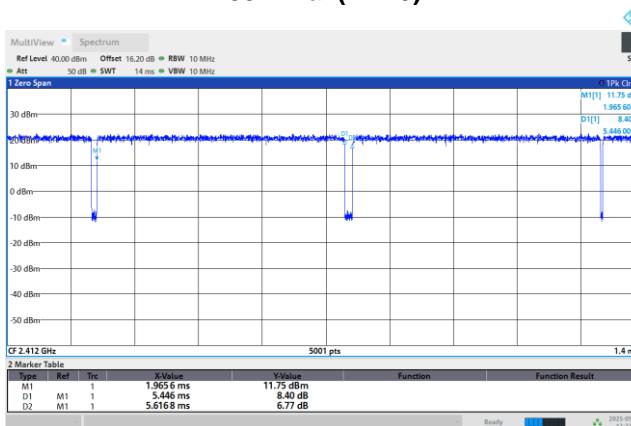

01:33:41 PM 05/07/2025

Duty cycle = $5.446 \text{ ms} / 5.617 \text{ ms} = 96.96\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.13 \text{ dB}$

802.11ax(HE40)

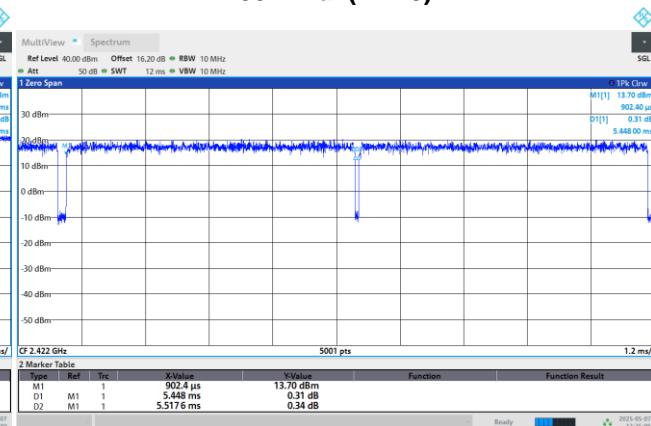

01:35:07 PM 05/07/2025

Duty cycle = $5.448 \text{ ms} / 5.518 \text{ ms} = 98.74\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1453 Hz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz.


For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz.


(Remark: The video bandwidth of the spectrum analyzer was set to 1kHz during the test.)

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC power line conducted emissions test

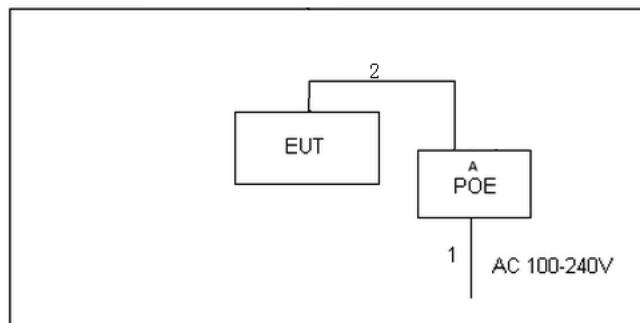

For Radiated emissions test - Below 1GHz & Above 18 GHz

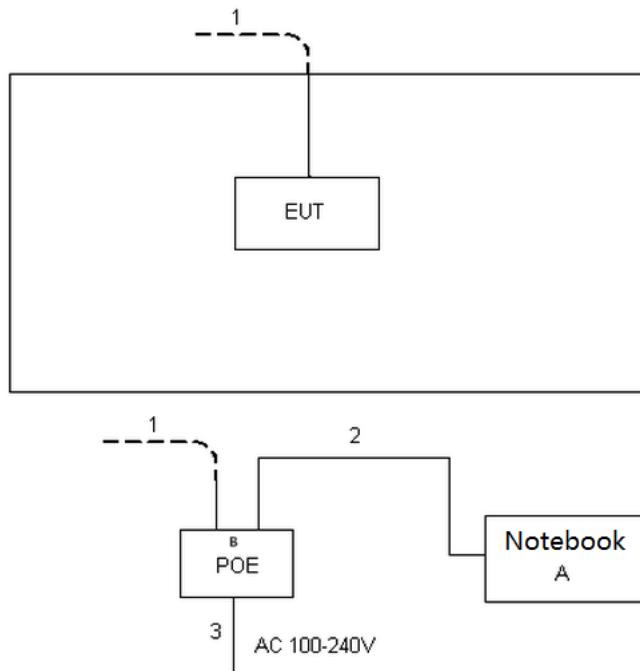

For Radiated emissions test 1 GHz - 18 GHz

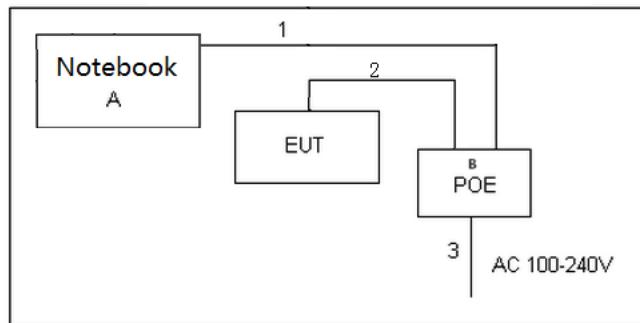

3.6 SUPPORT UNITS

For AC power line conducted emissions test

Item	Equipment	Brand	Model No.	Series No.
A	POE	tp-link	POE4824G	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
2	RJ45 Cable	NO	NO	1.5m
3	AC Cable	NO	NO	1.5m

For Radiated emissions test - Below 1GHz & Above 18 GHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A
B	POE	tp-link	POE4824G	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	10m
2	RJ45 Cable	NO	NO	1m
3	AC Cable	NO	NO	1.5m

For Radiated emissions test 1 GHz - 18 GHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A
B	POE	tp-link	POE4824G	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	1m
3	AC Cable	NO	NO	1.5m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value - Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

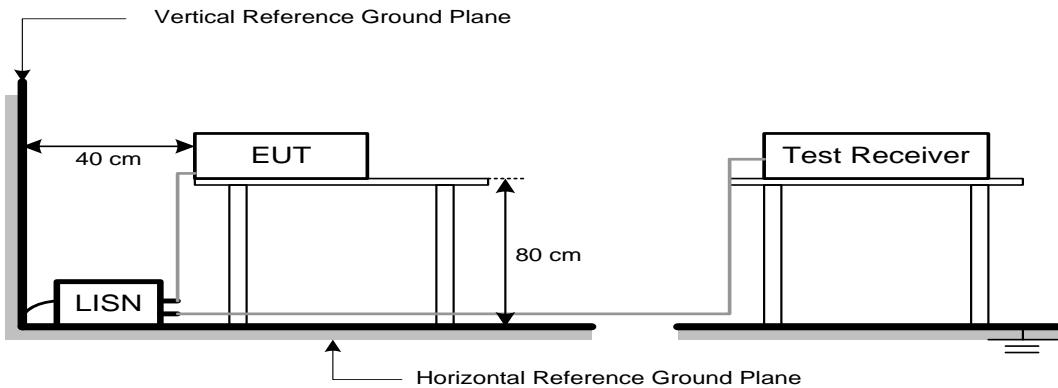

4.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) , then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dB μ V/m)		Harmonic at 1m (dB μ V/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

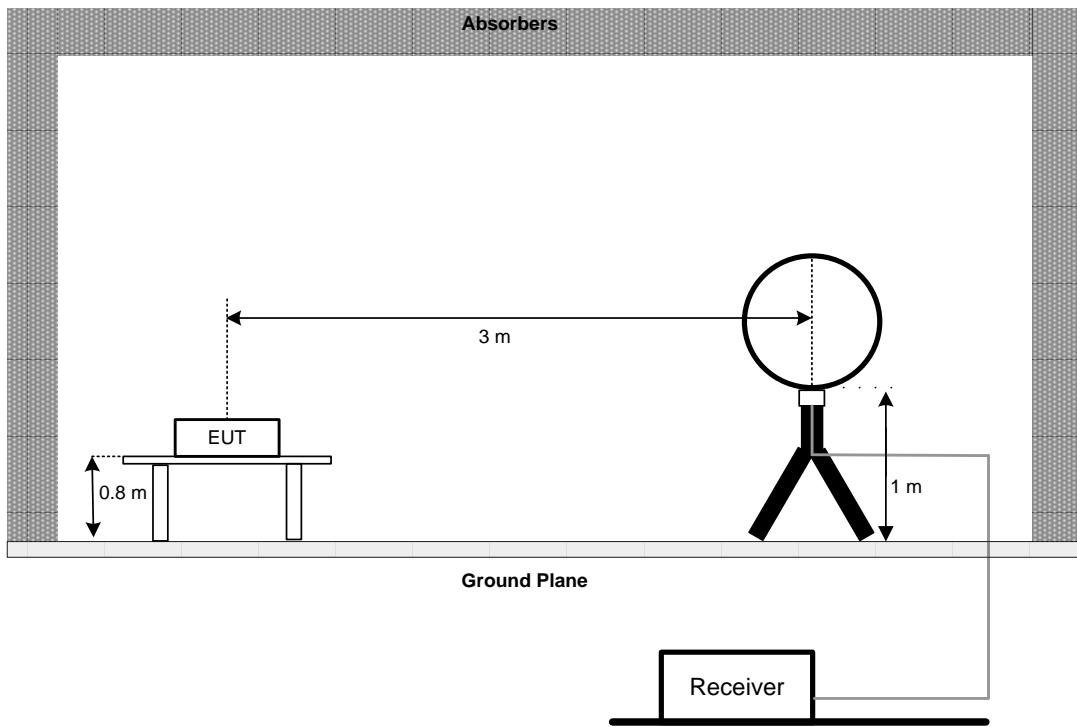


30 MHz to 1 GHz

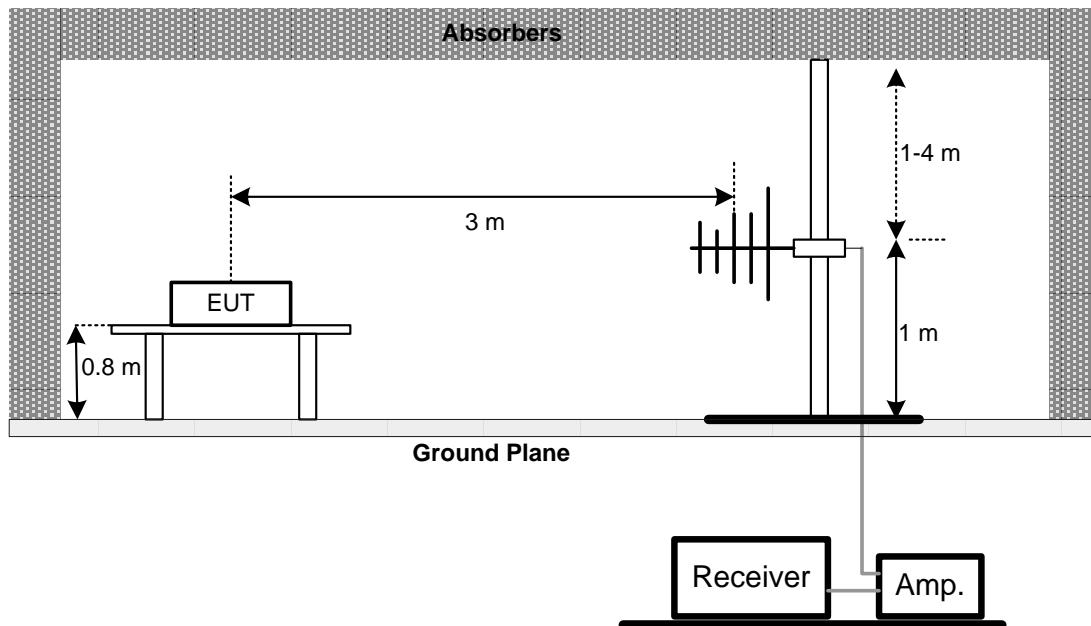

**Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)**

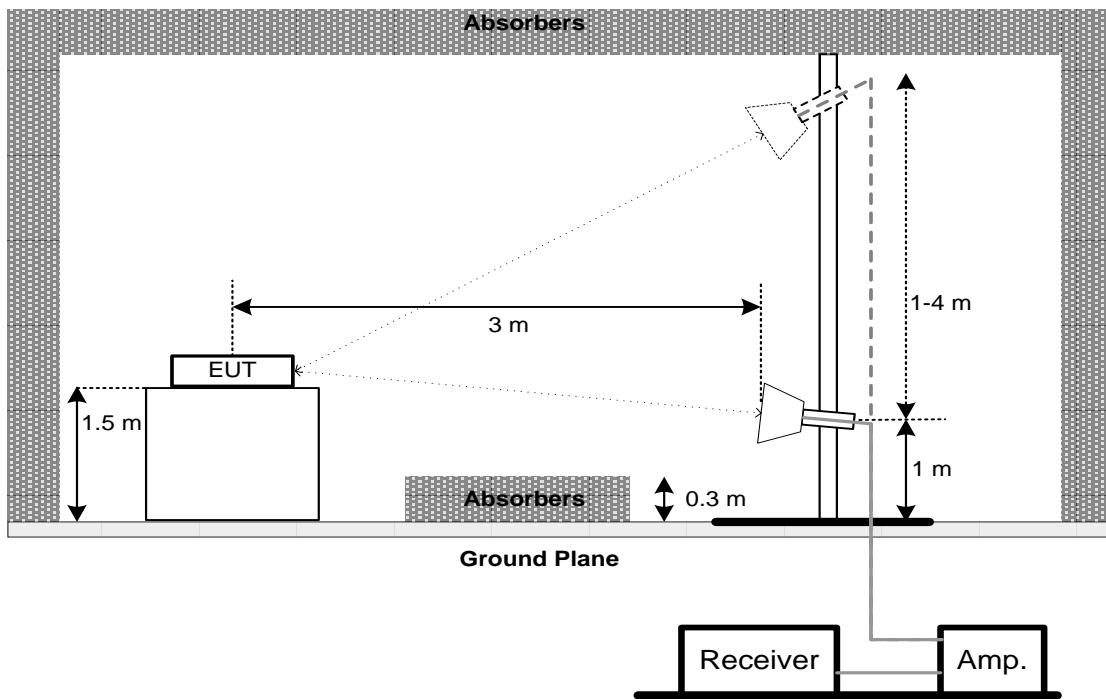

Harmonic(18 GHz to 26.5 GHz)

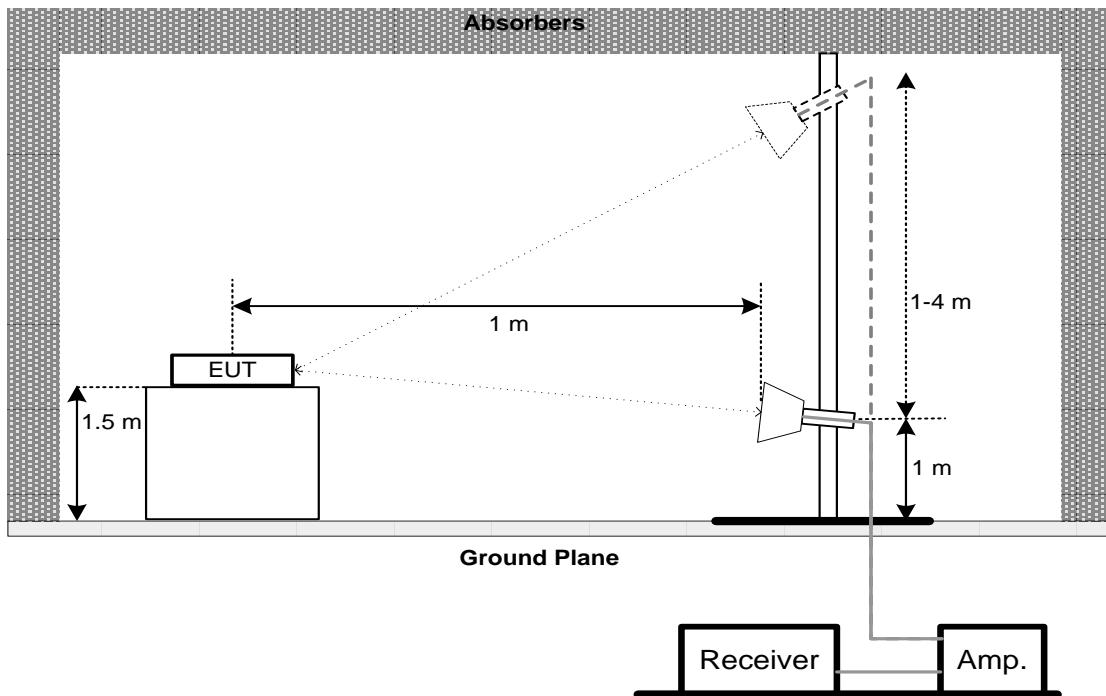

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

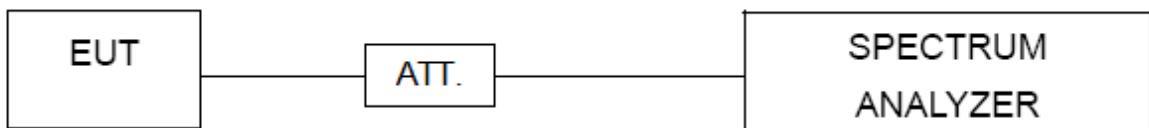

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The maximum conducted output power was performed in accordance with method 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

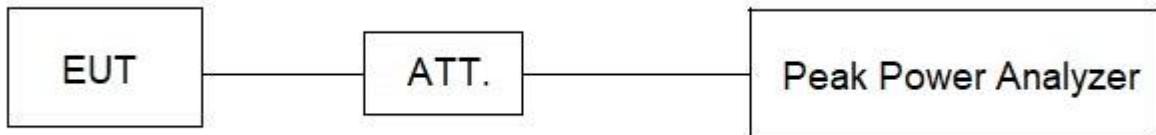

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSIONS

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. The following table is the setting of the spectrum analyzer:

For Reference Level:

Spectrum Parameters	Setting
Span	≥ 1.5 times the bandwidth.
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Band edge:

Spectrum Parameters	Setting
Start Frequency	2300 MHz
Stop Frequency	2690 MHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For Emission Level - Harmonic:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	1.5 times the DTS bandwidth
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 31, 2025
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 1 GHz - 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Apr. 06, 2026
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Apr. 06, 2026
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Apr. 06, 2026
7	966 Chamber room	ETS	RFD-100(SVSWR)	Q2179	Jan. 07, 2026
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 28, 2026
10	Filter	STI	STI15-9912	N/A	Oct. 29, 2025
11	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
3	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
5	966 Chamber room	CM	9*6*6	N/A	May 10, 2026
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
9	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
10	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
11	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025



Bandwidth & Conducted Spurious Emissions & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	FSV Signal & Spectrum Analyzer	R&S	FSV3044	101682	Oct. 17, 2025
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A



Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025 May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025 May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



11. EUT TEST PHOTO**AC Power Line Conducted Emissions Test Photos**

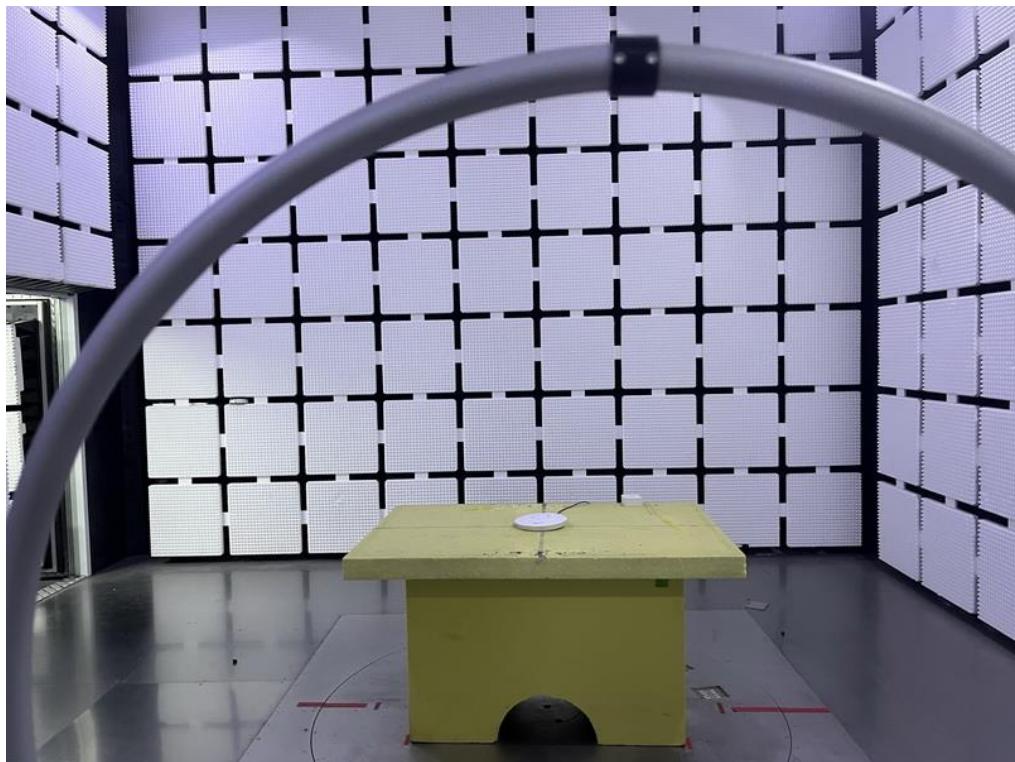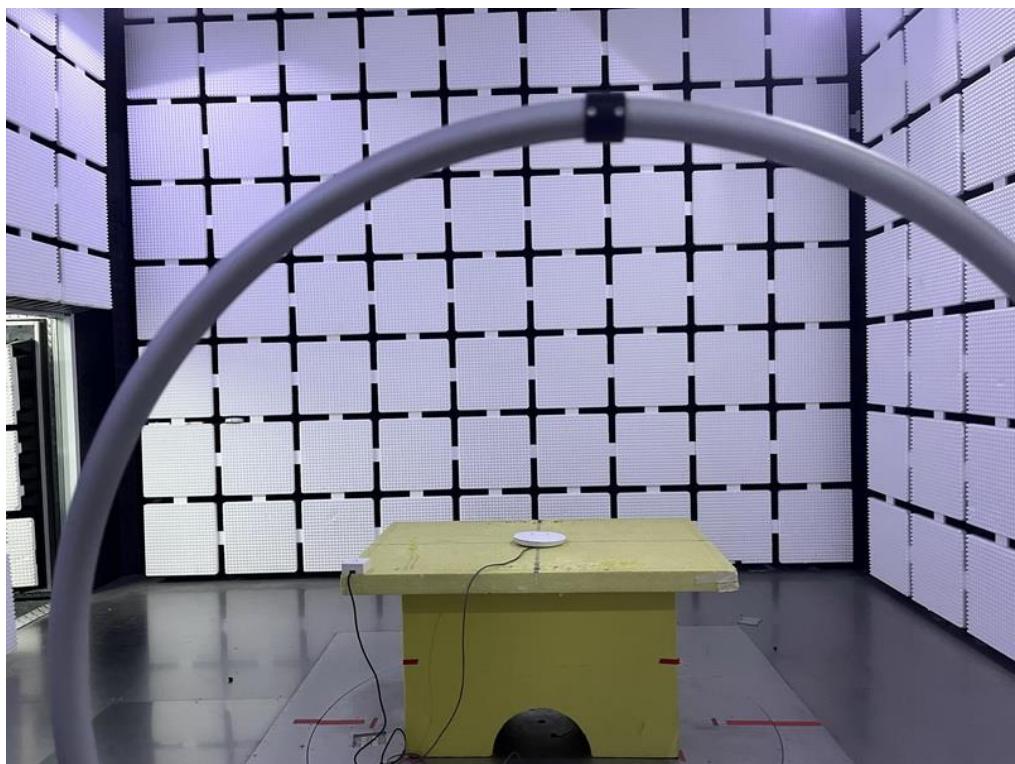Radiated Emissions Test Photos**9 kHz to 30 MHz**

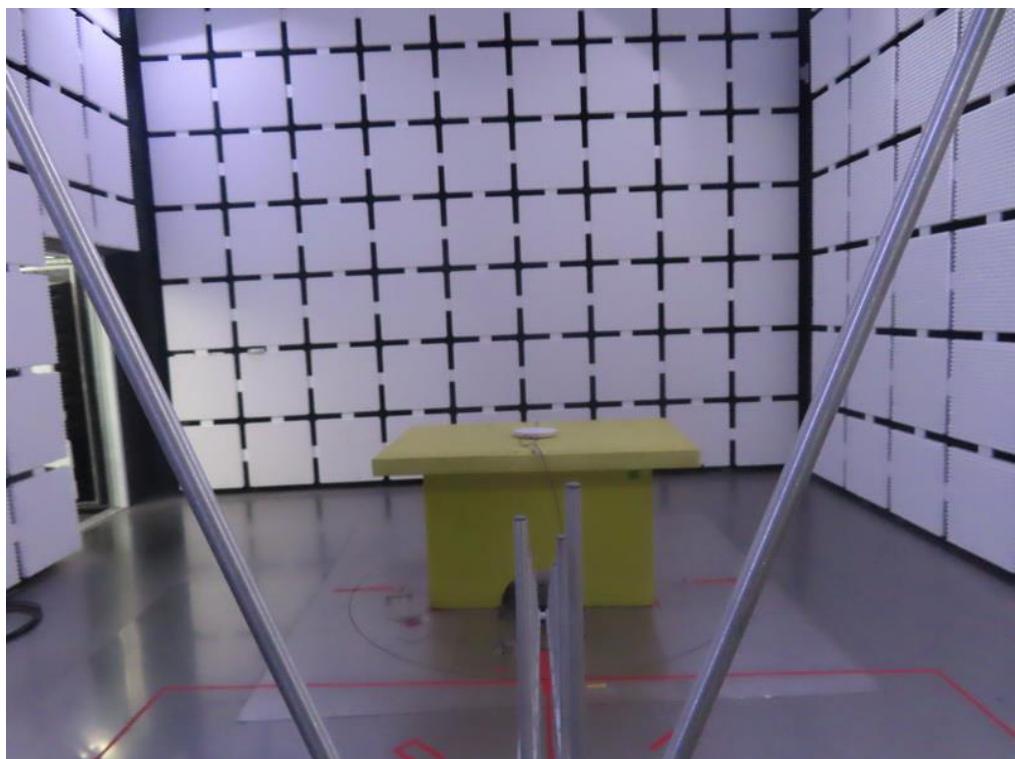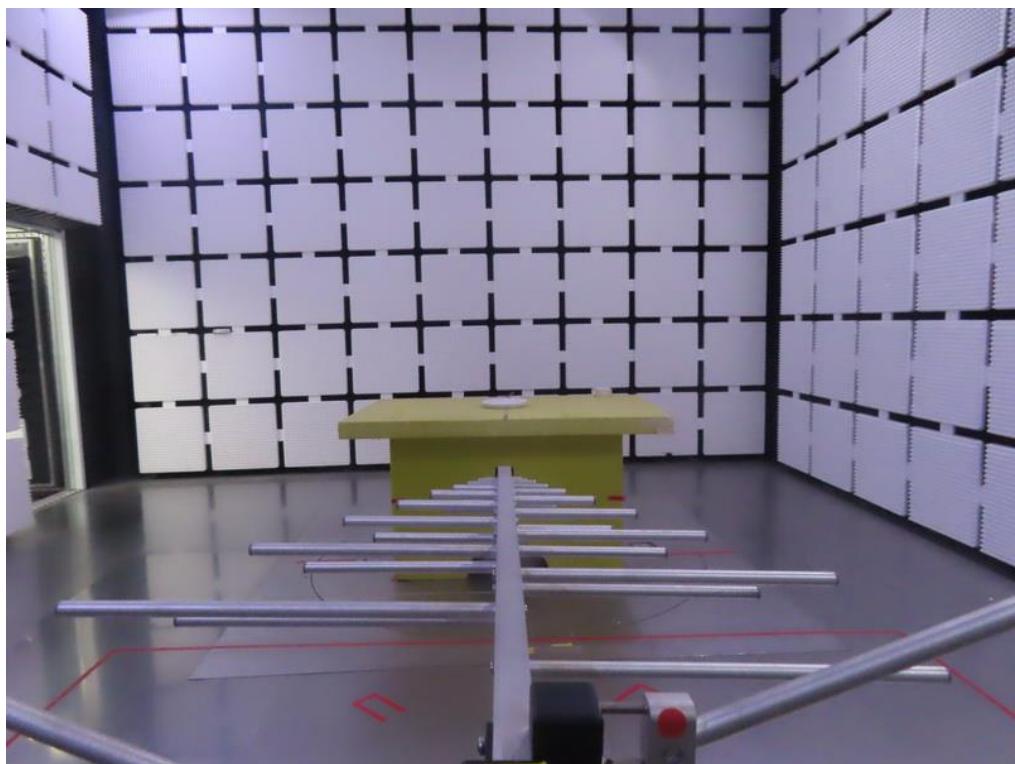Radiated Emissions Test Photos**30 MHz to 1 GHz**

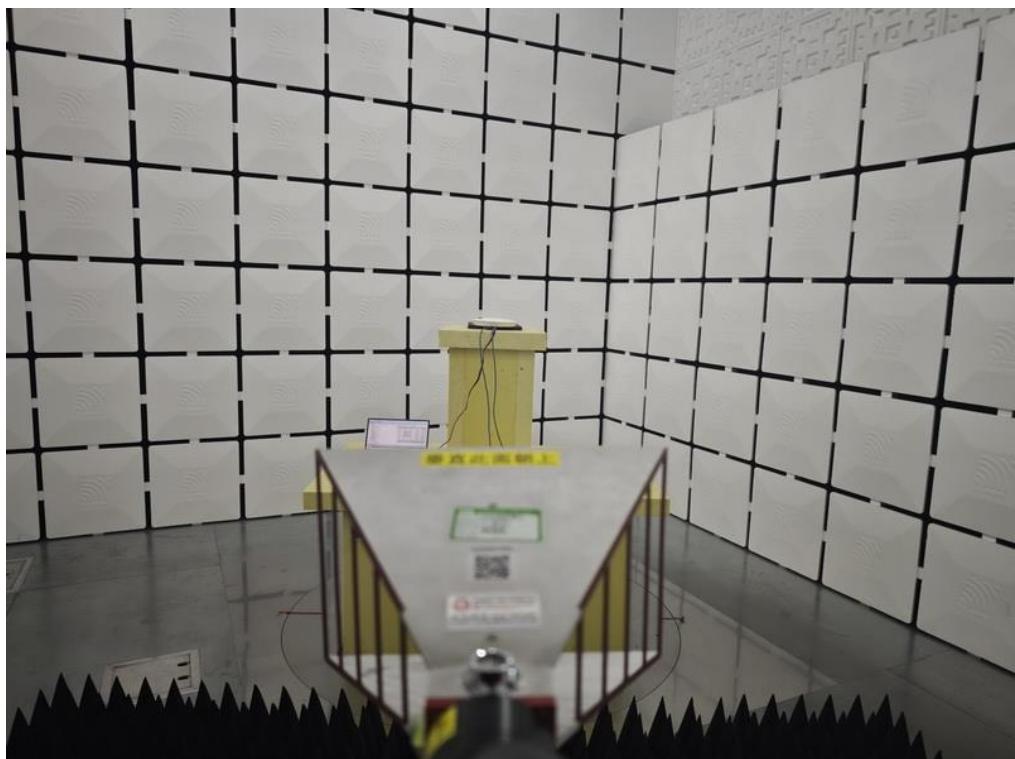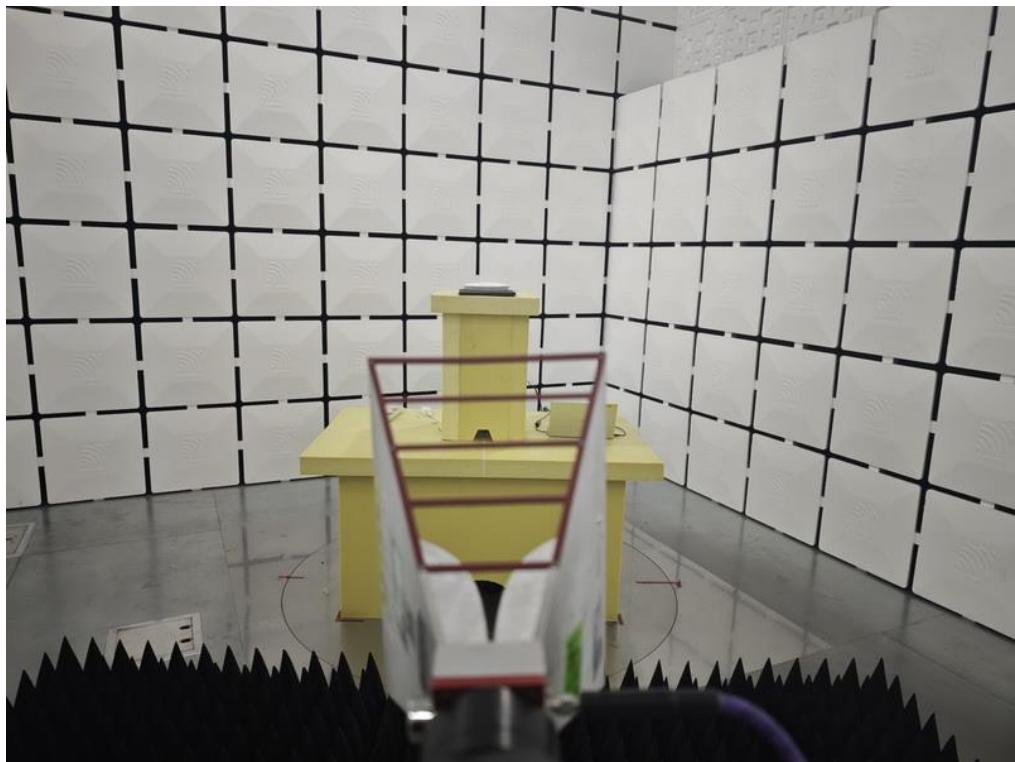
Radiated Emissions Test Photos**Band edge & Harmonic(1 GHz to 18 GHz)**

Radiated Emissions Test Photos**Harmonic(18 GHz to 26.5 GHz)**

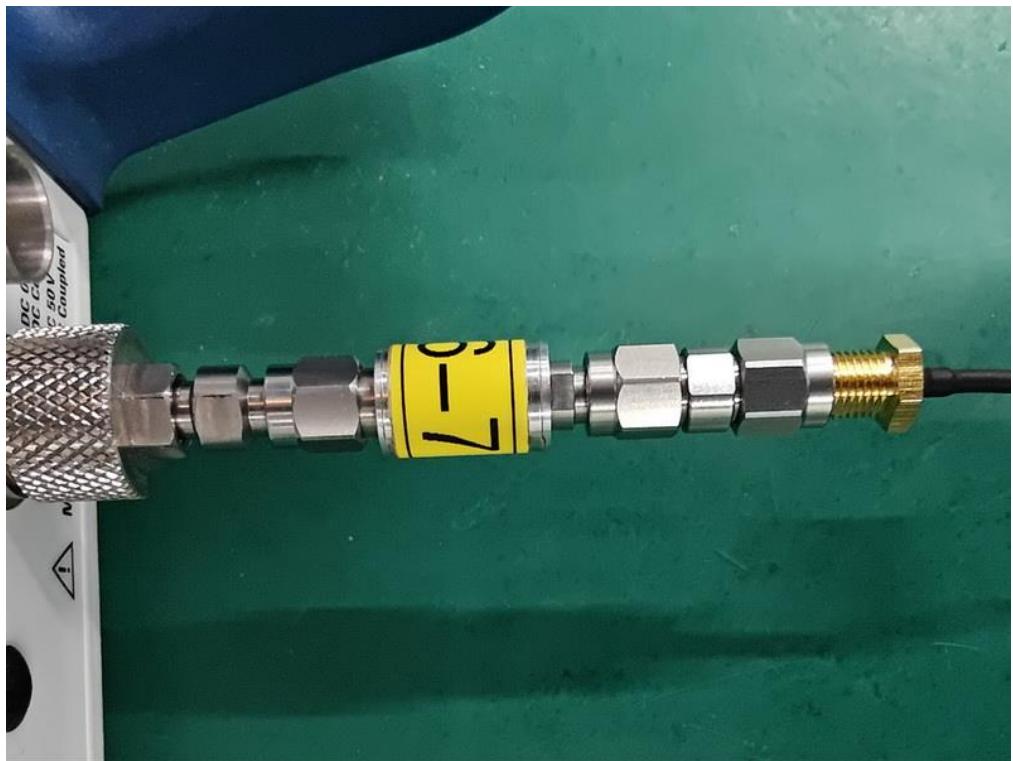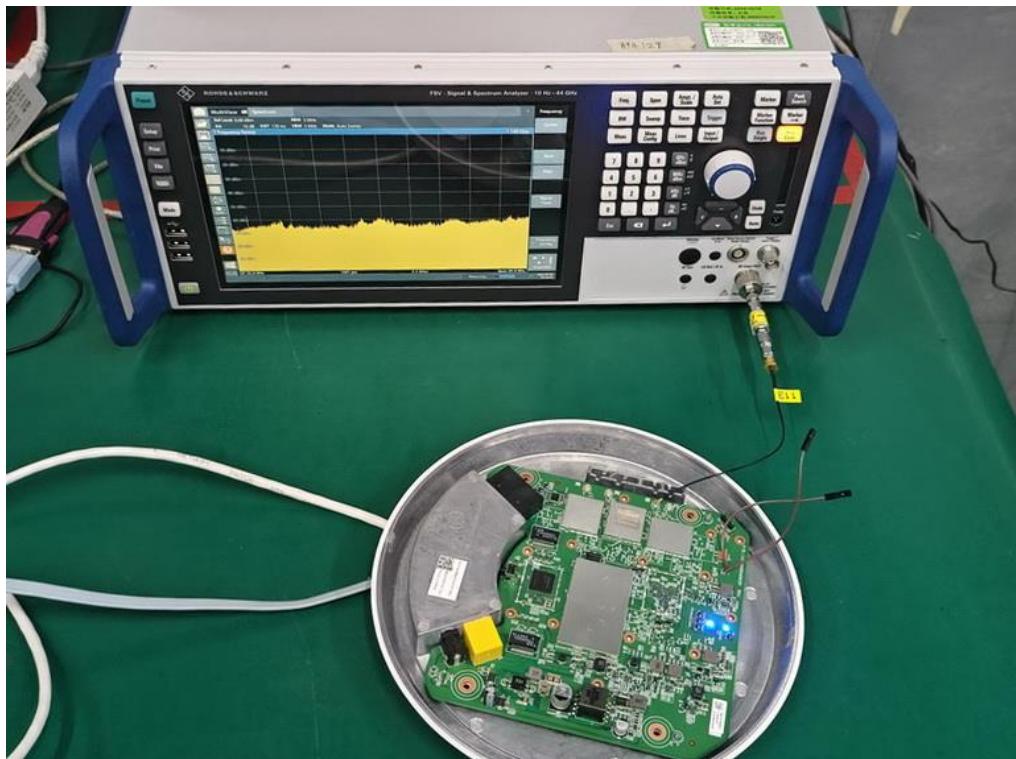Conducted Test Photos

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX B Mode Channel 06	Phase	Line
-----------	----------------------	-------	------

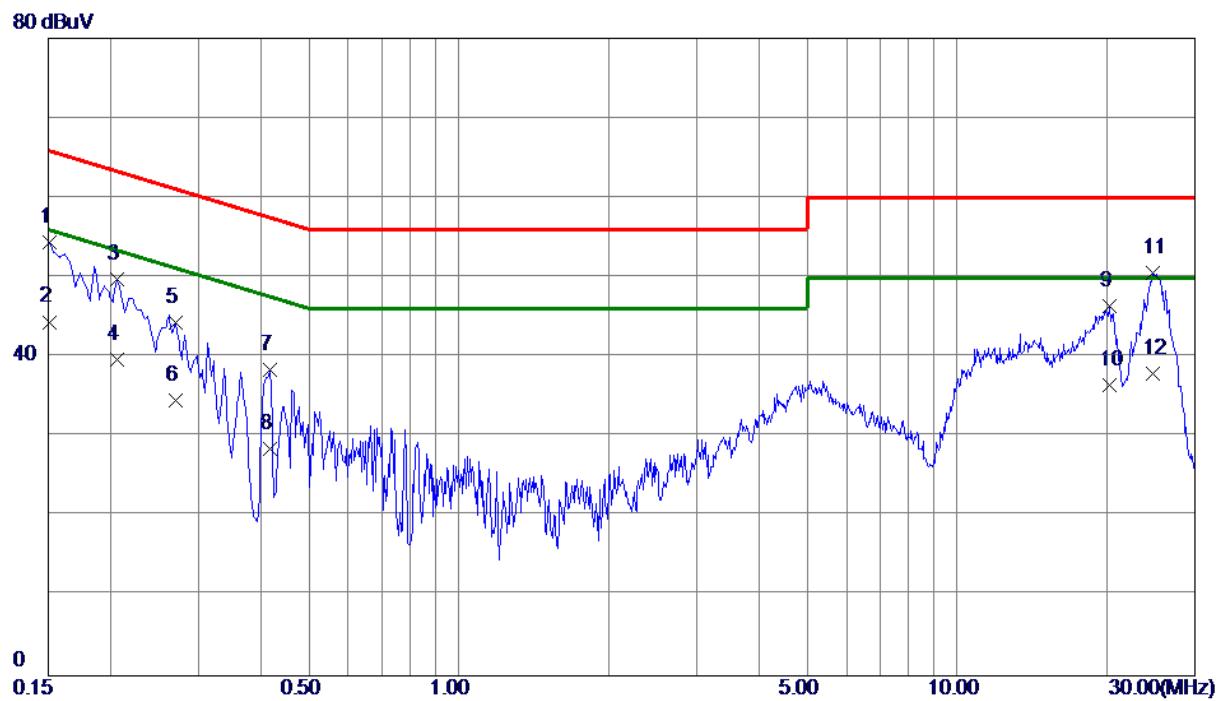


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector		Comment
							Detector	Comment	
1	0.1508	44.44	9.90	54.34	65.96	-11.62	QP		
2	0.1508	34.50	9.90	44.40	55.96	-11.56	AVG		
3	0.2060	39.79	9.90	49.69	63.37	-13.68	QP		
4	0.2060	29.80	9.90	39.70	53.37	-13.67	AVG		
5	0.2700	34.35	9.91	44.26	61.12	-16.86	QP		
6	0.2700	24.60	9.91	34.51	51.12	-16.61	AVG		
7	0.4180	28.43	9.94	38.37	57.49	-19.12	QP		
8	0.4180	18.50	9.94	28.44	47.49	-19.05	AVG		
9	20.1660	31.21	15.18	46.39	60.00	-13.61	QP		
10	20.1660	21.30	15.18	36.48	50.00	-13.52	AVG		
11 *	24.6700	35.04	15.55	50.59	60.00	-9.41	QP		
12	24.6700	22.41	15.55	37.96	50.00	-12.04	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Phase	Neutral
-----------	----------------------	-------	---------

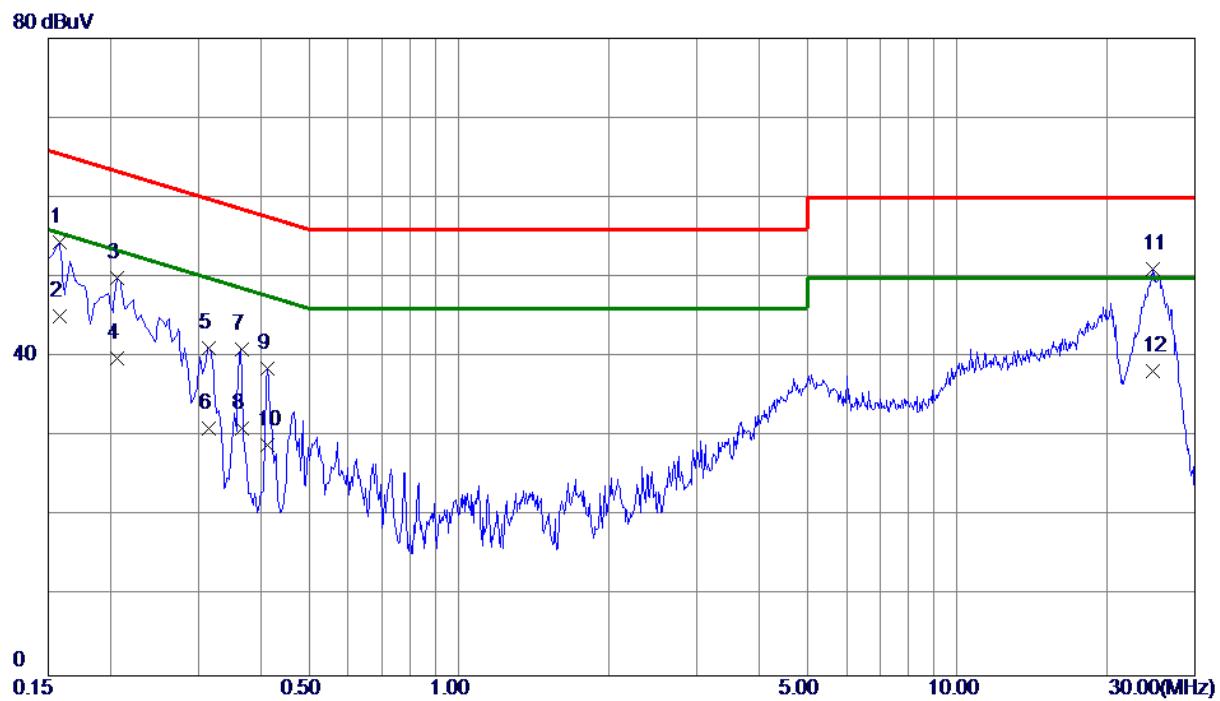


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector		Comment
							Detector	Comment	
1	0.1580	44.45	9.97	54.42	65.57	-11.15	QP		
2	0.1580	35.11	9.97	45.08	55.57	-10.49	AVG		
3	0.2060	39.89	9.97	49.86	63.37	-13.51	QP		
4	0.2060	29.80	9.97	39.77	53.37	-13.60	AVG		
5	0.3150	31.09	9.98	41.07	59.84	-18.77	QP		
6	0.3150	21.10	9.98	31.08	49.84	-18.76	AVG		
7	0.3660	30.91	9.99	40.90	58.59	-17.69	QP		
8	0.3660	21.10	9.99	31.09	48.59	-17.50	AVG		
9	0.4140	28.51	10.01	38.52	57.57	-19.05	QP		
10	0.4140	18.89	10.01	28.90	47.57	-18.67	AVG		
11 *	24.6460	35.52	15.51	51.03	60.00	-8.97	QP		
12	24.6460	22.70	15.51	38.21	50.00	-11.79	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX B Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

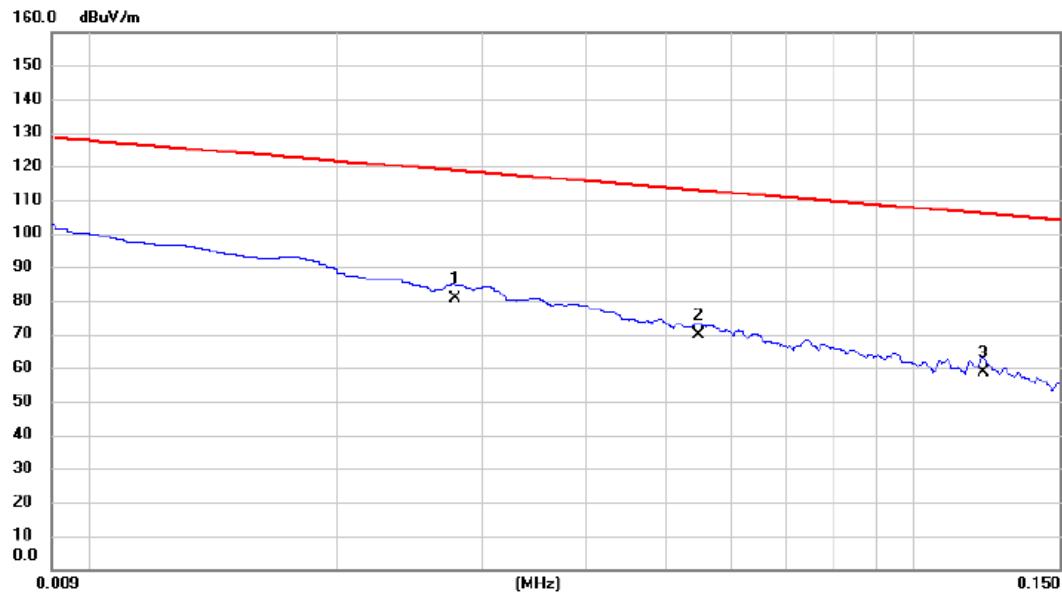


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	*	0.028	59.32	21.21	80.53	118.72	-38.19	AVG	
2		0.055	48.32	21.34	69.66	112.85	-43.19	AVG	
3		0.121	37.14	21.31	58.45	105.94	-47.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 0°
-----------	----------------------	--------------	--------

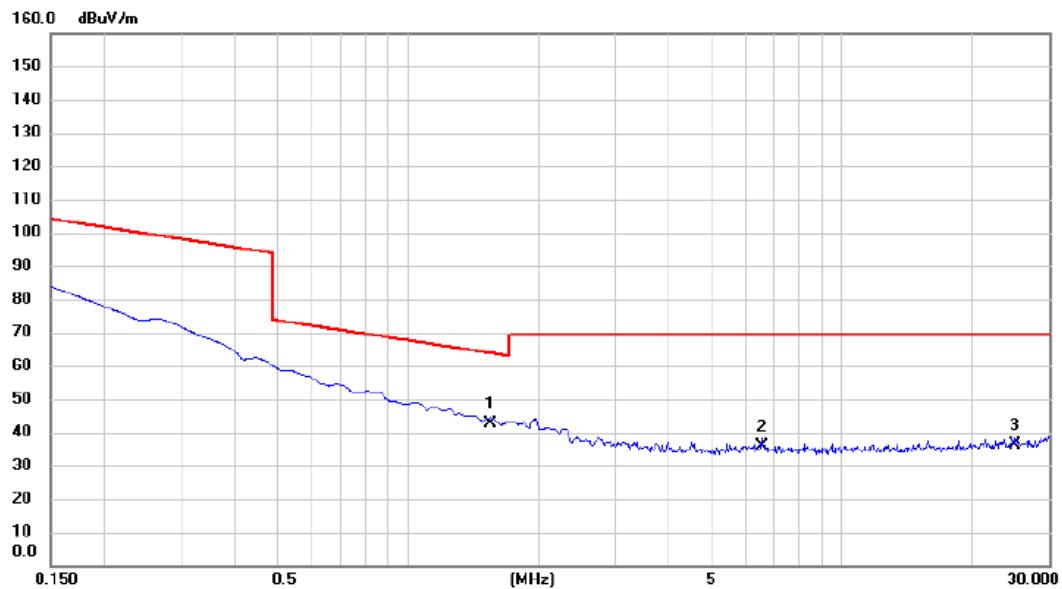


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	1.553	21.32	21.21	42.53	63.78	-21.25	QP	
2		6.538	14.32	21.48	35.80	69.54	-33.74	QP	
3		25.075	14.20	22.06	36.26	69.54	-33.28	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

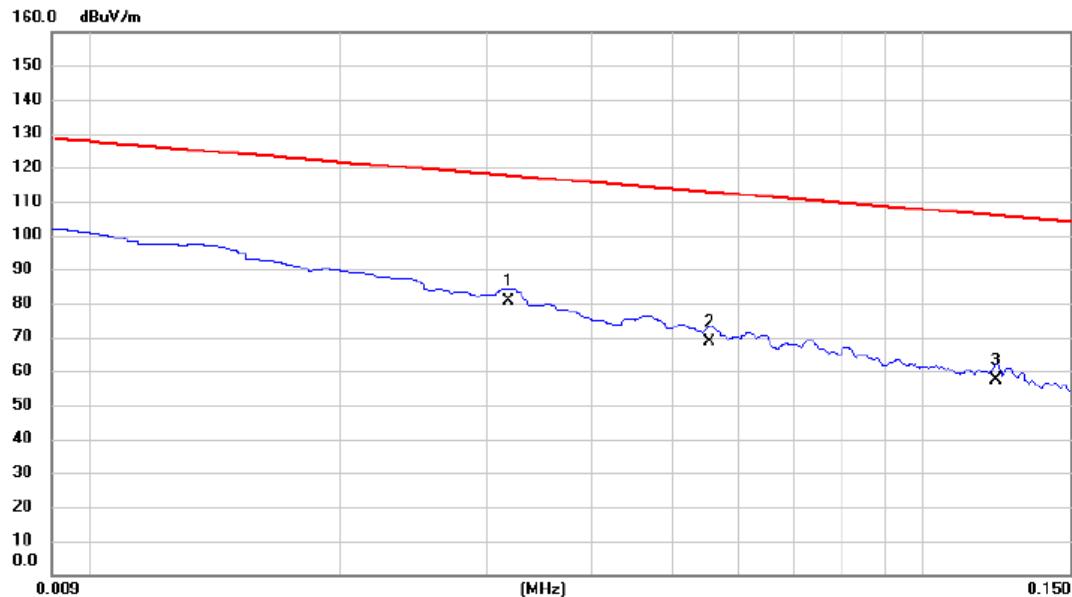


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	*	0.032	59.32	21.25	80.57	117.56	-36.99	AVG	
2		0.056	47.21	21.34	68.55	112.72	-44.17	AVG	
3		0.122	36.21	21.31	57.52	105.85	-48.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Ant 90°
-----------	----------------------	--------------	---------

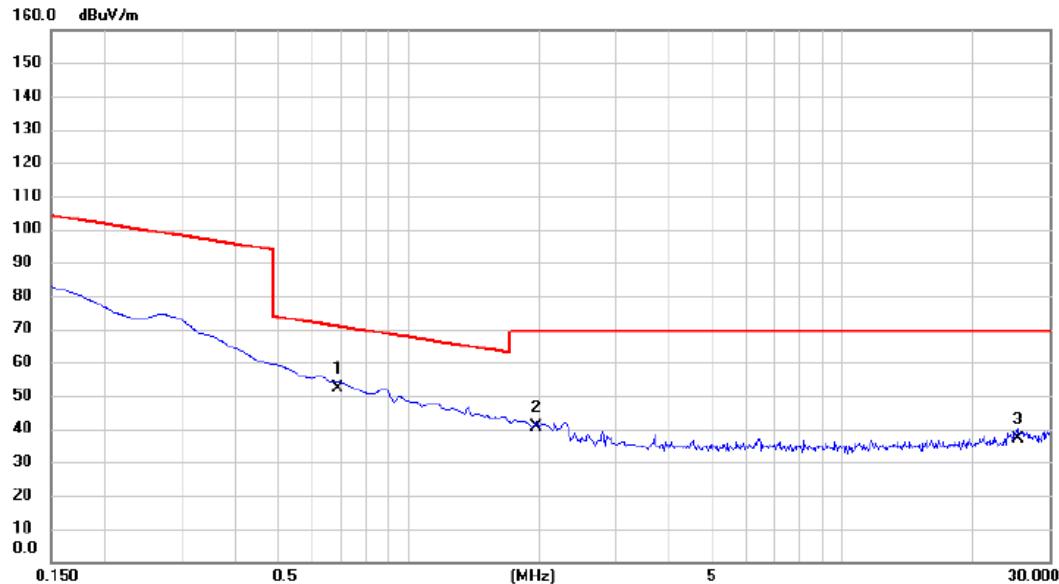


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.687	31.04	21.16	52.20	70.86	-18.66	QP	
2		1.971	19.25	21.21	40.46	69.54	-29.08	QP	
3		25.373	14.77	22.06	36.83	69.54	-32.71	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX B Mode Channel 06	Polarization	Vertical
-----------	----------------------	--------------	----------

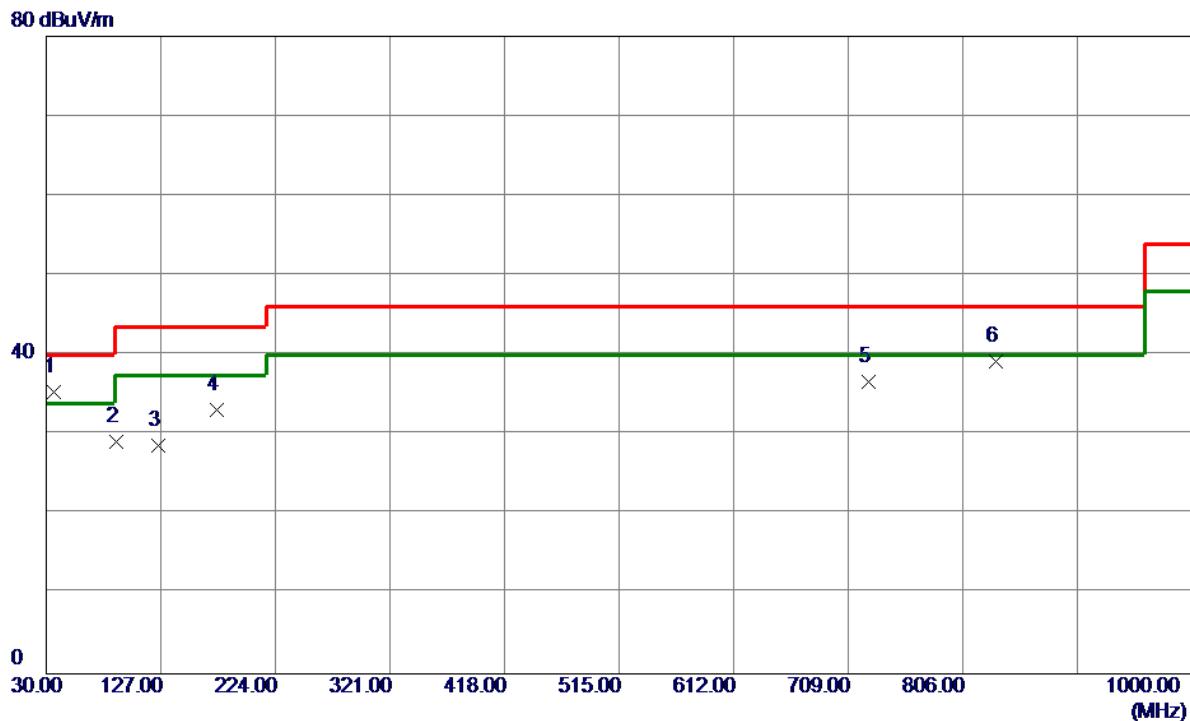


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1 *	36.7900	47.62	-12.20	35.42	40.00	-4.58	QP	
2	89.1700	45.80	-16.75	29.05	43.52	-14.47	Peak	
3	125.0600	41.64	-13.03	28.61	43.52	-14.91	Peak	
4	174.5300	44.97	-11.91	33.06	43.52	-10.46	Peak	
5	726.4600	38.24	-1.64	36.60	46.02	-9.42	Peak	
6	834.1300	39.86	-0.61	39.25	46.02	-6.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode Channel 06	Polarization	Horizontal
-----------	----------------------	--------------	------------

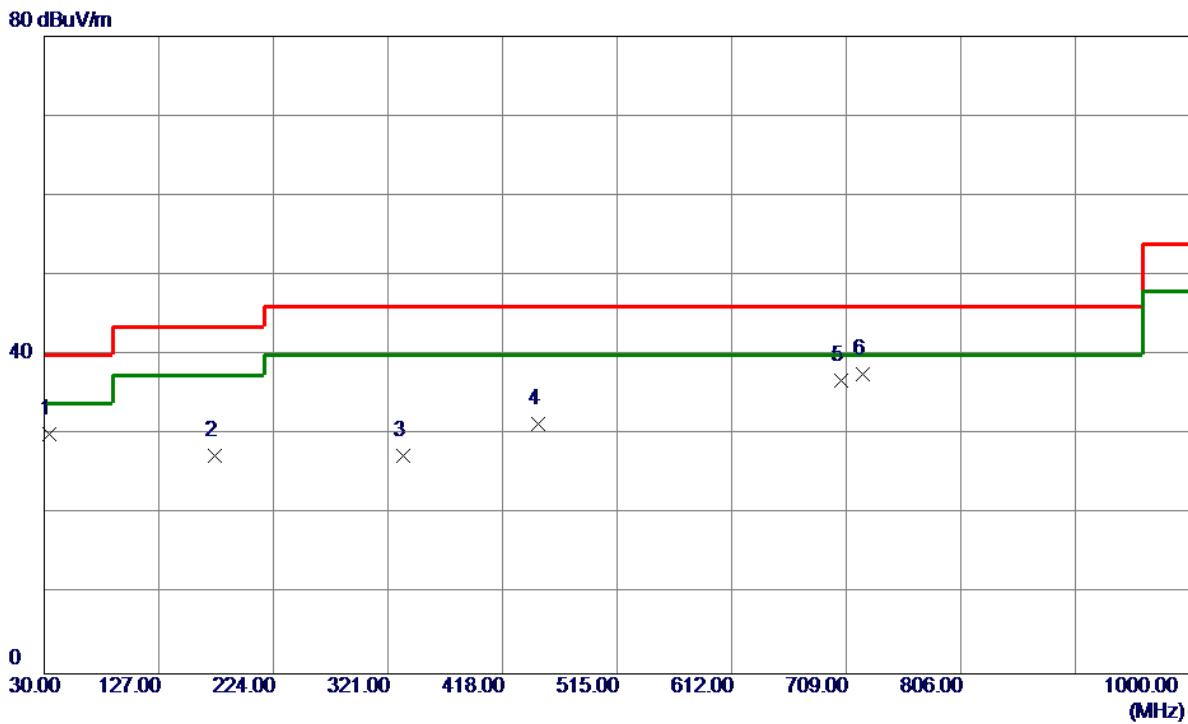


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	33.8800	42.63	-12.51	30.12	40.00	-9.88	Peak	
2	174.5300	39.34	-11.91	27.43	43.52	-16.09	Peak	
3	333.6099	36.83	-9.49	27.34	46.02	-18.68	Peak	
4	448.0700	38.05	-6.64	31.41	46.02	-14.61	Peak	
5	705.1200	39.25	-2.38	36.87	46.02	-9.15	Peak	
6 *	722.5800	39.43	-1.77	37.66	46.02	-8.36	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

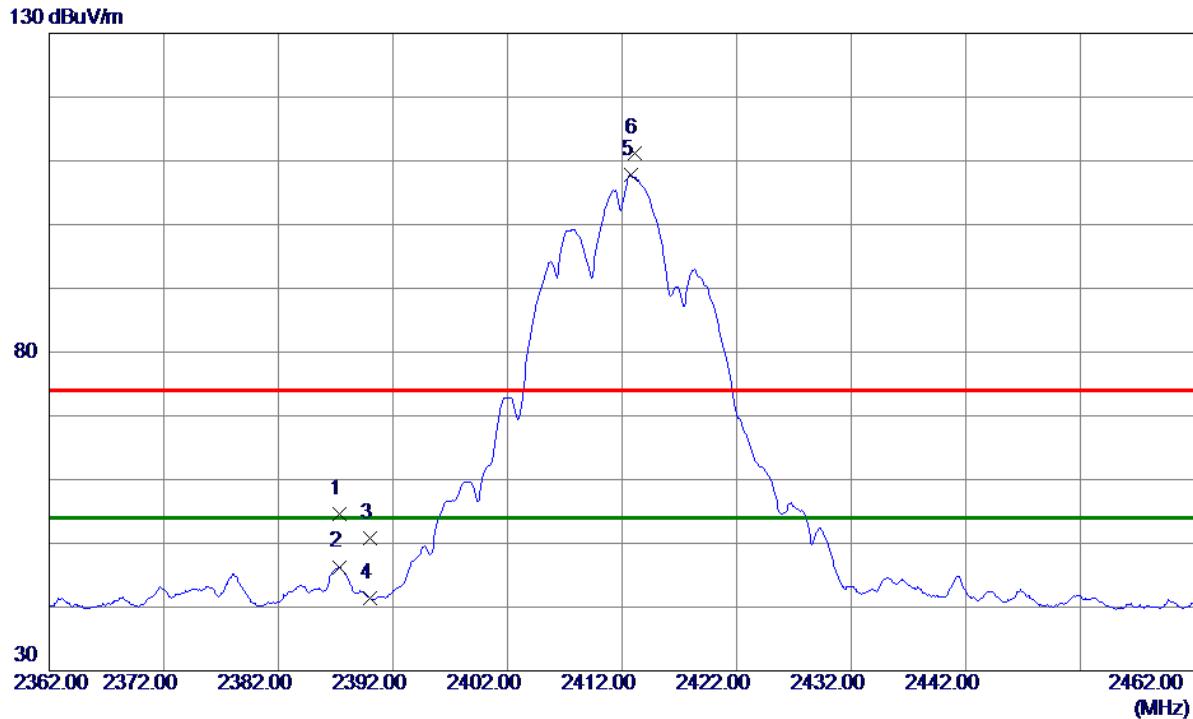


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2387.3000	45.71	8.97	54.68	74.00	-19.32	Peak	
2	2387.3000	37.33	8.97	46.30	54.00	-7.70	AVG	
3	2390.0000	41.92	8.97	50.89	74.00	-23.11	Peak	
4	2390.0000	32.38	8.97	41.35	54.00	-12.65	AVG	
5 *	2412.8000	98.71	9.03	107.74	54.00	53.74	AVG	No Limit
6	2413.1000	102.11	9.03	111.14	74.00	37.14	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

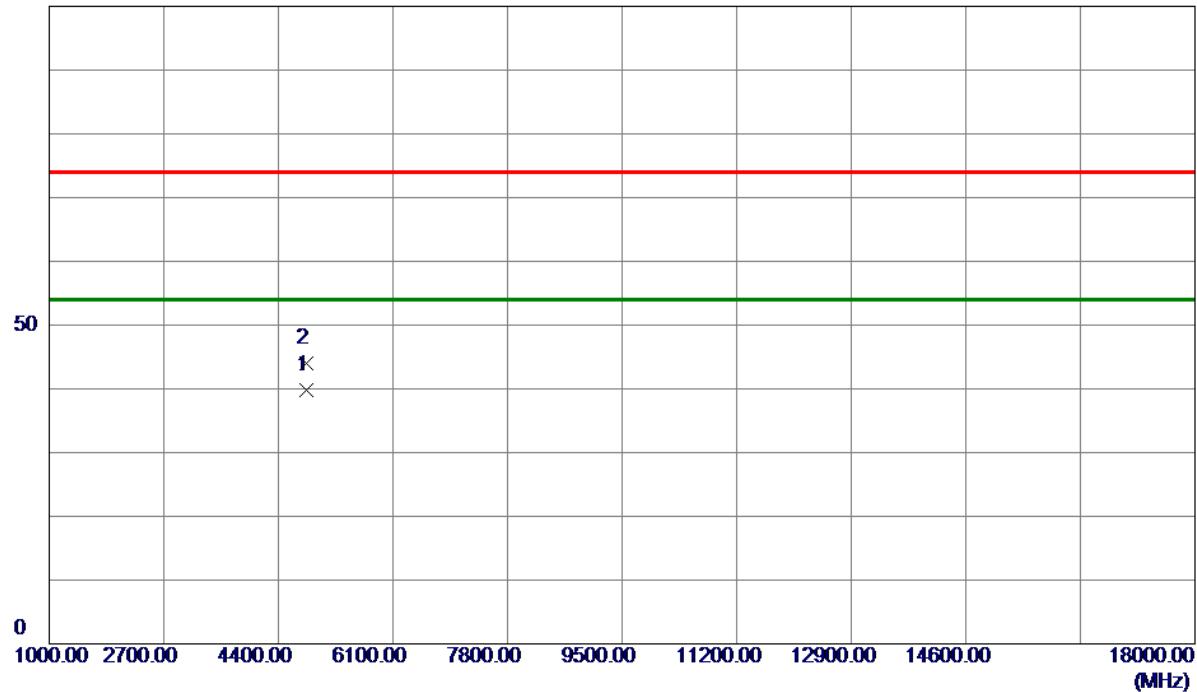


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4823. 9400	35. 77	4. 00	39. 77	54. 00	-14. 23	AVG	
2	4824. 0600	40. 08	4. 00	44. 08	74. 00	-29. 92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

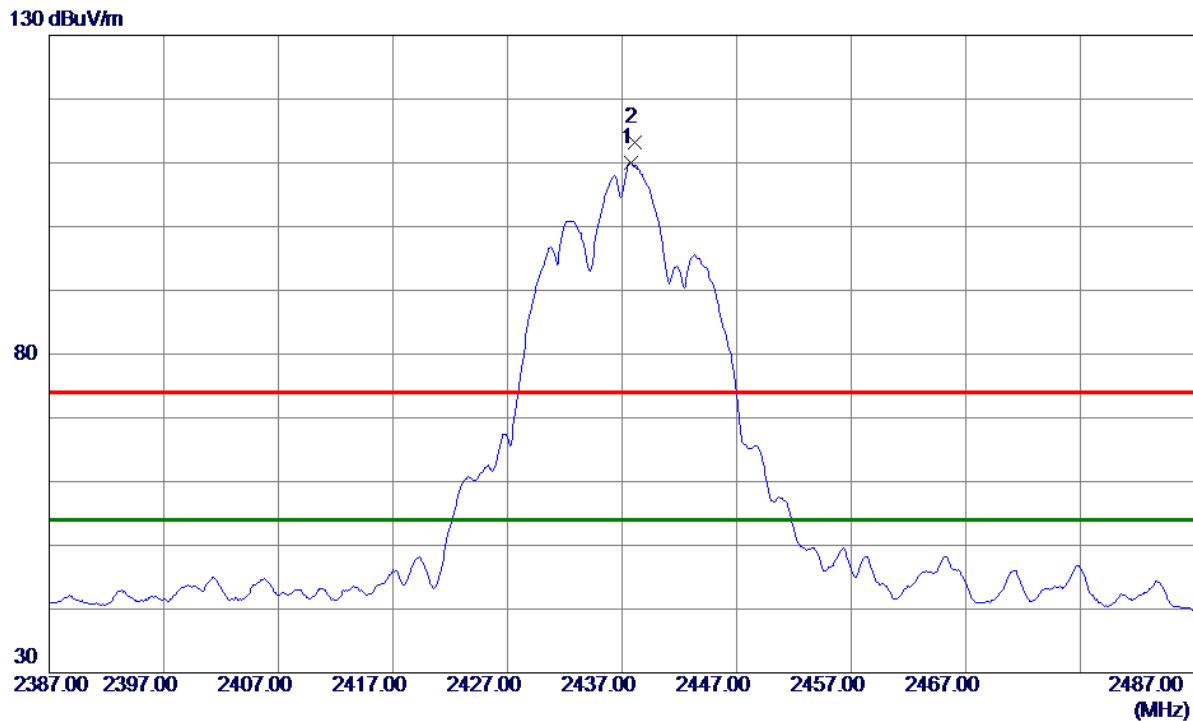


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	2437.8000	100.96	9.10	110.06	54.00	56.06	AVG	No Limit
2	2438.1000	104.16	9.10	113.26	74.00	39.26	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

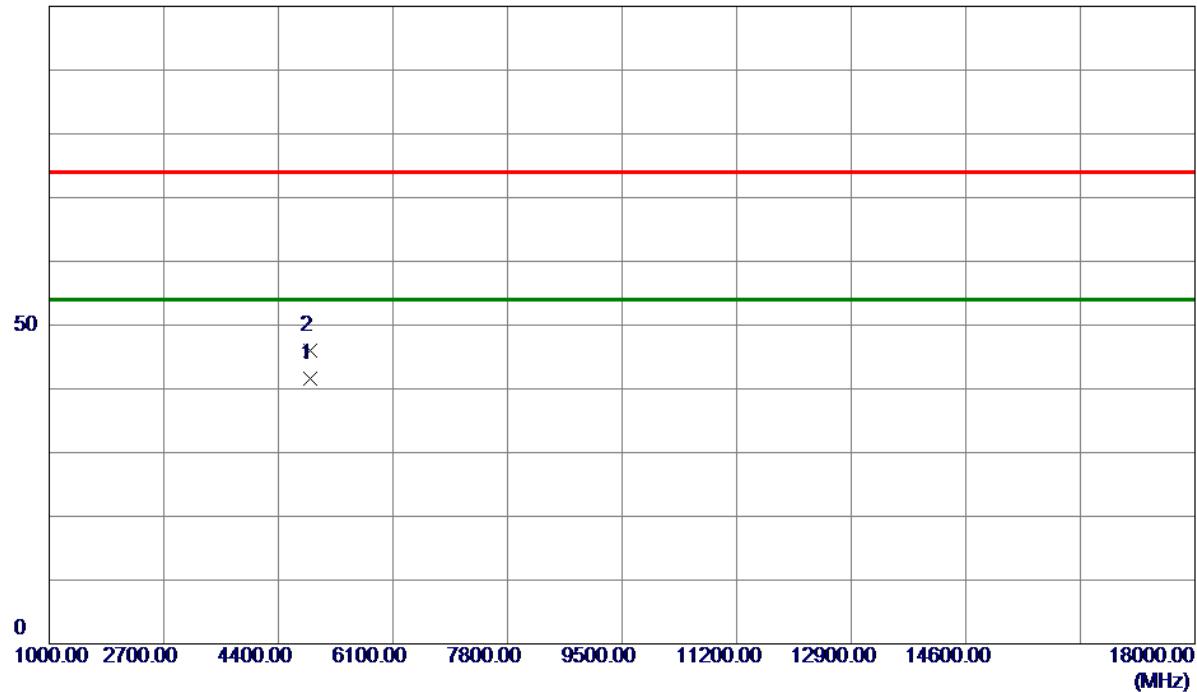


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4873.9500	37.50	4.09	41.59	54.00	-12.41	AVG	
2	4874.1000	41.86	4.09	45.95	74.00	-28.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

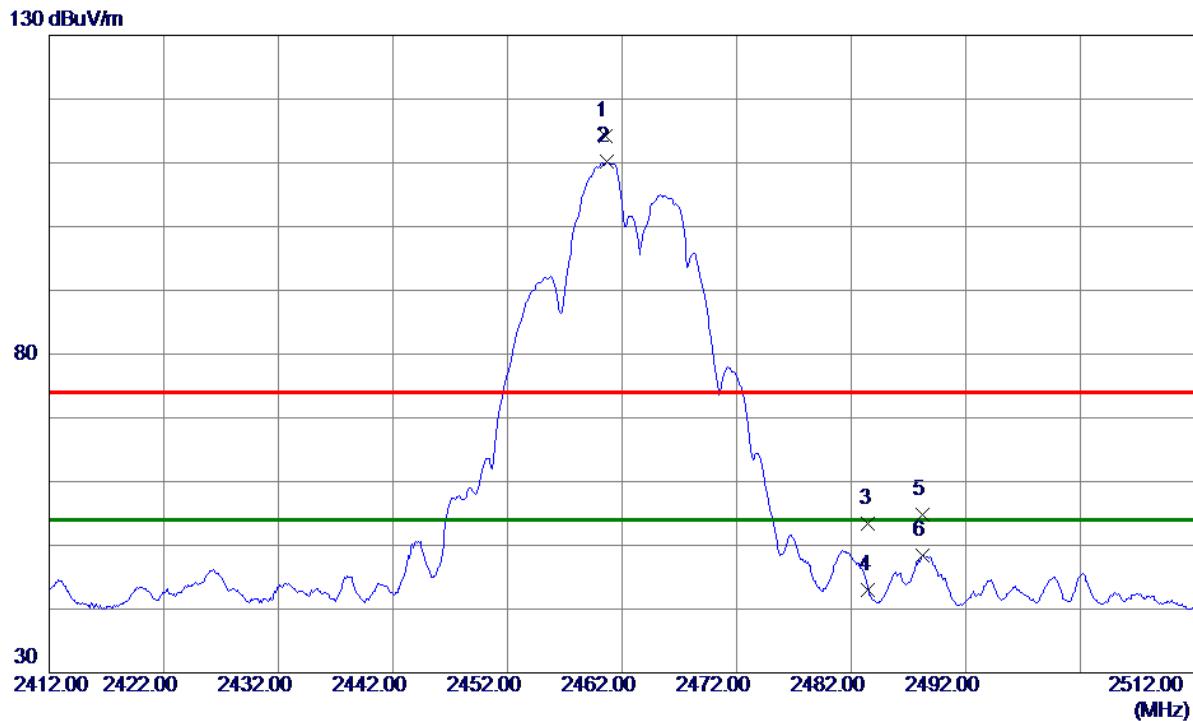


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2460.6000	104.97	9.16	114.13	74.00	40.13	Peak	No Limit
2 *	2460.7000	100.99	9.16	110.15	54.00	56.15	AVG	No Limit
3	2483.5000	44.14	9.22	53.36	74.00	-20.64	Peak	
4	2483.5000	33.78	9.22	43.00	54.00	-11.00	AVG	
5	2488.2000	45.58	9.23	54.81	74.00	-19.19	Peak	
6	2488.2000	39.15	9.23	48.38	54.00	-5.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

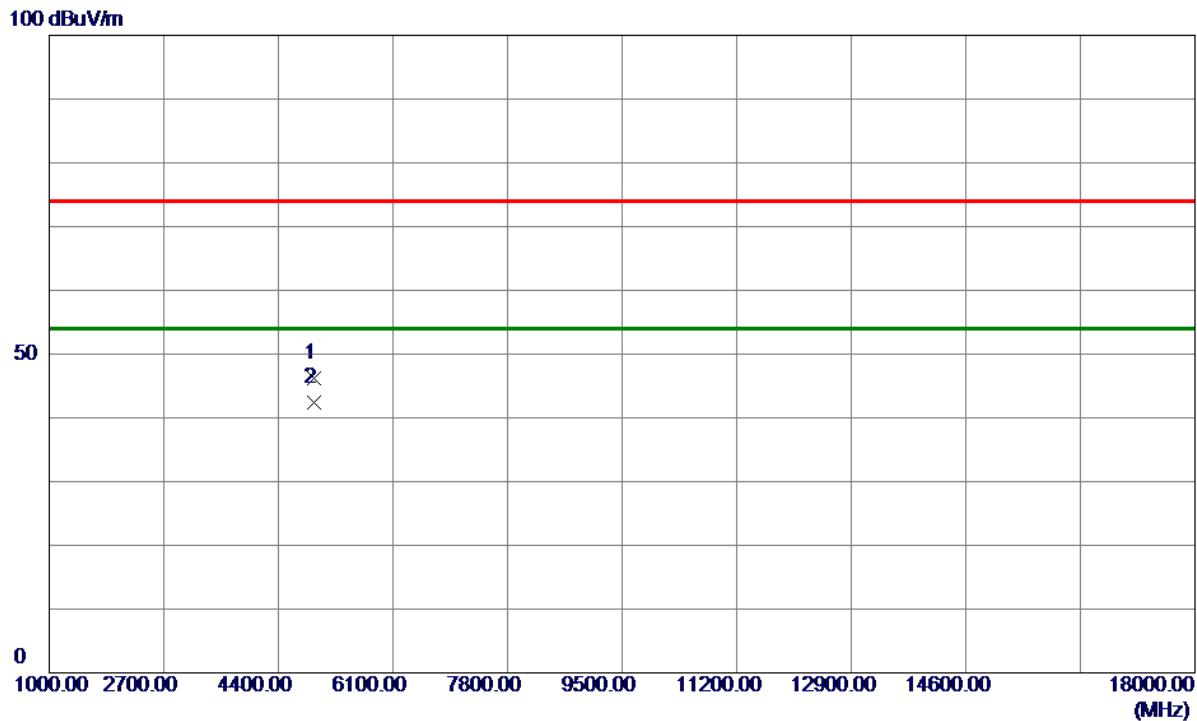


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4923.9000	41.94	4.18	46.12	74.00	-27.88	Peak	
2	4923.9700	38.31	4.18	42.49	74.00	-31.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

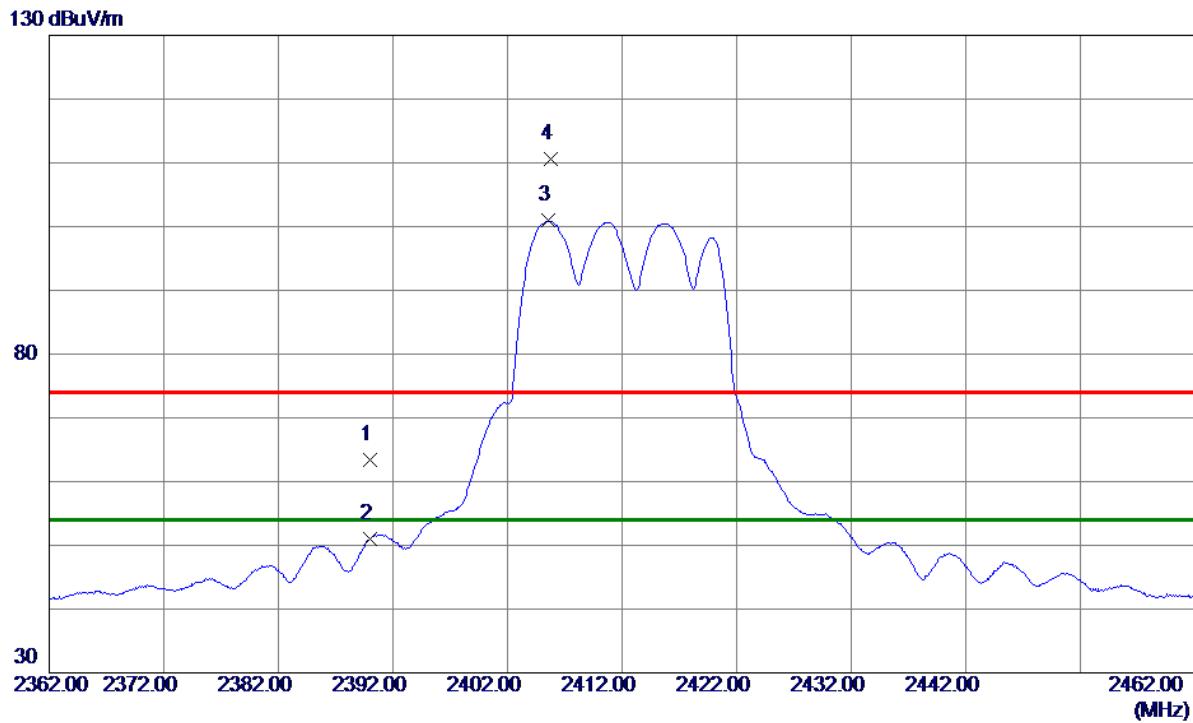


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2390.0000	54.42	8.97	63.39	74.00	-10.61	Peak	
2	2390.0000	42.05	8.97	51.02	54.00	-2.98	AVG	
3 *	2405.6000	91.89	9.01	100.90	54.00	46.90	AVG	No Limit
4	2405.8000	101.62	9.02	110.64	74.00	36.64	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

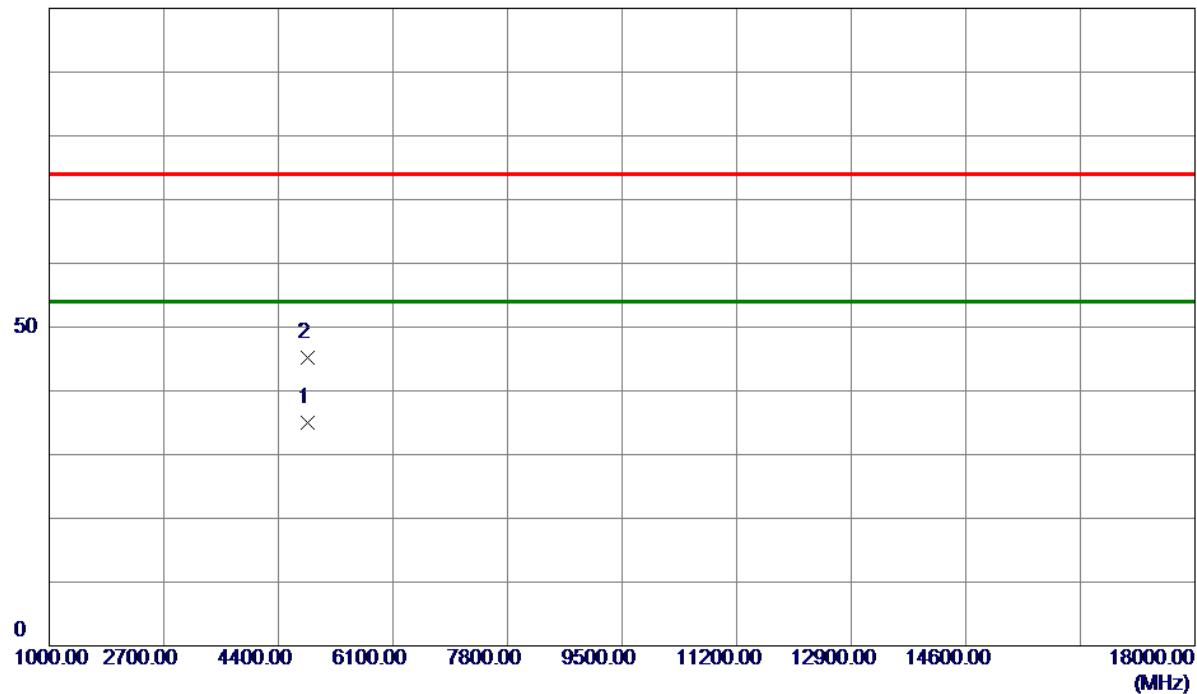


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4825.5250	31.02	4.01	35.03	54.00	-18.97	AVG	
2	4826.3700	41.22	4.01	45.23	74.00	-28.77	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

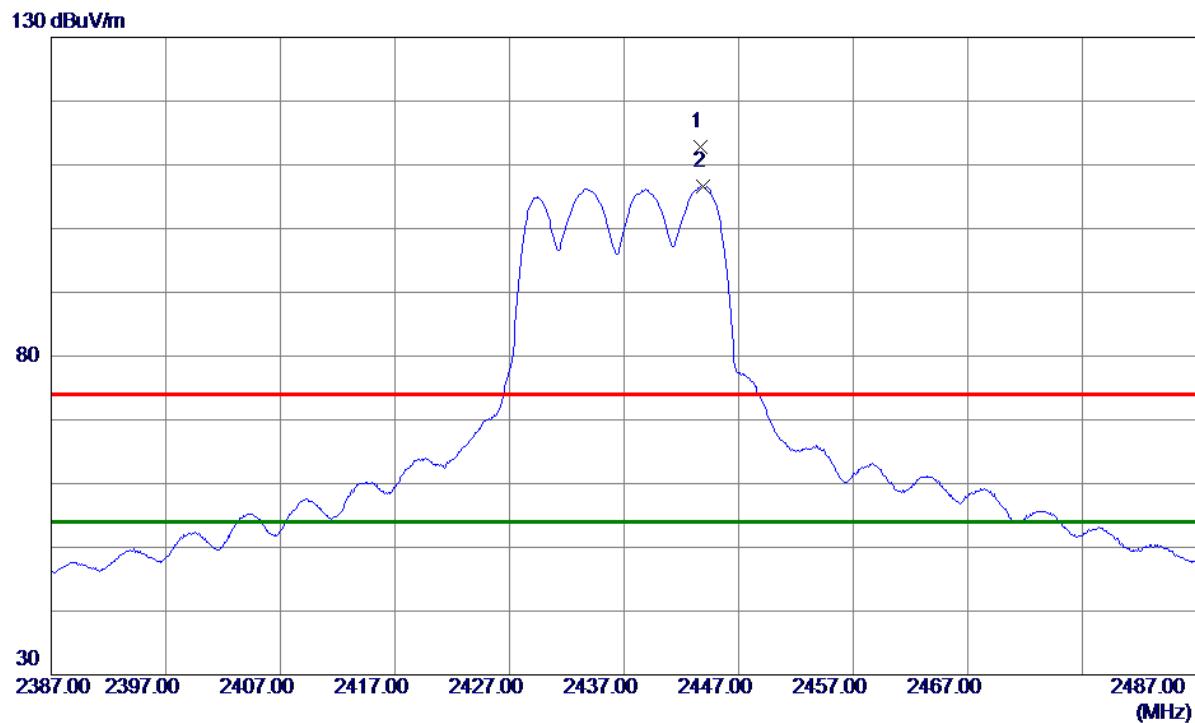


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	2443.7000	103.77	9.12	112.89	74.00	38.89	Peak
2 *	2443.9000	97.49	9.12	106.61	54.00	52.61	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

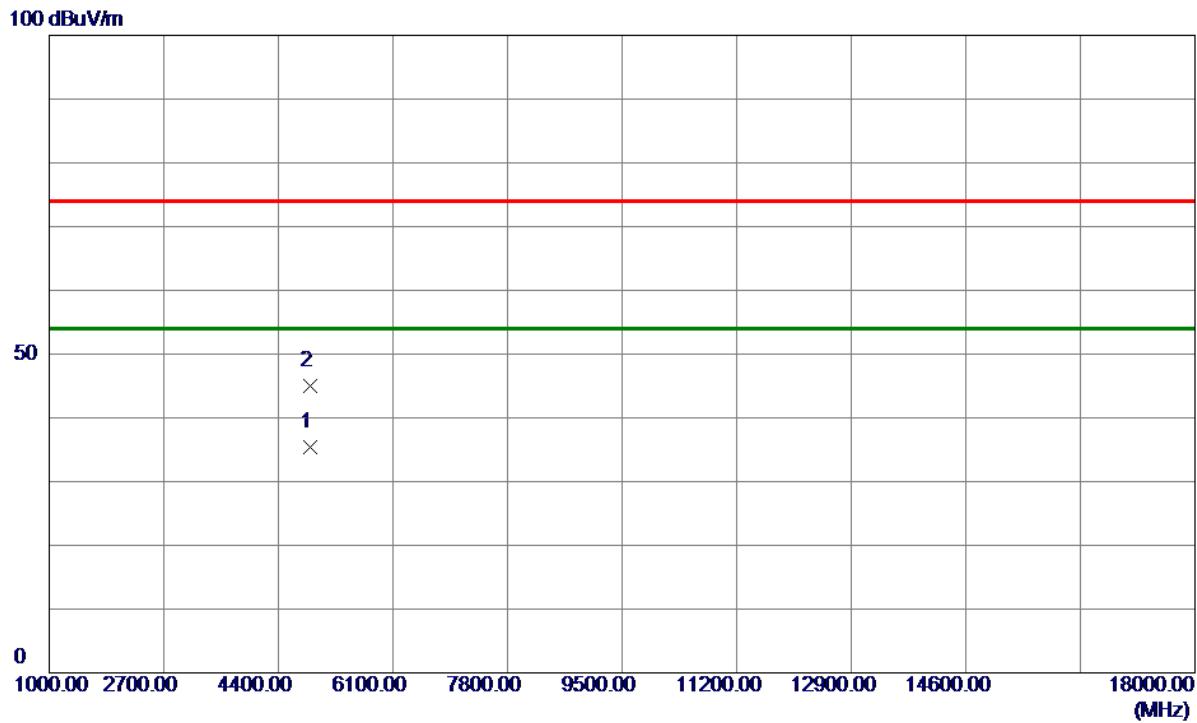


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	4874. 0000	31. 26	4. 09	35. 35	54. 00	-18. 65	AVG	
2	4877. 1500	40. 84	4. 10	44. 94	74. 00	-29. 06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

130 dBuV/m

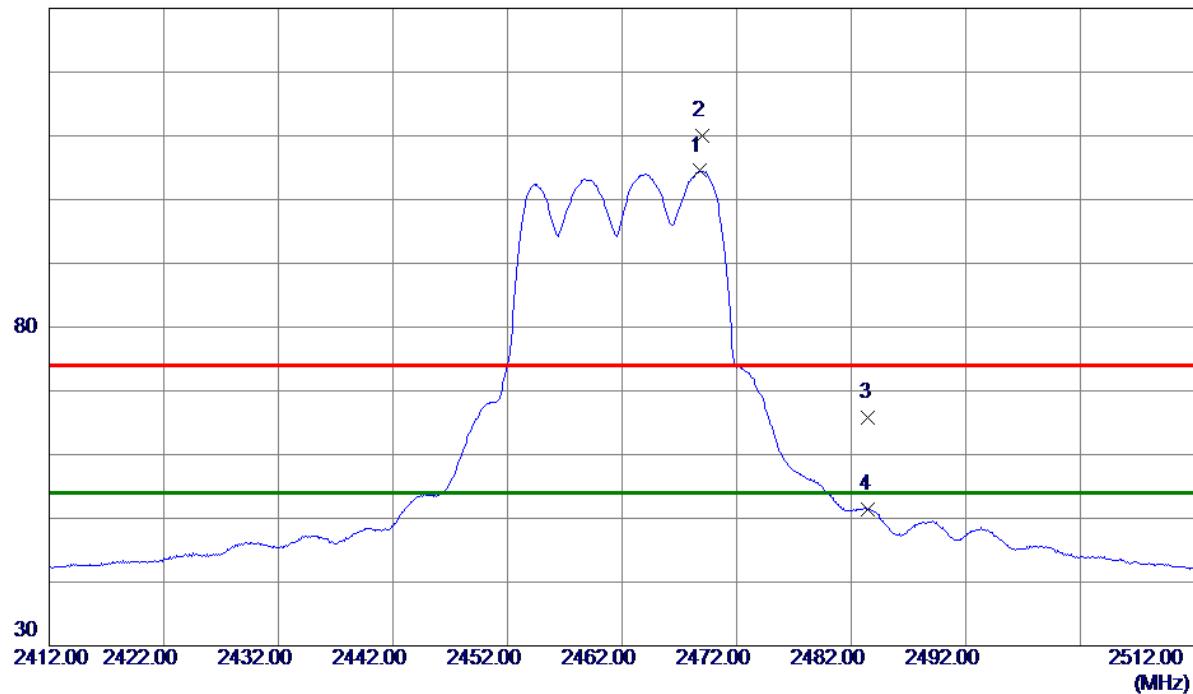


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2468.8000	95.32	9.18	104.50	54.00	50.50	AVG	No Limit
2	2469.0000	100.76	9.18	109.94	74.00	35.94	Peak	No Limit
3	2483.5000	56.58	9.22	65.80	74.00	-8.20	Peak	
4	2483.5000	42.14	9.22	51.36	54.00	-2.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

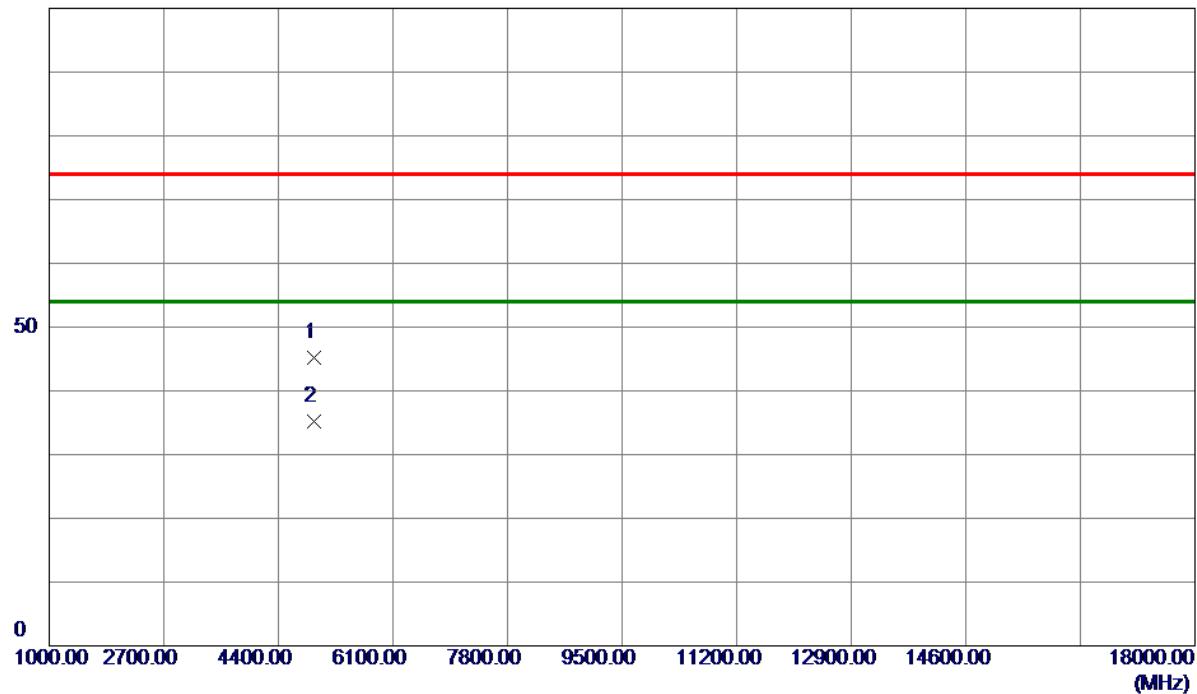


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	4920.7000	40.99	4.18	45.17	74.00	-28.83	Peak	
2 *	4925.7500	30.92	4.19	35.11	54.00	-18.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

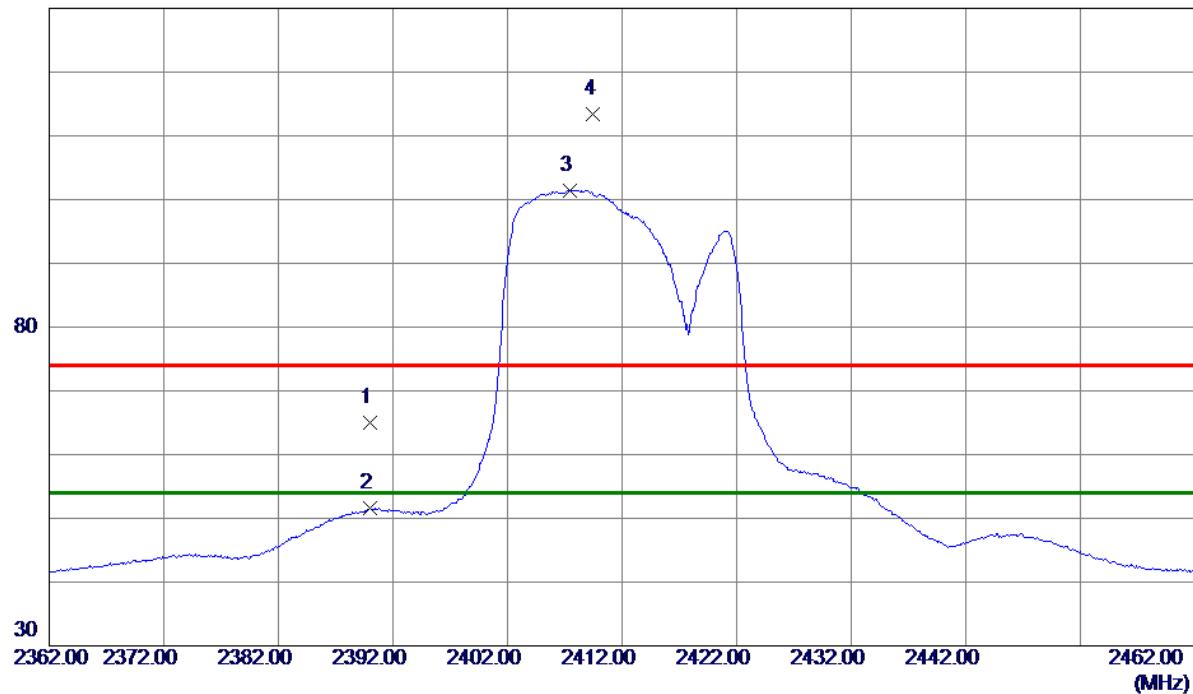


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	2390.0000	55.98	8.97	64.95	74.00	-9.05	Peak	
2	2390.0000	42.55	8.97	51.52	54.00	-2.48	AVG	
3 *	2407.4000	92.45	9.02	101.47	54.00	47.47	AVG	No Limit
4	2409.5000	104.41	9.03	113.44	74.00	39.44	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2412 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

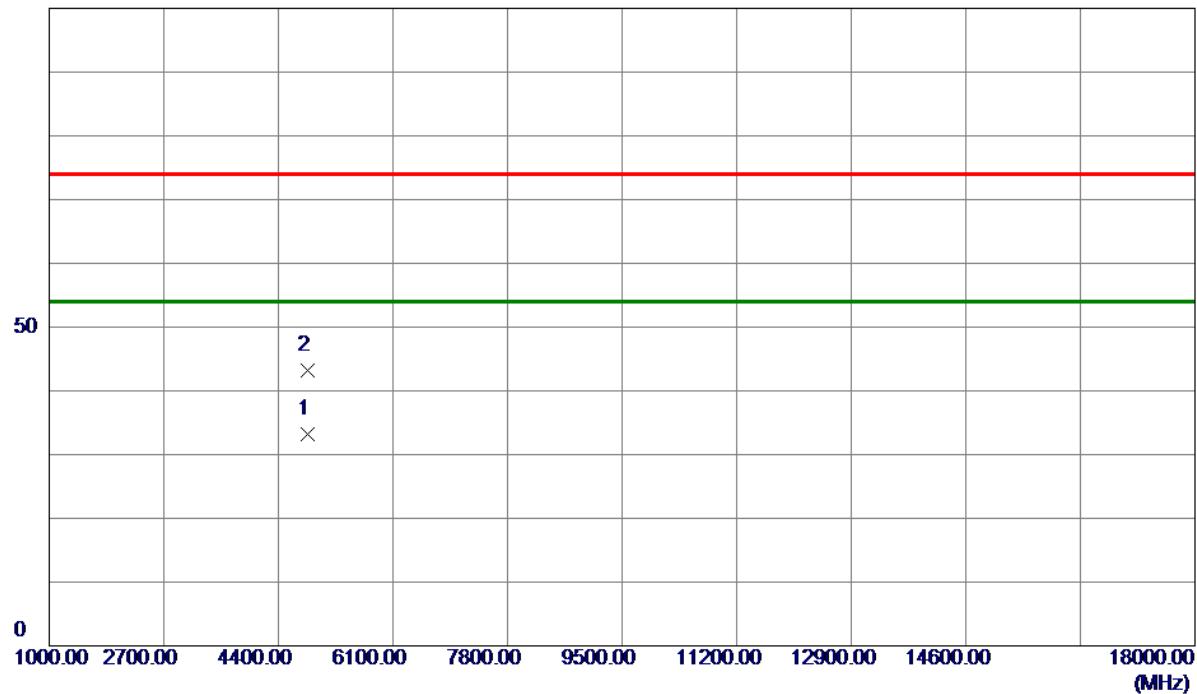


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4827.1000	29.12	4.01	33.13	54.00	-20.87	AVG	
2	4829.3800	39.24	4.01	43.25	74.00	-30.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

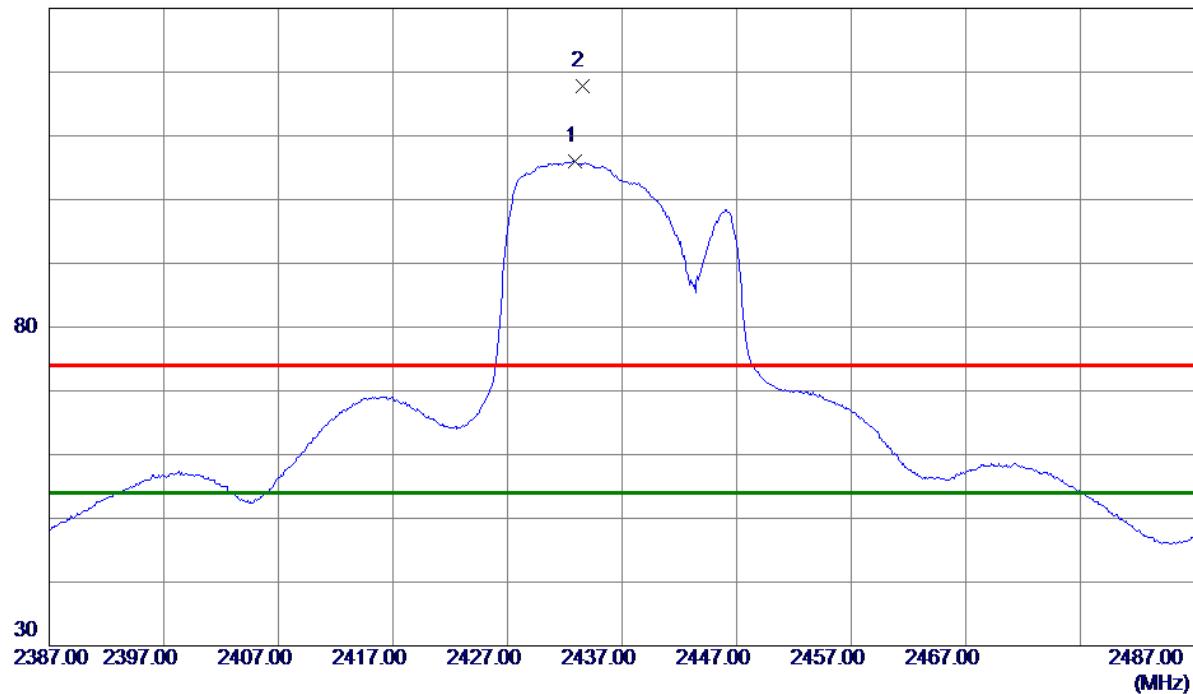


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1 *	2432.9000	96.97	9.09	106.06	54.00	52.06	AVG	No Limit
2	2433.5000	108.72	9.09	117.81	74.00	43.81	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

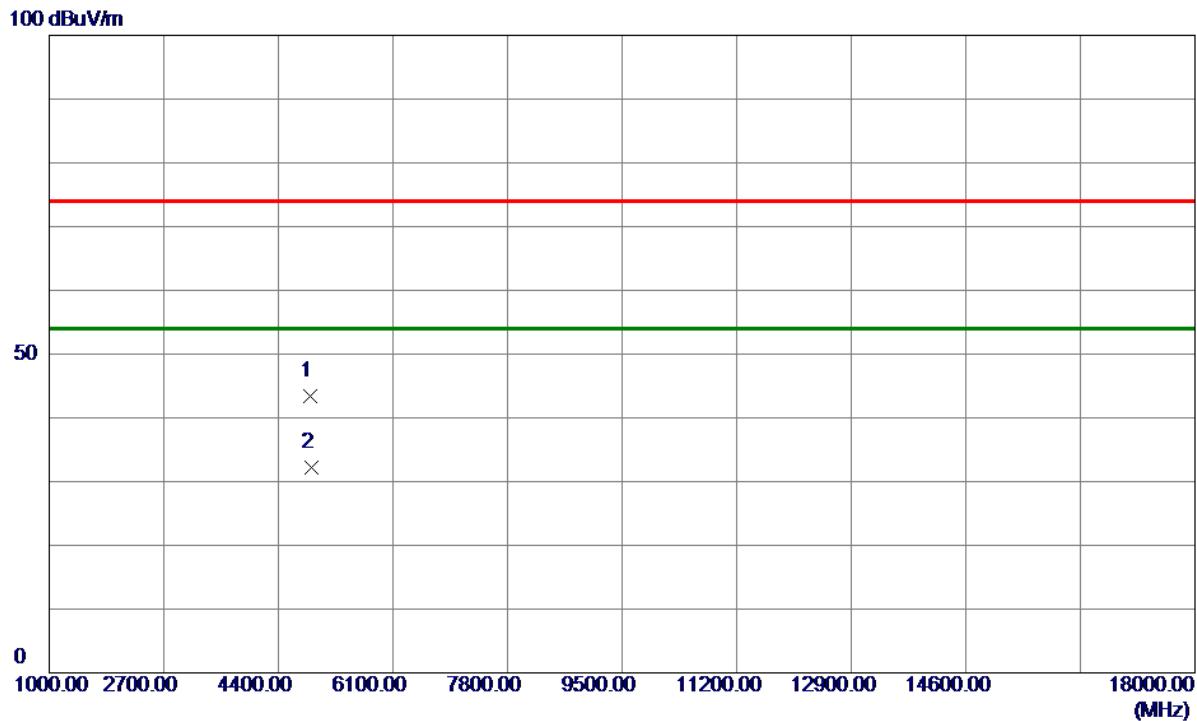


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dB			
1	4876.1000	39.21	4.10	43.31	74.00	-30.69	Peak	
2 *	4882.3400	28.12	4.11	32.23	54.00	-21.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

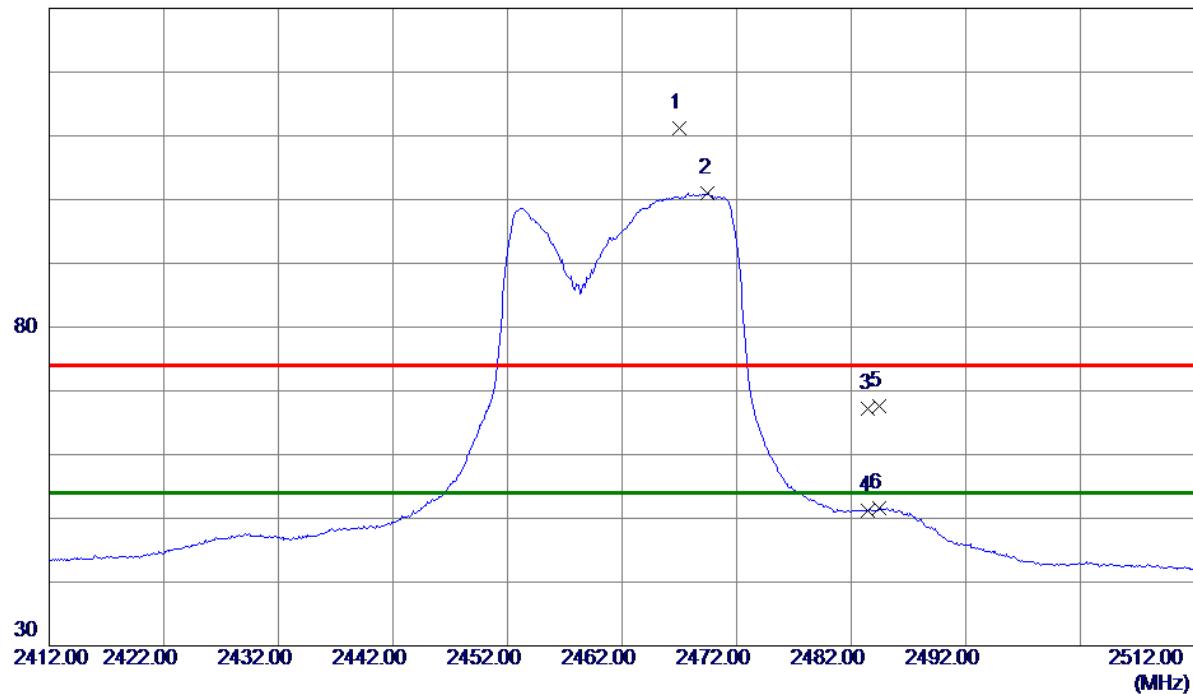


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor	Measure ment dBuV/m	Limit dB	Margin	Detector	Comment
1	2467.0000	101.95	9.18	111.13	74.00	37.13	Peak	No Limit
2 *	2469.5000	91.74	9.18	100.92	54.00	46.92	AVG	No Limit
3	2483.5000	58.01	9.22	67.23	74.00	-6.77	Peak	
4	2483.5000	41.95	9.22	51.17	54.00	-2.83	AVG	
5	2484.4000	58.46	9.22	67.68	74.00	-6.32	Peak	
6	2484.4000	42.39	9.22	51.61	54.00	-2.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2462 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

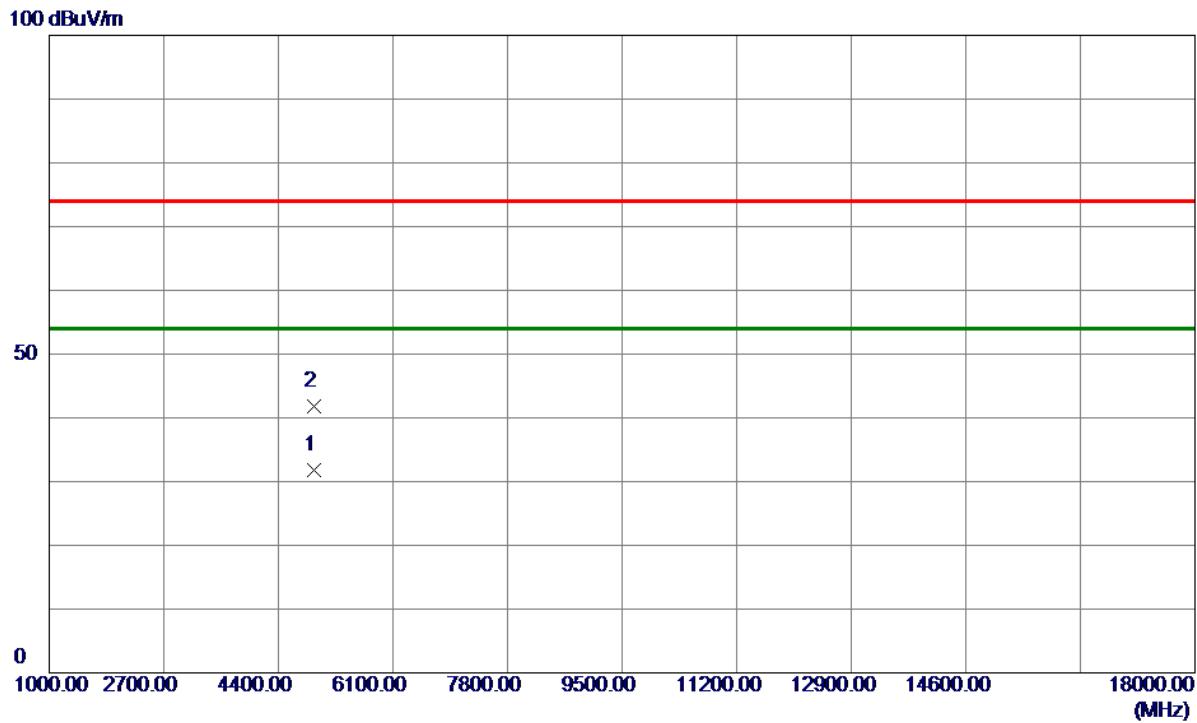


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4929.7000	27.54	4.19	31.73	54.00	-22.27	AVG	
2	4931.5200	37.53	4.20	41.73	74.00	-32.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2422 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

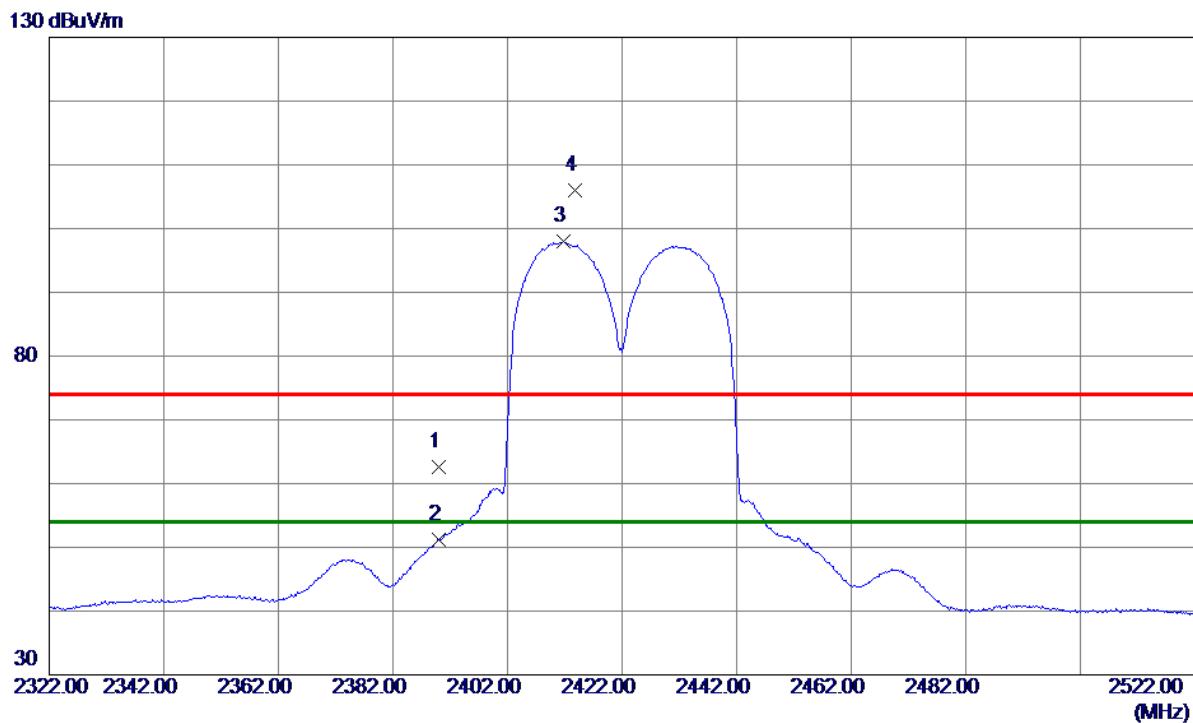


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2390.0000	53.72	8.97	62.69	74.00	-11.31	Peak	
2	2390.0000	42.22	8.97	51.19	54.00	-2.81	AVG	
3 *	2411.8000	88.87	9.03	97.90	54.00	43.90	AVG	No Limit
4	2413.8000	97.01	9.04	106.05	74.00	32.05	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2422 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

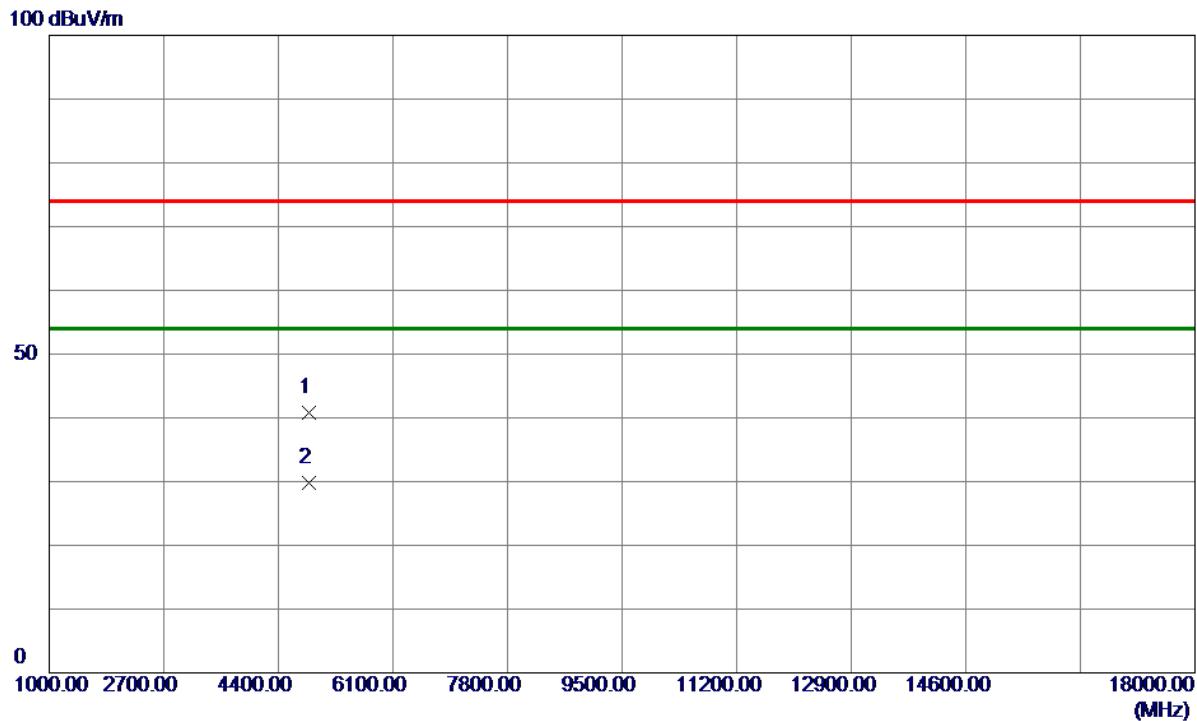


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	4845.4950	36.73	4.04	40.77	74.00	-33.23	Peak	
2 *	4846.3650	25.74	4.04	29.78	54.00	-24.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

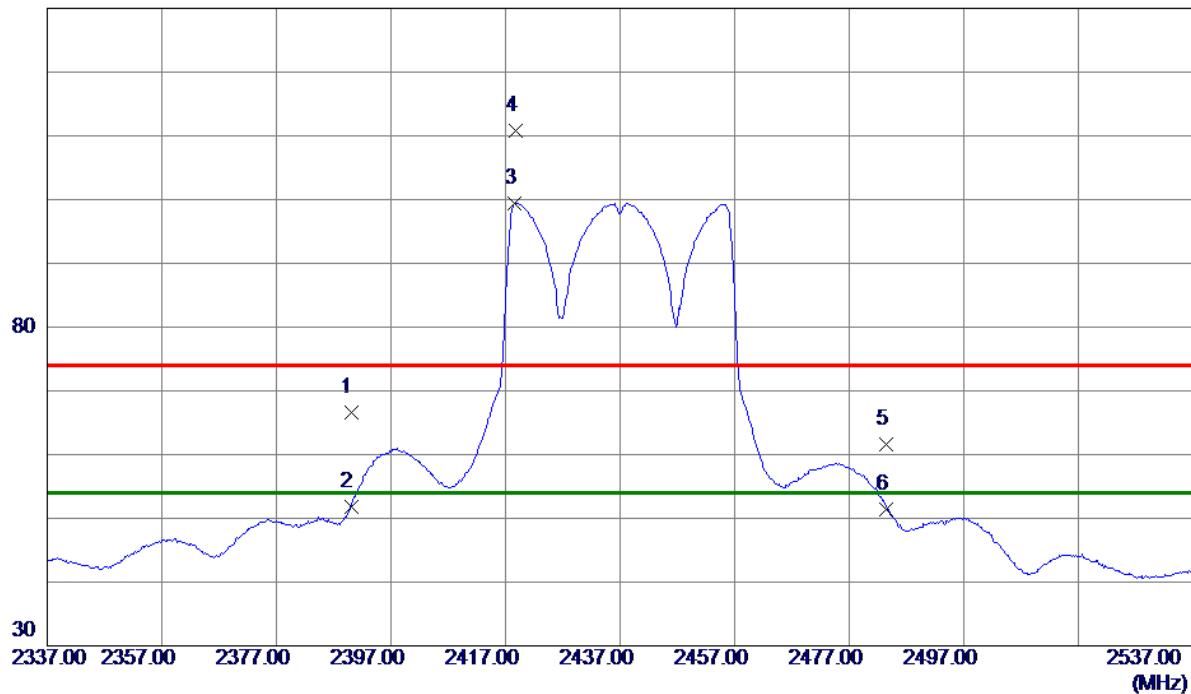


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	57.71	8.97	66.68	74.00	-7.32	Peak	
2	2390.0000	42.84	8.97	51.81	54.00	-2.19	AVG	
3 *	2418.6000	90.40	9.05	99.45	54.00	45.45	AVG	No Limit
4	2418.8000	101.68	9.05	110.73	74.00	36.73	Peak	No Limit
5	2483.5000	52.36	9.22	61.58	74.00	-12.42	Peak	
6	2483.5000	42.26	9.22	51.48	54.00	-2.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

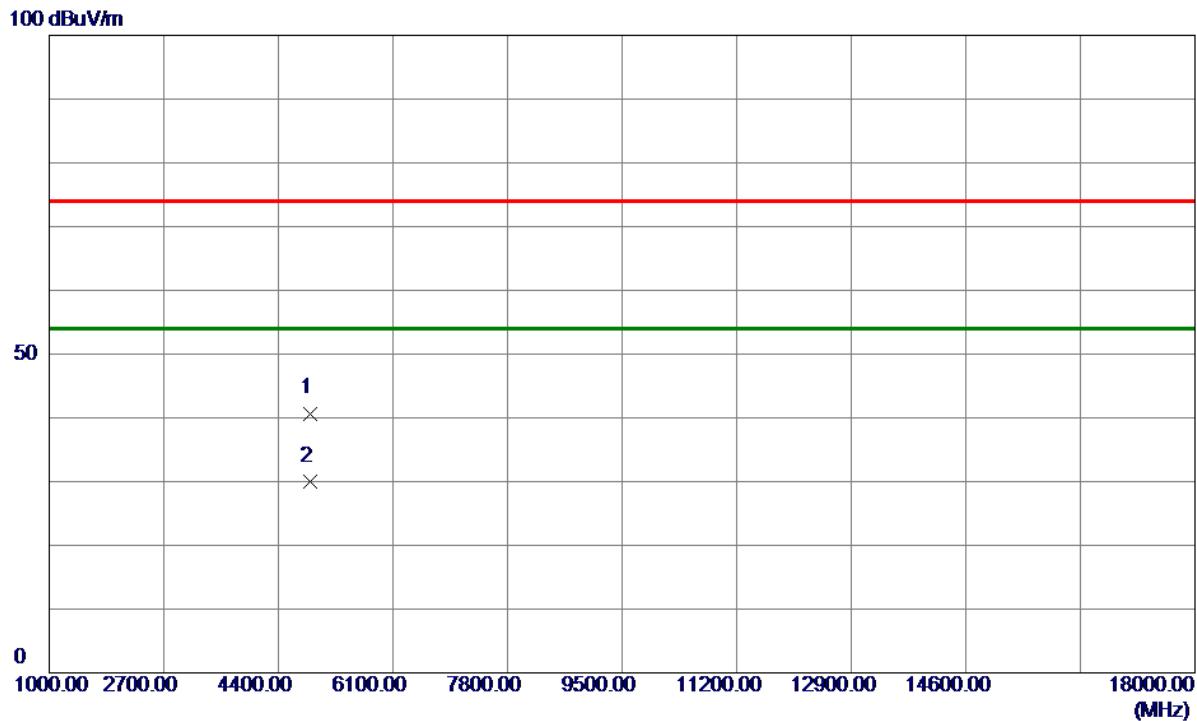


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.1480	36.61	4.09	40.70	74.00	-33.30	Peak	
2 *	4873.1560	25.85	4.09	29.94	54.00	-24.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

130 dBuV/m

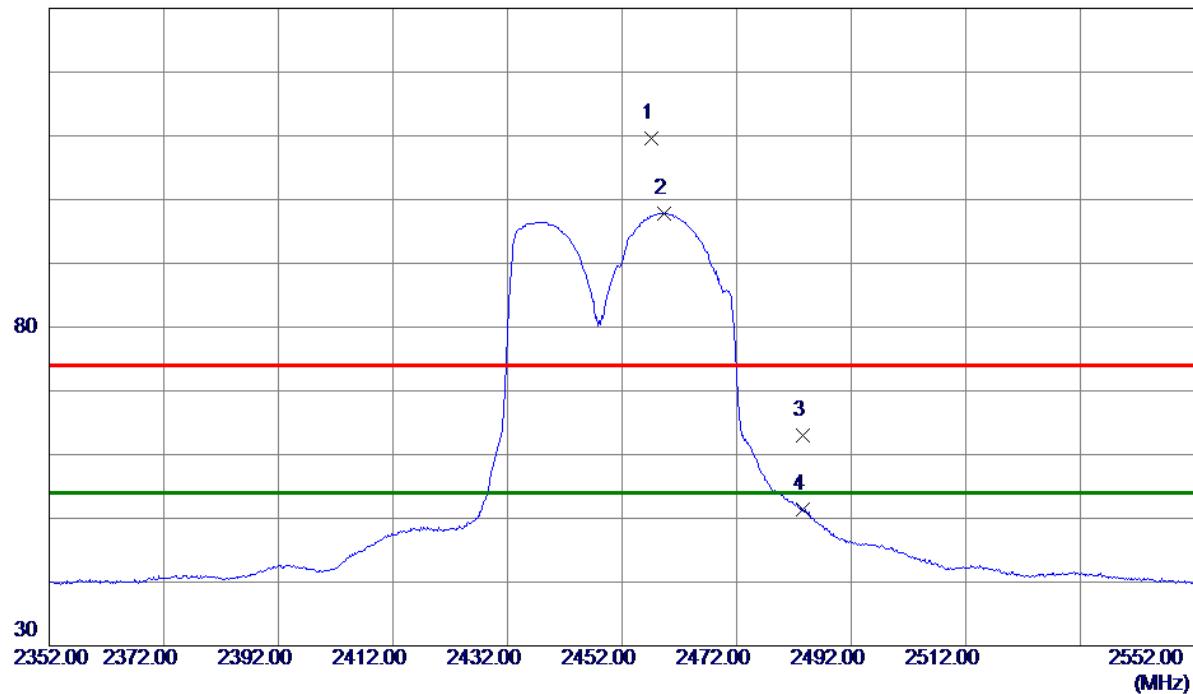


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2457.2000	100.43	9.15	109.58	74.00	35.58	Peak	No Limit
2 *	2459.4000	88.70	9.16	97.86	54.00	43.86	AVG	No Limit
3	2483.5000	53.83	9.22	63.05	74.00	-10.95	Peak	
4	2483.5000	42.21	9.22	51.43	54.00	-2.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

100 dBuV/m

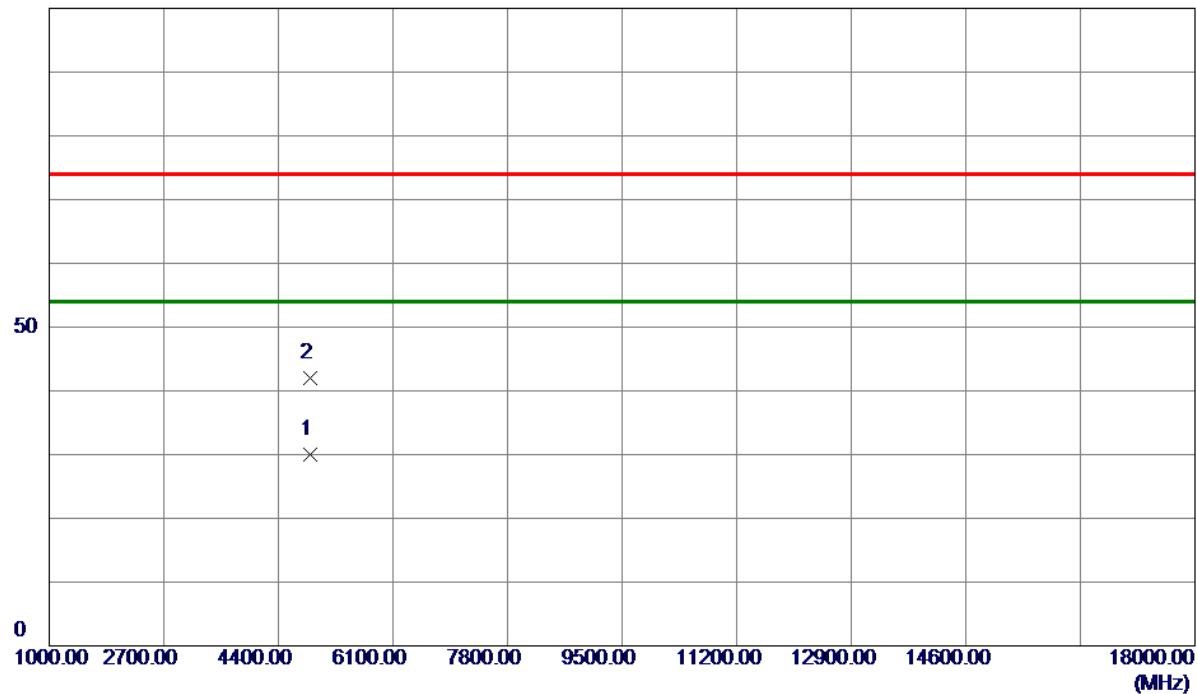


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1 *	4873.4040	25.85	4.09	29.94	54.00	-24.06	AVG	
2	4873.7780	37.86	4.09	41.95	74.00	-32.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

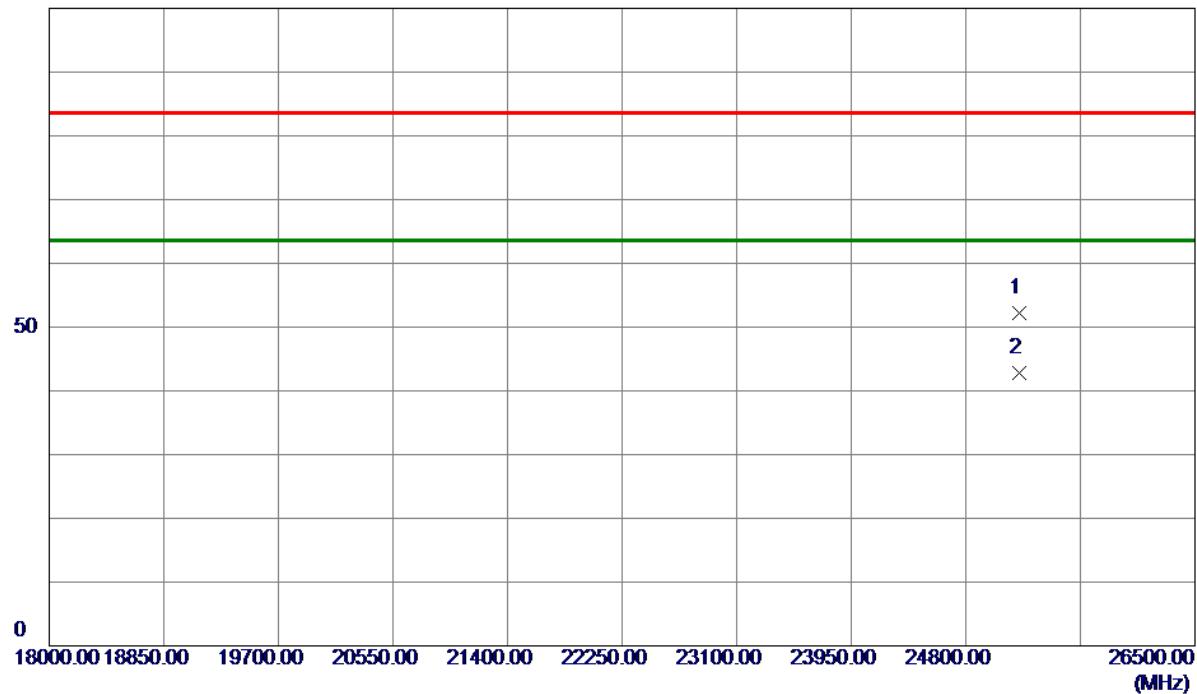


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	25199.5000	49.72	2.43	52.15	83.50	-31.35	Peak	
2 *	25199.5000	40.31	2.43	42.74	63.50	-20.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

100 dBuV/m

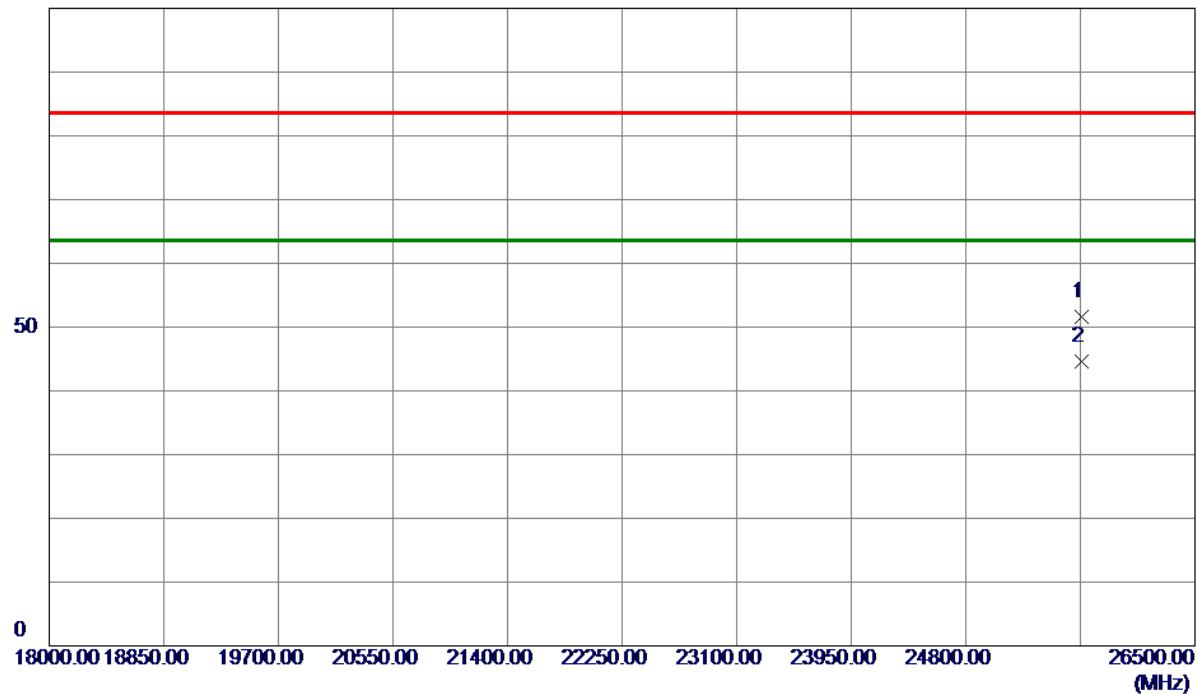

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	25658.5000	49.32	2.33	51.65	83.50	-31.85	Peak	
2 *	25658.5000	42.31	2.33	44.64	63.50	-18.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	8.070	12.552	0.5	Pass
06	2437	8.040	13.847	0.5	Pass
11	2462	8.070	13.245	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11



99 % Occupied Bandwidth

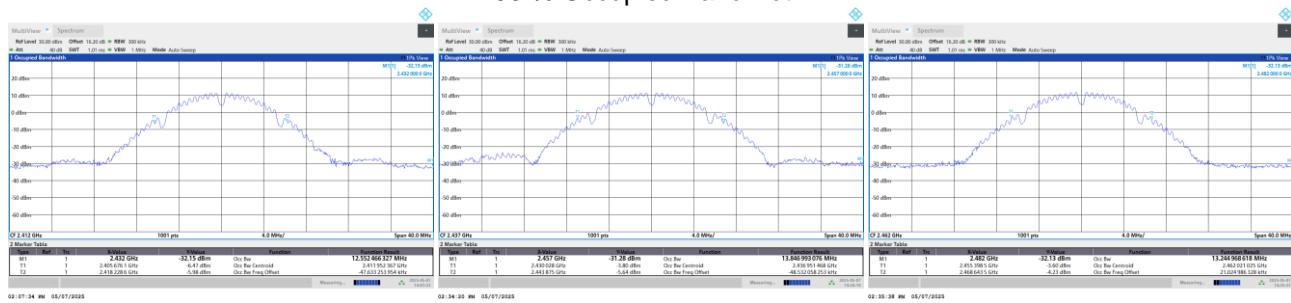

Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.320	17.109	0.5	Pass
06	2437	16.320	17.187	0.5	Pass
11	2462	16.360	17.051	0.5	Pass

CH01

CH06
6 dB Bandwidth

CH11



99 % Occupied Bandwidth




Test Mode	TX AX(HE20) Mode
-----------	------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	19.080	19.139	0.5	Pass
06	2437	19.080	19.174	0.5	Pass
11	2462	19.080	19.230	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11

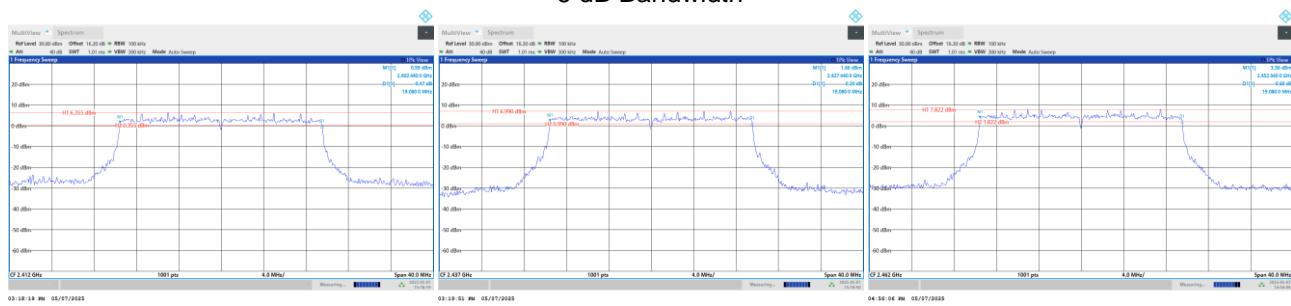

99 % Occupied Bandwidth

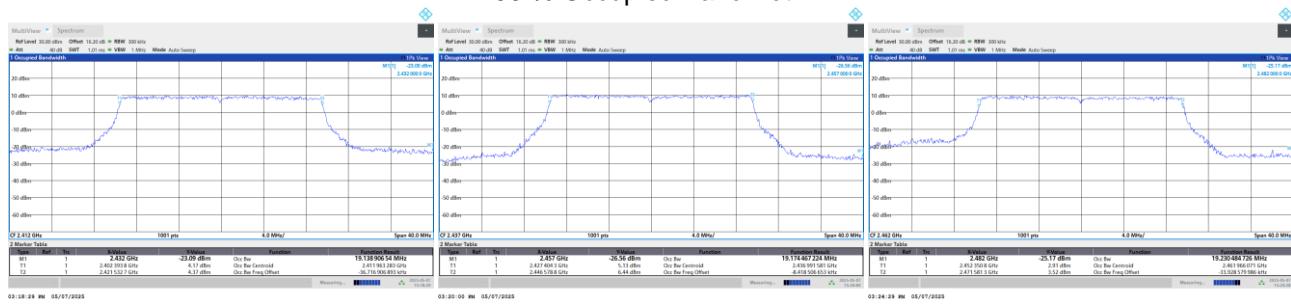

Test Mode TX AX(HE40) Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	38.320	38.617	0.5	Pass
06	2437	38.240	38.497	0.5	Pass
09	2452	38.320	38.548	0.5	Pass


CH03

CH06
6 dB Bandwidth

CH09



99 % Occupied Bandwidth

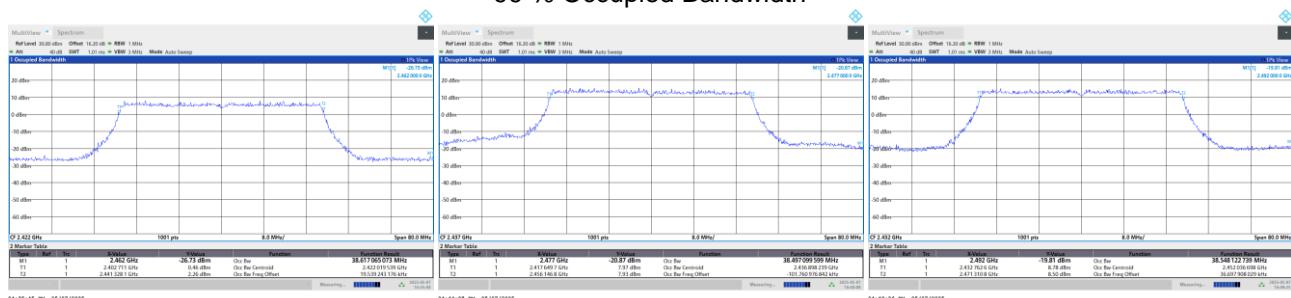

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode TX B Mode_Ant 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.41	0.79	21.20	30.00	1.0000	Pass
06	2437	20.54	0.79	21.33	30.00	1.0000	Pass
11	2462	20.01	0.79	20.80	30.00	1.0000	Pass

Test Mode TX B Mode_Ant 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.85	0.79	20.64	30.00	1.0000	Pass
06	2437	20.01	0.79	20.80	30.00	1.0000	Pass
11	2462	20.13	0.79	20.92	30.00	1.0000	Pass

Test Mode TX B Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.94	30.00	1.0000	Pass
06	2437	24.09	30.00	1.0000	Pass
11	2462	23.87	30.00	1.0000	Pass

Test Mode TX G Mode_Ant 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.86	0.00	17.86	30.00	1.0000	Pass
06	2437	20.04	0.00	20.04	30.00	1.0000	Pass
11	2462	17.43	0.00	17.43	30.00	1.0000	Pass

Test Mode TX G Mode_Ant 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.72	0.00	17.72	30.00	1.0000	Pass
06	2437	20.17	0.00	20.17	30.00	1.0000	Pass
11	2462	17.26	0.00	17.26	30.00	1.0000	Pass

Test Mode TX G Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.80	30.00	1.0000	Pass
06	2437	23.12	30.00	1.0000	Pass
11	2462	20.36	30.00	1.0000	Pass

Test Mode	TX AX(HE20) Mode_Ant 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.89	0.13	17.02	30.00	1.0000	Pass
06	2437	20.24	0.13	20.37	30.00	1.0000	Pass
11	2462	16.25	0.13	16.38	30.00	1.0000	Pass

Test Mode	TX AX(HE20) Mode_Ant 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.71	0.13	16.84	30.00	1.0000	Pass
06	2437	20.06	0.13	20.19	30.00	1.0000	Pass
11	2462	16.39	0.13	16.52	30.00	1.0000	Pass

Test Mode	TX AX(HE20) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.95	30.00	1.0000	Pass
06	2437	23.30	30.00	1.0000	Pass
11	2462	19.46	30.00	1.0000	Pass

Test Mode	TX AX(HE40) Mode_Ant 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	12.83	0.00	12.83	30.00	1.0000	Pass
06	2437	19.18	0.00	19.18	30.00	1.0000	Pass
09	2452	20.14	0.00	20.14	30.00	1.0000	Pass

Test Mode	TX AX(HE40) Mode_Ant 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	12.69	0.00	12.69	30.00	1.0000	Pass
06	2437	19.12	0.00	19.12	30.00	1.0000	Pass
09	2452	20.14	0.00	20.14	30.00	1.0000	Pass

Test Mode	TX AX(HE40) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.77	30.00	1.0000	Pass
06	2437	22.16	30.00	1.0000	Pass
09	2452	23.15	30.00	1.0000	Pass


Note: Output power = Measure result + Cable loss

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode

TX B Mode_Ant. 1


Reference Level-CH01

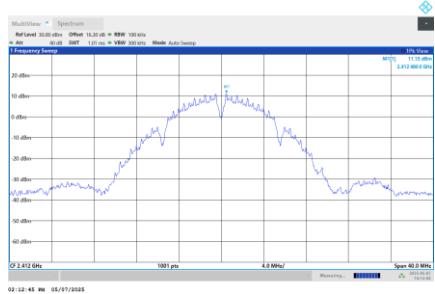


Reference Level-CH06

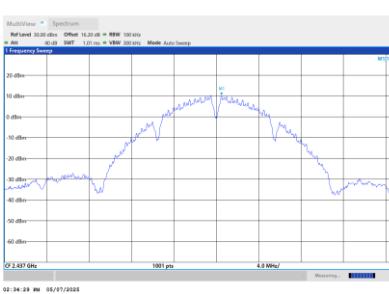


Reference Level-CH11

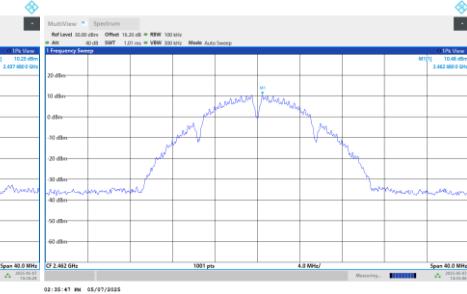


Bandedge-CH01

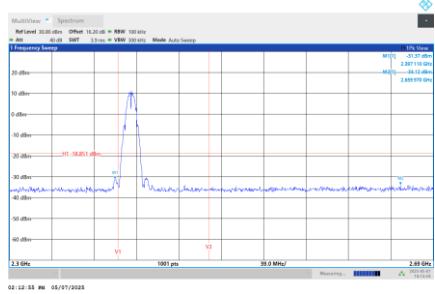

Bandedge-CH11

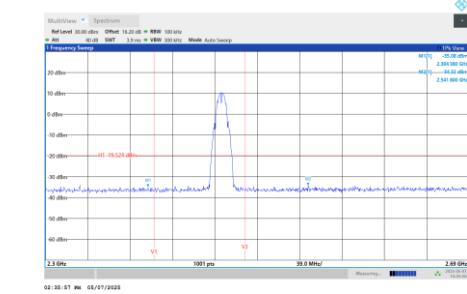


Harmonic-CH01

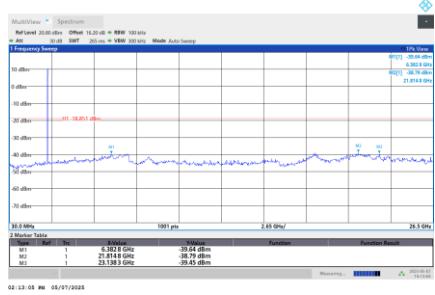

Harmonic-CH06




Harmonic-CH11

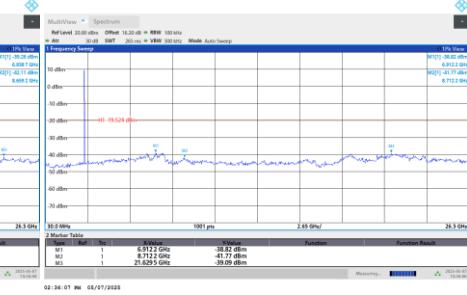

Test Mode

TX B Mode_Ant. 2


Reference Level-CH01

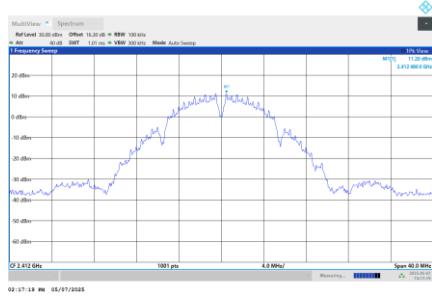


Reference Level-CH06




Reference Level-CH11

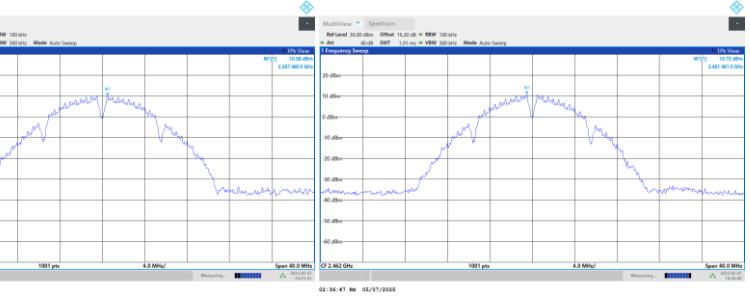

Bandedge-CH01

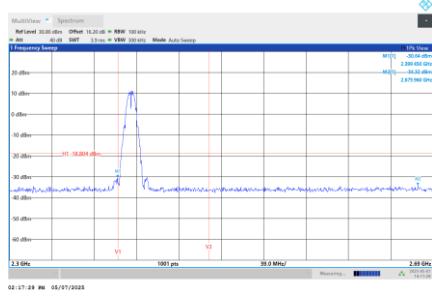


Bandedge-CH11

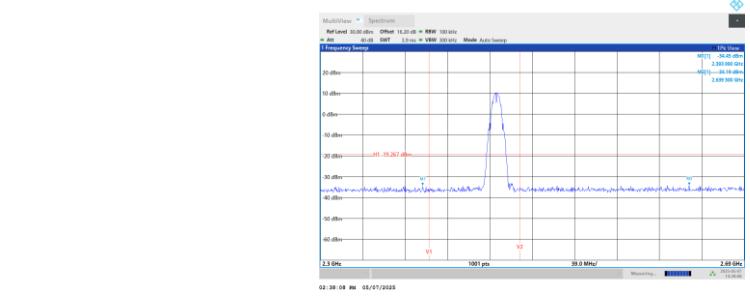

Harmonic-CH01



Harmonic-CH06

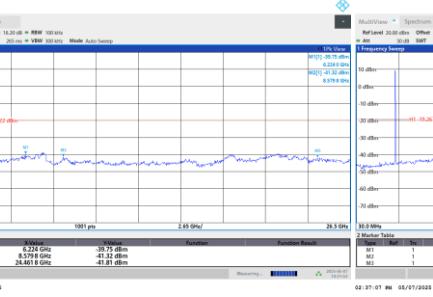


Harmonic-CH11




Test Mode

TX G Mode_Ant. 1


Reference Level-CH01

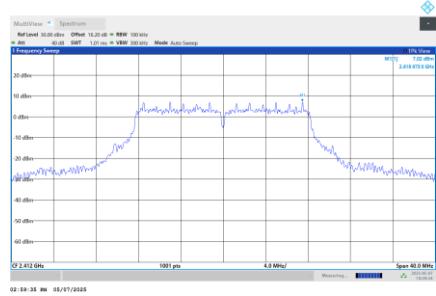


Reference Level-CH06




Reference Level-CH11

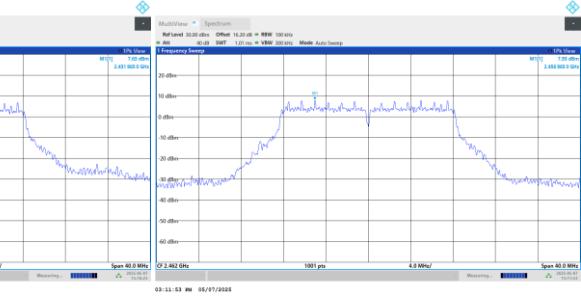

Bandedge-CH01

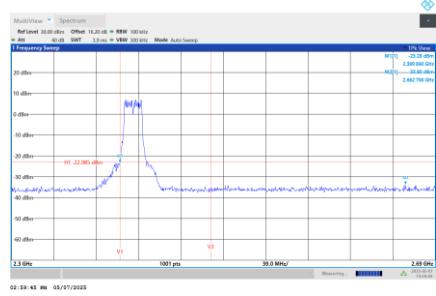


Bandedge-CH11

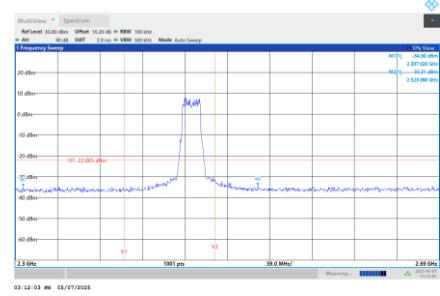


Harmonic-CH01



Harmonic-CH06






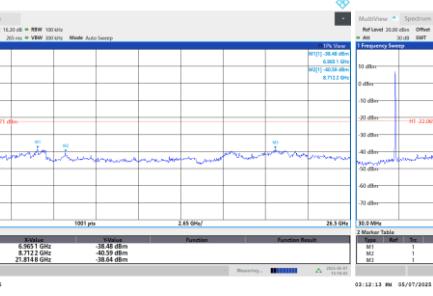



Harmonic-CH11

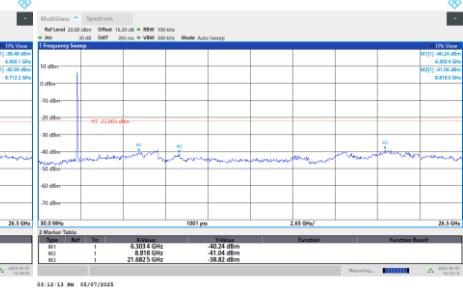

Test Mode









TX G Mode_Ant. 2

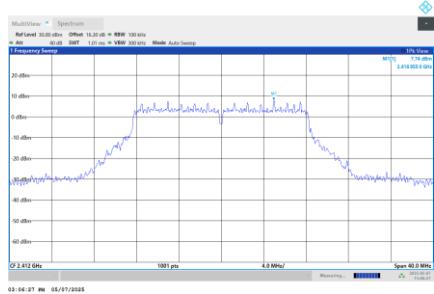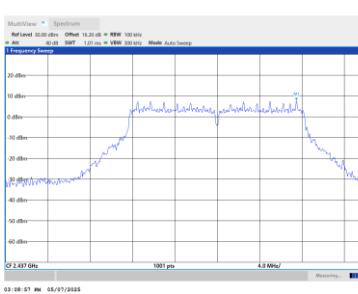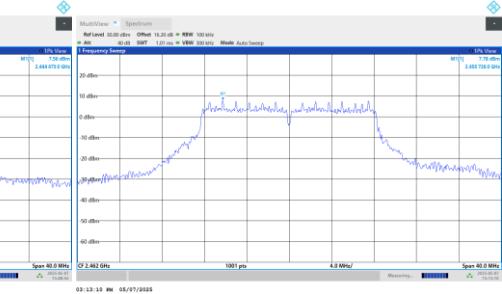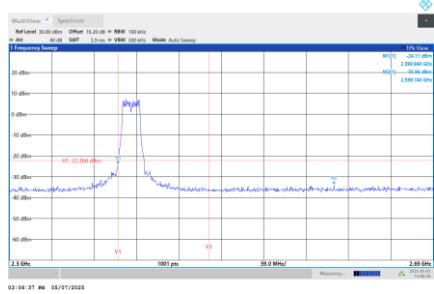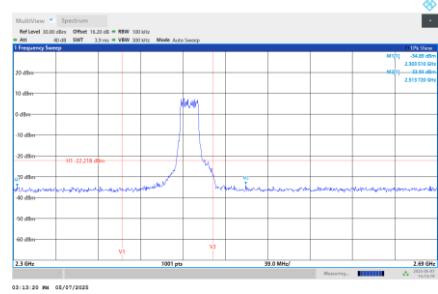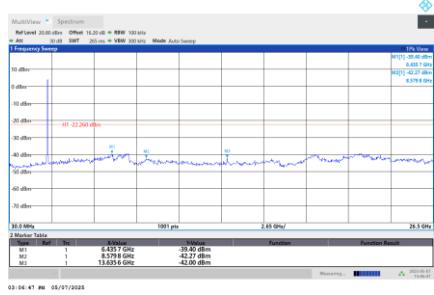Reference Level-CH01

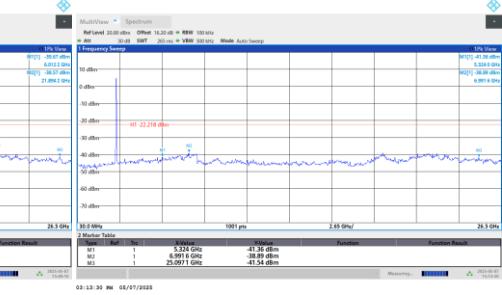Reference Level-CH06

Reference Level-CH11

Bandedge-CH01

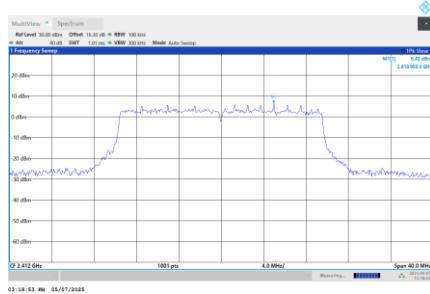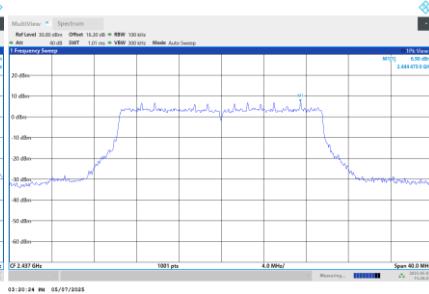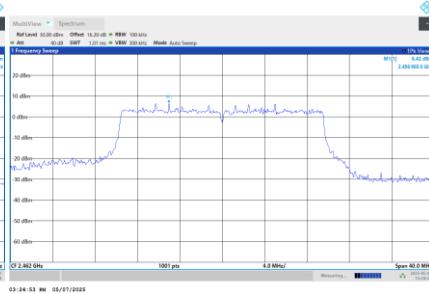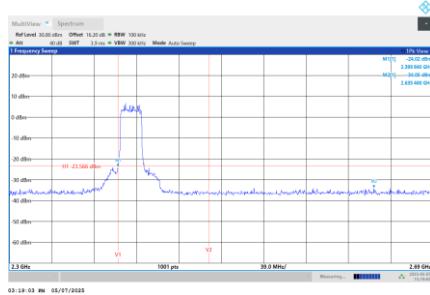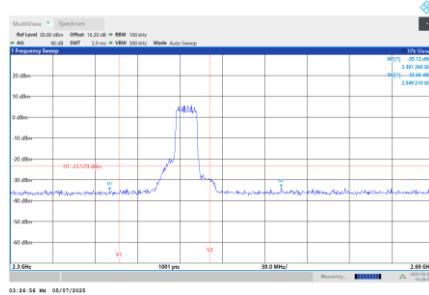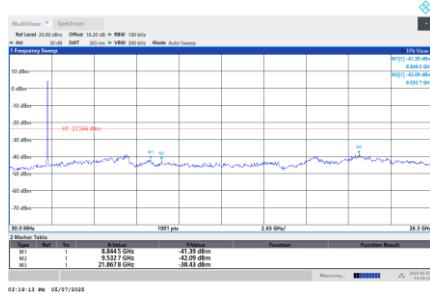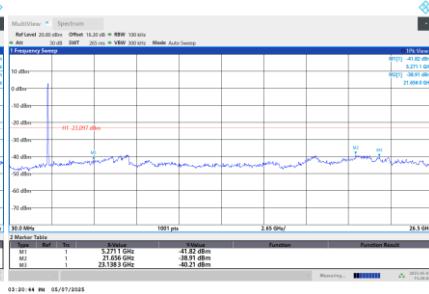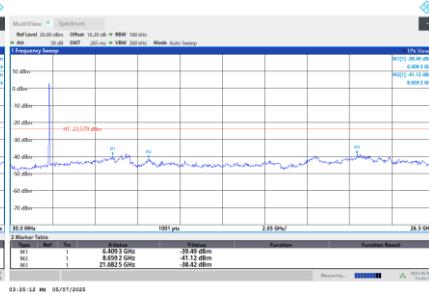Bandedge-CH11

Harmonic-CH01

Harmonic-CH06

Harmonic-CH11


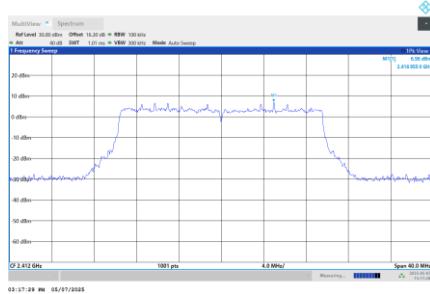

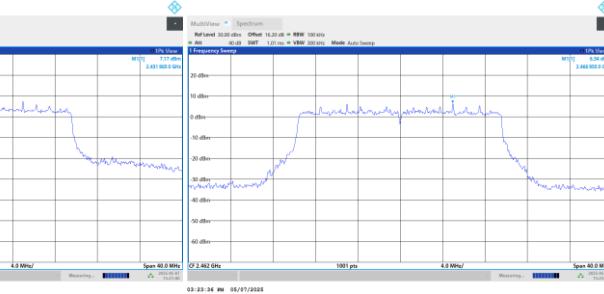
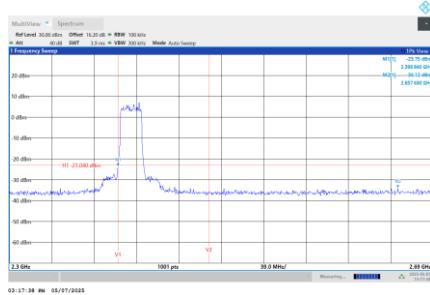
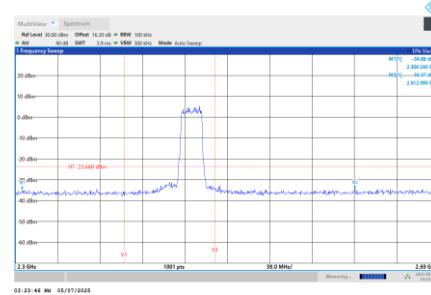
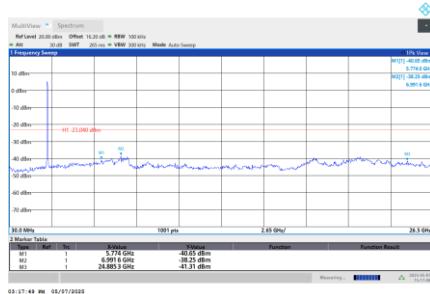
Test Mode


TX AX(HE20) Mode_Ant. 1

Reference Level-CH01

Reference Level-CH06

Reference Level-CH11

Bandedge-CH01

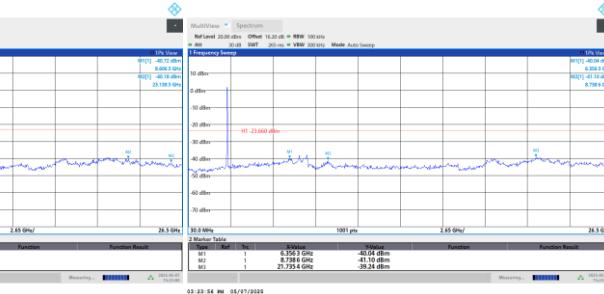Bandedge-CH11

Harmonic-CH01

Harmonic-CH06

Harmonic-CH11


Test Mode

TX AX(HE20) Mode_Ant. 2


Reference Level-CH01

Reference Level-CH06

Reference Level-CH11

Bandedge-CH01

Bandedge-CH11

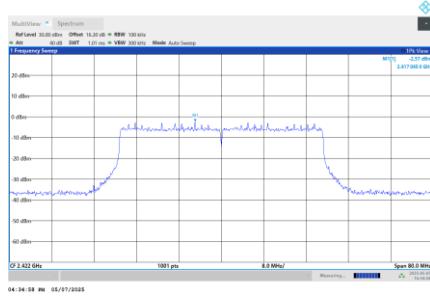Harmonic-CH01

Harmonic-CH06

Harmonic-CH11



Test Mode

TX AX(HE40) Mode_Ant. 1


Reference Level-CH03




Reference Level-CH06




Reference Level-CH09

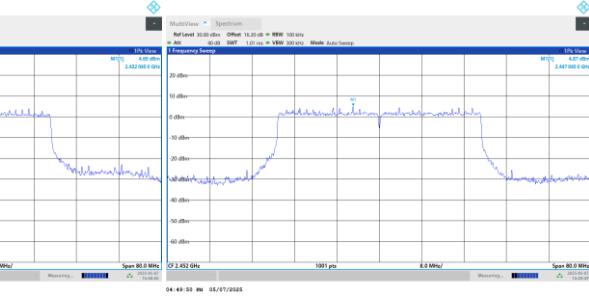


Bandedge-CH03

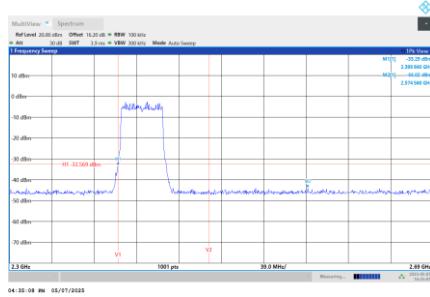


Bandedge-CH09

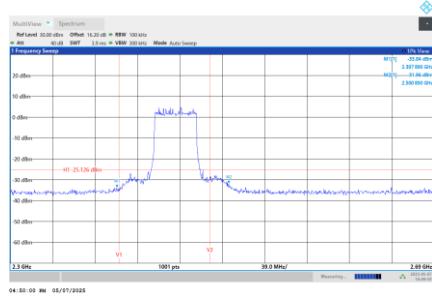

Harmonic-CH03

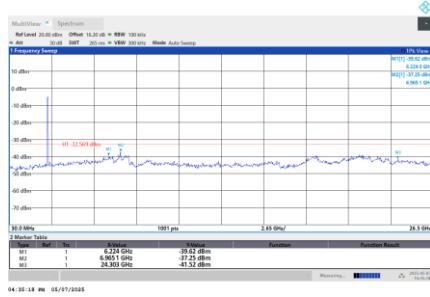

Harmonic-CH06




Harmonic-CH09




Test Mode

TX AX(HE40) Mode_Ant. 2


Reference Level-CH03

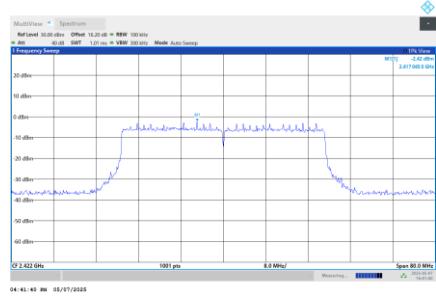


Reference Level-CH06




Reference Level-CH09

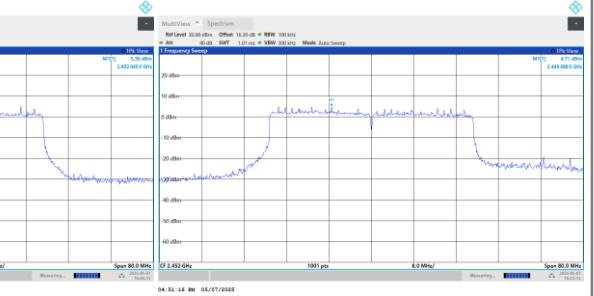


Bandedge-CH03

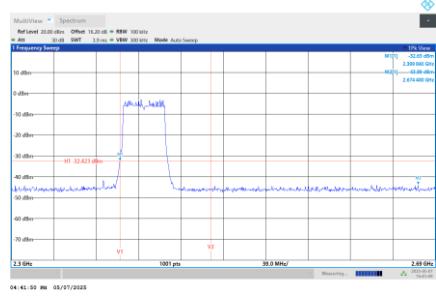


Bandedge-CH09

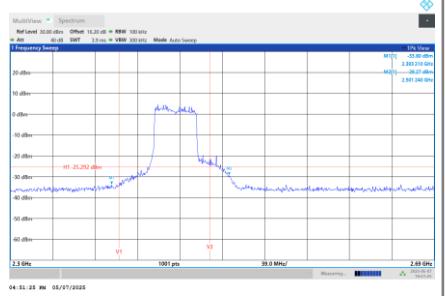

Harmonic-CH03

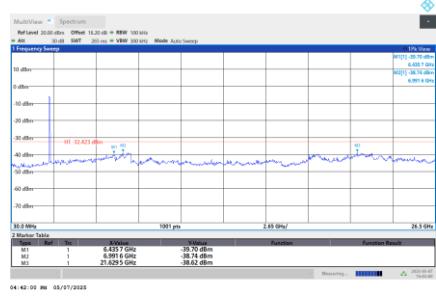

Harmonic-CH06






Harmonic-CH09



APPENDIX H - POWER SPECTRAL DENSITY



Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-2.67	6.89	Pass
06	2437	-4.29	6.89	Pass
11	2462	-4.63	6.89	Pass

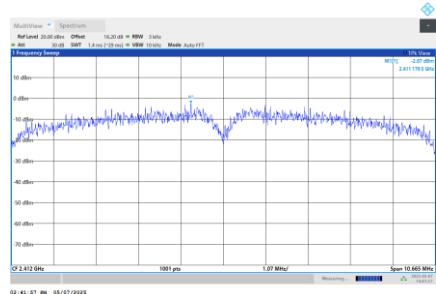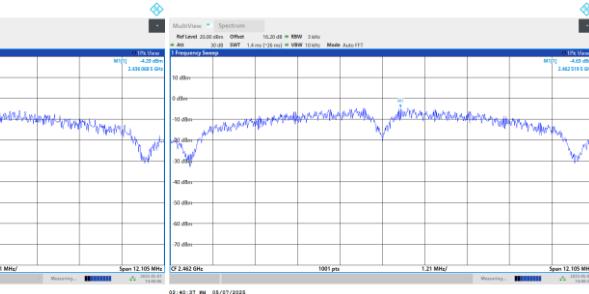CH01

CH06

CH11

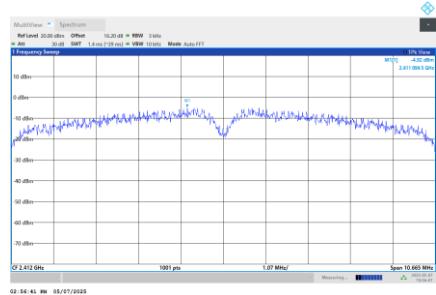
Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.92	6.89	Pass
06	2437	-3.06	6.89	Pass
11	2462	-3.14	6.89	Pass




CH01

CH06

CH11


Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-0.64	6.89	Pass
06	2437	-0.62	6.89	Pass
11	2462	-0.81	6.89	Pass

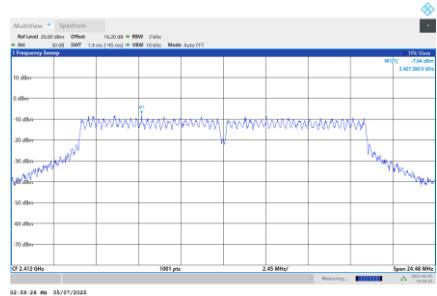
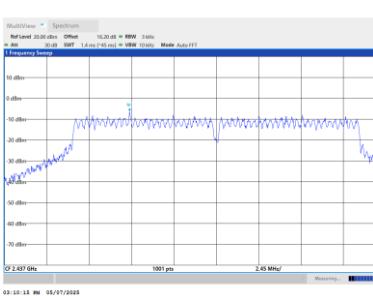
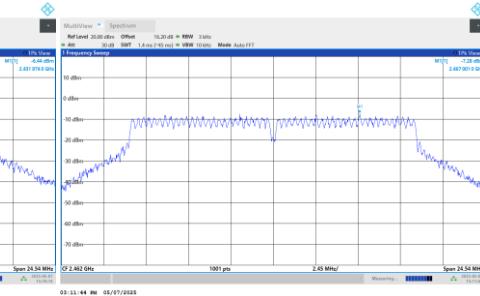
Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-7.64	6.89	Pass
06	2437	-6.44	6.89	Pass
11	2462	-7.28	6.89	Pass

CH01

CH06

CH11

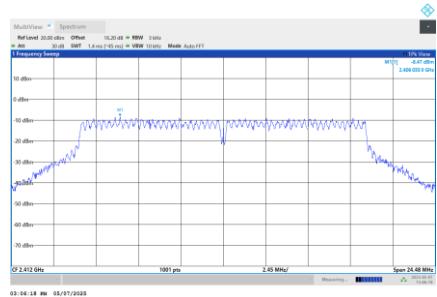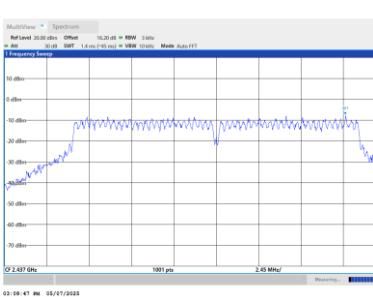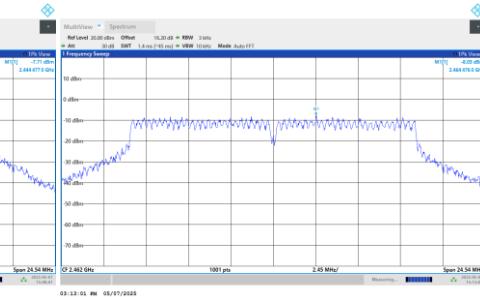
Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-8.47	6.89	Pass
06	2437	-7.71	6.89	Pass
11	2462	-8.03	6.89	Pass

CH01

CH06

CH11


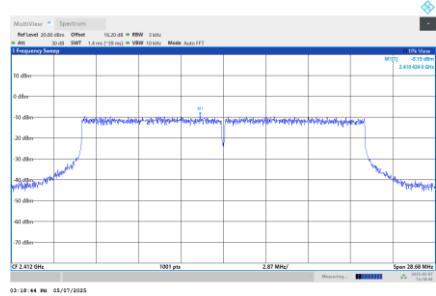
Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-5.02	6.89	Pass
06	2437	-4.02	6.89	Pass
11	2462	-4.63	6.89	Pass


Test Mode	TX AX(HE20) Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-9.19	6.89	Pass
06	2437	-8.51	6.89	Pass
11	2462	-9.48	6.89	Pass


CH01



CH06

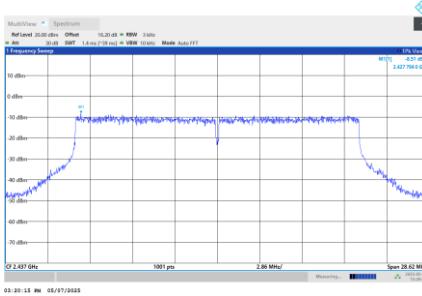


CH11

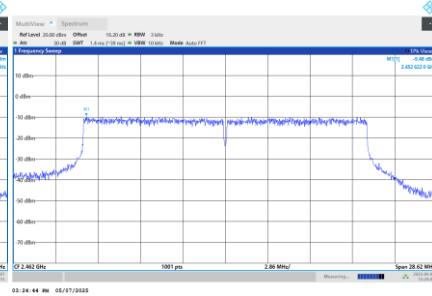


Test Mode	TX AX(HE20) Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-8.40	6.89	Pass
06	2437	-8.44	6.89	Pass
11	2462	-9.76	6.89	Pass


CH01

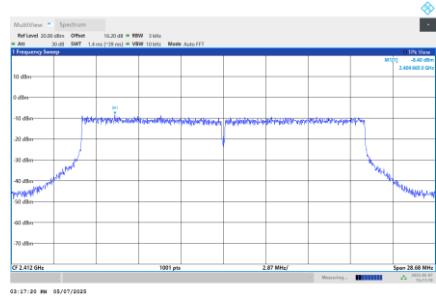

CH06

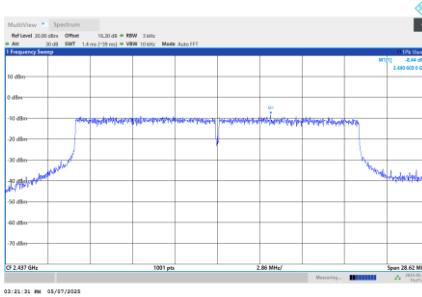

CH11



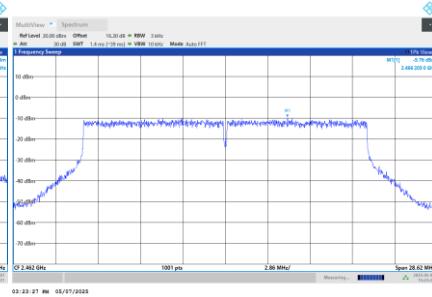


Test Mode	TX AX(HE20) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-5.77	6.89	Pass
06	2437	-5.47	6.89	Pass
11	2462	-6.61	6.89	Pass




Test Mode	TX AX(HE40) Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-18.39	6.89	Pass
06	2437	-10.64	6.89	Pass
09	2452	-10.38	6.89	Pass

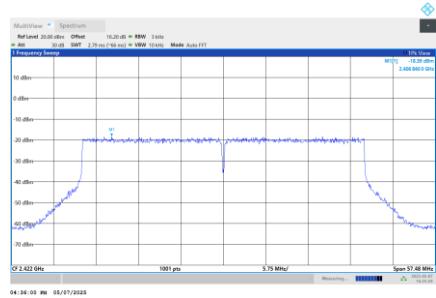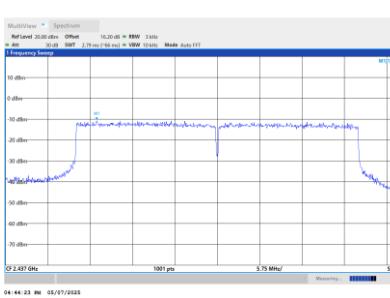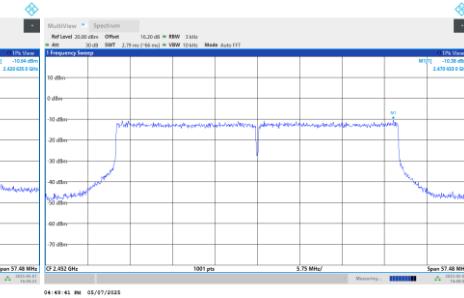CH03

CH06

CH09

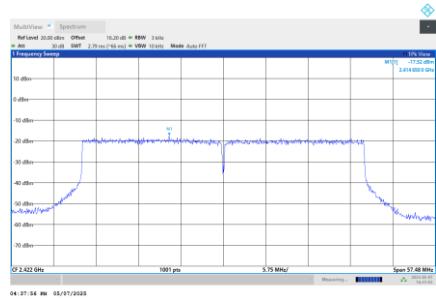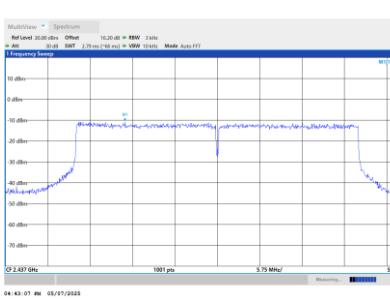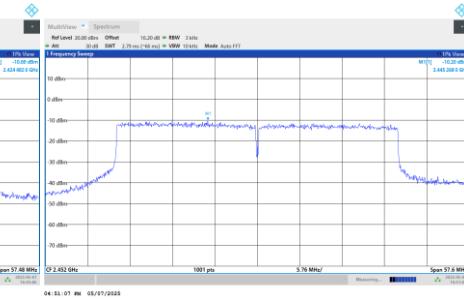
Test Mode	TX AX(HE40) Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-17.52	6.89	Pass
06	2437	-10.69	6.89	Pass
09	2452	-10.20	6.89	Pass

CH03

CH06

CH09


Test Mode	TX AX(HE40) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-14.92	6.89	Pass
06	2437	-7.65	6.89	Pass
09	2452	-7.28	6.89	Pass

End of Test Report