



FCC Radio Test Report

FCC ID: 2BOS5AP9720

This report concerns: Original Grant

Project No. : 2502C254
Equipment : Wireless LAN Access Point
Brand Name : Aicheng
Test Model : AP9720
Series Model : N/A
Applicant : Zhejiang Aicheng Technology Development Co., Ltd.
Address : Room 427,4th Floor,Building 3,No.969 Wenyixi West Rd,Wuchang Street,Yuhang Disct Hangzhou City, Zhejiang Province, China.
Manufacturer : Zhejiang Aicheng Technology Development Co., Ltd.
Address : Room 427, 4th Floor, Building 3, No. 969 Wenyixi West Road, Wuchang Street, Yuhang District, Hangzhou City, Zhejiang Province, China.
Factory : Joy Technology (ShenZhen) Corporation
Address : HengKeng Ind., Shangpai, Shangwu,Aiqun Rd., Shiyen Town,Shenzhen 518108 China
Date of Receipt : Apr. 02, 2025
Date of Test : Apr. 07, 2025 ~ Jun. 23, 2025
Issued Date : Jul. 09, 2025
Report Version : R00
Test Sample : Engineering Sample No.: DG20250402120 for conducted, DG20250402121 for radiated.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : Evan Yang
 Evan Yang

Approved by : Chay Cai
 Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
 Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	17
3.4 DUTY CYCLE	19
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	21
3.6 SUPPORT UNITS	22
3.7 CUSTOMER INFORMATION DESCRIPTION	23
4 . AC POWER LINE CONDUCTED EMISSIONS	24
4.1 LIMIT	24
4.2 TEST PROCEDURE	24
4.3 DEVIATION FROM TEST STANDARD	24
4.4 TEST SETUP	25
4.5 EUT OPERATION CONDITIONS	25
4.6 TEST RESULTS	25
5 . RADIATED EMISSIONS	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM TEST STANDARD	28
5.4 TEST SETUP	28
5.5 EUT OPERATION CONDITIONS	30
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	30
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	30
5.8 TEST RESULTS - ABOVE 1000 MHZ	30
6 . BANDWIDTH	31
6.1 LIMIT	31
6.2 TEST PROCEDURE	31

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	31
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULTS	32
7 . MAXIMUM OUTPUT POWER	33
7.1 LIMIT	33
7.2 TEST PROCEDURE	33
7.3 DEVIATION FROM STANDARD	33
7.4 TEST SETUP	33
7.5 EUT OPERATION CONDITIONS	33
7.6 TEST RESULTS	33
8 . POWER SPECTRAL DENSITY	34
8.1 LIMIT	34
8.2 TEST PROCEDURE	34
8.3 DEVIATION FROM STANDARD	34
8.4 TEST SETUP	35
8.5 EUT OPERATION CONDITIONS	35
8.6 TEST RESULTS	35
9 . FREQUENCY STABILITY	36
9.1 LIMIT	36
9.2 TEST PROCEDURE	36
9.3 DEVIATION FROM STANDARD	36
9.4 TEST SETUP	36
9.5 EUT OPERATION CONDITIONS	36
9.6 TEST RESULTS	36
10 . MEASUREMENT INSTRUMENTS LIST	37
11 . EUT TEST PHOTOS	40
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	46
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	49
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	54
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	57
APPENDIX E - BANDWIDTH	129
APPENDIX F - MAXIMUM OUTPUT POWER	147

Table of Contents	Page
APPENDIX G - POWER SPECTRAL DENSITY	165
APPENDIX H - FREQUENCY STABILITY	201

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-3-2502C254	R00	Original Report.	Jul. 09, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☒ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☐ Client device

2.1 TEST FACILITY

For radiated emissions 1GHz-18GHz:

The test facilities used to collect the test data in this report is at the location of Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For others:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB03 (1m)	CISPR	18 ~ 26.5 GHz	3.36
		26.5 ~ 40 GHz	3.58

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Frequency Stability	2.7 ppm
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	55%	AC 120V/60Hz	Hayden Chen	May 23, 2025
Radiated Emissions -9kHz to 30MHz	25°C	63%	AC 120V/60Hz	Hayden Chen	Apr. 29, 2025
Radiated Emissions -30MHz to 1000MHz	23°C	52%	AC 120V/60Hz	Calvin Wen	May 14, 2025
Radiated Emissions -Above 1GHz-18GHz	23°C	47-50%	AC 120V/60Hz	Allen Tong	May 06, 2025 May 16, 2025
Radiated Emissions -Above 18GHz	21°C	51%	AC 120V/60Hz	Calvin Wen	Apr. 27, 2025
Bandwidth	26°C	52%	PoE 48V	Arvin Tong	May 10, 2025
Maximum Output Power	23-24°C	53%	PoE 48V	Alex Yin	Apr. 24, 2025~ Jun. 19, 2025
Power Spectral Density	23°C	57%	PoE 48V	Arvin Tong	May 09, 2025
Frequency Stability	Normal & Extreme	49%	Normal & Extreme	Arvin Tong	May 12, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless LAN Access Point
Brand Name	Aicheng
Test Model	AP9720
Series Model	N/A
Model Difference(s)	N/A
Hardware Version	R02
Software Version	2.0.88-R-20250320.1606
Power Source	DC Voltage supplied from DC adapter (support unit) or supplied from PoE port.
Power Rating	PoE 48V  0.5A or DC 12V  2A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 600 Mbps IEEE 802.11ac: up to 3466.8 Mbps IEEE 802.11ax: up to 4804 Mbps IEEE 802.11be: up to 5764 Mbps
Maximum Output Power UNII-1	IEEE 802.11ax(HE20): 20.76 dBm (0.1191 W)
Maximum Output Power UNII-2A	IEEE 802.11ax(HE160): 17.50 dBm (0.0562 W)
Maximum Output Power UNII-2C	IEEE 802.11ax(HE80): 17.99 dBm (0.0630 W)
Maximum Output Power UNII-3	IEEE 802.11ax(HE20): 26.10 dBm (0.4076 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

IEEE 802.11ac(VHT160) IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
50	5250

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	Angeei	MD246001-01	PIFA	IPEX	6.4
2	Angeei	MD246001-01	PIFA	IPEX	7.1
3	Angeei	MD246001-01	PIFA	IPEX	7.3
4	Angeei	MD246001-01	PIFA	IPEX	6.8

Note:

1) This EUT supports CDD, and Directional gain = $G_{ANT} + \text{Array Gain}$.

For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=7.30. So, the UNII-1, UNII-3 output power limit is $30 - (7.30 - 6) = 28.70$, the UNII-2A and UNII-2C output power limit is $23.98 - (7.30 - 6) = 22.68$.

For power spectral density measurements, $N_{ANT} = 4$, $N_{SS} = 1$.

So the Directional gain = $G_{ANT} + \text{Array Gain} = G_{ANT} + 10 \log(N_{ANT} / N_{SS}) \text{dBi} = 7.30 + 10 \log(4/1) \text{dBi} = 13.32$.

Then, The UNII-1 power spectral density limit is $17 - (13.32 - 6) = 9.68$, the UNII-2A, UNII-2C power spectral density limit is $11 - (13.32 - 6) = 3.68$, the UNII-3 power spectral density limit is $30 - (13.32 - 6) = 22.68$.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	4TX
IEEE 802.11a		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT20)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT40)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT80)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)
IEEE 802.11be(EHT160)		V (Ant. 1 + Ant. 2 + Ant. 3 + Ant. 4)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 9	TX AX(HE160) Mode Channel 50 (UNII-1+UNII-2A)
Mode 10	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 12	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 13	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 14	TX A Mode Channel 149/157/165 (UNII-3)
Mode 15	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 16	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 17	TX AX(HE80) Mode Channel 155 (UNII-3)
Mode 18	TX AX(HE20) Mode Channel 157(UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 18	TX AX(HE20) Mode Channel 157(UNII-3)

Radiated Emissions Test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 18	TX AX(HE20) Mode Channel 157(UNII-3)

Radiated Emissions Test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48(UNII-1)
Mode 2	TX AX(HE20) Mode Channel 36/40/48(UNII-1)
Mode 3	TX AX(HE40) Mode Channel 38/46(UNII-1)
Mode 4	TX AX(HE80) Mode Channel 42(UNII-1)
Mode 5	TX A Mode Channel 52/60/64(UNII-2A)
Mode 6	TX AX(HE20) Mode Channel 52/60/64(UNII-2A)
Mode 7	TX AX(HE40) Mode Channel 54/62(UNII-2A)
Mode 8	TX AX(HE80) Mode Channel 58(UNII-2A)
Mode 9	TX AX(HE160) Mode Channel 50(UNII-1+UNII-2A)
Mode 10	TX A Mode Channel 100/116/140(UNII-2C)
Mode 11	TX AX(HE20) Mode Channel 100/116/140(UNII-2C)
Mode 12	TX AX(HE40) Mode Channel 102/110/134(UNII-2C)
Mode 13	TX AX(HE80) Mode Channel 106/122(UNII-2C)
Mode 14	TX A Mode Channel 149/157/165(UNII-3)
Mode 15	TX AX(HE20) Mode Channel 149/157/165(UNII-3)
Mode 16	TX AX(HE40) Mode Channel 151/159(UNII-3)
Mode 17	TX AX(HE80) Mode Channel 155(UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48(UNII-1)
Mode 2	TX AX(HE20) Mode Channel 36/40/48(UNII-1)
Mode 3	TX AX(HE40) Mode Channel 38/46(UNII-1)
Mode 4	TX AX(HE80) Mode Channel 42(UNII-1)
Mode 5	TX A Mode Channel 52/60/64(UNII-2A)
Mode 6	TX AX(HE20) Mode Channel 52/60/64(UNII-2A)
Mode 7	TX AX(HE40) Mode Channel 54/62(UNII-2A)
Mode 8	TX AX(HE80) Mode Channel 58(UNII-2A)
Mode 9	TX AX(HE160) Mode Channel 50(UNII-1+UNII-2A)
Mode 10	TX A Mode Channel 100/116/140(UNII-2C)
Mode 11	TX AX(HE20) Mode Channel 100/116/140(UNII-2C)
Mode 12	TX AX(HE40) Mode Channel 102/110/134(UNII-2C)
Mode 13	TX AX(HE80) Mode Channel 106/122(UNII-2C)
Mode 14	TX A Mode Channel 149/157/165(UNII-3)
Mode 15	TX AX(HE20) Mode Channel 149/157/165(UNII-3)
Mode 16	TX AX(HE40) Mode Channel 151/159(UNII-3)
Mode 17	TX AX(HE80) Mode Channel 155(UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AX(HE20) Mode Channel 157(UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.
- (6) IEEE 802.11ax mode and IEEE 802.11be mode only supports full RU, so only the full RU is evaluated and measured inside report.
- (7) HE20/HE40/HE80/HE160 covers HT20/HT40, VHT20/VHT40/VHT80/VHT160 and EHT20/EHT40/EHT80/EHT160, due to same modulation (in full RU). The power setting for 802.11n HT20/HT40, 802.11ac VHT20/VHT40/VHT80/VHT160 and EHT20/EHT40/EHT80/EHT160 are the same or lower than 802.11ax HE20/HE40/HE80/HE160.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	IPOP_V4.0		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	6	6	15.5
IEEE 802.11ax(HE20)	6	7	16
Frequency (MHz)	5190	5230	
IEEE 802.11ax(HE40)	9	9	
Frequency (MHz)	5210		
IEEE 802.11ax(HE80)	13		

UNII-2A			
Test Software Version	IPOP_V4.0		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	9.5	5	5
IEEE 802.11ax(HE20)	10	5	5
Frequency (MHz)	5270	5310	
IEEE 802.11ax(HE40)	9	8	
Frequency (MHz)	5290		
IEEE 802.11ax(HE80)	11		

UNII-1+UNII-2A	
Test Software Version	IPOP_V4.0
Frequency (MHz)	5250
IEEE 802.11ax(HE160)	13

UNII-2C			
Test Software Version	IPOP_V4.0		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	4	10.5	9
IEEE 802.11ax(HE20)	5	10.5	9
Frequency (MHz)	5510	5550	5670
IEEE 802.11ax(HE40)	8	13.5	12
Frequency (MHz)	5530	5610	
IEEE 802.11ax(HE80)	11	14	

UNII-3			
Test Software Version	IPOP_V4.0		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	11	22	10
IEEE 802.11ax(HE20)	9	22	8
Frequency (MHz)	5755	5795	
IEEE 802.11ax(HE40)	12	11	
Frequency (MHz)	5775		
IEEE 802.11ax(HE80)	15		

3.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

802.11a

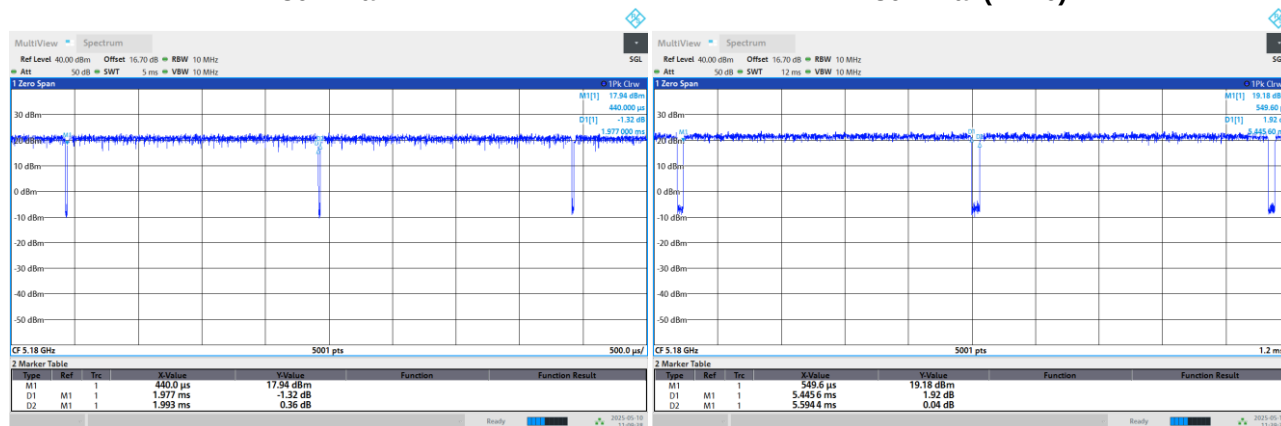


11:09:38 AM 05/10/2025

Duty cycle = $1.977 \text{ ms} / 1.993 \text{ ms} = 99.20\%$

Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00 \text{ dB}$

802.11ax(HE20)

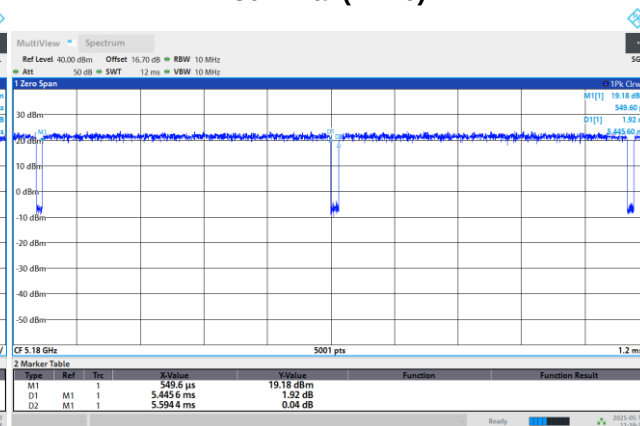


11:39:33 AM 05/10/2025

Duty cycle = $5.445 \text{ ms} / 5.594 \text{ ms} = 97.34\%$

Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.12 \text{ dB}$

802.11ax(HE40)

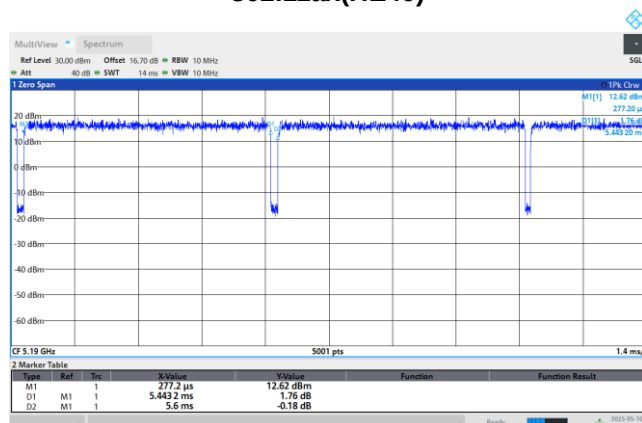


11:42:49 AM 05/10/2025

Duty cycle = $5.443 \text{ ms} / 5.600 \text{ ms} = 97.20\%$

Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.12 \text{ dB}$

802.11ax(HE80)

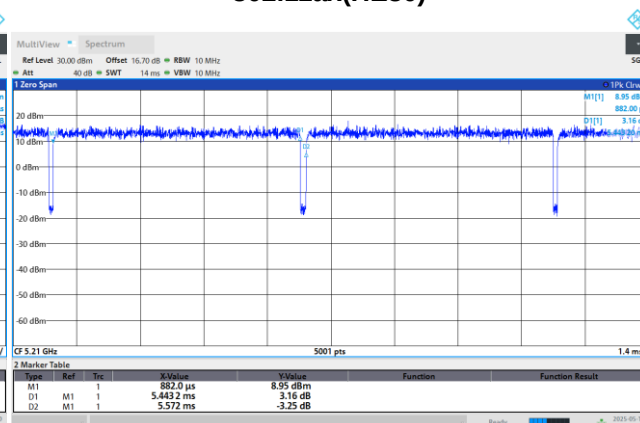

11:37:10 AM 05/10/2025

Duty cycle = $5.443 \text{ ms} / 5.572 \text{ ms} = 97.69\%$

Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.10 \text{ dB}$

MultiView Spectrum

Ref Level 30.00 dBm Offset 16.70 dB RBW 10 MHz

ATL 40 dB SWT 14 ms VBW 10 MHz

Zero Span

20 dBm

0 dBm

-10 dBm

-20 dBm

-30 dBm

-40 dBm

-50 dBm

-60 dBm

CP 5.15 GHz 5001 pts 1.4 ms

3 Marker Table

Type	Ref	Ts	X-Value	Y-Value	Function	Function Result
M1	1		1.2628 ms	-6.51 dBm		
D1	M1	1	5.4432 ms	-2.07 dB		
D2	M1	1	5.572 ms	-1.58 dB		

Really

2023/05/11 13:48:00

NOTE:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $\geq 98\%$).

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).


For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).


For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 184 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC power line conducted emissions test

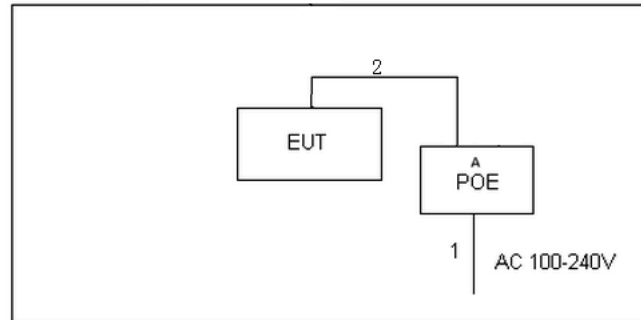

For Radiated emissions test - Below 1GHz & Above 18 GHz

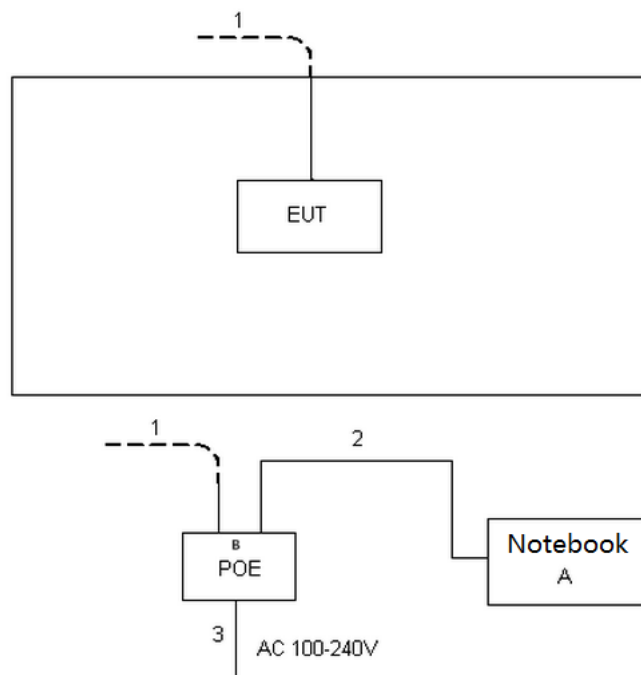

For Radiated emissions test 1 GHz - 18 GHz

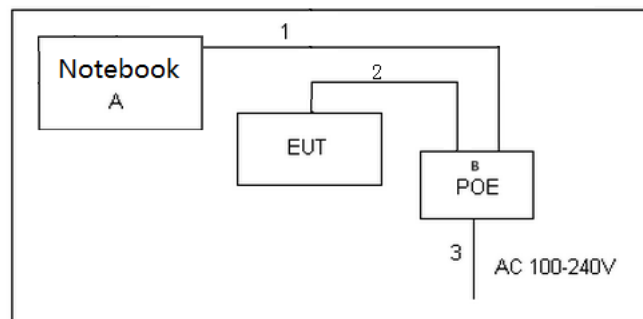

3.6 SUPPORT UNITS

For AC power line conducted emissions test

Item	Equipment	Brand	Model No.	Series No.
A	POE	tp-link	POE4824G	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
2	RJ45 Cable	NO	NO	1.5m
3	AC Cable	NO	NO	1.5m

For Radiated emissions test - Below 1GHz & Above 18 GHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A
B	POE	tp-link	POE4824G	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	10m
2	RJ45 Cable	NO	NO	1m
3	AC Cable	NO	NO	1.5m

For Radiated emissions test 1 GHz - 18 GHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A
B	POE	tp-link	POE4824G	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	1m
3	AC Cable	NO	NO	1.5m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

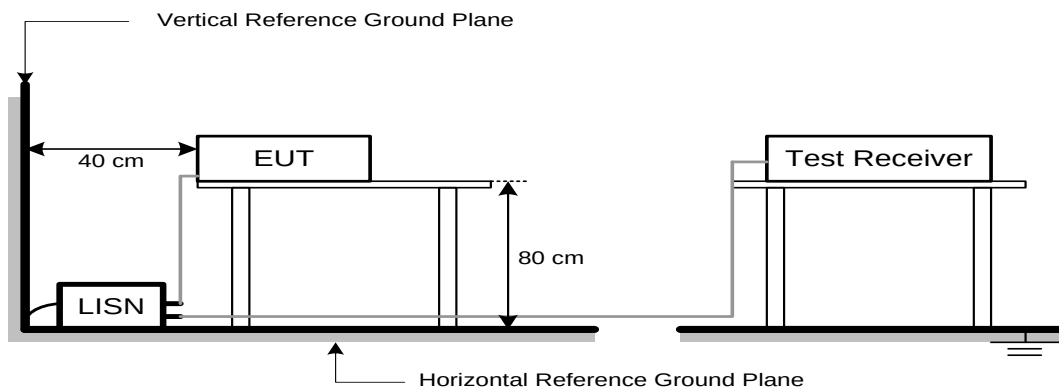

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

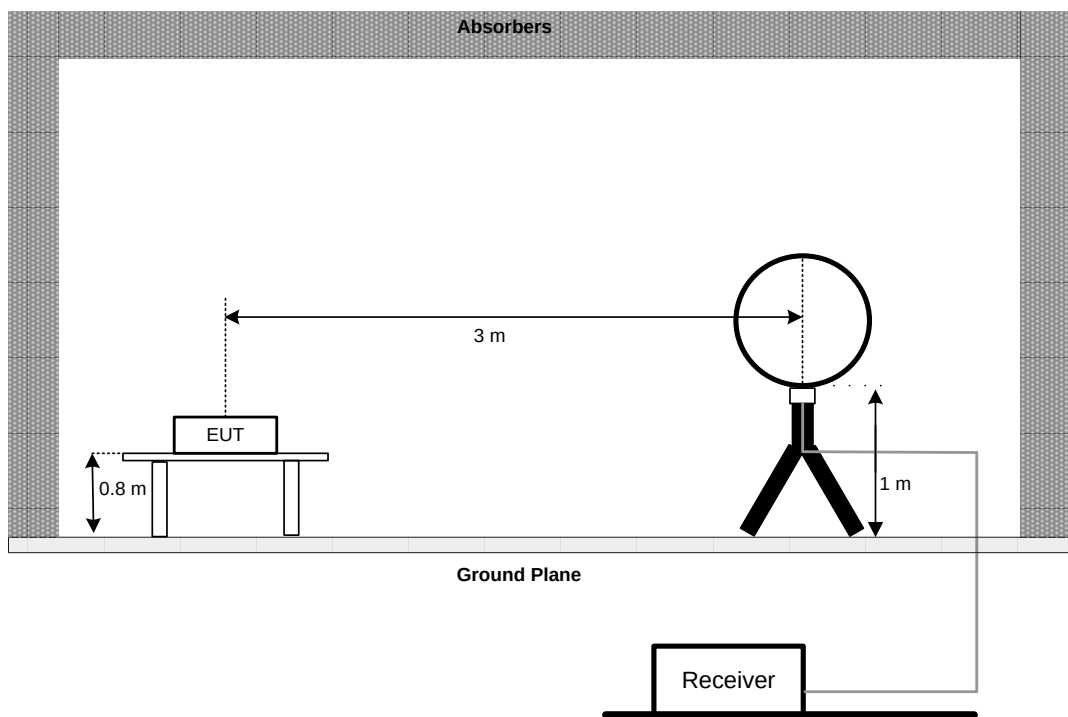


30 MHz to 1 GHz

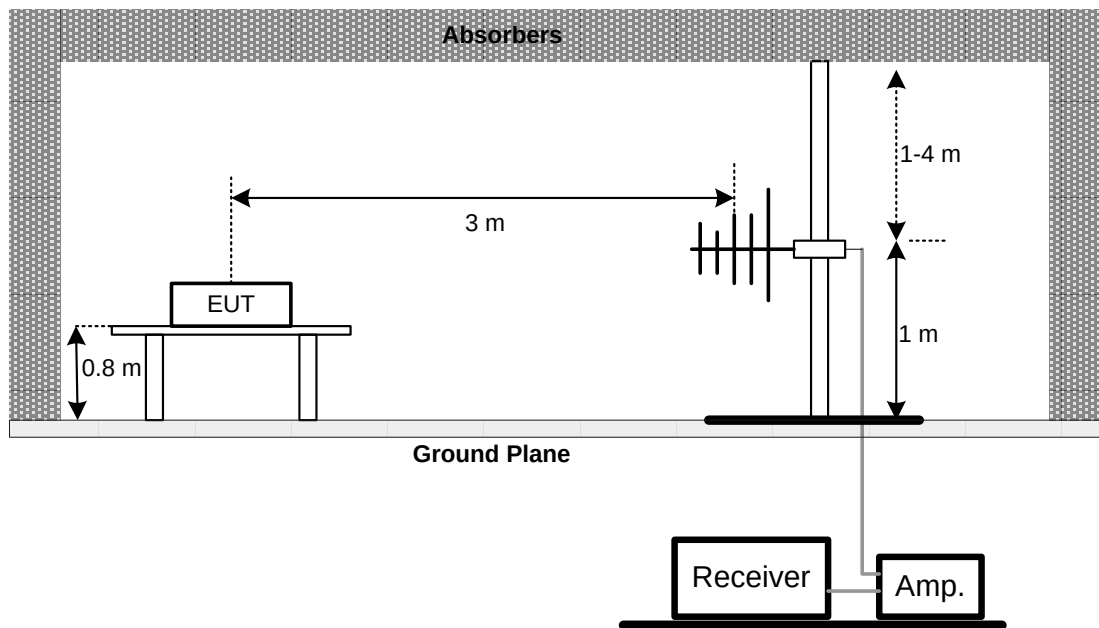

**Above 1 GHz
Band edge & Harmonic (1 GHz to 18 GHz)**

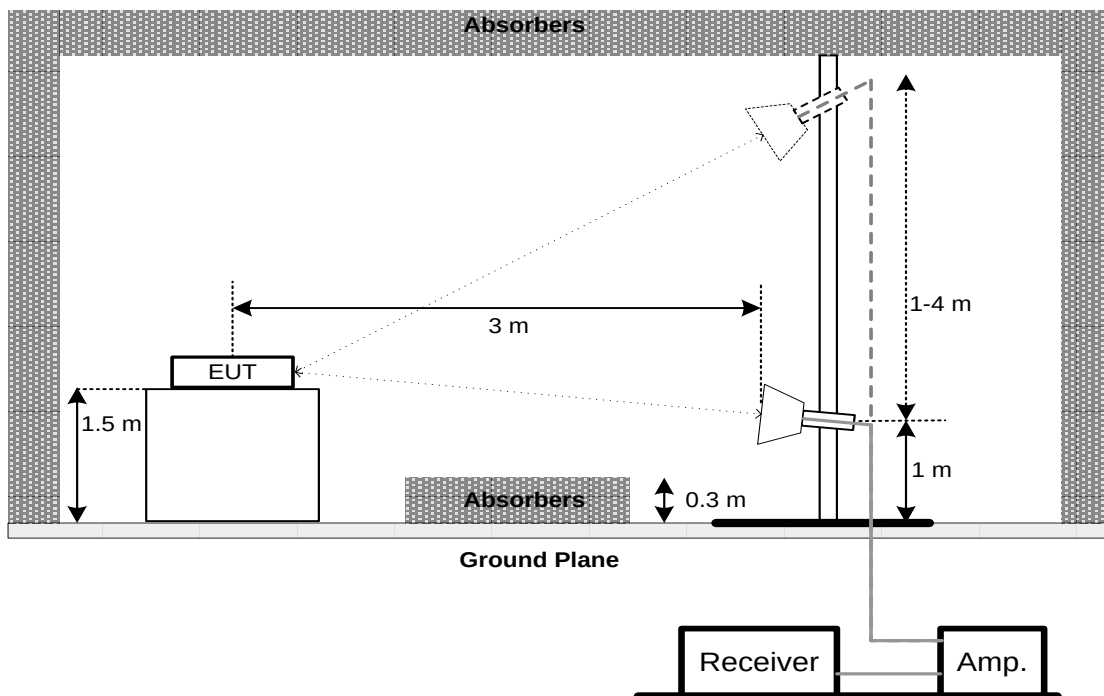

Harmonic (18 GHz to 40 GHz)

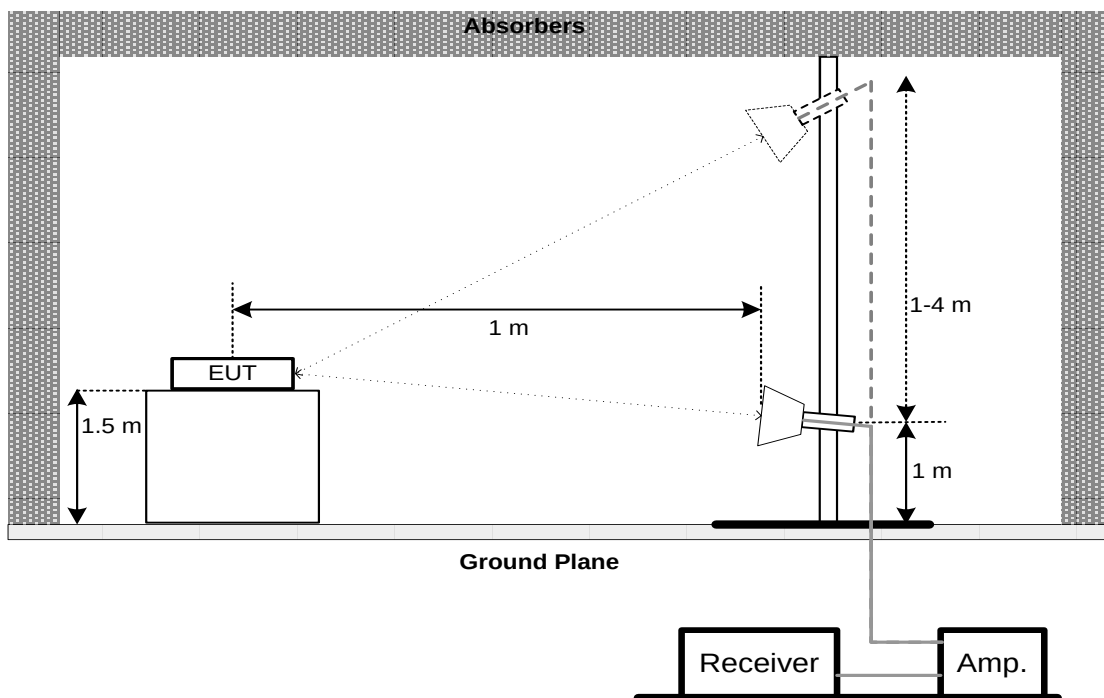

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBUV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

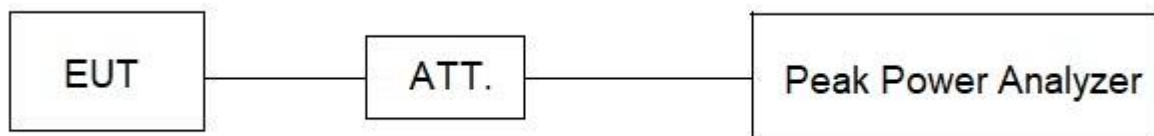

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz
VBW	300 kHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is 0°C~45°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

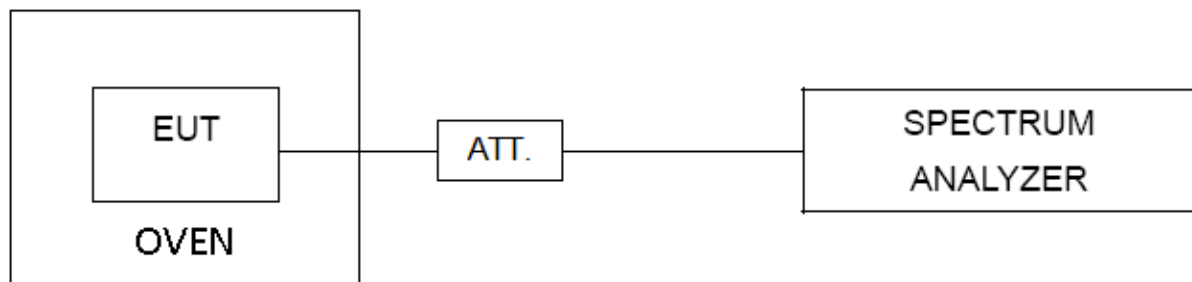

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
3	Cable	RegalWay	LMR400-NMNM-6 m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	966 Chamber room	CM	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14,2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 31,2025
4	Cable	RegalWay	LMR400-NMNM-12.5 m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 09, 2026

Radiated Emissions - 1 GHz - 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Apr. 06, 2026
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Apr. 06, 2026
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Apr. 06, 2026
7	966 Chamber room	ETS	RFD-100(SVSWR)	Q2179	Jan. 07, 2026
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Filter	STI	STI15-9969	N/A	Oct. 29, 2025
11	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-1.1M	N/A	Jul. 25, 2025
3	Cable	Tonscend	HF160-KMKM-3M	N/A	Jul. 25, 2025
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
5	966 Chamber room	CM	9*6*6	N/A	May 10, 2026
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	FSV Signal & Spectrum Analyzer	R&S	FSV3044	101682	Oct. 17, 2025
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025 May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025 May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A

Frequency Stability					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	FSV Signal & Spectrum Analyzer	R&S	FSV3044	101682	Oct. 17, 2025
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Jan. 10, 2026
5	DC power supply	UNI-T	UDP6721	AWP7224050031	Dec. 06, 2025
6	Cable	RegalWay	202108020 019	RWP50-402-SMSM-1M	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



11. EUT TEST PHOTOS

AC Power Line Conducted Emissions Test Photos





Radiated Emissions Test Photos

9 kHz to 30 MHz

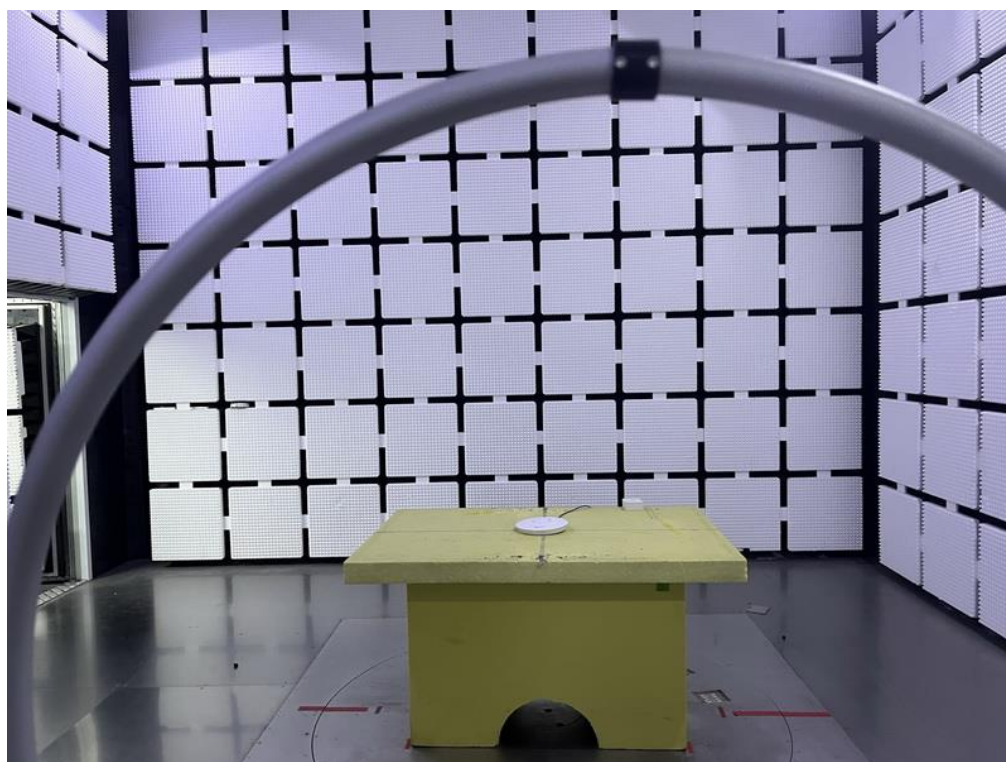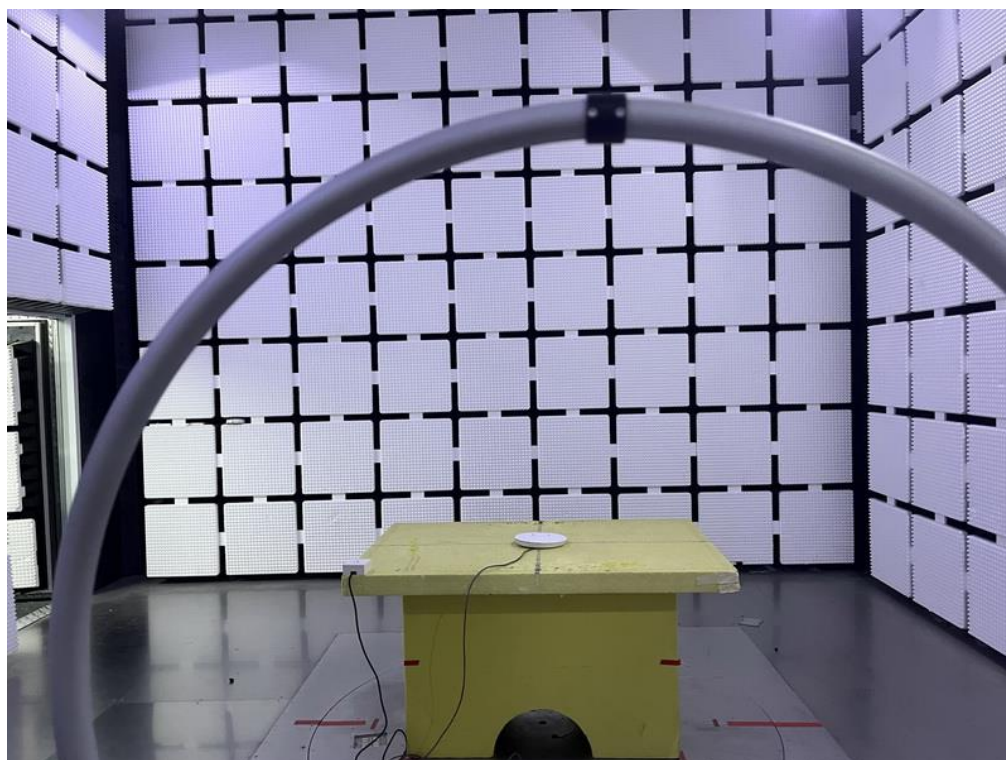



Radiated Emissions Test Photos

30 MHz to 1 GHz

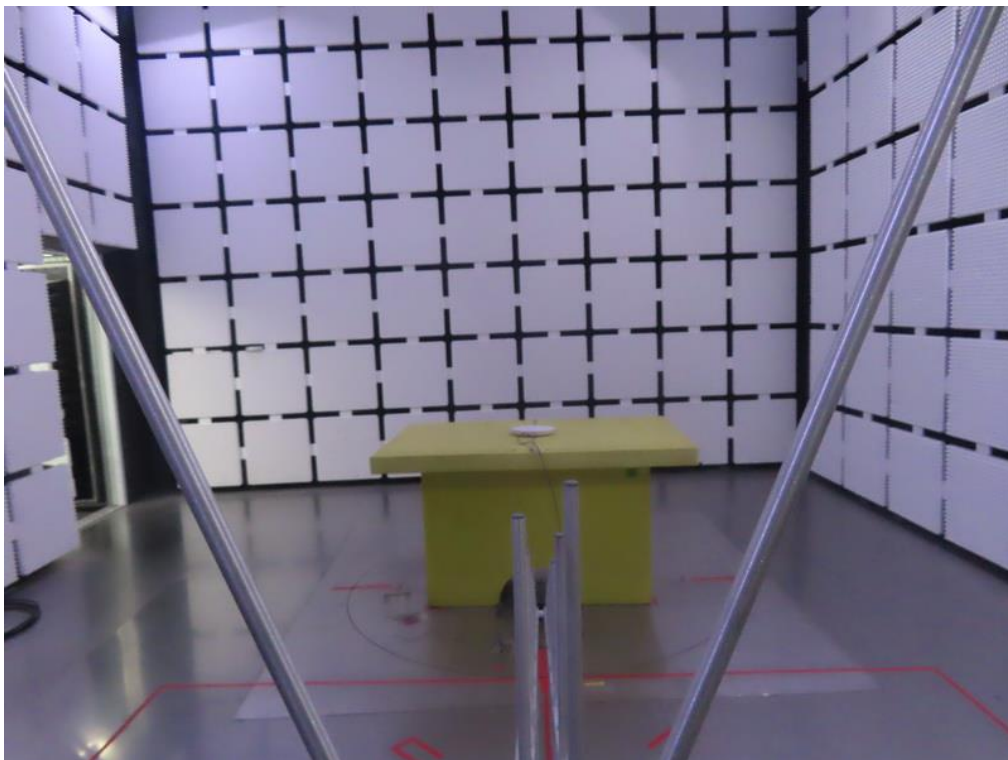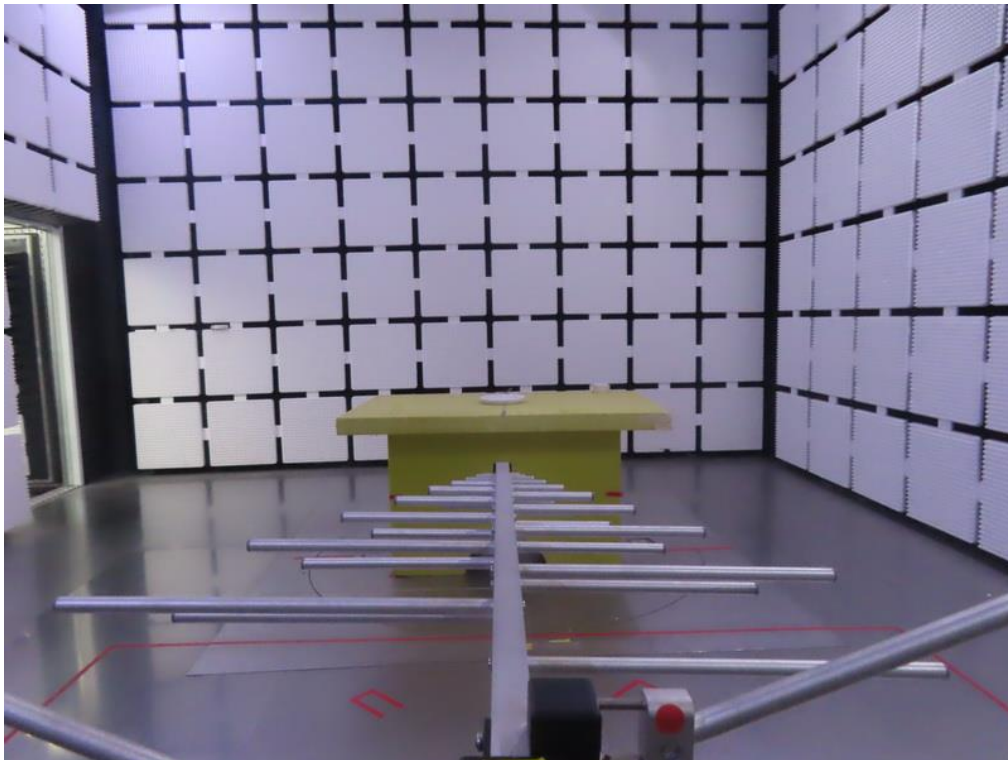

Radiated Emissions Test Photos

Band edge & Harmonic(1 GHz to 18 GHz)

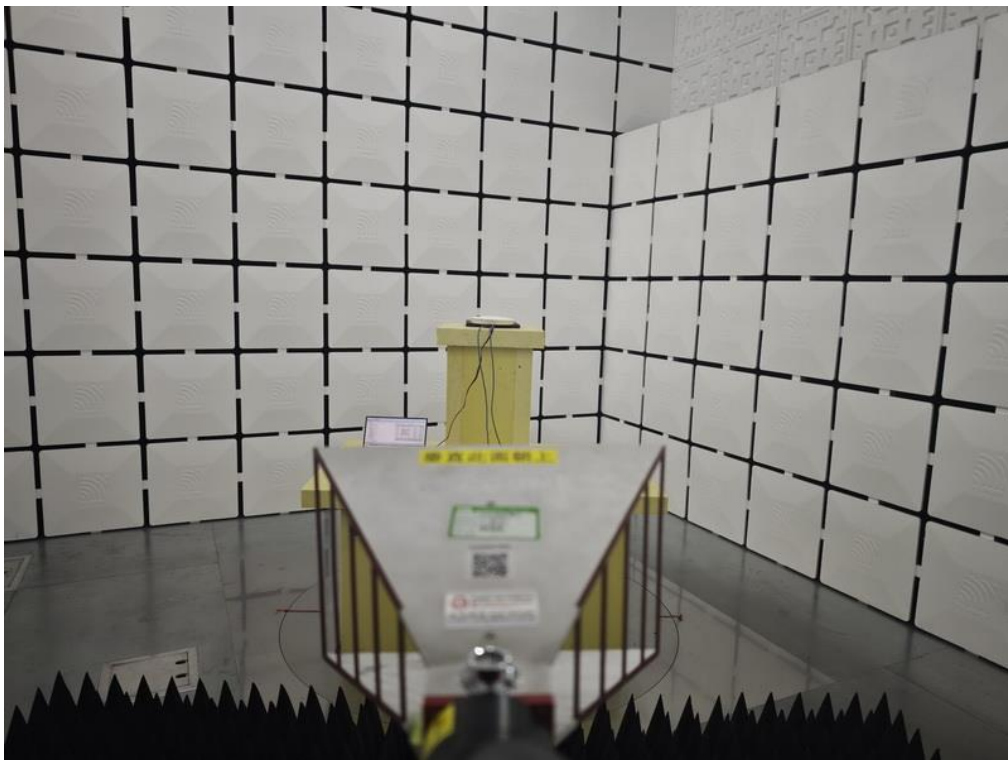
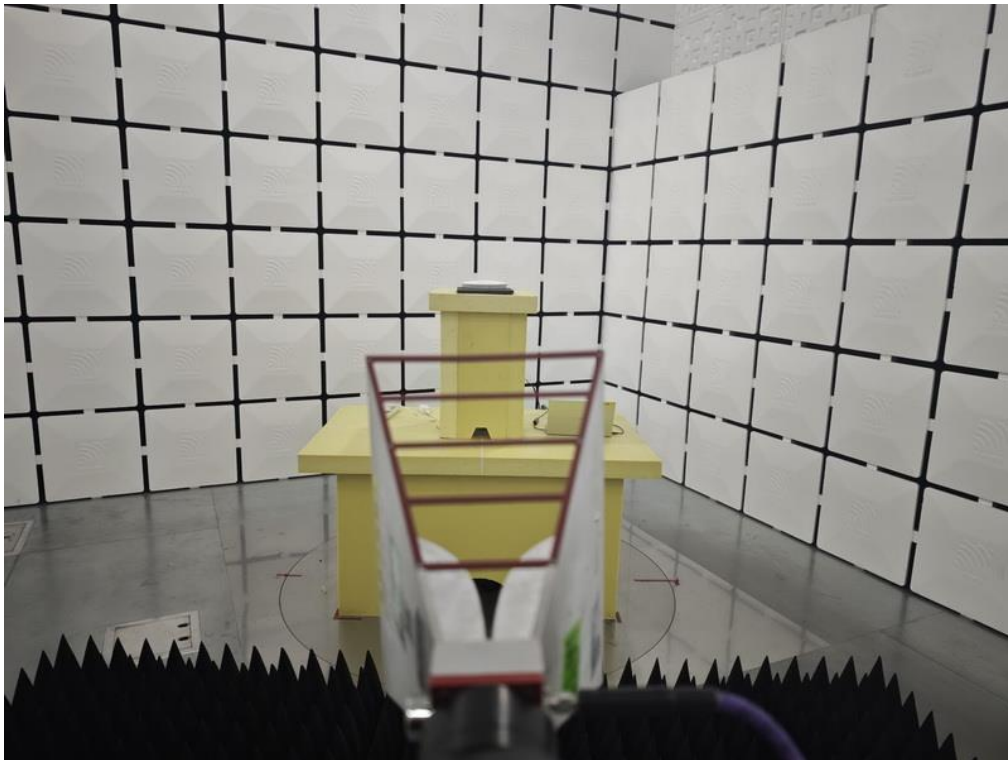


Radiated Emissions Test Photos

Harmonic(18 GHz to 40 GHz)




Conducted Test Photos

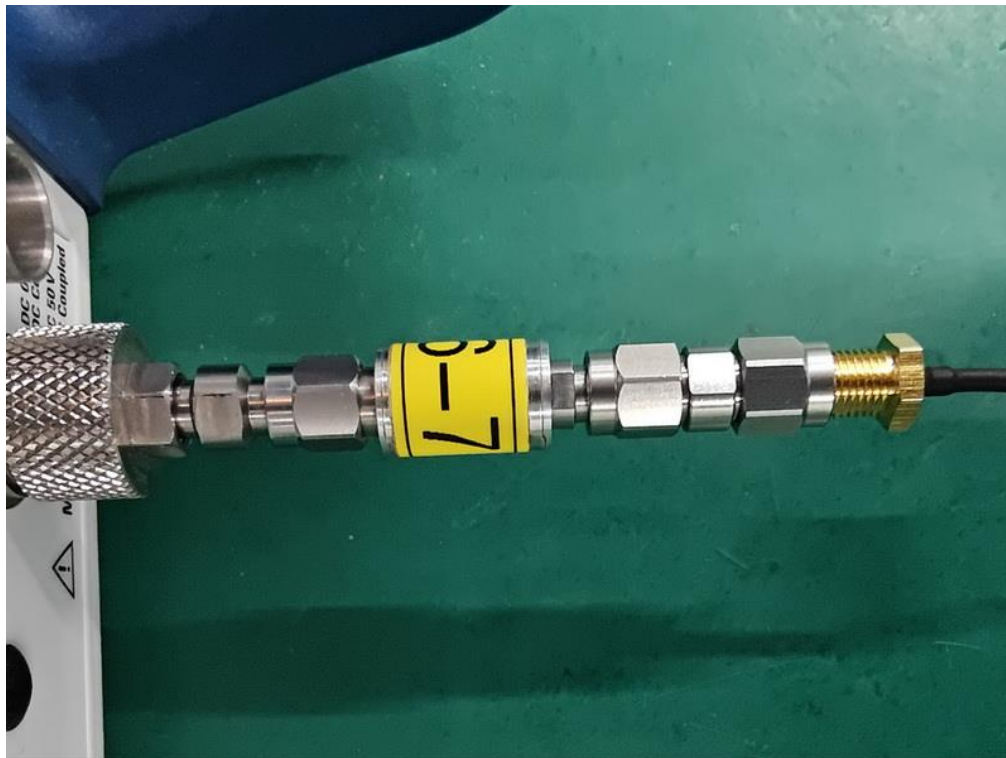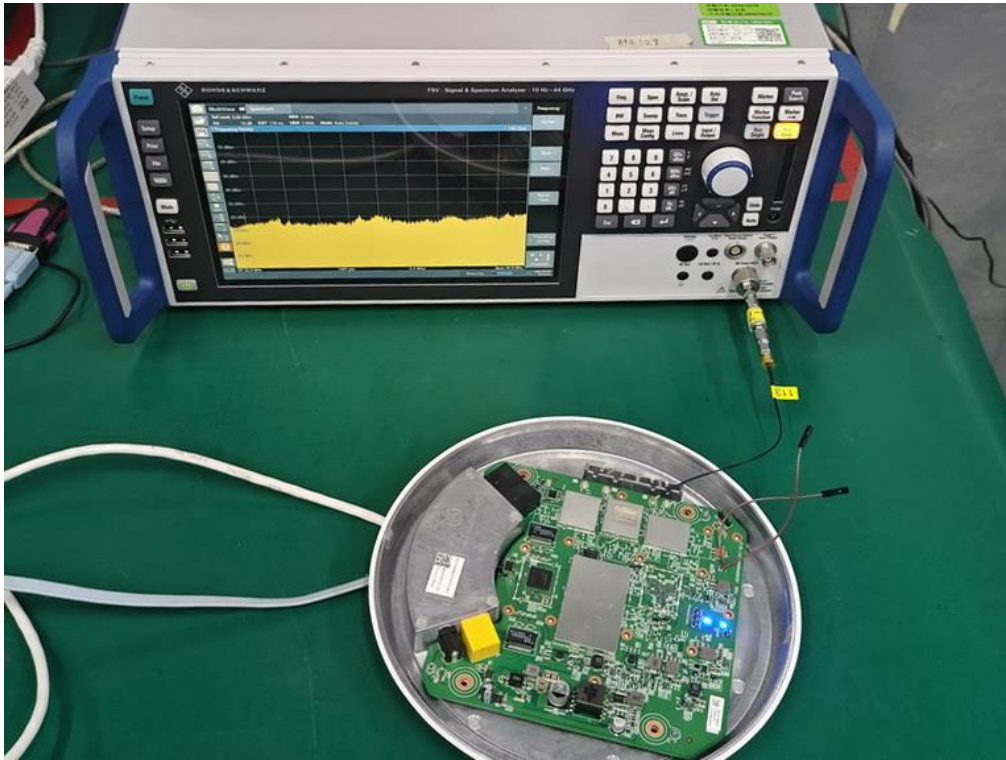

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Phase	Line
-----------	---------------------------------------	-------	------

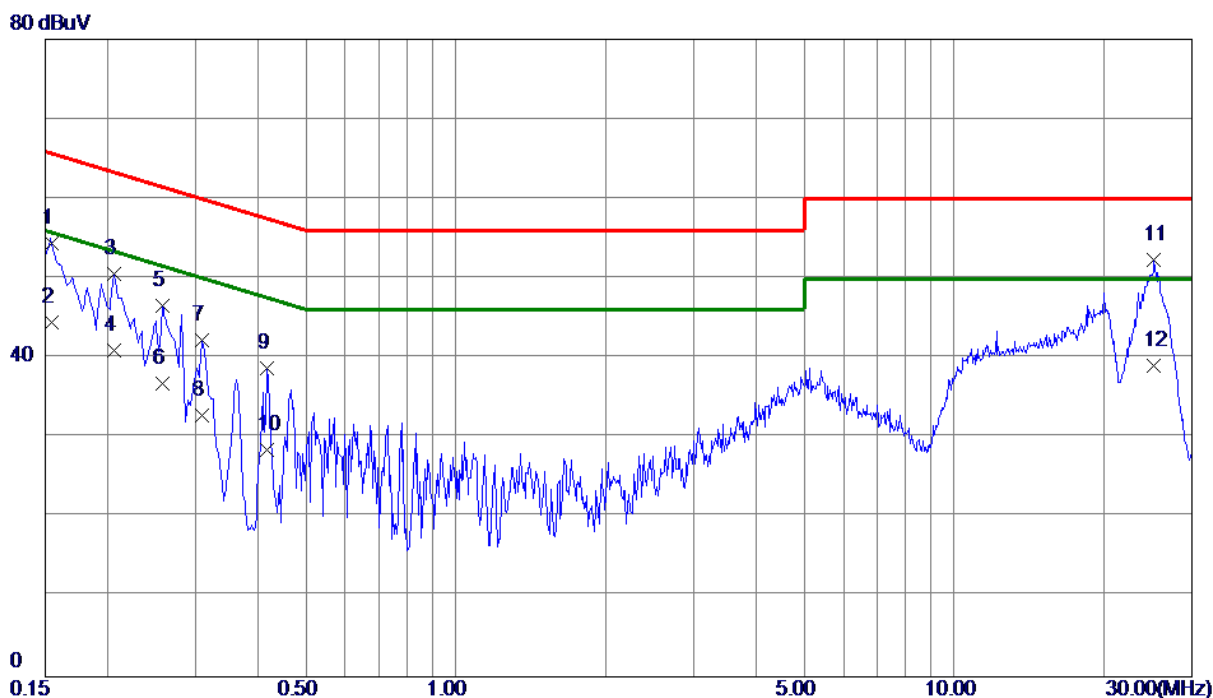


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1548	44.44	9.90	54.34	65.74	-11.40	QP	
2	0.1548	34.51	9.90	44.41	55.74	-11.33	AVG	
3	0.2060	40.63	9.90	50.53	63.37	-12.84	QP	
4	0.2060	31.10	9.90	41.00	53.37	-12.37	AVG	
5	0.2580	36.67	9.90	46.57	61.50	-14.93	QP	
6	0.2580	26.90	9.90	36.80	51.50	-14.70	AVG	
7	0.3100	32.28	9.92	42.20	59.97	-17.77	QP	
8	0.3100	22.90	9.92	32.82	49.97	-17.15	AVG	
9	0.4180	28.81	9.94	38.75	57.49	-18.74	QP	
10	0.4180	18.60	9.94	28.54	47.49	-18.95	AVG	
11 *	25.1940	36.70	15.60	52.30	60.00	-7.70	QP	
12	25.1940	23.39	15.60	38.99	50.00	-11.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Phase	Neutral
-----------	---------------------------------------	-------	---------

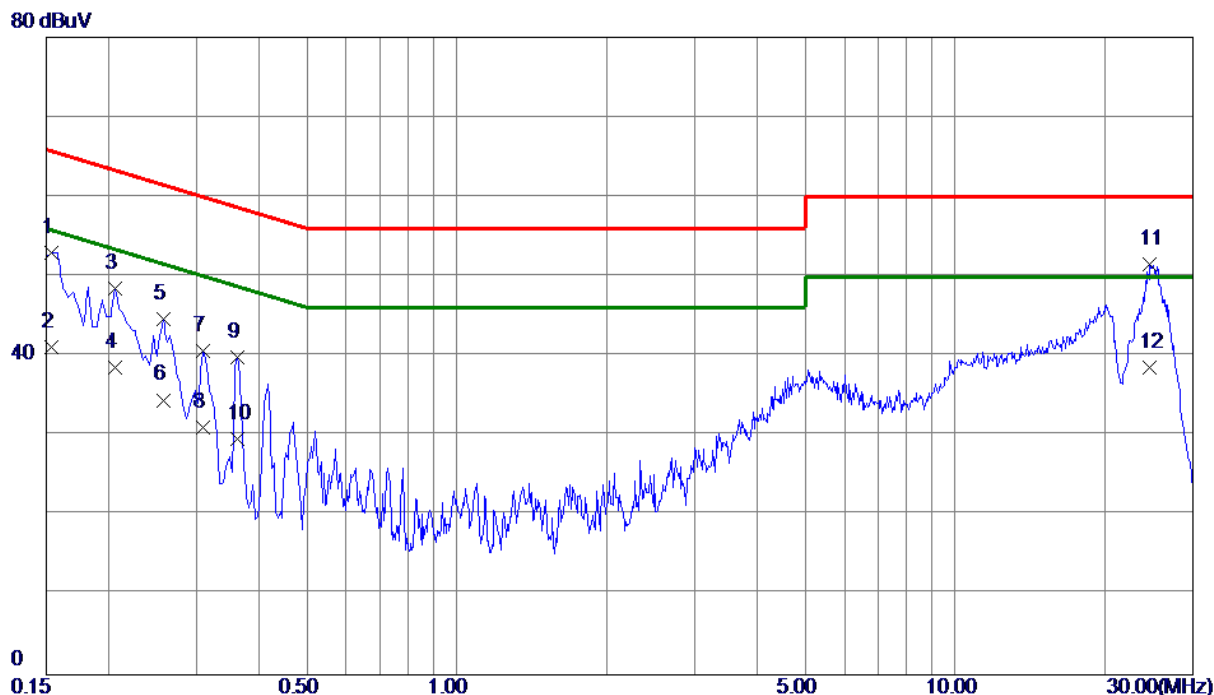


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1539	43.02	9.97	52.99	65.79	-12.80	QP	
2	0.1539	31.21	9.97	41.18	55.79	-14.61	AVG	
3	0.2060	38.57	9.97	48.54	63.37	-14.83	QP	
4	0.2060	28.60	9.97	38.57	53.37	-14.80	AVG	
5	0.2580	34.71	9.98	44.69	61.50	-16.81	QP	
6	0.2580	24.50	9.98	34.48	51.50	-17.02	AVG	
7	0.3100	30.70	9.98	40.68	59.97	-19.29	QP	
8	0.3100	21.10	9.98	31.08	49.97	-18.89	AVG	
9	0.3620	29.93	9.99	39.92	58.68	-18.76	QP	
10	0.3620	19.60	9.99	29.59	48.68	-19.09	AVG	
11 *	24.5780	36.01	15.50	51.51	60.00	-8.49	QP	
12	24.5780	23.10	15.50	38.60	50.00	-11.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Polarization	Ant 0°
-----------	---------------------------------------	--------------	--------

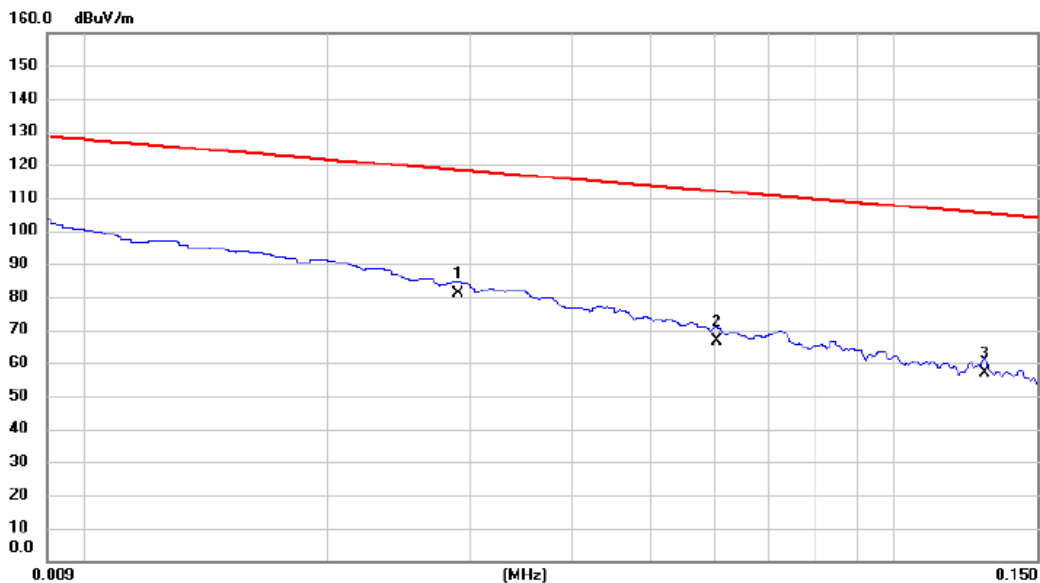


No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.029	59.61	21.22	80.83	118.36	-37.53	AVG	
2		0.060	45.12	21.34	66.46	112.00	-45.54	AVG	
3		0.129	35.69	21.30	56.99	105.38	-48.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Polarization	Ant 0°
-----------	---------------------------------------	--------------	--------

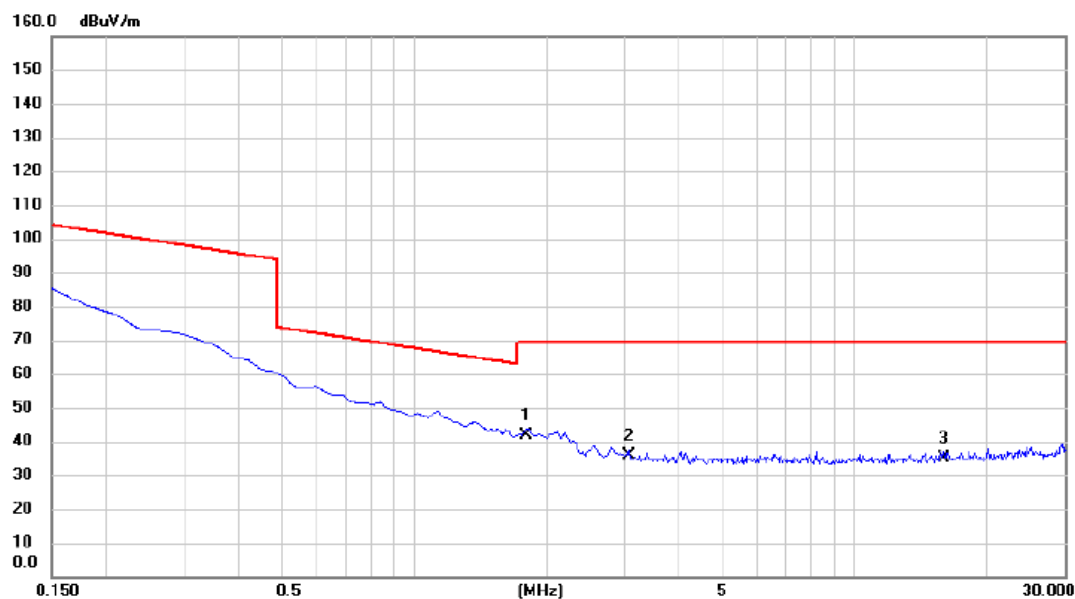


No. Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	1.792	20.69	21.21	41.90	69.54	-27.64	QP	
2	3.075	14.55	21.27	35.82	69.54	-33.72	QP	
3	15.941	13.36	21.82	35.18	69.54	-34.36	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Polarization	Ant 90°
-----------	---------------------------------------	--------------	---------

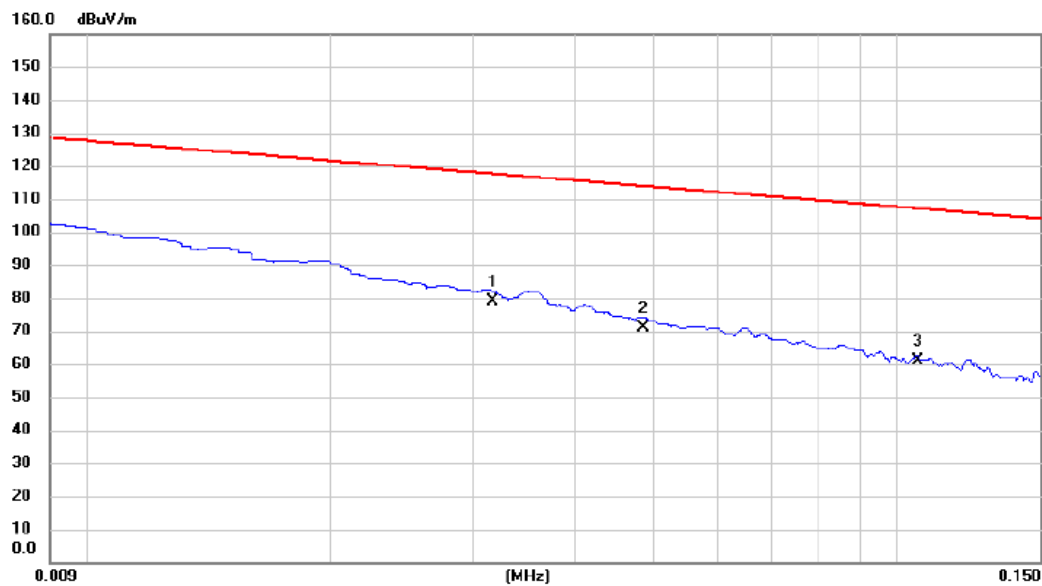


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.032	57.64	21.25	78.89	117.58	-38.69	AVG	
2		0.049	49.64	21.33	70.97	113.89	-42.92	AVG	
3		0.106	39.52	21.33	60.85	107.10	-46.25	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Polarization	Ant 90°
-----------	---------------------------------------	--------------	---------

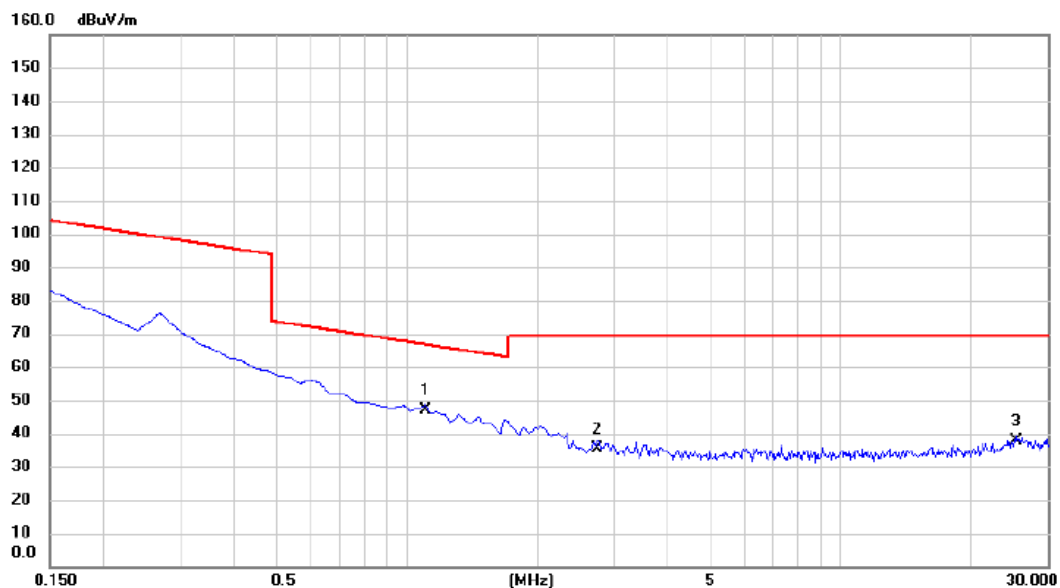

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.105	25.74	21.20	46.94	66.74	-19.80	QP	
2		2.747	14.26	21.26	35.52	69.54	-34.02	QP	
3		25.403	15.74	22.06	37.80	69.54	-31.74	QP	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Polarization	Vertical
-----------	---------------------------------------	--------------	----------

80 dBuV/m

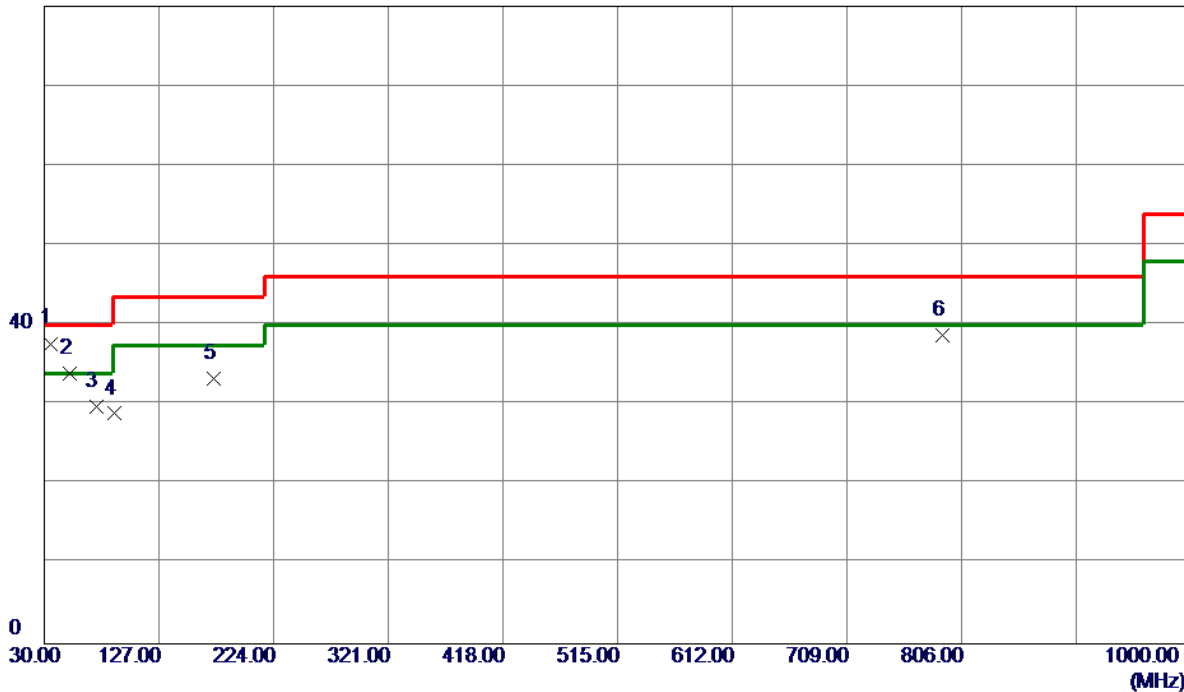


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	34.8500	50.08	-12.40	37.68	40.00	-2.32	Peak	
2	51.3400	45.21	-11.32	33.89	40.00	-6.11	Peak	
3	73.6500	43.72	-13.98	29.74	40.00	-10.26	Peak	
4	89.1700	45.63	-16.75	28.88	43.52	-14.64	Peak	
5	173.5600	45.16	-11.81	33.35	43.52	-10.17	Peak	
6	789.5100	39.54	-0.86	38.68	46.02	-7.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode Channel 157 (UNII-3)	Polarization	Horizontal
-----------	---------------------------------------	--------------	------------

80 dBuV/m

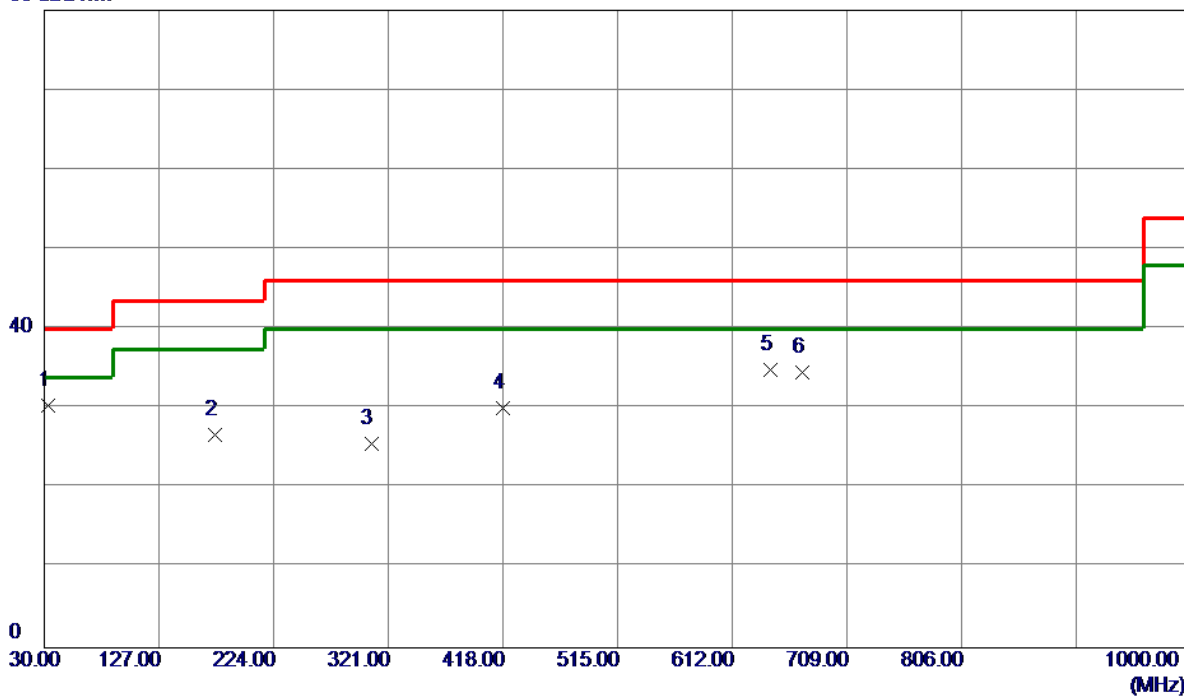

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	32.9100	43.08	-12.69	30.39	40.00	-9.61	Peak	
2	174.5300	38.61	-11.91	26.70	43.52	-16.82	Peak	
3	306.4500	35.87	-10.31	25.56	46.02	-20.46	Peak	
4	418.0000	37.64	-7.53	30.11	46.02	-15.91	Peak	
5	644.0100	37.57	-2.69	34.88	46.02	-11.14	Peak	
6	671.1700	37.11	-2.56	34.55	46.02	-11.47	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

120 dBuV/m

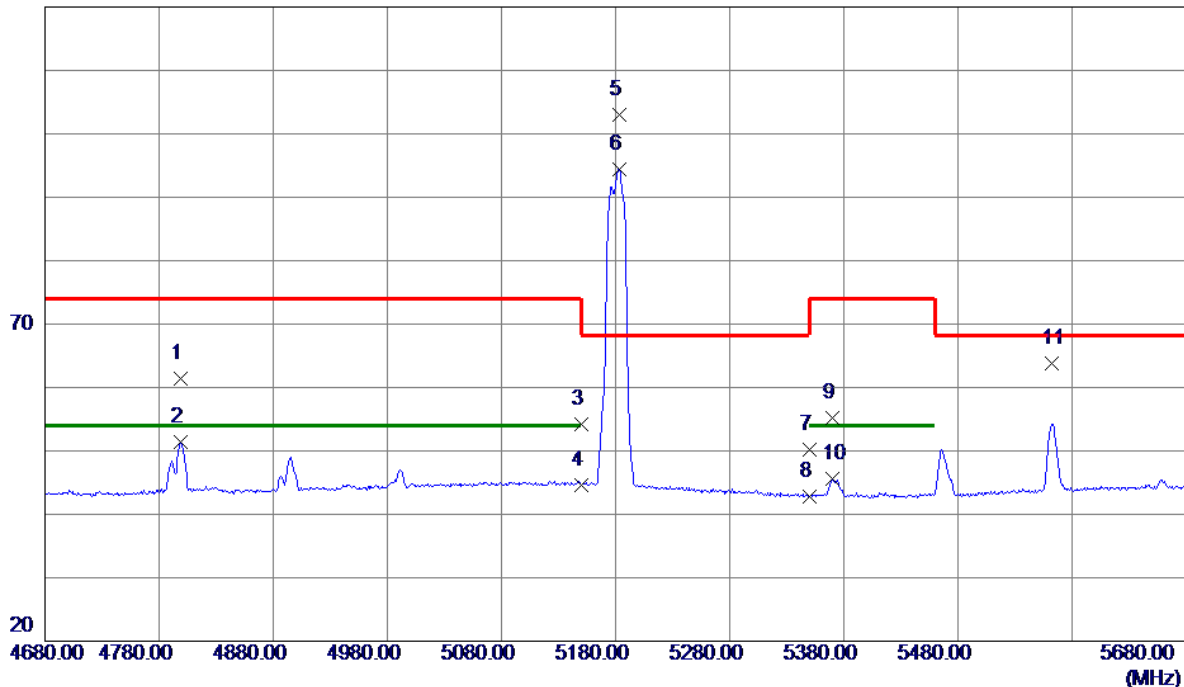


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4799.0000	47.51	13.96	61.47	74.00	-12.53	Peak	
2	4799.0000	37.35	13.96	51.31	54.00	-2.69	AVG	
3	5150.0000	39.98	14.31	54.29	74.00	-19.71	Peak	
4	5150.0000	30.33	14.31	44.64	54.00	-9.36	AVG	
5 *	5183.0000	88.61	14.31	102.92	68.20	34.72	Peak	No Limit
6	5183.0000	80.18	14.31	94.49	999.00	-904.51	AVG	No Limit
7	5350.0000	35.84	14.29	50.13	74.00	-23.87	Peak	
8	5350.0000	28.46	14.29	42.75	54.00	-11.25	AVG	
9	5370.0000	40.84	14.29	55.13	74.00	-18.87	Peak	
10	5370.0000	31.27	14.29	45.56	54.00	-8.44	AVG	
11	5562.0000	49.33	14.42	63.75	68.20	-4.45	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

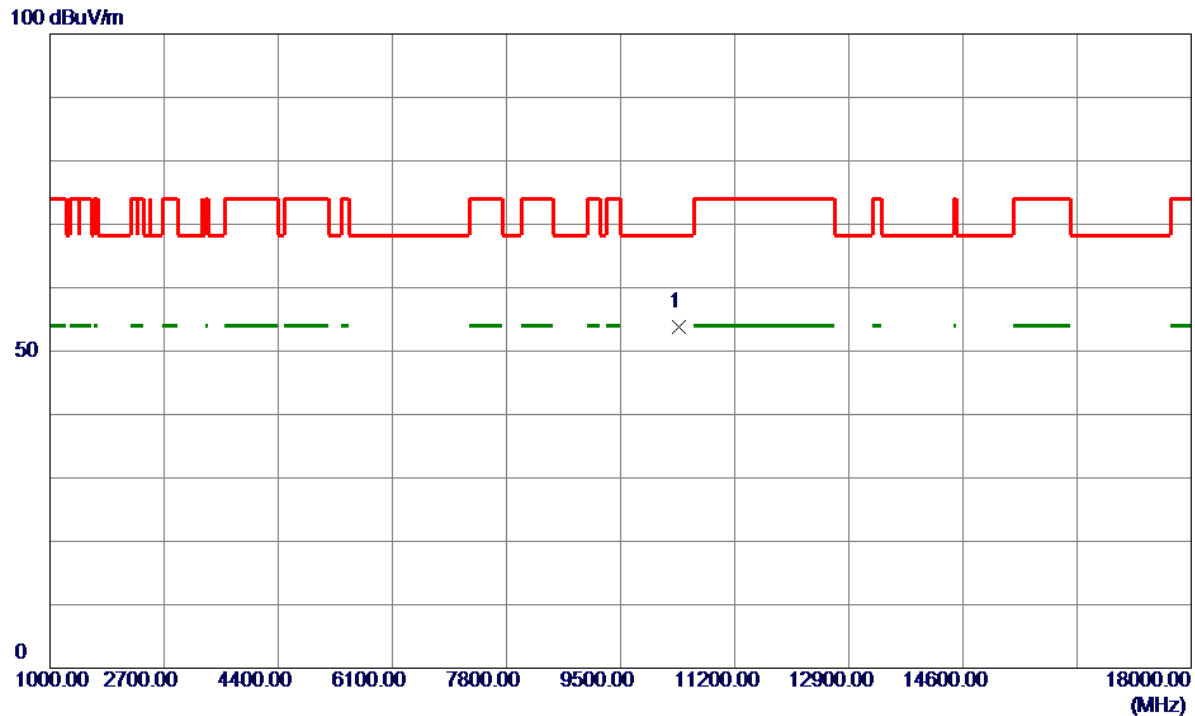


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.4200	43.10	10.76	53.86	68.20	-14.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

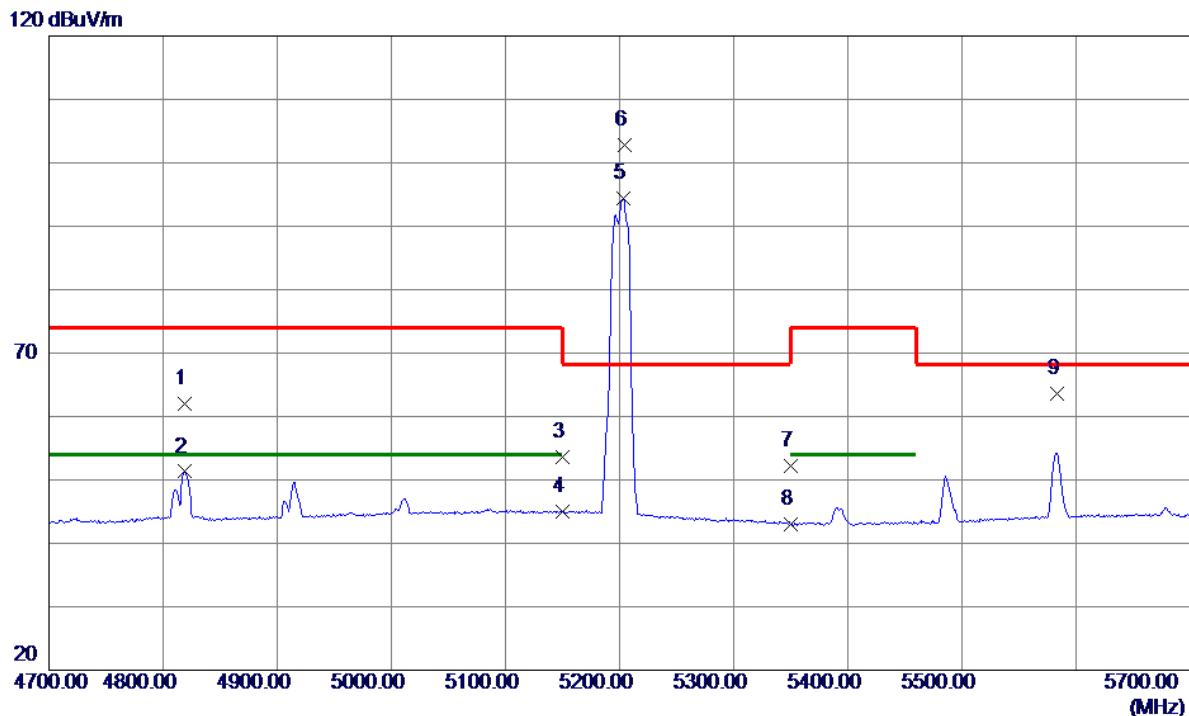


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4819.0000	48.04	13.99	62.03	74.00	-11.97	Peak	
2	4819.0000	37.31	13.99	51.30	54.00	-2.70	AVG	
3	5150.0000	39.38	14.31	53.69	74.00	-20.31	Peak	
4	5150.0000	30.66	14.31	44.97	54.00	-9.03	AVG	
5	5203.0000	80.07	14.30	94.37	999.00	-904.63	AVG	No Limit
6 *	5204.0000	88.55	14.30	102.85	68.20	34.65	Peak	No Limit
7	5350.0000	38.00	14.29	52.29	74.00	-21.71	Peak	
8	5350.0000	28.69	14.29	42.98	54.00	-11.02	AVG	
9	5583.0000	49.15	14.46	63.61	68.20	-4.59	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

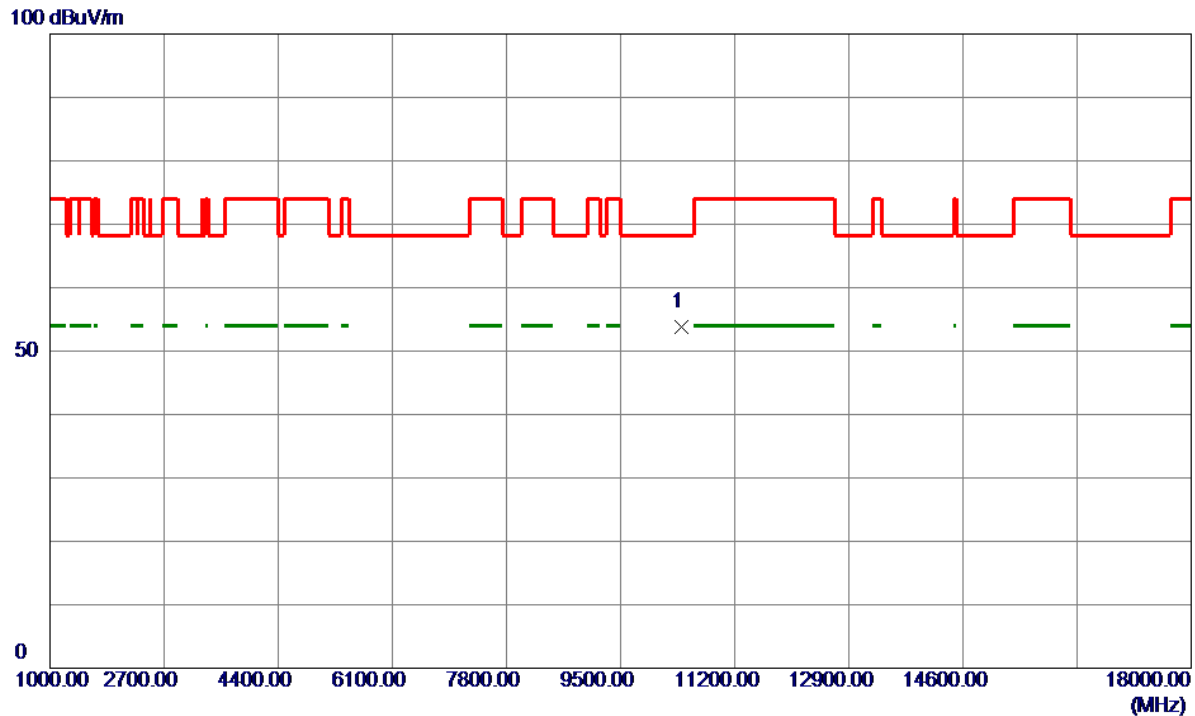


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.1600	42.97	10.77	53.74	68.20	-14.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

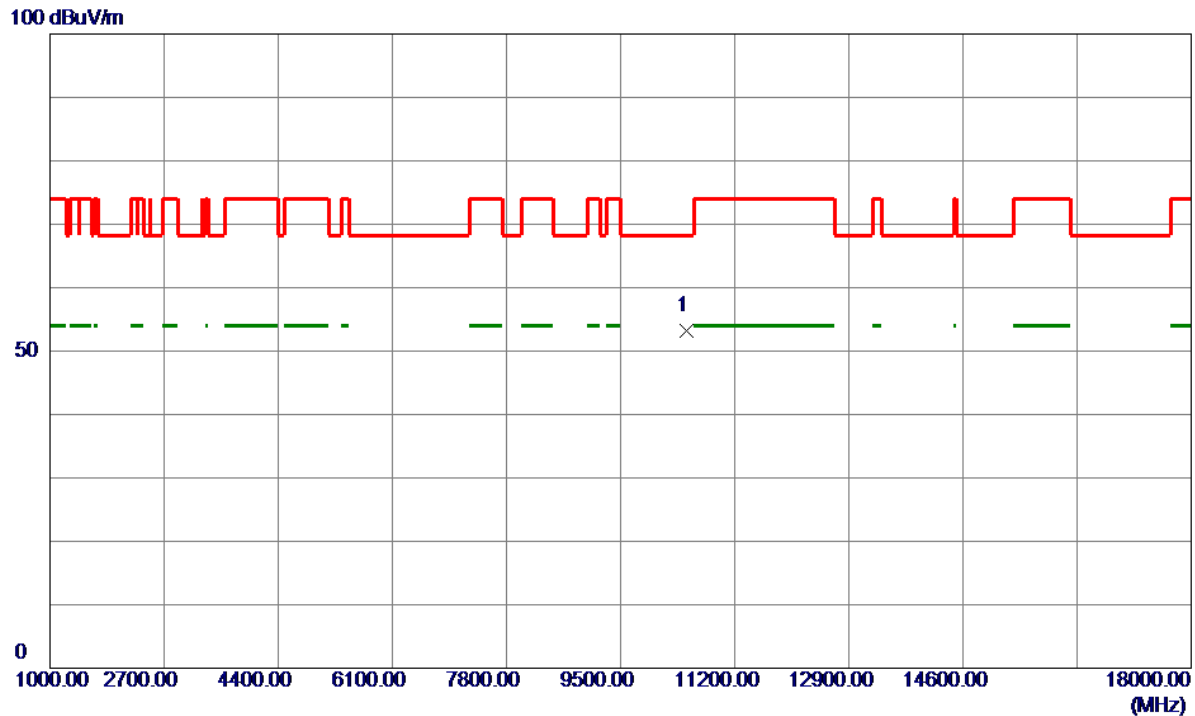


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.2000	42.40	10.80	53.20	68.20	-15.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

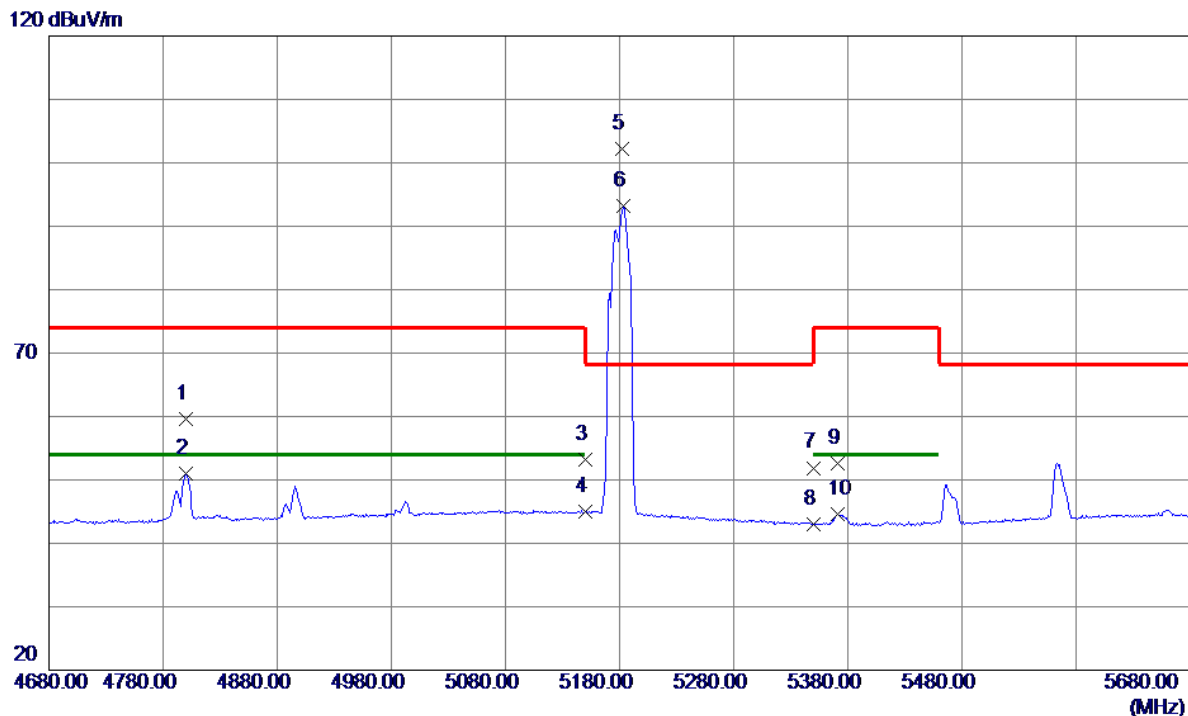


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4800.0000	45.65	13.96	59.61	74.00	-14.39	Peak	
2	4800.0000	37.01	13.96	50.97	54.00	-3.03	AVG	
3	5150.0000	38.92	14.31	53.23	74.00	-20.77	Peak	
4	5150.0000	30.61	14.31	44.92	54.00	-9.08	AVG	
5 *	5182.0000	87.88	14.31	102.19	68.20	33.99	Peak	No Limit
6	5183.0000	78.80	14.31	93.11	999.00	-905.89	AVG	No Limit
7	5350.0000	37.61	14.29	51.90	74.00	-22.10	Peak	
8	5350.0000	28.72	14.29	43.01	54.00	-10.99	AVG	
9	5371.0000	38.38	14.29	52.67	74.00	-21.33	Peak	
10	5371.0000	30.23	14.29	44.52	54.00	-9.48	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

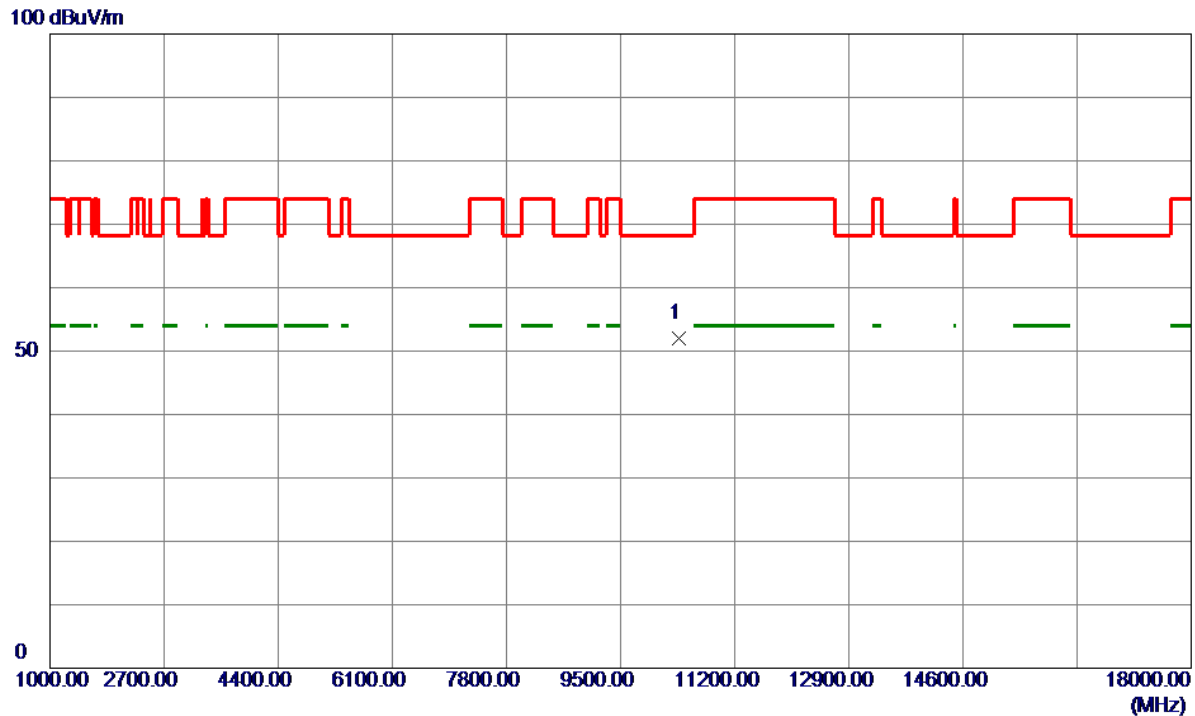


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10363.2200	41.19	10.76	51.95	68.20	-16.25	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

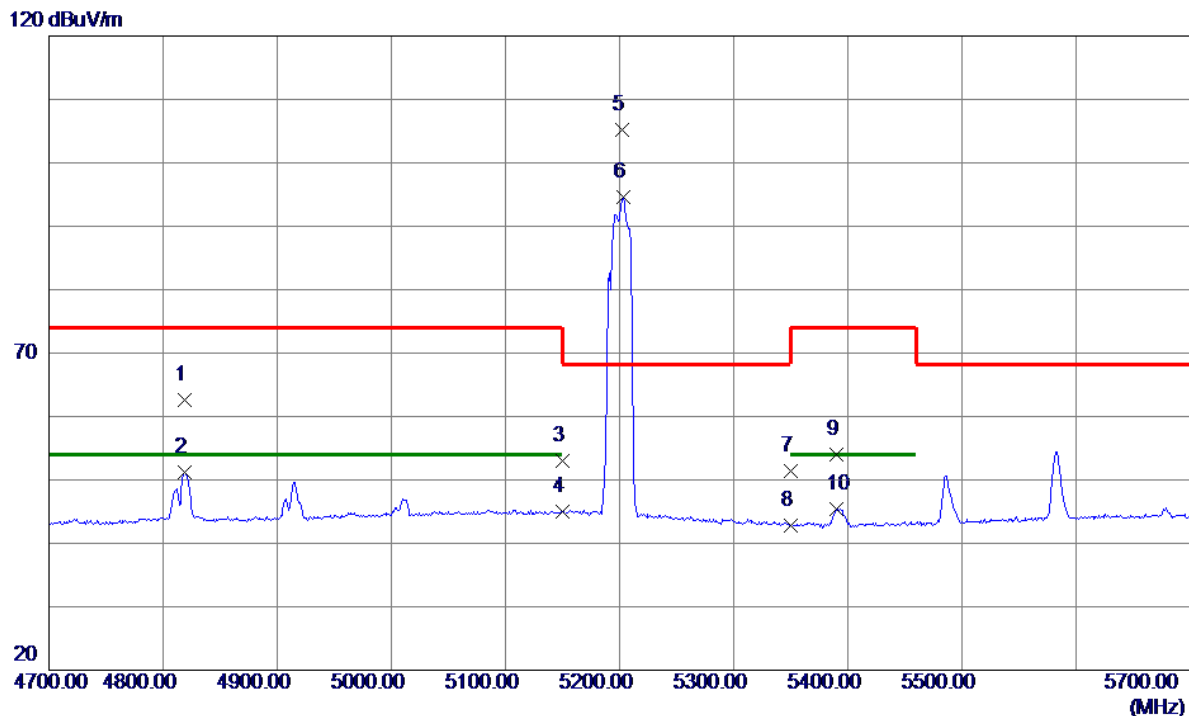


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4819.0000	48.62	13.99	62.61	74.00	-11.39	Peak	
2	4819.0000	37.30	13.99	51.29	54.00	-2.71	AVG	
3	5150.0000	38.75	14.31	53.06	74.00	-20.94	Peak	
4	5150.0000	30.65	14.31	44.96	54.00	-9.04	AVG	
5 *	5202.0000	90.83	14.30	105.13	68.20	36.93	Peak	No Limit
6	5203.0000	80.21	14.30	94.51	999.00	-904.49	AVG	No Limit
7	5350.0000	37.04	14.29	51.33	74.00	-22.67	Peak	
8	5350.0000	28.52	14.29	42.81	54.00	-11.19	AVG	
9	5390.0000	39.73	14.29	54.02	74.00	-19.98	Peak	
10	5390.0000	31.15	14.29	45.44	54.00	-8.56	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

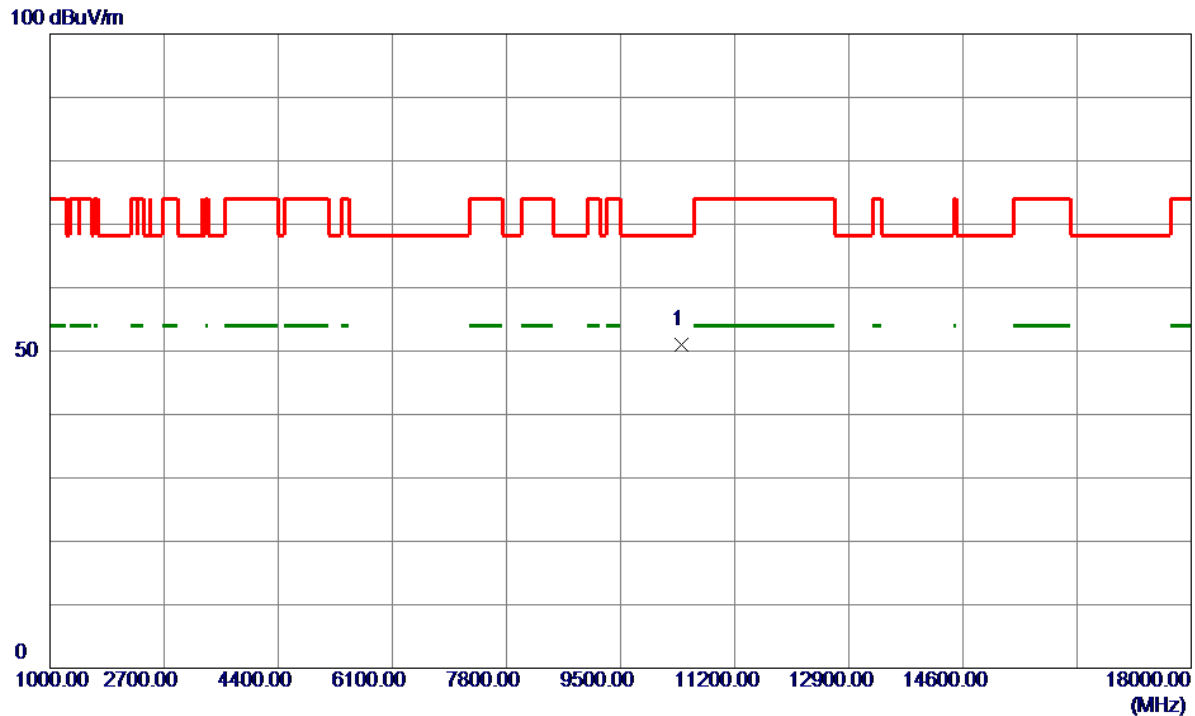


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10402.1000	40.14	10.77	50.91	68.20	-17.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

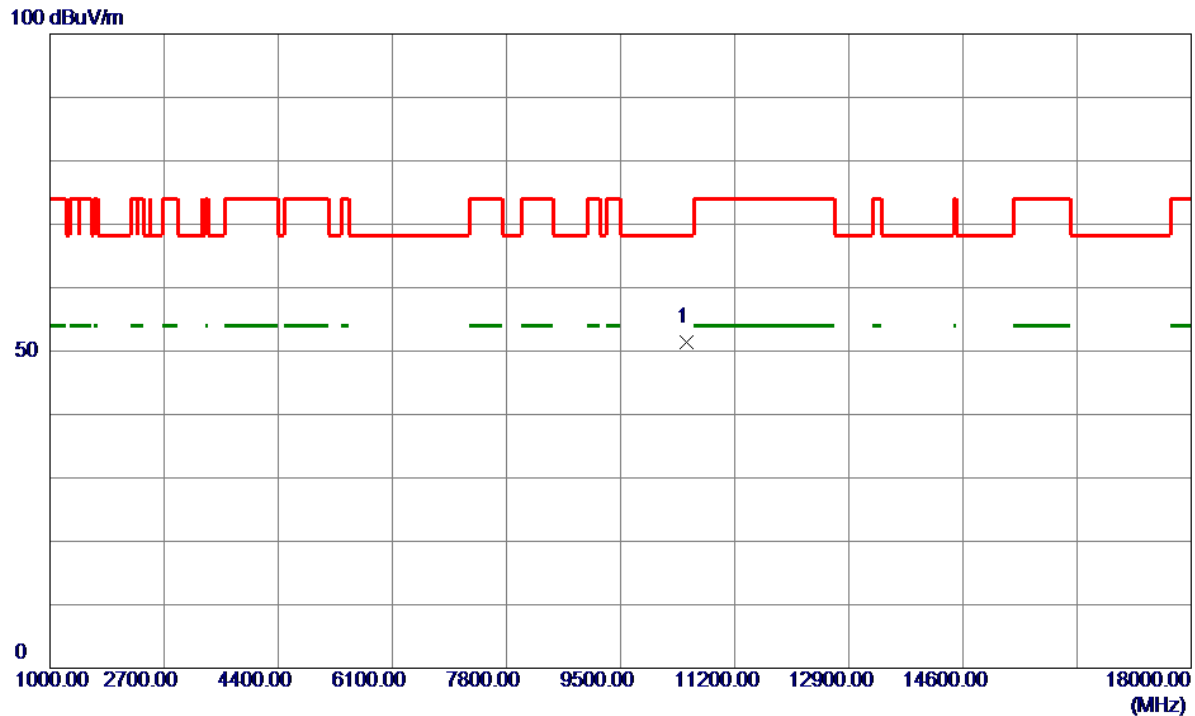


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10482.2500	40.60	10.80	51.40	68.20	-16.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

120 dBuV/m

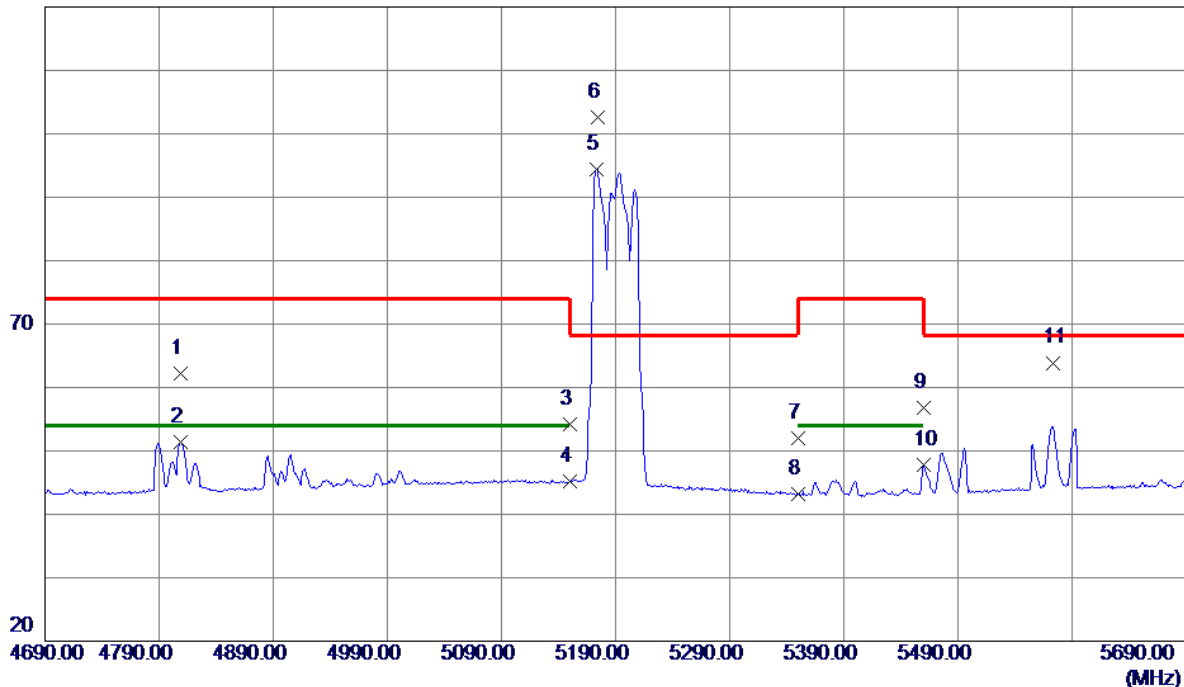


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4809.0000	48.29	13.98	62.27	74.00	-11.73	Peak	
2	4809.0000	37.40	13.98	51.38	54.00	-2.62	AVG	
3	5150.0000	39.92	14.31	54.23	74.00	-19.77	Peak	
4	5150.0000	30.85	14.31	45.16	54.00	-8.84	AVG	
5	5173.0000	80.13	14.31	94.44	999.00	-904.56	AVG	No Limit
6 *	5174.0000	88.30	14.31	102.61	68.20	34.41	Peak	No Limit
7	5350.0000	37.73	14.29	52.02	74.00	-21.98	Peak	
8	5350.0000	28.86	14.29	43.15	54.00	-10.85	AVG	
9	5460.0000	42.50	14.28	56.78	74.00	-17.22	Peak	
10	5460.0000	33.52	14.28	47.80	54.00	-6.20	AVG	
11	5573.0000	49.46	14.44	63.90	68.20	-4.30	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

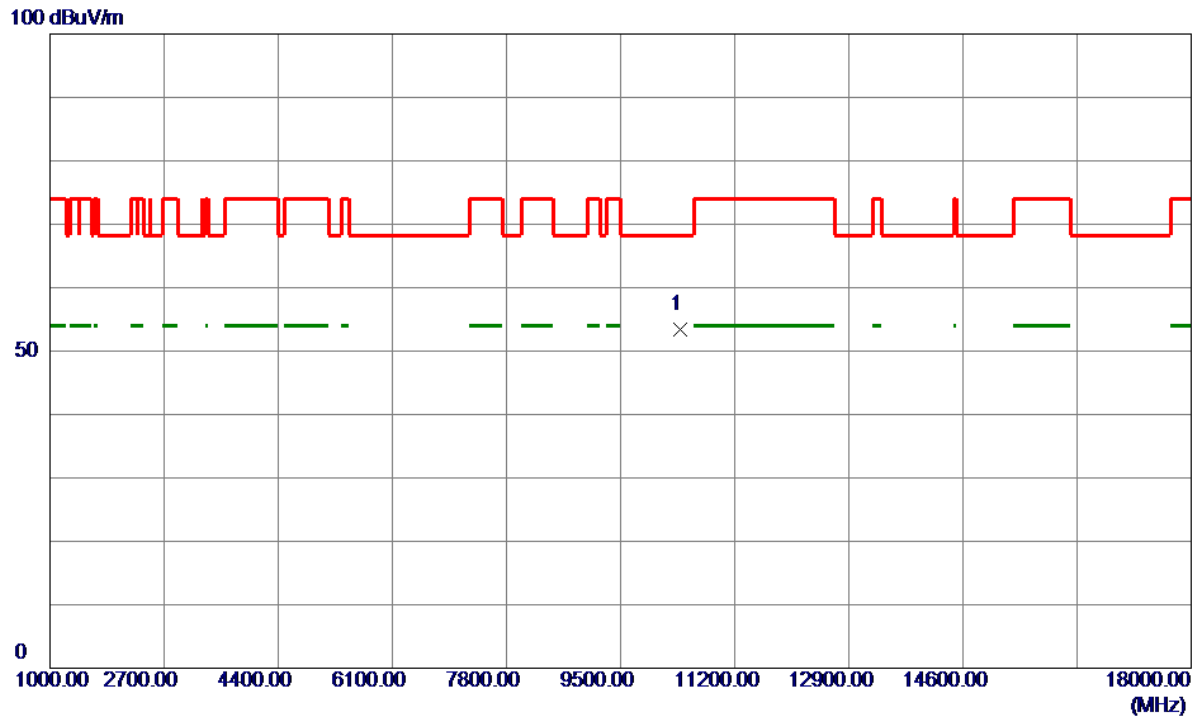


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.1500	42.63	10.76	53.39	68.20	-14.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

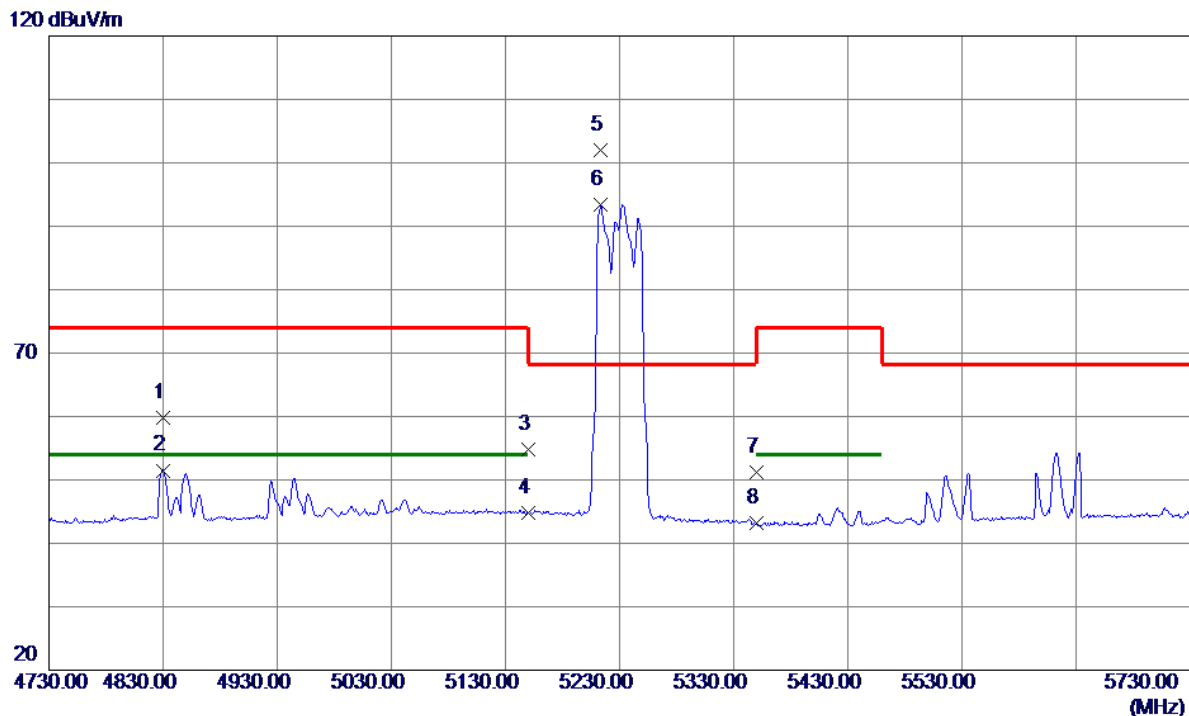


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4830.0000	45.87	14.01	59.88	74.00	-14.12	Peak	
2	4830.0000	37.49	14.01	51.50	54.00	-2.50	AVG	
3	5150.0000	40.49	14.31	54.80	74.00	-19.20	Peak	
4	5150.0000	30.56	14.31	44.87	54.00	-9.13	AVG	
5 *	5213.0000	87.63	14.30	101.93	68.20	33.73	Peak	No Limit
6	5213.0000	79.15	14.30	93.45	999.00	-905.55	AVG	No Limit
7	5350.0000	36.90	14.29	51.19	74.00	-22.81	Peak	
8	5350.0000	28.85	14.29	43.14	54.00	-10.86	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

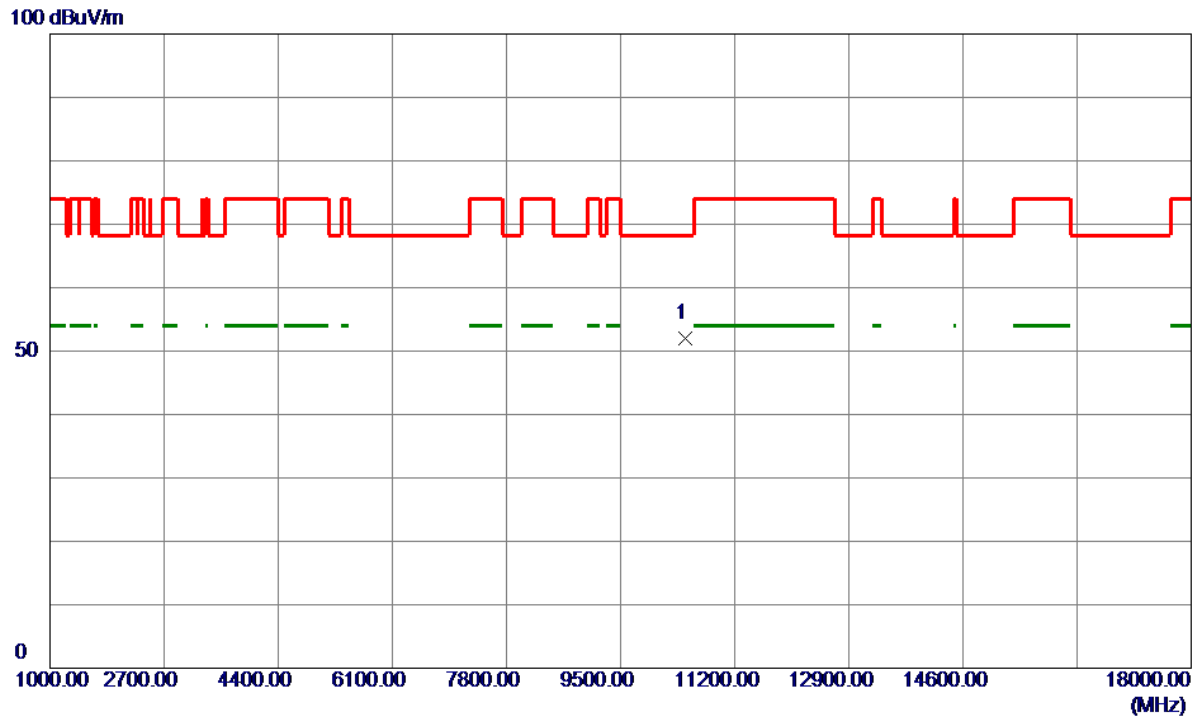


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.1000	41.14	10.79	51.93	68.20	-16.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

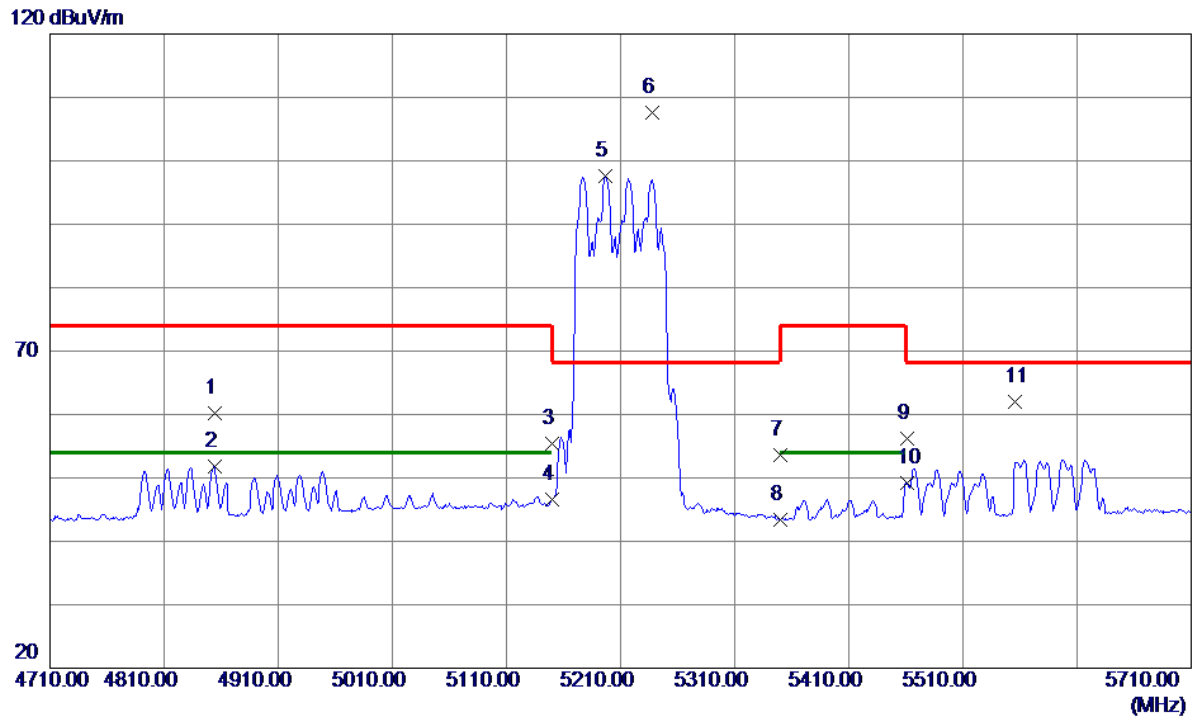


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4854.0000	46.17	14.06	60.23	74.00	-13.77	Peak	
2	4854.0000	37.76	14.06	51.82	54.00	-2.18	AVG	
3	5150.0000	41.02	14.31	55.33	74.00	-18.67	Peak	
4	5150.0000	32.33	14.31	46.64	54.00	-7.36	AVG	
5	5197.0000	83.23	14.30	97.53	999.00	-901.47	AVG	No Limit
6 *	5238.0000	93.24	14.30	107.54	68.20	39.34	Peak	No Limit
7	5350.0000	39.35	14.29	53.64	74.00	-20.36	Peak	
8	5350.0000	29.18	14.29	43.47	54.00	-10.53	AVG	
9	5461.0000	41.85	14.28	56.13	68.20	-12.07	Peak	
10	5461.0000	34.99	14.28	49.27	999.00	-949.73	AVG	
11	5556.0000	47.54	14.40	61.94	68.20	-6.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

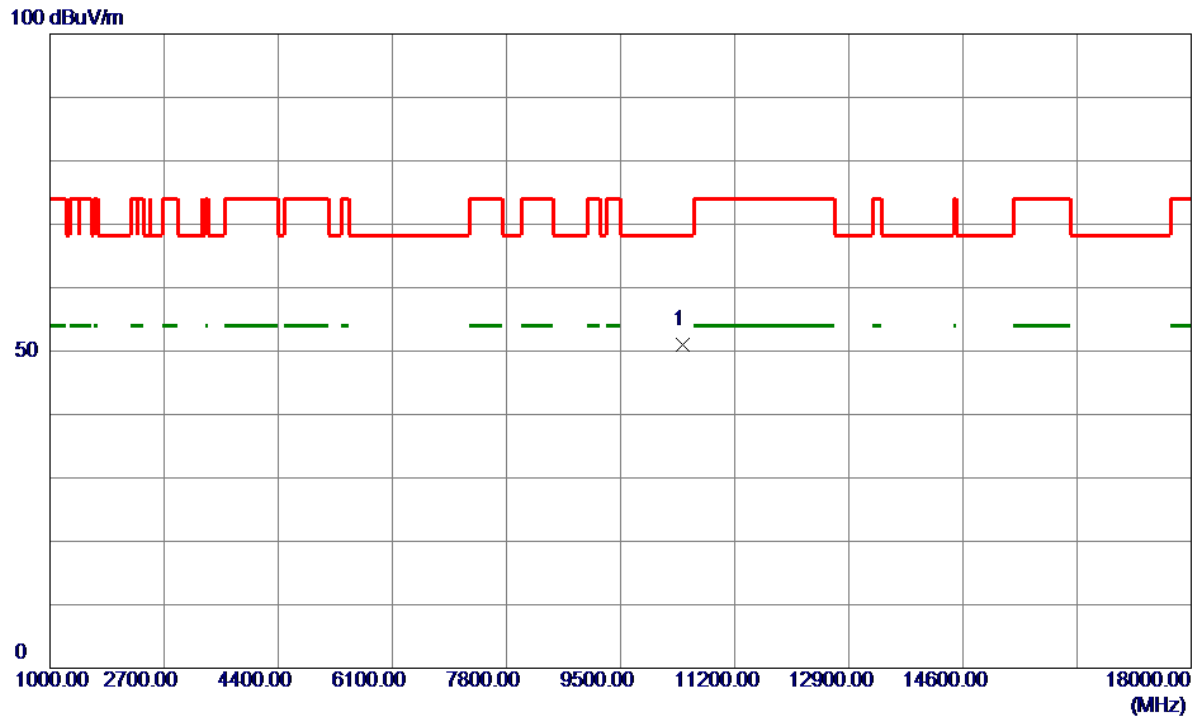


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.1400	40.15	10.78	50.93	68.20	-17.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

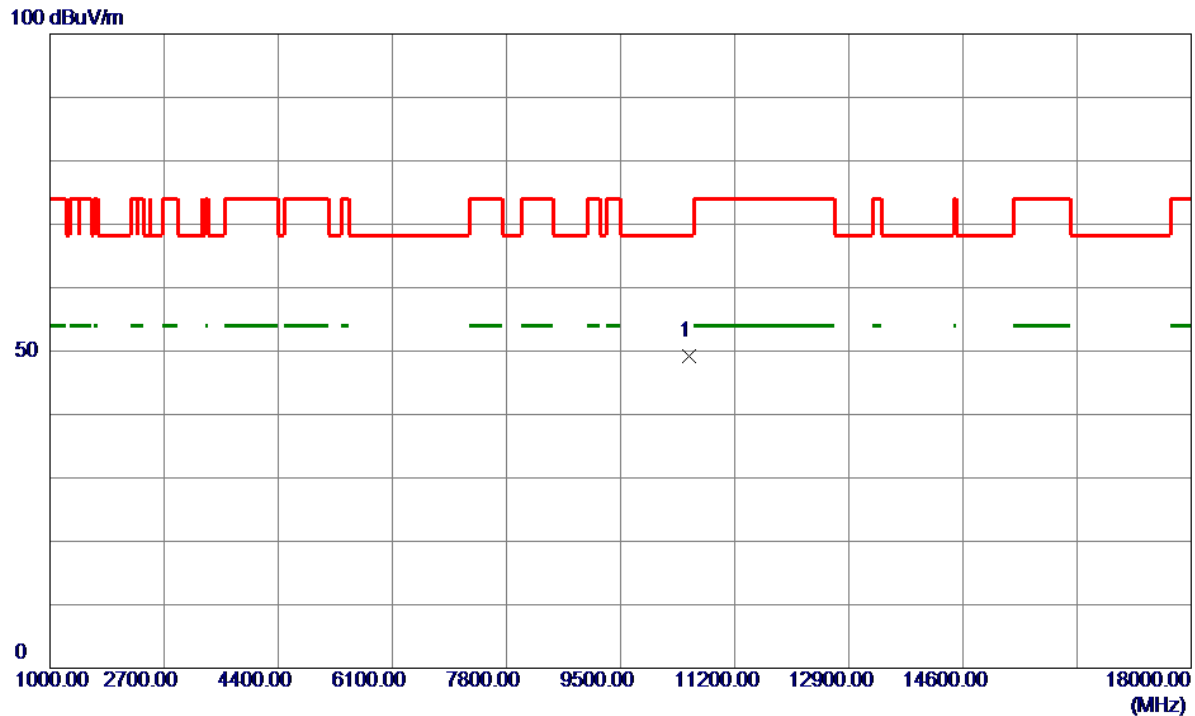


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10519.9700	38.36	10.81	49.17	68.20	-19.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

120 dBuV/m

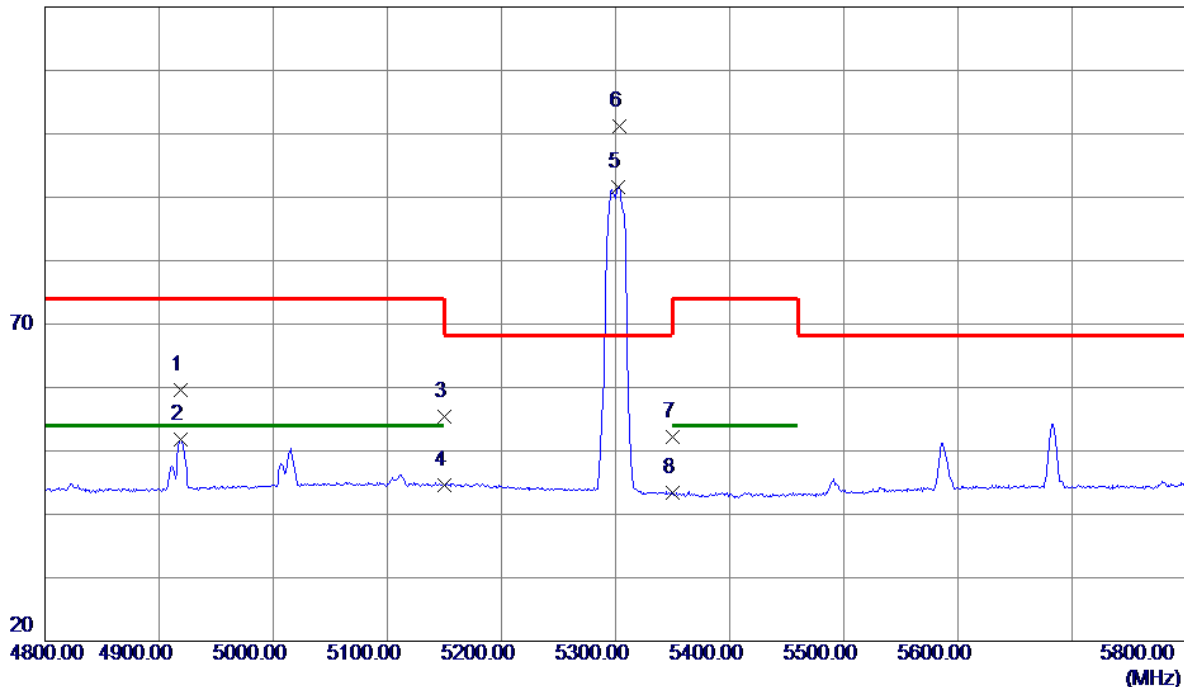

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4919.0000	45.50	14.17	59.67	74.00	-14.33	Peak	
2	4919.0000	37.54	14.17	51.71	54.00	-2.29	AVG	
3	5150.0000	41.15	14.31	55.46	74.00	-18.54	Peak	
4	5150.0000	30.38	14.31	44.69	54.00	-9.31	AVG	
5	5302.0000	77.35	14.30	91.65	999.00	-907.35	AVG	No Limit
6 *	5303.0000	86.90	14.30	101.20	68.20	33.00	Peak	No Limit
7	5350.0000	37.83	14.29	52.12	74.00	-21.88	Peak	
8	5350.0000	29.19	14.29	43.48	54.00	-10.52	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

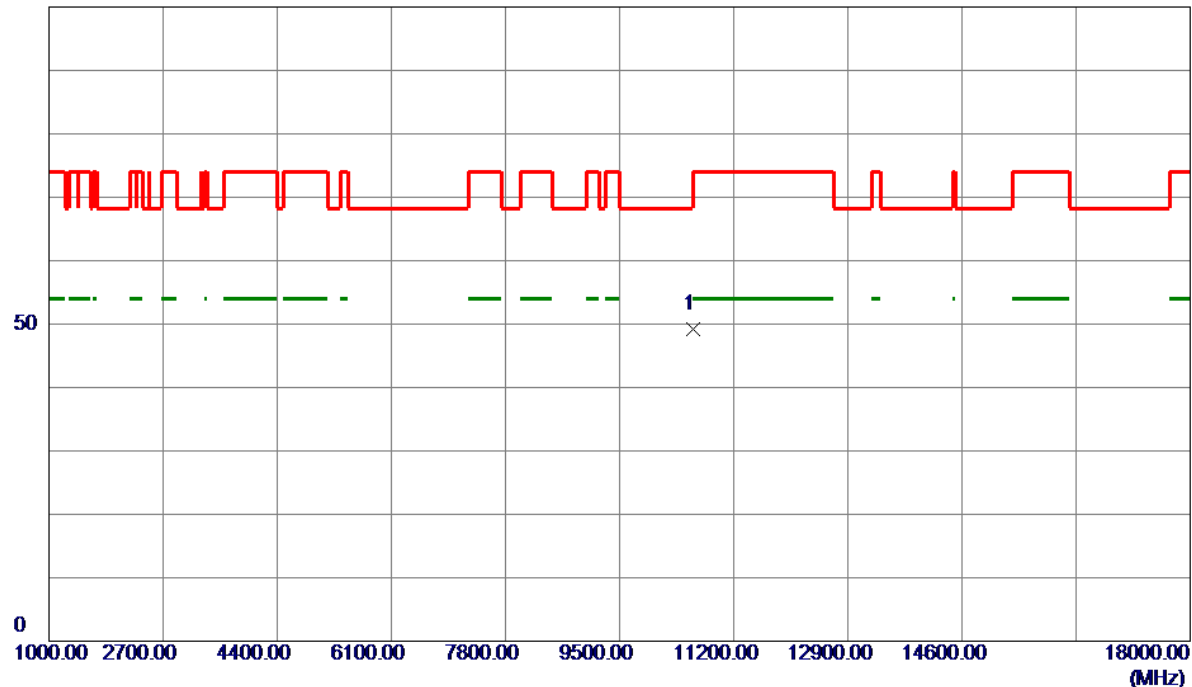


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.9200	38.46	10.81	49.27	68.20	-18.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

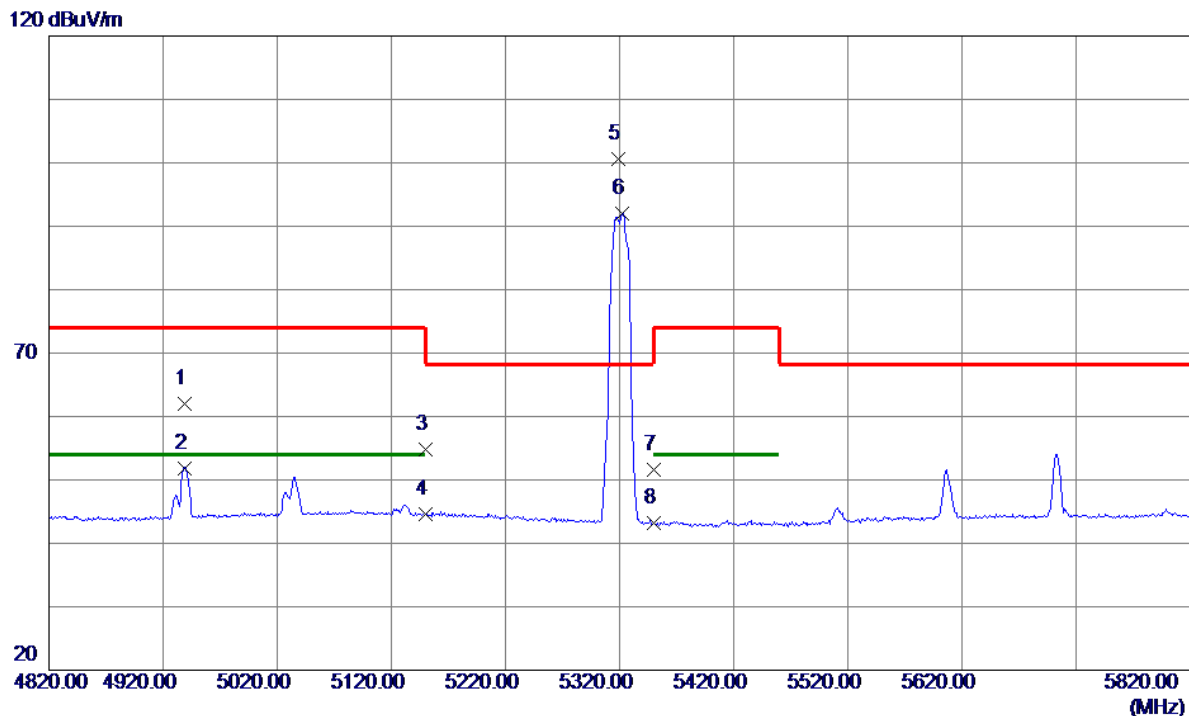

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4939.0000	47.88	14.21	62.09	74.00	-11.91	Peak	
2	4939.0000	37.68	14.21	51.89	54.00	-2.11	AVG	
3	5150.0000	40.57	14.31	54.88	74.00	-19.12	Peak	
4	5150.0000	30.37	14.31	44.68	54.00	-9.32	AVG	
5 *	5319.0000	86.22	14.29	100.51	68.20	32.31	Peak	No Limit
6	5322.0000	77.69	14.29	91.98	999.00	-907.02	AVG	No Limit
7	5350.0000	37.32	14.29	51.61	74.00	-22.39	Peak	
8	5350.0000	28.88	14.29	43.17	54.00	-10.83	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

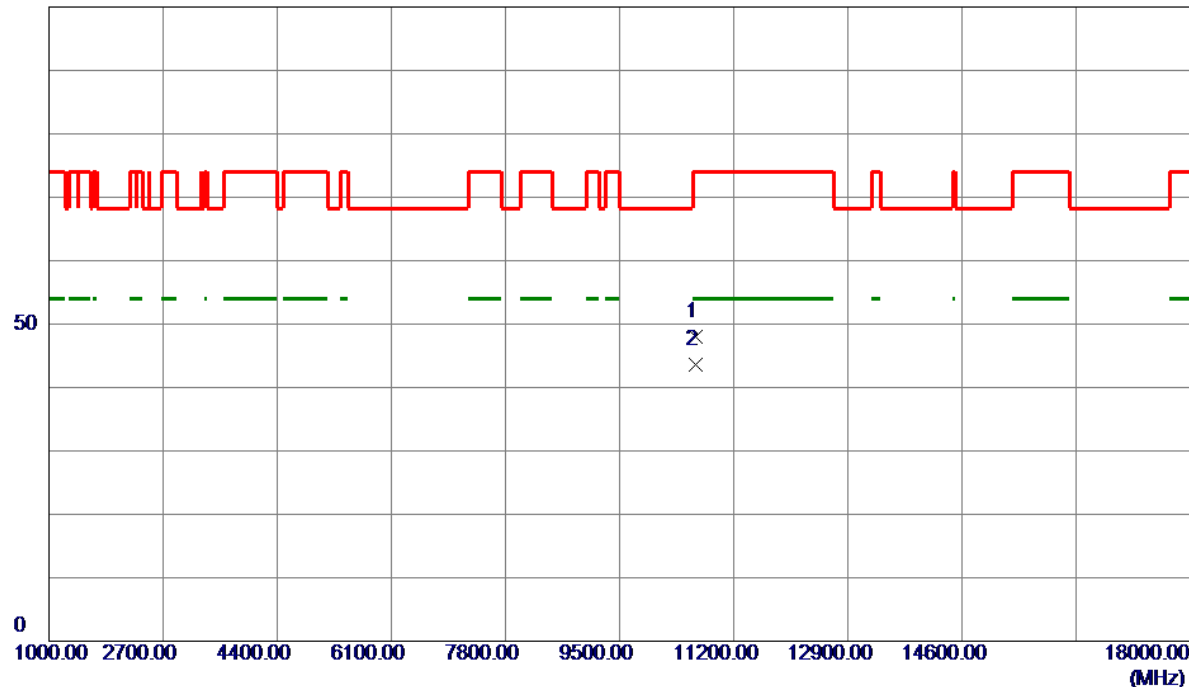


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10639.9100	37.16	10.81	47.97	74.00	-26.03	Peak	
2 *	10640.0000	32.83	10.81	43.64	54.00	-10.36	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

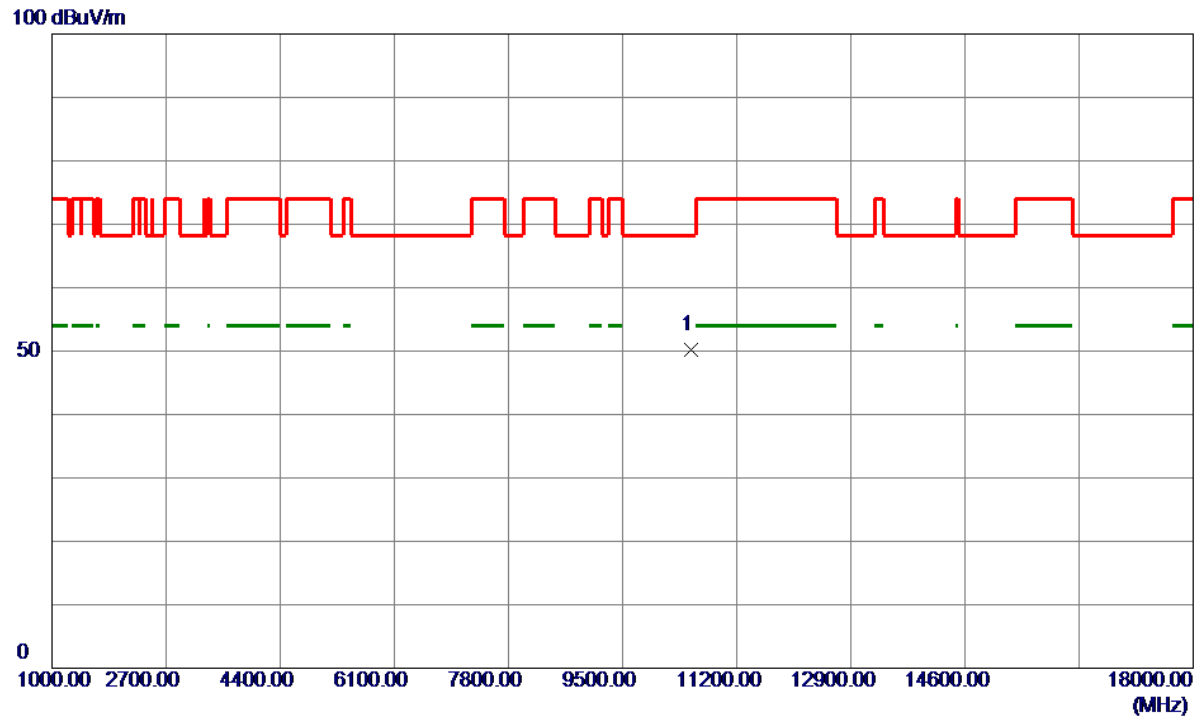


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.3400	39.42	10.81	50.23	68.20	-17.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

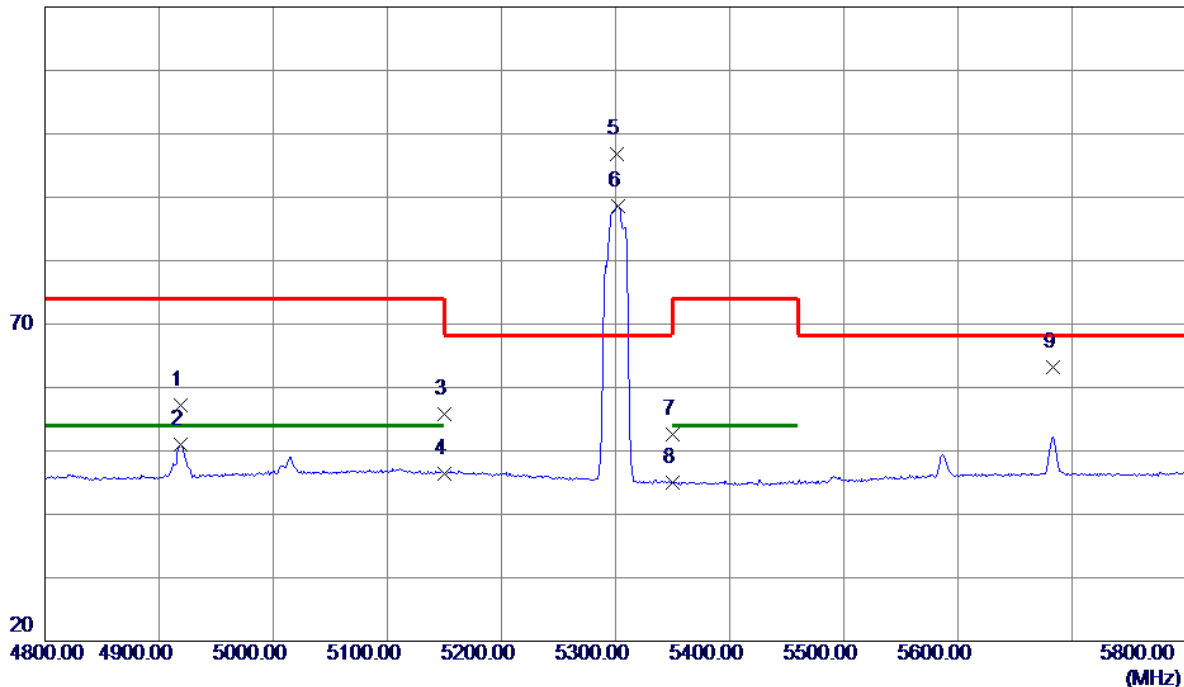


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4919.0000	43.10	14.17	57.27	74.00	-16.73	Peak	
2	4919.0000	36.75	14.17	50.92	54.00	-3.08	AVG	
3	5150.0000	41.49	14.31	55.80	74.00	-18.20	Peak	
4	5150.0000	32.18	14.31	46.49	54.00	-7.51	AVG	
5 *	5301.0000	82.47	14.30	96.77	68.20	28.57	Peak	No Limit
6	5302.0000	74.26	14.30	88.56	999.00	-910.44	AVG	No Limit
7	5350.0000	38.23	14.29	52.52	74.00	-21.48	Peak	
8	5350.0000	30.62	14.29	44.91	54.00	-9.09	AVG	
9	5683.0000	48.46	14.68	63.14	68.20	-5.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

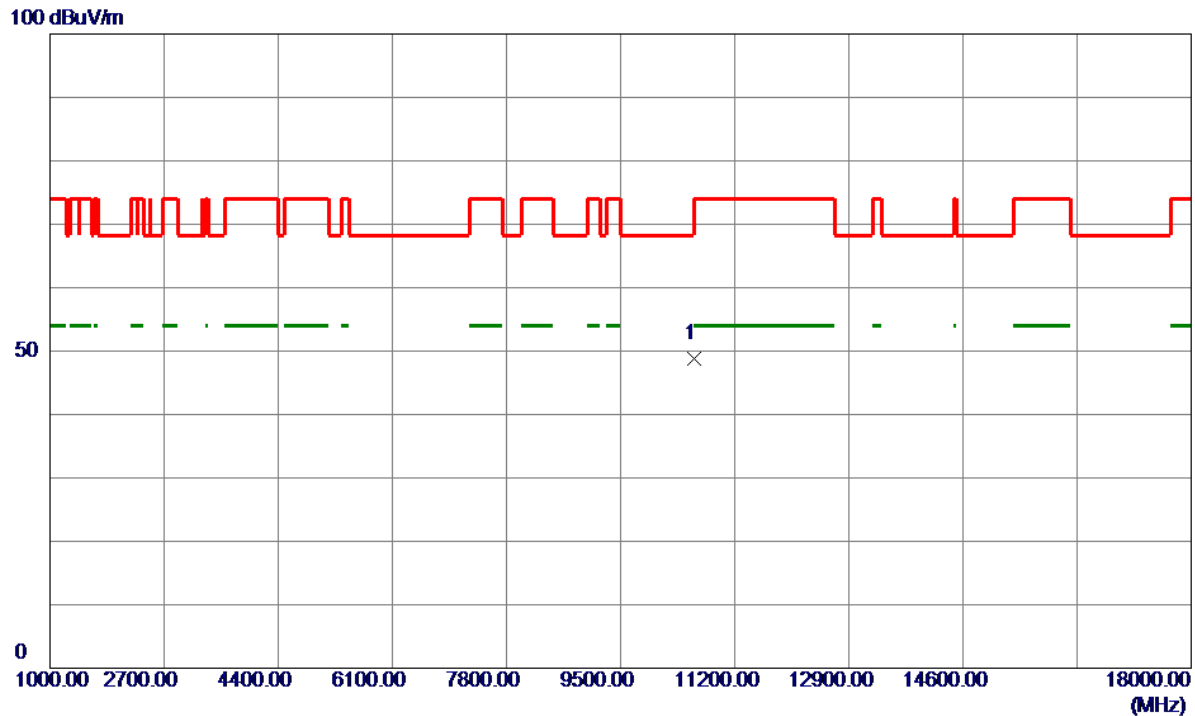


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10599.9100	37.97	10.81	48.78	68.20	-19.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

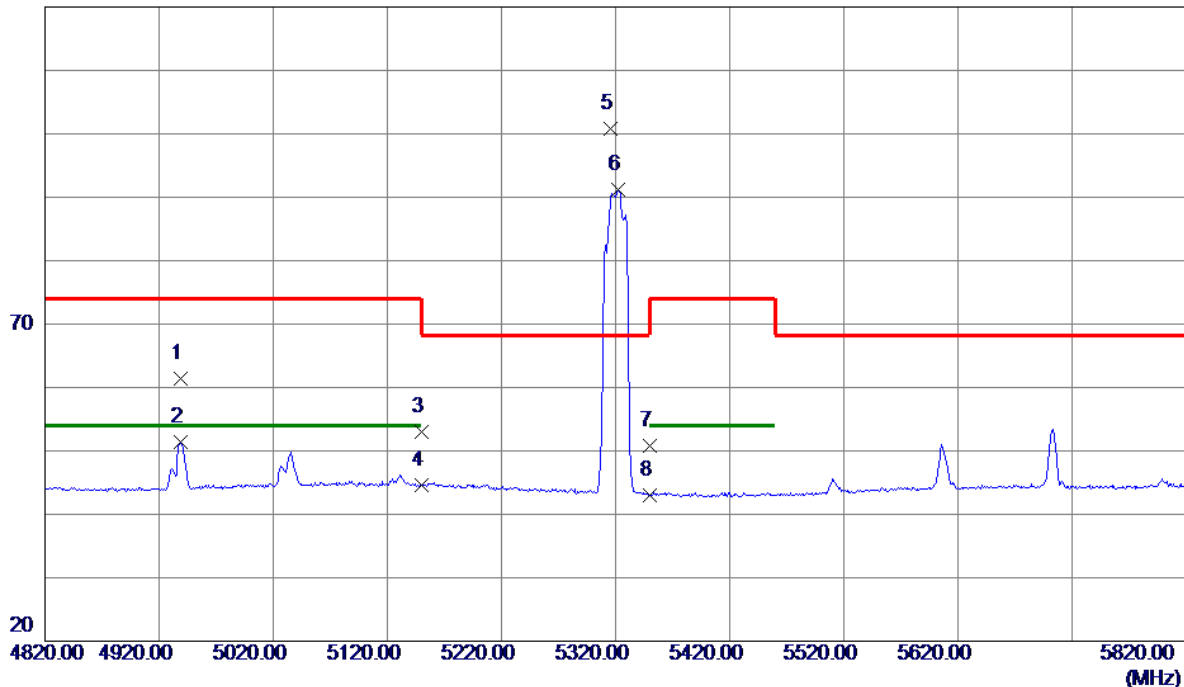


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4939.0000	47.19	14.21	61.40	74.00	-12.60	Peak	
2	4939.0000	37.17	14.21	51.38	54.00	-2.62	AVG	
3	5150.0000	38.78	14.31	53.09	74.00	-20.91	Peak	
4	5150.0000	30.34	14.31	44.65	54.00	-9.35	AVG	
5 *	5316.0000	86.48	14.29	100.77	68.20	32.57	Peak	No Limit
6	5322.0000	76.87	14.29	91.16	999.00	-907.84	AVG	No Limit
7	5350.0000	36.58	14.29	50.87	74.00	-23.13	Peak	
8	5350.0000	28.78	14.29	43.07	54.00	-10.93	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

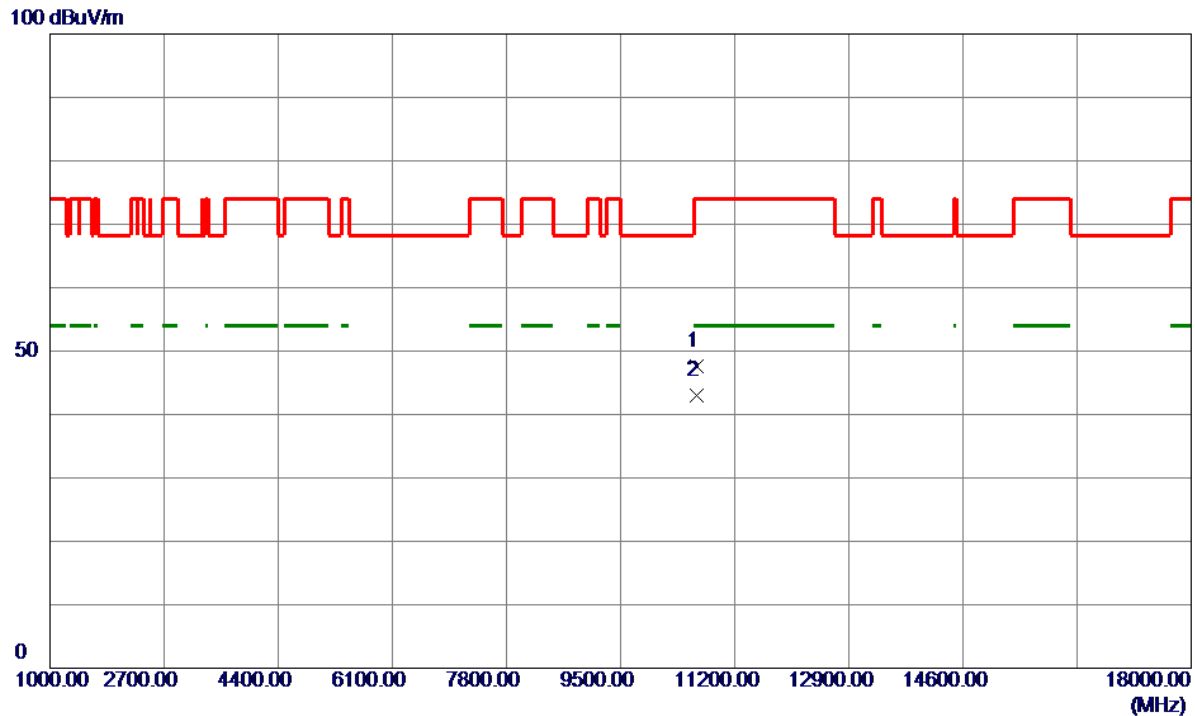


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10640.0400	36.88	10.81	47.69	74.00	-26.31	Peak	
2 *	10640.0599	32.25	10.81	43.06	54.00	-10.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

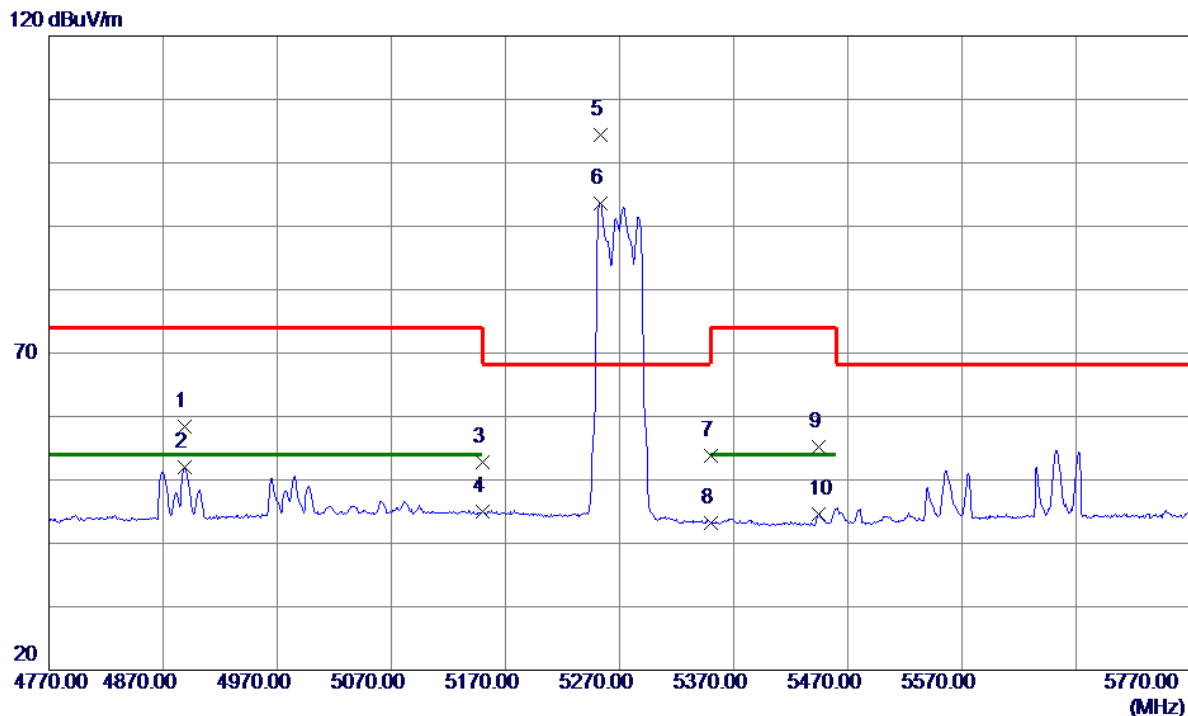


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4889.0000	44.23	14.12	58.35	74.00	-15.65	Peak	
2	4889.0000	37.88	14.12	52.00	54.00	-2.00	AVG	
3	5150.0000	38.40	14.31	52.71	74.00	-21.29	Peak	
4	5150.0000	30.66	14.31	44.97	54.00	-9.03	AVG	
5 *	5253.0000	90.08	14.30	104.38	68.20	36.18	Peak	No Limit
6	5253.0000	79.28	14.30	93.58	999.00	-905.42	AVG	No Limit
7	5350.0000	39.43	14.29	53.72	74.00	-20.28	Peak	
8	5350.0000	28.97	14.29	43.26	54.00	-10.74	AVG	
9	5444.0000	40.94	14.28	55.22	74.00	-18.78	Peak	
10	5444.0000	30.28	14.28	44.56	54.00	-9.44	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

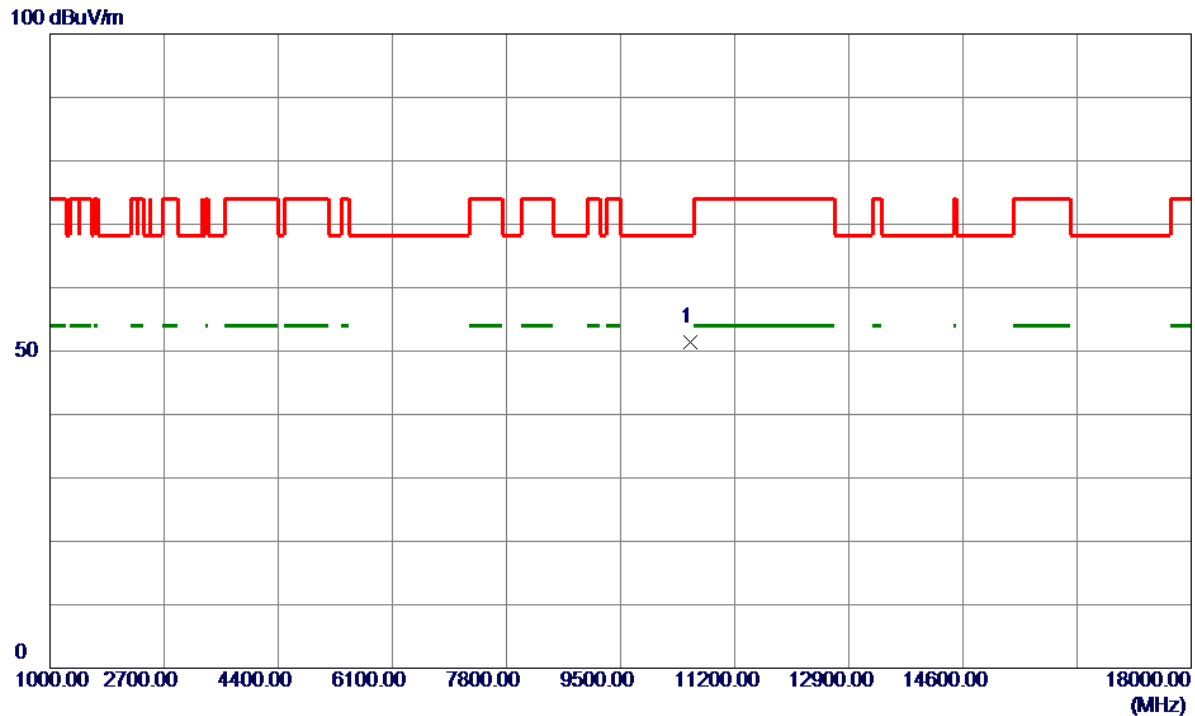


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10539.9500	40.58	10.81	51.39	68.20	-16.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

120 dBuV/m

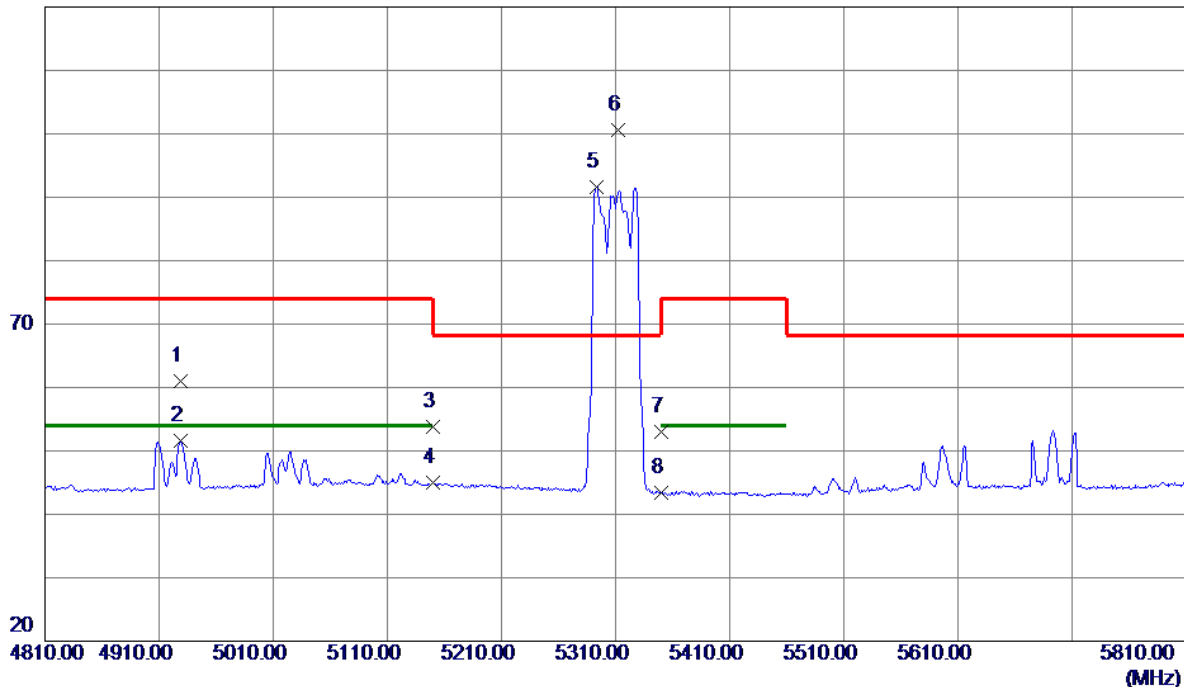

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4929.0000	46.80	14.19	60.99	74.00	-13.01	Peak	
2	4929.0000	37.39	14.19	51.58	54.00	-2.42	AVG	
3	5150.0000	39.47	14.31	53.78	74.00	-20.22	Peak	
4	5150.0000	30.65	14.31	44.96	54.00	-9.04	AVG	
5	5293.0000	77.26	14.30	91.56	999.00	-907.44	AVG	No Limit
6 *	5312.0000	86.24	14.29	100.53	68.20	32.33	Peak	No Limit
7	5350.0000	38.69	14.29	52.98	74.00	-21.02	Peak	
8	5350.0000	29.20	14.29	43.49	54.00	-10.51	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

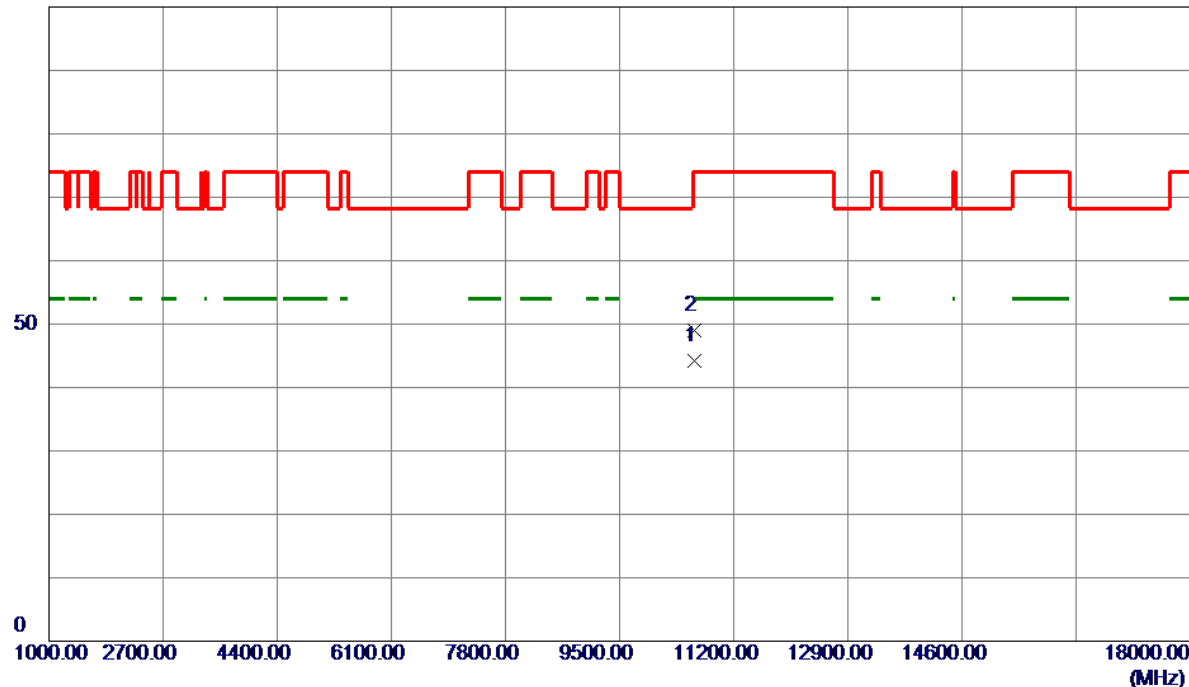


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.1000	33.44	10.81	44.25	54.00	-9.75	AVG	
2	10620.2600	38.15	10.81	48.96	74.00	-25.04	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

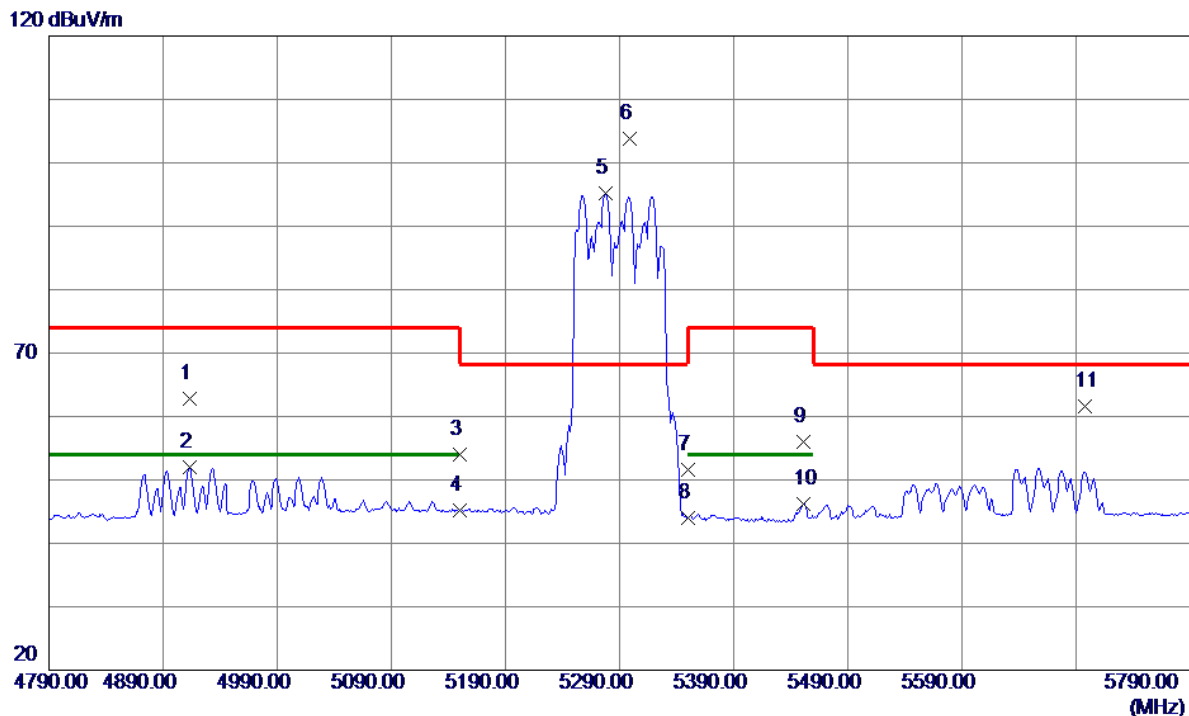


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4913.0000	48.56	14.16	62.72	74.00	-11.28	Peak	
2	4913.0000	37.77	14.16	51.93	54.00	-2.07	AVG	
3	5150.0000	39.69	14.31	54.00	74.00	-20.00	Peak	
4	5150.0000	30.94	14.31	45.25	54.00	-8.75	AVG	
5	5278.0000	80.91	14.30	95.21	999.00	-903.79	AVG	No Limit
6 *	5299.0000	89.45	14.30	103.75	68.20	35.55	Peak	No Limit
7	5350.0000	37.25	14.29	51.54	74.00	-22.46	Peak	
8	5350.0000	29.80	14.29	44.09	54.00	-9.91	AVG	
9	5451.0000	41.73	14.28	56.01	74.00	-17.99	Peak	
10	5451.0000	31.96	14.28	46.24	54.00	-7.76	AVG	
11	5698.0000	46.93	14.71	61.64	68.20	-6.56	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

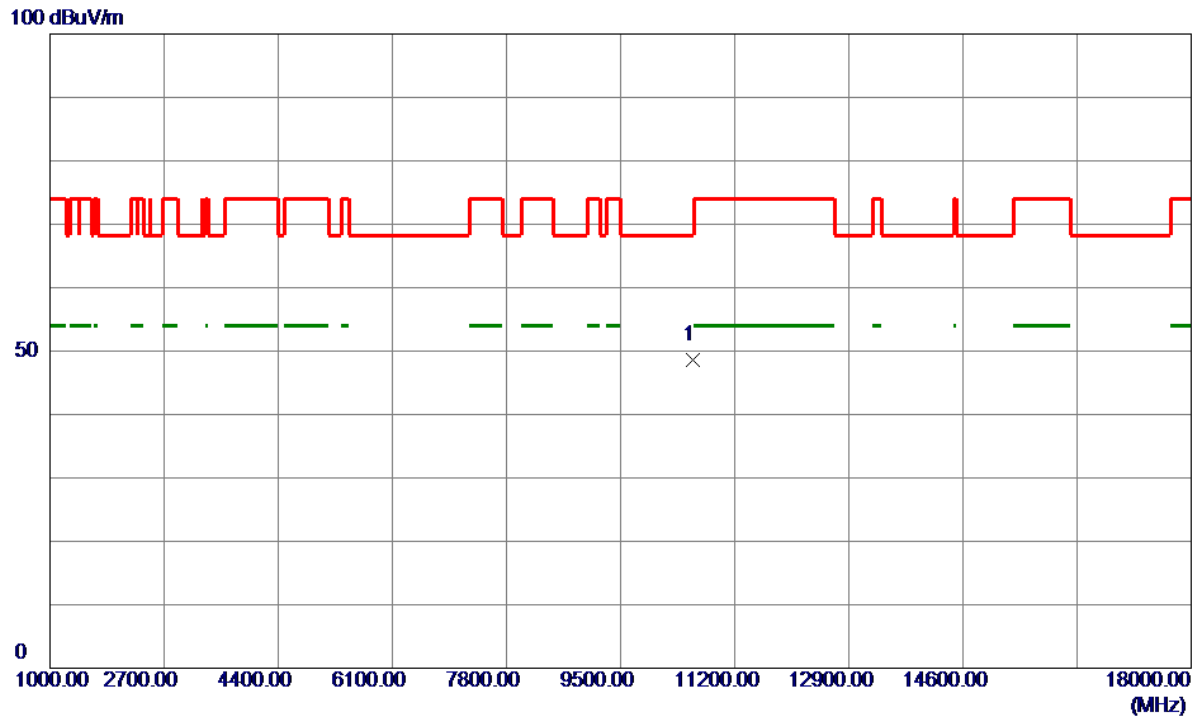


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10579.9700	37.72	10.81	48.53	68.20	-19.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

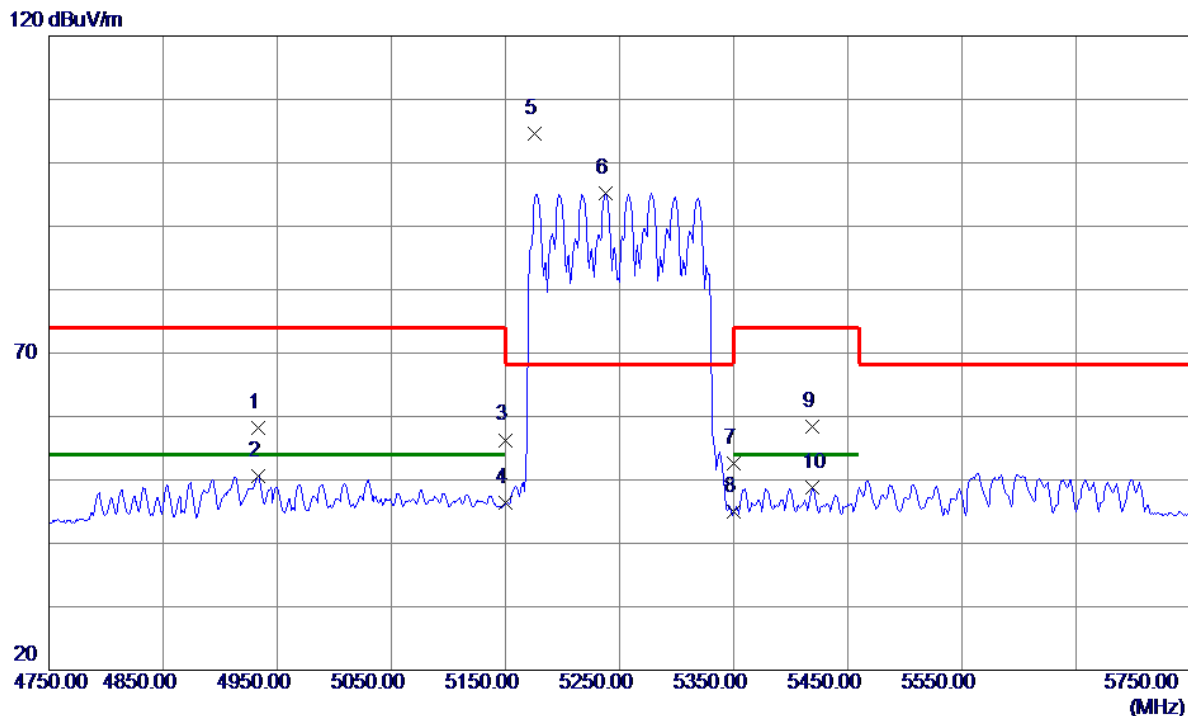


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4933.0000	44.00	14.20	58.20	74.00	-15.80	Peak	
2	4933.0000	36.46	14.20	50.66	54.00	-3.34	AVG	
3	5150.0000	41.99	14.31	56.30	74.00	-17.70	Peak	
4	5150.0000	32.07	14.31	46.38	54.00	-7.62	AVG	
5 *	5176.0000	90.28	14.31	104.59	68.20	36.39	Peak	No Limit
6	5238.0000	80.81	14.30	95.11	999.00	-903.89	AVG	No Limit
7	5350.0000	38.30	14.29	52.59	74.00	-21.41	Peak	
8	5350.0000	30.77	14.29	45.06	54.00	-8.94	AVG	
9	5419.0000	44.02	14.29	58.31	74.00	-15.69	Peak	
10	5419.0000	34.52	14.29	48.81	54.00	-5.19	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

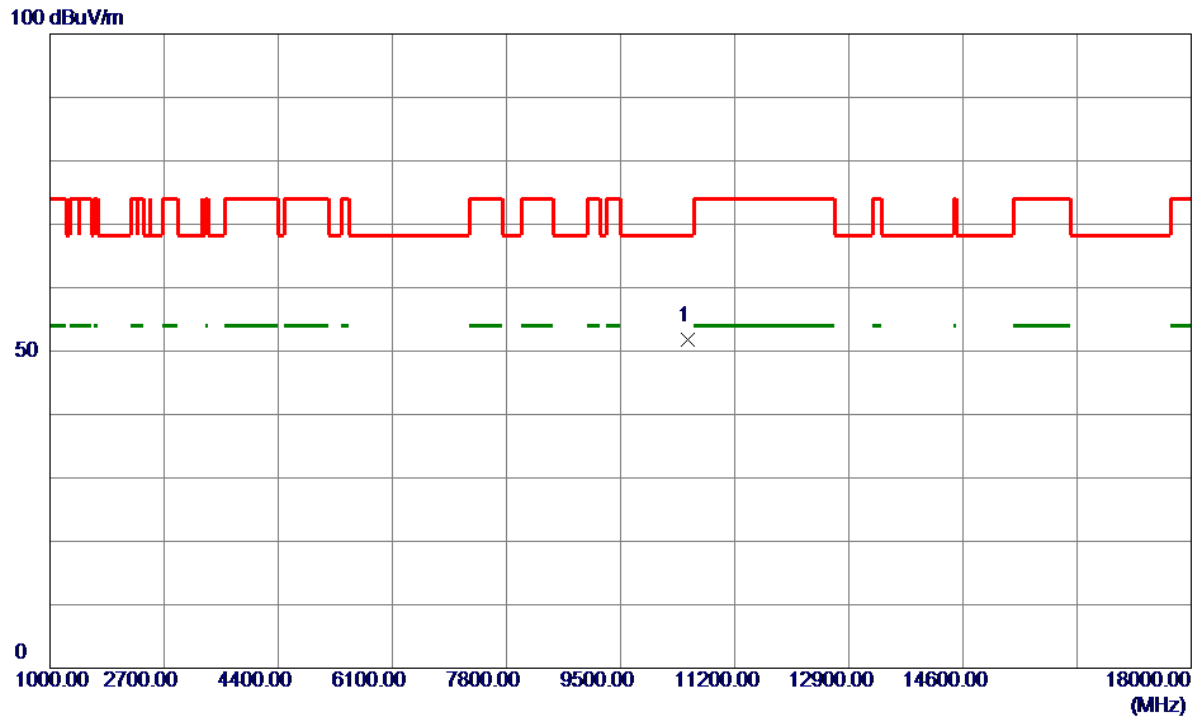


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10500.0100	40.89	10.81	51.70	68.20	-16.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

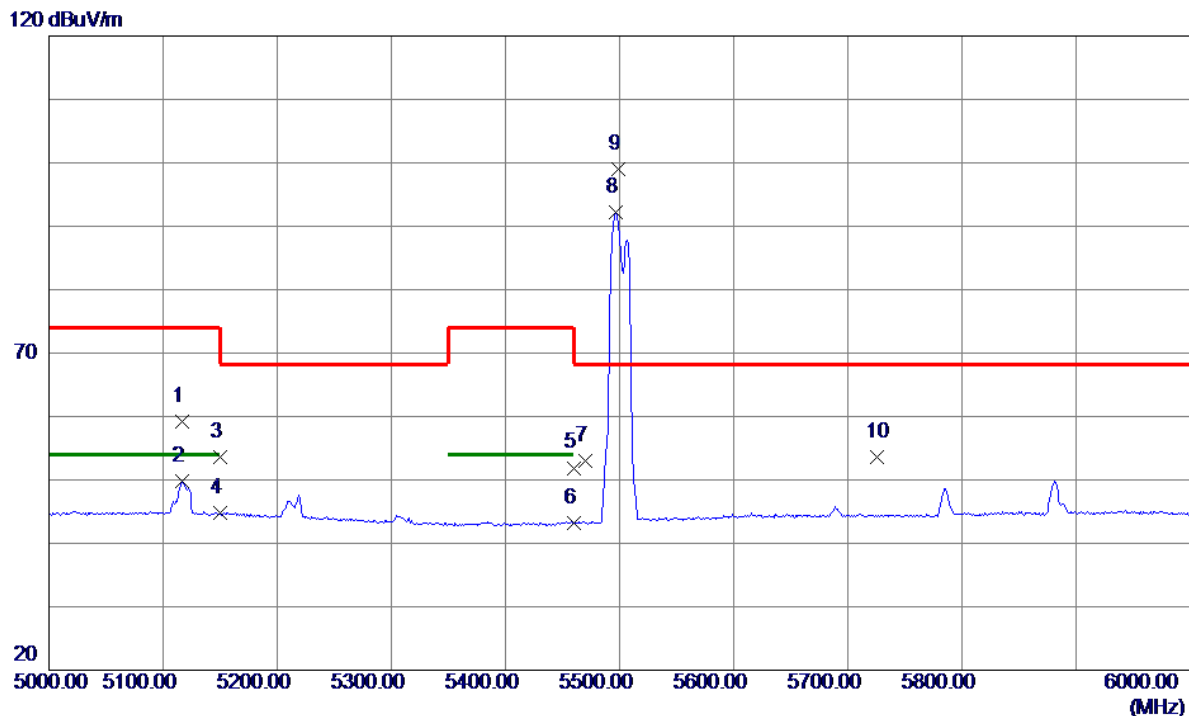

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5117.0000	44.84	14.31	59.15	74.00	-14.85	Peak	
2	5117.0000	35.43	14.31	49.74	54.00	-4.26	AVG	
3	5150.0000	39.20	14.31	53.51	74.00	-20.49	Peak	
4	5150.0000	30.40	14.31	44.71	54.00	-9.29	AVG	
5	5460.0000	37.62	14.28	51.90	74.00	-22.10	Peak	
6	5460.0000	28.89	14.28	43.17	54.00	-10.83	AVG	
7	5470.0000	38.66	14.28	52.94	68.20	-15.26	Peak	
8	5497.0000	77.88	14.28	92.16	999.00	-906.84	AVG	No Limit
9 *	5499.0000	84.71	14.28	98.99	68.20	30.79	Peak	No Limit
10	5725.0000	38.74	14.77	53.51	68.20	-14.69	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

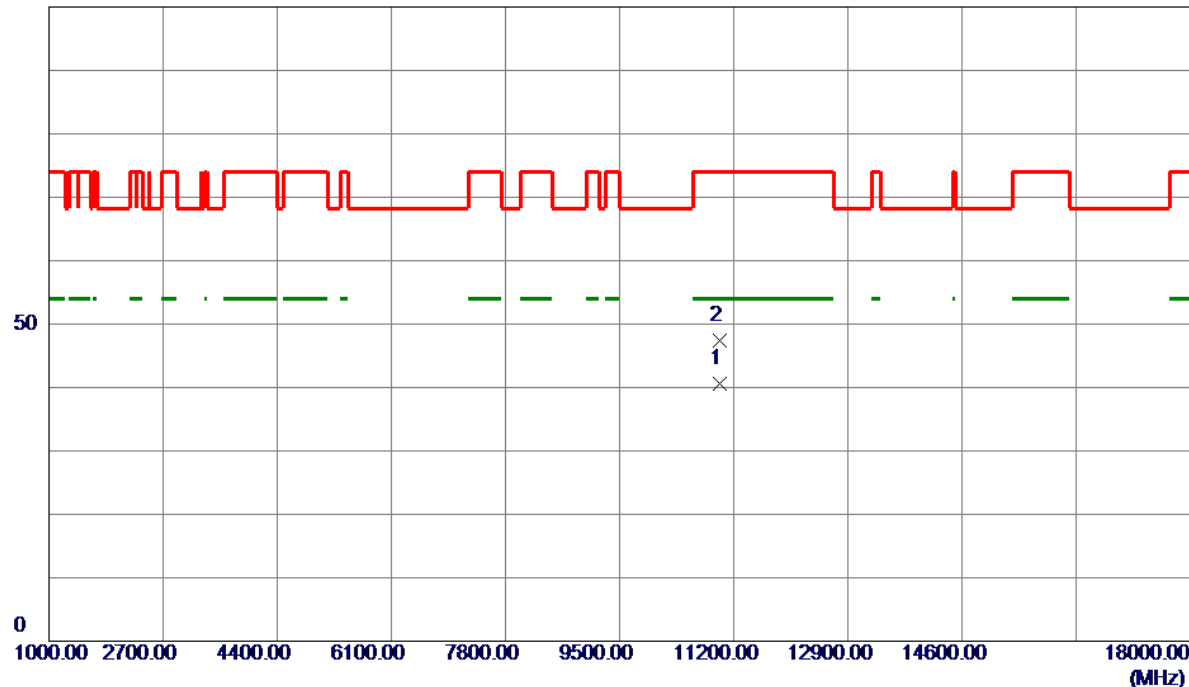

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10999.9900	29.86	10.81	40.67	54.00	-13.33	AVG	
2	11000.0500	36.63	10.81	47.44	74.00	-26.56	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

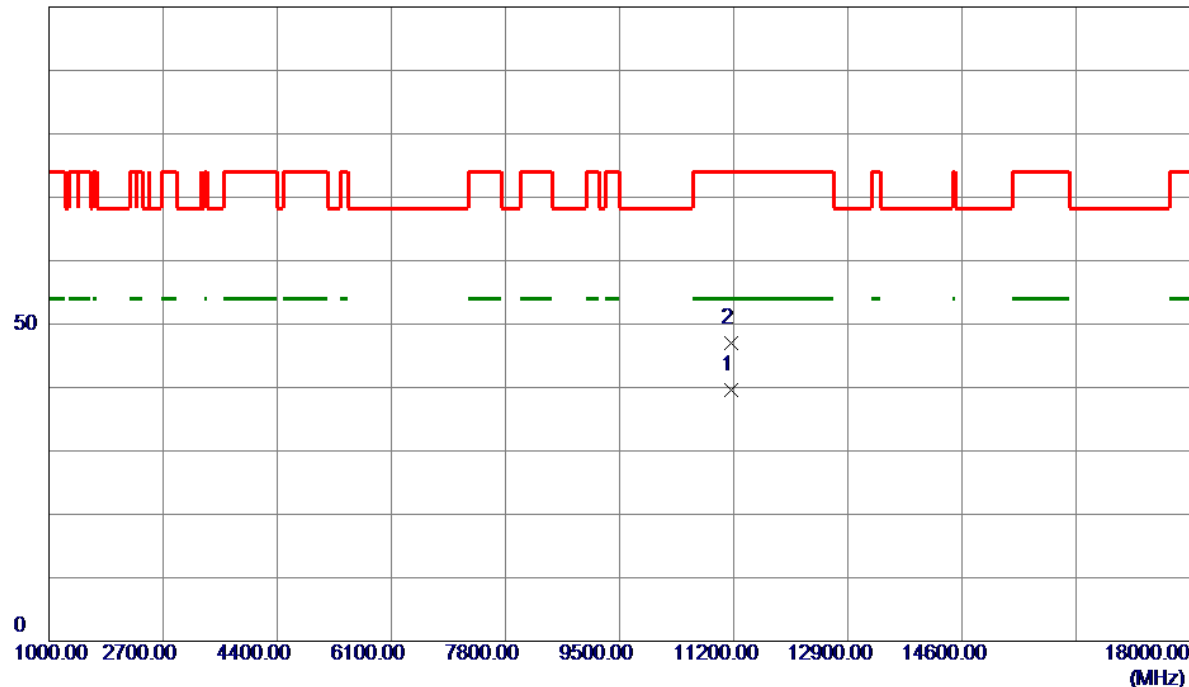


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11158.2699	28.78	10.90	39.68	54.00	-14.32	AVG	
2	11161.0800	36.03	10.90	46.93	74.00	-27.07	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

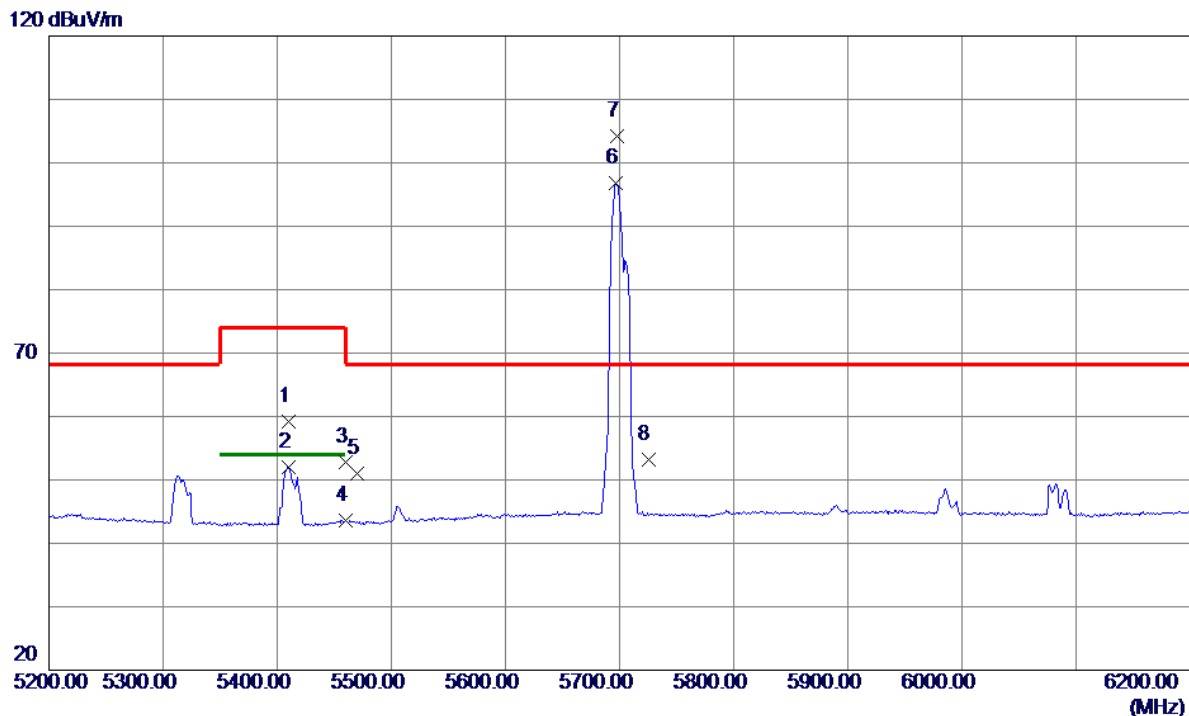


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5410.0000	44.95	14.29	59.24	74.00	-14.76	Peak	
2	5410.0000	37.65	14.29	51.94	54.00	-2.06	AVG	
3	5460.0000	38.43	14.28	52.71	74.00	-21.29	Peak	
4	5460.0000	29.27	14.28	43.55	54.00	-10.45	AVG	
5	5470.0000	36.77	14.28	51.05	68.20	-17.15	Peak	
6	5697.0000	82.04	14.71	96.75	999.00	-902.25	AVG	No Limit
7 *	5698.0000	89.51	14.71	104.22	68.20	36.02	Peak	No Limit
8	5725.0000	38.51	14.77	53.28	68.20	-14.92	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

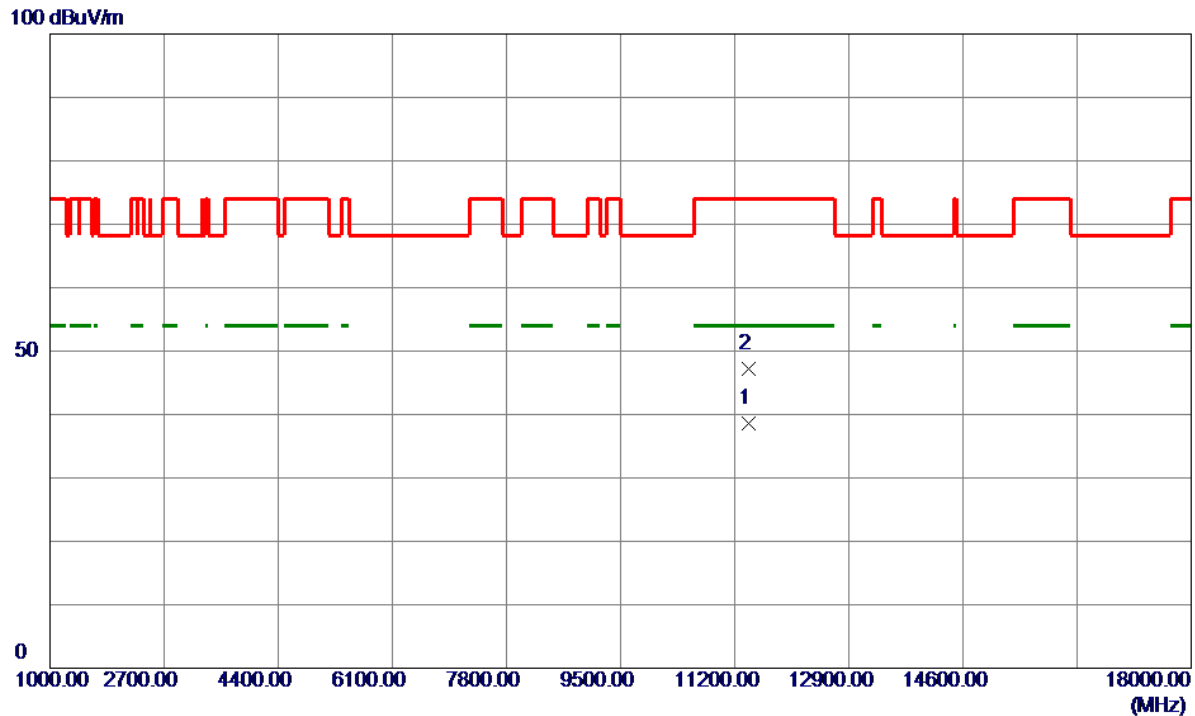


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11399.8200	27.47	11.05	38.52	54.00	-15.48	AVG	
2	11400.3200	36.22	11.05	47.27	74.00	-26.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

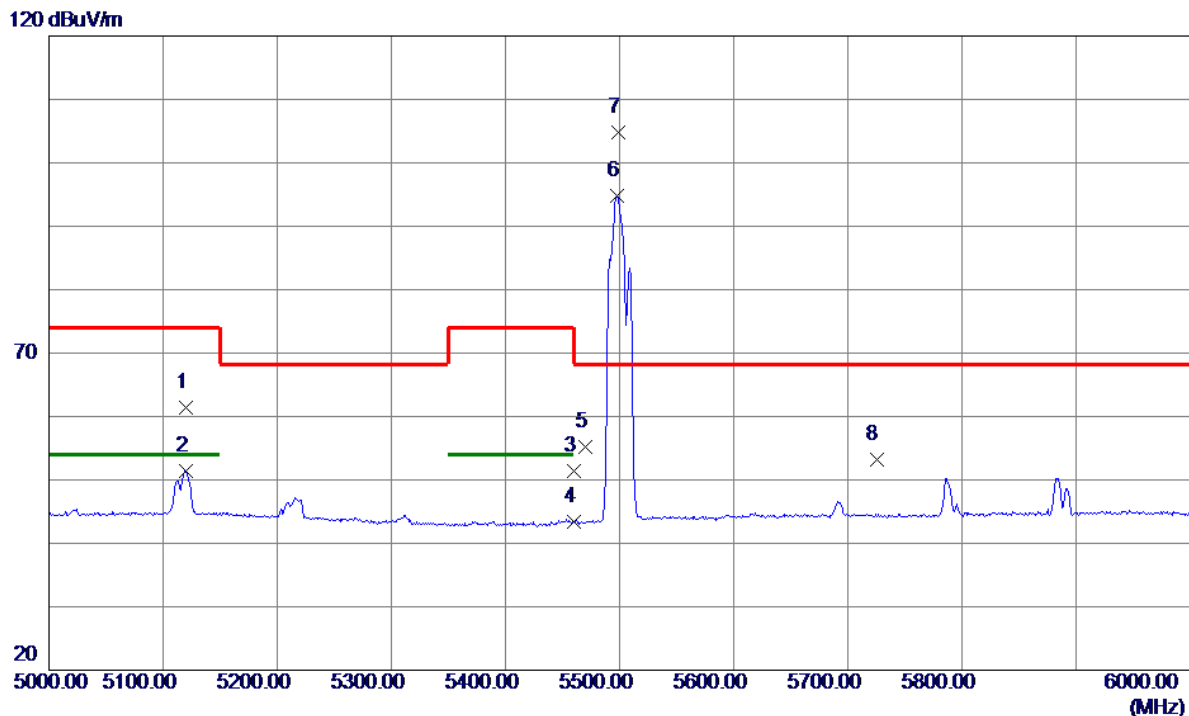

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5120.0000	47.15	14.31	61.46	74.00	-12.54	Peak	
2	5120.0000	37.16	14.31	51.47	54.00	-2.53	AVG	
3	5460.0000	37.15	14.28	51.43	74.00	-22.57	Peak	
4	5460.0000	29.18	14.28	43.46	54.00	-10.54	AVG	
5	5470.0000	40.95	14.28	55.23	68.20	-12.97	Peak	
6	5498.0000	80.43	14.28	94.71	999.00	-904.29	AVG	No Limit
7 *	5499.0000	90.61	14.28	104.89	68.20	36.69	Peak	No Limit
8	5725.0000	38.45	14.77	53.22	68.20	-14.98	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

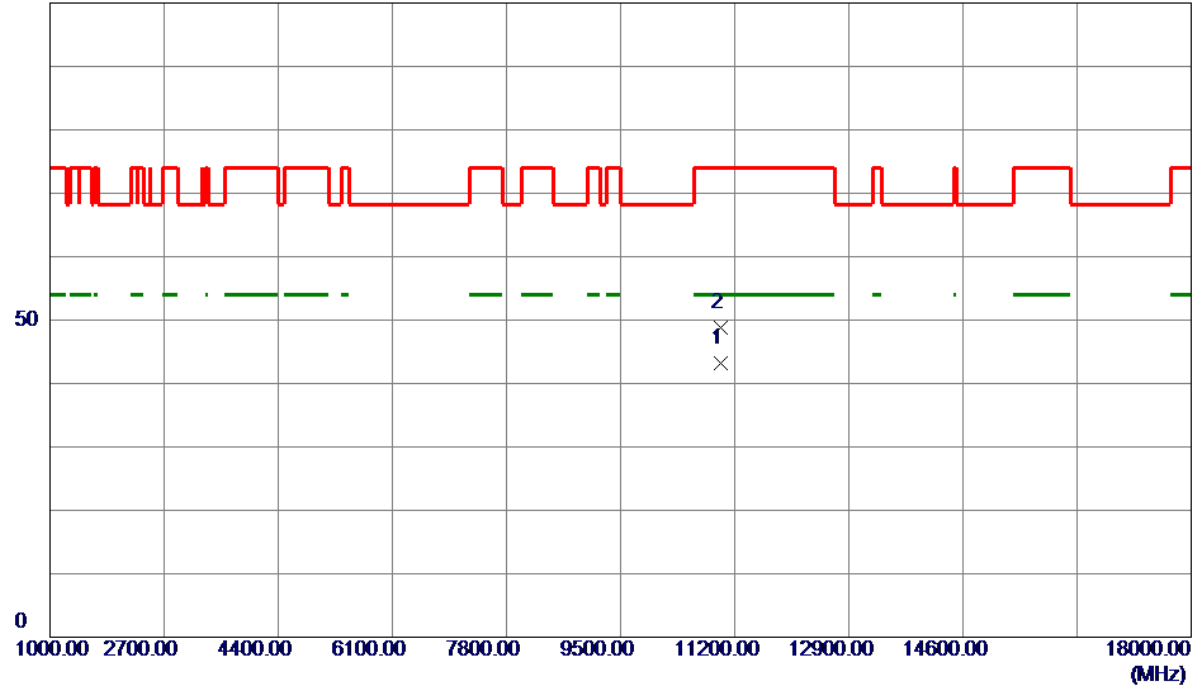


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0400	32.37	10.81	43.18	54.00	-10.82	AVG	
2	11000.1800	38.04	10.81	48.85	74.00	-25.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

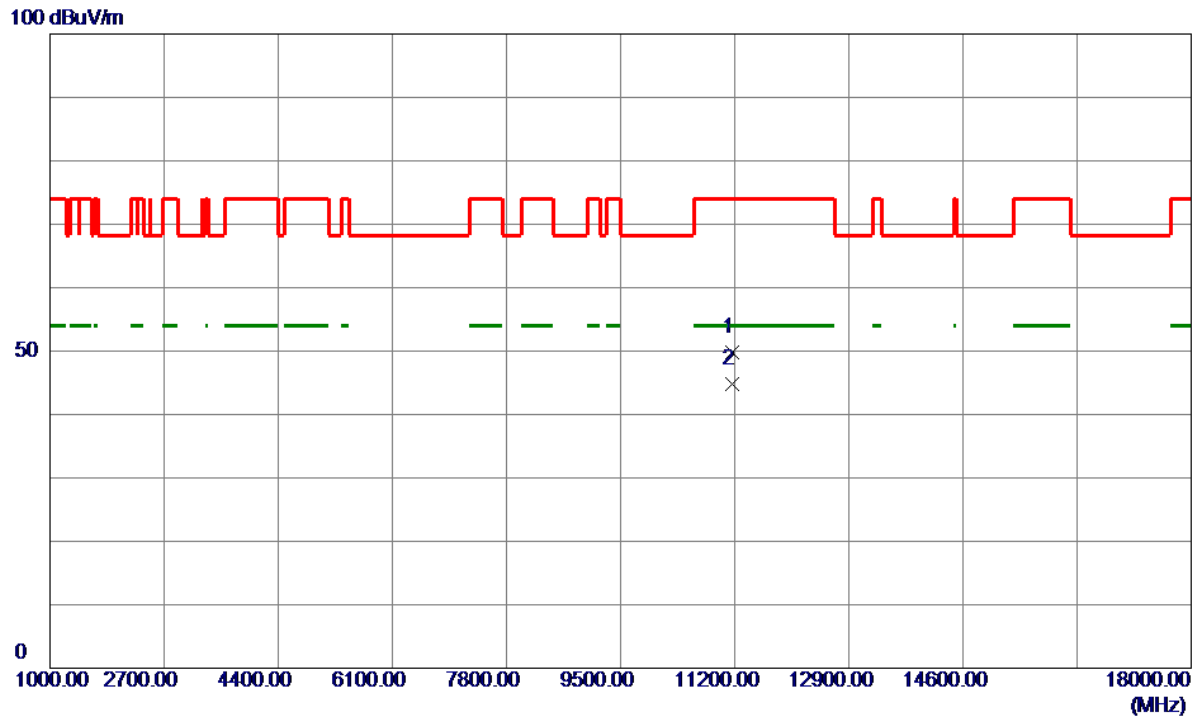


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11159.9600	38.82	10.90	49.72	74.00	-24.28	Peak	
2 *	11160.0599	33.94	10.90	44.84	54.00	-9.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

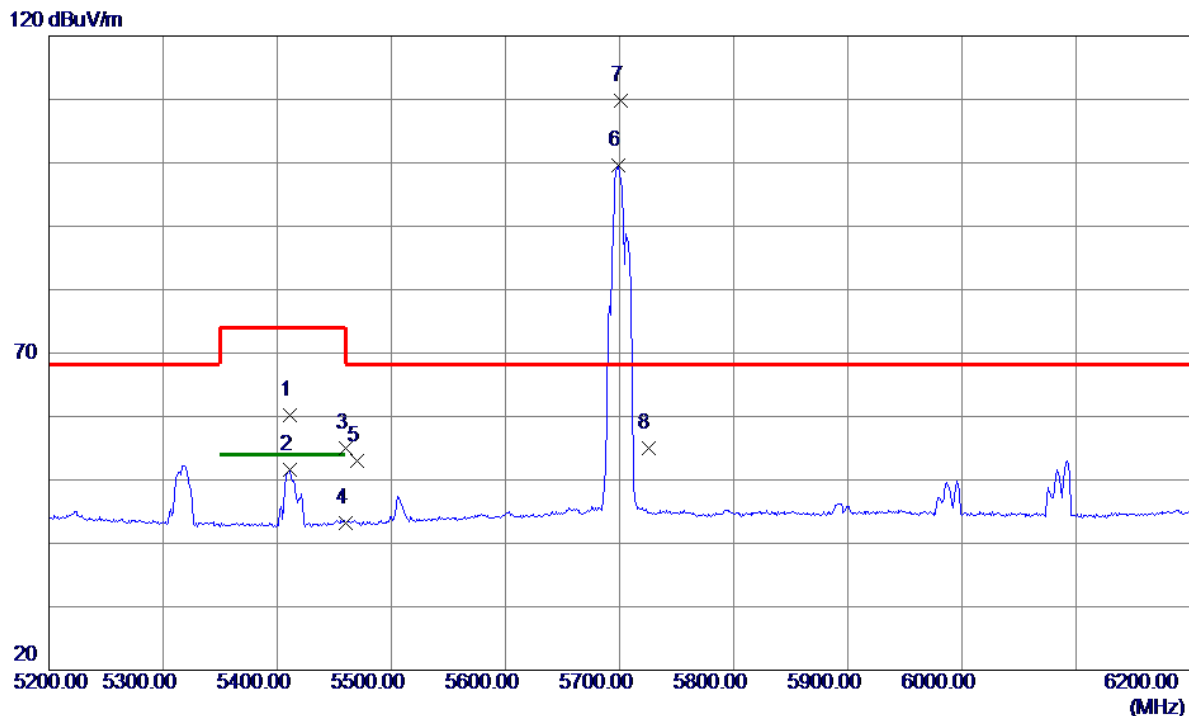

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5411.0000	45.87	14.29	60.16	74.00	-13.84	Peak	
2	5411.0000	37.22	14.29	51.51	54.00	-2.49	AVG	
3	5460.0000	40.69	14.28	54.97	74.00	-19.03	Peak	
4	5460.0000	29.00	14.28	43.28	54.00	-10.72	AVG	
5	5470.0000	38.79	14.28	53.07	68.20	-15.13	Peak	
6	5699.0000	84.93	14.71	99.64	999.00	-899.36	AVG	No Limit
7 *	5701.0000	94.98	14.72	109.70	68.20	41.50	Peak	No Limit
8	5725.0000	40.30	14.77	55.07	68.20	-13.13	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

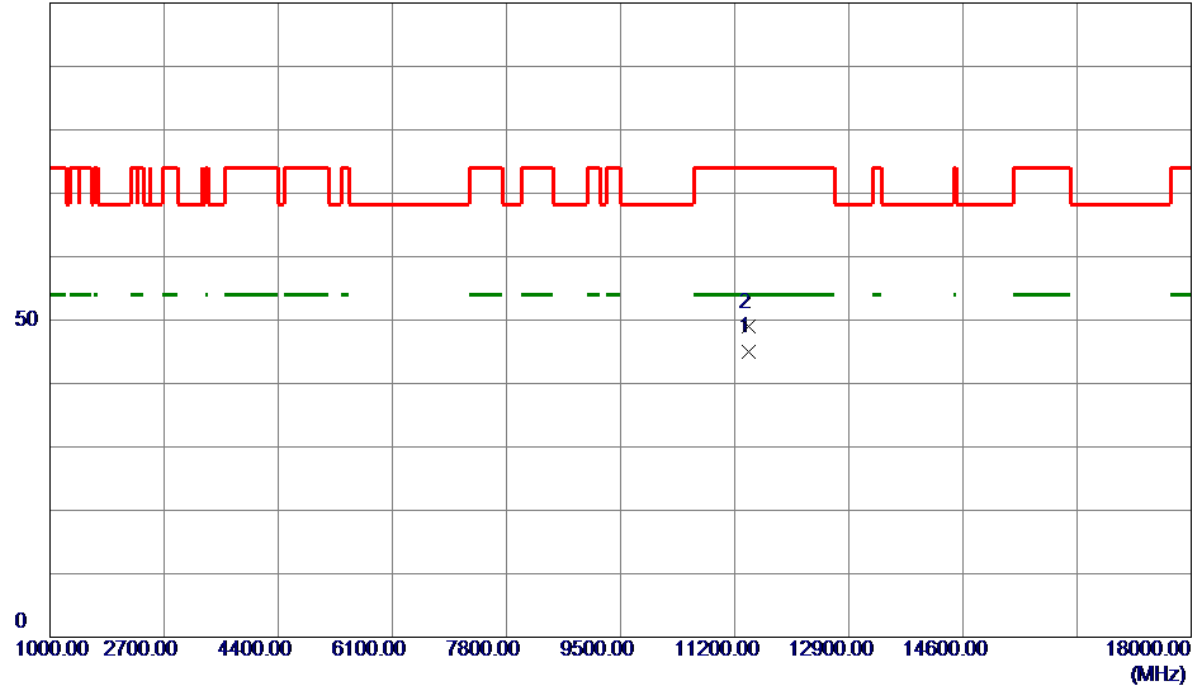


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	33.97	11.05	45.02	54.00	-8.98	AVG	
2	11400.0199	37.85	11.05	48.90	74.00	-25.10	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

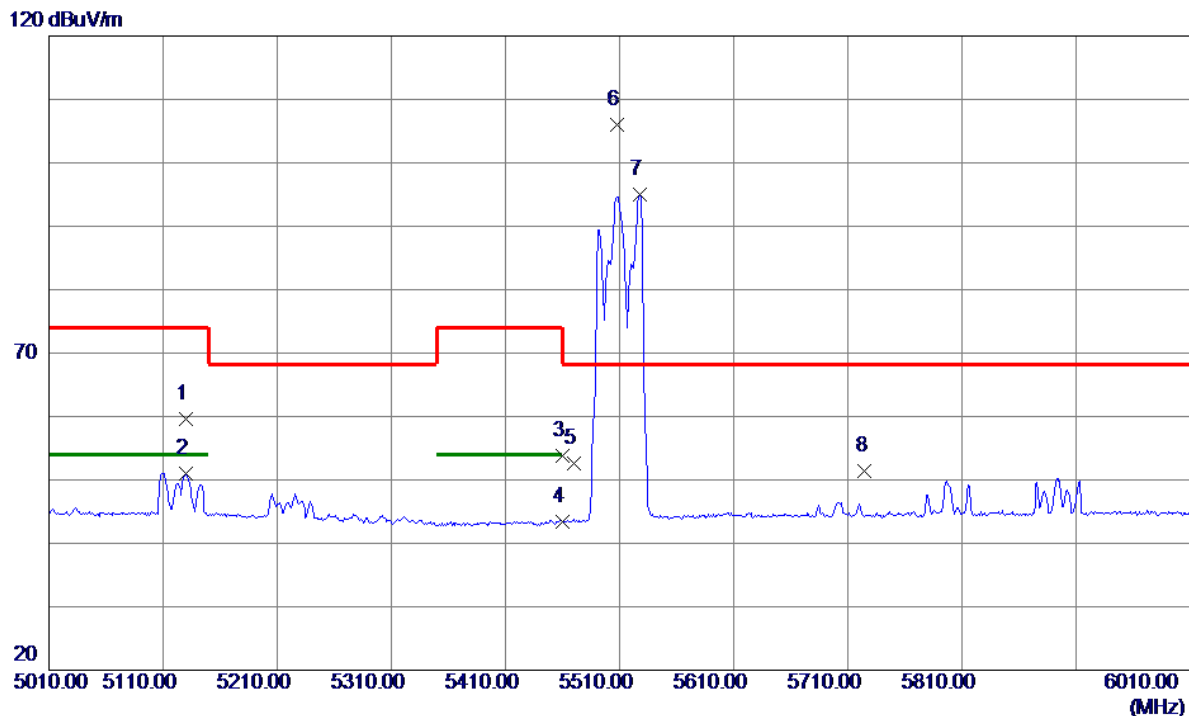


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5130.0000	45.33	14.31	59.64	74.00	-14.36	Peak	
2	5130.0000	36.75	14.31	51.06	54.00	-2.94	AVG	
3	5460.0000	39.53	14.28	53.81	74.00	-20.19	Peak	
4	5460.0000	29.13	14.28	43.41	54.00	-10.59	AVG	
5	5470.0000	38.28	14.28	52.56	68.20	-15.64	Peak	
6 *	5508.0000	91.75	14.30	106.05	68.20	37.85	Peak	No Limit
7	5528.0000	80.65	14.34	94.99	999.00	-904.01	AVG	No Limit
8	5725.0000	36.63	14.77	51.40	68.20	-16.80	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

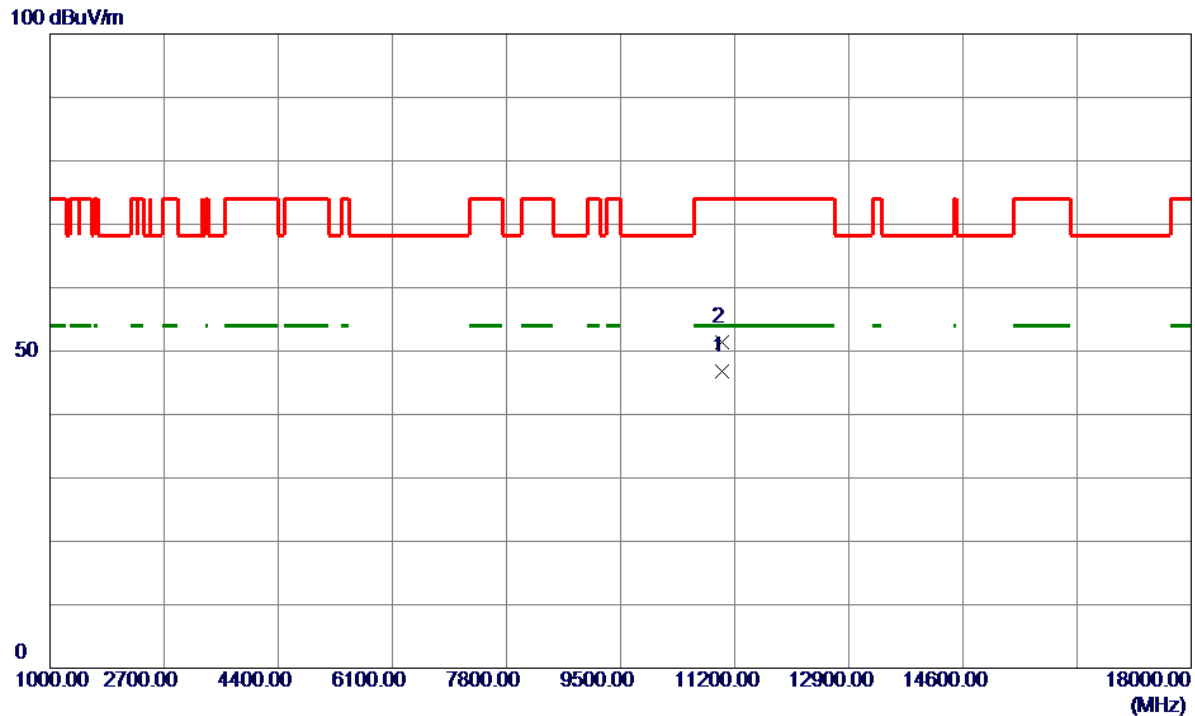

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11017.9349	35.92	10.82	46.74	54.00	-7.26	AVG	
2	11018.0150	40.58	10.82	51.40	74.00	-22.60	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

100 dBuV/m

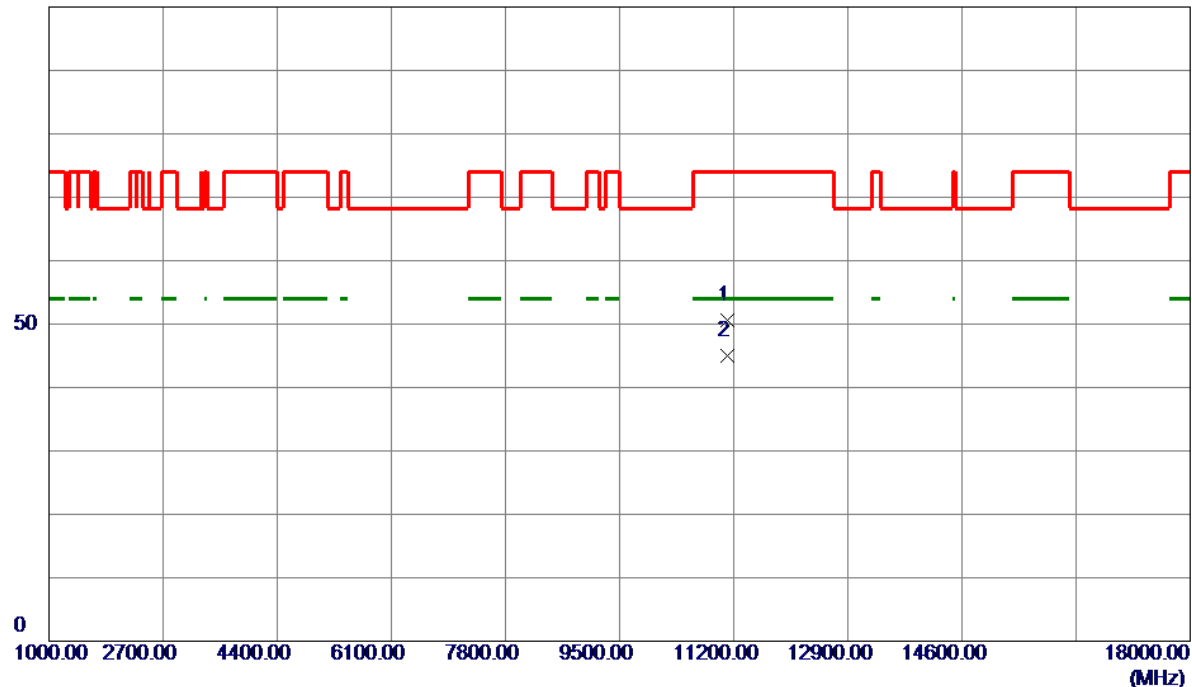


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11099.6280	39.74	10.87	50.61	74.00	-23.39	Peak	
2 *	11099.8640	34.12	10.87	44.99	54.00	-9.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

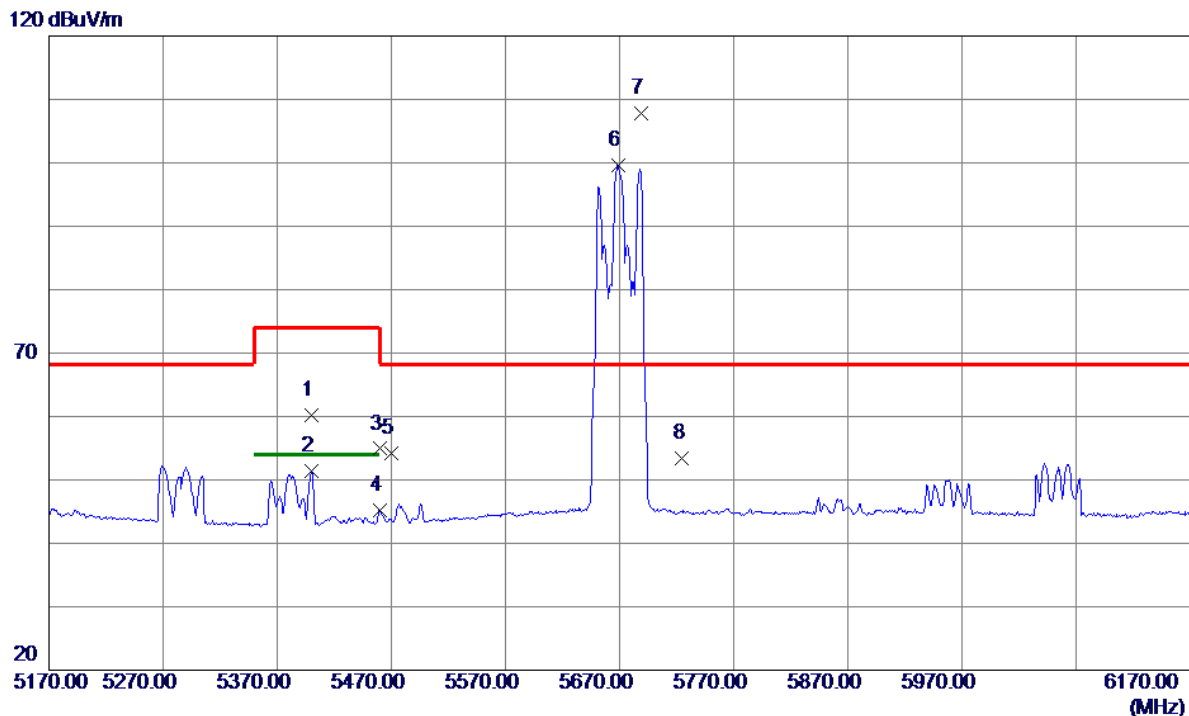


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5400.0000	45.88	14.29	60.17	74.00	-13.83	Peak	
2	5400.0000	37.12	14.29	51.41	54.00	-2.59	AVG	
3	5460.0000	40.62	14.28	54.90	74.00	-19.10	Peak	
4	5460.0000	30.97	14.28	45.25	54.00	-8.75	AVG	
5	5470.0000	39.88	14.28	54.16	68.20	-14.04	Peak	
6	5669.0000	84.98	14.65	99.63	999.00	-899.37	AVG	No Limit
7 *	5689.0000	93.15	14.69	107.84	68.20	39.64	Peak	No Limit
8	5725.0000	38.61	14.77	53.38	68.20	-14.82	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

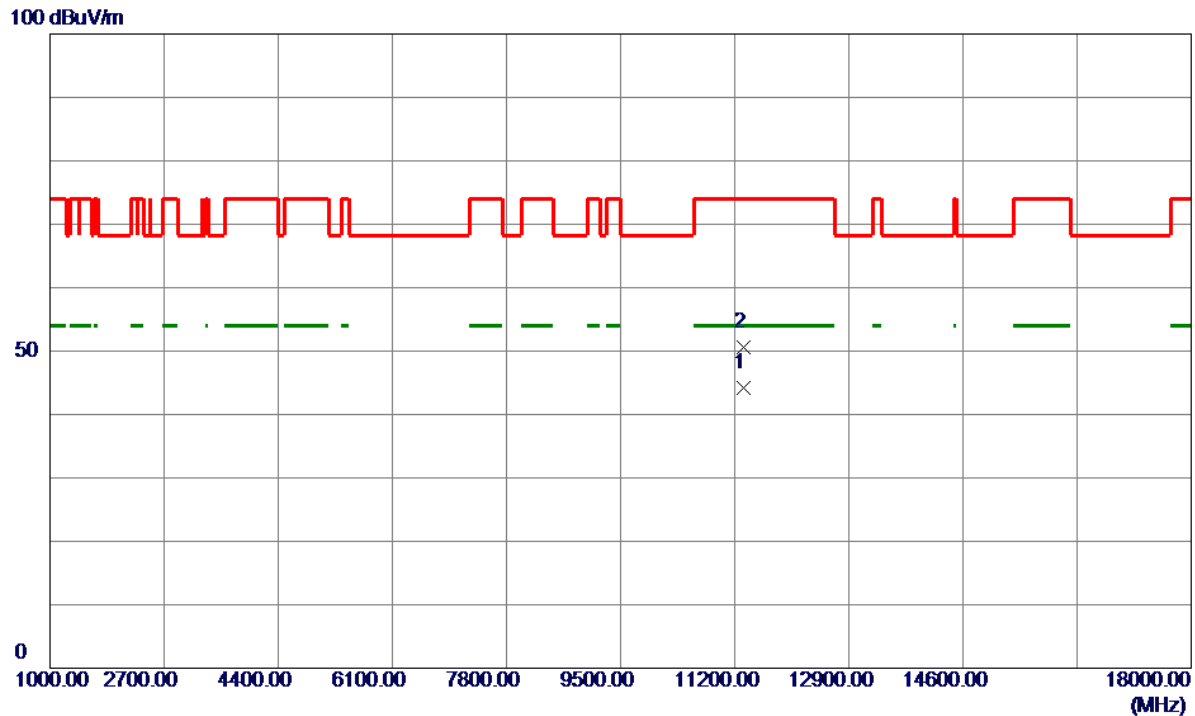


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11339.2440	33.11	11.01	44.12	54.00	-9.88	AVG	
2	11340.7980	39.54	11.01	50.55	74.00	-23.45	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

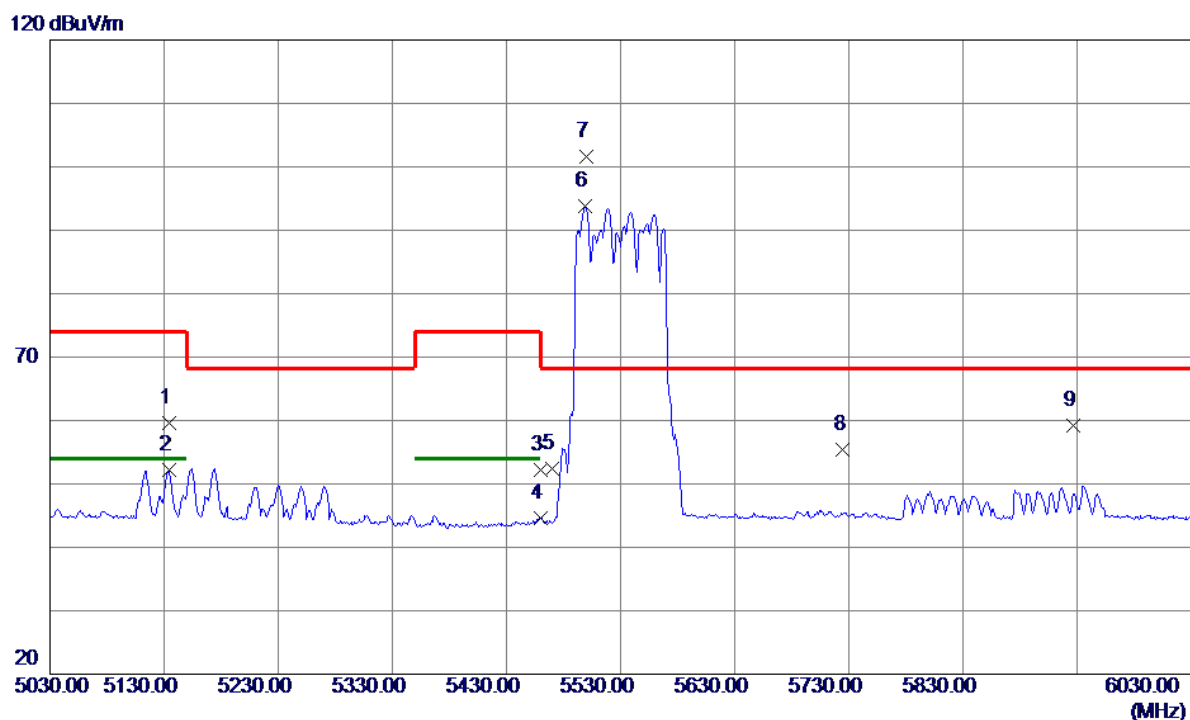

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5134.0000	45.28	14.31	59.59	74.00	-14.41	Peak	
2	5134.0000	37.84	14.31	52.15	54.00	-1.85	AVG	
3	5460.0000	37.96	14.28	52.24	74.00	-21.76	Peak	
4	5460.0000	30.35	14.28	44.63	54.00	-9.37	AVG	
5	5470.0000	38.06	14.28	52.34	68.20	-15.86	Peak	
6	5499.0000	79.57	14.28	93.85	999.00	-905.15	AVG	No Limit
7 *	5500.0000	87.28	14.28	101.56	68.20	33.36	Peak	No Limit
8	5725.0000	40.71	14.77	55.48	68.20	-12.72	Peak	
9	5927.0000	44.00	15.21	59.21	68.20	-8.99	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.