

Shenzhen Haijixing Technology Co., Ltd

Model No.: WD05-ANT

Product specification


Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2402 ~ 2480MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	0	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impedence(ohm)	50	
Polarization Type	V ertical & Horizontal	
V . S .W . R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

PCB Antenna

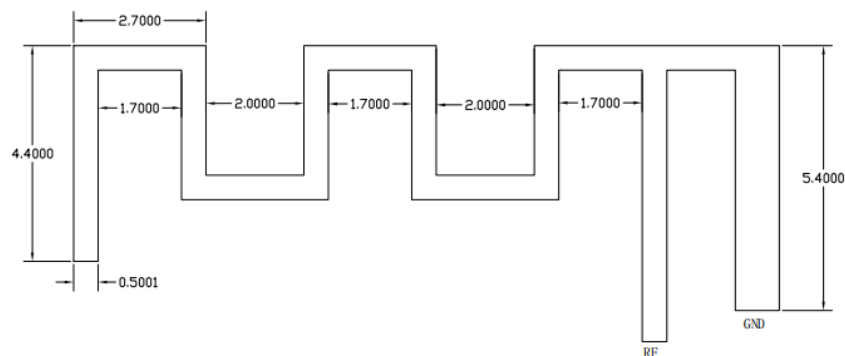

Unit: mm

Antenna Gain

Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.03	-0.48	1.20	-3.83	1.11	-2.99	6 0.2 %

6th Floor, Building D, Zhuangbian Industrial Park, Nanchang, Sanwei Community, Hangcheng Street, Baoan District, Shenzhen, Guangdong, China, 518104

Return Loss




The Environment of Antenna Radiation Pattern




3D radiation pattern diagram



XY-plane

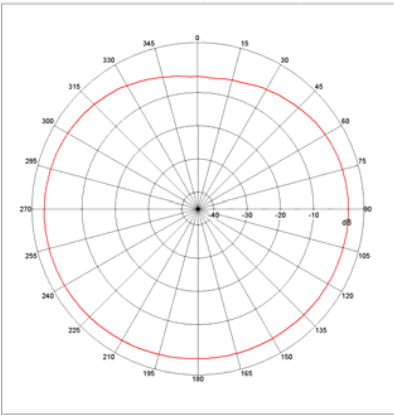

XZ-plane

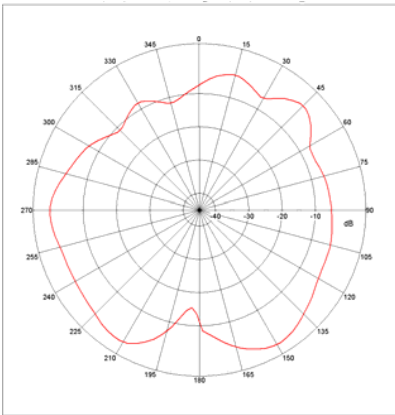

YZ-plane

