



TEST REPORT

Product Name: Yuqilin Industry version
FCC ID: 2BP7EX8T
Trademark: MMC
Model Number: X8T
Prepared For: MicroMultiCopter Innovation Technology Co., Ltd.
Address: Room 1701-5, Building 1, Land Plaza, No. 399, Jiashan Ave-nue, Luoxing Street, Jiaxing City, Zhejiang Province
Manufacturer: MicroMultiCopter Innovation Technology Co., Ltd.
Address: Room 1701-5, Building 1, Land Plaza, No. 399, Jiashan Ave-nue, Luoxing Street, Jiaxing City, Zhejiang Province
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Aug. 26, 2025
Sample tested Date: Aug. 26, 2025 to Aug. 28, 2025
Issue Date: Aug. 28, 2025
Report No.: CTB25082613501RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	50
8.1 Block Diagram Of Test Setup	50
8.2 Limit	50
8.3 Test procedure	50
8.4 Test Result	51
9. CONDUCTED OUTPUT POWER	75
9.1 Block Diagram Of Test Setup	75
9.2 Limit	75
9.3 Test procedure	75
9.4 Test Result	76
10. 6DB OCCUPIED BANDWIDTH	77
10.1 Block Diagram Of Test Setup	77
10.2 Limit	77
10.3 Test procedure	77
10.4 Test Result	78
11. POWER SPECTRAL DENSITY	92
11.1 Block Diagram Of Test Setup	92
11.2 Limit	92
11.3 Test procedure	92
11.4 Test Result	93
12. ANTENNA REQUIREMENT	106
13. EUT TEST SETUP PHOTOGRAPHS	107

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25082613501RF01	Aug. 28, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density, Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9kHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
Humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9kHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	X8T
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi (2.4G): IEEE 802.11b/g/n/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.709dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM, OFDMA
Antenna installation:	WiFi (2.4G): Internal antenna
Antenna Gain:	WiFi (2.4G): Ant1: 2.7dBi Ant2: 2.7dBi
Ratings:	For adapter: Input: 100-240V~50/60Hz 1.5A Output: 5.0V=3.0A /9.0V=3.0A /12.0V=3.0 /15.0V=3.0A /20.0V=2.25A DC 14.4V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC ADAPTOR	RUI YU	RYF909CPD45WVU	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n/ax40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 2.7dbi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=1.35dB,

So the directional gain for PSD is 4.05dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 2.7dBi

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M
802.11/ax20	65M
802.11/ax40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	14.4V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhé Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483. 5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024/10/31	2025/10/30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7	2025/5/23	2026/5/22

					(104489/003)		
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/10/26	2025/10/25
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28

4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

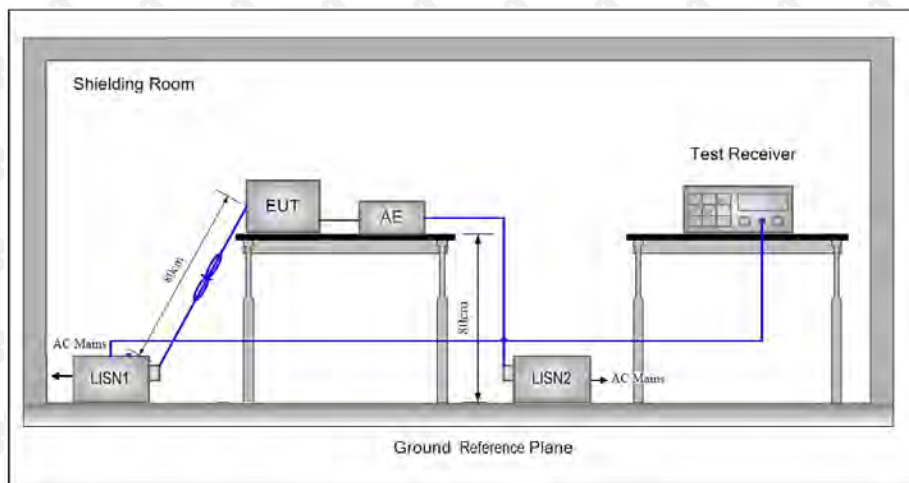

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

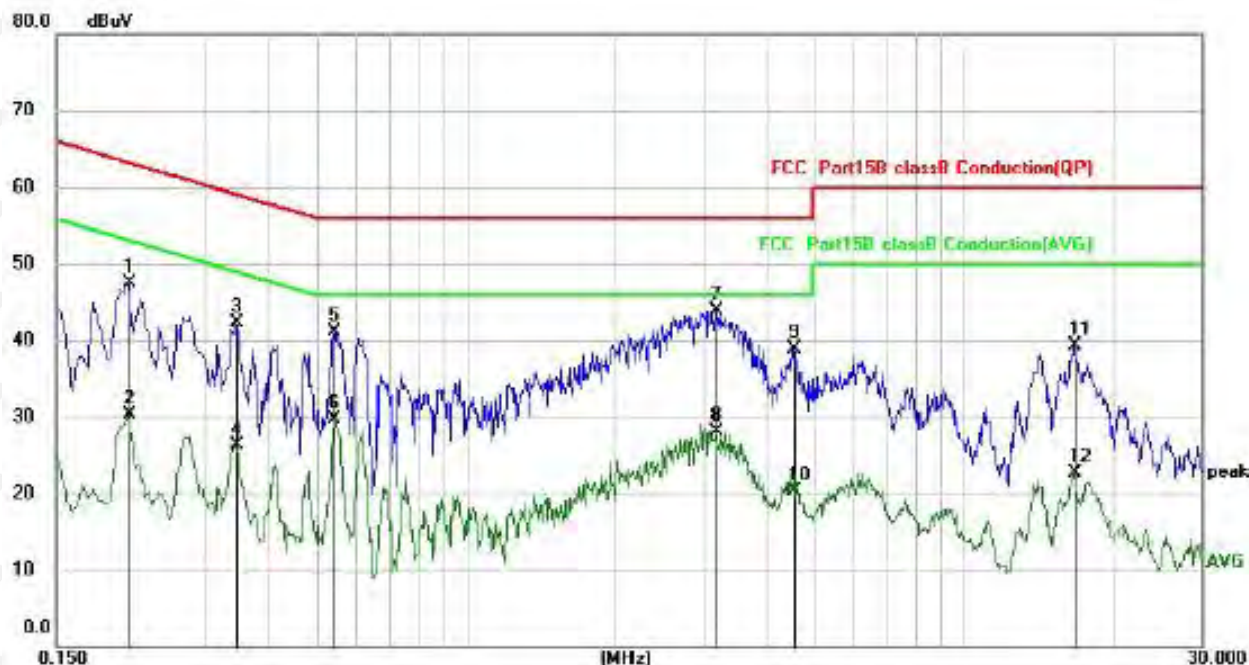

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2100	37.52	10.08	47.60	63.21	-15.61	QP
2		0.2100	20.18	10.08	30.26	53.21	-22.95	AVG
3		0.3458	32.18	10.08	42.26	59.06	-16.80	QP
4		0.3458	16.25	10.08	26.33	49.06	-22.73	AVG
5		0.5420	31.07	10.09	41.16	56.00	-14.84	QP
6		0.5420	19.57	10.09	29.66	46.00	-16.34	AVG
7	*	3.1619	33.73	10.21	43.94	56.00	-12.06	QP
8		3.1619	17.90	10.21	28.11	46.00	-17.89	AVG
9		4.5339	28.61	10.26	38.87	56.00	-17.13	QP
10		4.5339	10.06	10.26	20.32	46.00	-25.68	AVG
11		16.6937	28.41	10.81	39.22	60.00	-20.78	QP
12		16.6937	11.99	10.81	22.80	50.00	-27.20	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

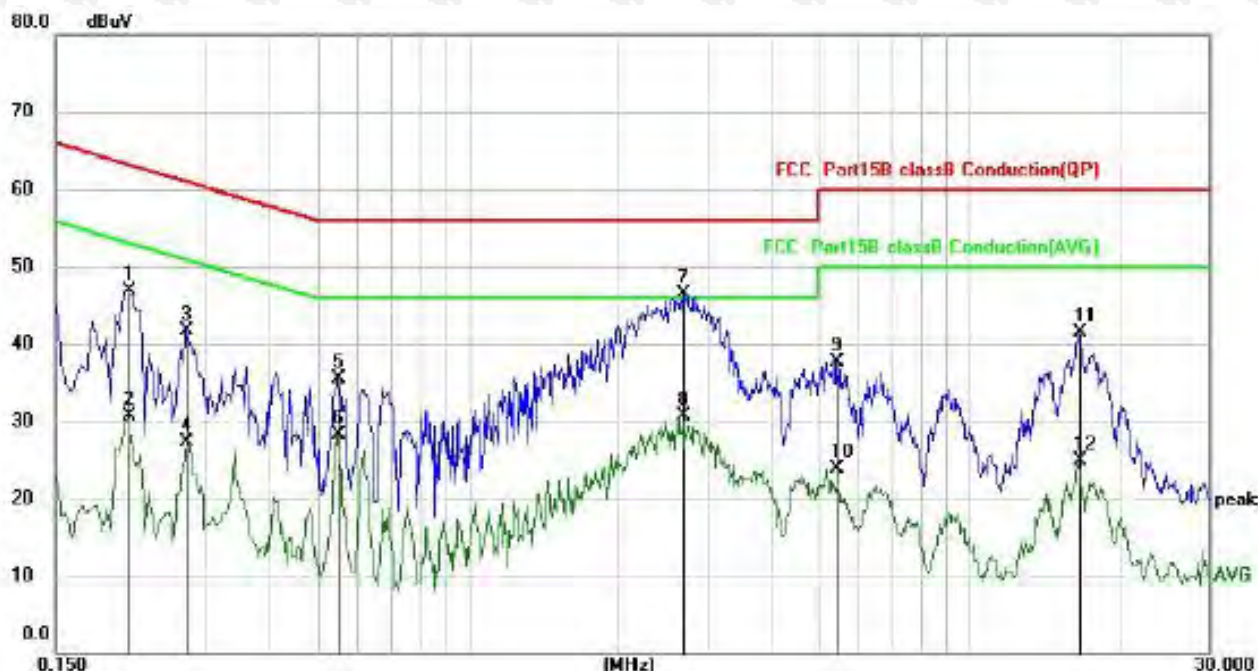

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2100	36.84	10.08	46.92	63.21	-16.29	QP
2		0.2100	20.71	10.08	30.79	53.21	-22.42	AVG
3		0.2740	31.64	10.08	41.72	61.00	-19.28	QP
4		0.2740	17.24	10.08	27.32	51.00	-23.68	AVG
5		0.5500	25.44	10.09	35.53	56.00	-20.47	QP
6		0.5500	18.16	10.09	28.25	46.00	-17.75	AVG
7	*	2.6900	36.29	10.20	46.49	56.00	-9.51	QP
8		2.6900	20.55	10.20	30.75	46.00	-15.25	AVG
9		5.4218	27.40	10.30	37.70	60.00	-22.30	QP
10		5.4218	13.62	10.30	23.92	50.00	-26.08	AVG
11		16.5100	30.64	10.80	41.44	60.00	-18.56	QP
12		16.5100	14.04	10.80	24.84	50.00	-25.16	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

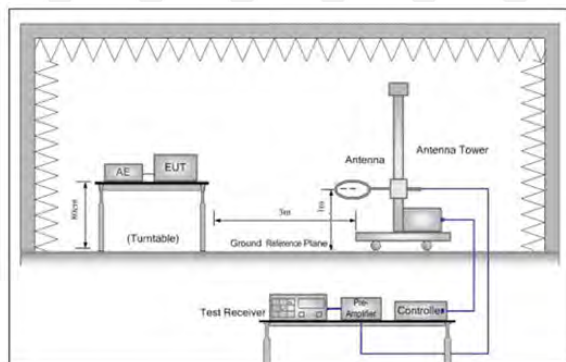


Figure 1. Below 30MHz

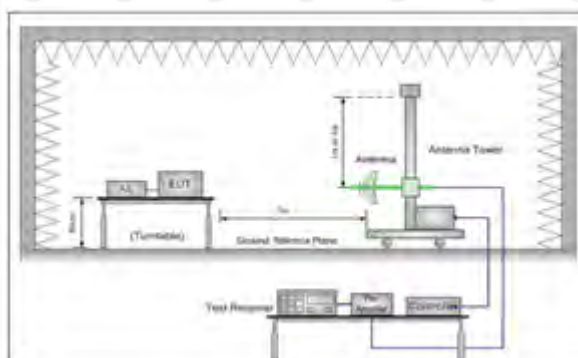


Figure 2. 30MHz to 1GHz

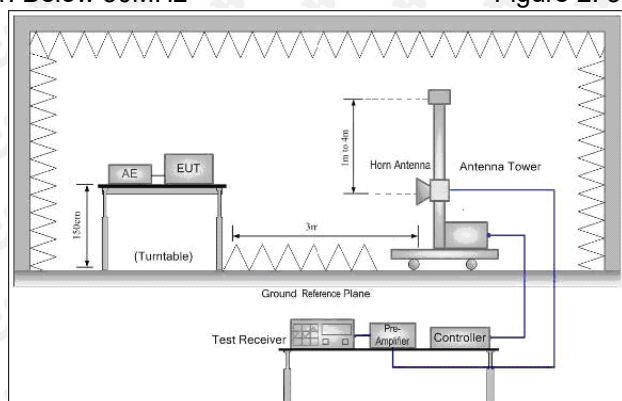


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

Below 1GHz Test Results:
Antenna polarity: H

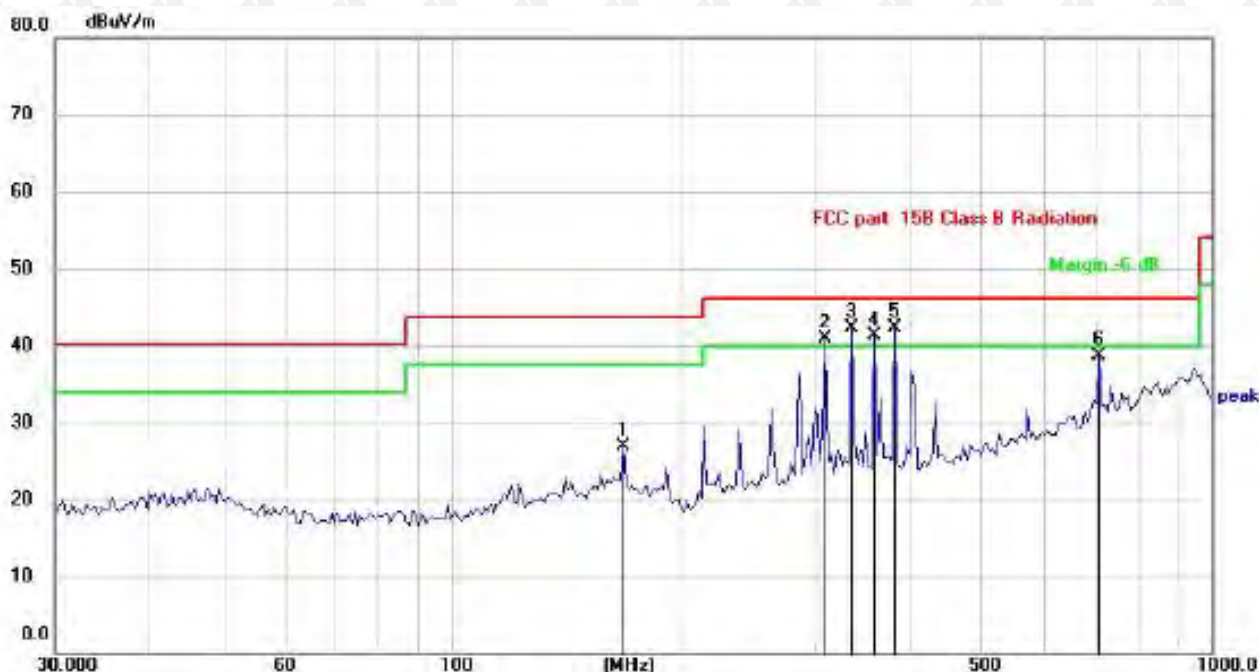

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		168.7093	30.18	-3.37	26.81	43.50	-16.69	QP
2	!	311.6324	43.18	-2.33	40.85	46.00	-5.15	QP
3	!	337.2155	44.23	-1.92	42.31	46.00	-3.69	QP
4	!	361.7137	42.82	-1.52	41.30	46.00	-4.70	QP
5	*	384.6055	43.47	-1.15	42.32	46.00	-3.68	QP
6		710.4266	32.02	6.61	38.63	46.00	-7.37	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dB/m	dB	Detector
1		61.0242	28.24	-7.31	20.93	40.00	-19.07	QP
2		164.3300	27.86	-3.40	24.46	43.50	-19.04	QP
3		337.2155	38.13	-1.92	36.21	46.00	-9.79	QP
4	*	384.6055	37.81	-1.15	36.66	46.00	-9.34	QP
5		575.6340	29.82	3.25	33.07	46.00	-12.93	QP
6		965.5420	27.52	9.22	36.74	54.00	-17.26	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9k-30MHz measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT1 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.41	-3.64	62.77	74	-11.23	peak
4824	49.67	-3.64	46.03	54	-7.97	AVG
7236	57.31	-0.95	56.36	74	-17.64	peak
7236	44.84	-0.95	43.89	54	-10.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.91	-3.64	63.27	74	-10.73	peak
4824	49.49	-3.64	45.85	54	-8.15	AVG
7236	57.40	-0.95	56.45	74	-17.55	peak
7236	43.86	-0.95	42.91	54	-11.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.93	-3.51	62.42	74	-11.58	peak
4874	50.55	-3.51	47.04	54	-6.96	AVG
7311	59.76	-0.82	58.94	74	-15.06	peak
7311	45.57	-0.82	44.75	54	-9.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.49	-3.51	59.98	74	-14.02	peak
4874	47.09	-3.51	43.58	54	-10.42	AVG
7311	59.71	-0.82	58.89	74	-15.11	peak
7311	42.52	-0.82	41.70	54	-12.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.58	-3.43	61.15	74	-12.85	peak
4924	47.12	-3.43	43.69	54	-10.31	AVG
7386	60.11	-0.75	59.36	74	-14.64	peak
7386	42.30	-0.75	41.55	54	-12.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.36	-3.43	60.93	74	-13.07	peak
4924	48.54	-3.43	45.11	54	-8.89	AVG
7386	58.72	-0.75	57.97	74	-16.03	peak
7386	42.93	-0.75	42.18	54	-11.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.47	-3.64	60.83	74	-13.17	peak
4824	49.15	-3.64	45.51	54	-8.49	AVG
7236	56.89	-0.95	55.94	74	-18.06	peak
7236	45.55	-0.95	44.60	54	-9.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.33	-3.64	61.69	74	-12.31	peak
4824	48.19	-3.64	44.55	54	-9.45	AVG
7236	58.94	-0.95	57.99	74	-16.01	peak
7236	43.04	-0.95	42.09	54	-11.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.27	-3.51	60.76	74	-13.24	peak
4874	47.86	-3.51	44.35	54	-9.65	AVG
7311	60.29	-0.82	59.47	74	-14.53	peak
7311	45.72	-0.82	44.90	54	-9.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.28	-3.51	60.77	74	-13.23	peak
4874	47.49	-3.51	43.98	54	-10.02	AVG
7311	59.09	-0.82	58.27	74	-15.73	peak
7311	45.00	-0.82	44.18	54	-9.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.87	-3.43	60.44	74	-13.56	peak
4924	47.13	-3.43	43.70	54	-10.30	AVG
7386	58.26	-0.75	57.51	74	-16.49	peak
7386	43.88	-0.75	43.13	54	-10.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.15	-3.43	60.72	74	-13.28	peak
4924	48.64	-3.43	45.21	54	-8.79	AVG
7386	56.45	-0.75	55.70	74	-18.30	peak
7386	41.51	-0.75	40.76	54	-13.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.65	-3.64	62.01	74	-11.99	peak
4824	49.14	-3.64	45.50	54	-8.50	AVG
7236	58.52	-0.95	57.57	74	-16.43	peak
7236	46.30	-0.95	45.35	54	-8.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.92	-3.64	63.28	74	-10.72	peak
4824	48.10	-3.64	44.46	54	-9.54	AVG
7236	57.57	-0.95	56.62	74	-17.38	peak
7236	45.33	-0.95	44.38	54	-9.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.80	-3.51	62.29	74	-11.71	peak
4874	49.40	-3.51	45.89	54	-8.11	AVG
7311	59.59	-0.82	58.77	74	-15.23	peak
7311	43.04	-0.82	42.22	54	-11.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.66	-3.51	62.15	74	-11.85	peak
4874	48.99	-3.51	45.48	54	-8.52	AVG
7311	58.54	-0.82	57.72	74	-16.28	peak
7311	44.89	-0.82	44.07	54	-9.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.77	-3.43	60.34	74	-13.66	peak
4924	46.77	-3.43	43.34	54	-10.66	AVG
7386	59.13	-0.75	58.38	74	-15.62	peak
7386	44.20	-0.75	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.54	-3.43	60.11	74	-13.89	peak
4924	46.26	-3.43	42.83	54	-11.17	AVG
7386	57.61	-0.75	56.86	74	-17.14	peak
7386	42.20	-0.75	41.45	54	-12.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.36	-3.63	61.73	74	-12.27	peak
4844	48.64	-3.63	45.01	54	-8.99	AVG
7266	58.16	-0.94	57.22	74	-16.78	peak
7266	44.11	-0.94	43.17	54	-10.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.28	-3.63	60.65	74	-13.35	peak
4844	48.19	-3.63	44.56	54	-9.44	AVG
7266	57.95	-0.94	57.01	74	-16.99	peak
7266	44.86	-0.94	43.92	54	-10.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.82	-3.51	60.31	74	-13.69	peak
4874	49.71	-3.51	46.20	54	-7.80	AVG
7311	60.31	-0.82	59.49	74	-14.51	peak
7311	44.22	-0.82	43.40	54	-10.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.62	-0.82	55.80	74	-18.20	peak
7311	43.28	-0.82	42.46	54	-11.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.41	-3.43	60.98	74	-13.02	peak
4904	47.67	-3.43	44.24	54	-9.76	AVG
7356	56.59	-0.75	55.84	74	-18.16	peak
7356	43.66	-0.75	42.91	54	-11.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.41	-3.43	60.98	74	-13.02	peak
4904	45.63	-3.43	42.20	54	-11.80	AVG
7356	57.01	-0.75	56.26	74	-17.74	peak
7356	42.38	-0.75	41.63	54	-12.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.44	-3.64	60.80	74	-13.20	peak
4824	47.63	-3.64	43.99	54	-10.01	AVG
7236	57.98	-0.95	57.03	74	-16.97	peak
7236	45.00	-0.95	44.05	54	-9.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.58	-3.64	61.94	74	-12.06	peak
4824	50.10	-3.64	46.46	54	-7.54	AVG
7236	58.41	-0.95	57.46	74	-16.54	peak
7236	45.17	-0.95	44.22	54	-9.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.05	-3.51	60.54	74.00	-13.46	peak
4874.00	47.61	-3.51	44.10	54.00	-9.90	AVG
7311.00	56.53	-0.82	55.71	74.00	-18.29	peak
7311.00	45.20	-0.82	44.38	54.00	-9.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.62	-3.51	59.11	74.00	-14.89	peak
4874.00	48.28	-3.51	44.77	54.00	-9.23	AVG
7311.00	58.78	-0.82	57.96	74.00	-16.04	peak
7311.00	43.53	-0.82	42.71	54.00	-11.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.55	-3.43	58.12	74	-15.88	peak
4924	47.43	-3.43	44.00	54	-10.00	AVG
7386	58.92	-0.75	58.17	74	-15.83	peak
7386	42.91	-0.75	42.16	54	-11.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.09	-3.43	60.66	74	-13.34	peak
4924	45.00	-3.43	41.57	54	-12.43	AVG
7386	56.27	-0.75	55.52	74	-18.48	peak
7386	41.44	-0.75	40.69	54	-13.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.56	-3.63	60.93	74	-13.07	peak
4844	47.19	-3.63	43.56	54	-10.44	AVG
7266	58.09	-0.94	57.15	74	-16.85	peak
7266	44.03	-0.94	43.09	54	-10.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.00	-3.63	60.37	74	-13.63	peak
4844	48.59	-3.63	44.96	54	-9.04	AVG
7266	59.10	-0.94	58.16	74	-15.84	peak
7266	45.52	-0.94	44.58	54	-9.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.47	-3.51	59.96	74	-14.04	peak
4874	47.30	-3.51	43.79	54	-10.21	AVG
7311	60.52	-0.82	59.70	74	-14.30	peak
7311	45.86	-0.82	45.04	54	-8.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.53	-3.51	43.02	54	-10.98	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.71	-3.43	61.28	74	-12.72	peak
4904	49.48	-3.43	46.05	54	-7.95	AVG
7356	57.50	-0.75	56.75	74	-17.25	peak
7356	41.17	-0.75	40.42	54	-13.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.48	-3.43	61.05	74	-12.95	peak
4904	47.77	-3.43	44.34	54	-9.66	AVG
7356	58.14	-0.75	57.39	74	-16.61	peak
7356	42.72	-0.75	41.97	54	-12.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.13	-5.81	51.32	74	-22.68	peak
2390	/	-5.81	/	54	/	AVG
2399	63.85	-5.84	58.01	74	-15.99	peak
2399	49.35	-5.84	43.51	54	-10.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.80	-5.81	51.99	74	-22.01	peak
2390	/	-5.81	/	54	/	AVG
2399	62.97	-5.84	57.13	74	-16.87	peak
2399	46.91	-5.84	41.07	54	-12.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.50	-5.65	50.85	74	-23.15	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.12	-5.65	50.47	74	-23.53	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.96	-5.81	52.15	74	-21.85	peak
2390	/	-5.81	/	54	/	AVG
2399	63.31	-5.84	57.47	74	-16.53	peak
2399	46.26	-5.84	40.42	54	-13.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.66	-5.81	50.85	74	-23.15	peak
2390	/	-5.81	/	54	/	AVG
2399	63.15	-5.84	57.31	74	-16.69	peak
2399	45.99	-5.84	40.15	54	-13.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.41	-5.65	50.76	74	-23.24	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.30	-5.65	50.65	74	-23.35	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.37	-5.81	51.56	74	-22.44	peak
2390	/	-5.81	/	54	/	AVG
2399	63.67	-5.84	57.83	74	-16.17	peak
2399	47.52	-5.84	41.68	54	-12.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.08	-5.81	51.27	74	-22.73	peak
2390	/	-5.81	/	54	/	AVG
2399	60.54	-5.84	54.70	74	-19.30	peak
2399	47.64	-5.84	41.80	54	-12.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.30	-5.65	51.65	74	-22.35	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.20	-5.65	50.55	74	-23.45	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.91	-5.81	53.10	74	-20.90	peak
2390	/	-5.81	/	54	/	AVG
2399	63.20	-5.84	57.36	74	-16.64	peak
2399	46.51	-5.84	40.67	54	-13.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.80	-5.81	52.99	74	-21.01	peak
2390	/	-5.81	/	54	/	AVG
2399	60.26	-5.84	54.42	74	-19.58	peak
2399	45.25	-5.84	39.41	54	-14.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.13	-5.65	52.48	74	-21.52	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.82	-5.65	50.17	74	-23.83	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.24	-5.81	50.43	74	-23.57	peak
2390	/	-5.81	/	54	/	AVG
2399	63.96	-5.84	58.12	74	-15.88	peak
2399	48.79	-5.84	42.95	54	-11.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.97	-5.81	50.16	74	-23.84	peak
2390	/	-5.81	/	54	/	AVG
2399	60.52	-5.84	54.68	74	-19.32	peak
2399	46.58	-5.84	40.74	54	-13.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.01	-5.65	50.36	74	-23.64	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.74	-5.65	51.09	74	-22.91	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.93	-5.81	52.12	74	-21.88	peak
2390	/	-5.81	/	54	/	AVG
2399	63.64	-5.84	57.80	74	-16.20	peak
2399	46.26	-5.84	40.42	54	-13.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.58	-5.81	51.77	74	-22.23	peak
2390	/	-5.81	/	54	/	AVG
2399	61.73	-5.84	55.89	74	-18.11	peak
2399	45.37	-5.84	39.53	54	-14.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.66	-5.65	52.01	74	-21.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.82	-5.65	50.17	74	-23.83	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

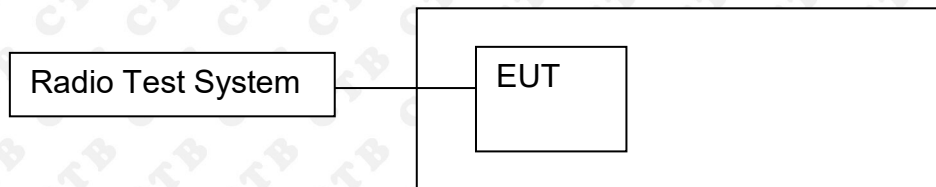

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100kHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:

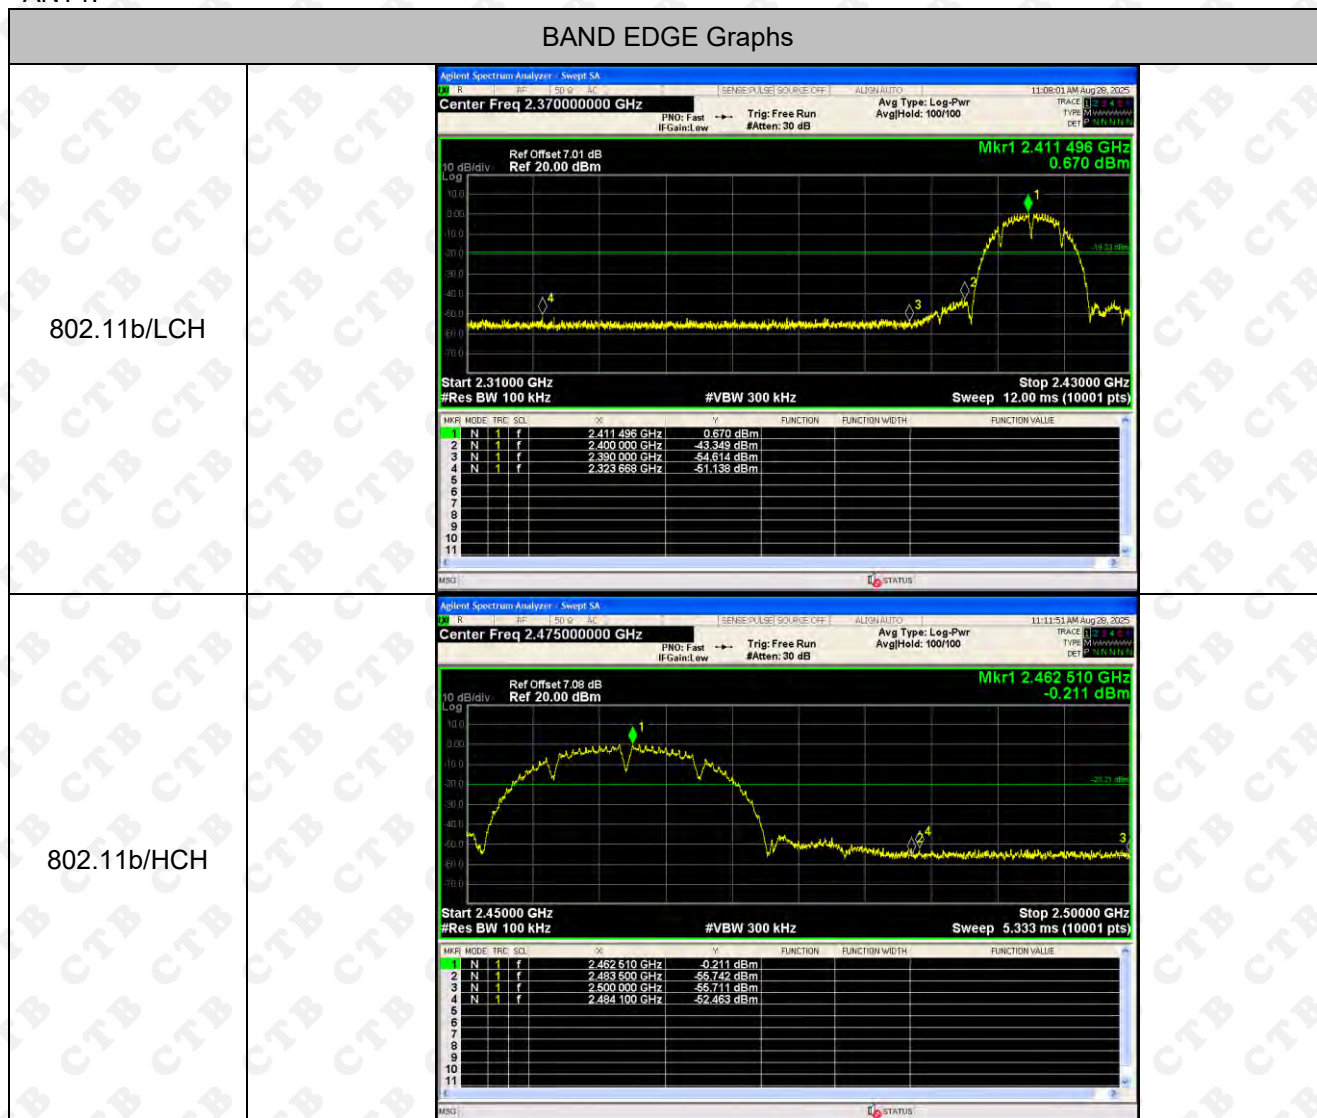


BAND EDGE Graphs

802.11g/LCH

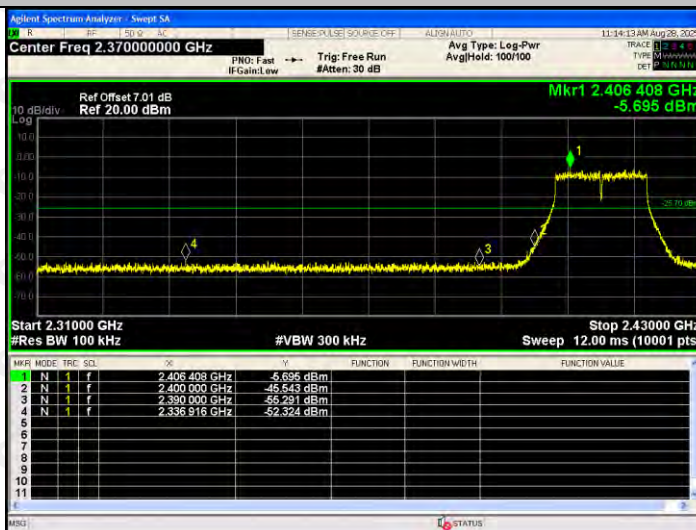


802.11g/HCH

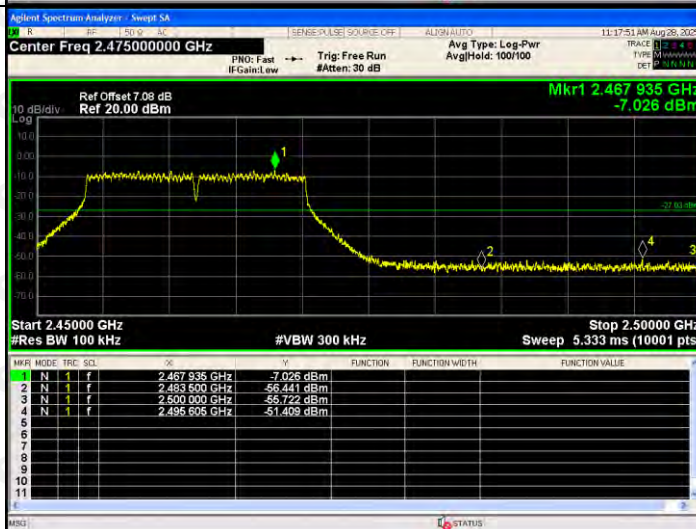

BAND EDGE Graphs

802.11n(HT20)/LCH

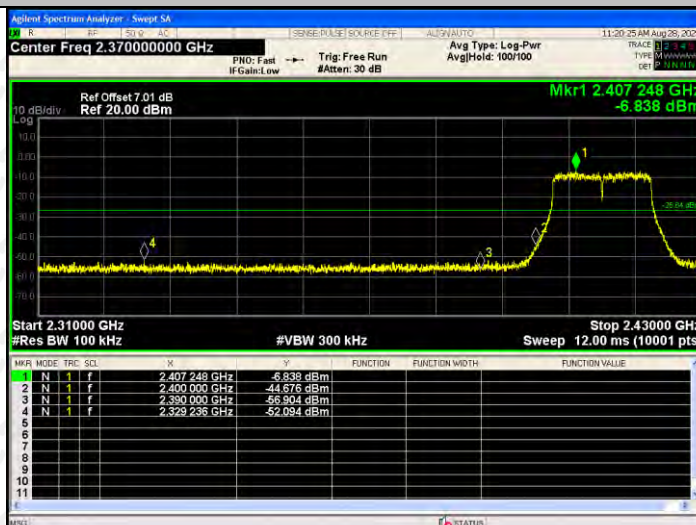


802.11n(HT20)/HCH



BAND EDGE Graphs

802.11n(HT40)/LCH

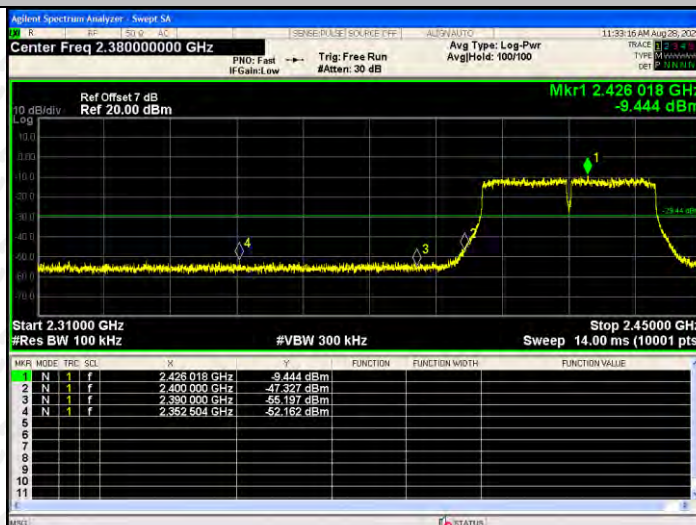


802.11n(HT40)/HCH




BAND EDGE Graphs

802.11ax(HE20)
/LCH

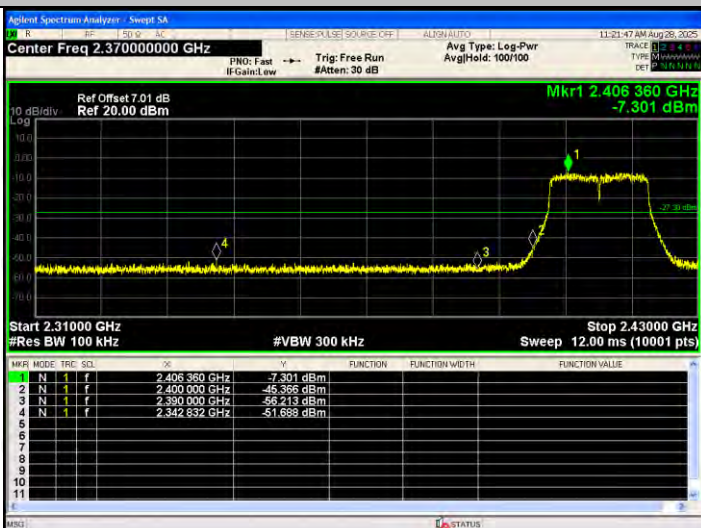


802.11ax(HE20)
/HCH

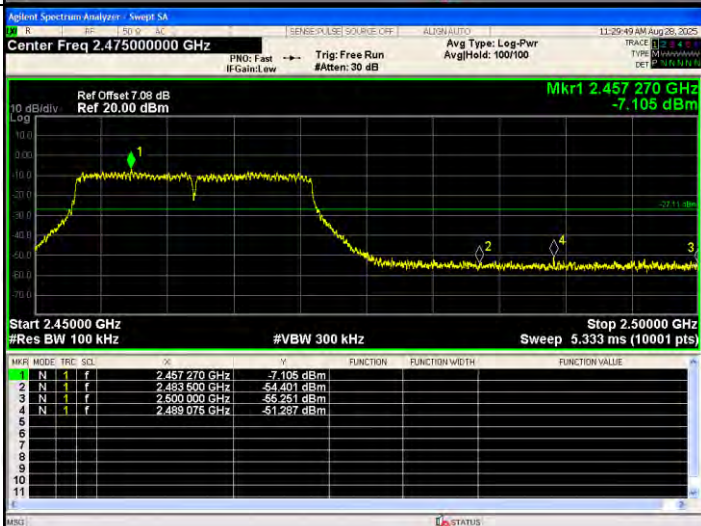


BAND EDGE Graphs

802.11ax(HE40
)/LCH

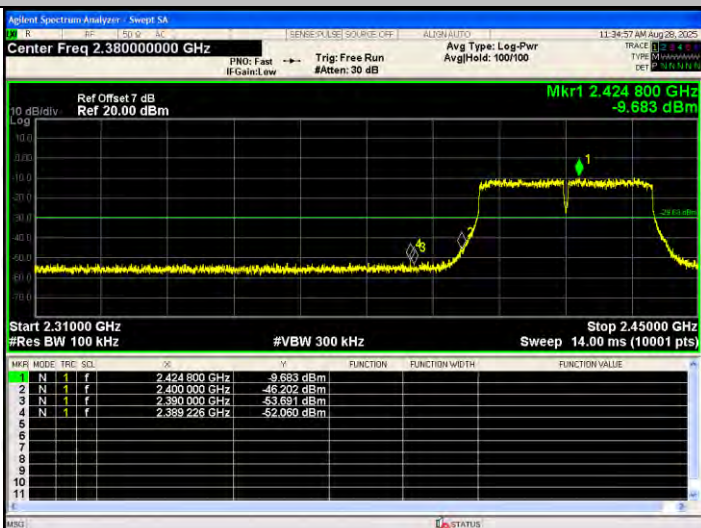


802.11ax(HE40
)/HCH

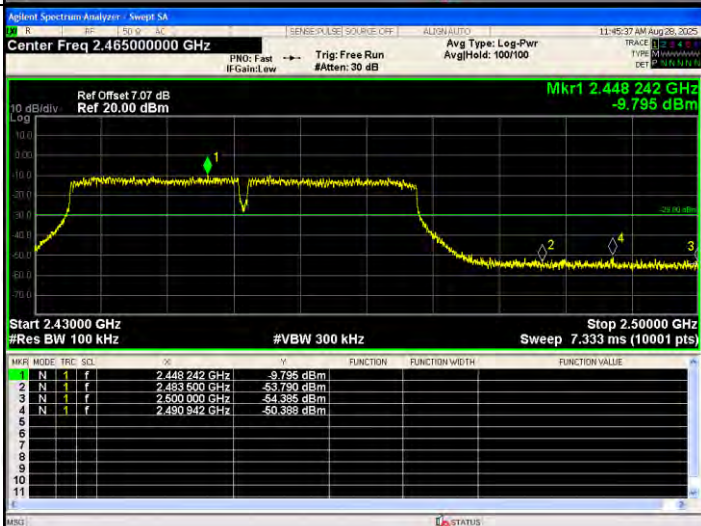


RF Conducted Spurious Emissions Graphs


802.11b/LCH

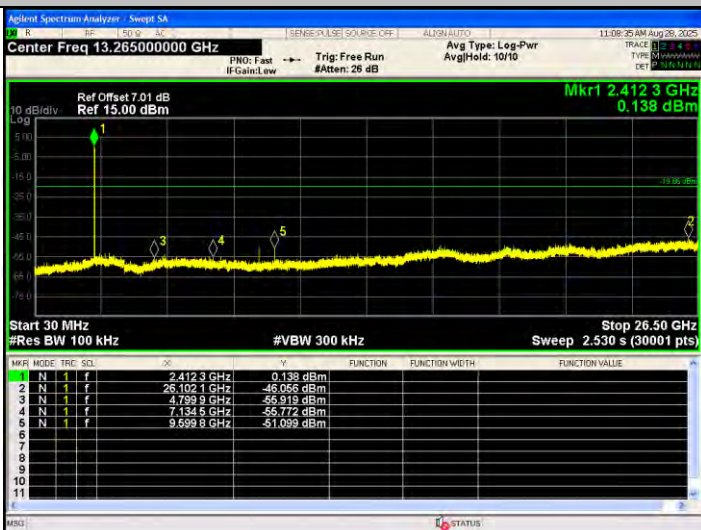

802.11b/MCH

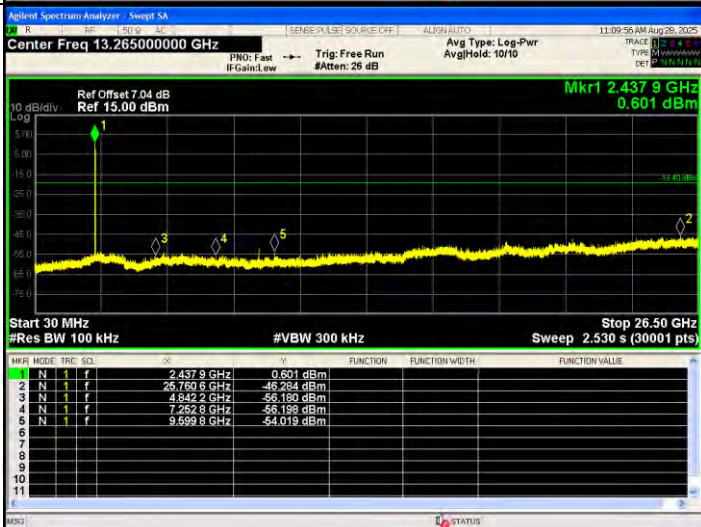


802.11b/HCH

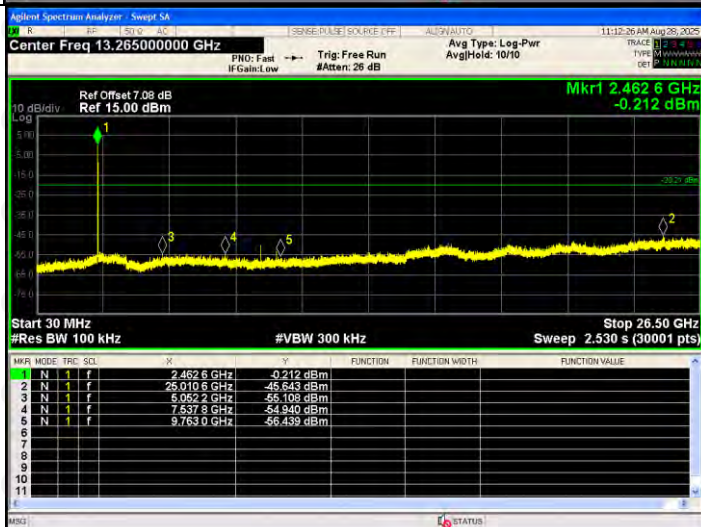


RF Conducted Spurious Emissions Graphs


802.11g/LCH

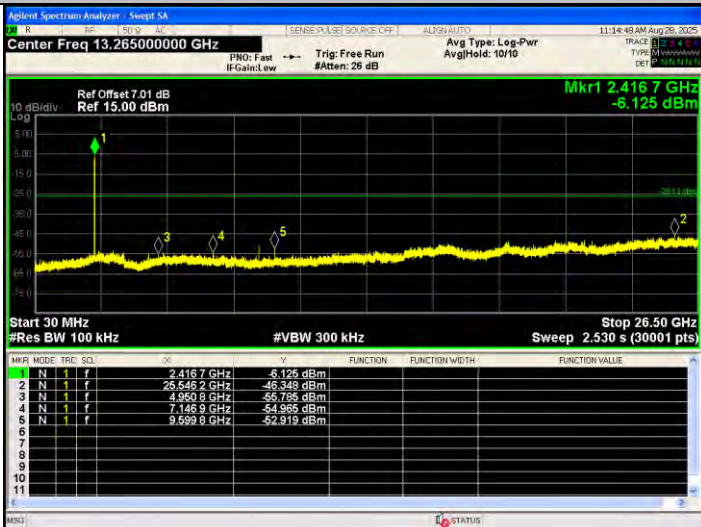


802.11g/MCH

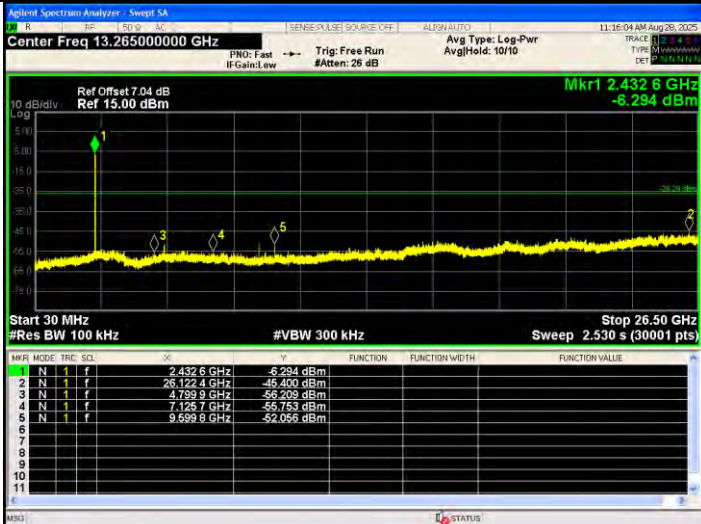

802.11g/HCH

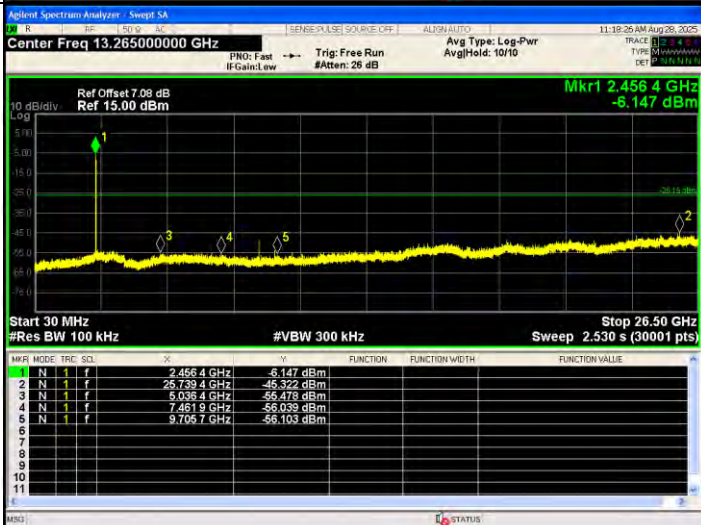


RF Conducted Spurious Emissions Graphs

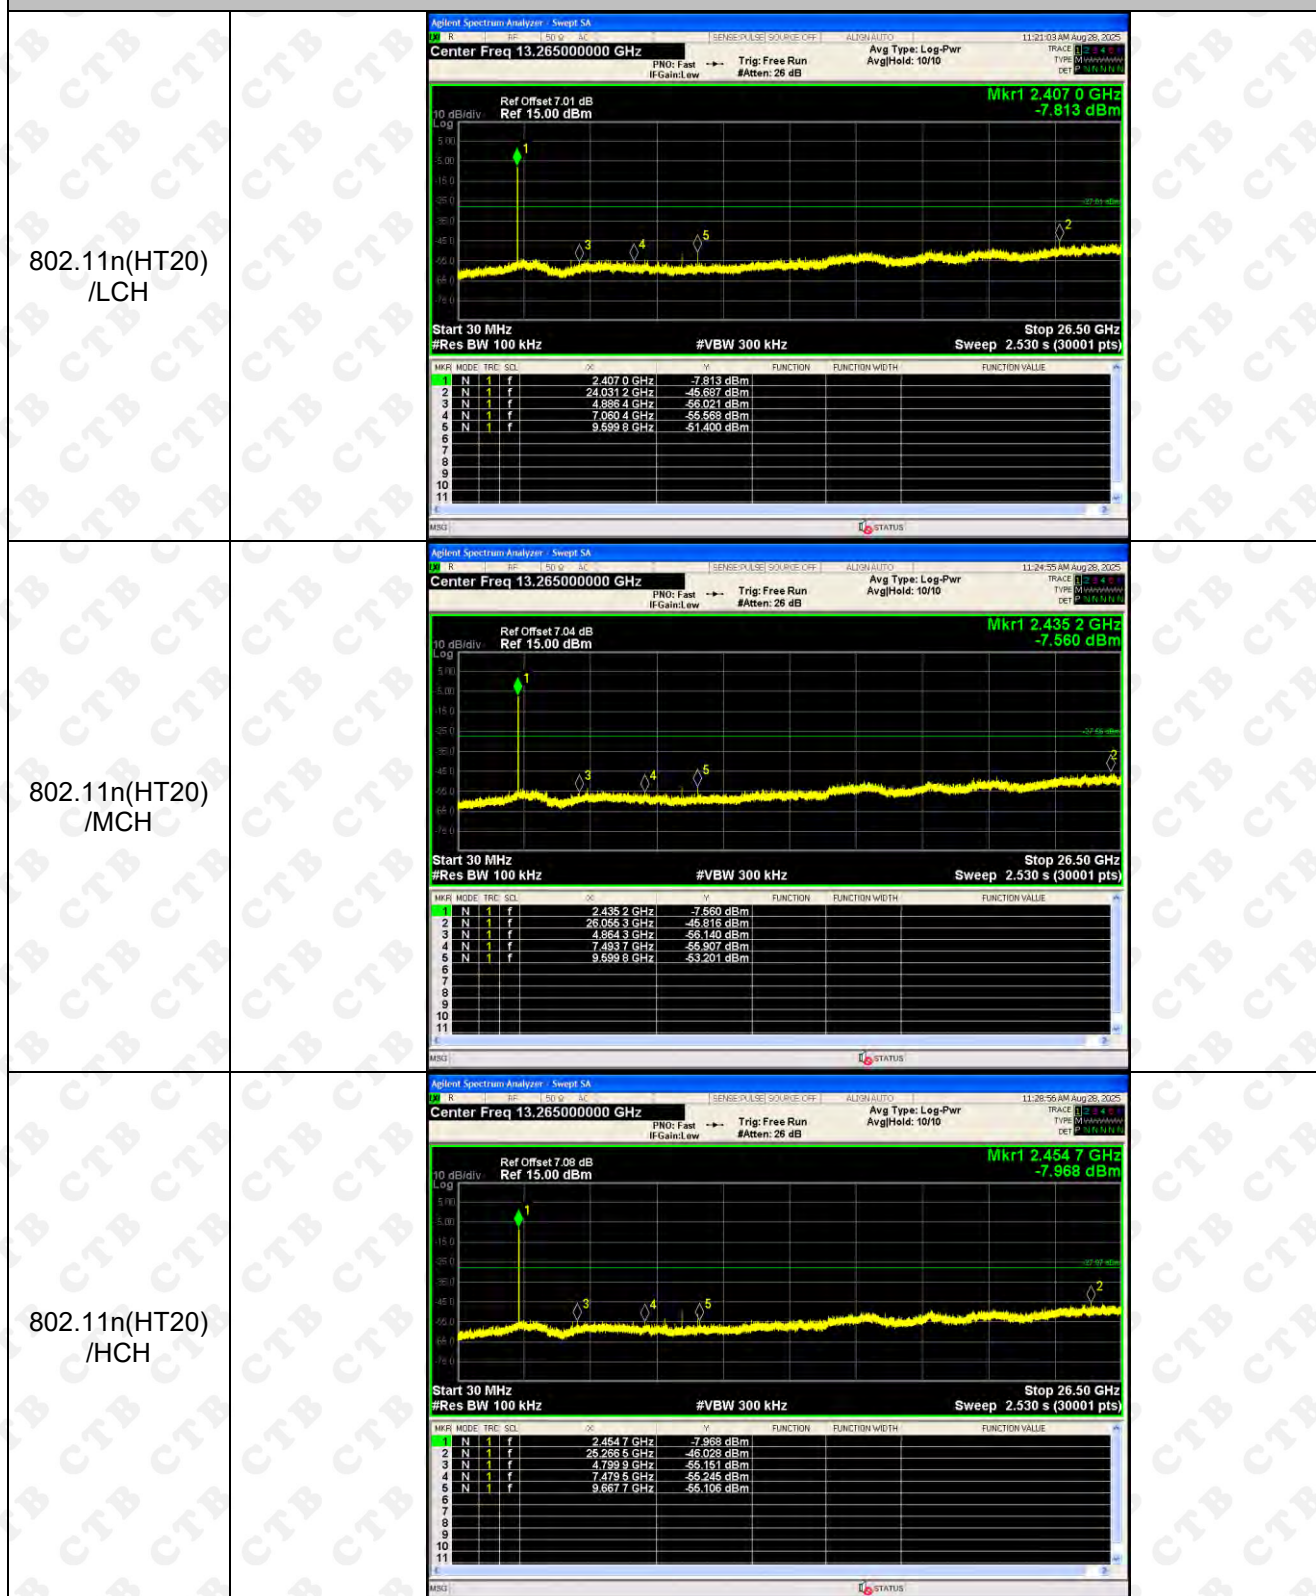


802.11n(HT40) /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7 dB Ref 15.00 dBm Mkr1 2.436 1 GHz -10.212 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.436 1 GHz</td><td>-10.212 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.770 3 GHz</td><td>-49.906 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.799 9 GHz</td><td>-54.826 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.142 5 GHz</td><td>-55.983 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.599 9 GHz</td><td>-53.807 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 1 GHz	-10.212 dBm				2	N	1	f	26.770 3 GHz	-49.906 dBm				3	N	1	f	4.799 9 GHz	-54.826 dBm				4	N	1	f	7.142 5 GHz	-55.983 dBm				5	N	1	f	9.599 9 GHz	-53.807 dBm			
MKR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.436 1 GHz	-10.212 dBm																																																		
2	N	1	f	26.770 3 GHz	-49.906 dBm																																																		
3	N	1	f	4.799 9 GHz	-54.826 dBm																																																		
4	N	1	f	7.142 5 GHz	-55.983 dBm																																																		
5	N	1	f	9.599 9 GHz	-53.807 dBm																																																		
802.11n(HT40) /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.451 1 GHz -10.564 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.451 1 GHz</td><td>-10.564 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.050 9 GHz</td><td>-49.695 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.997 5 GHz</td><td>-55.007 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.338 6 GHz</td><td>-56.246 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.599 9 GHz</td><td>-52.868 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.451 1 GHz	-10.564 dBm				2	N	1	f	26.050 9 GHz	-49.695 dBm				3	N	1	f	4.997 5 GHz	-55.007 dBm				4	N	1	f	7.338 6 GHz	-56.246 dBm				5	N	1	f	9.599 9 GHz	-52.868 dBm			
MKR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.451 1 GHz	-10.564 dBm																																																		
2	N	1	f	26.050 9 GHz	-49.695 dBm																																																		
3	N	1	f	4.997 5 GHz	-55.007 dBm																																																		
4	N	1	f	7.338 6 GHz	-56.246 dBm																																																		
5	N	1	f	9.599 9 GHz	-52.868 dBm																																																		
802.1n(HT40) /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.450 2 GHz -10.997 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.450 2 GHz</td><td>-10.997 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.670 6 GHz</td><td>-49.682 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.799 9 GHz</td><td>-54.189 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.491 9 GHz</td><td>-56.111 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.774 5 GHz</td><td>-56.475 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.450 2 GHz	-10.997 dBm				2	N	1	f	26.670 6 GHz	-49.682 dBm				3	N	1	f	4.799 9 GHz	-54.189 dBm				4	N	1	f	7.491 9 GHz	-56.111 dBm				5	N	1	f	9.774 5 GHz	-56.475 dBm			
MKR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.450 2 GHz	-10.997 dBm																																																		
2	N	1	f	26.670 6 GHz	-49.682 dBm																																																		
3	N	1	f	4.799 9 GHz	-54.189 dBm																																																		
4	N	1	f	7.491 9 GHz	-56.111 dBm																																																		
5	N	1	f	9.774 5 GHz	-56.475 dBm																																																		

RF Conducted Spurious Emissions Graphs


802.11ax(HE20)
/LCH

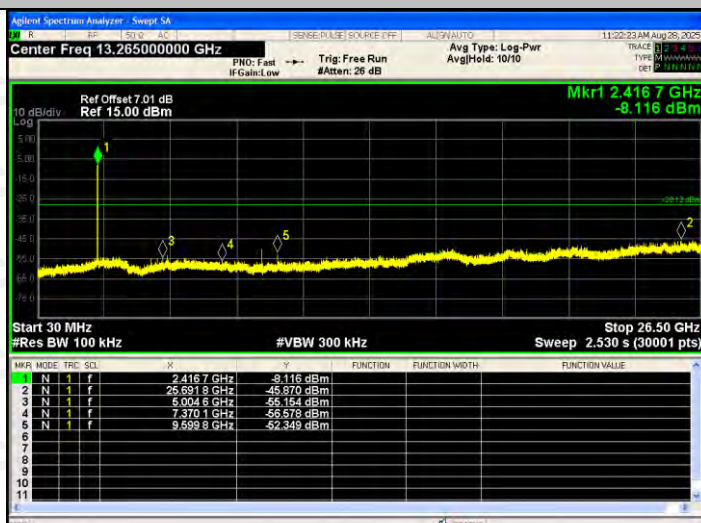

802.11ax(HE20)
/MCH

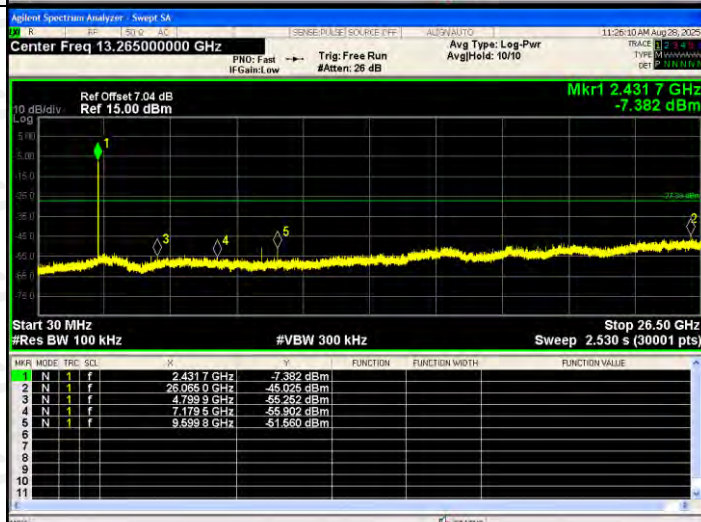


802.11ax(HE20)
/HCH

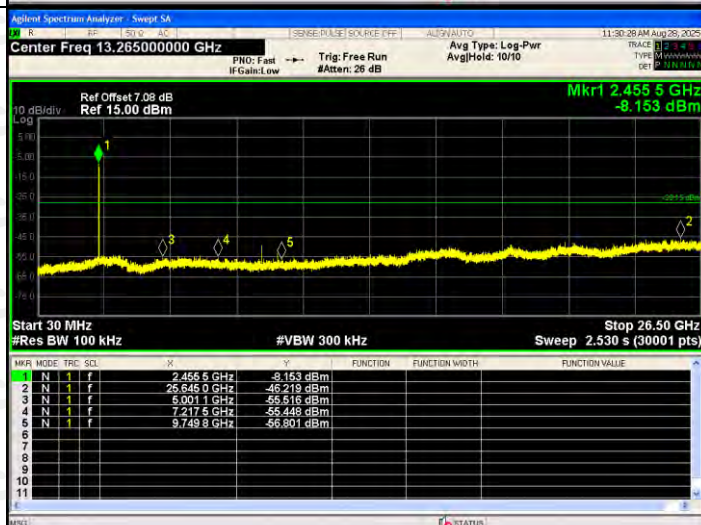


RF Conducted Spurious Emissions Graphs


802.11ax(HE40)
/LCH

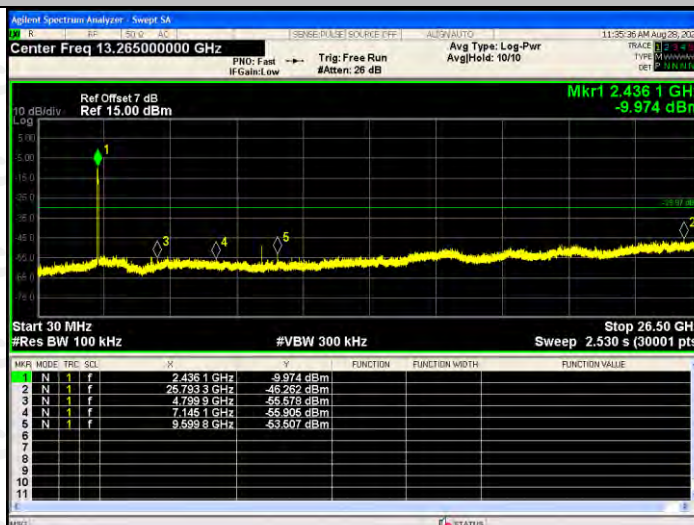


802.11ax(HE40)
/MCH

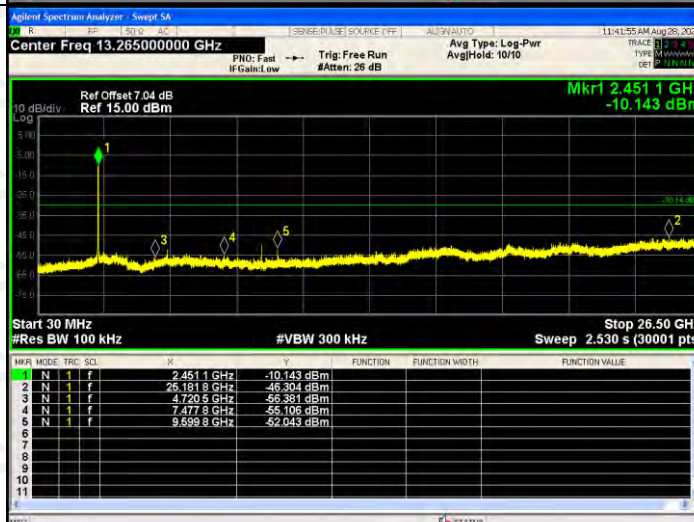

802.11ax(HE40)
/HCH

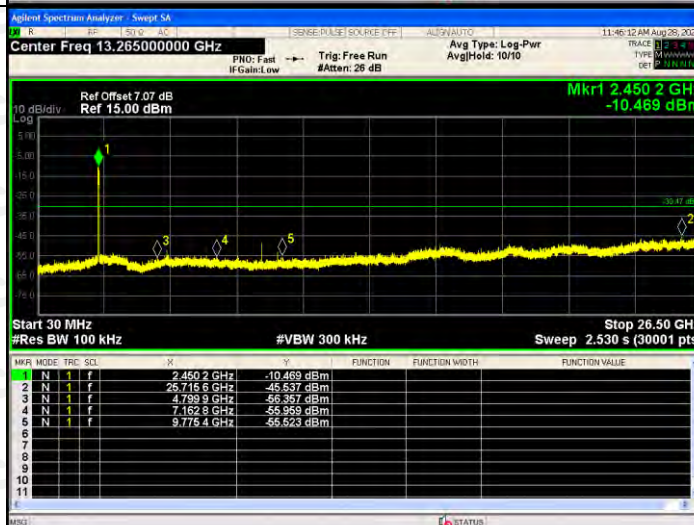


ANT2:

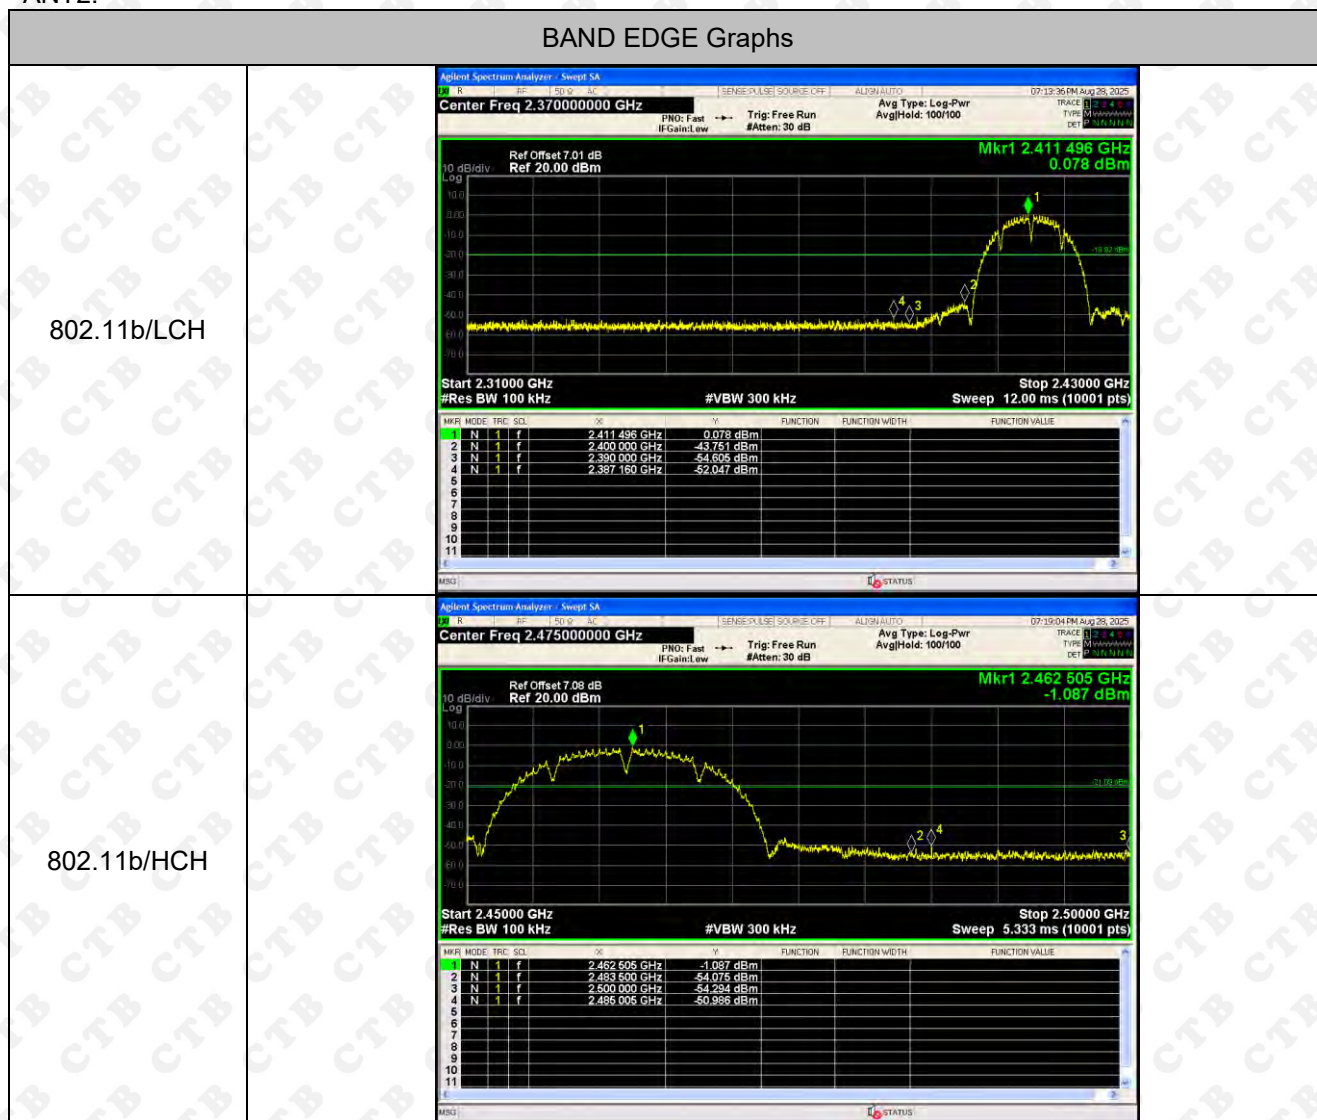


BAND EDGE Graphs

802.11g/LCH

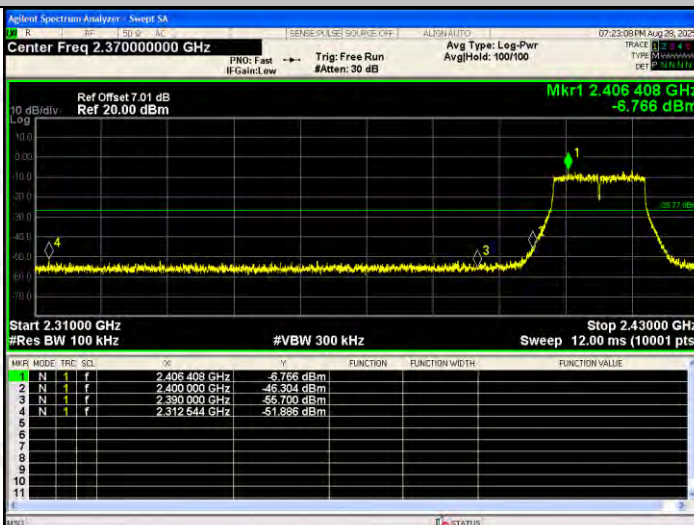


802.11g/HCH

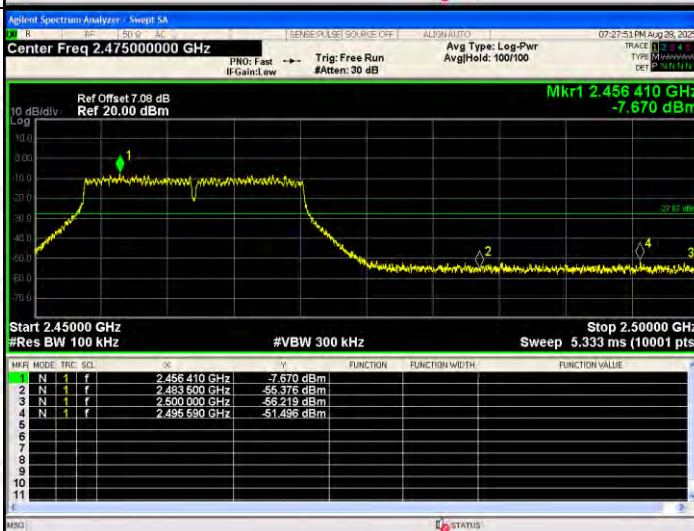


BAND EDGE Graphs

802.11n(HT20)
/LCH

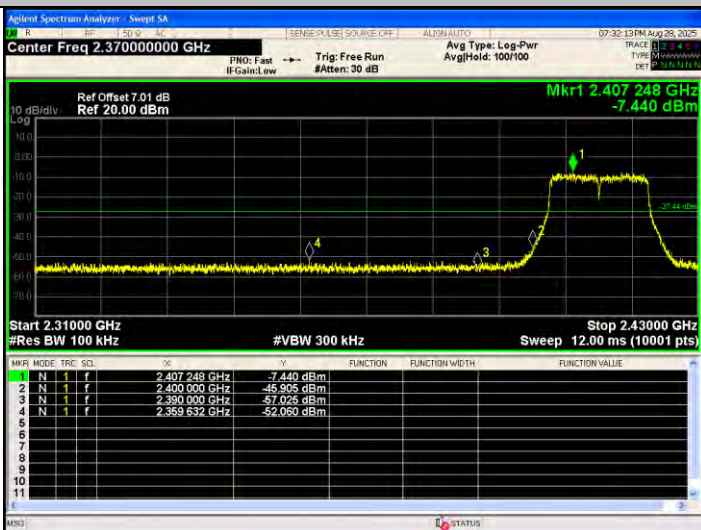


802.11n(HT20)
/HCH

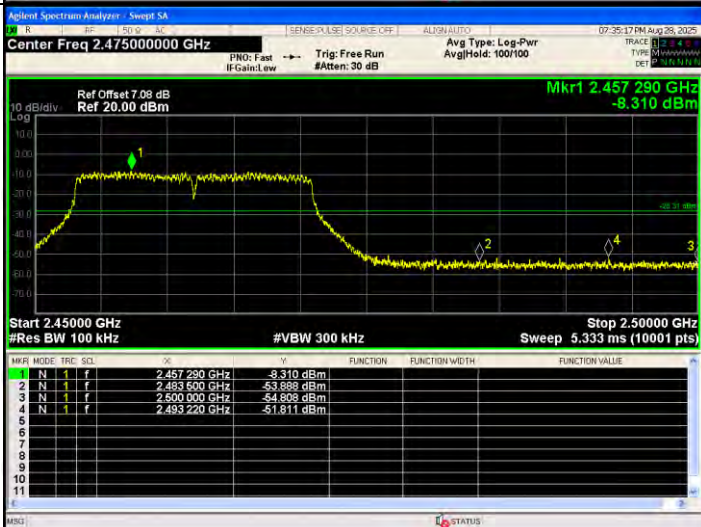


BAND EDGE Graphs

802.11n(HT40)
/LCH

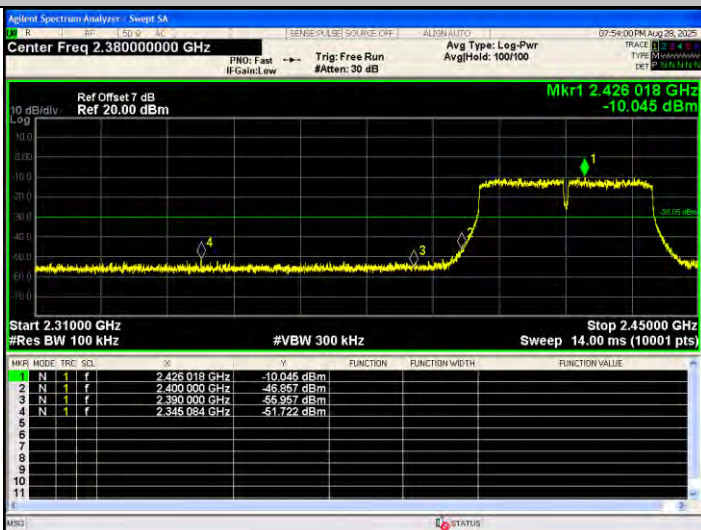


802.11n(HT40)
/HCH

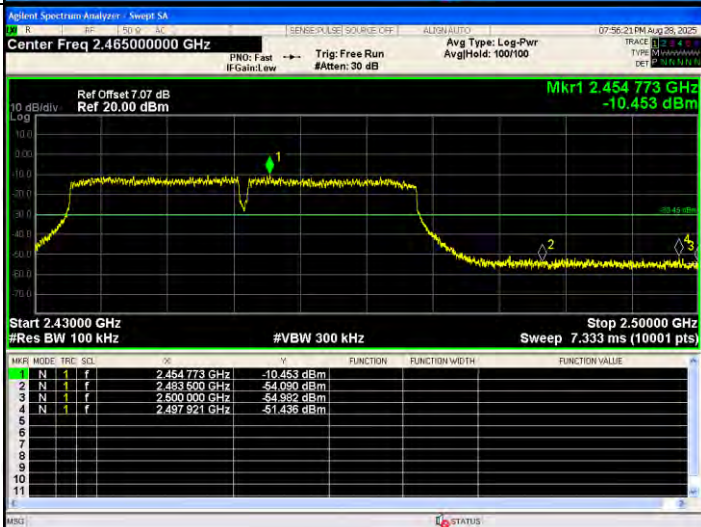


BAND EDGE Graphs

802.11ax(HE20)
/LCH

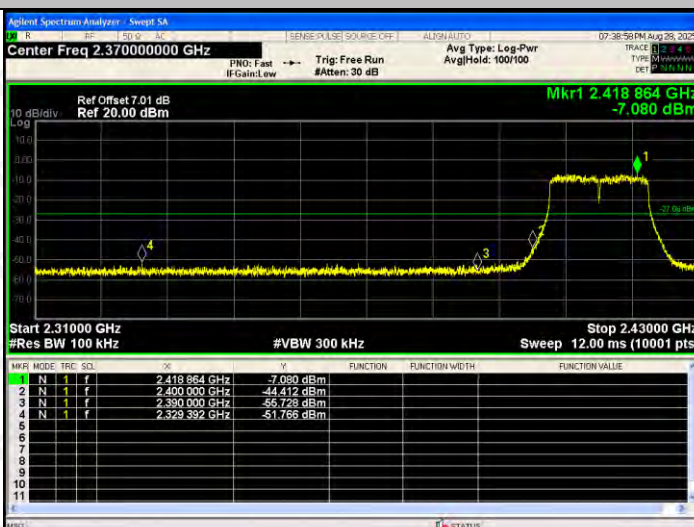


802.11ax(HE20)
/HCH

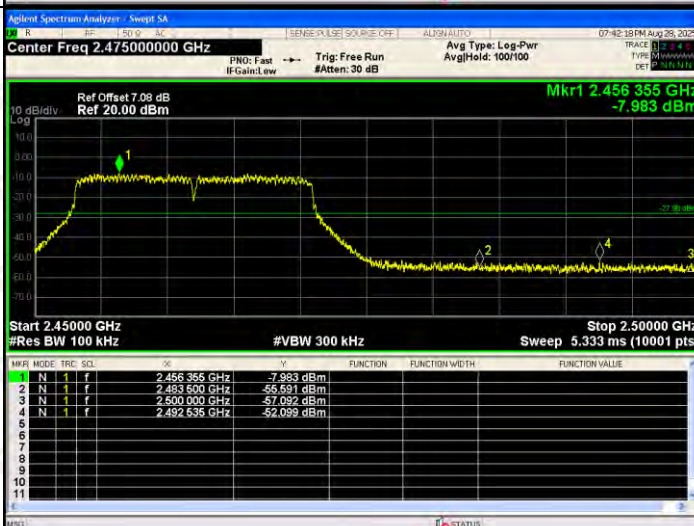


BAND EDGE Graphs

802.11ax(HE40)
/LCH

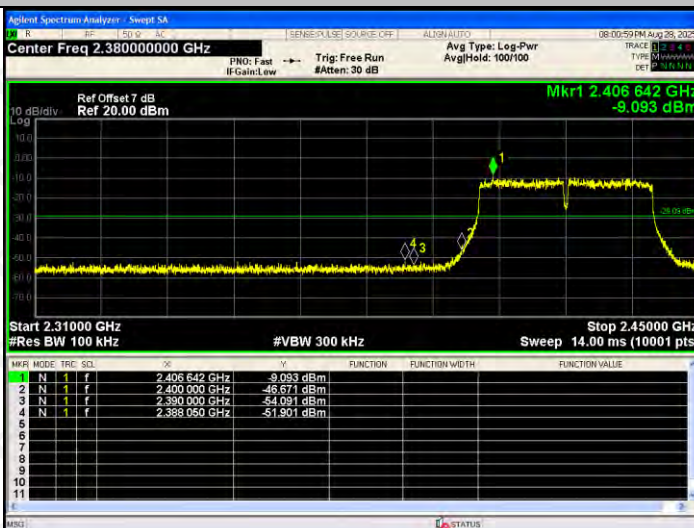


802.11ax(HE40)
/HCH

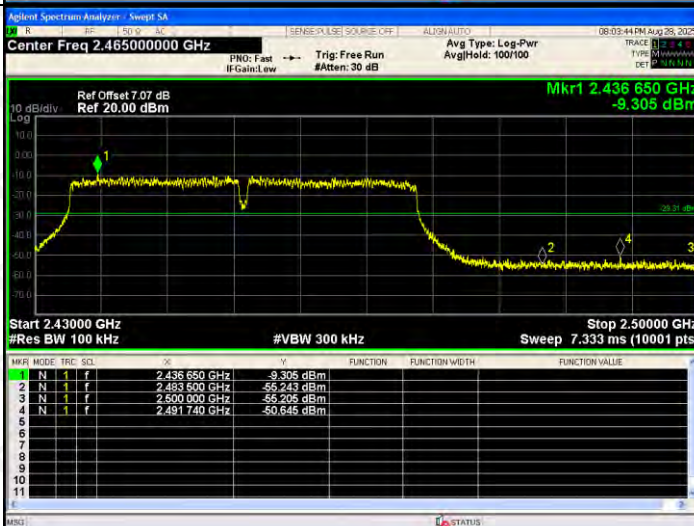


RF Conducted Spurious Emissions Graphs


802.11b/LCH

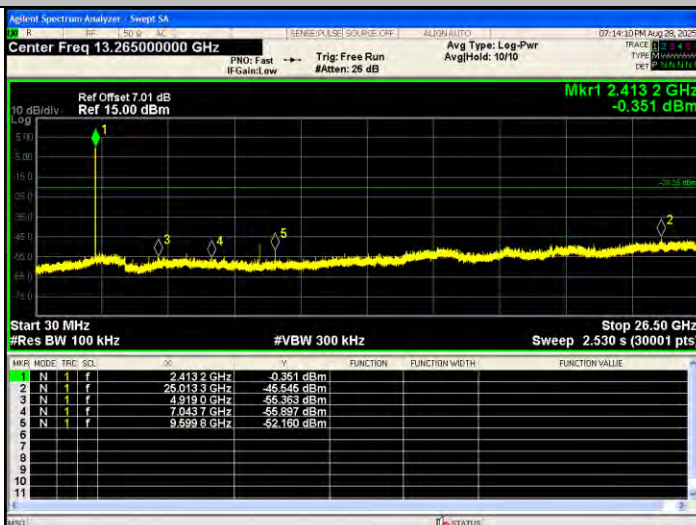

802.11b/MCH

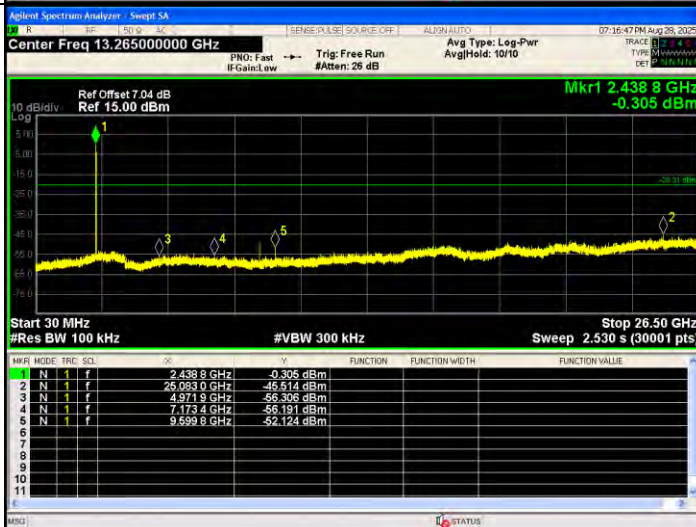


802.11b/HCH

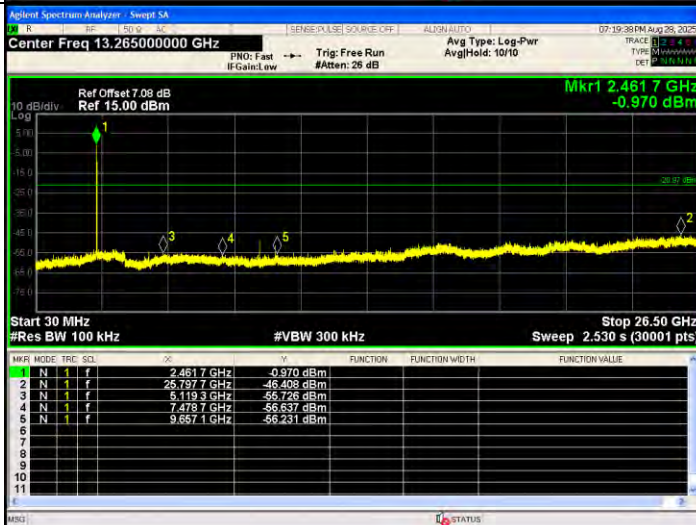


RF Conducted Spurious Emissions Graphs


802.11g/LCH

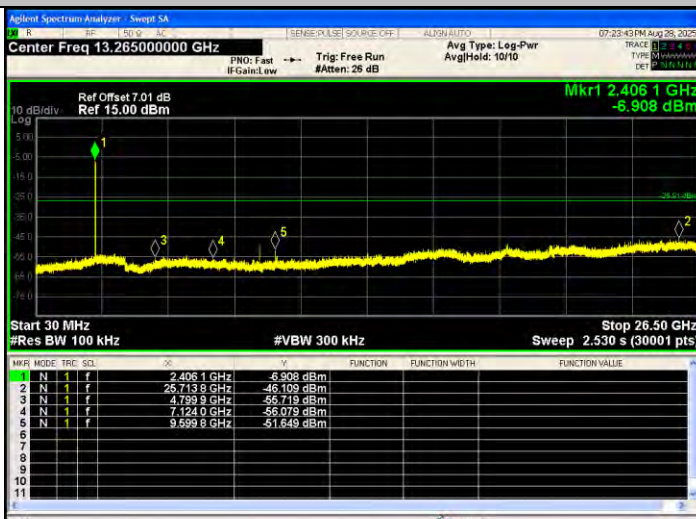




802.11g/MCH

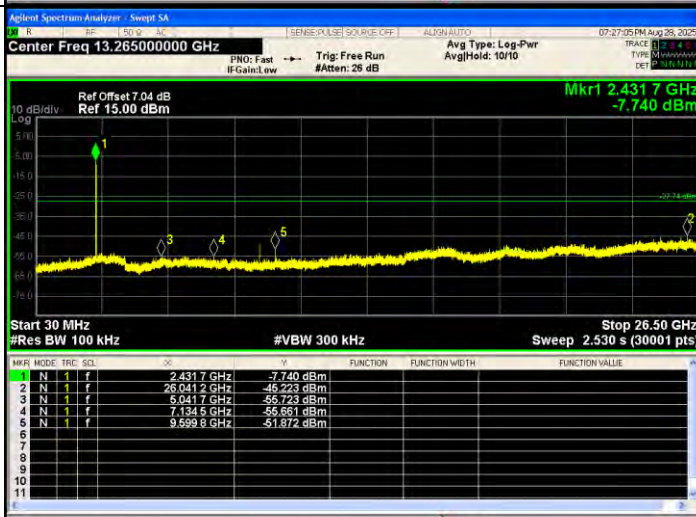


802.11g/HCH

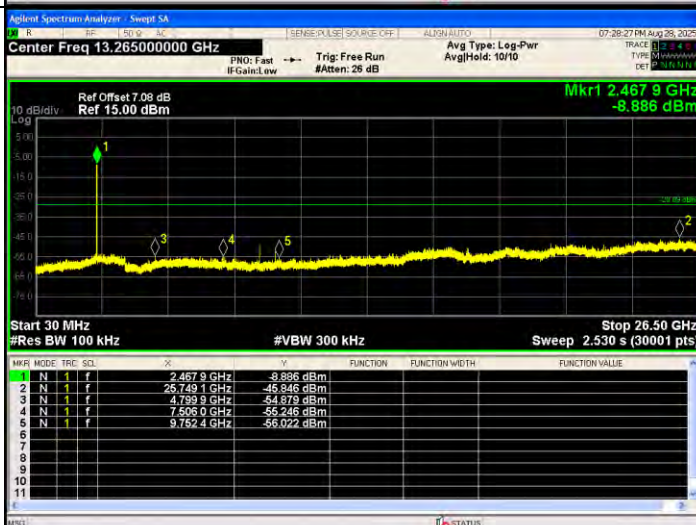


RF Conducted Spurious Emissions Graphs

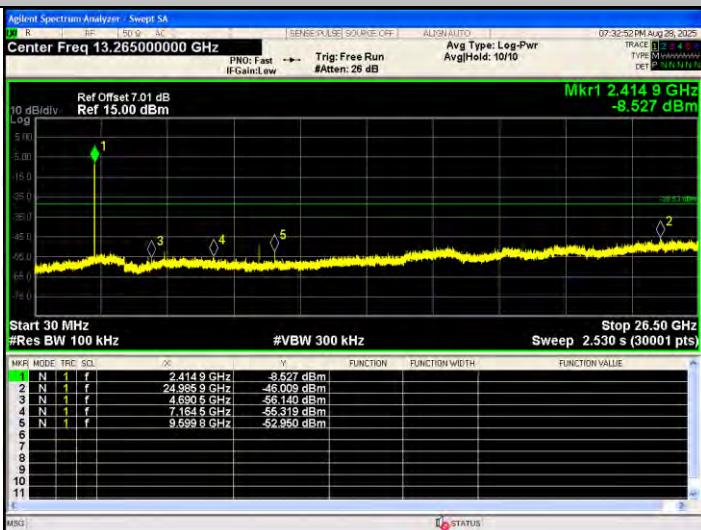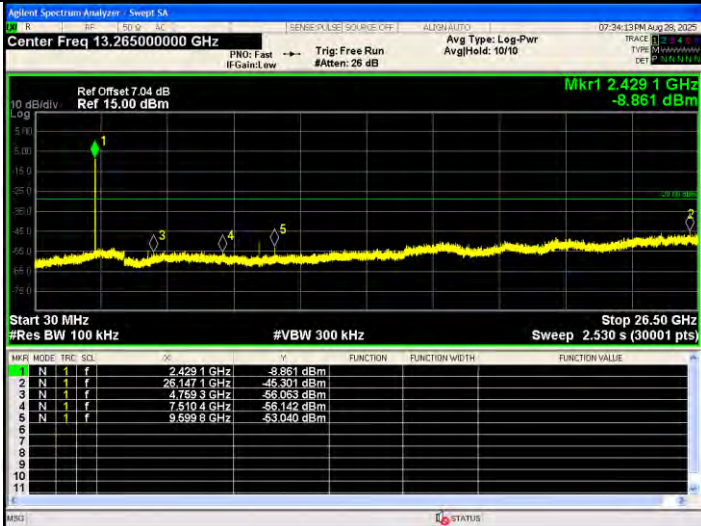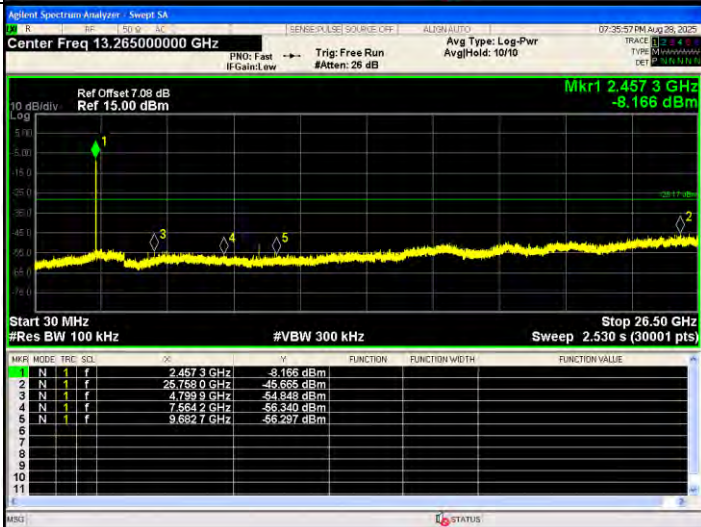802.11n(HT20)
/LCH

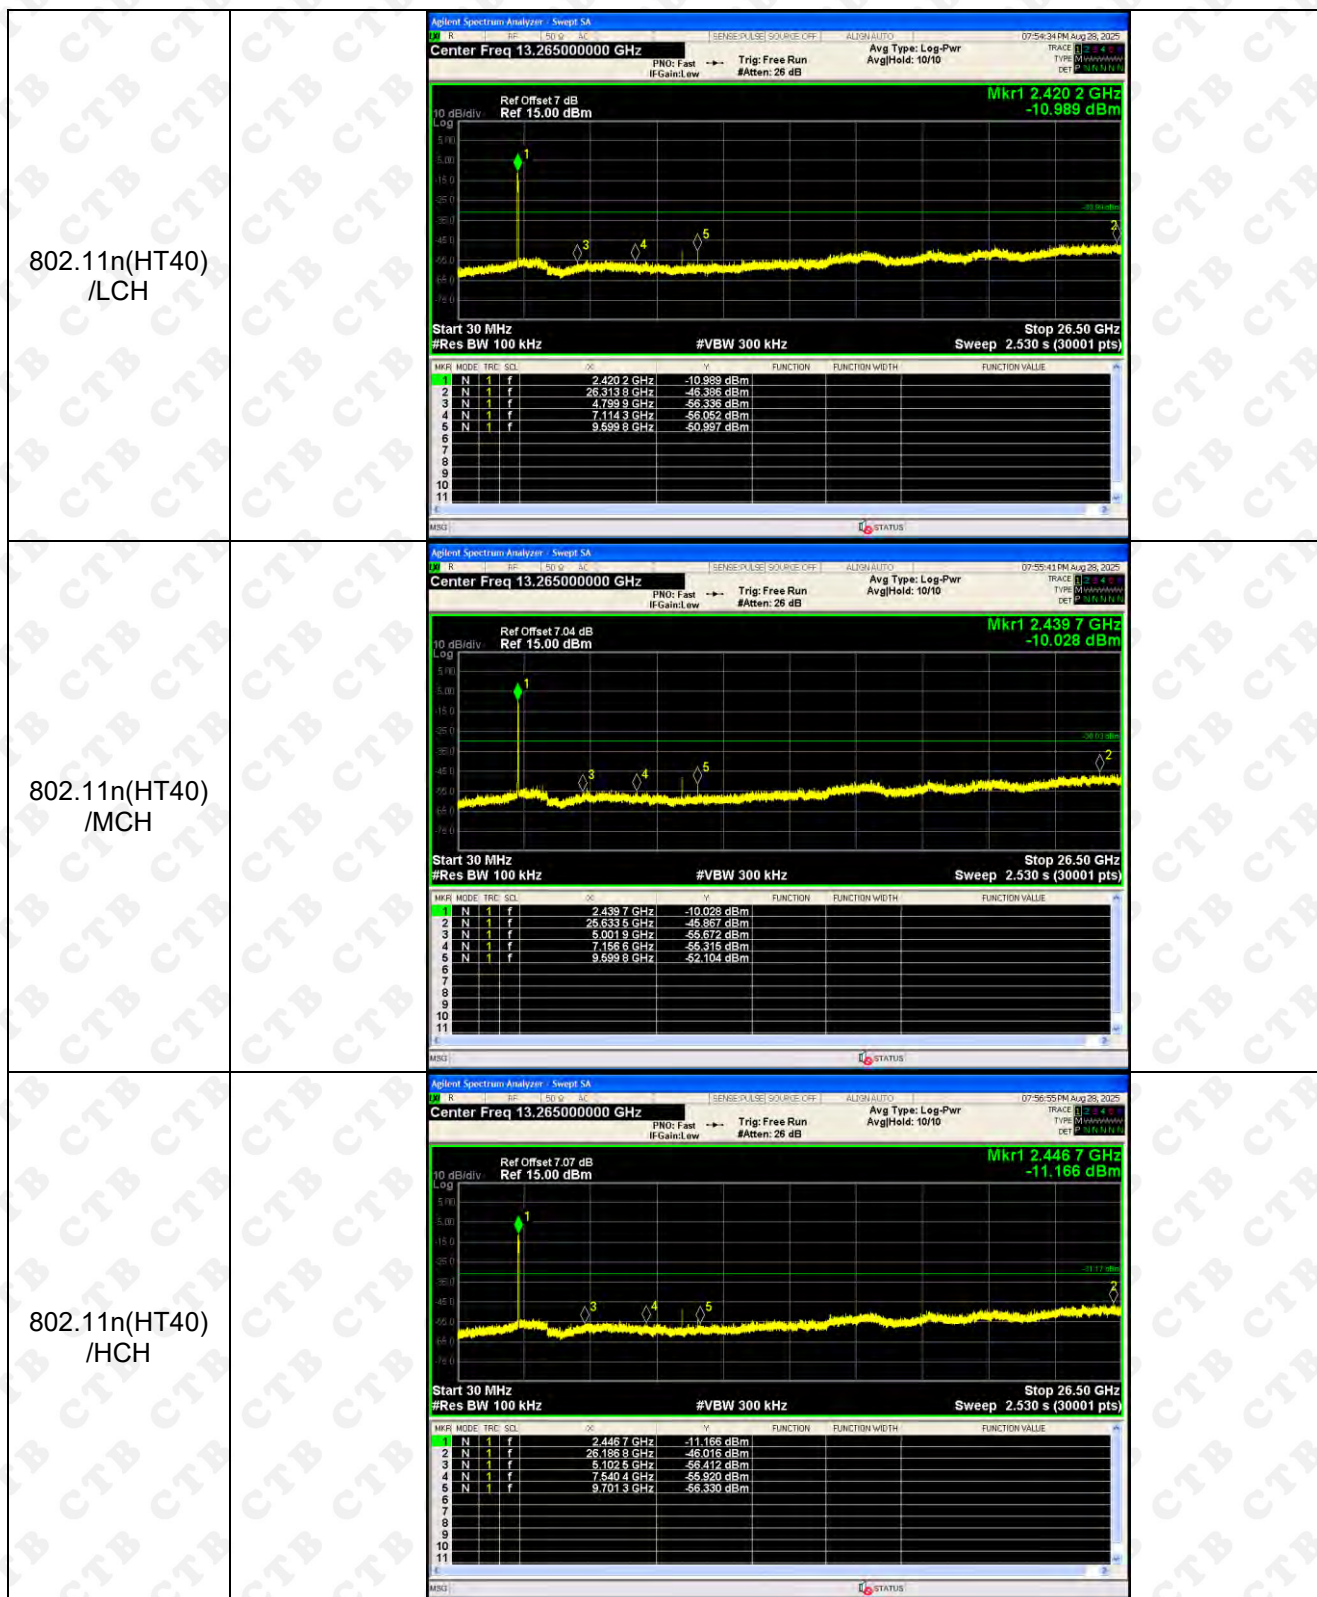802.11n(HT20)
/MCH

802.11n(HT20)
/HCH


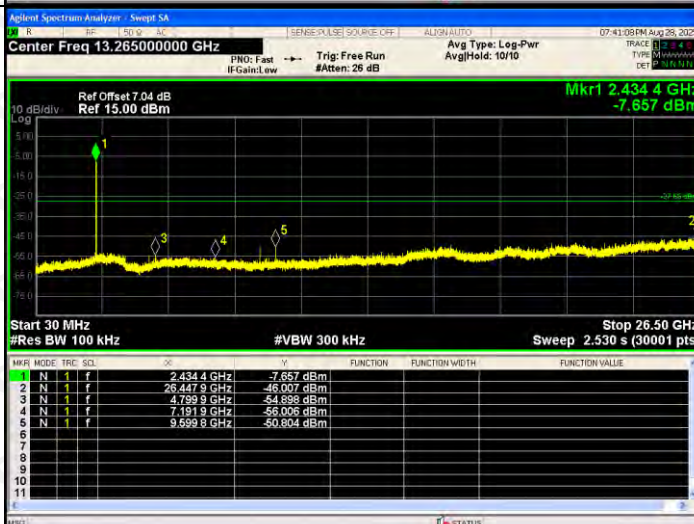


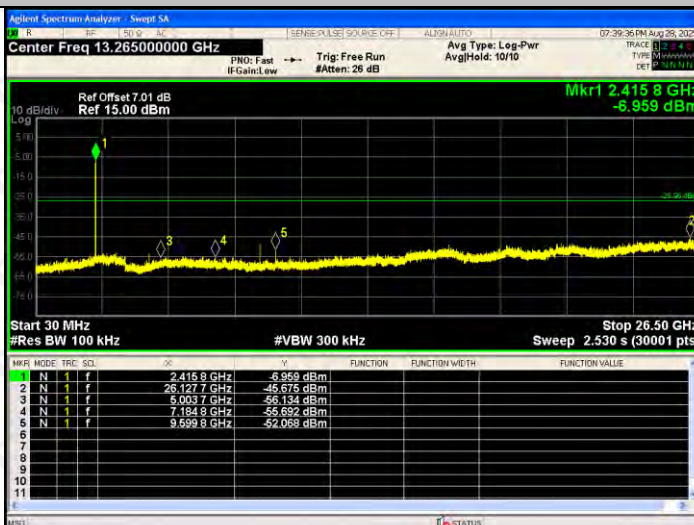RF Conducted Spurious Emissions Graphs


802.11ax(HE20)
/LCH



802.11ax(HE20)
/MCH




802.11ax(HE20)
/HCH

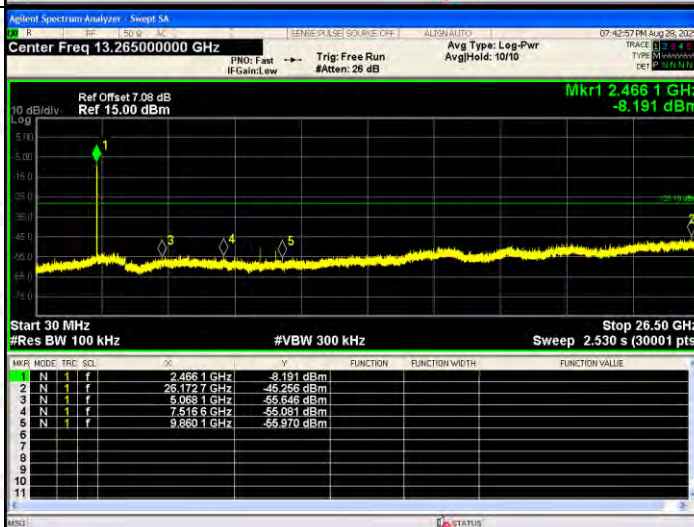


RF Conducted Spurious Emissions Graphs


802.11ax(HE40)
/LCH

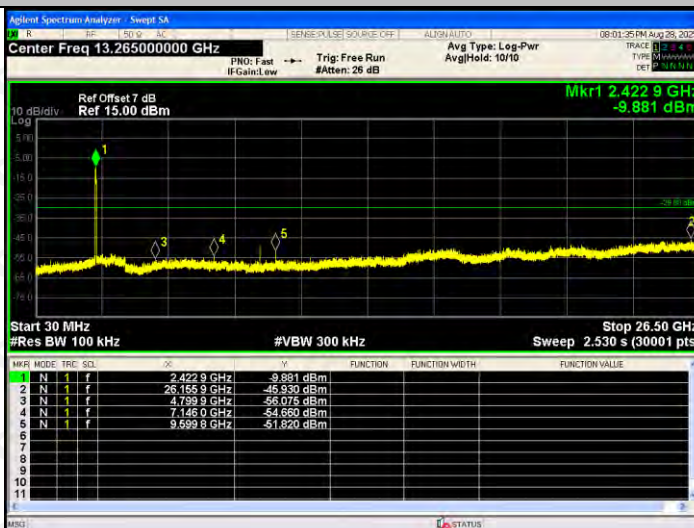

802.11ax(HE40)
/MCH

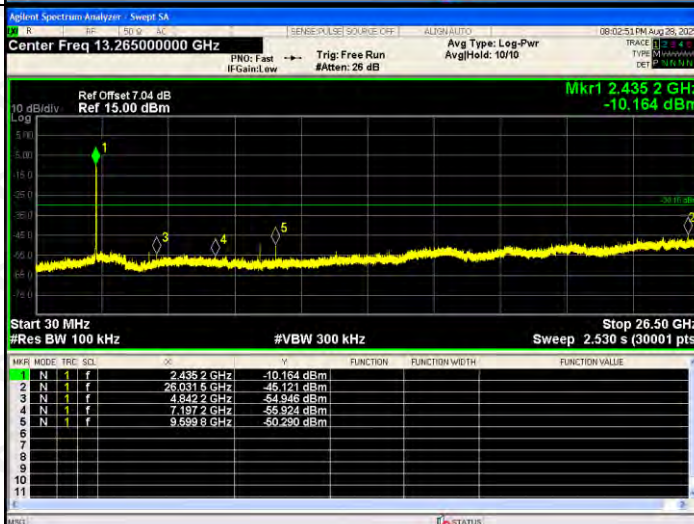


802.11ax(HE40)
/HCH

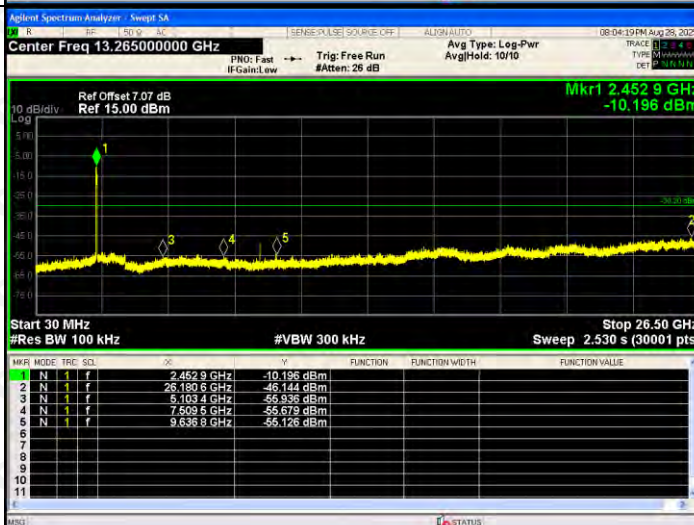

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

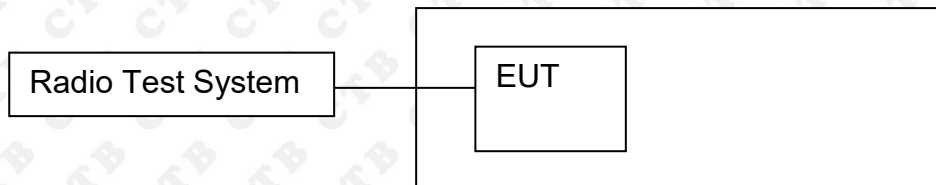

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	13.994	13.449	/	30
	MCH	14.157	13.485	/	30
	HCH	13.187	12.305	/	30
802.11g	LCH	13.931	13.087	/	30
	MCH	14.135	12.886	/	30
	HCH	13.224	12.183	/	30
802.11n(HT20)	LCH	13.501	12.821	16.185	30
	MCH	13.606	12.395	16.053	30
	HCH	12.827	12.183	15.527	30
802.11n(HT40)	LCH	13.756	13.518	16.649	30
	MCH	13.780	13.234	16.526	30
	HCH	13.374	12.873	16.141	30
802.11ax(HT20)	LCH	13.478	13.908	16.709	30
	MCH	13.544	13.423	16.494	30
	HCH	12.778	12.663	15.731	30
802.11ax(HT40)	LCH	13.739	13.466	16.615	30
	MCH	13.634	13.329	16.494	30
	HCH	13.383	12.938	16.176	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

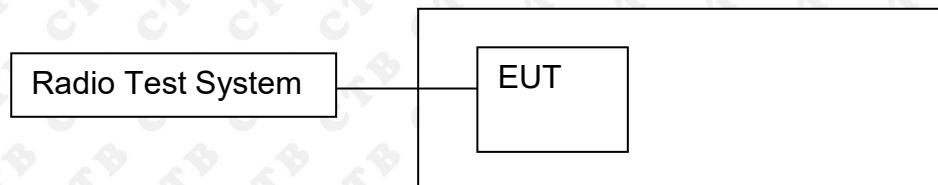

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.122	500	PASS
	MCH	10.129	500	PASS
	HCH	10.118	500	PASS
802.11g	LCH	16.481	500	PASS
	MCH	16.535	500	PASS
	HCH	16.511	500	PASS
802.11n(HT20)	LCH	17.770	500	PASS
	MCH	17.709	500	PASS
	HCH	17.758	500	PASS
802.11n(HT40)	LCH	36.482	500	PASS
	MCH	36.443	500	PASS
	HCH	36.443	500	PASS
802.11ax(HE20)	LCH	17.730	500	PASS
	MCH	17.753	500	PASS
	HCH	17.726	500	PASS
802.11ax(HE40)	LCH	36.478	500	PASS
	MCH	36.455	500	PASS
	HCH	36.442	500	PASS




ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.110	500	PASS
	MCH	10.136	500	PASS
	HCH	10.096	500	PASS
802.11g	LCH	16.502	500	PASS
	MCH	16.499	500	PASS
	HCH	16.516	500	PASS
802.11n(HT20)	LCH	17.728	500	PASS
	MCH	17.775	500	PASS
	HCH	17.702	500	PASS
802.11n(HT40)	LCH	36.440	500	PASS
	MCH	36.471	500	PASS
	HCH	36.425	500	PASS
802.11ax(HE20)	LCH	17.733	500	PASS
	MCH	17.753	500	PASS
	HCH	17.771	500	PASS
802.11ax(HE40)	LCH	36.423	500	PASS
	MCH	36.413	500	PASS
	HCH	36.094	500	PASS



ANT1:
Test Graph:

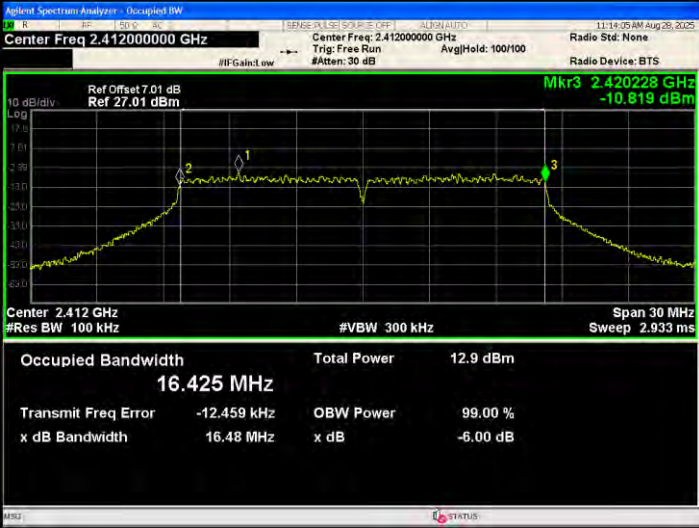


802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

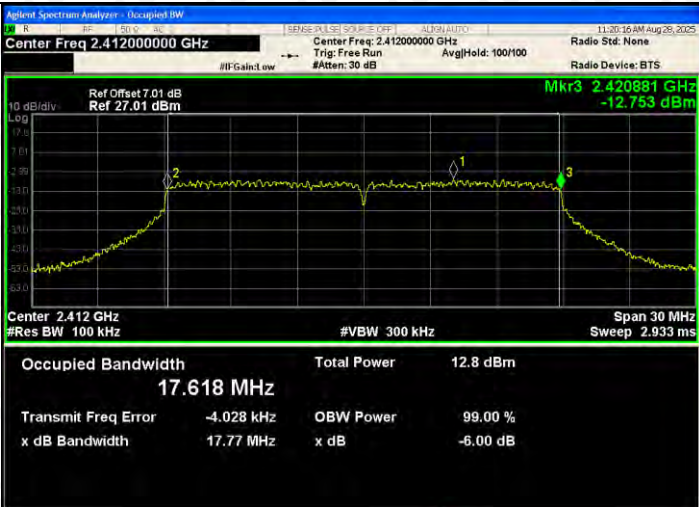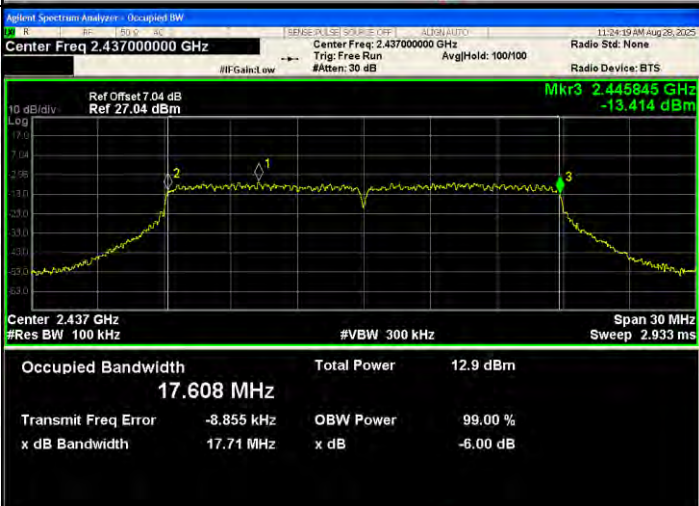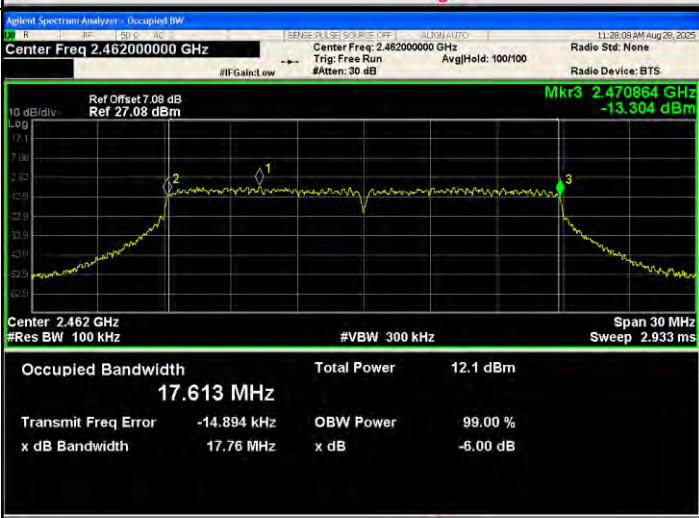802.11n(HT20) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420881 GHz -12.753 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.8 dBm</td></tr><tr><td>17.618 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-4.028 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>17.77 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.8 dBm	17.618 MHz			Transmit Freq Error	OBW Power	99.00 %	-4.028 kHz			x dB Bandwidth	x dB	-6.00 dB	17.77 MHz		
Occupied Bandwidth	Total Power	12.8 dBm																	
17.618 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-4.028 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
17.77 MHz																			
802.11n(HT20) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445845 GHz -13.414 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.9 dBm</td></tr><tr><td>17.608 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-8.855 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>17.71 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.9 dBm	17.608 MHz			Transmit Freq Error	OBW Power	99.00 %	-8.855 kHz			x dB Bandwidth	x dB	-6.00 dB	17.71 MHz		
Occupied Bandwidth	Total Power	12.9 dBm																	
17.608 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-8.855 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
17.71 MHz																			
802.11n(HT20) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.470864 GHz -13.304 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>12.1 dBm</td></tr><tr><td>17.613 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-14.894 kHz</td><td></td><td></td></tr><tr><td>x dB Bandwidth</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>17.76 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	12.1 dBm	17.613 MHz			Transmit Freq Error	OBW Power	99.00 %	-14.894 kHz			x dB Bandwidth	x dB	-6.00 dB	17.76 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
17.613 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-14.894 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
17.76 MHz																			

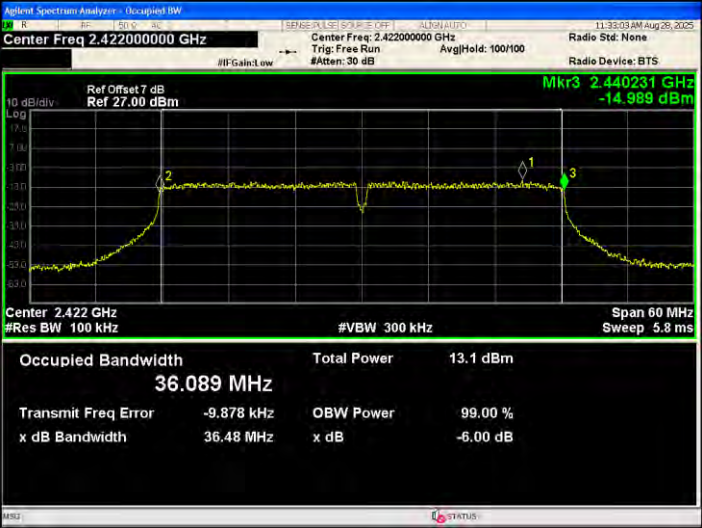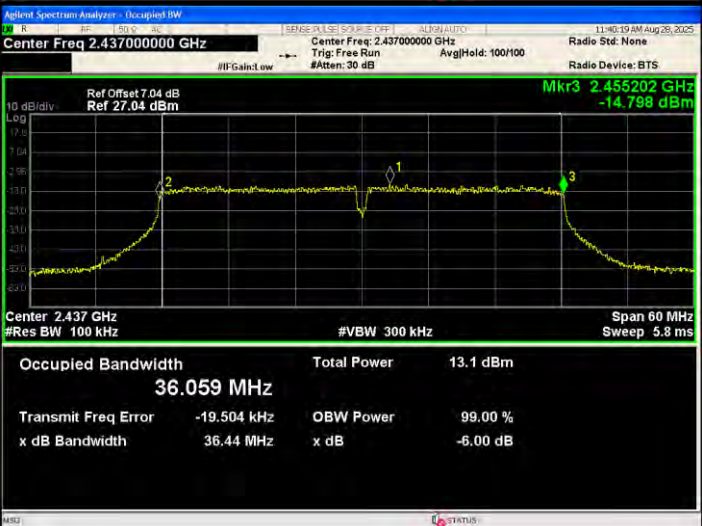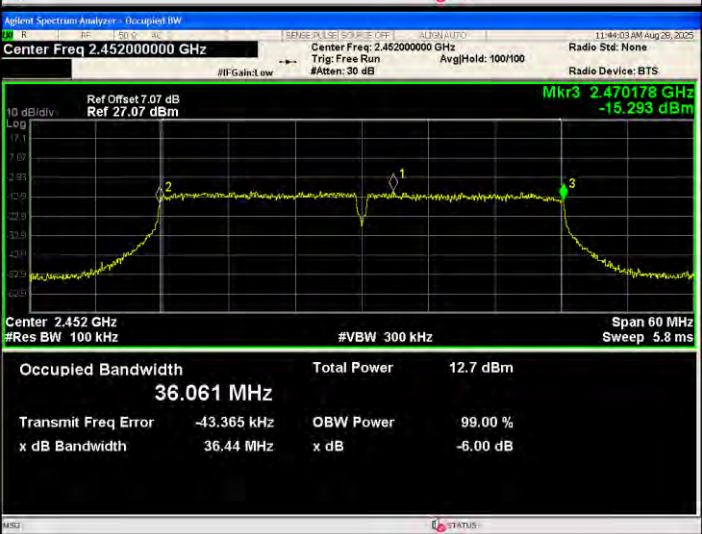
802.11n(HT40) /LCH	
802.11n(HT40) /MCH	
802.11n(HT40) /HCH	

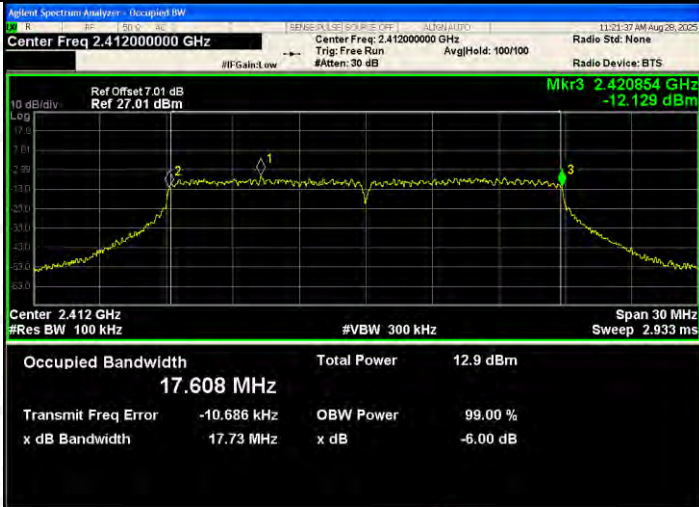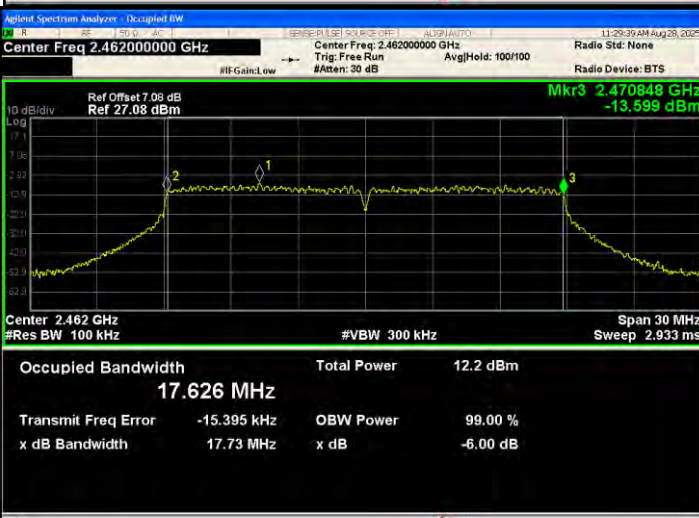802.11ax(HE20) /LCH	
802.11ax(HE20) /MCH	
802.11ax(HE20) /HCH	

802.11ax(HE40)
/LCH

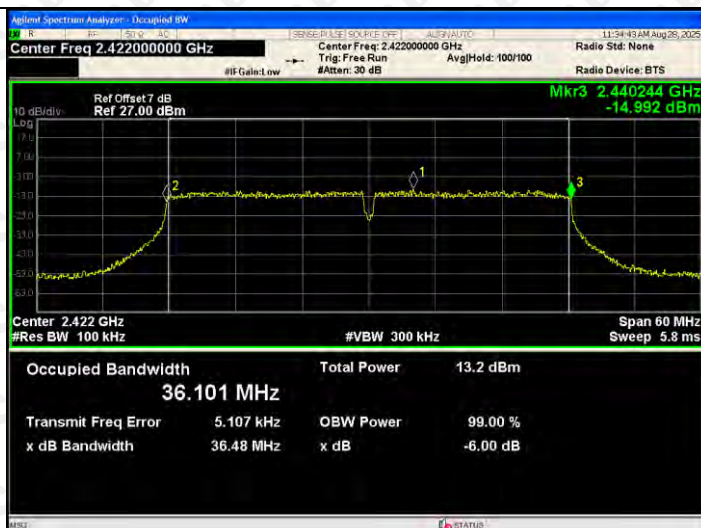

802.11ax(HE40)
/MCH



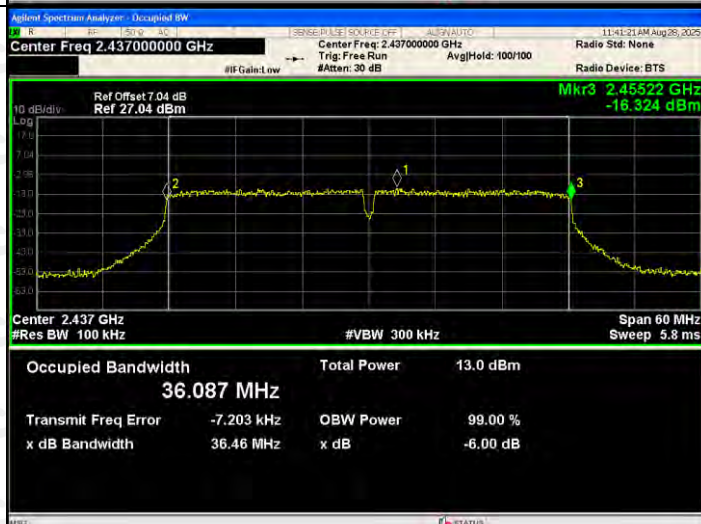




802.11ax(HE40)
/HCH







ANT2:
Test Graph:

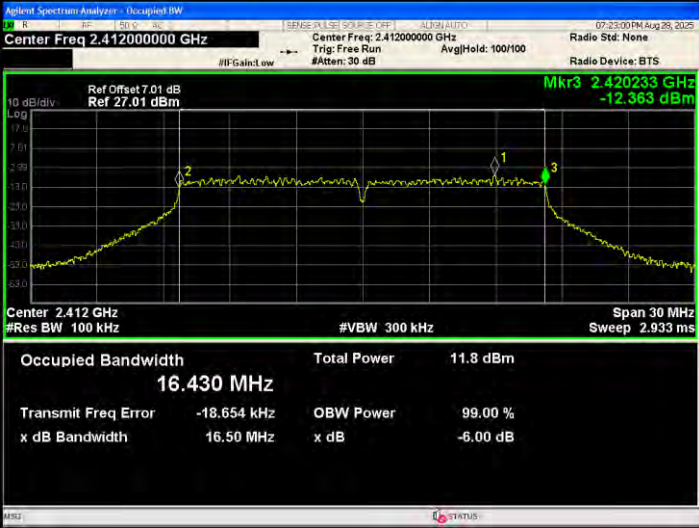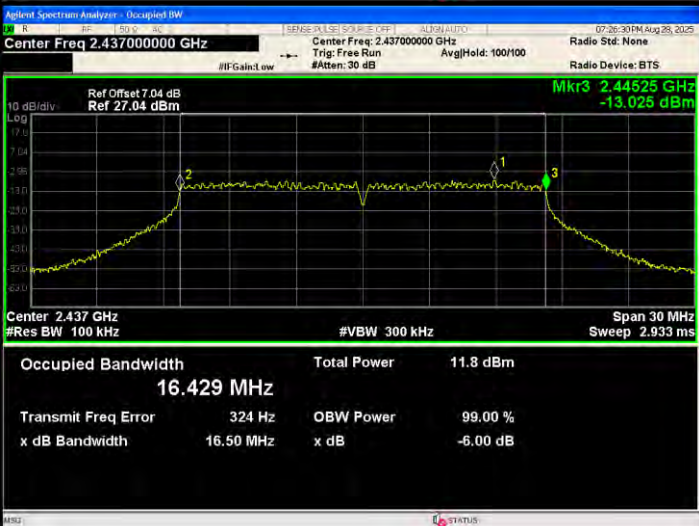
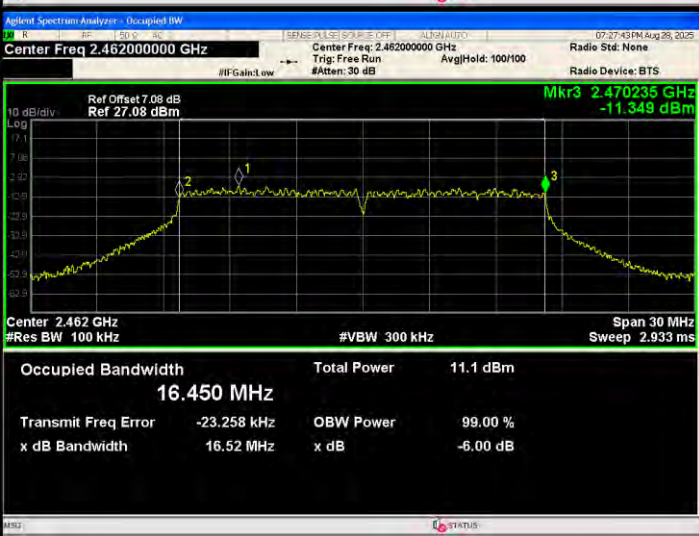


802.11g/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420233 GHz -12.363 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 16.430 MHz Total Power 11.8 dBm Transmit Freq Error -18.654 kHz OBW Power 99.00 % x dB Bandwidth 16.50 MHz x dB -6.00 dB
802.11g/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.44525 GHz -13.025 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 16.429 MHz Total Power 11.8 dBm Transmit Freq Error 324 Hz OBW Power 99.00 % x dB Bandwidth 16.50 MHz x dB -6.00 dB
802.11g/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.470235 GHz -11.349 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 16.450 MHz Total Power 11.1 dBm Transmit Freq Error -23.258 kHz OBW Power 99.00 % x dB Bandwidth 16.52 MHz x dB -6.00 dB

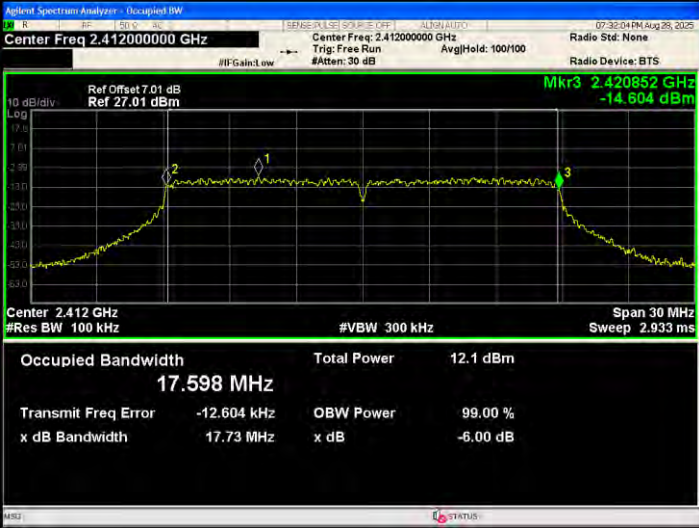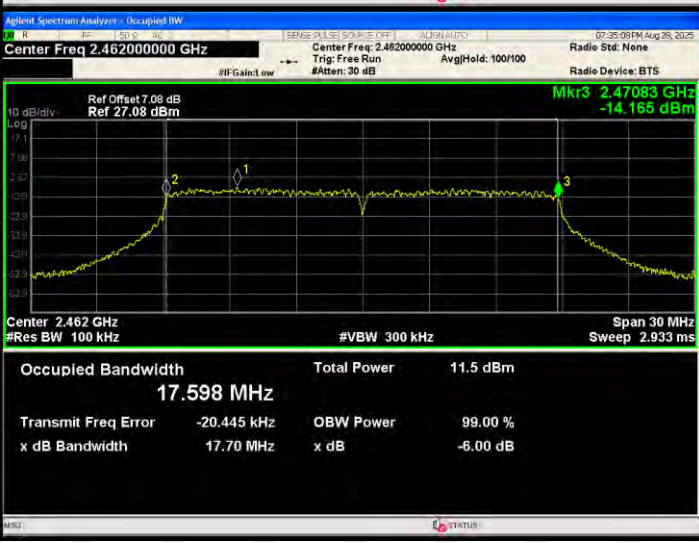802.11n(HT20) /LCH	
802.11n(HT20) /MCH	
802.11n(HT20) /HCH	

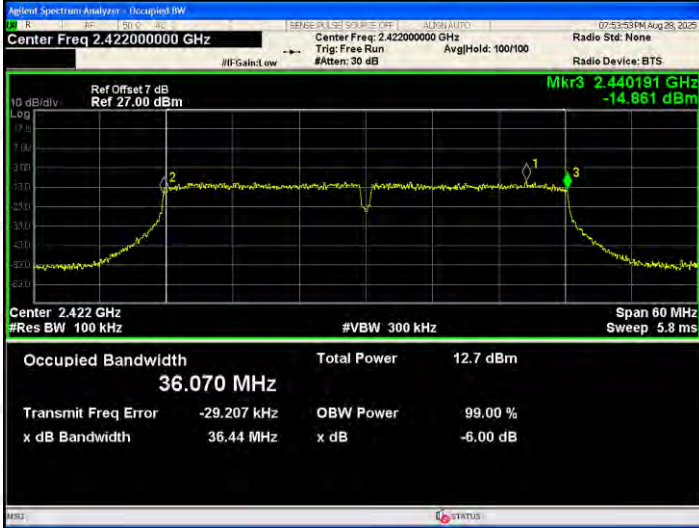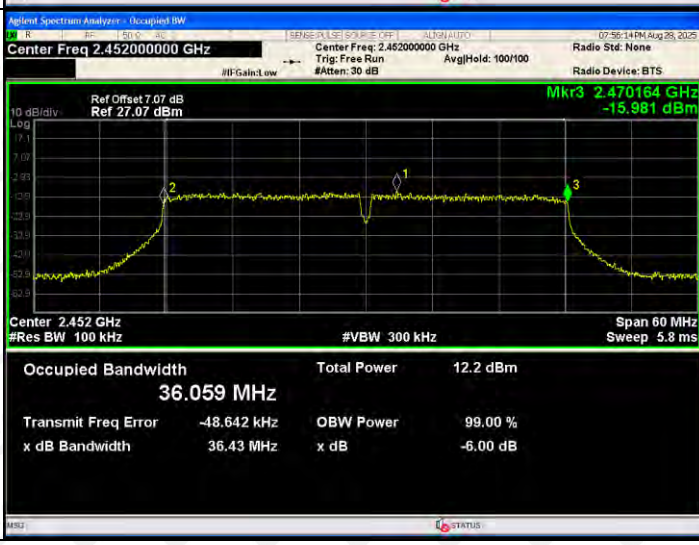
802.11n(HT40) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.440191 GHz -14.861 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.070 MHz Total Power 12.7 dBm Transmit Freq Error -29.207 kHz OBW Power 99.00 % x dB Bandwidth 36.44 MHz x dB -6.00 dB
802.11n(HT40) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.455209 GHz -15.068 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.096 MHz Total Power 12.6 dBm Transmit Freq Error -27.032 kHz OBW Power 99.00 % x dB Bandwidth 36.47 MHz x dB -6.00 dB
802.11n(HT40) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.470164 GHz -15.981 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.059 MHz Total Power 12.2 dBm Transmit Freq Error -48.642 kHz OBW Power 99.00 % x dB Bandwidth 36.43 MHz x dB -6.00 dB

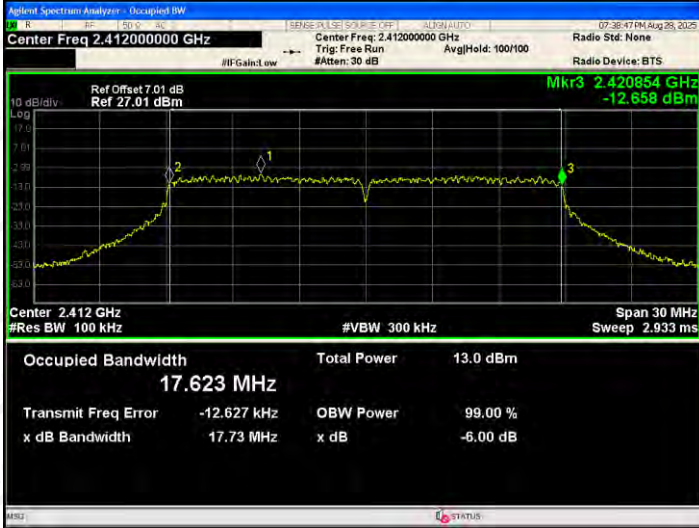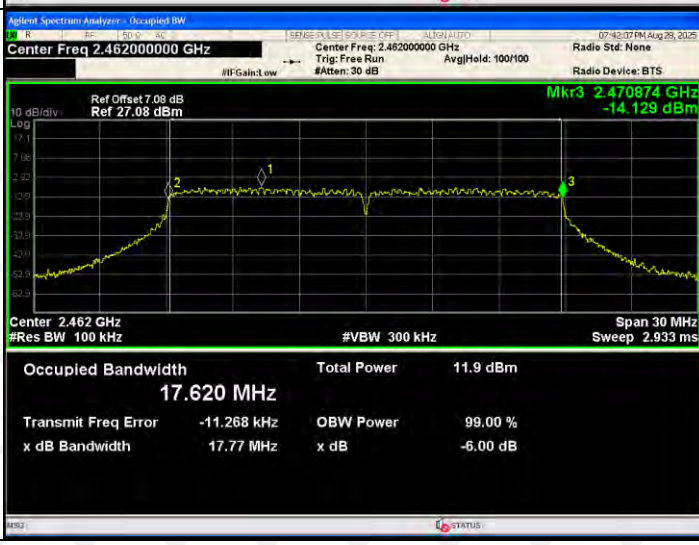802.11ax(HE20) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420854 GHz -12.658 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.623 MHz Total Power 13.0 dBm Transmit Freq Error -12.627 kHz OBW Power 99.00 % x dB Bandwidth 17.73 MHz x dB -6.00 dB
802.11ax(HE20) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445866 GHz -13.108 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.623 MHz Total Power 12.7 dBm Transmit Freq Error -10.290 kHz OBW Power 99.00 % x dB Bandwidth 17.75 MHz x dB -6.00 dB
802.11ax(HE20) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.470874 GHz -14.129 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.620 MHz Total Power 11.9 dBm Transmit Freq Error -11.268 kHz OBW Power 99.00 % x dB Bandwidth 17.77 MHz x dB -6.00 dB

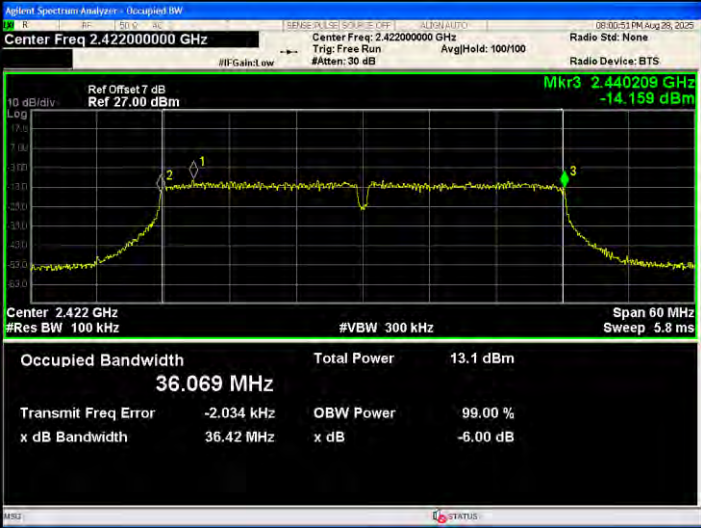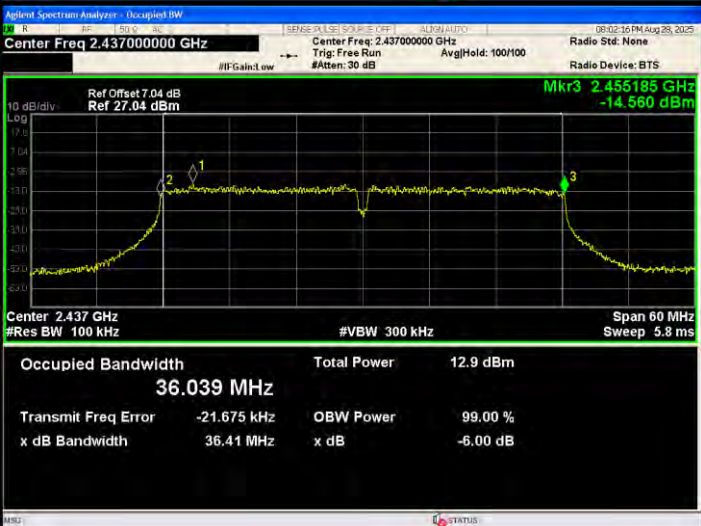802.11ax(HE40) /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.440209 GHz -14.159 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.069 MHz Total Power 13.1 dBm Transmit Freq Error -2.034 kHz OBW Power 99.00 % x dB Bandwidth 36.42 MHz x dB -6.00 dB
802.11ax(HE40) /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.455185 GHz -14.560 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.039 MHz Total Power 12.9 dBm Transmit Freq Error -21.675 kHz OBW Power 99.00 % x dB Bandwidth 36.41 MHz x dB -6.00 dB
802.11ax(HE40) /HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.469992 GHz -15.877 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.990 MHz Total Power 12.6 dBm Transmit Freq Error -54.844 kHz OBW Power 99.00 % x dB Bandwidth 36.09 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

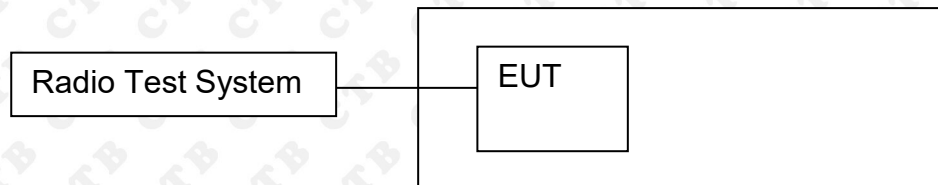

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS


11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



11.4 Test Result


Mode	Channel.	Power Spectral Density [dBm /3kHz] ANT 1	Power Spectral Density [dBm /3kHz] ANT 2	Power Spectral Density [dBm /3kHz] Total	Limit(dBm)
802.11b	LCH	-19.151	-19.913	/	8
	MCH	-19.356	-19.440	/	8
	HCH	-20.022	-21.148	/	8
802.11g	LCH	-19.936	-21.170	/	8
	MCH	-20.109	-20.959	/	8
	HCH	-20.223	-21.985	/	8
802.11n (HT20)	LCH	-20.715	-21.434	-18.049	8
	MCH	-20.633	-21.666	-18.109	8
	HCH	-21.321	-22.049	-18.659	8
802.11n (HT40)	LCH	-22.389	-22.888	-19.621	8
	MCH	-22.111	-22.738	-19.403	8
	HCH	-22.938	-23.157	-20.036	8
802.11ax (HE20)	LCH	-20.824	-20.617	-17.709	8
	MCH	-20.481	-20.976	-17.711	8
	HCH	-21.317	-21.651	-18.470	8
802.11ax (HE40)	LCH	-21.956	-22.891	-19.388	8
	MCH	-22.421	-23.308	-19.832	8
	HCH	-22.606	-23.440	-19.993	8



ANT1: Test Graph

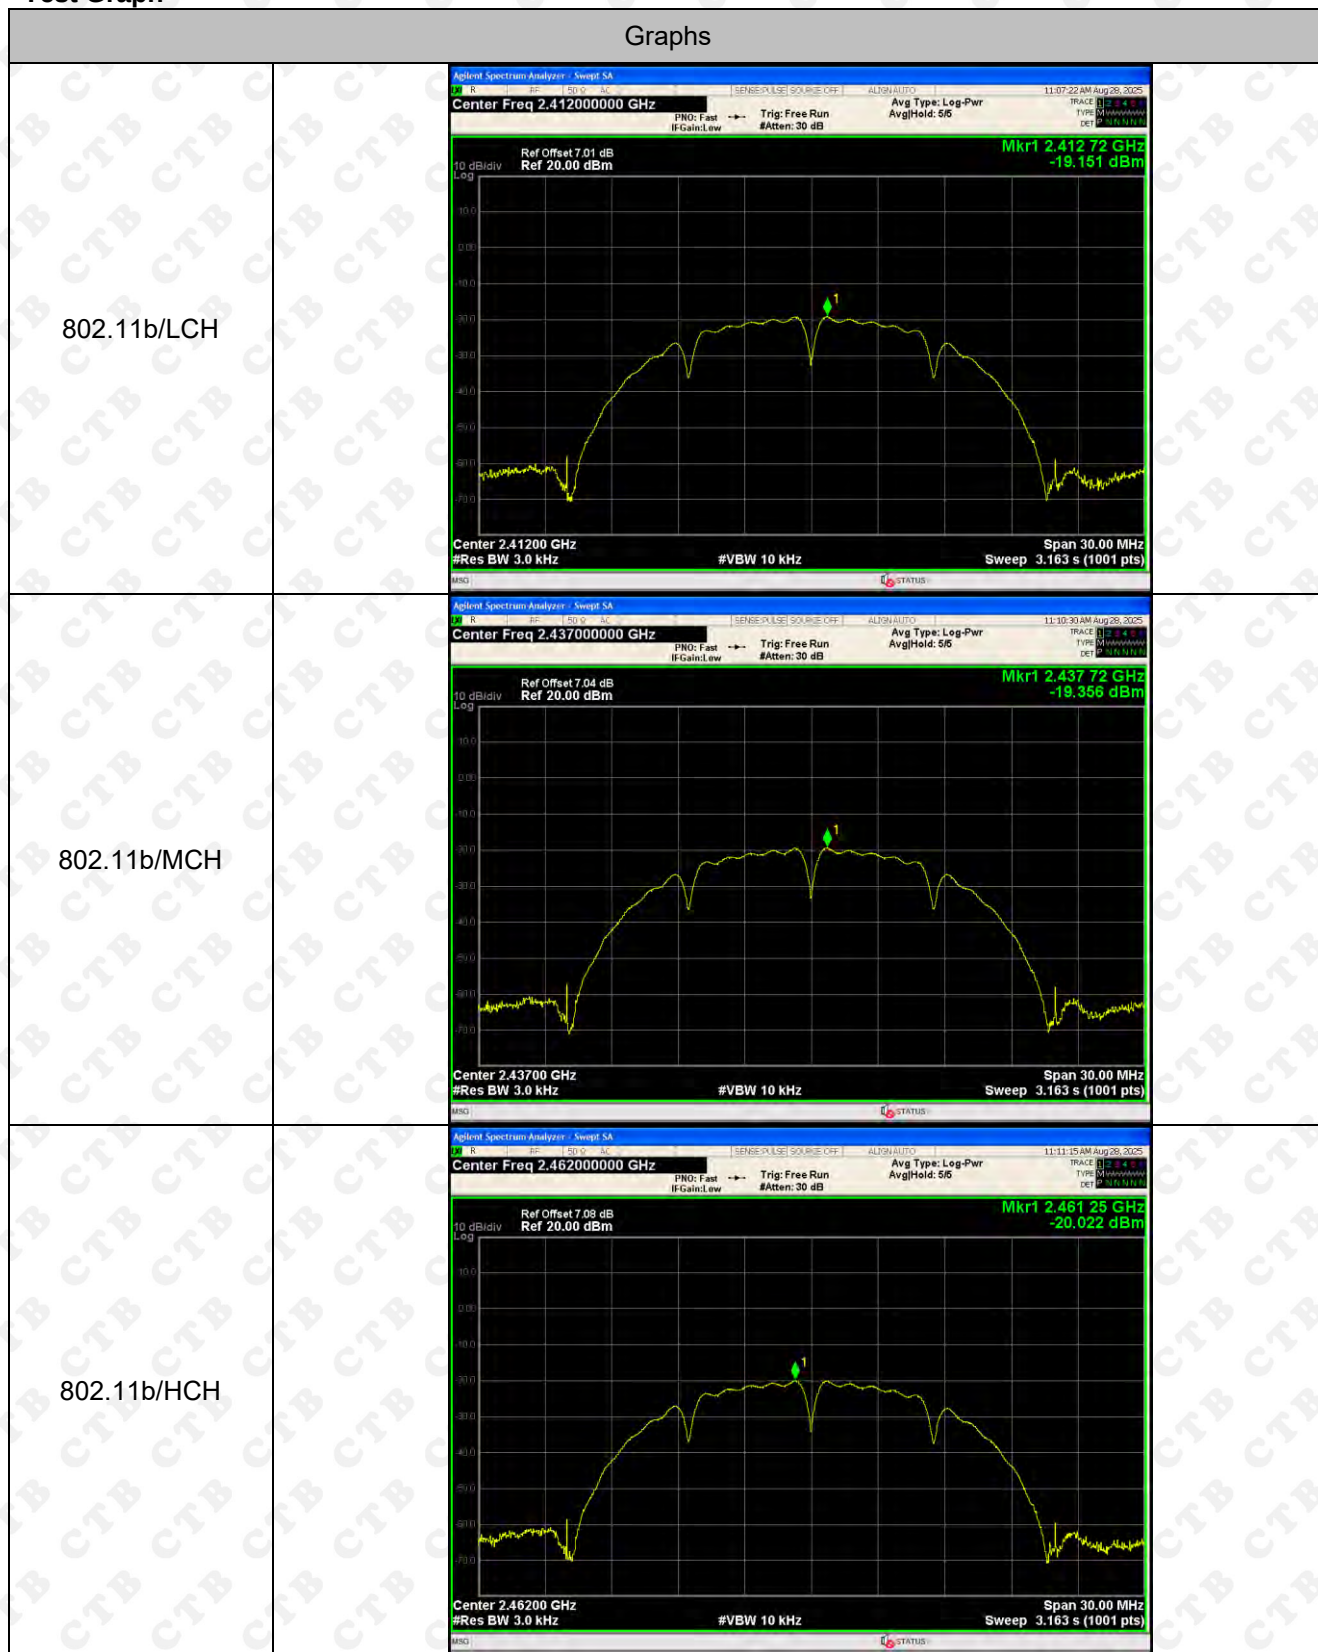

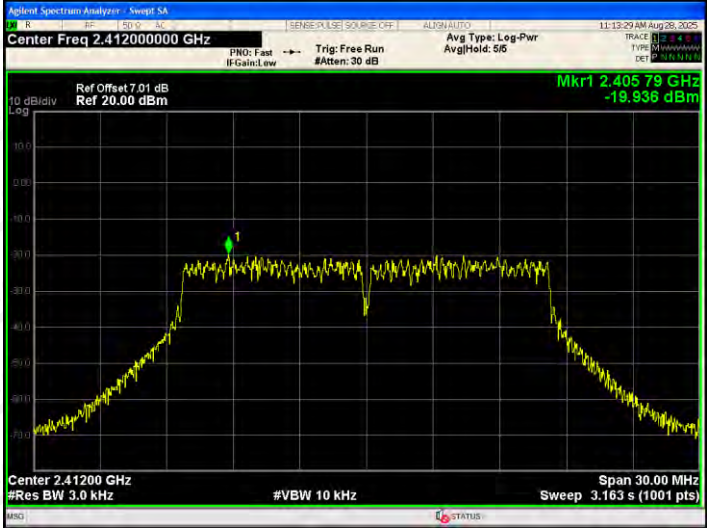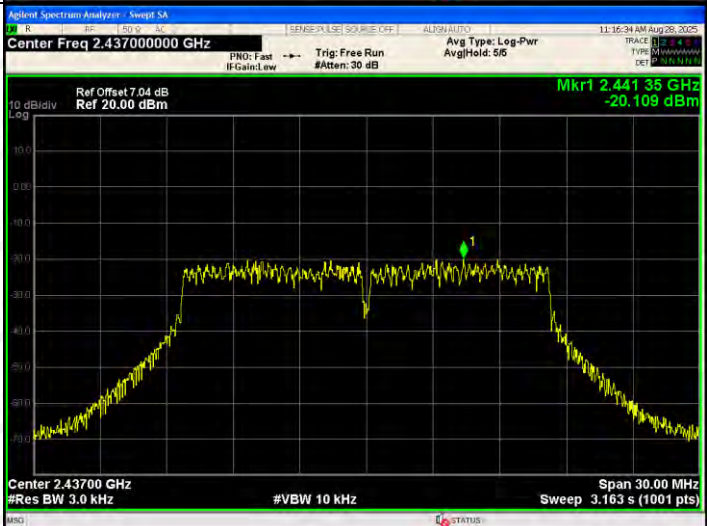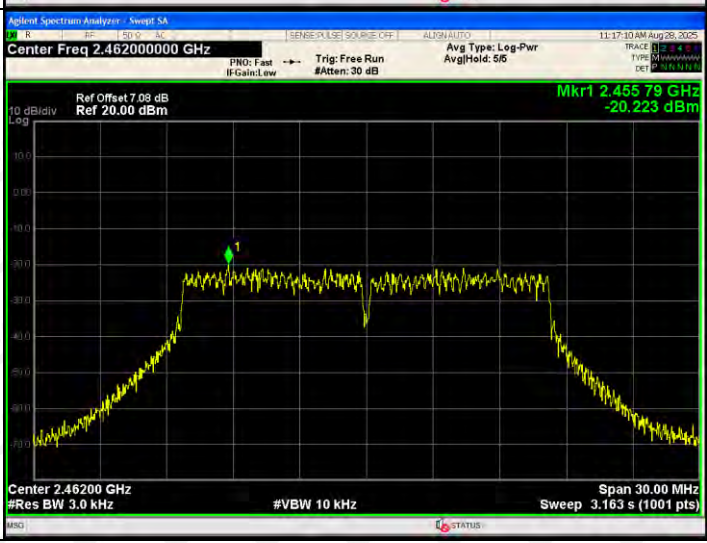802.11g/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.405 79 GHz -19.936 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.441 35 GHz -20.109 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11g/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 7.06 dB Ref 20.00 dBm Mkr1 2.455 79 GHz -20.223 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

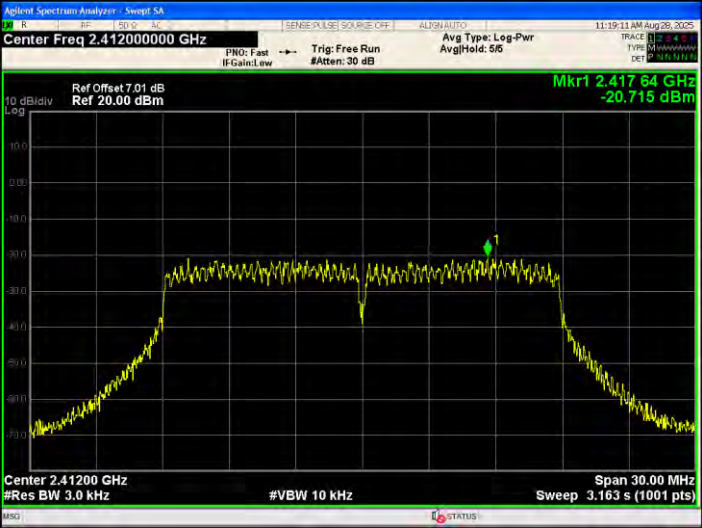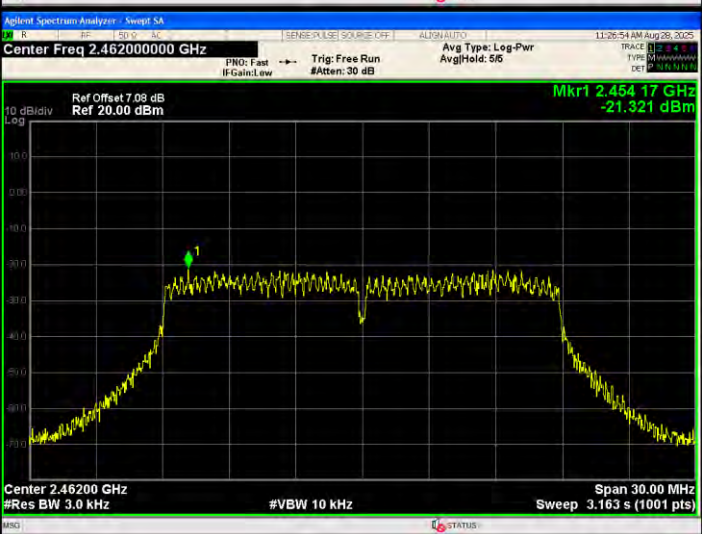802.11n(HT20) /LCH	
802.11n(HT20) /MCH	
802.11n(HT20) /HCH	

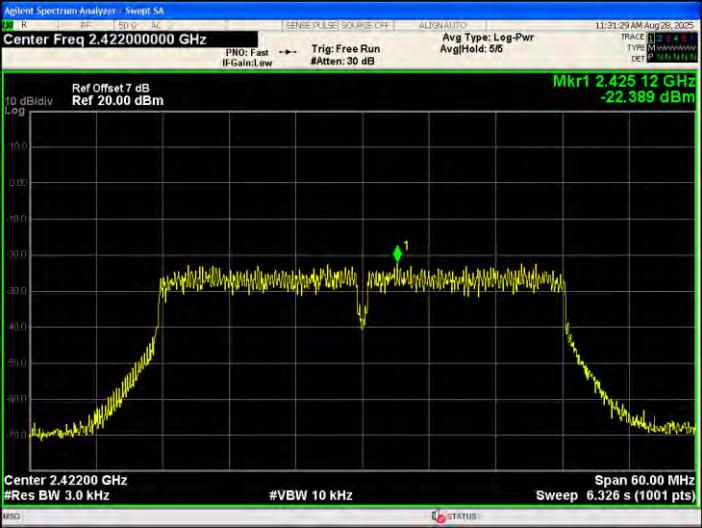802.11n(HT40) /LCH	
802.11n(HT40) /MCH	
802.11n(HT40) /HCH	

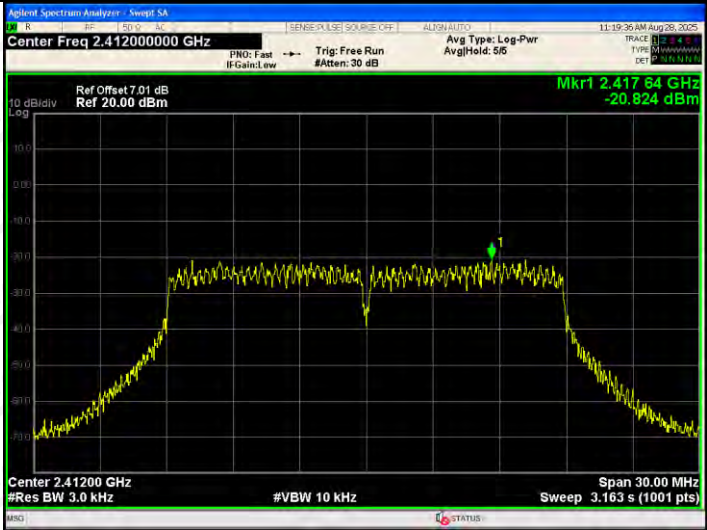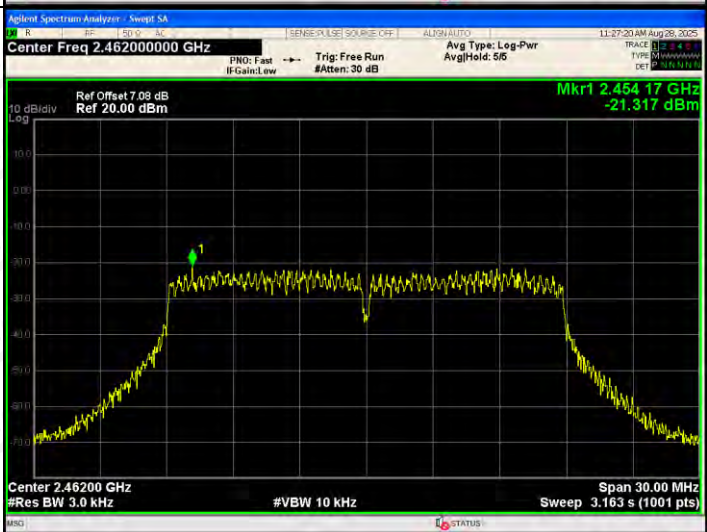802.11ax(HE20) /LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.41784 GHz -20.824 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HE20) /MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44417 GHz -20.481 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HE20) /HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.45417 GHz -21.317 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

802.11ax(HE40)
/LCH




802.11ax(HE40)
/MCH







802.11ax(HE40)
/HCH




ANT2:
Test Graph:

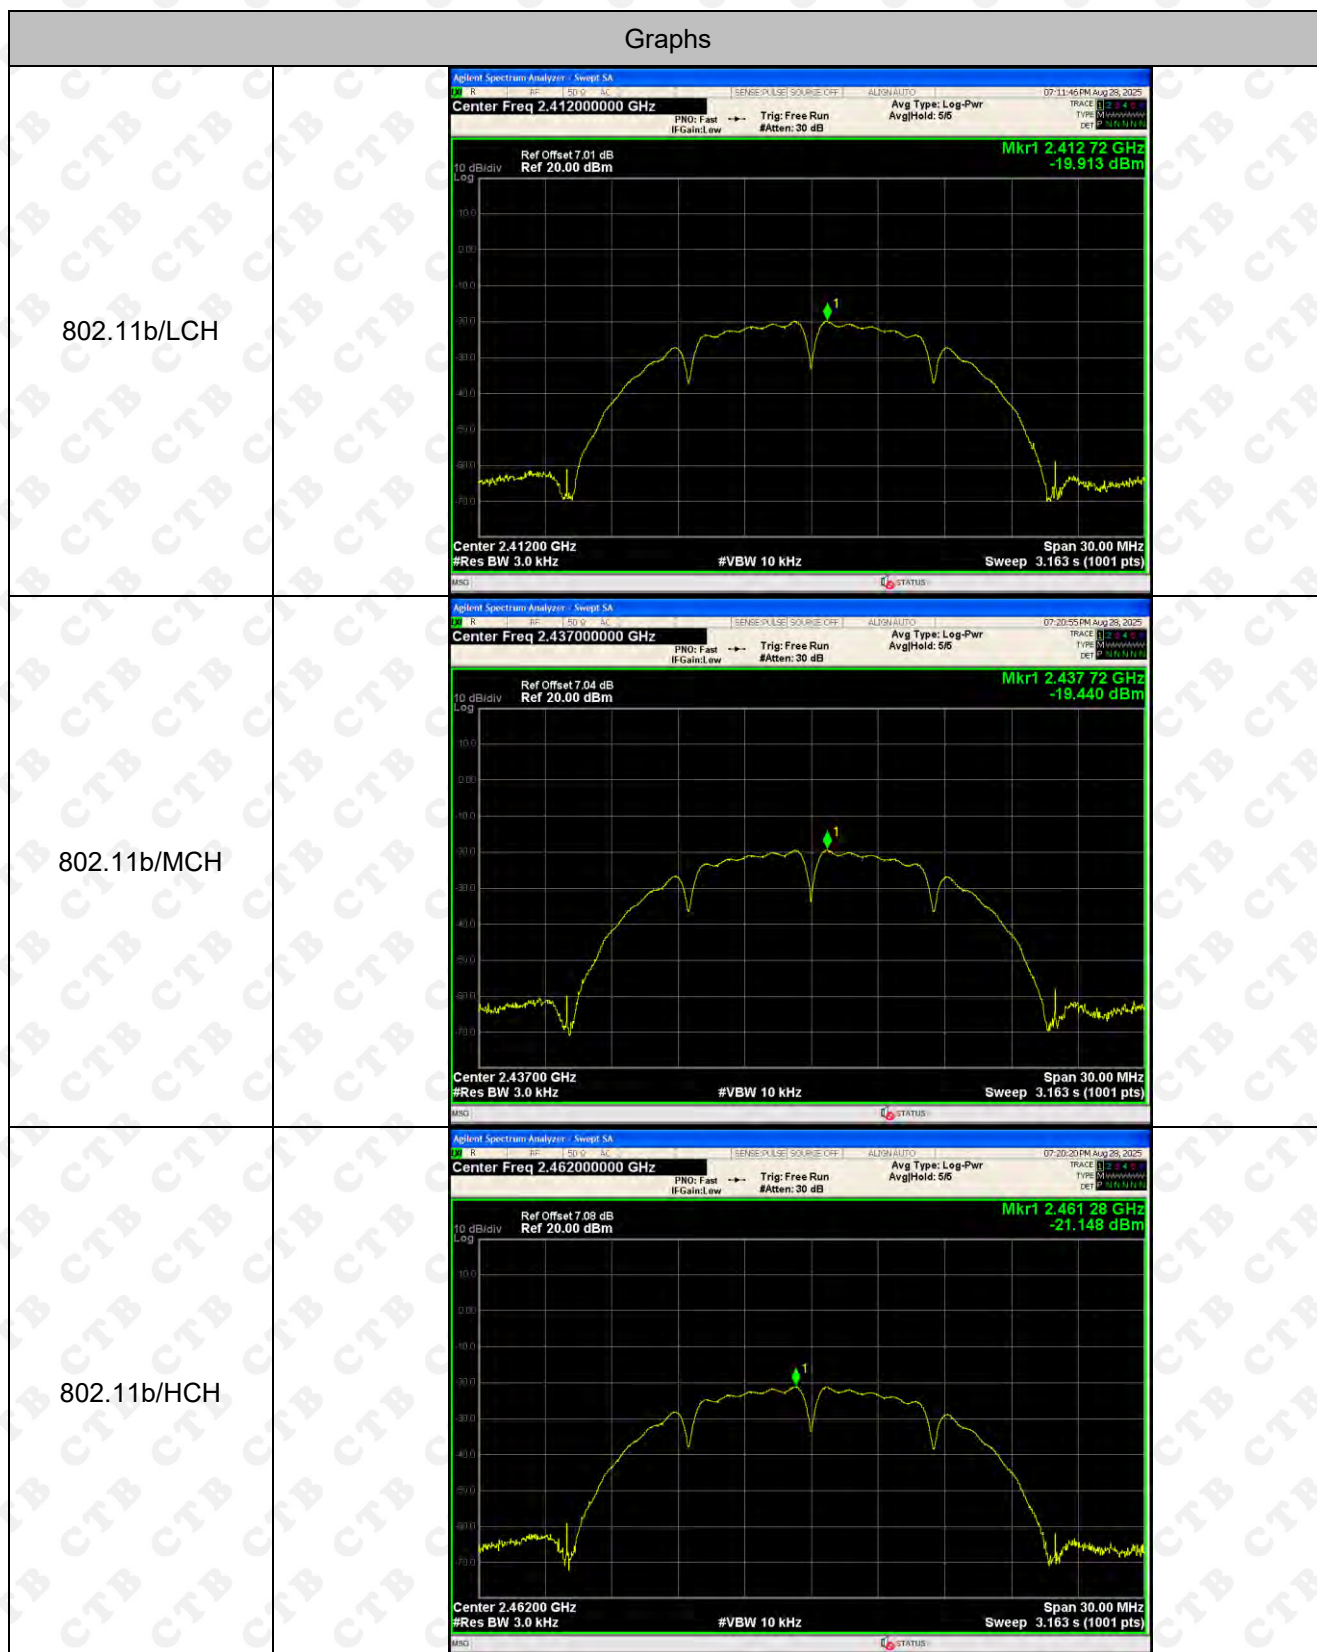


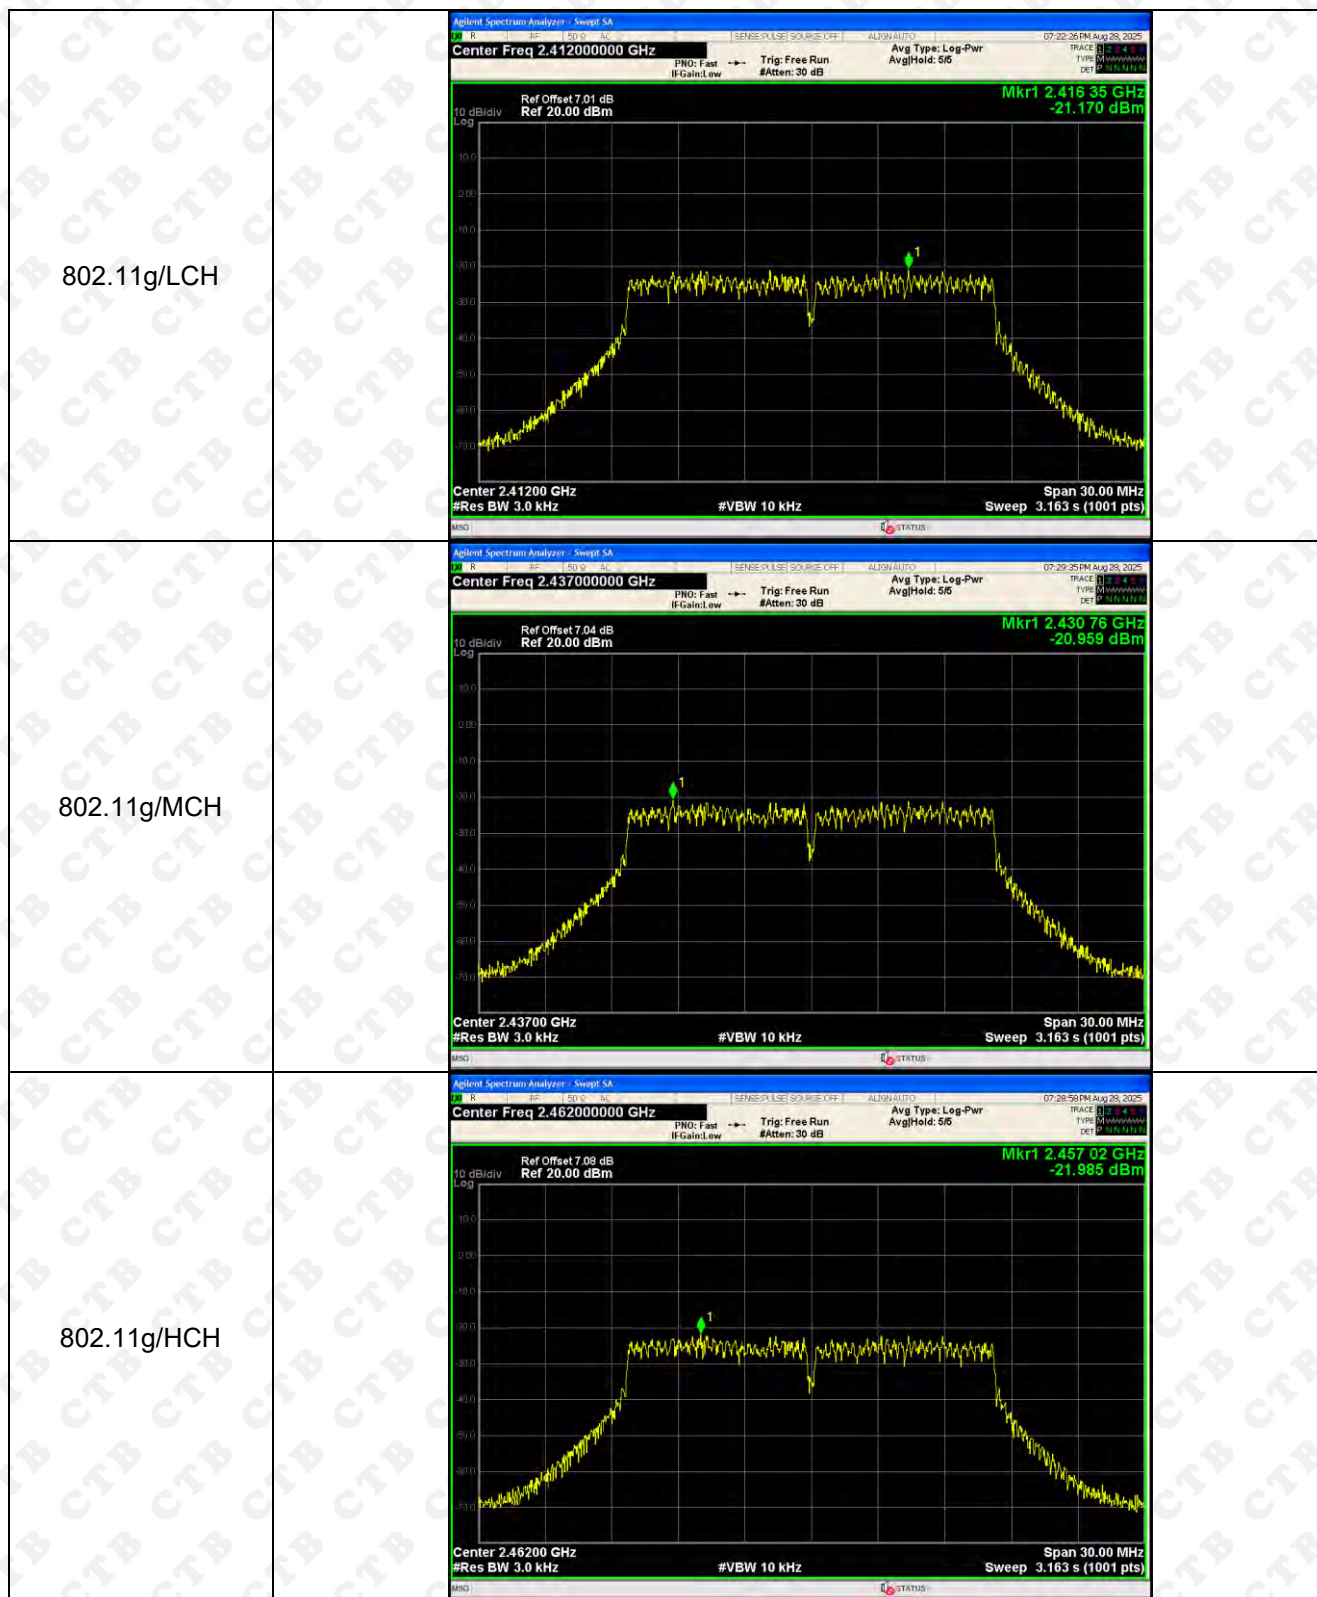

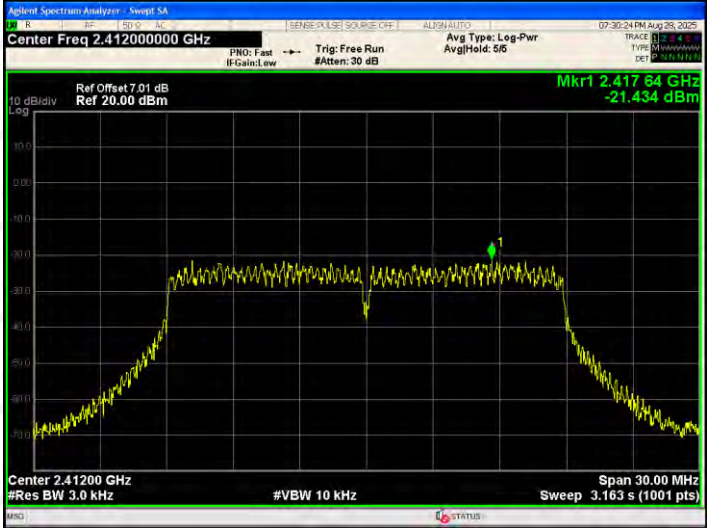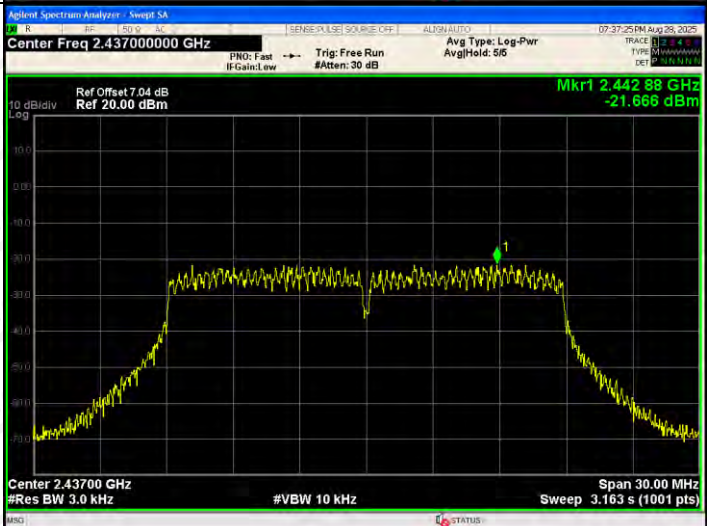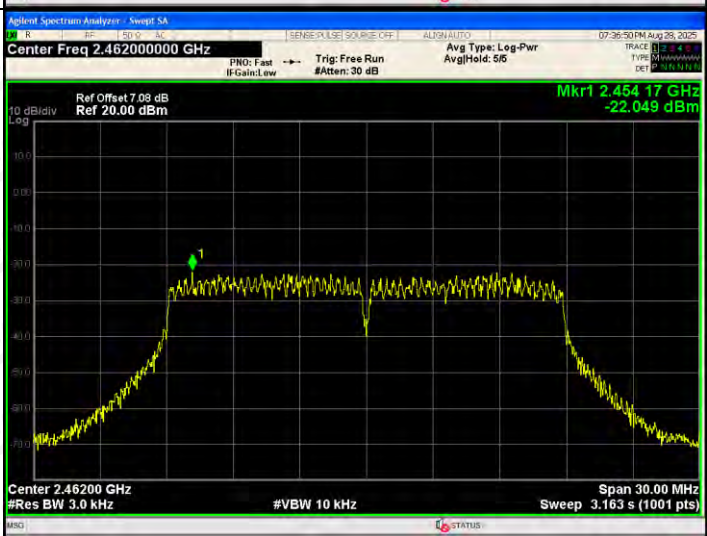802.11n(HT20) /LCH	
802.11n(HT20) /MCH	
802.11n(HT20) /HCH	

802.11n(HT40) /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.418 88 GHz -22.888 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.433 88 GHz -22.738 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.448 88 GHz -23.167 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

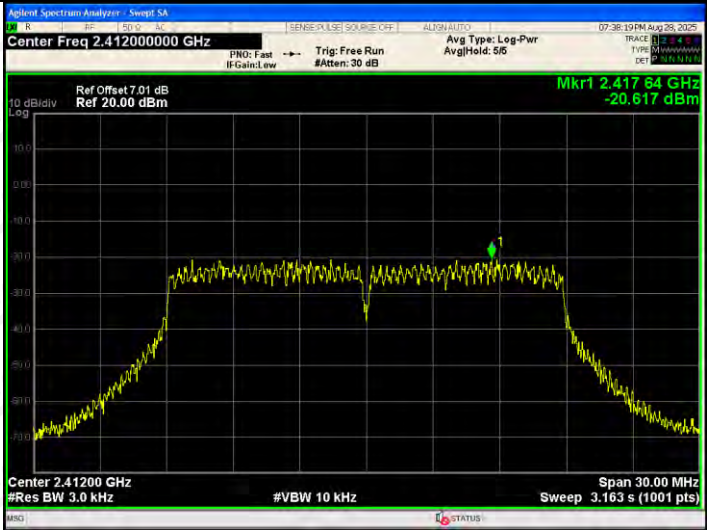802.11ax(HE20) /LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.41784 GHz -20.617 dBm Span 30.00 MHz Sweep 3.163 s (1001 pts) #Res BW 3.0 kHz #VBW 10 kHz
802.11ax(HE20) /MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44417 GHz -20.976 dBm Span 30.00 MHz Sweep 3.163 s (1001 pts) #Res BW 3.0 kHz #VBW 10 kHz
802.11ax(HE20) /HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.06 dB Ref 20.00 dBm Mkr1 2.45543 GHz -21.661 dBm Span 30.00 MHz Sweep 3.163 s (1001 pts) #Res BW 3.0 kHz #VBW 10 kHz

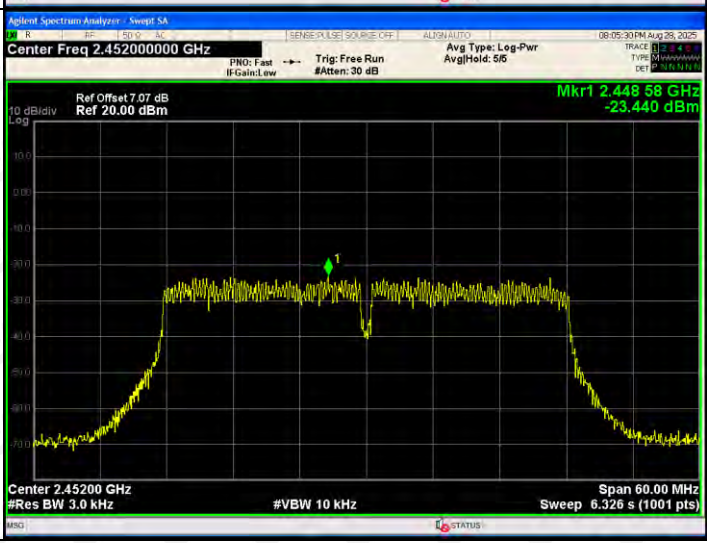802.11ax(HE40) /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.409 76 GHz -22.891 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HE40) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.432 92 GHz -23.308 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HE40) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.448 58 GHz -23.440 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is Ant1: 2.7dBi, Ant2: 2.7dBi

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G



Conducted Emission

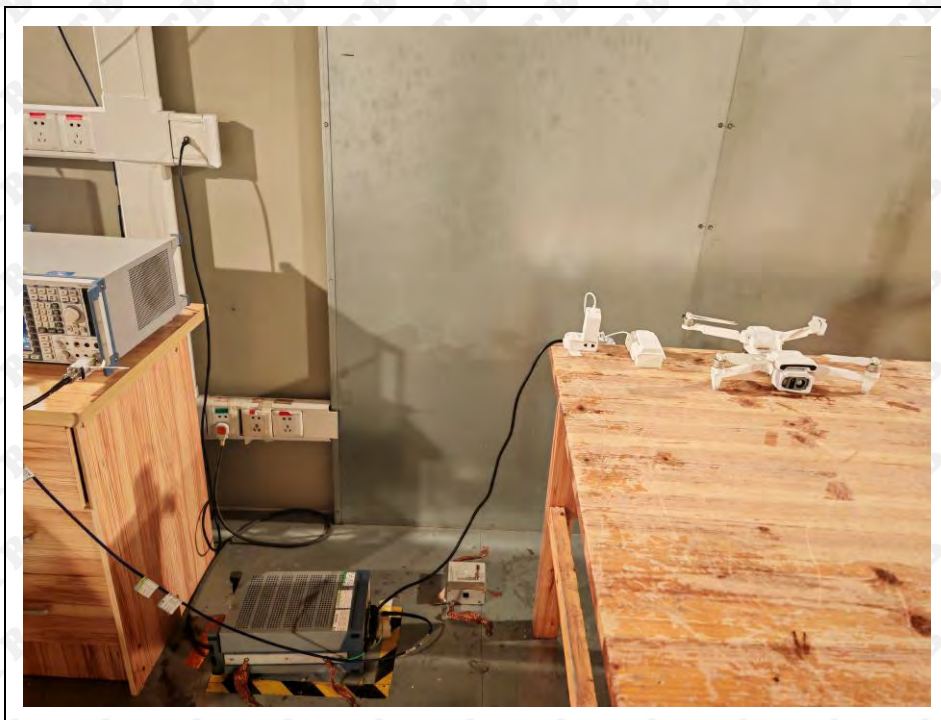

***** END OF REPORT *****