

**CFR 47 FCC PART 15 SUBPART C**

**TEST REPORT**

*For*

**Smart Watch**

**MODEL NUMBER: V6 MAX**

**REPORT NUMBER: E04A23060949F00102**

**ISSUE DATE: Aug. 31, 2023**

**FCC ID: 2A4T8-V6MAX**

*Prepared for*

**Shenzhen Mumi United Intelligent Technology Co., LTD**

**Room 334, Overseas Students Pioneer Park, Qinglin West Road, Longgang  
District. Shenzhen, China.**

*Prepared by*

**Guangdong Global Testing Technology Co., Ltd.**

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake  
Park, Dongguan city, Guangdong, People's Republic of China, 523808**

**This report shall not be reproduced, except in full, without the written approval of  
Guangdong Global Testing Technology Co., Ltd.**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	Aug. 31, 2023	Initial Issue	Win

Summary of Test Results			
Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.11 & Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Accuracy Method> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST METHODOLOGY.....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>CHANNEL LIST .....</i>	<i>8</i>
5.3. <i>MAXIMUM AVERAGE EIRP .....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>9</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER .....</i>	<i>9</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>9</i>
5.7. <i>EUT CABLE LIST AND DETAILS .....</i>	<i>9</i>
5.8. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>10</i>
5.9. <i>SETUP DIAGRAM .....</i>	<i>10</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>	<b>11</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>13</b>
7.1. <i>Conducted Output Power.....</i>	<i>13</i>
7.2. <i>6dB Bandwidth.....</i>	<i>14</i>
7.3. <i>Power Spectral Density.....</i>	<i>15</i>
7.4. <i>Conducted Band edge and spurious emission .....</i>	<i>16</i>
7.5. <i>Duty Cycle .....</i>	<i>18</i>
<b>8. RADIATED TEST RESULTS .....</b>	<b>19</b>
<b>9. ANTENNA REQUIREMENT .....</b>	<b>37</b>
<b>10. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>38</b>
<b>11. TEST DATA.....</b>	<b>41</b>
<b>APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION .....</b>	<b>42</b>
<b>APPENDIX: PHOTOGRAPHS OF THE EUT .....</b>	<b>43</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Shenzhen Mumi United Intelligent Technology Co., LTD  
 Address: Room 334, Overseas Students Pioneer Park, Qinglin West Road, Longgang District, Shenzhen, China.

### Manufacturer Information


Company Name: Shenzhen Siheng Electronic Co., LTD  
 Address: Block A, Yangfeng Intelligent Technology Park, Shiyan street, Bao'an District, Shenzhen

### EUT Information

EUT Name: Smart Watch  
 Model: V6 MAX  
 Series Model: V3 MAX, V5 MAX, V7 MAX, V8 MAX, V9 MAX, M9 ULTRAMAX, V520 MAX, V510 MAX, V600 MAX, M9 PROMAX, WATCH9 MAX, V530 MAX, V800 MAX, V700 MAX  
 Brand: N/A  
 Sample Received Date: Jul. 06, 2023  
 Sample Status: Normal  
 Sample ID: A23060949 005  
 Date of Tested: Jul. 06, 2023 to Aug. 31, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Win Huang  
 Project Engineer

Checked By:



Alan He  
 Manager

Approved By:



Shawn Wen  
 General Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 6947.01)</b> Guangdong Global Testing Technology Co., Ltd. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1343)</b> Guangdong Global Testing Technology Co., Ltd. has been recognized to perform compliance testing on equipment subject to Supplier's Declaration of Conformity (SDoC) and Certification rules</p> <p><b>ISED (Company No.: 30714)</b> Guangdong Global Testing Technology Co., Ltd. has been registered and fully described in a report filed with ISED. The Company Number is 30714 and the test lab Conformity Assessment Body Identifier (CABID) is CN0148.</p>
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People's Republic of China, 523808

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Items	k	Uncertainty
DTS Bandwidth	1.96	±9.2 PPM
20dB Emission Bandwidth	1.96	±9.2 PPM
Carrier Frequency Separation	1.96	±9.2 PPM
Time of Occupancy	1.96	±0.57%
Conducted Output Power	1.96	± 0.73 dB
Maximum Power Spectral Density Level	1.96	±1.9 dB
Conducted Band edge and spurious emission	1.96	9 kHz-30 MHz: ± 0.95 dB 30 MHz-1 GHz: ± 1.5 dB 1GHz-12.75GHz: ± 1.8 dB 12.75 GHz-26.5 GHz: ± 2.1dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports (AMN)	150 kHz ~ 30 MHz	2	3.37
Radiated emissions	30 MHz ~ 1 GHz	2	3.79
Radiated emissions	1 GHz ~ 18 GHz	2	5.62
Radiated emissions	18 GHz ~ 40 GHz	2	5.54

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name		Smart Watch
Model		V6 MAX
Series Model		V3 MAX, V5 MAX, V7MAX, V8 MAX, V9 MAX, M9ULTRAMAX, V520 MAX, V510 MAX, V600 MAX, M9 PROMAX, WATCH9 MAX, V530 MAX, V800 MAX, V700 MAX
Hardware Version		HK37
Software Version		LuRogef V6 Max BV1.3 2023.08.21
Ratings		5V,100mA Battery: DC 3.7V, 260mAh
Power Supply	AC	/
	DC	5V

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2402 MHz to 2480 MHz
Bluetooth Version:	Bluetooth 5.0
Bluetooth Mode:	Bluetooth LE
Type of Modulation:	GFSK, 2GFSK
Number of Channels:	40
Channel Separation:	2 MHz
Maximum Peak Power:	-3.29dBm
Antenna Type:	Integral Antenna
Antenna Gain:	-2.94dBi
Normal Test Voltage:	DC 5V
EUT Test software:	rf_console

### 5.2. CHANNEL LIST

Channel	Frequency (MHz)						
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2468	/	/

### 5.3. MAXIMUM AVERAGE EIRP

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
LE 1Mbps	2402 ~ 2480	0-39[40]	-3.3	/
LE 2Mbps	2402 ~ 2480	0-39[40]	-3.29	/

### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1 Mbps	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 2Mbps	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz

### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band					
Test Software Version		rf_console			
Modulation Type	Transmit Antenna Number	Test Software setting value			
		CH 0	CH 19	CH 39	
GFSK(1Mbps)	1	default	default	default	
GFSK(2Mbps)	1	default	default	default	

### 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	Integral	-2.94dBi

Test Mode	Transmit and Receive Mode	Description
LE 1Mbps	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 2Mbps	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
Note:		

### 5.7. EUT CABLE LIST AND DETAILS

Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
-------------------	------------	---------------------	------------------------


USB Cable	0.83	Unshielded	Without Ferrite
-----------	------	------------	-----------------

## 5.8. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit

Equipment	Manufacturer	Model No.
Smart Watch	Mumi	V6 MAX
PC	Lenovo	T14
Adapter	UGREEN	N/A

## 5.9. SETUP DIAGRAM

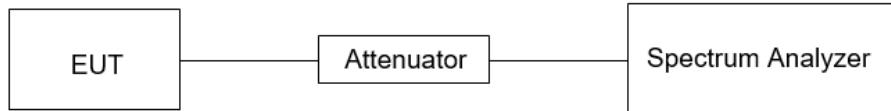

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

Test Equipment of Conducted RF					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40	102257	2022/10/08	2023/10/07
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY61253075	2022/10/08	2023/10/07
Vector Signal Generator	Rohde & Schwarz	SMM100A	101899	2023/03/16	2024/03/15
RF Control box	MWRF-test	MW100-RFCB	MW220926GTG	2022/10/08	2023/10/07
Wideband Radio Communication Tester	Rohde & Schwarz	CMW270	102792	2023/03/16	2024/03/15
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	103235	2022/10/08	2023/10/07
temperature humidity chamber	Espec	SH-241	SH-241-2014	2022/10/08	2023/10/07
RF Test Software	MWRF-test	MTS8310E (Ver. V2/0)	N/A	N/A	N/A

Test Equipment of Radiated emissions below 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2146	2022/08/30	2025/08/29
EMI Test Receiver	Rohde & Schwarz	ESCI3	101409	2022/10/08	2023/10/07
Pre-Amplifier	HzEMC	HPA-9K0130	HYPA21001	2022/10/29	2023/10/28
Biconilog Antenna	Schwarzbeck	VULB 9168	01315	2022/10/10	2025/10/09
Biconilog Antenna	ETS	3142E	00243646	2022/03/23	2025/03/22
Loop Antenna	ETS	6502	243668	2022/03/30	2025/03/29
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE)	N/A	N/A	N/A

Test Equipment of Radiated emissions above 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
3m Semi-anechoic Chamber	ETS	9m*6m*6m	Q2149	2022/08/30	2025/08/29
Spectrum Analyzer	Rohde & Schwarz	FSV40	101413	2022/10/08	2023/10/07
Pre-Amplifier	A-INFO	HPA-1G1850	HYPA21003	2022/10/29	2023/10/28
Horn antenna	A-INFO	3117	246069	2022/03/11	2023/03/10
Pre-Amplifier	ZKJC	HPA-184057	HYPA21004	2022/10/29	2023/10/28
Horn antenna	ZKJC	3116C	246265	2022/03/29	2023/03/28
Test Software	Farad	EZ-EMC (Ver.FA-03A2 RE+)	N/A	N/A	N/A

Test Equipment of Conducted emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date

Shielded Room	CHENG YU	8m*5m*4m	N/A	2022/10/29	2025/10/28
EMI Test Receiver	Rohde & Schwarz	ESR3	102647	2022/12/03	2023/12/02
LISN/AMN	Rohde & Schwarz	ENV216	102843	2022/10/08	2023/10/07
NNLK 8129 RC	Schwarzbeck	NNLK 8129 RC	5046	2023/03/30	2024/03/29
Test Software	Farad	EZ-EMC (Ver. EMC-con-3A1 1+)	N/A	N/A	N/A

## 7. ANTENNA PORT TEST RESULTS

### 7.1. CONDUCTED OUTPUT POWER

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	Peak Conduct Output Power	1 watt or 30 dBm	2400-2483.5

#### TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the Spectrum Analyzer (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

#### TEST ENVIRONMENT

Temperature	26.1 °C	Relative Humidity	44%
Atmosphere Pressure	101kPa		

#### TEST RESULTS

Please refer to section "Test Data" - Appendix B

## 7.2. 6DB BANDWIDTH

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	$\geq 500$ kHz	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST ENVIRONMENT

Temperature	26.1°C	Relative Humidity	44%
Atmosphere Pressure	101kPa		

### TEST RESULTS

Please refer to section "Test Data" - Appendix B

### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

#### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST ENVIRONMENT

Temperature	26.1°C	Relative Humidity	44%
Atmosphere Pressure	101kPa		

#### TEST RESULTS

Please refer to section "Test Data" - Appendix B

## 7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

### TEST ENVIRONMENT

Temperature	26.1 °C	Relative Humidity	44%
Atmosphere Pressure	101kPa		

**TEST RESULTS**

Please refer to section "Test Data" - Appendix B

## 7.5. DUTY CYCLE

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

### TEST ENVIRONMENT

Temperature	26.1 °C	Relative Humidity	44%
Atmosphere Pressure	101kPa		

### TEST RESULTS

Please refer to section "Test Data" - Appendix B

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz			
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	
0.009-0.490	2400/F(kHz)	300	
0.490-1.705	24000/F(kHz)	30	
1.705-30.0	30	30	

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

### **TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dB<sub>V</sub>/m, which is equivalent to  $Y - 51.5 = Z$  dB<sub>A</sub>/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


## Above 1G

## The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.



X axis, Y axis, Z axis positions:

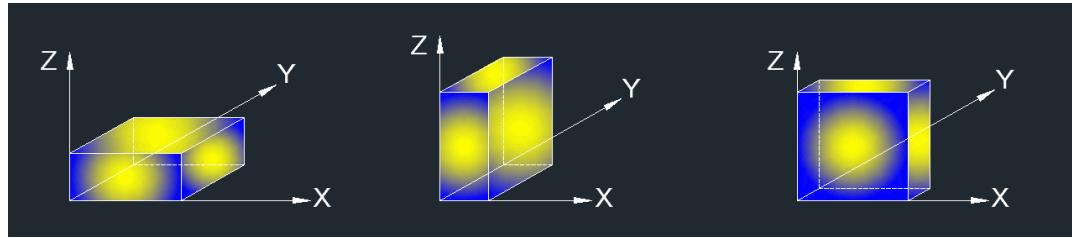


Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

### TEST SETUP

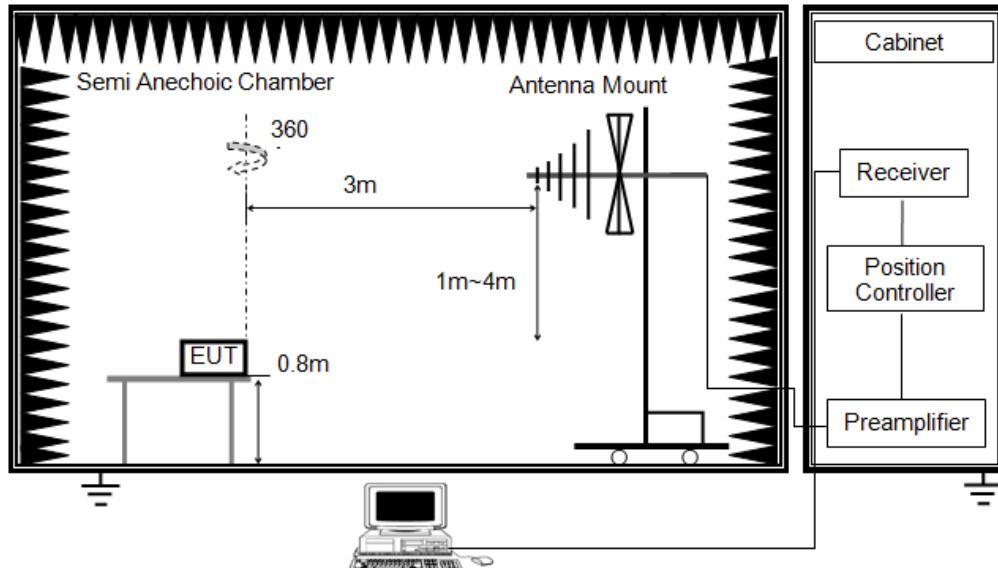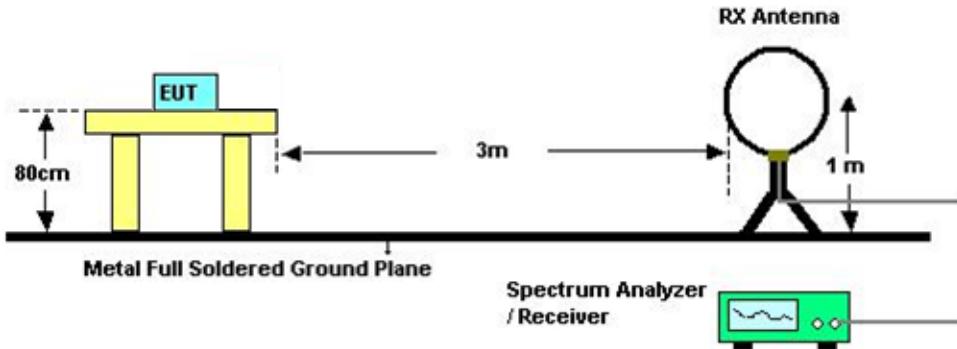

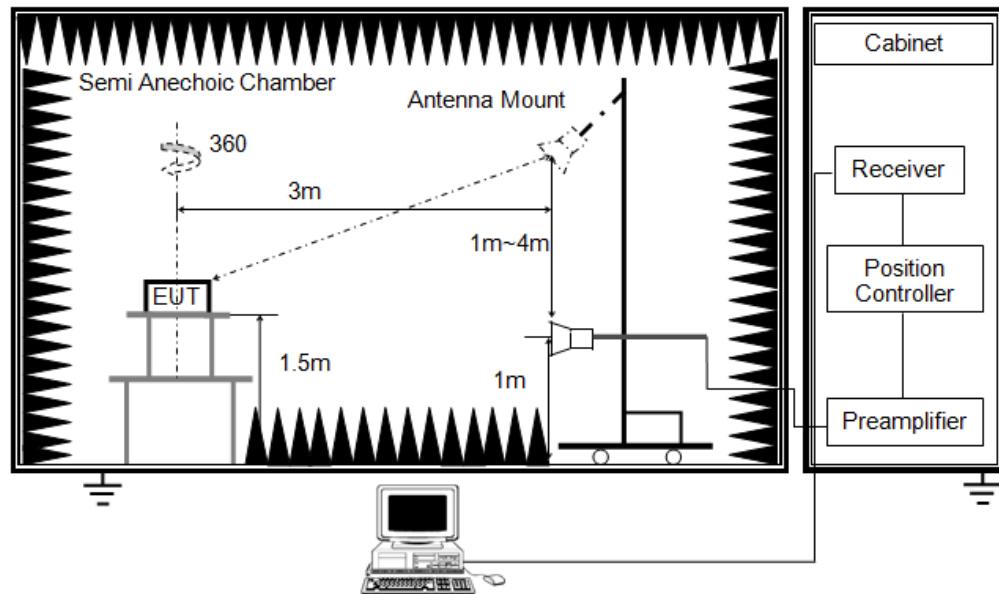

### TEST ENVIRONMENT


Temperature	24.3°C	Relative Humidity	54%
Atmosphere Pressure	101kPa		

## TEST RESULTS

### Radiated Spurious Emission :

The worst result as bellow:


Mode:	BLE 2Mbps 2402MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

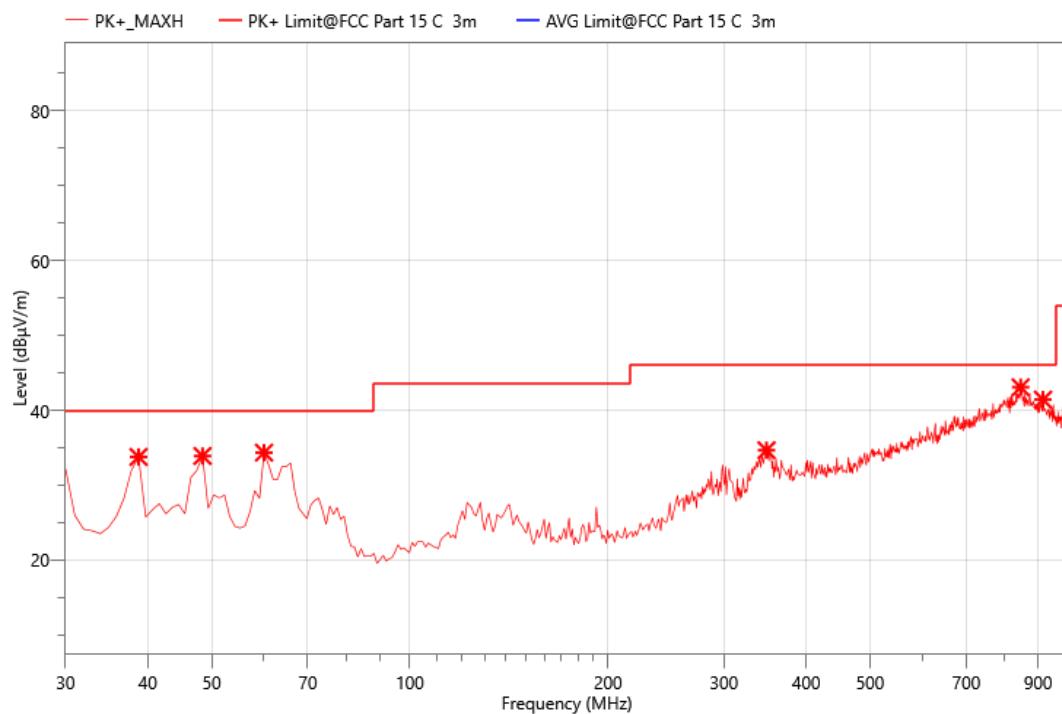

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	38.730	38.85	33.78	40.00	6.22	PK+	V	-5.07
2	48.430	37.88	33.91	40.00	6.09	PK+	V	-3.97
3	60.070	37.97	34.36	40.00	5.64	PK+	V	-3.61
4	348.160	33.78	34.68	46.00	11.32	PK+	V	0.9
5	846.740	29.08	43.08	46.00	2.92	PK+	V	14
6	915.610	28.83	41.43	46.00	4.57	PK+	V	12.6

Mode:	BLE 2Mbps 2402MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

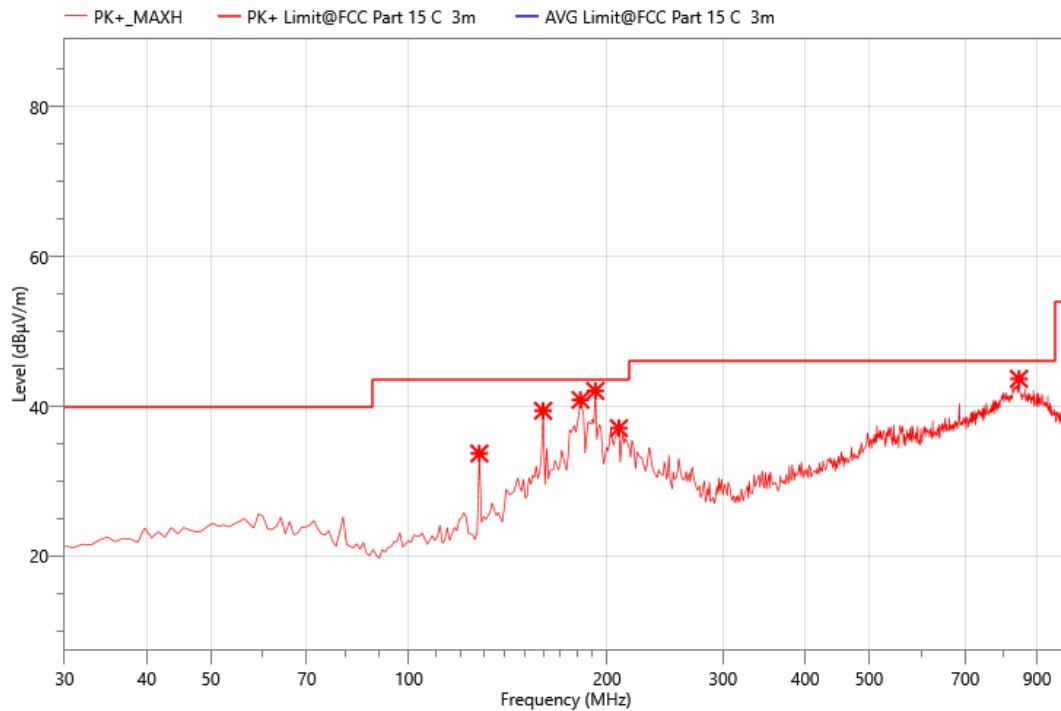


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	127.970	39.61	33.71	43.50	9.79	PK+	H	-5.9
2	159.980	44.74	39.41	43.50	4.09	PK+	H	-5.33
3	182.290	46.02	40.86	43.50	2.64	PK+	H	-5.16
4	191.990	46.83	42.05	43.50	1.45	PK+	H	-4.78
5	208.480	42.11	37.09	43.50	6.41	PK+	H	-5.02
6	844.800	29.66	43.68	46.00	2.32	PK+	H	14.02

Note: 1. Result Level = Read Level+ Antenna Factor+ Cable Loss- Amp. Factor

**Above 1000MHz~10<sup>th</sup> Harmonics:**

Mode:	BLE 2Mbps 2402MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

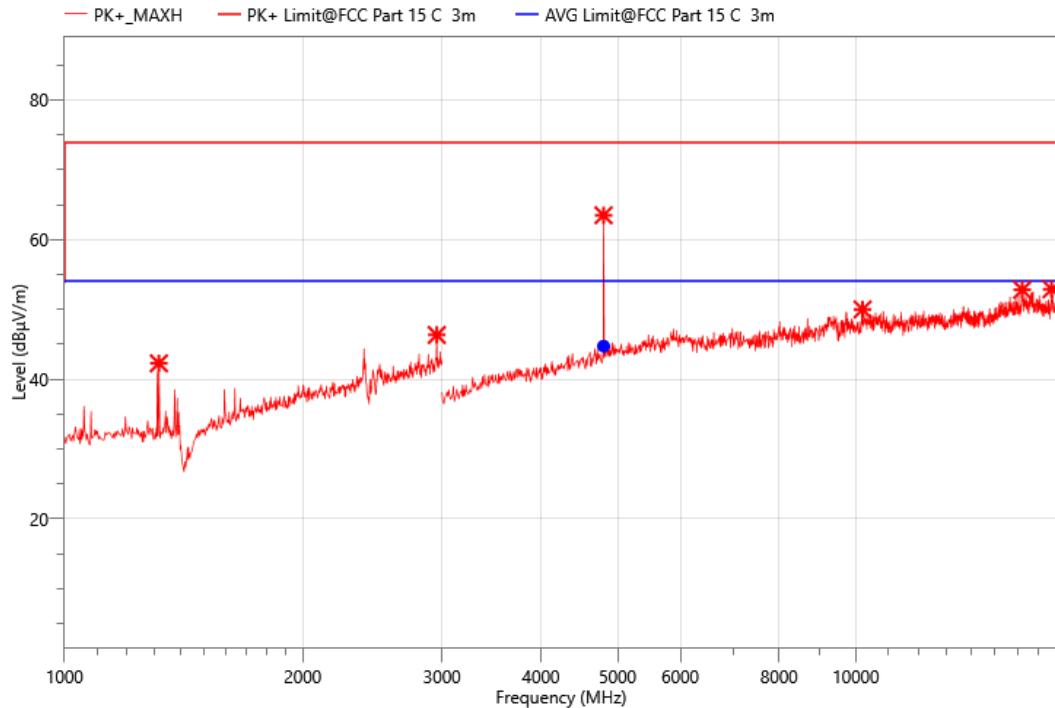
**Critical\_Freqs**

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	1316.000	60.81	42.26	74.00	31.74	PK+	V	-18.55
2	2954.000	56.16	46.33	74.00	27.67	PK+	V	-9.83
3	4800.000	73.20	63.48	74.00	10.52	PK+	V	-9.72
4	10200.000	50.73	49.99	74.00	24.01	PK+	V	-0.74
5	16235.000	48.52	52.79	74.00	21.21	PK+	V	4.27
6	17680.000	47.86	52.87	74.00	21.13	PK+	V	5.01

**Final\_Result**

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	4799.617	54.44	44.72	54.00	9.28	AVG	V	-9.72	PASS

Mode:	BLE 2Mbps 2402MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

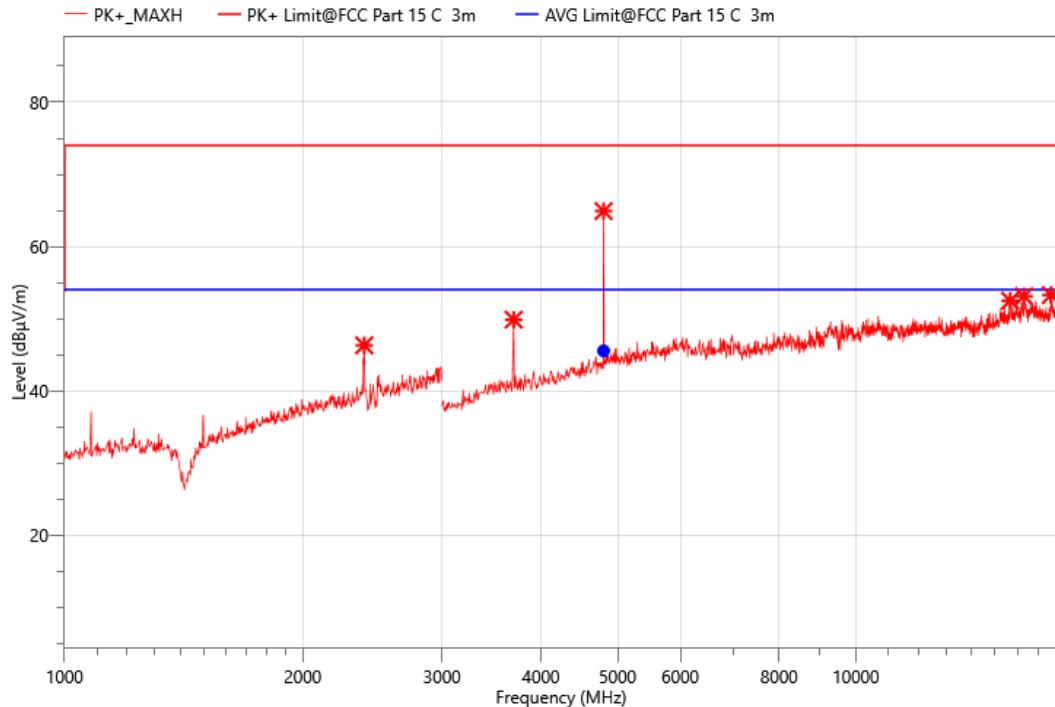


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	2392.000	57.81	46.33	74.00	27.67	PK+	H	-11.48
2	3695.000	63.58	49.88	74.00	24.12	PK+	H	-13.7
3	4800.000	74.64	64.92	74.00	9.08	PK+	H	-9.72
4	15670.000	49.27	52.50	74.00	21.50	PK+	H	3.23
5	16315.000	50.01	53.12	74.00	20.88	PK+	H	3.11
6	17645.000	48.76	53.28	74.00	20.72	PK+	H	4.52

### Final\_Result

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	4799.570	55.27	45.55	54.00	8.45	AVG	H	-9.72	PASS

Mode:	BLE 2Mbps 2440MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

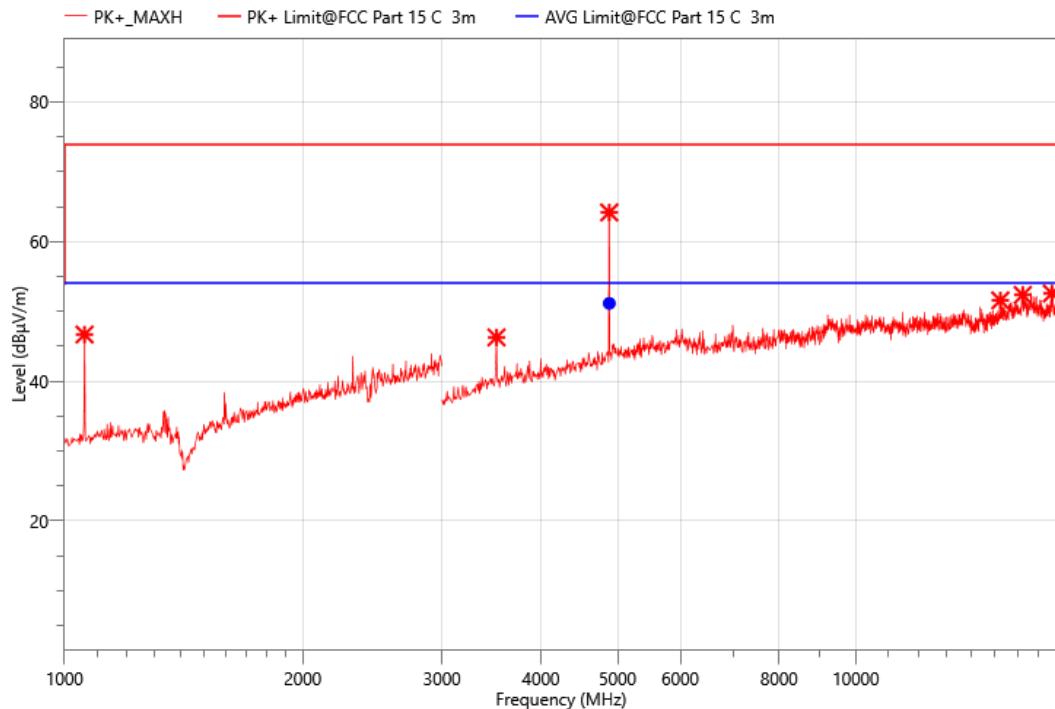


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	1060.000	66.17	46.68	74.00	27.32	PK+	V	-19.49
2	3515.000	60.40	46.27	74.00	27.73	PK+	V	-14.13
3	4880.000	73.16	64.18	74.00	9.82	PK+	V	-8.98
4	15230.000	48.87	51.57	74.00	22.43	PK+	V	2.7
5	16255.000	48.14	52.35	74.00	21.65	PK+	V	4.21
6	17695.000	47.73	52.56	74.00	21.44	PK+	V	4.83

### Final\_Result

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	4879.963	60.12	51.14	54.00	2.86	AVG	V	-8.98	PASS

Mode:	BLE 2Mbps 2440MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

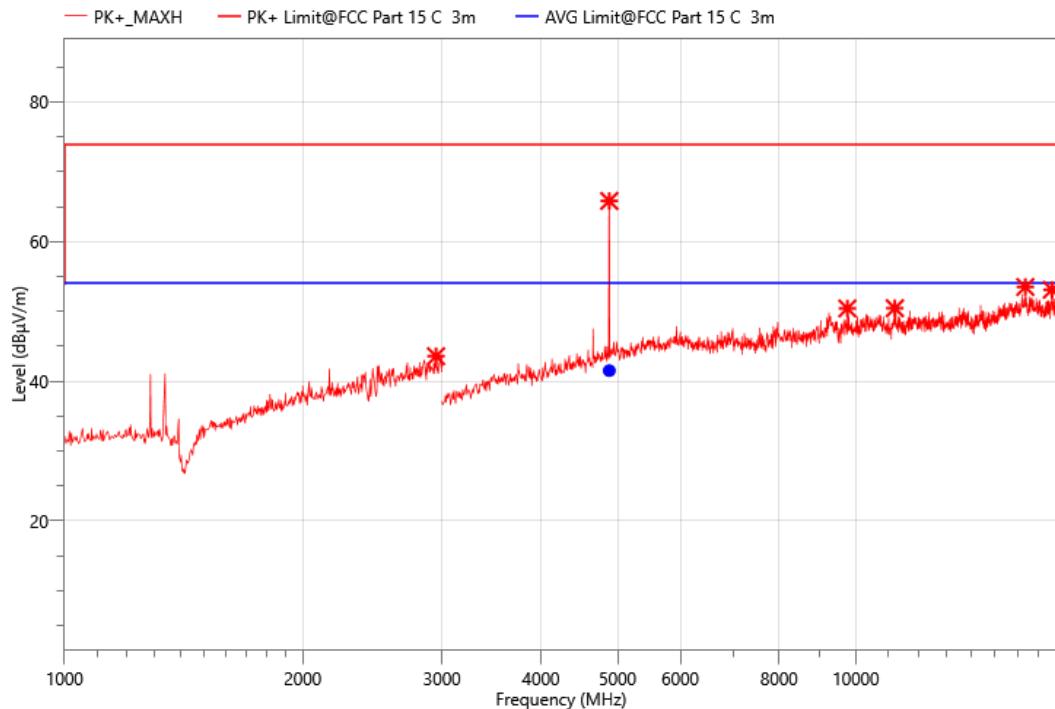


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	2948.000	53.41	43.57	74.00	30.43	PK+	H	-9.84
2	4880.000	74.81	65.83	74.00	8.17	PK+	H	-8.98
3	9760.000	51.36	50.42	74.00	23.58	PK+	H	-0.94
4	11205.000	50.37	50.45	74.00	23.55	PK+	H	0.08
5	16380.000	49.56	53.49	74.00	20.51	PK+	H	3.93
6	17695.000	48.26	53.09	74.00	20.91	PK+	H	4.83

### Final\_Result

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	4880.003	50.48	41.50	54.00	12.50	AVG	H	-8.98	PASS

Mode:	BLE 2Mbps 2480MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

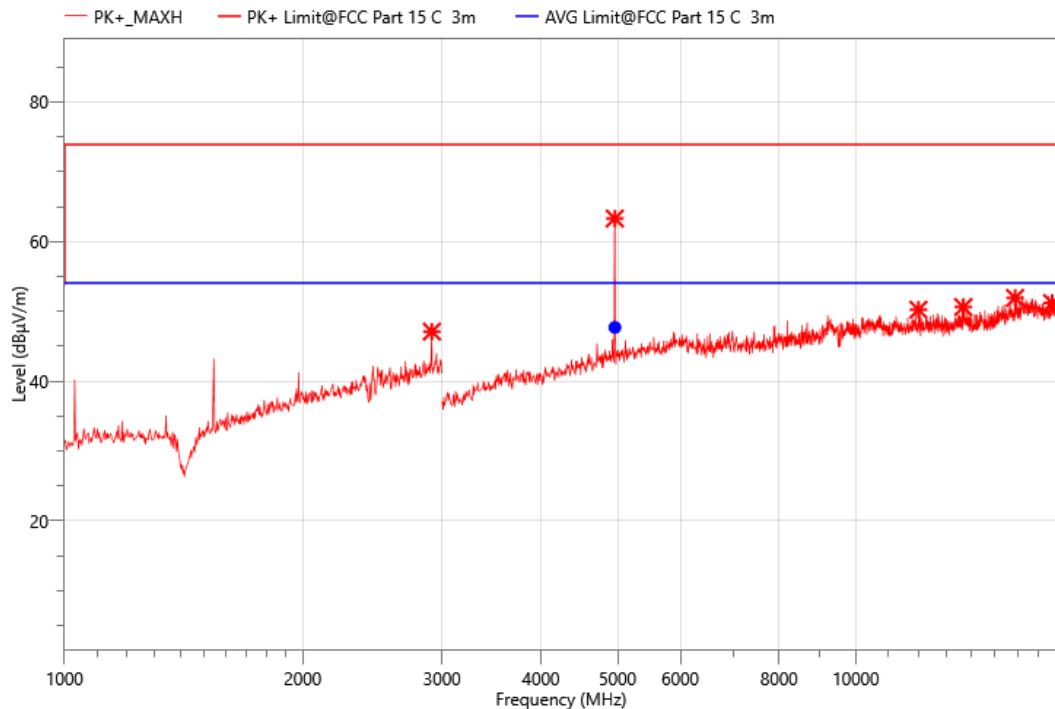


### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	2912.000	57.30	47.09	74.00	26.91	PK+	H	-10.21
2	4960.000	72.16	63.30	74.00	10.70	PK+	H	-8.86
3	12000.000	49.65	50.24	74.00	23.76	PK+	H	0.59
4	13675.000	48.24	50.62	74.00	23.38	PK+	H	2.38
5	15900.000	49.03	51.92	74.00	22.08	PK+	H	2.89
6	17705.000	46.54	51.20	74.00	22.80	PK+	H	4.66

### Final\_Result

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	4959.895	56.56	47.70	54.00	6.30	AVG	H	-8.86	PASS

Mode:	BLE 2Mbps 2480MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

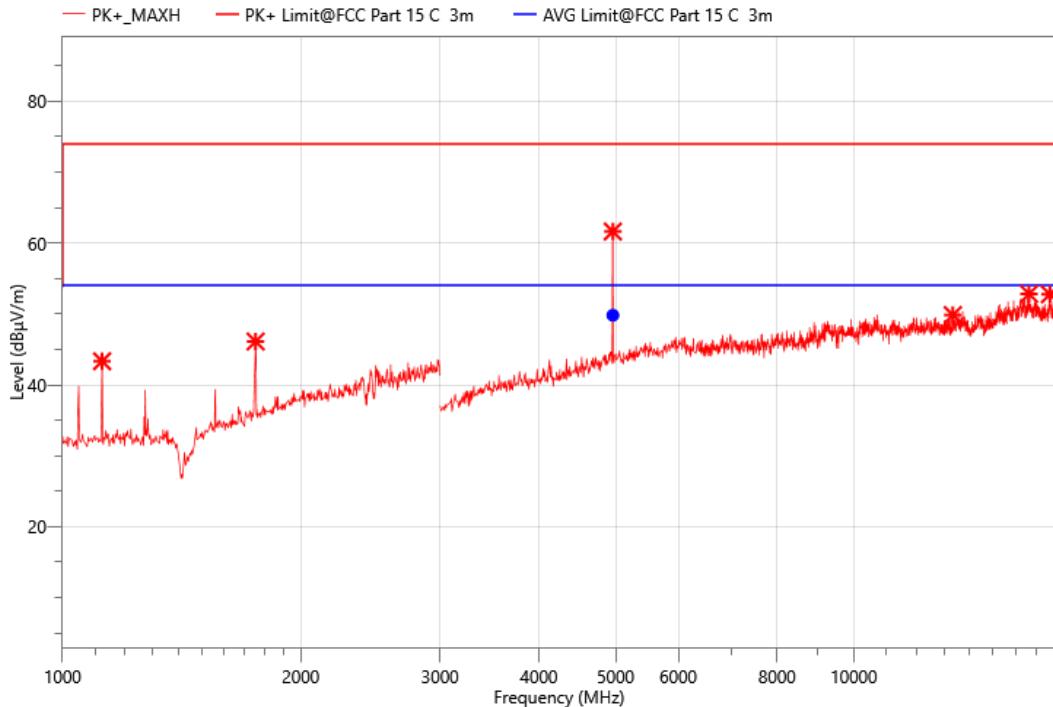

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	1122.000	62.87	43.33	74.00	30.67	PK+	V	-19.54
2	1754.000	61.72	46.11	74.00	27.89	PK+	V	-15.61
3	4960.000	70.48	61.62	74.00	12.38	PK+	V	-8.86
4	13340.000	49.17	49.84	74.00	24.16	PK+	V	0.67
5	16655.000	48.49	52.82	74.00	21.18	PK+	V	4.33
6	17695.000	47.93	52.76	74.00	21.24	PK+	V	4.83

### Final\_Result


No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	4959.892	58.67	49.81	54.00	4.19	AVG	V	-8.86	PASS

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:** (1) All Readings are Peak Value and AV.  
 (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.  
 (3) The average measurement was not performed when the peak measured data under the limit of average detection.  
 (4) Measuring frequencies from 1GHz to 25GHz.


**Band edge:**

Mode:	BLE 2Mbps 2402MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

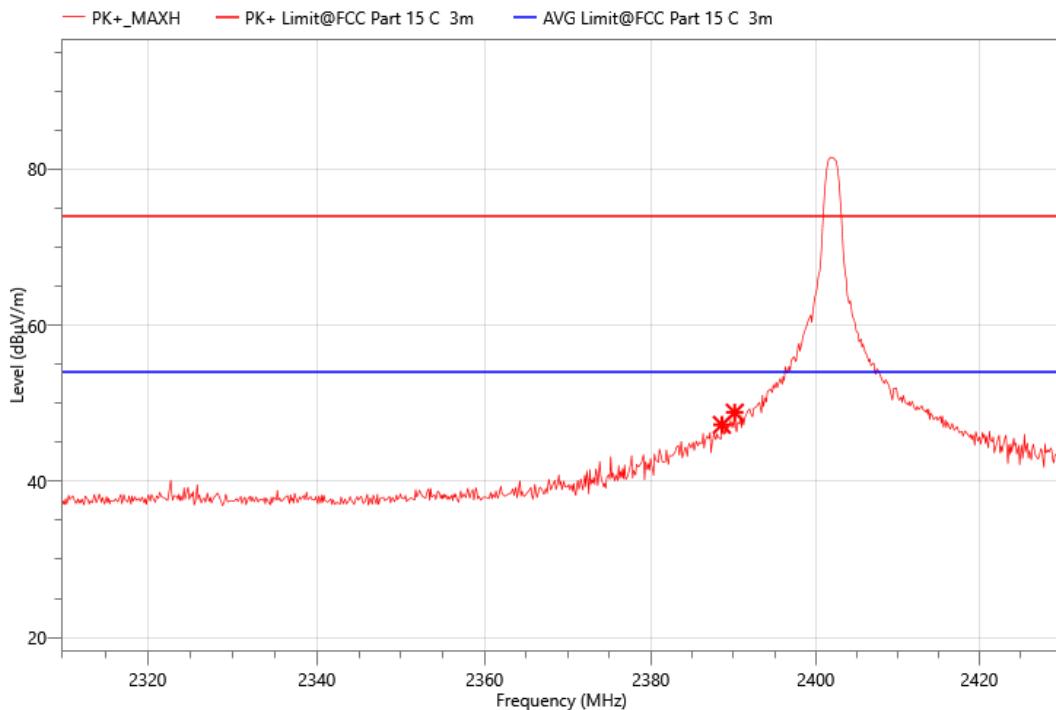**Critical\_Freqs**

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	2388.600	67.98	47.25	74.00	26.75	PK+	H	-20.73
2	2390.160	69.55	48.82	74.00	25.18	PK+	H	-20.73


Mode:	BLE 2Mbps 2402MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

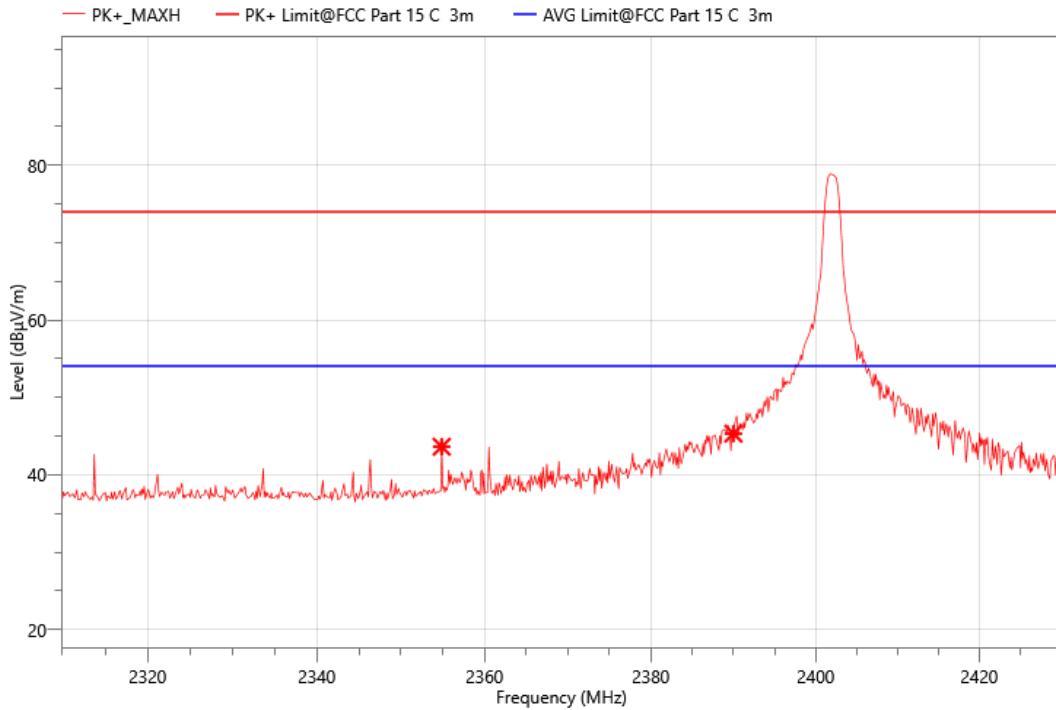

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	2354.880	64.39	43.64	74.00	30.36	PK+	V	-20.75
2	2390.000	66.06	45.33	74.00	28.67	PK+	V	-20.73

Mode:	BLE 2Mbps 2480MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

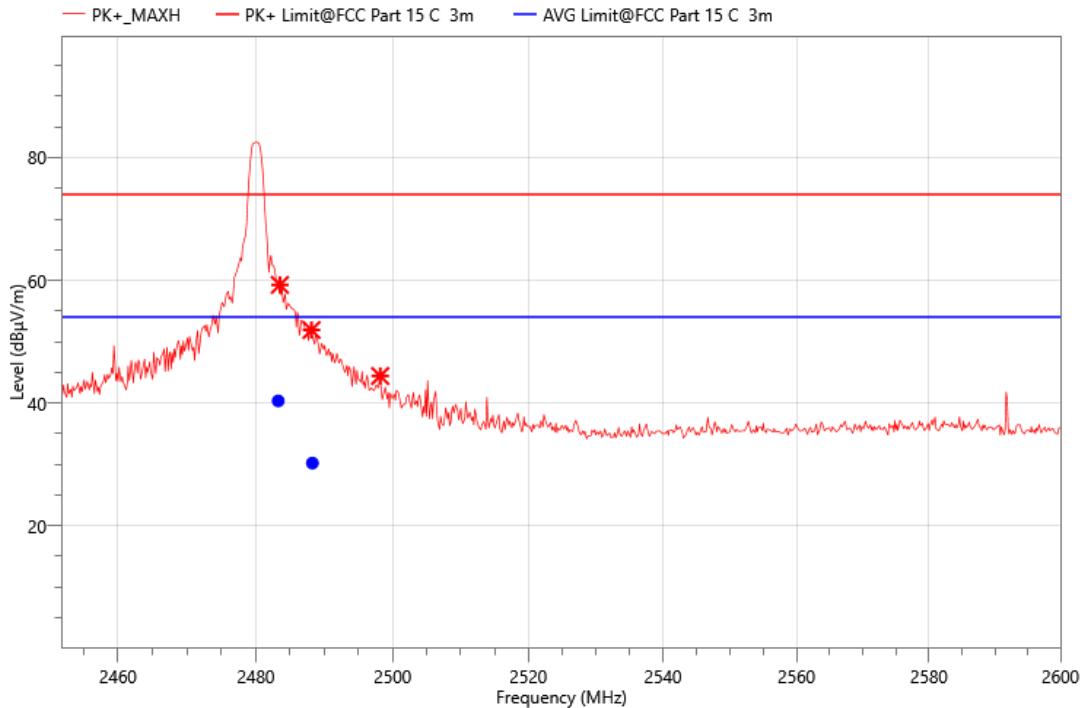


## Critical\_Freqs

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	2483.500	79.56	59.26	74.00	14.74	PK+	H	-20.3
2	2488.112	72.18	51.90	74.00	22.10	PK+	H	-20.28
3	2498.176	64.67	44.41	74.00	29.59	PK+	H	-20.26

## Final\_Result

No.	Freq. (MHz)	Reading (dB $\mu$ V)	Meas. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	2483.255	60.64	40.34	54.00	13.66	AVG	H	-20.3	PASS
2	2488.245	50.48	30.20	54.00	23.80	AVG	H	-20.28	PASS

Mode:	BLE 2Mbps 2480MHz
Power:	DC 5V
TE:	Berny
Date	2023/7/29
T/A/P	24.3°C/54%/101Kpa

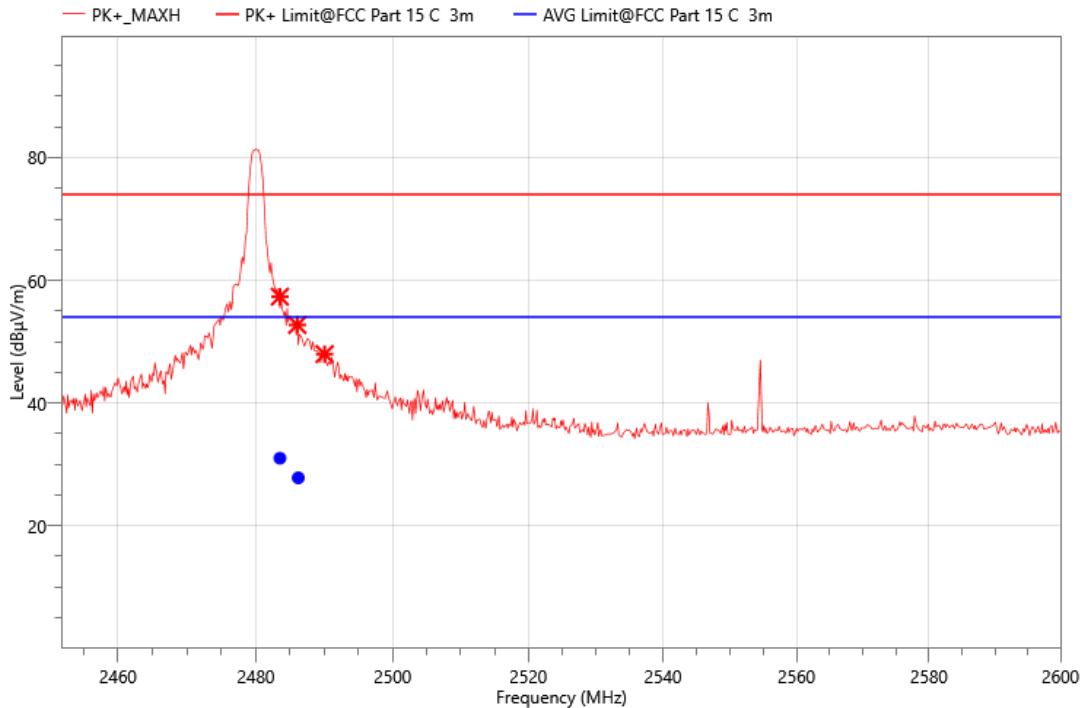

### Critical\_Freqs

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Corr. (dB)
1	2483.500	77.64	57.34	74.00	16.66	PK+	V	-20.3
2	2486.040	73.02	52.73	74.00	21.27	PK+	V	-20.29
3	2490.036	68.26	47.98	74.00	26.02	PK+	V	-20.28

### Final\_Result

No.	Freq. (MHz)	Reading (dBμV)	Meas. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Det.	Pol.	Corr. (dB)	Verdict
1	2483.500	51.29	30.99	54.00	23.01	AVG	V	-20.3	PASS
2	2486.179	48.09	27.80	54.00	26.20	AVG	V	-20.29	PASS

## 9. ANTENNA REQUIREMENT

### **REQUIREMENT**

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **DESCRIPTION**

Pass

## 10. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a)

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

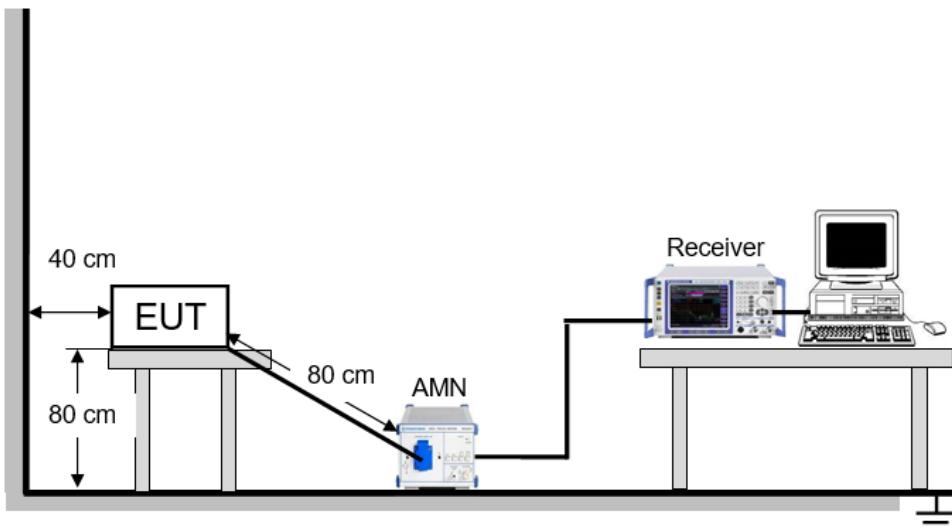

### TEST ENVIRONMENT


Temperature	26.1 °C	Relative Humidity	44%
Atmosphere Pressure	101kPa		

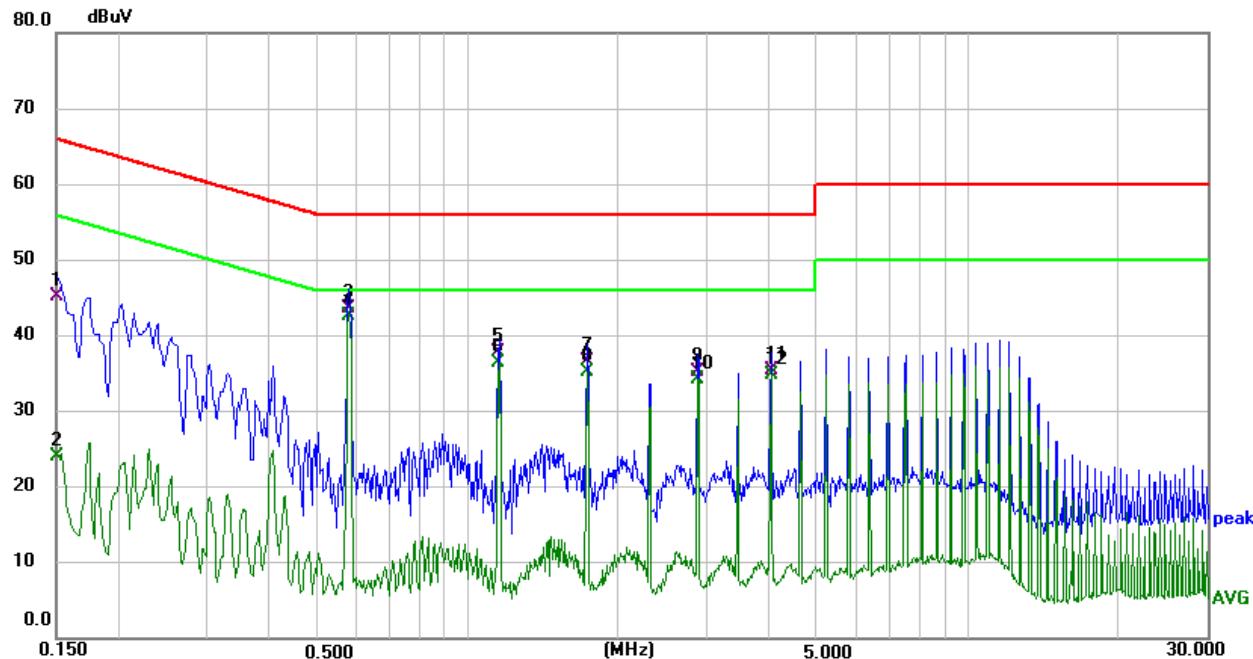**TEST RESULTS**

Phase: N

Mode: BLE 2Mbps 2402MHz

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1500	35.39	9.84	45.23	66.00	-20.77	QP	
2	0.1500	14.24	9.84	24.08	56.00	-31.92	AVG	
3	0.5780	32.89	10.73	43.62	56.00	-12.38	QP	
4 *	0.5780	31.77	10.73	42.50	46.00	-3.50	AVG	
5	1.1539	28.28	9.61	37.89	56.00	-18.11	QP	
6	1.1539	26.82	9.61	36.43	46.00	-9.57	AVG	
7	1.7300	26.96	9.62	36.58	56.00	-19.42	QP	
8	1.7300	25.56	9.62	35.18	46.00	-10.82	AVG	
9	2.8820	25.47	9.65	35.12	56.00	-20.88	QP	
10	2.8820	24.63	9.65	34.28	46.00	-11.72	AVG	
11	4.0420	25.77	9.68	35.45	56.00	-20.55	QP	
12	4.0420	25.17	9.68	34.85	46.00	-11.15	AVG	

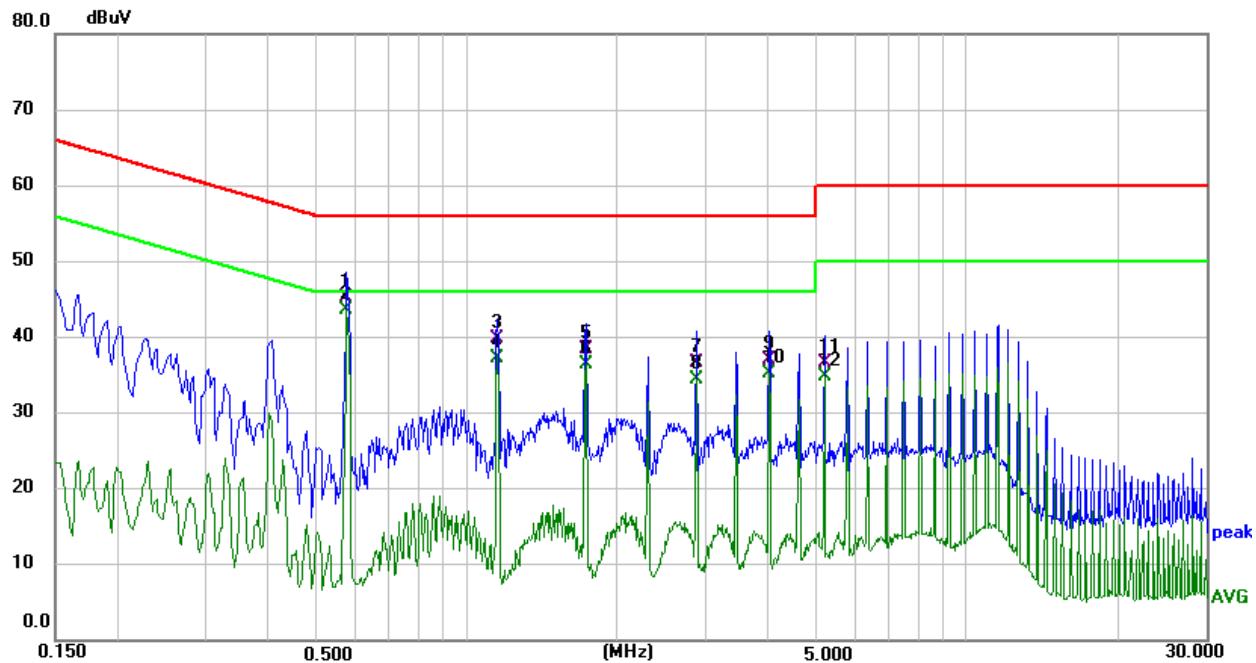

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.5740	34.52	10.71	45.23	56.00	-10.77	QP	
2 *	0.5740	32.92	10.71	43.63	46.00	-2.37	AVG	
3	1.1500	30.25	9.61	39.86	56.00	-16.14	QP	
4	1.1500	27.59	9.61	37.20	46.00	-8.80	AVG	
5	1.7260	28.83	9.62	38.45	56.00	-17.55	QP	
6	1.7260	26.86	9.62	36.48	46.00	-9.52	AVG	
7	2.8740	26.87	9.65	36.52	56.00	-19.48	QP	
8	2.8740	24.82	9.65	34.47	46.00	-11.53	AVG	
9	4.0260	27.29	9.67	36.96	56.00	-19.04	QP	
10	4.0260	25.48	9.67	35.15	46.00	-10.85	AVG	
11	5.1740	26.83	9.71	36.54	60.00	-23.46	QP	
12	5.1740	25.18	9.71	34.89	50.00	-15.11	AVG	

## Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## **11. TEST DATA**

Please refer to section "Test Data" - Appendix B

## APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION

Please refer to test report: **E04A23060949F00101**.

## **APPENDIX: PHOTOGRAPHS OF THE EUT**

Please refer to test report: **E04A23060949F00101**.

**END OF REPORT**