

Product specification

Quick Reference Data

	Internal antenna	
Frequency	2.45GHz*	
Ant.Port Input Pwr.(dBm)	0(Typ.BT class 2 output power)	
Tot.Rad.Pwr.(dBm)	-2.3(Input pwr-loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity(dBi)	1 (all direction antenna)	
Efficiency(dB)	-2.3(58.5%)	
Gain(dBi)	1.68(Peak Gain XZ-plane)	
Maximum Power(dBm)	1.35(XY- plane)	
Maximum Power(dBm)	-4(XY-plane)	
Avg.Power(dBm)	-0.5(XY-plane)	
Max/Min Ratio(dB)	5.3(XY-plane)	
Max/Avg Ratio(dB)	1.8(XY-plane)	
Min/Avg Ratio(dB)	-3.5(XY-plane)	
Average Gain(dB)	-0.48(Avg Gain XY-plane)	

RAIN International Technology Co.,Ltd.

709, Building F, Yuxing Technology Industrial Park, Nanchang Third Industrial Zone, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen City


All the technical data and information contained herein are subject to change without prior notice

Antenna Gain


Gain Table

Unit in dBi @ 2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg	Peak	Avg	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	58.5%



Return Loss

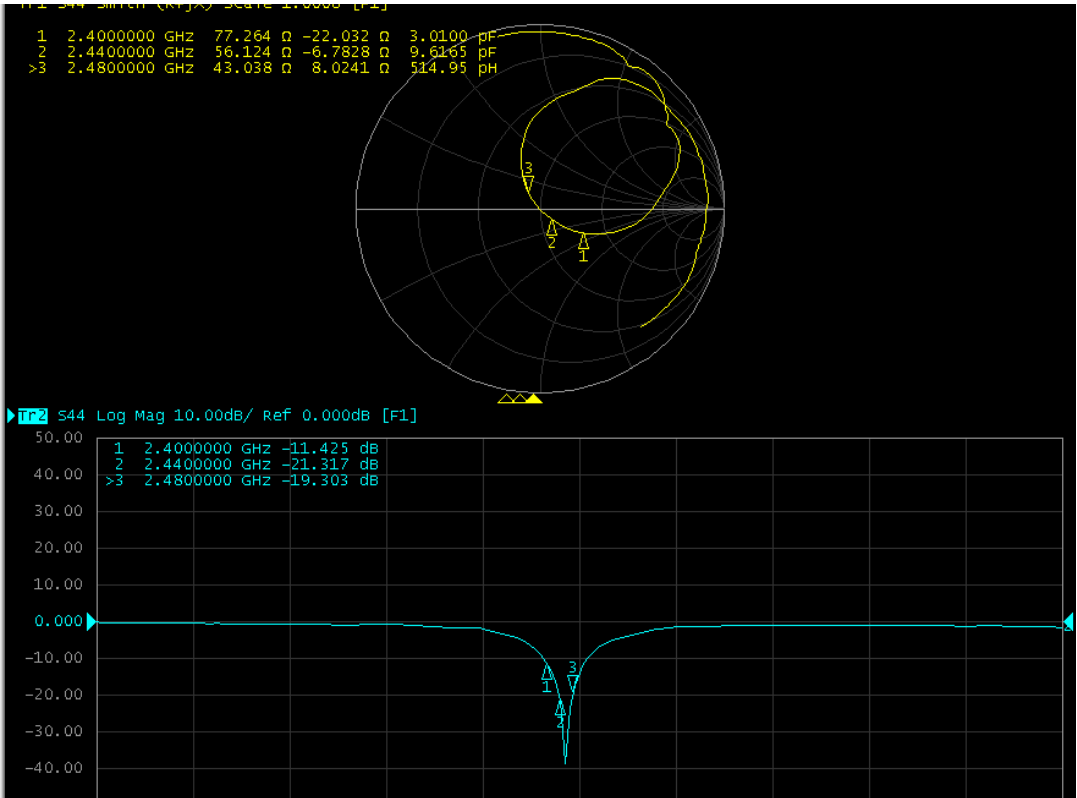


Antenna Size

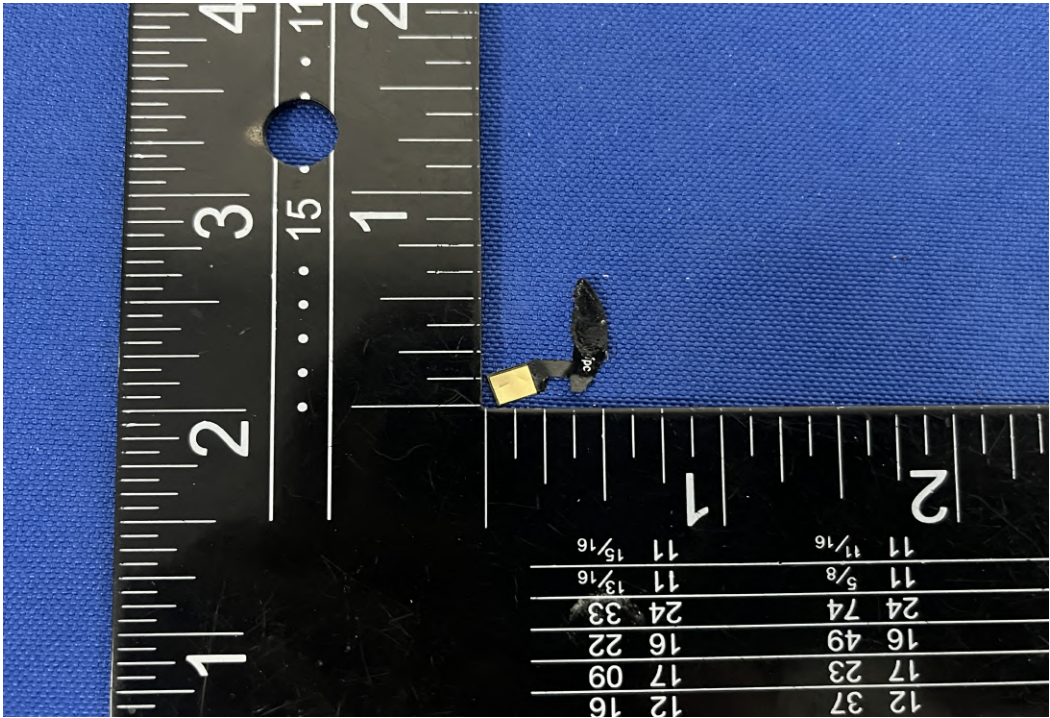

The Environment of Antenna Radiation Pattern

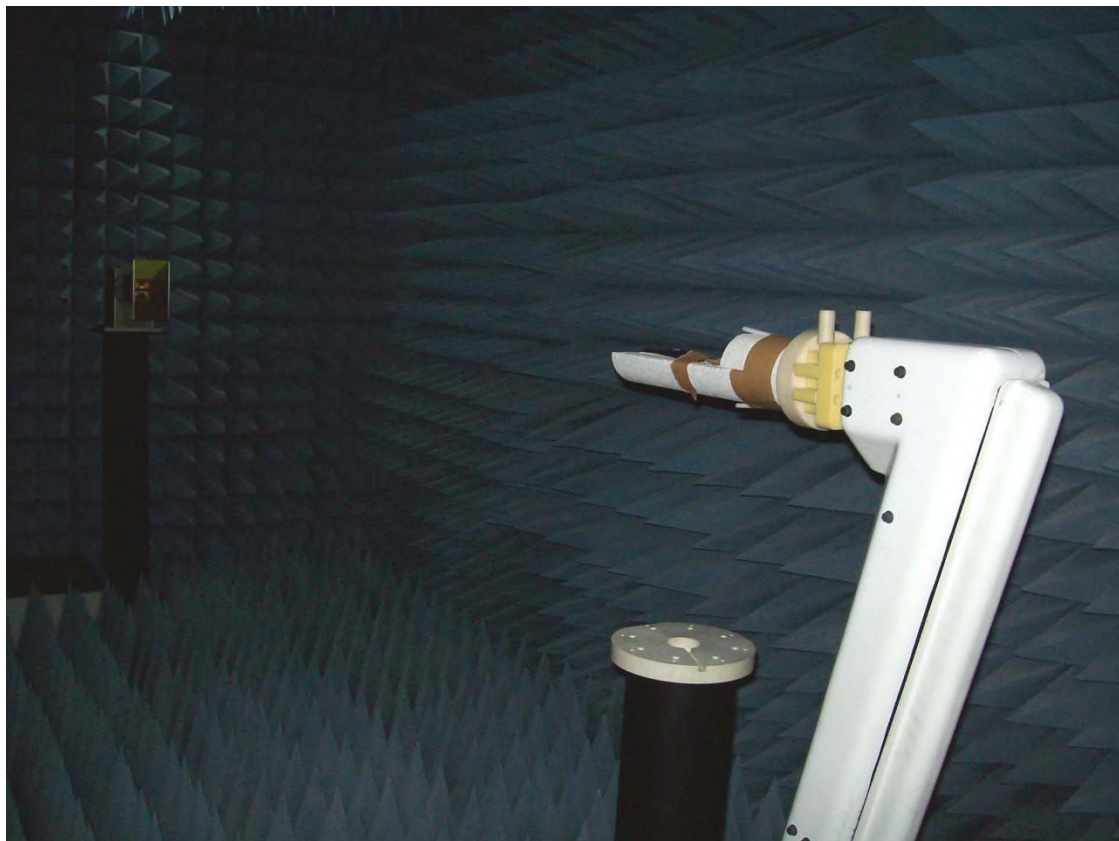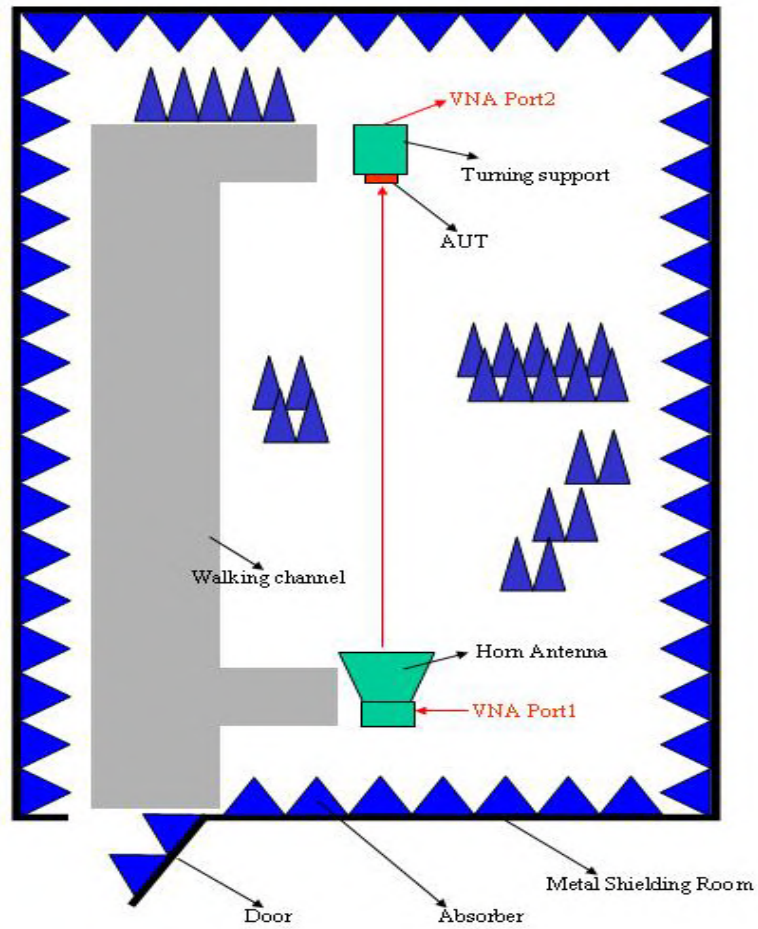


3D radiation pattern diagram

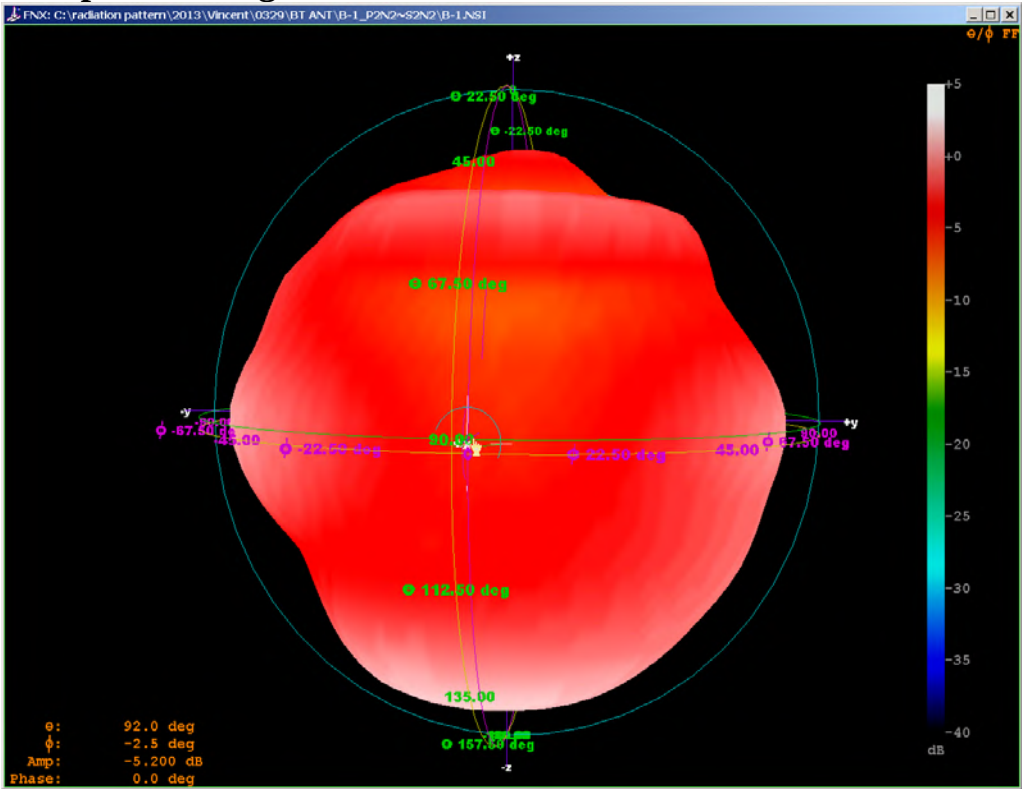


XY-plane

Far-field Power Distribution(H+V) on X-Y Plane
Plot Peak Gain(H+V)= 1.35 dBi; Plot AvgGain(H+V)= -0.48dBi @2.44000 GHz

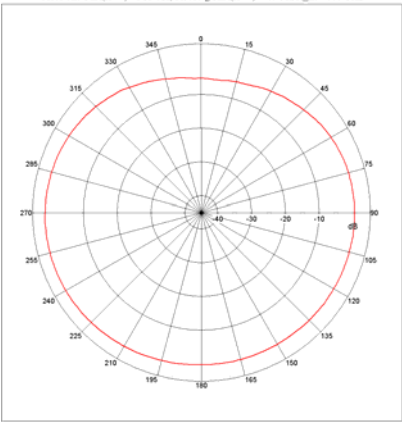

XZ-plane

Far-field Power Distribution(H+V) on X-Z Plane
Plot Peak Gain(H+V)= 1.68 dBi; Plot AvgGain(H+V)= -3.83dBi @2.44000 GHz

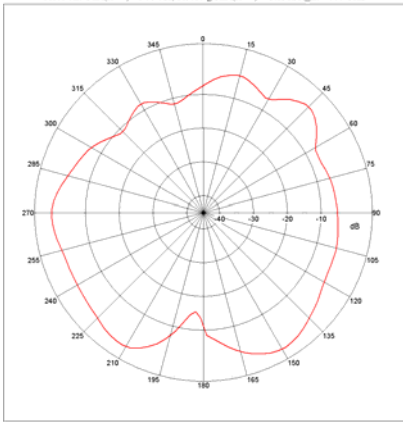

YZ-plane

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dBi; Plot AvgGain(H+V)= -2.99dBi @2.44000 GHz

