

9. Maximum Peak Conducted Output Power

9.1 Standard and Limit

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

9.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 2MHz, VBW = 6MHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and mark the value.
- 5) Repeat the above procedures until all frequencies measured were complete.



Test Setup Block Diagram

9.3 Test Data and Results


Left earphone:

Test Mode	Test Channel MHz	Conducted Output Power (dBm)	Limit (dBm)	Test Result
GFSK	2402	-4.04	21	Pass
	2441	-4.93	21	Pass
	2480	-5.56	21	Pass
Pi/4 DQPSK	2402	-3.2	21	Pass
	2441	-4.04	21	Pass
	2480	-4.66	21	Pass


Right earphone:

Test Mode	Test Channel MHz	Conducted Output Power (dBm)	Limit (dBm)	Test Result
GFSK	2402	-3.3	21	Pass
	2441	-3.31	21	Pass
	2480	-3.9	21	Pass
Pi/4 DQPSK	2402	-2.45	21	Pass
	2441	-2.41	21	Pass
	2480	-3.02	21	Pass

Left earphone:

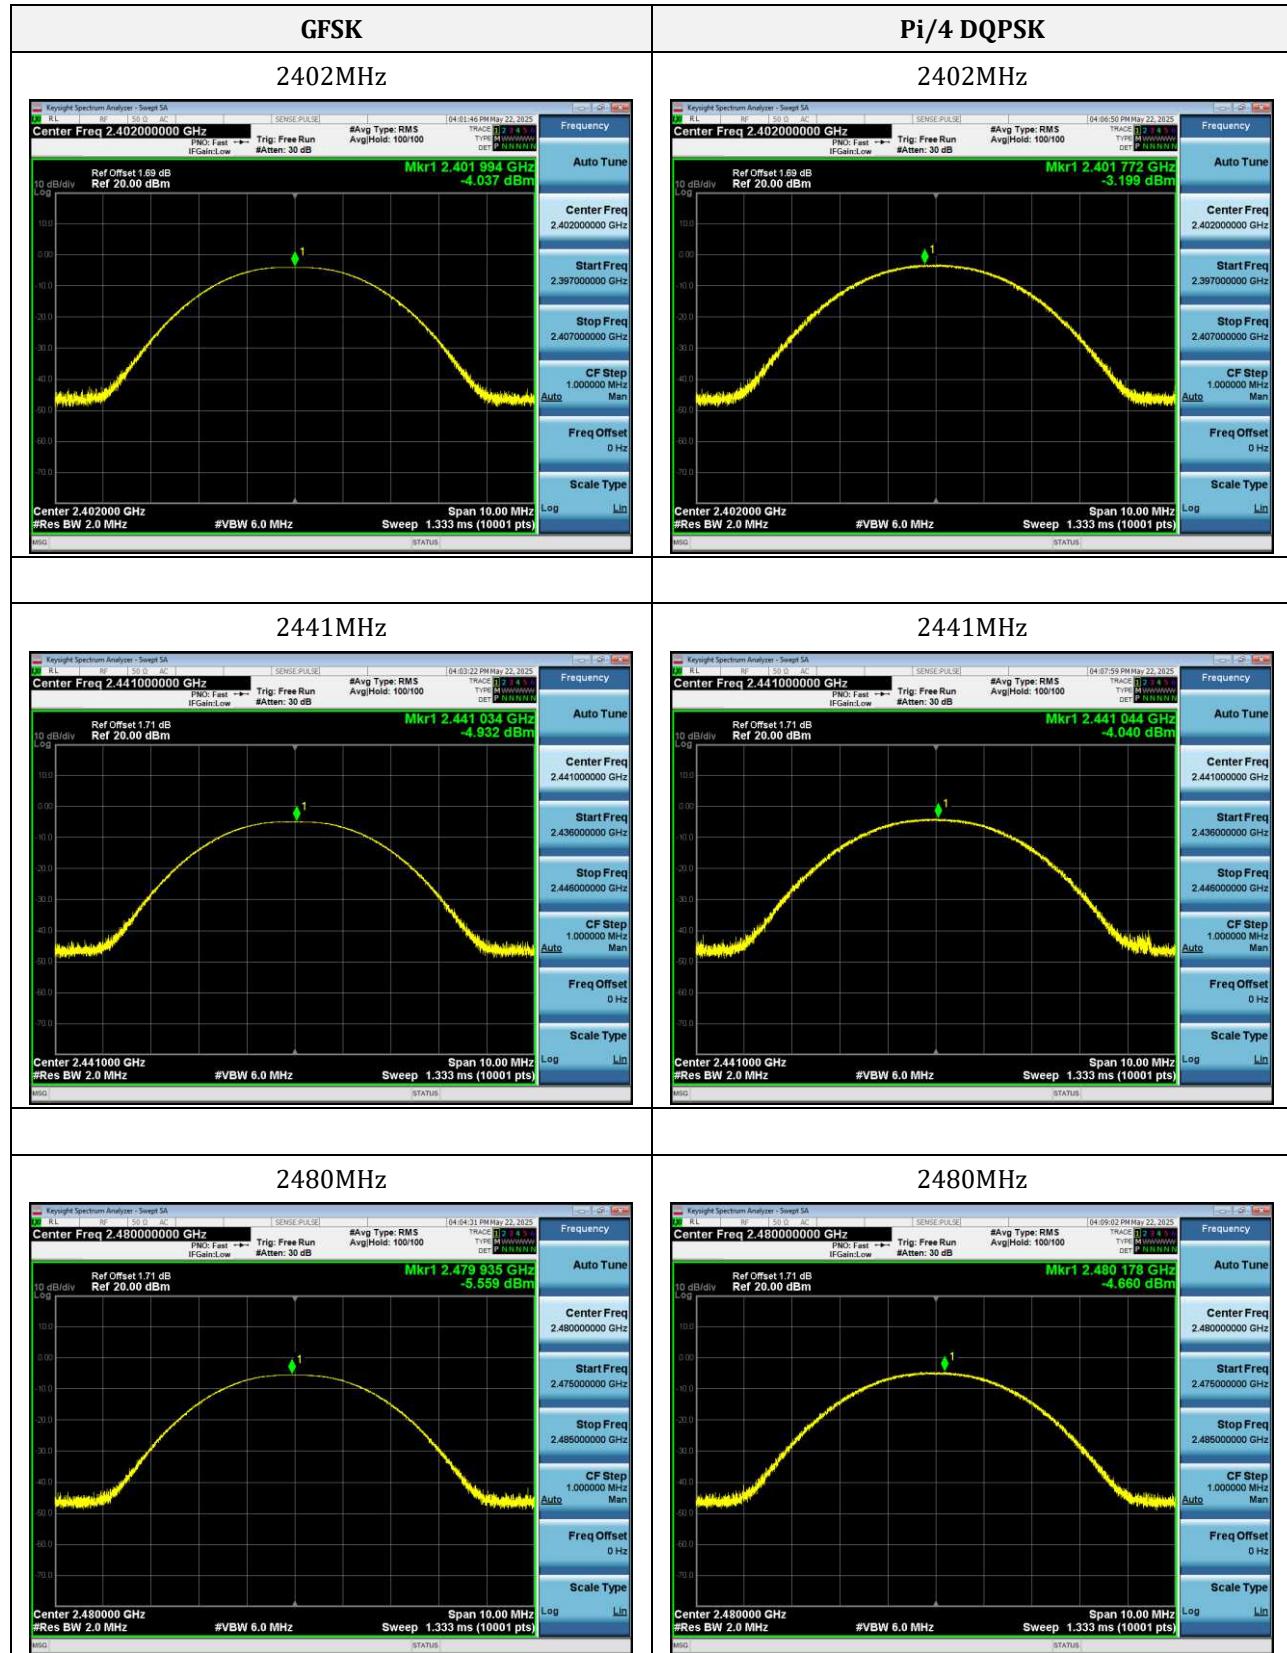

Right earphone:

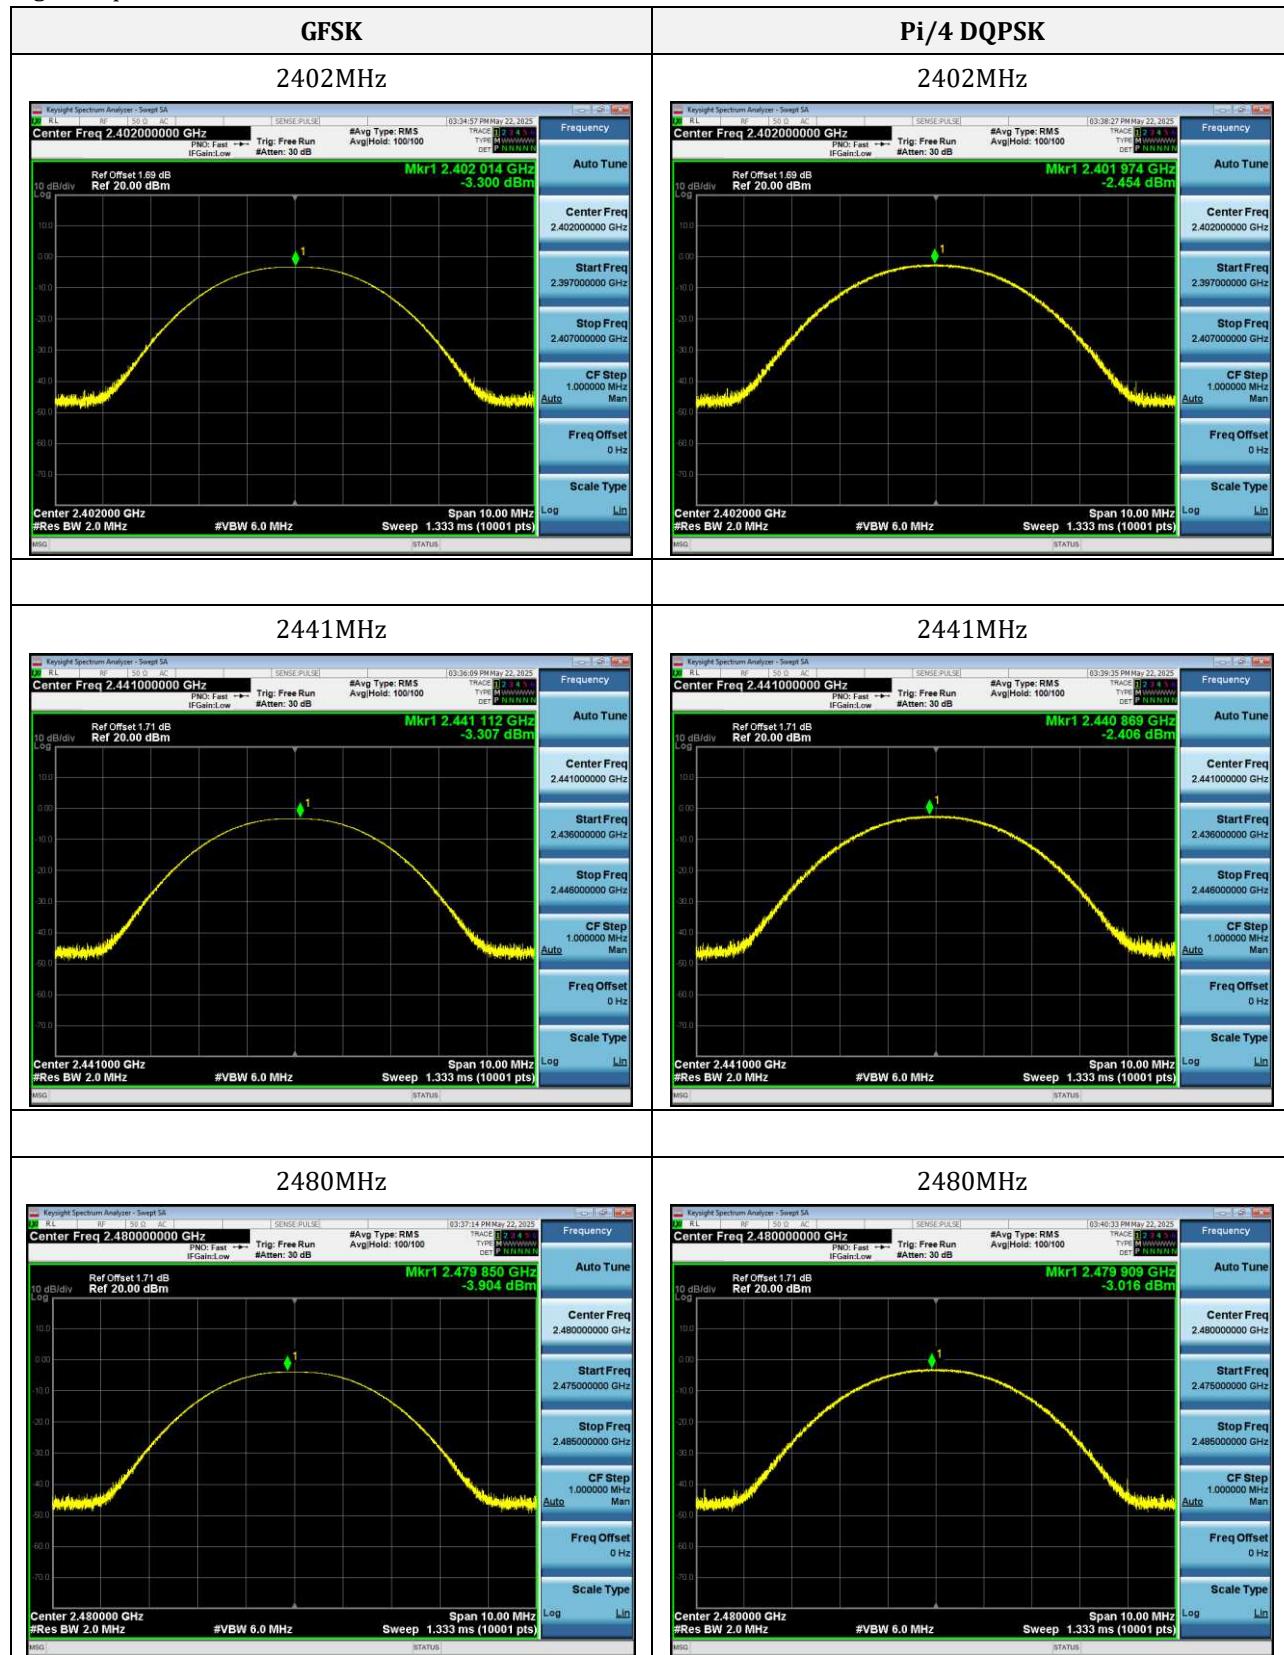

10. Occupied Bandwidth(-20dB)

10.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

10.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 30kHz, VBW = 100kHz, Sweep = Auto.
- 4) Set a reference level on the measuring instrument equal to the highest peak value.
- 5) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- 6) Repeat the above procedures until all frequencies measured were complete.



10.3 Test Data and Results


Left earphone:

Test Mode	Test Channel (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (kHz)
GFSK	2402	1.054	971.97
	2441	1.048	970.27
	2480	1.044	967.3
Pi/4 DQPSK	2402	1.325	1232.5
	2441	1.307	1224.2
	2480	1.324	1221.2


Right earphone:

Test Mode	Test Channel (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (kHz)
GFSK	2402	1.043	932.07
	2441	1.016	929.44
	2480	1.027	933.94
Pi/4 DQPSK	2402	1.297	1196.6
	2441	1.288	1203.5
	2480	1.311	1204.5

Left earphone:

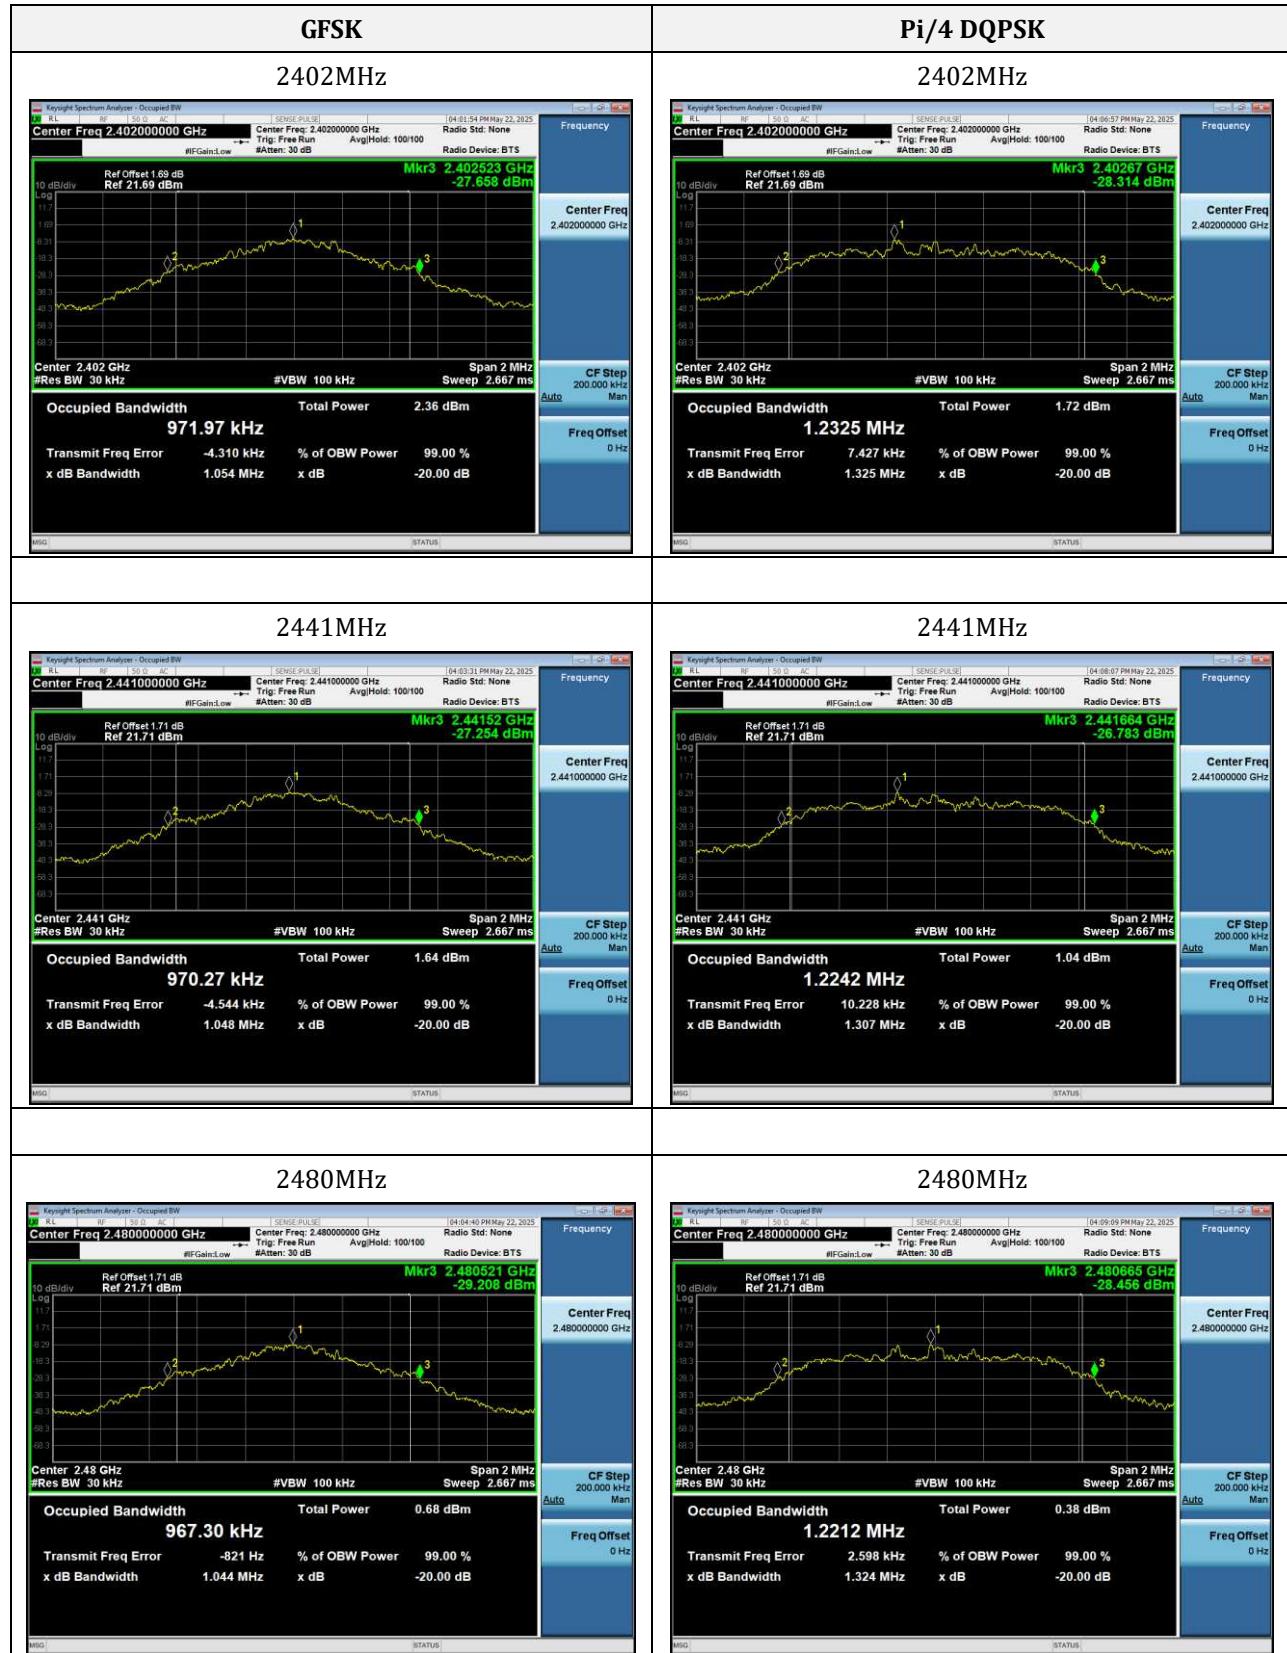

Right earphone:

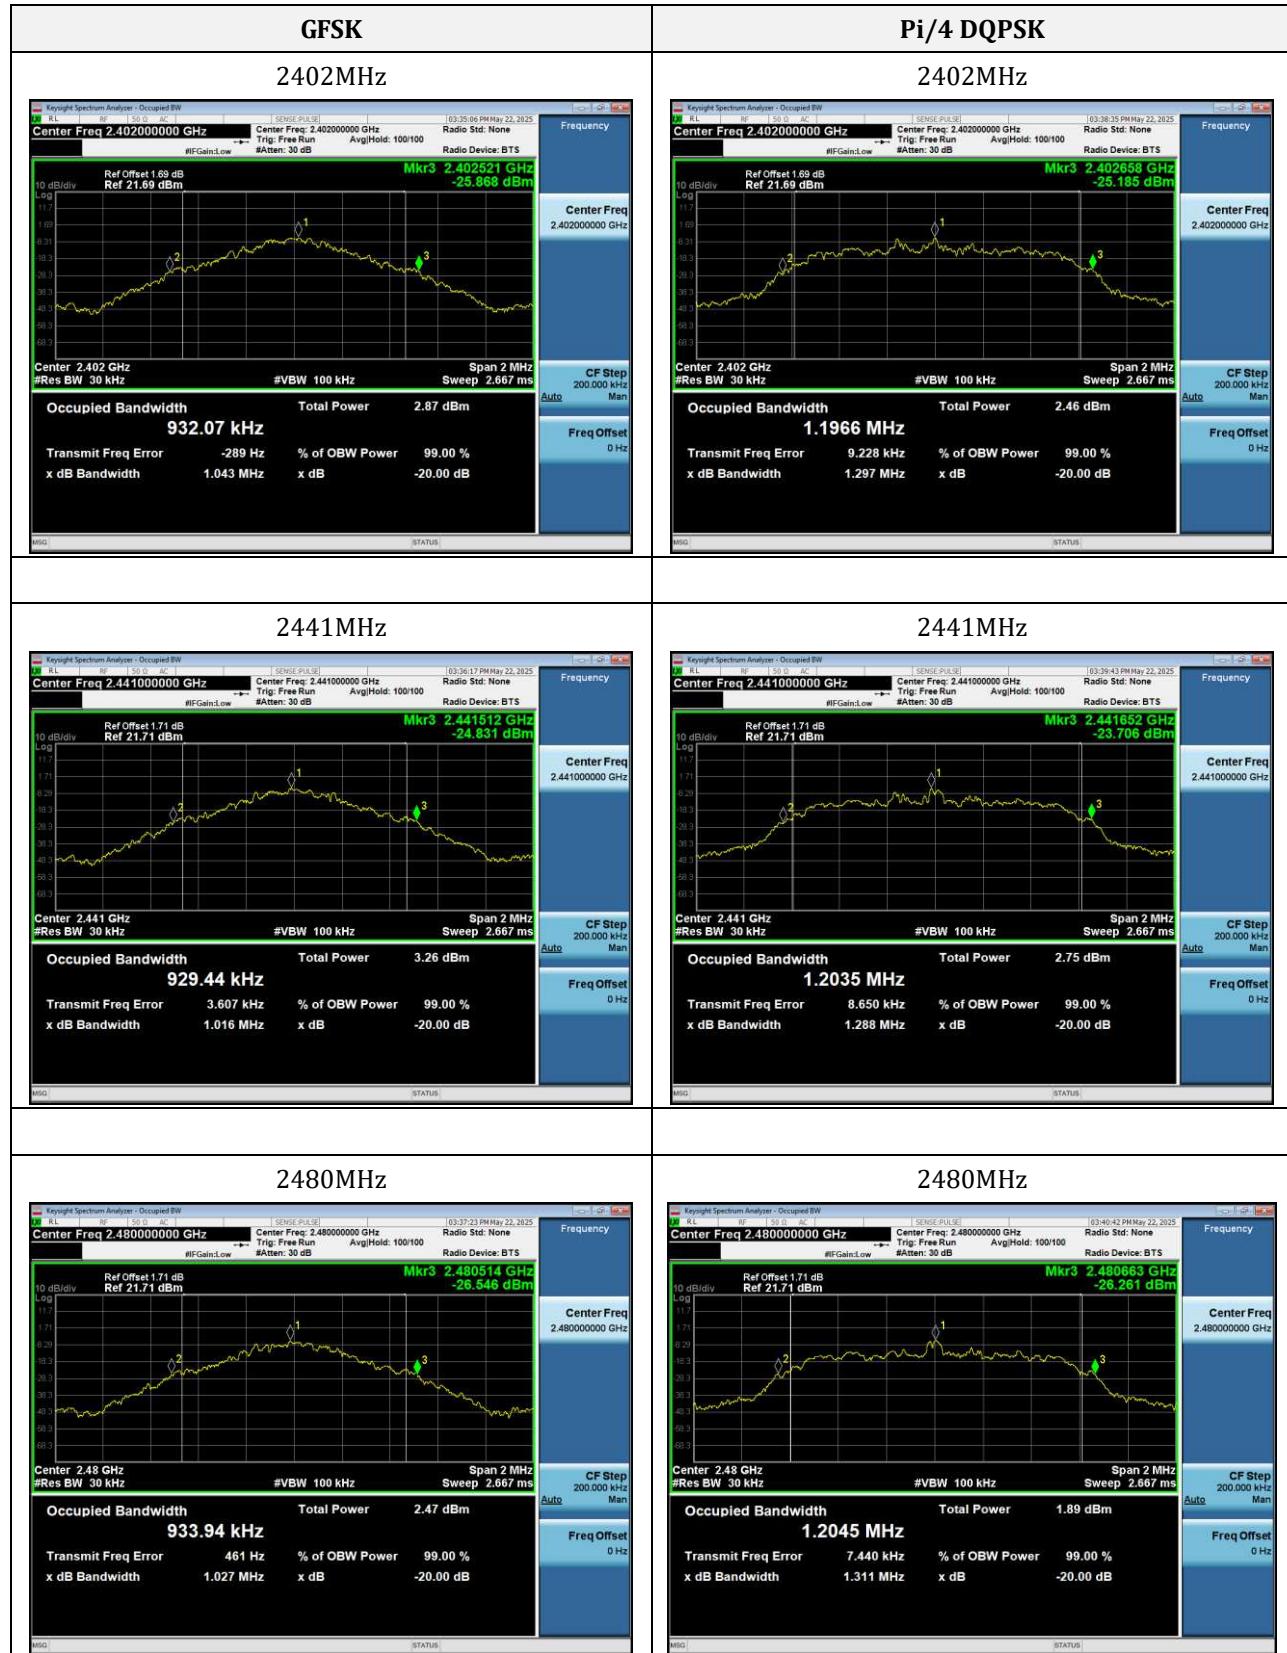

11. Carrier Frequencies Separation

11.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 30kHz, VBW = 100kHz, Sweep = Auto, Detector = Peak.
- 4) By using the Max Hold function, record the separation of two adjacent channels.
- 5) Measure the frequency difference of these two adjacent channels by spectrum analyzer mark function. and then plot the result on the screen of the spectrum analyzer.
- 6) Repeat above procedures until all frequencies measured were complete.



Test Setup Block Diagram

11.3 Test Data and Results

Left earphone:


Test Mode	Test Channel	Test Freq. 1 (MHz)	Test Freq. 2 (MHz)	CFS (MHz)	Limit (MHz)
GFSK	Lowest	2402.02	2402.984	0.964	0.703
	Middle	2440.98	2441.984	1.004	0.699
	Highest	2478.972	2479.98	1.008	0.696
Pi/4 DQPSK	Lowest	2401.84	2402.844	1.004	0.883
	Middle	2440.87	2442.156	1.286	0.871
	Highest	2478.996	2480.134	1.138	0.883

Right earphone:


Test Mode	Test Channel	Test Freq. 1 (MHz)	Test Freq. 2 (MHz)	CFS (MHz)	Limit (MHz)
GFSK	Lowest	2401.996	2402.976	0.98	0.695
	Middle	2440.974	2441.992	1.018	0.677
	Highest	2478.996	2480.002	1.006	0.685
Pi/4 DQPSK	Lowest	2402.004	2402.998	0.994	0.865
	Middle	2440.996	2441.982	0.986	0.859
	Highest	2478.994	2480.002	1.008	0.874

Note: CFS(Channel Frequency Separation) = Test Freq. 2 - Test Freq. 1

Left earphone:

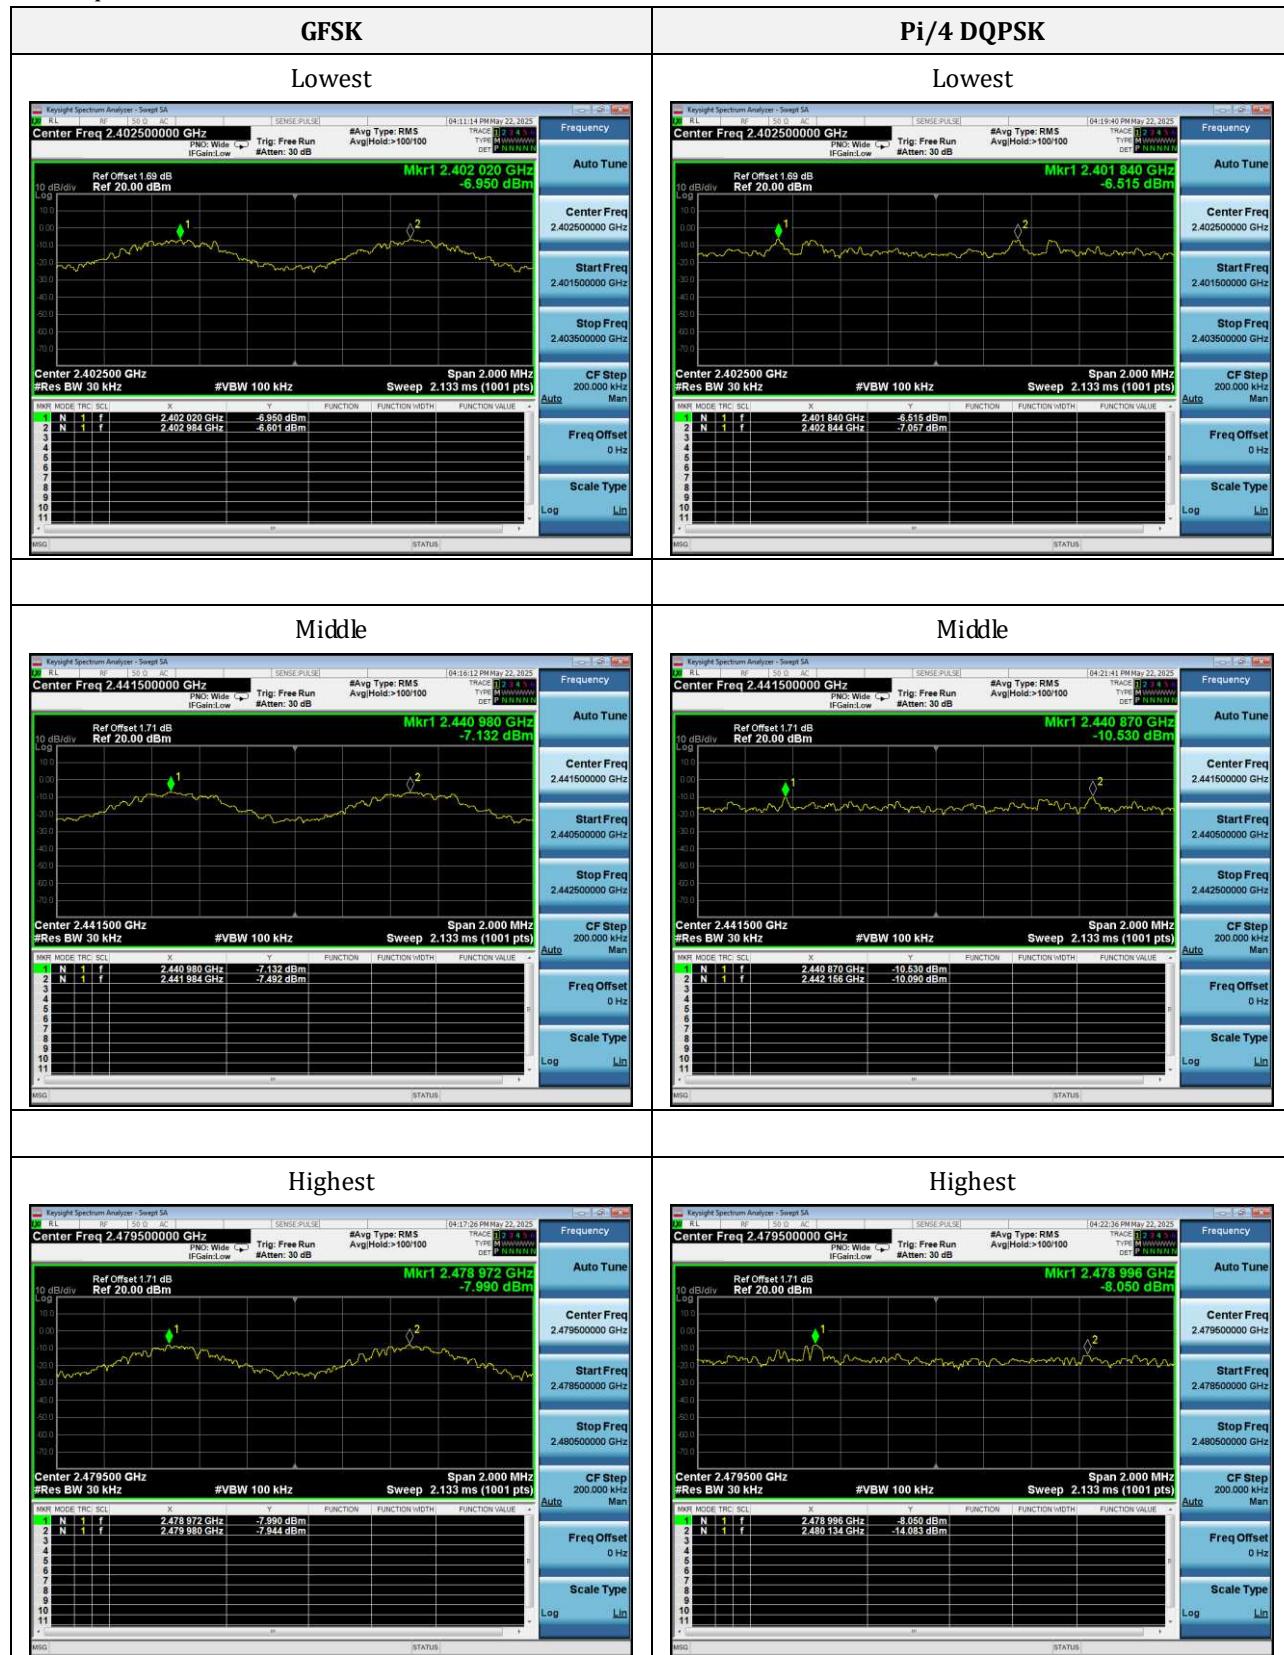

Right earphone:

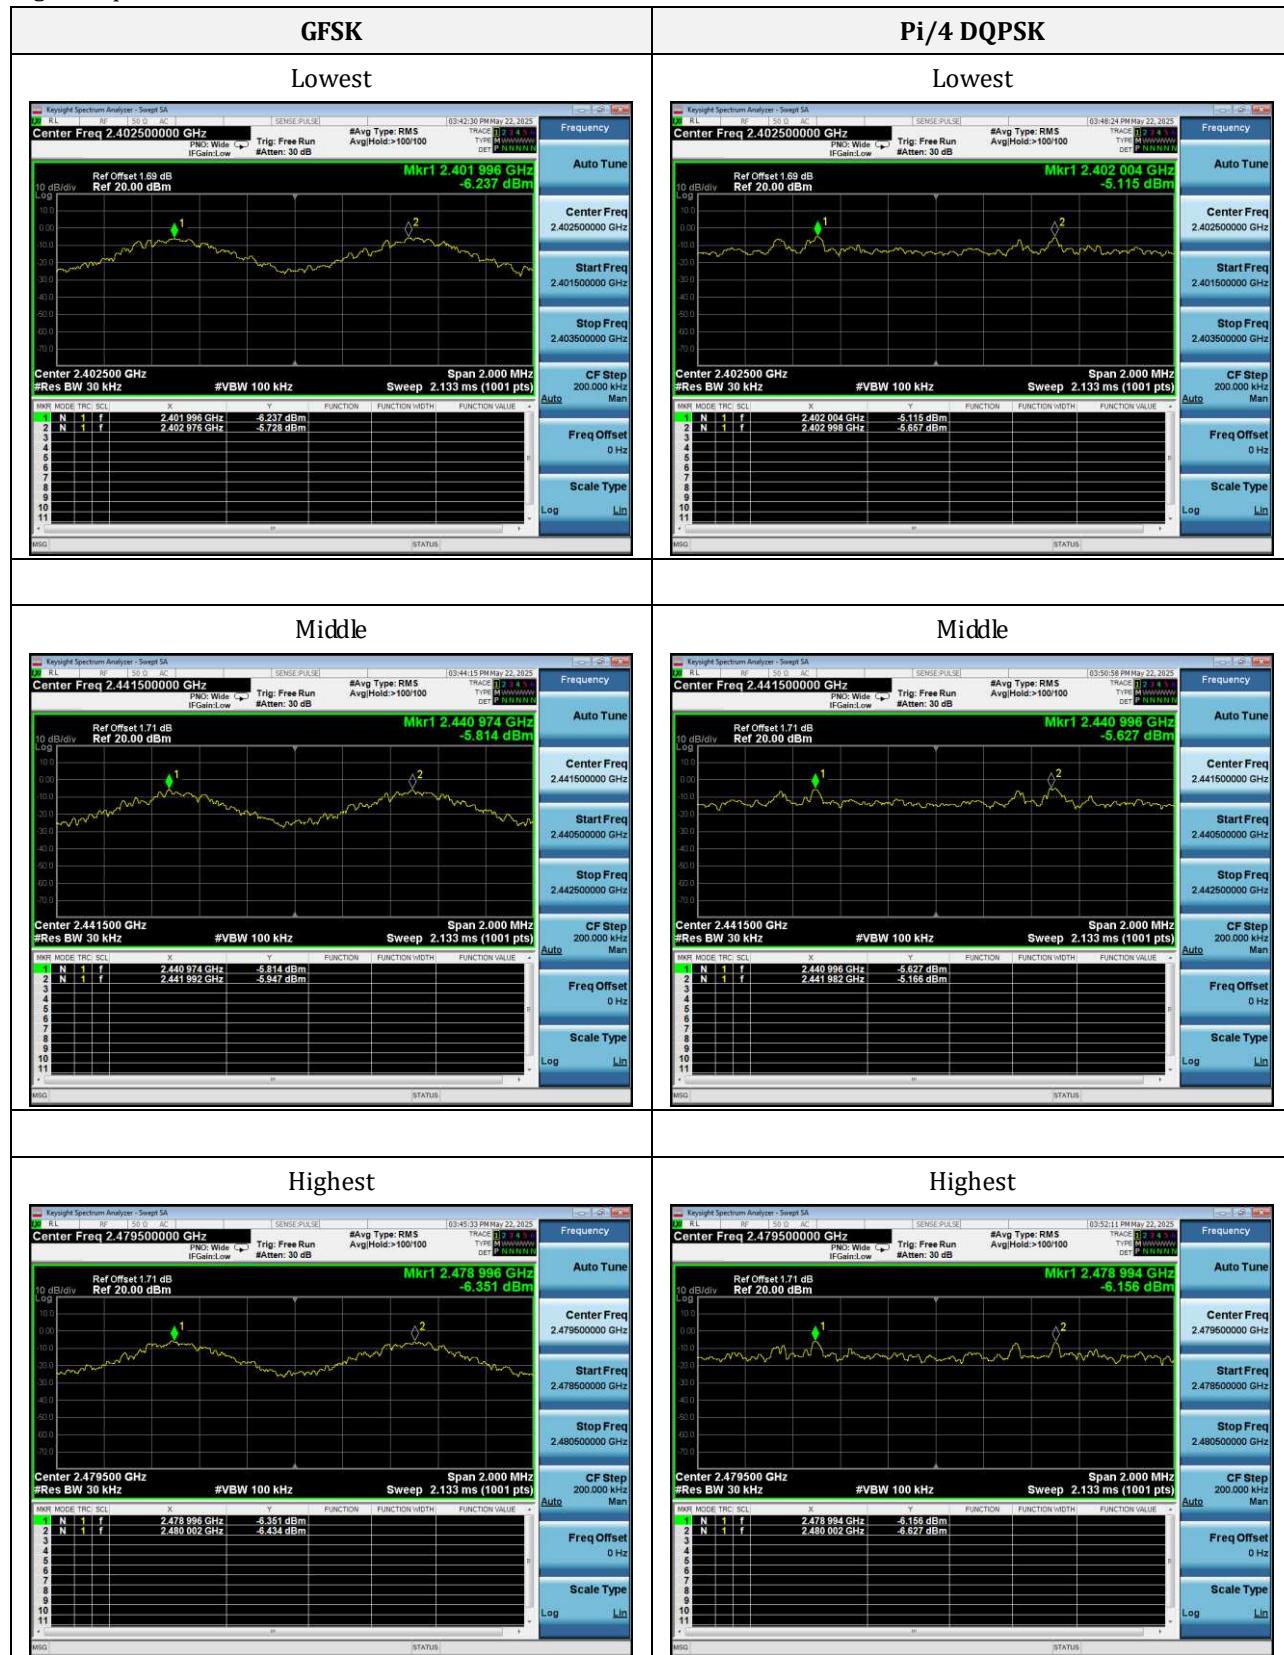

12. Number of Hopping Channel

12.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Set the spectrum analyzer on Max hold mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 5) Set the spectrum analyzer on View mode and then plot the result on the screen of the spectrum analyzer.
- 6) Repeat the above procedures until all frequencies measured were complete.



12.3 Test Data and Results


Left earphone:

Test Mode	Number of Hopping Channel	Limit	Test Result
GFSK	79	15	Pass
Pi/4 DQPSK	79	15	Pass


Right earphone:

Test Mode	Number of Hopping Channel	Limit	Test Result
GFSK	79	15	Pass
Pi/4 DQPSK	79	15	Pass

Left earphone:

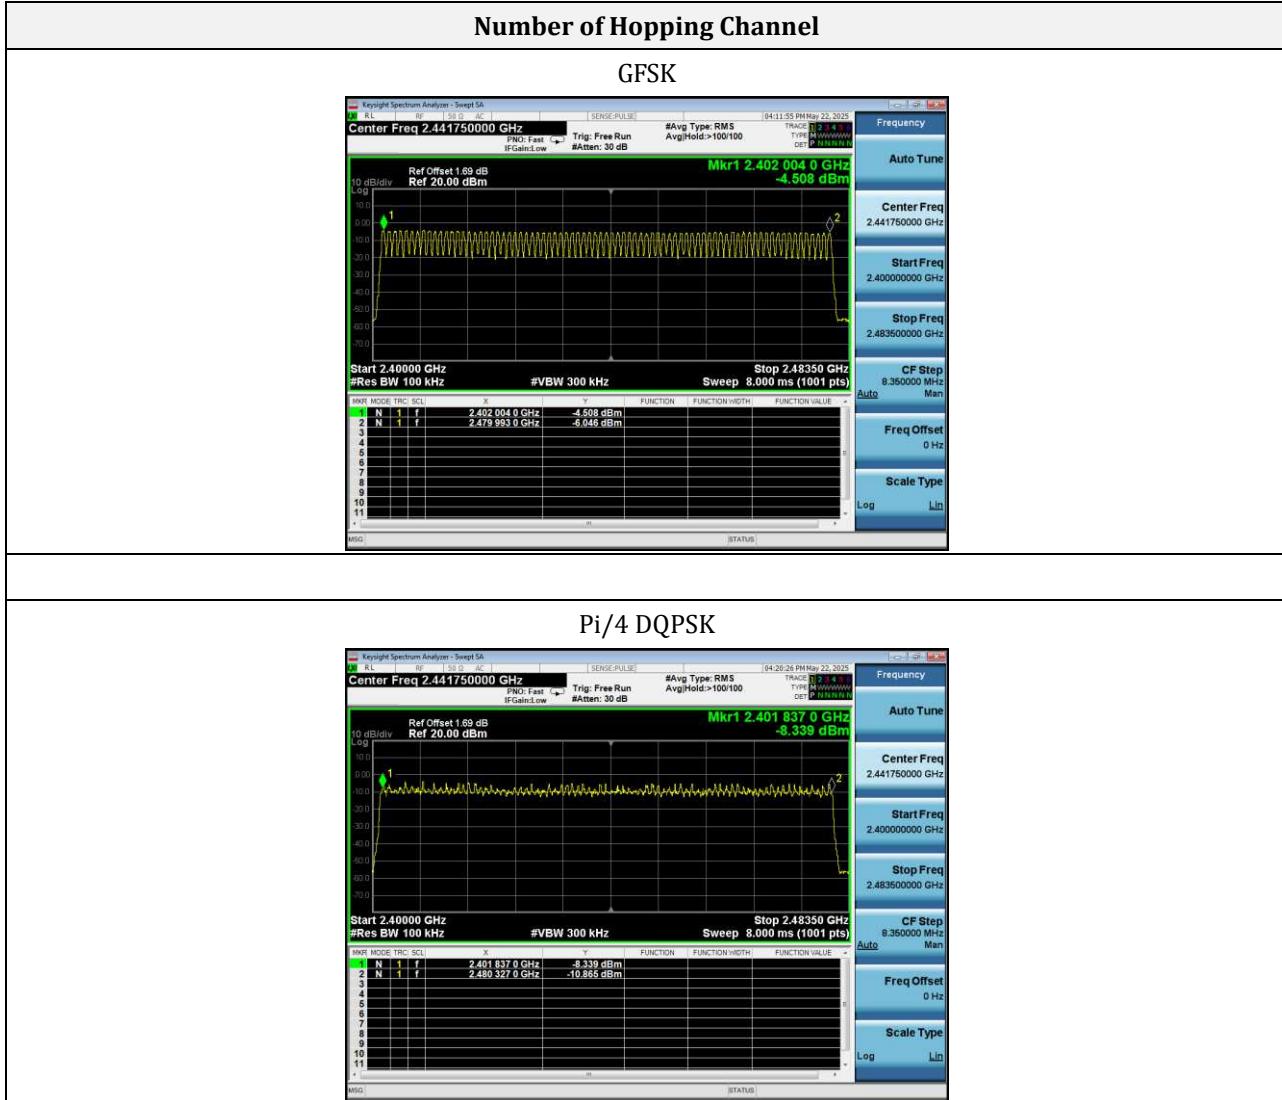

Right earphone:

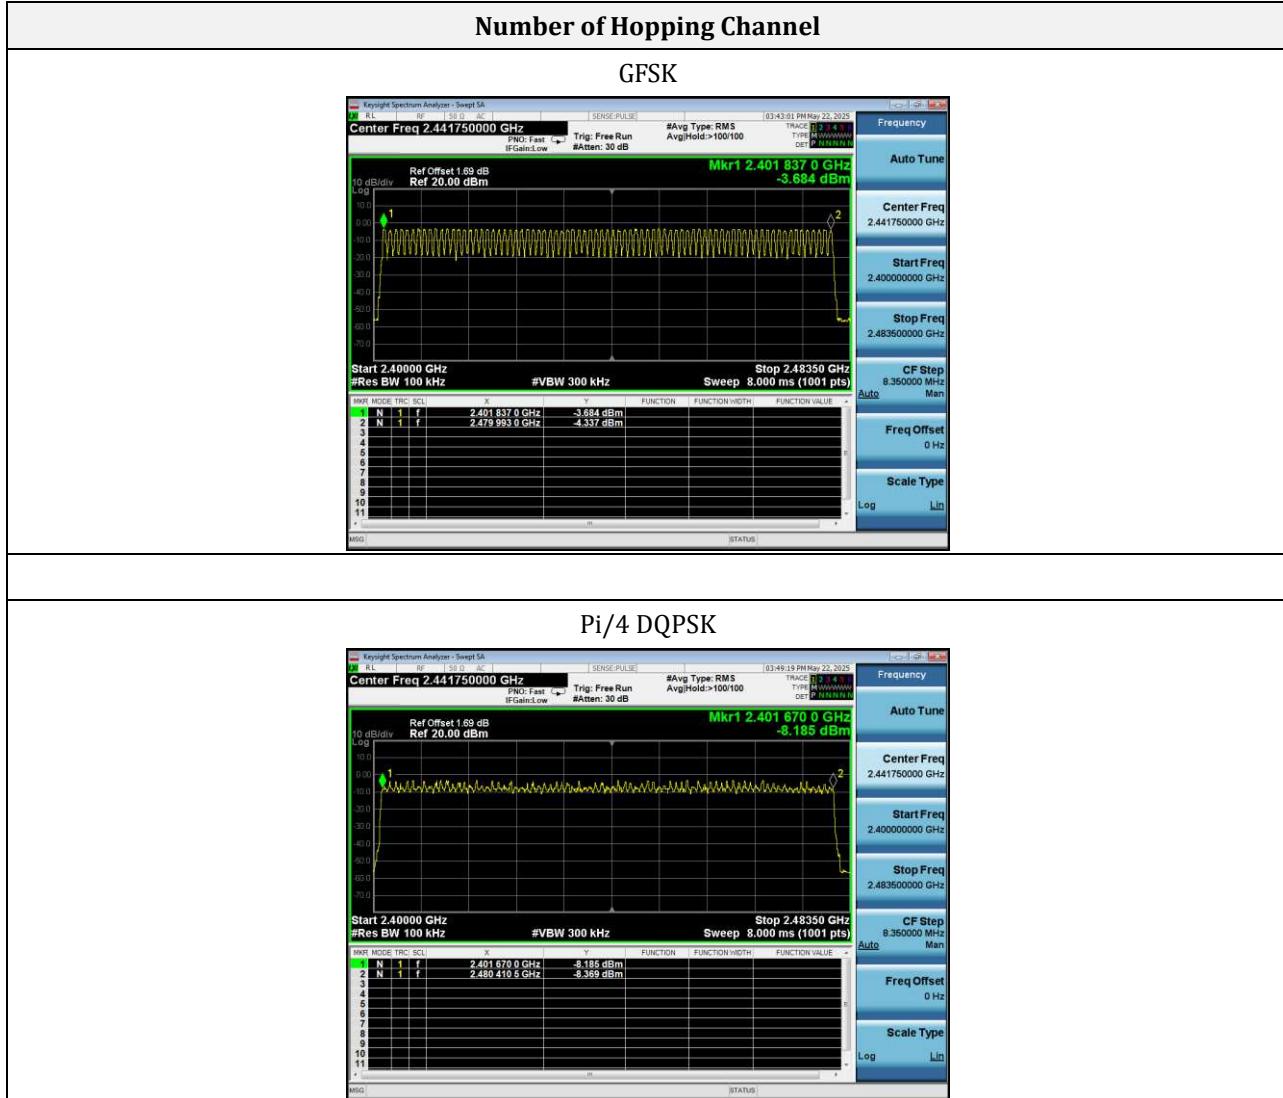

13. Band-edge Emission(Conducted)

13.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

13.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.10.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Set a convenient frequency span including 100 kHz bandwidth from band edge.
- 6) Measure the emission and marking the edge frequency.
- 7) Repeat above procedures until all frequencies measured were complete.



13.3 Test Data and Results


Left earphone:


Test Mode	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
No-Hopping					
GFSK	Lowest	2402	-51.54	-20	Pass
	Highest	2480	-50.23	-20	Pass
Pi/4 DQPSK	Lowest	2402	-50.04	-20	Pass
	Highest	2480	-49.72	-20	Pass
Hopping					
GFSK	Lowest	2402	-50.77	-20	Pass
	Highest	2480	-48.68	-20	Pass
Pi/4 DQPSK	Lowest	2402	-48.93	-20	Pass
	Highest	2480	-48.48	-20	Pass

Right earphone:


Test Mode	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
No-Hopping					
GFSK	Lowest	2402	-50.47	-20	Pass
	Highest	2480	-51.33	-20	Pass
Pi/4 DQPSK	Lowest	2402	-50.5	-20	Pass
	Highest	2480	-50.36	-20	Pass
Hopping					
GFSK	Lowest	2402	-51.03	-20	Pass
	Highest	2480	-50.37	-20	Pass
Pi/4 DQPSK	Lowest	2402	-50.89	-20	Pass
	Highest	2480	-50.77	-20	Pass


Left earphone:

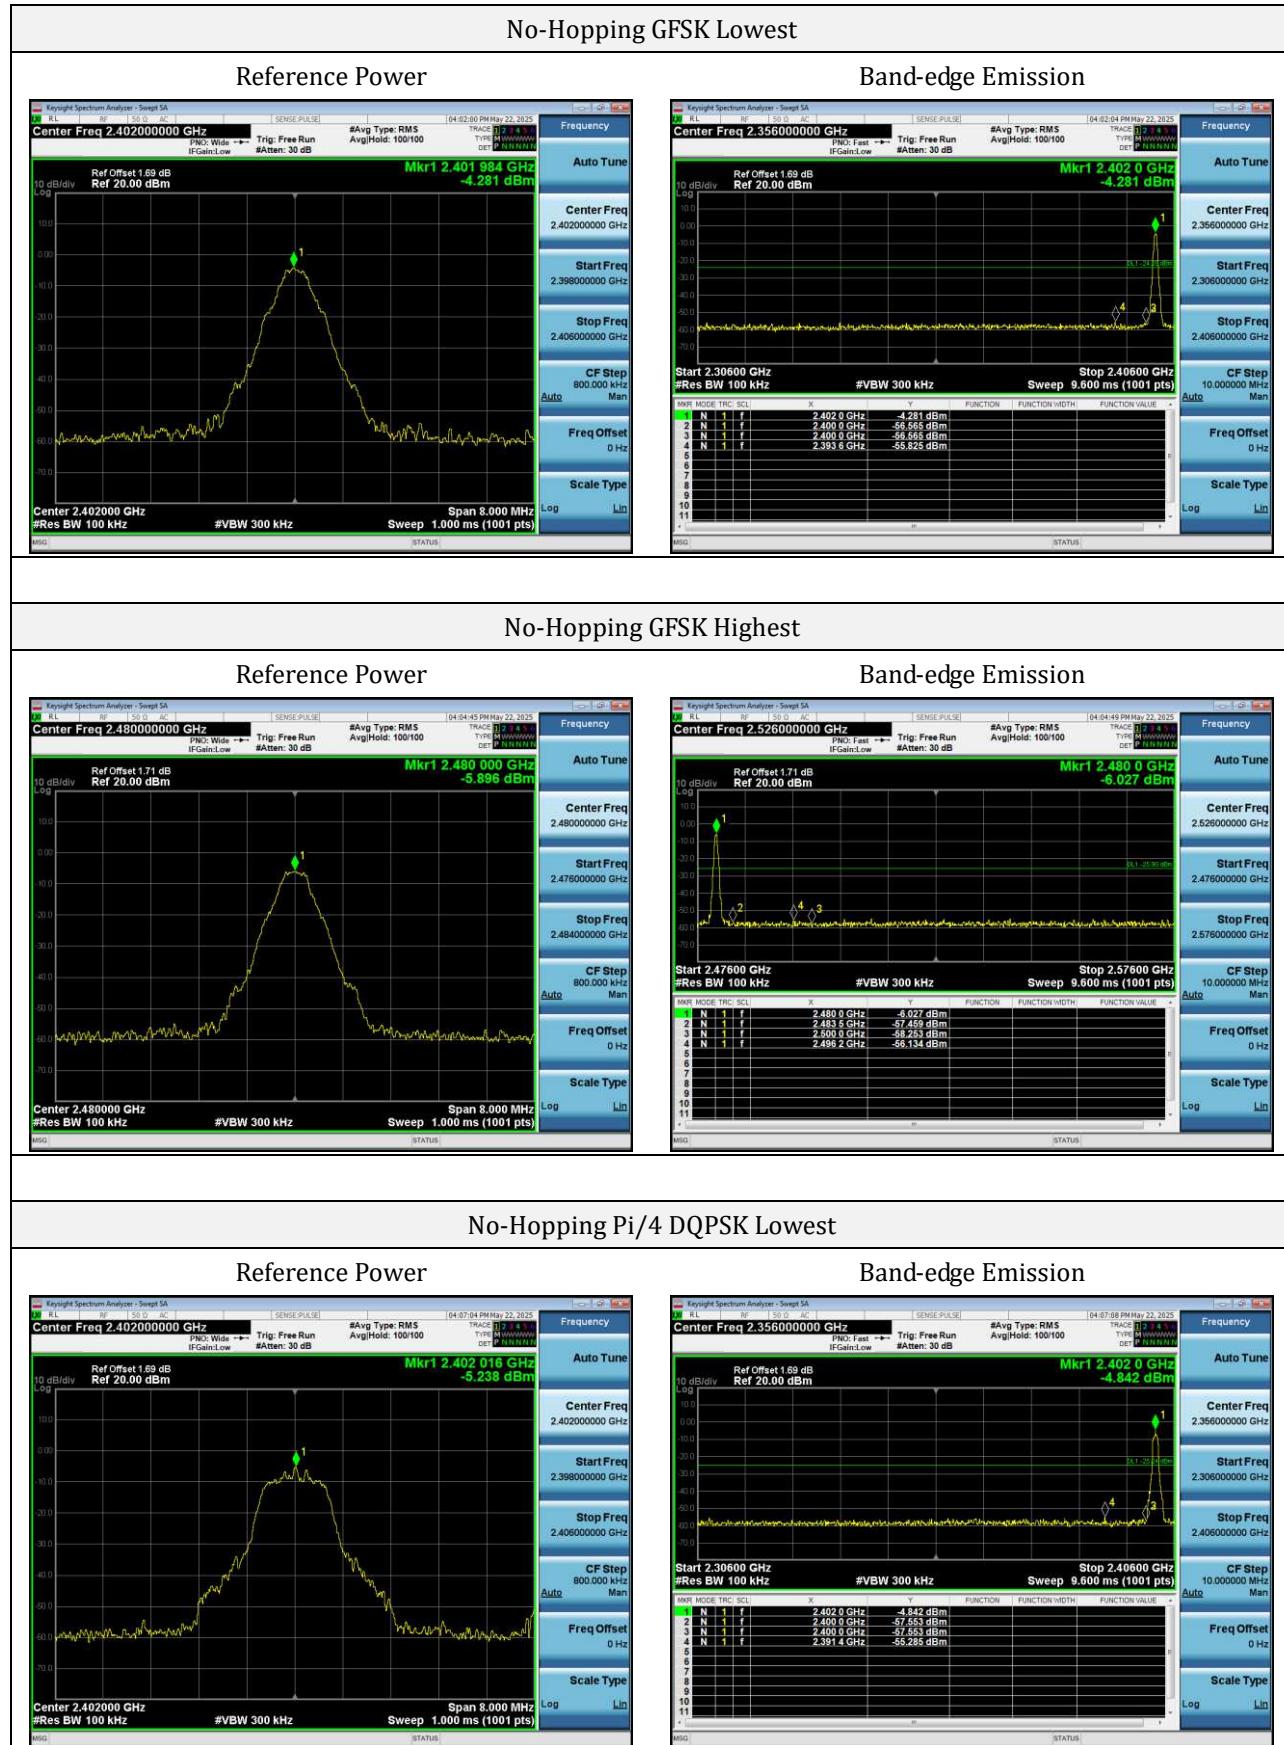

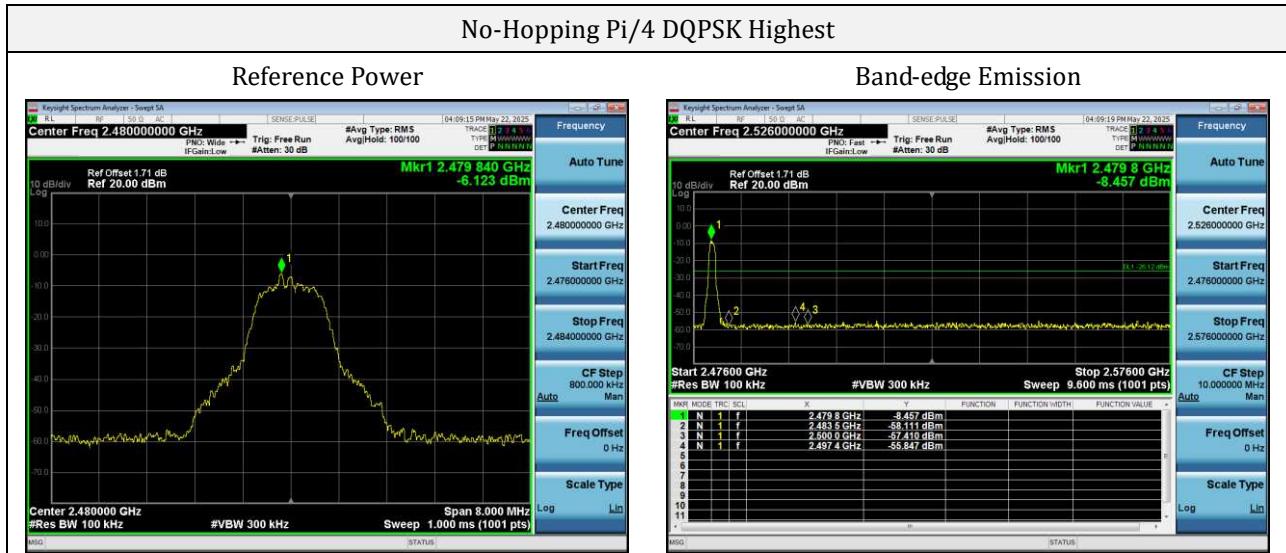



Left earphone:

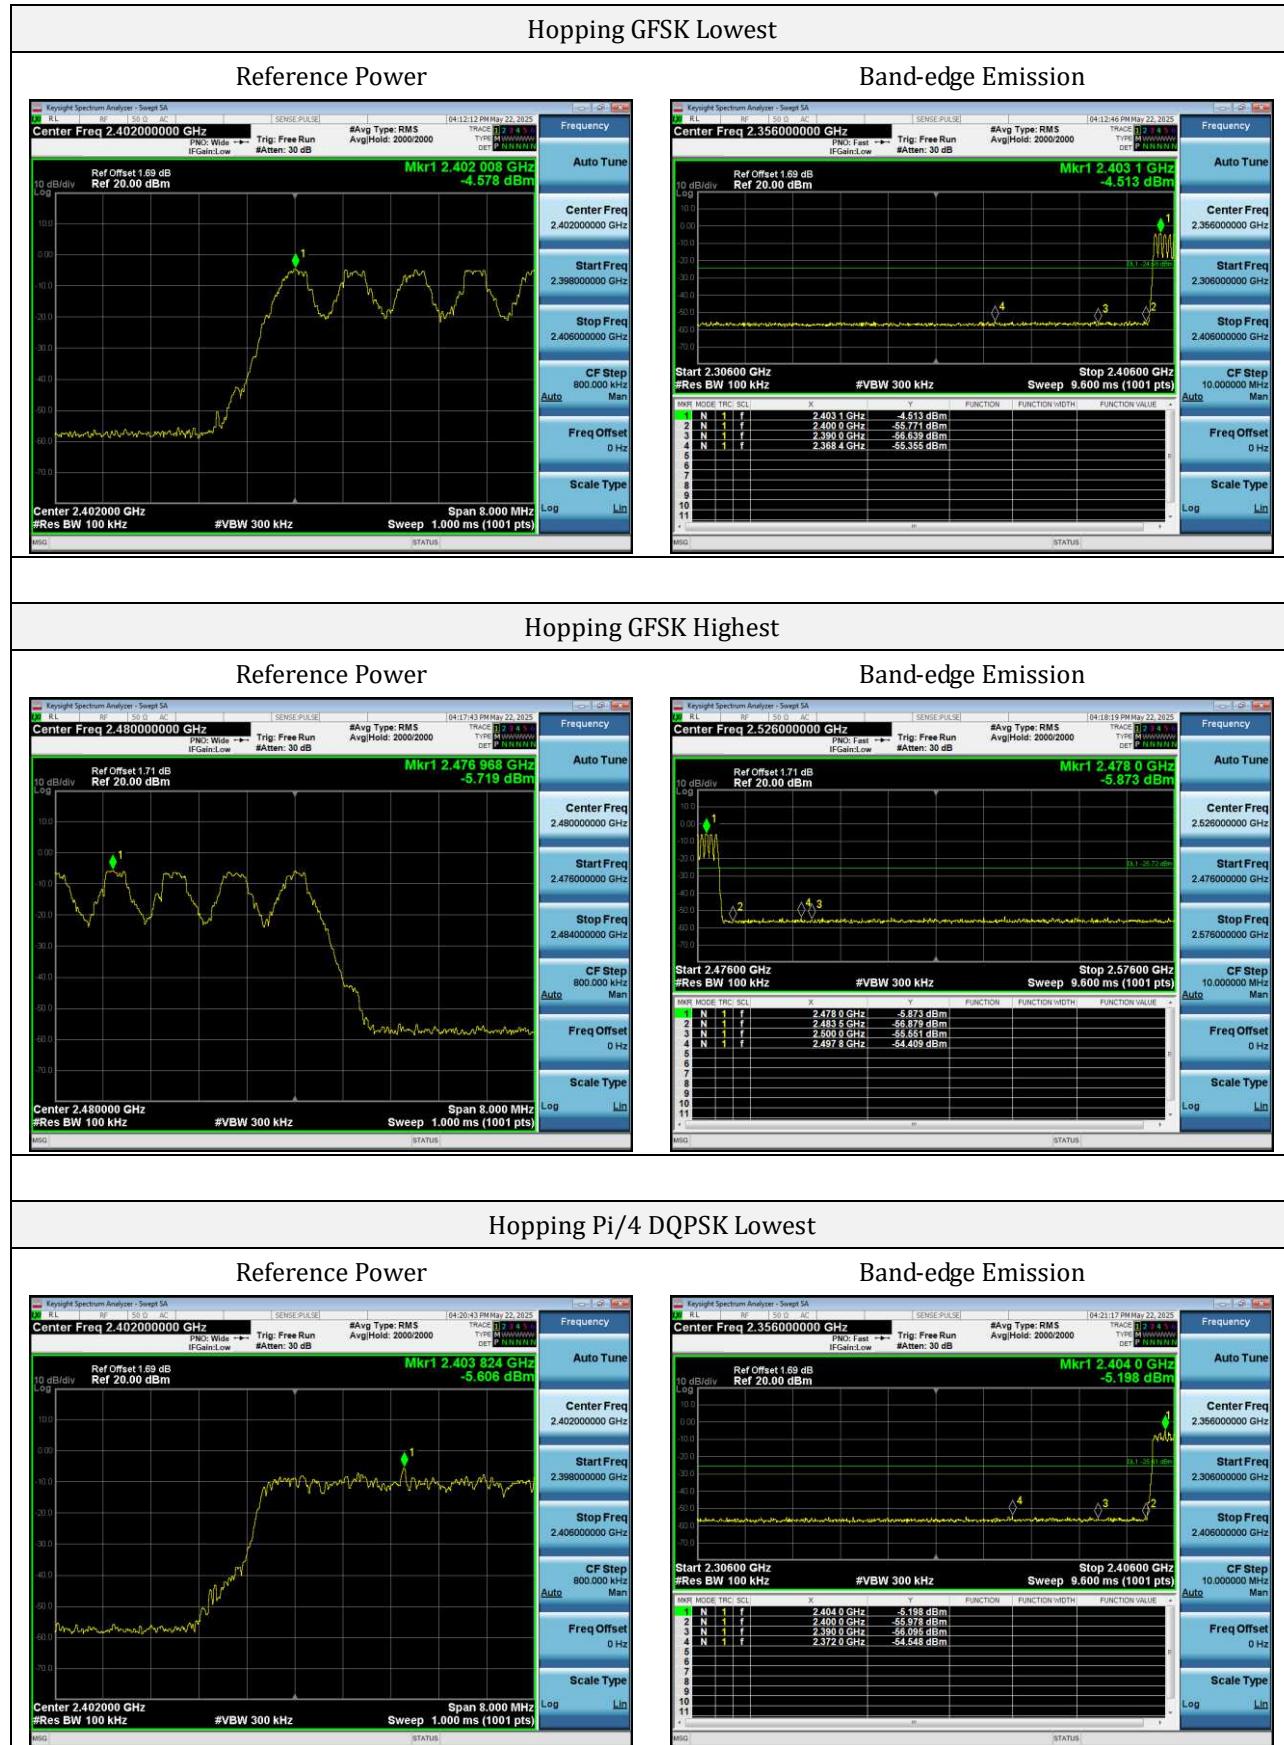

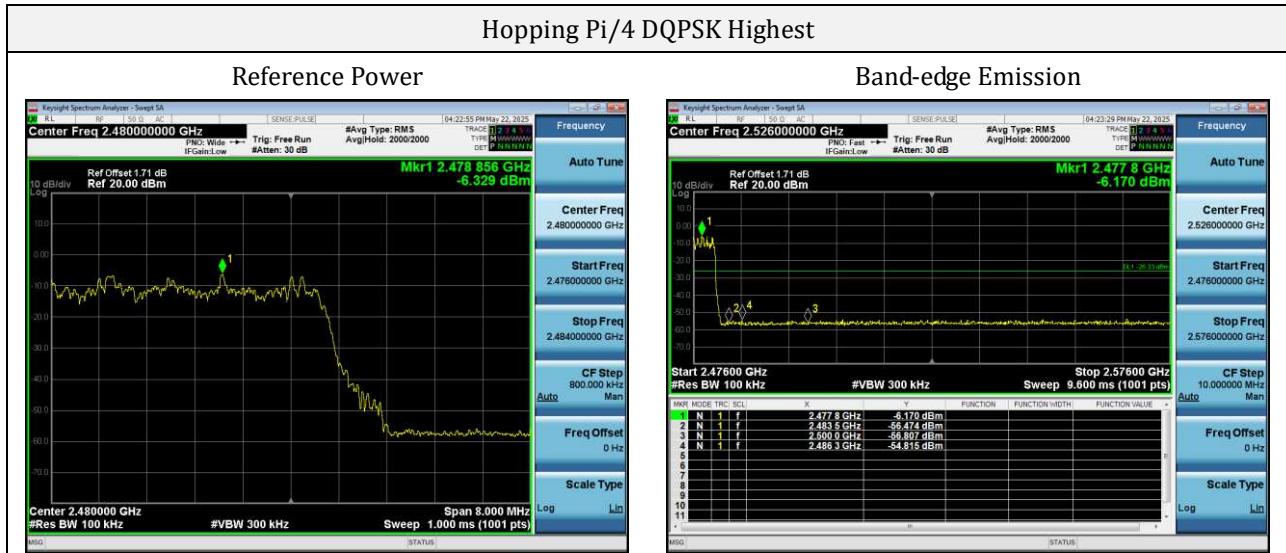



Right earphone:

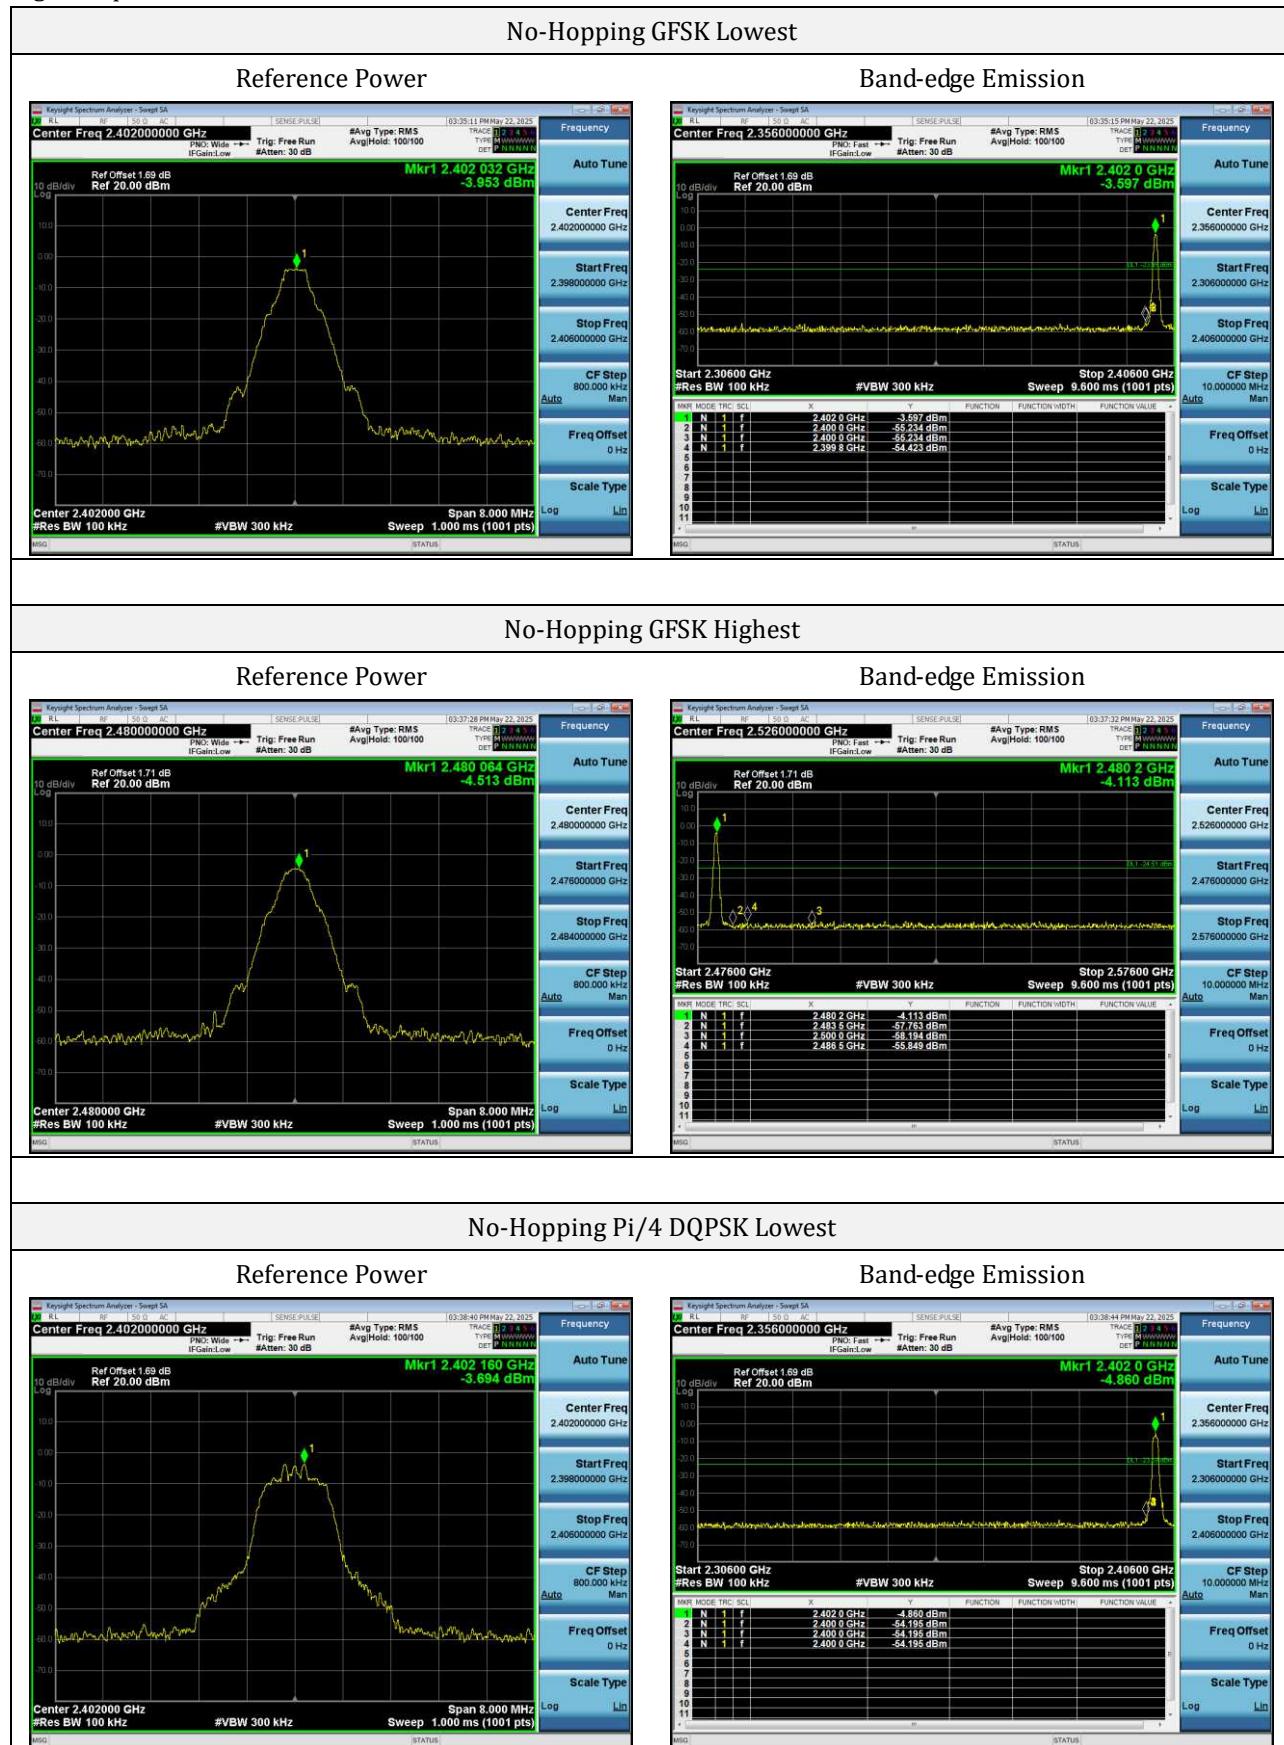

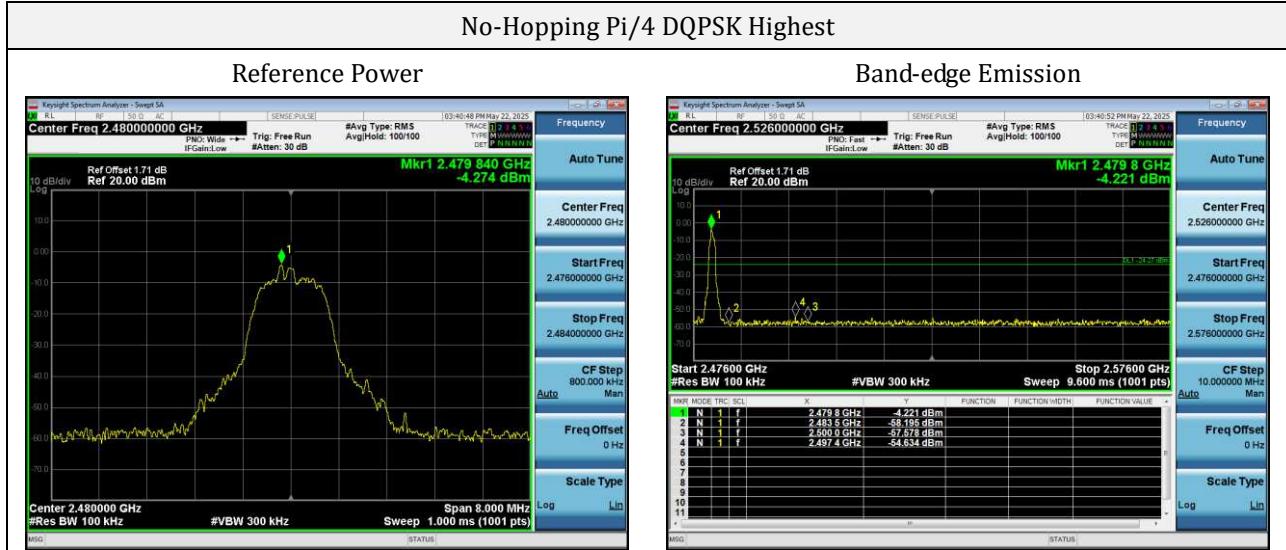

Right earphone:

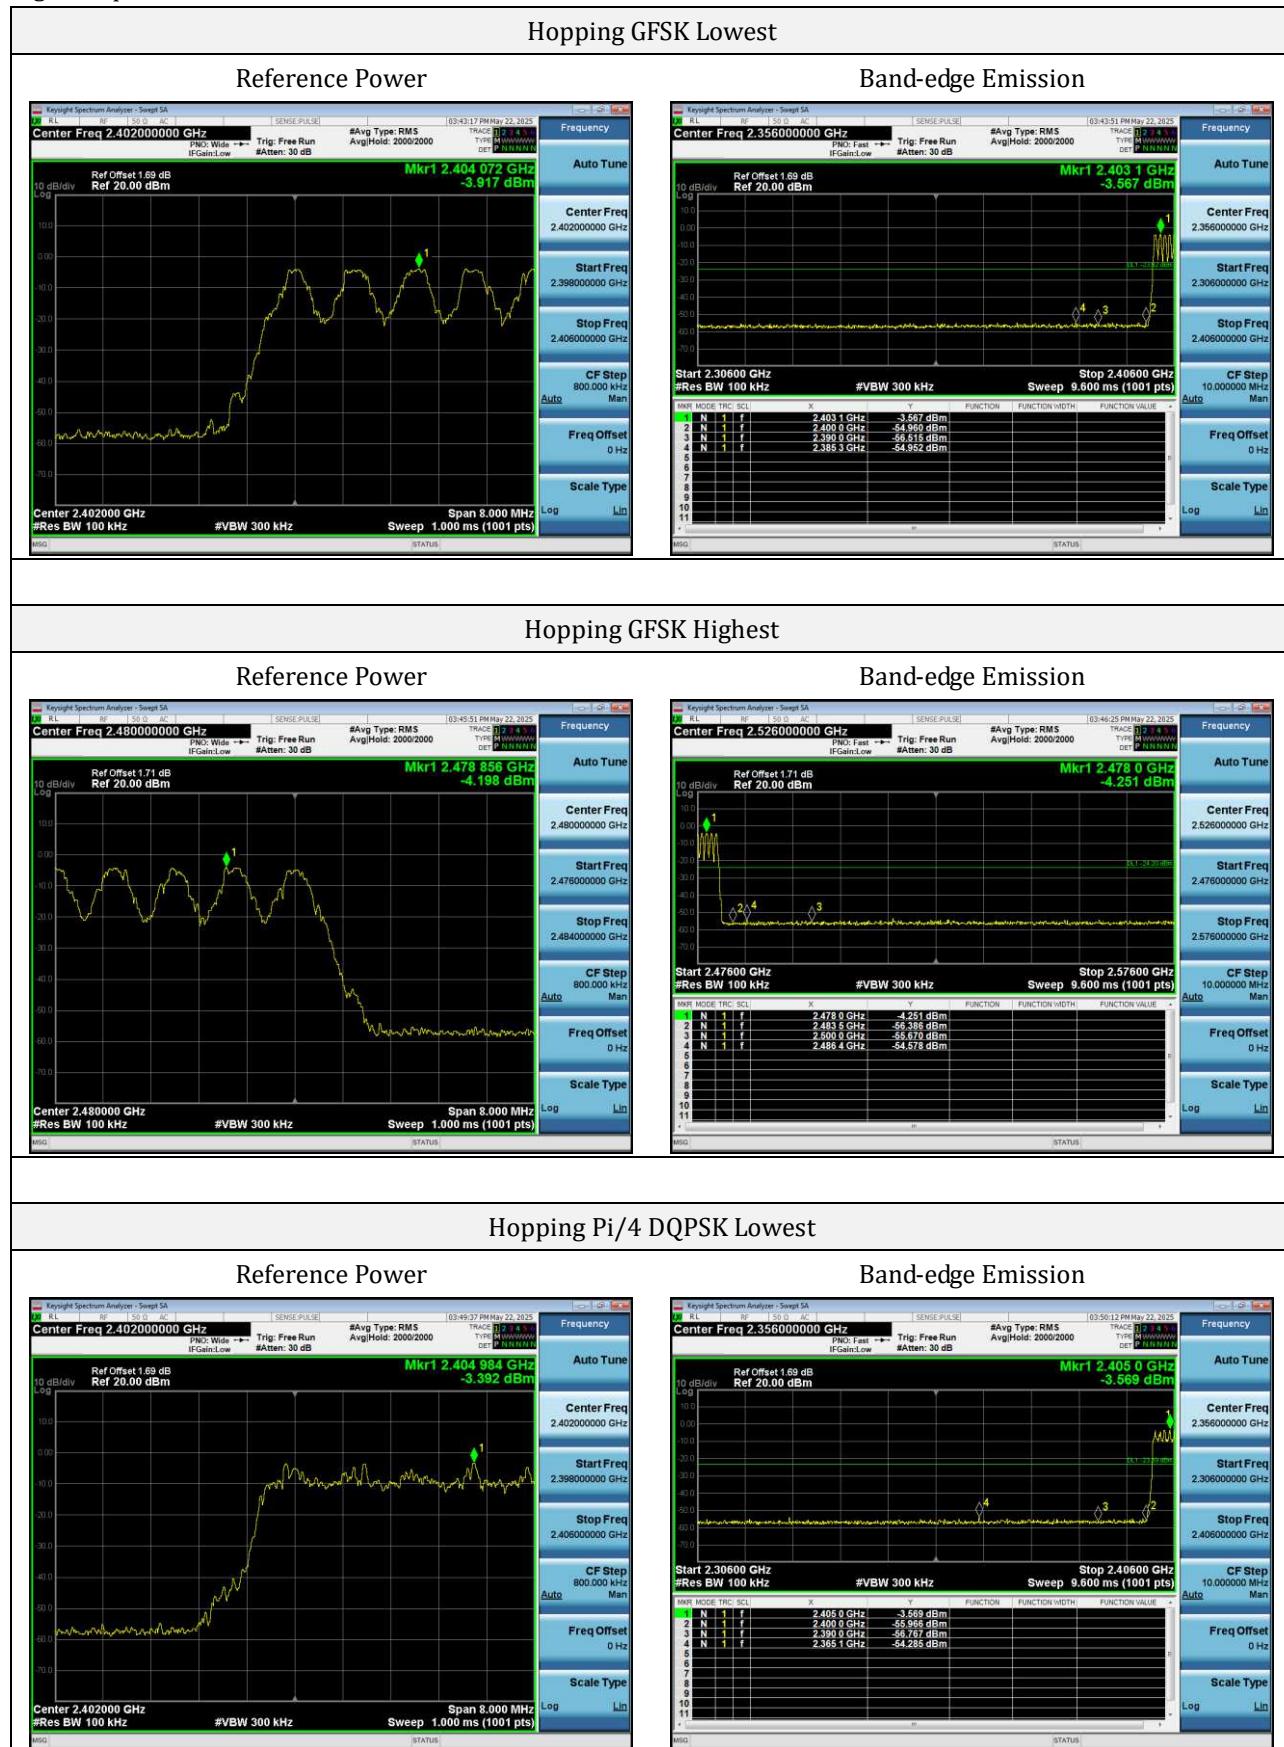

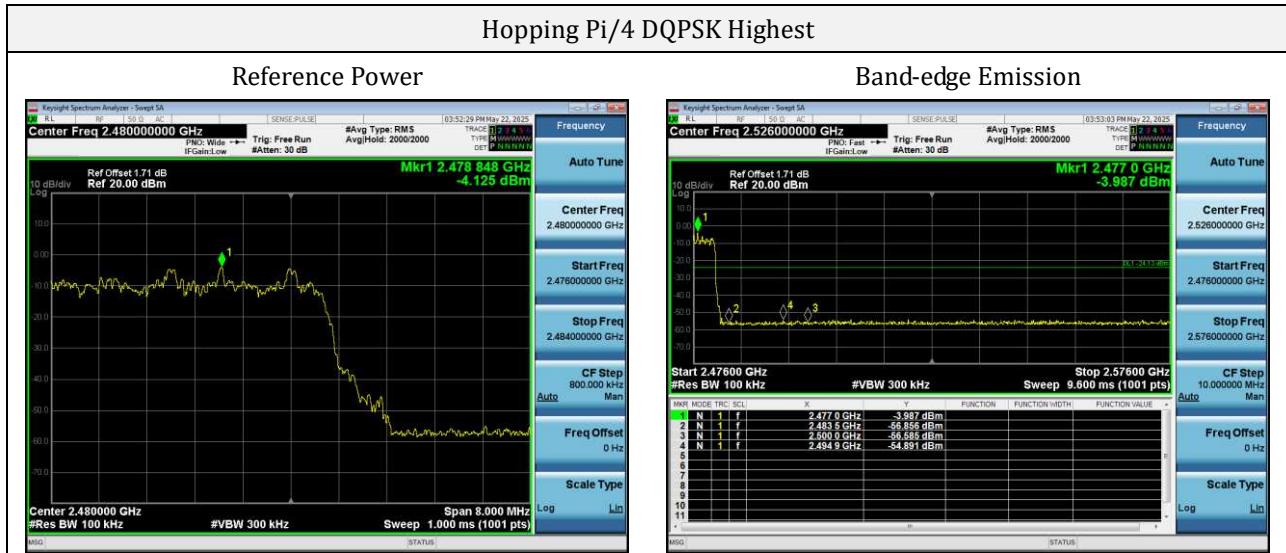

14. Conducted RF Spurious Emissions

14.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

14.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.7.


- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Measure the spurious emissions with frequency range from 9kHz to 26.5GHz.
- 6) Repeat above procedures until all measured frequencies were complete.




14.3 Test Data and Results


Note: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions measurement data.


Left earphone:

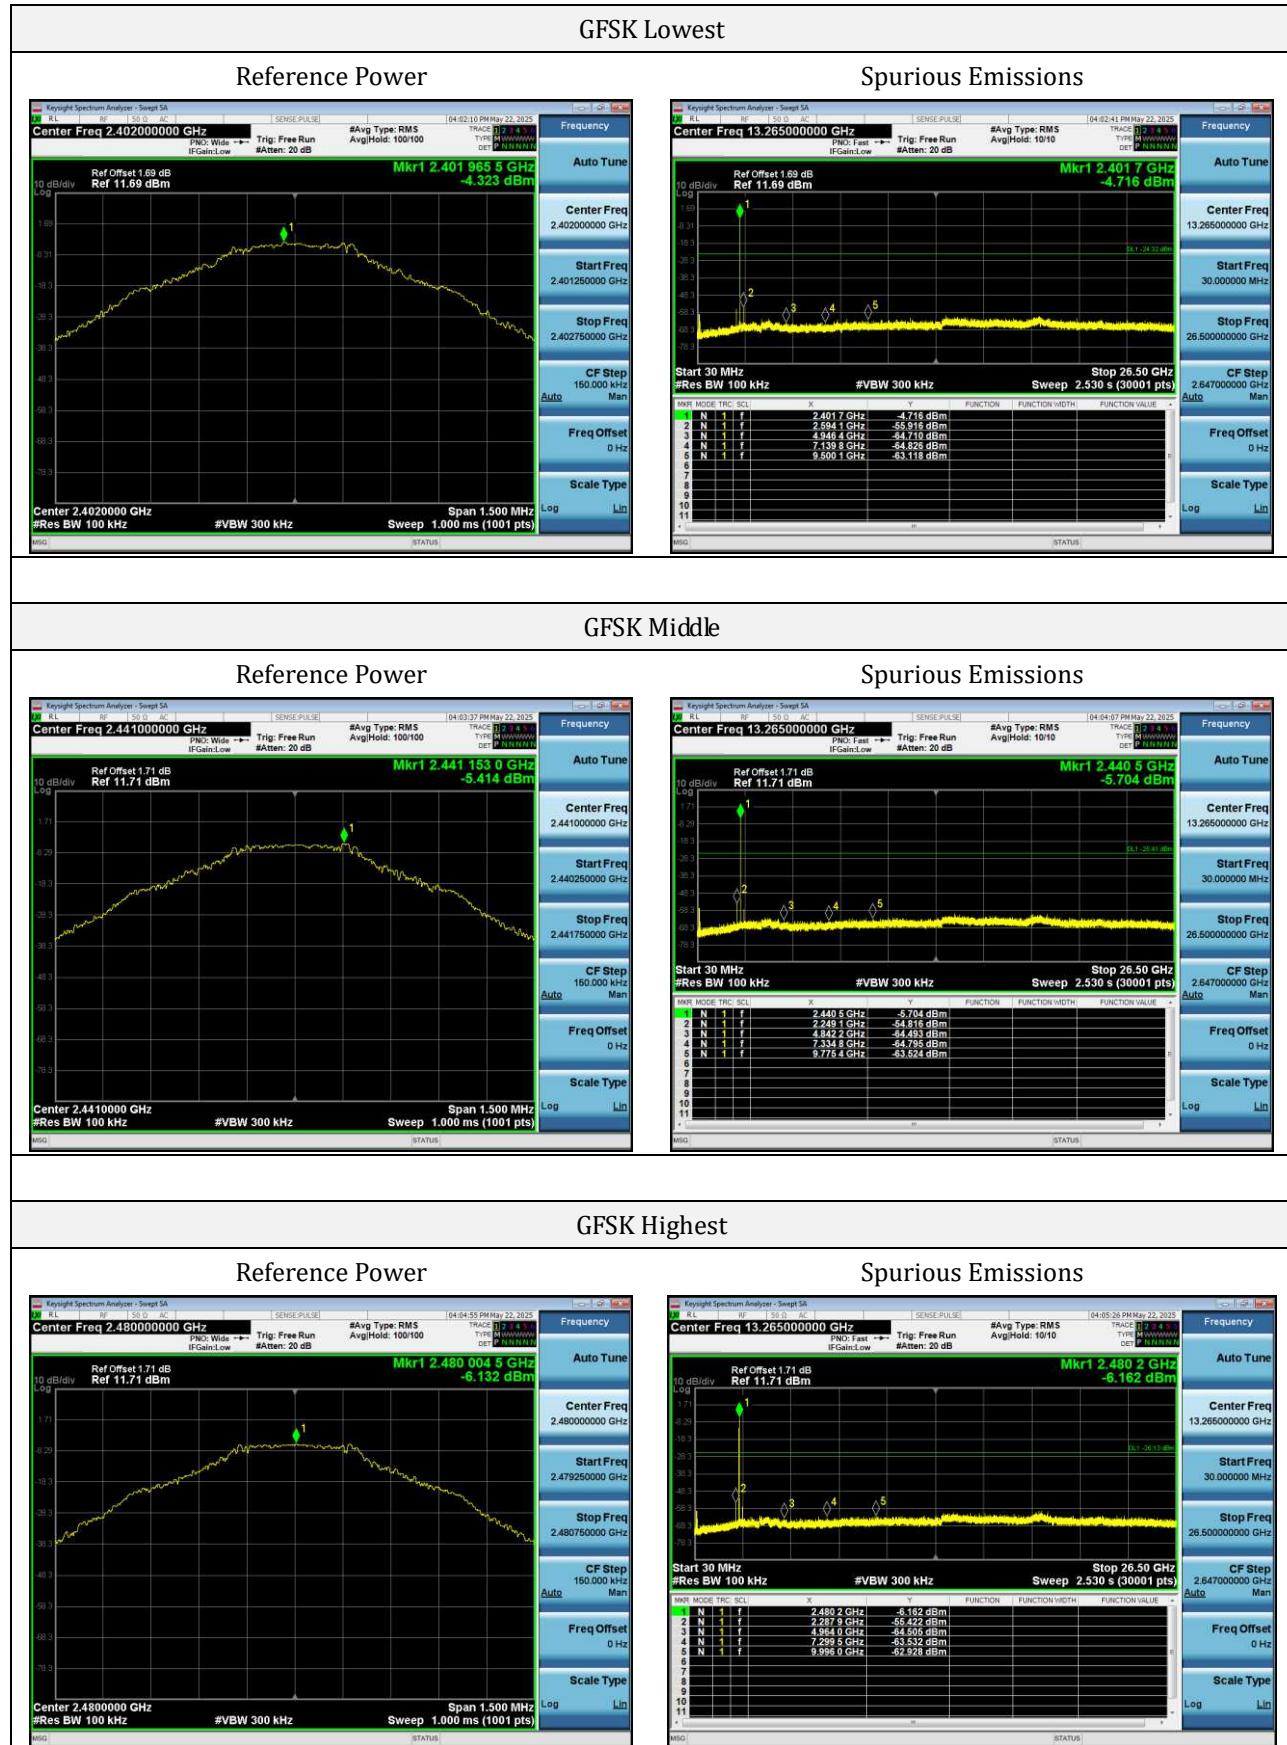

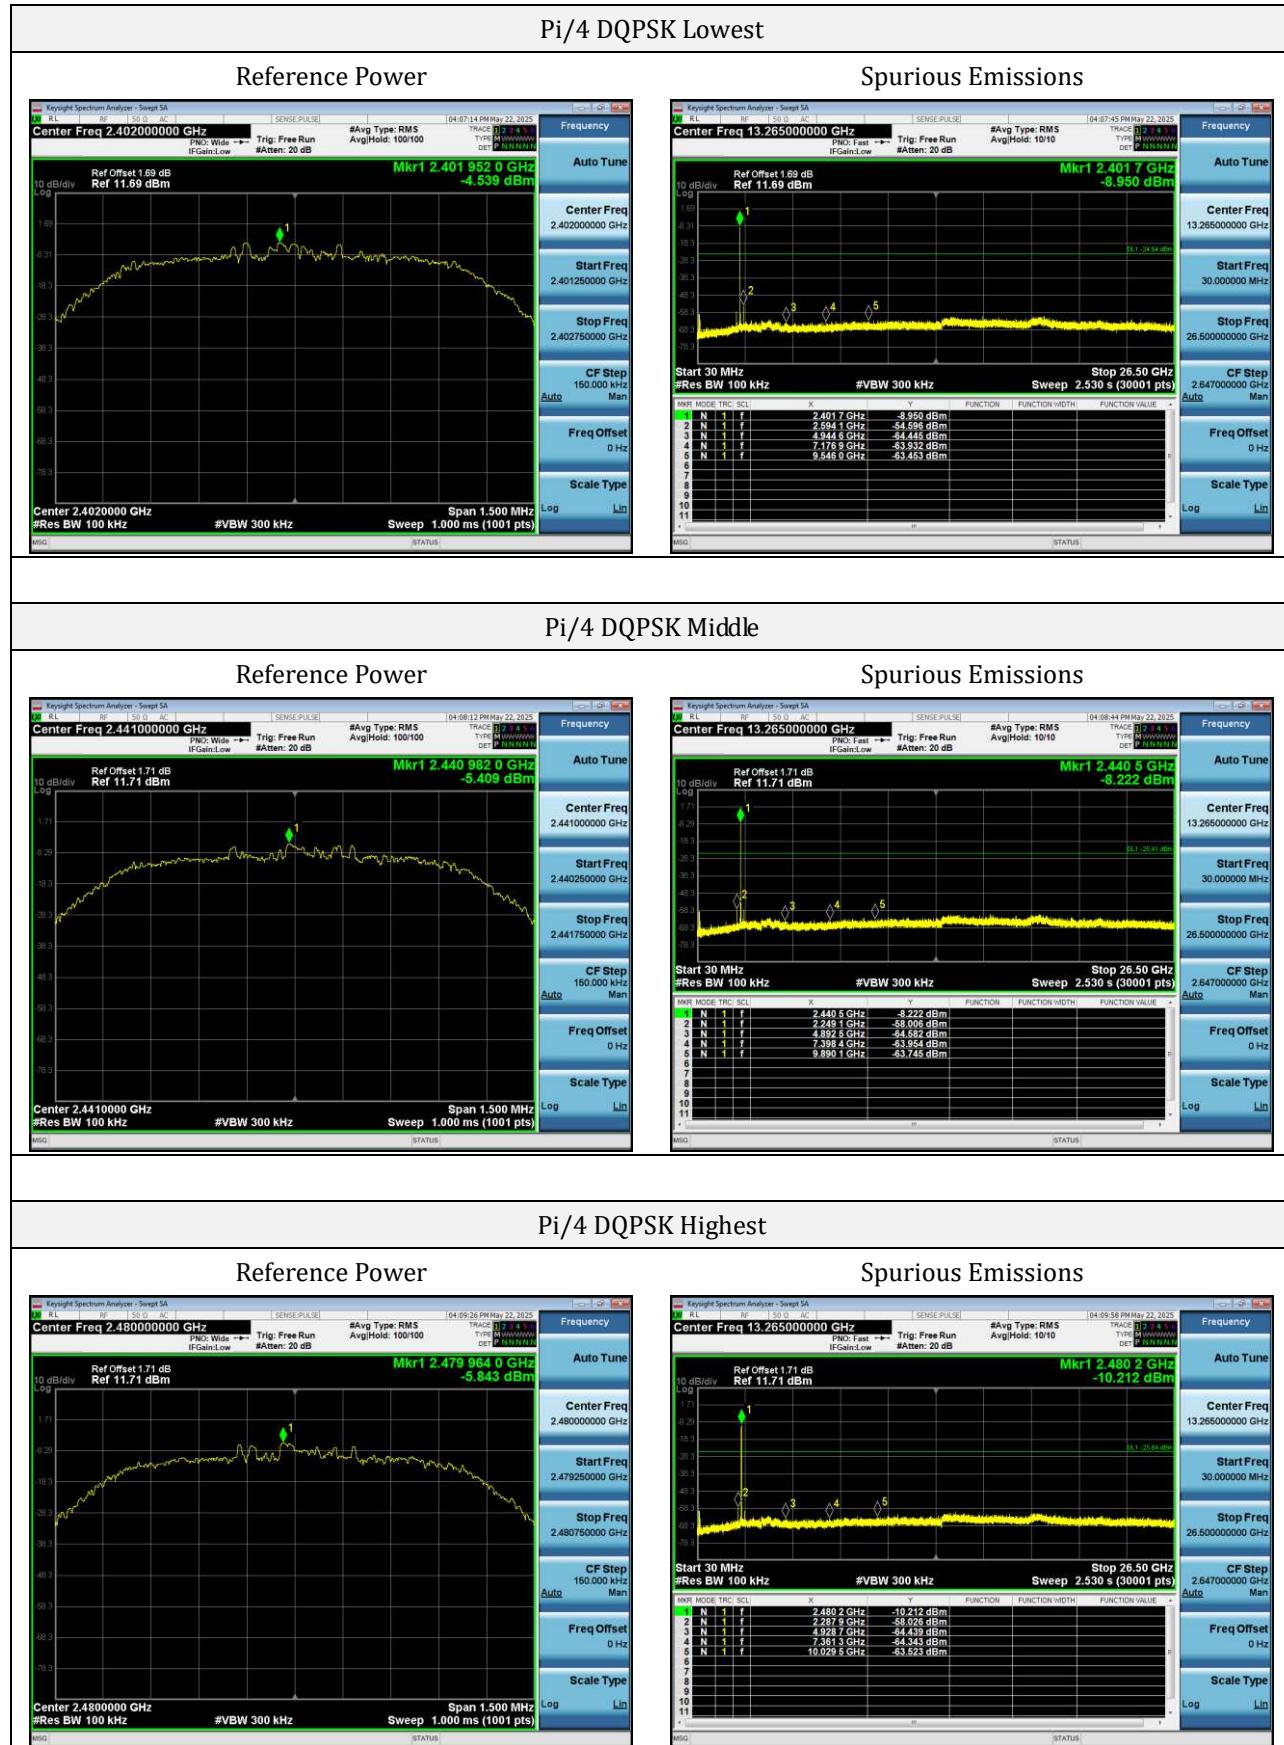

Right earphone:

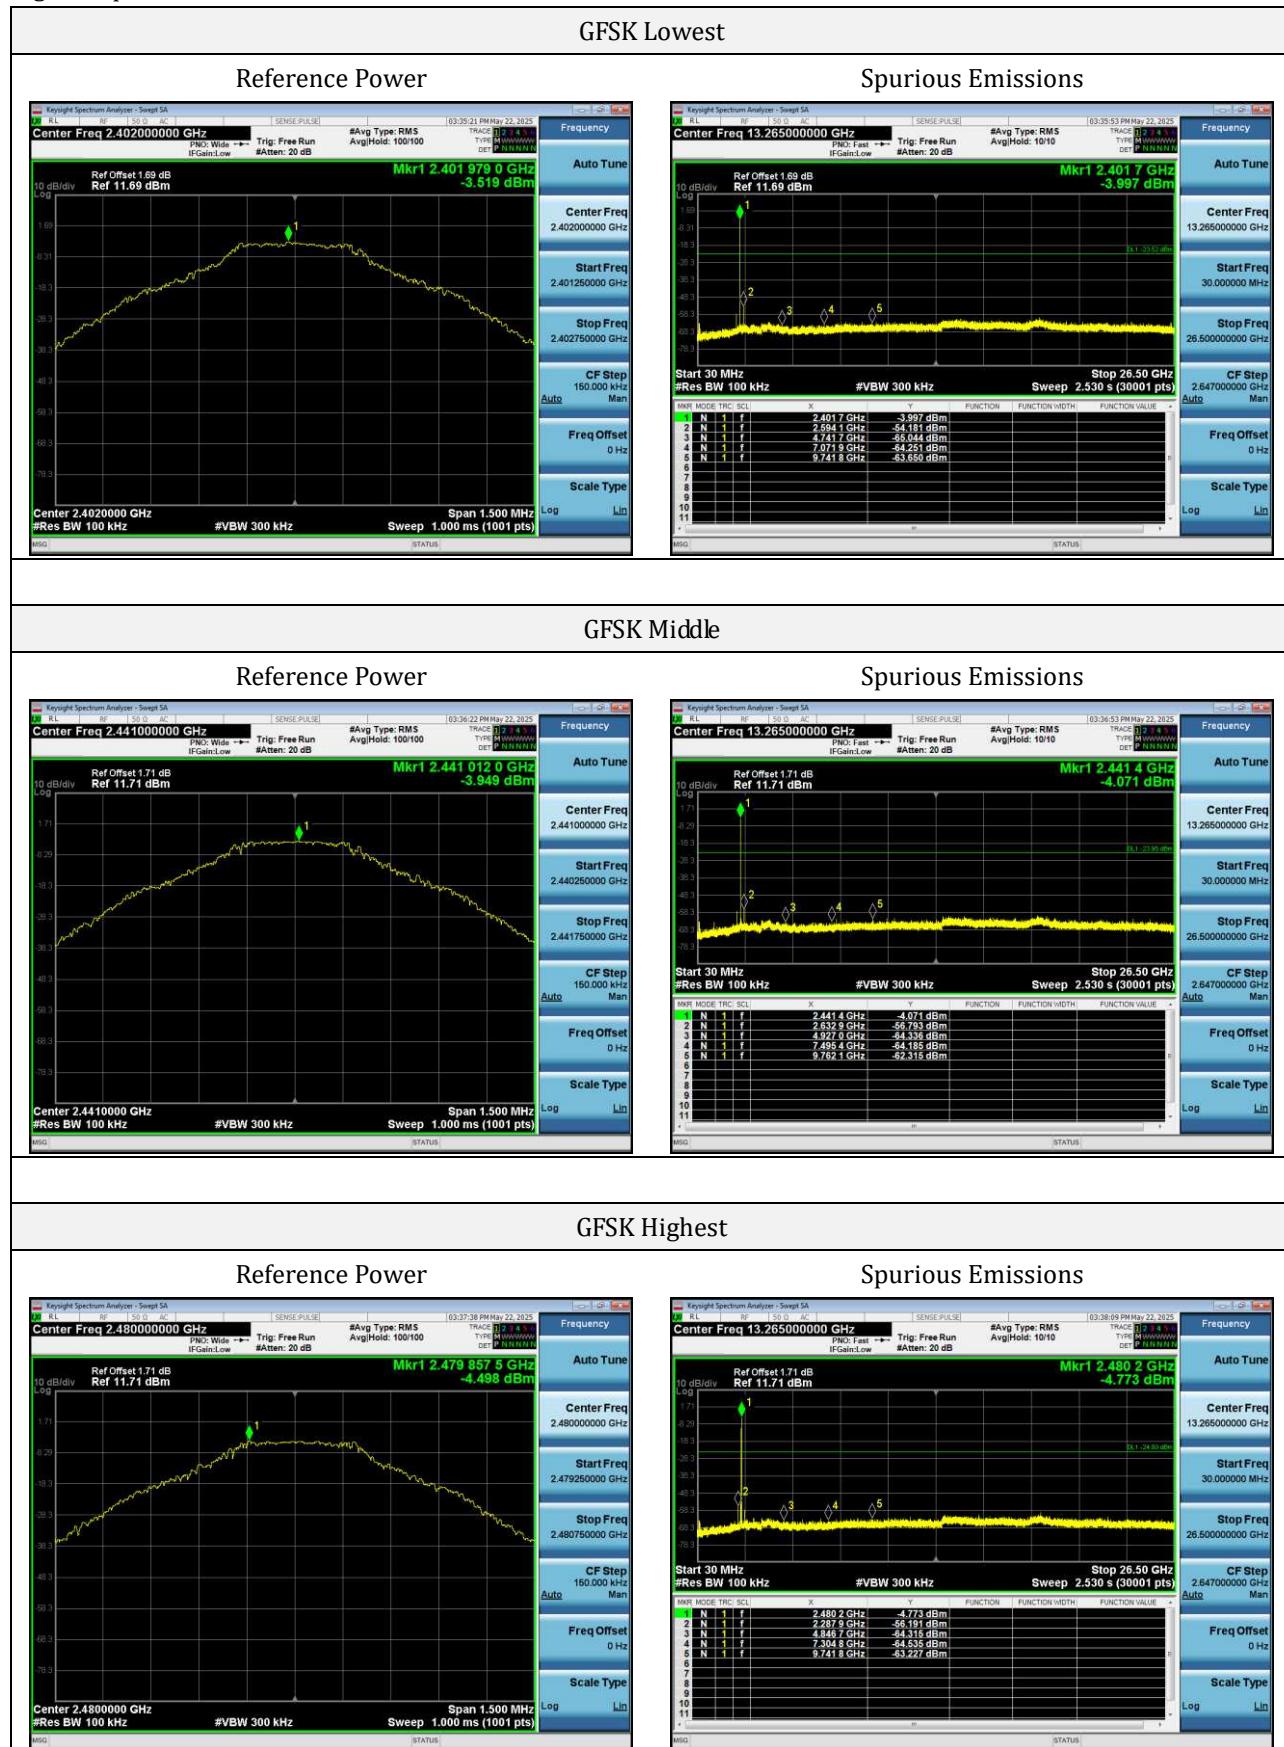

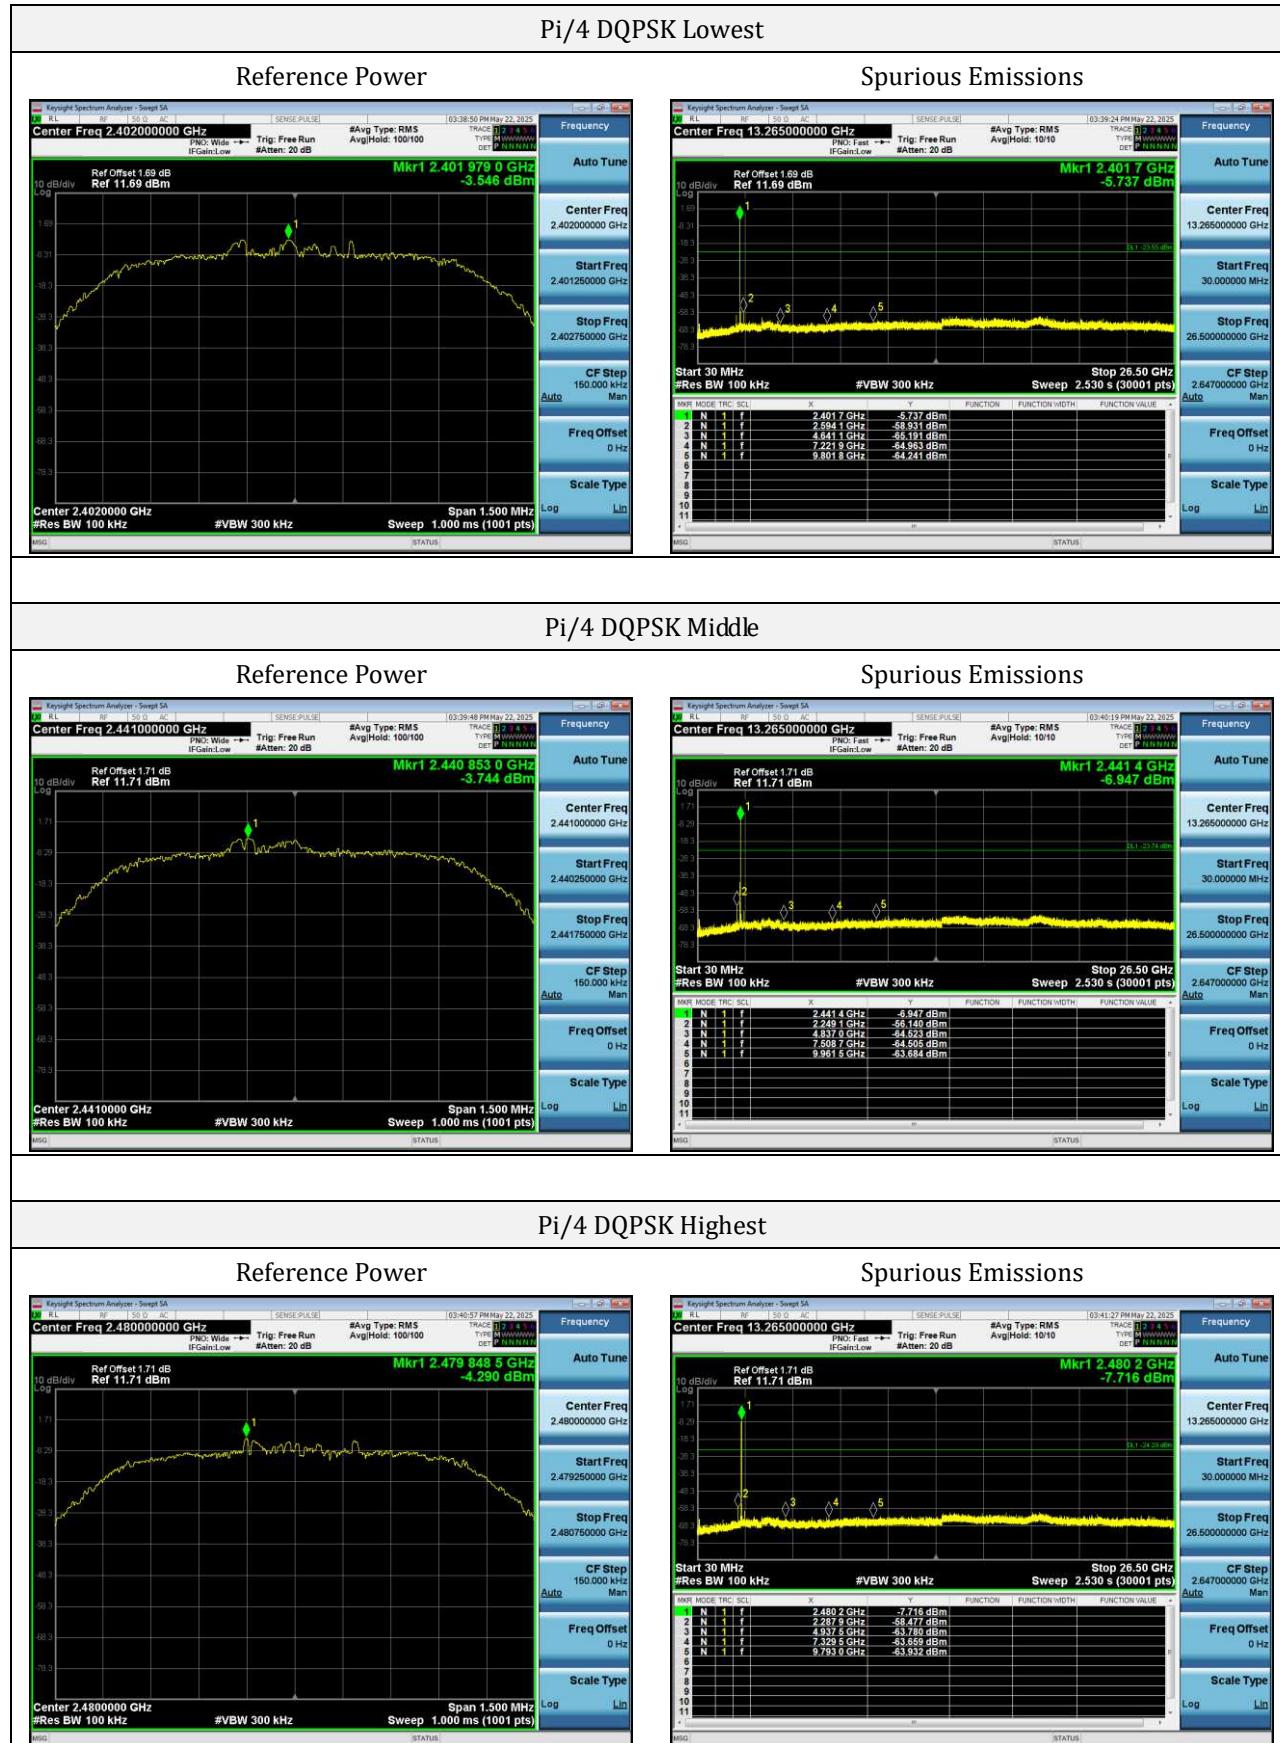

***** END OF REPORT *****