


The screen of the mobile phone selfie monitor

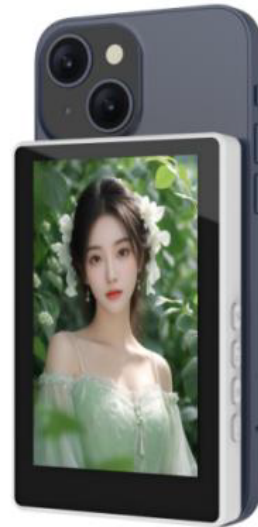

Product Introduction

This product is a 3.97-inch LCD screen, simple and portable, with a magnetic back function, can be attached to the back of the phone or other iron surface. This product uses 2.4G wifi wireless connection, which can project the screen to the mobile phone and tablet computer, and has the functions of brightness adjustment, screen rotation, size adjustment, external sound and so on.

Product Parameters

Product model: M8

Wireless mode: WIFI2.4G

Transmission distance. <15 meters

Power input: 5V=1.5A

Power dissipation: 450ma

Battery capacity: 1250mAh

Charging port: USB-C (Type-C)

Screen size: 3.97 inches

Resolution: 480x800 pixels

Viewing angle: full viewing angle

Brightness: adjustable 400cd/m2 (Max)

Sound: support


Product material: profile

Size:106mm*68mm*14mm


Weight: 120g

Operating temperature: 10~+40°C

Product size

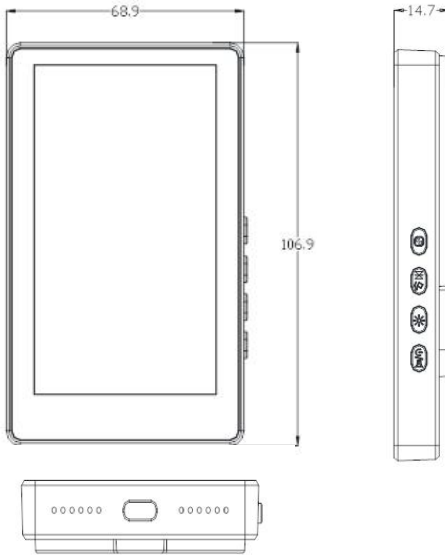

Screen Mirroring

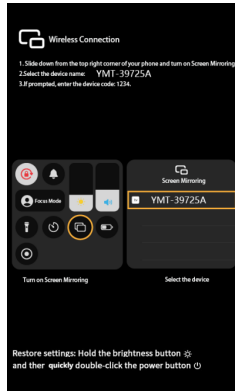


Screen Mirroring

- 1.1.Open the screen mirroring icon on your phone, turn onWLAN and Bluetooth as shown in the prompt on the rightand click to turn on.
2. After clicking on the screen projection, it will searchfor available devices. The search process takes about3-10 seconds.
3. Select the device named YMT-39725A to projectthe screen.Please enter 1234 for the prompt password


BlueTooth Shutter

1. Turn on the Bluetooth controller, then turn on Bluetoothin the Bluetooth settings of your phone to search fordevices. The search process is expected to last 3-10seconds.

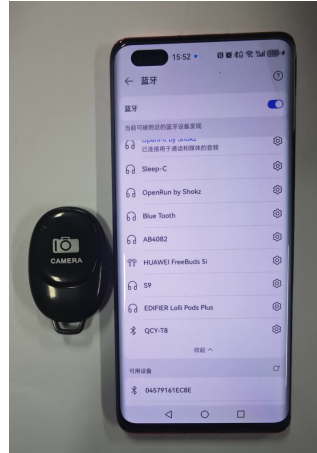

- 2.Find the Bluetooth device named AB Shutter 3 andpair it.
- 3.After the connection is successful, return to the phototaking interface and use the controller to control thephone to take photos or videos.

Product function



- 1.Aspect ratio:standard,stretched, full screen
- 2.Rotation: single rotation 90° each time
- 3.Brightness adjustment: single click the brightnessbutton,with 3 levels of brightness
- 4.Power on/off: long press the power button for 3 seconds Mute/play sound: single click the power button whenpowered on
- 5.USB-C(Type-C)
- 6.Switch language/Reset: press and hold the brightnessadjustment button and then fast double click the powerbutton
- 7.Long press and hold the proportional key to switch the channel. CM_A is the Chinese channel, and CM_B is the channel for Europe, America and Japan. When on the same screen in China, you need to switch to the Chinese channel; when on the same screen in Europe and America, you need to switch to the channel for Europe and America

Switch language/Reset Step 1



Step 2



Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment. The device has been evaluated to meet general RF exposure requirement. The SAR limit of USA(FCC) is 1.6 W/kg averaged over one gram of tissue. Device types Wireless Screen Monitor for Smart Phone with M8 (FCC ID: 2BPYG-M8) has also been tested against this SAR limit. The highest reported SAR values for body - worn is 0.126W/kg. The Max simultaneous SAR is 0.126W/kg. This device was tested for typical body - worn operations with the back of the handset kept 0mm from the body. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.