




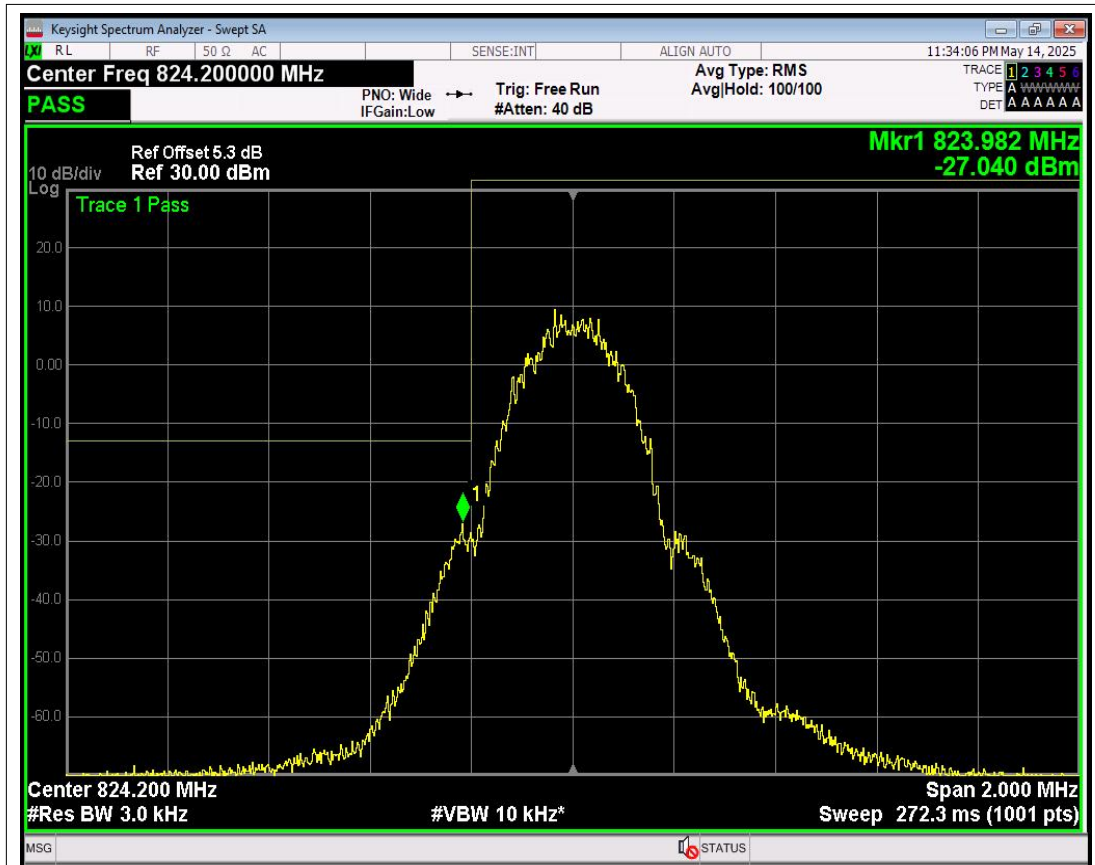


EGPRS850 Channel=128

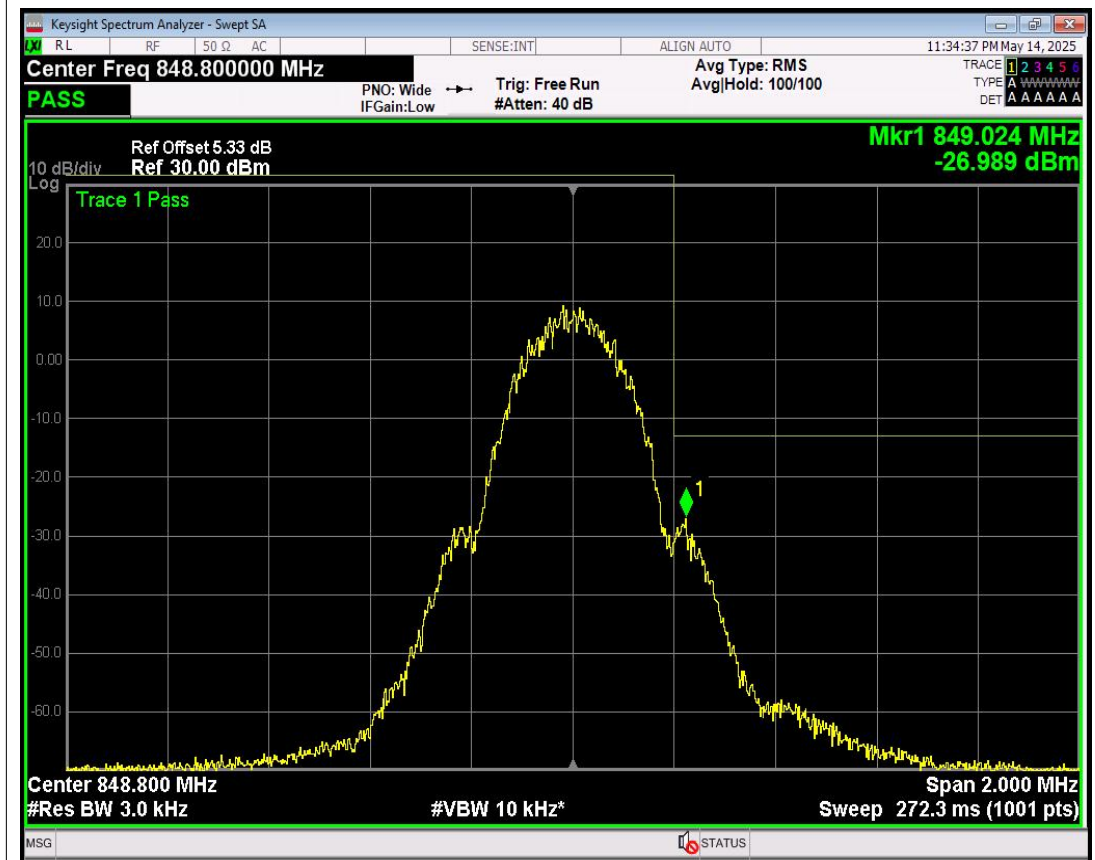

EGPRS850 Channel=251

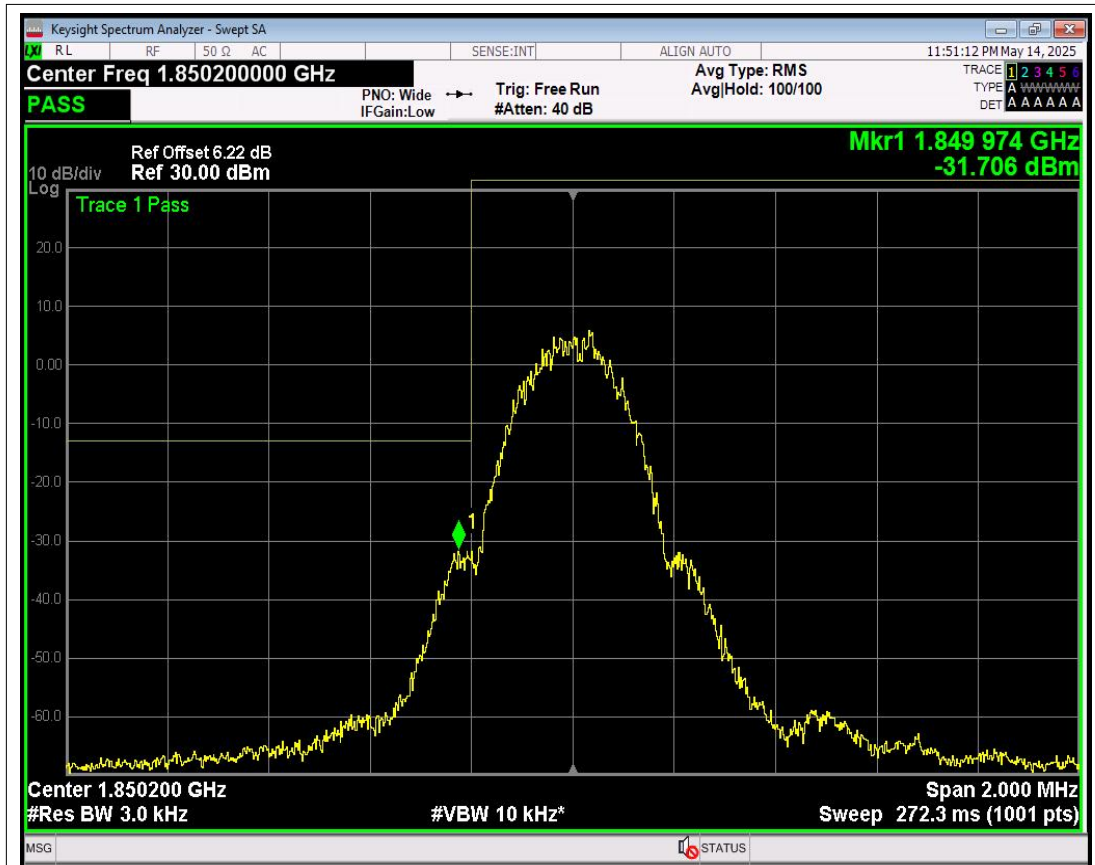


EGPRS1900 Channel=512

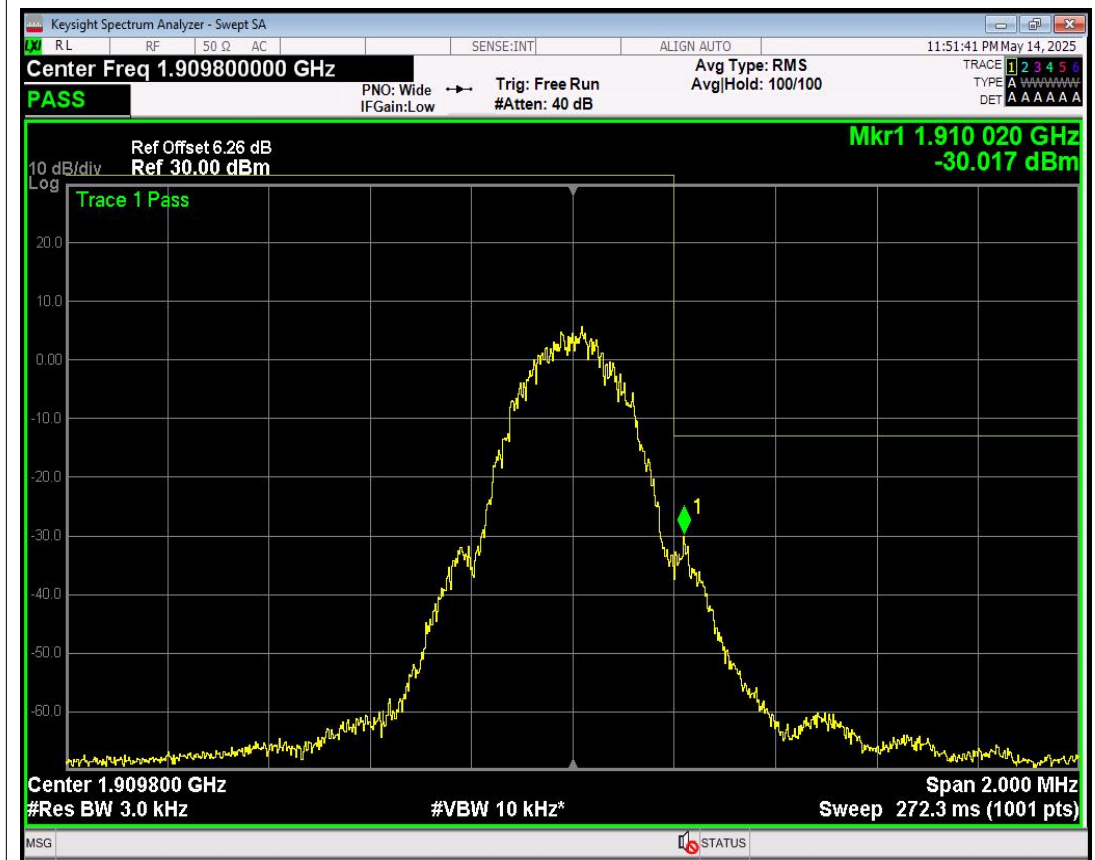


EGPRS1900 Channel=810

05 Band edge


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
GSM850	128	824.2	824.00	-26.57	-13	PASS
GSM850	251	848.8	849.02	-26.85	-13	PASS
GSM1900	512	1850.2	1849.98	-30.96	-13	PASS
GSM1900	810	1909.8	1910.02	-30.86	-13	PASS

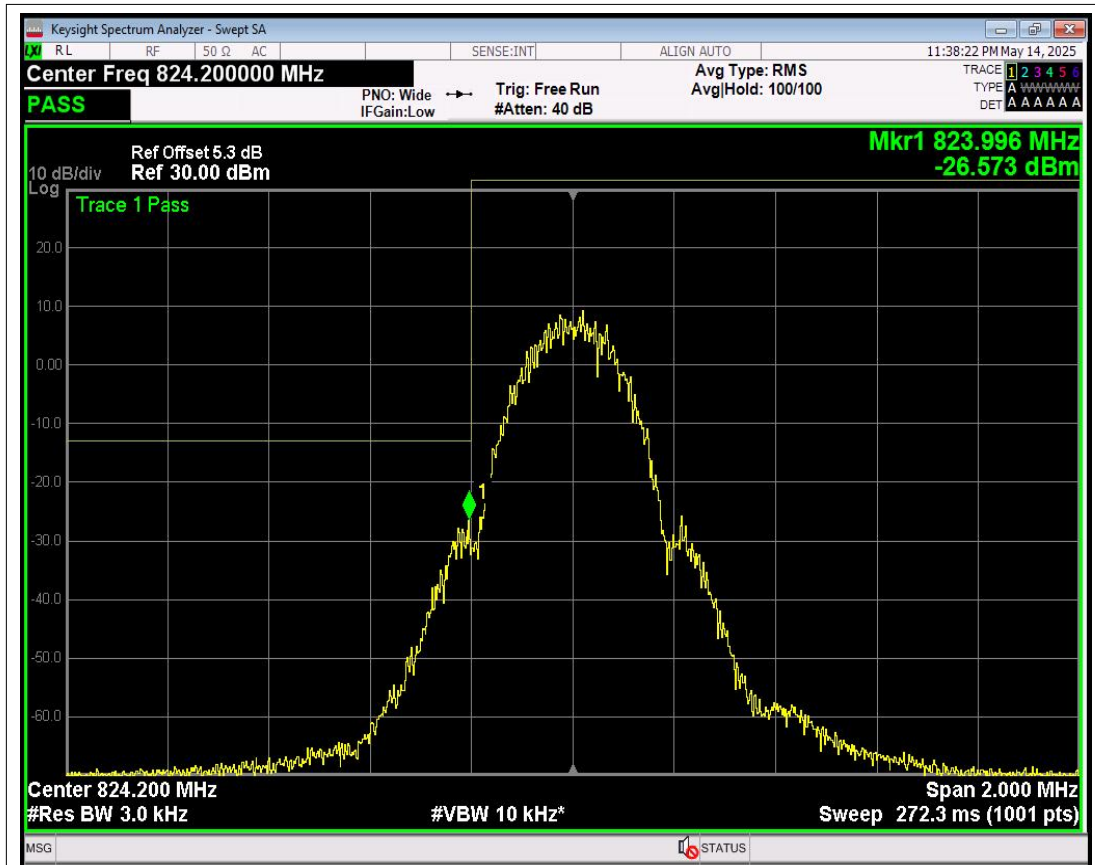


GSM850 Channel=128

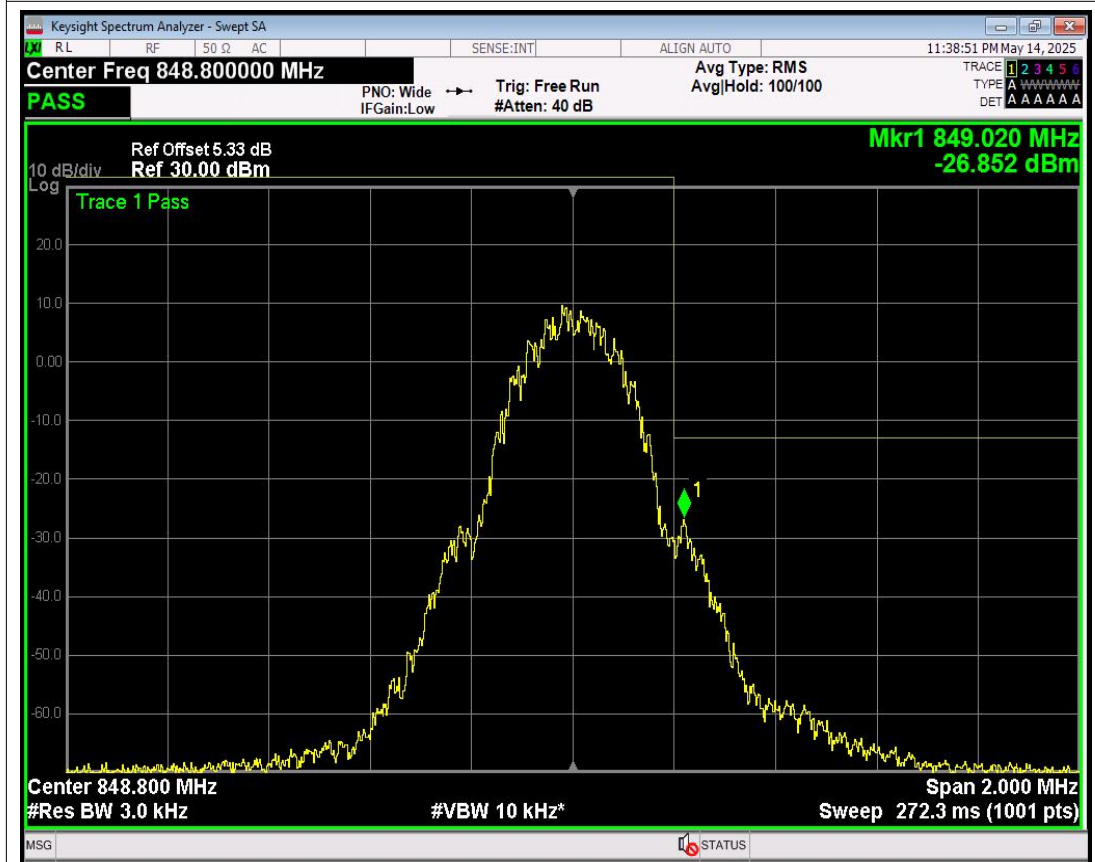

GSM850 Channel=251

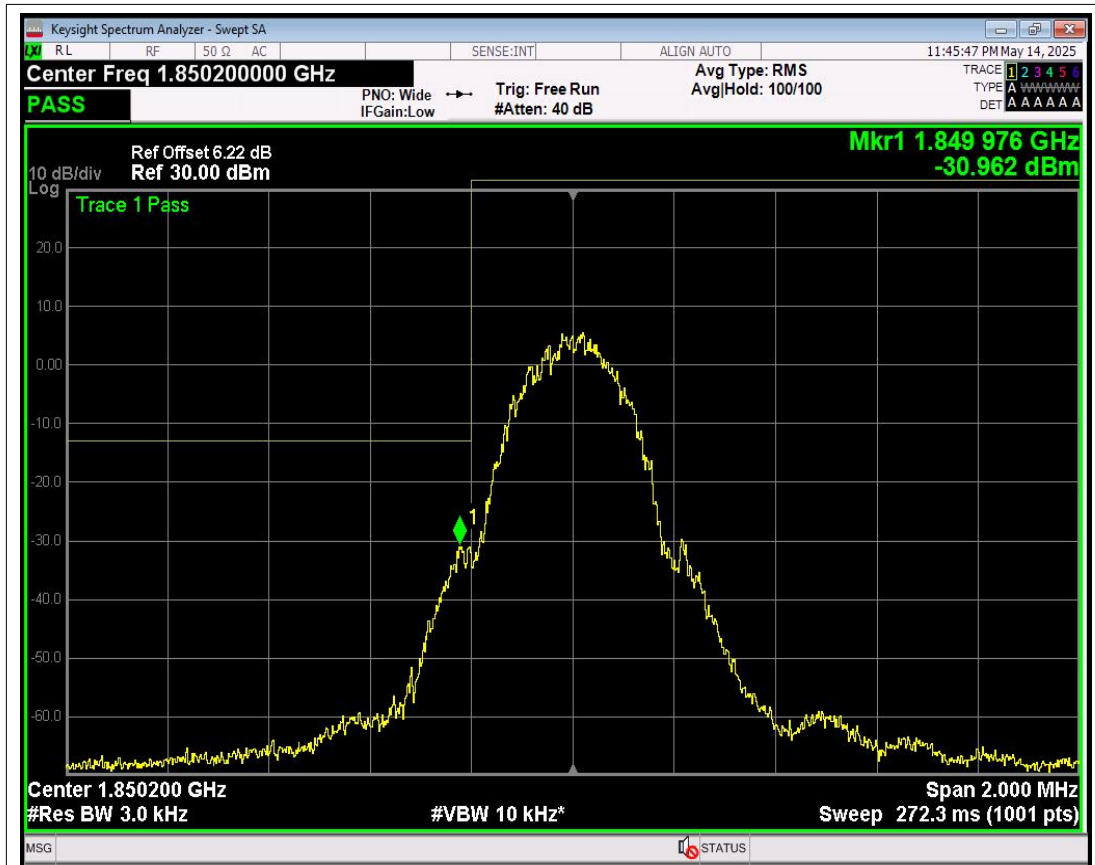

GSM1900 Channel=512

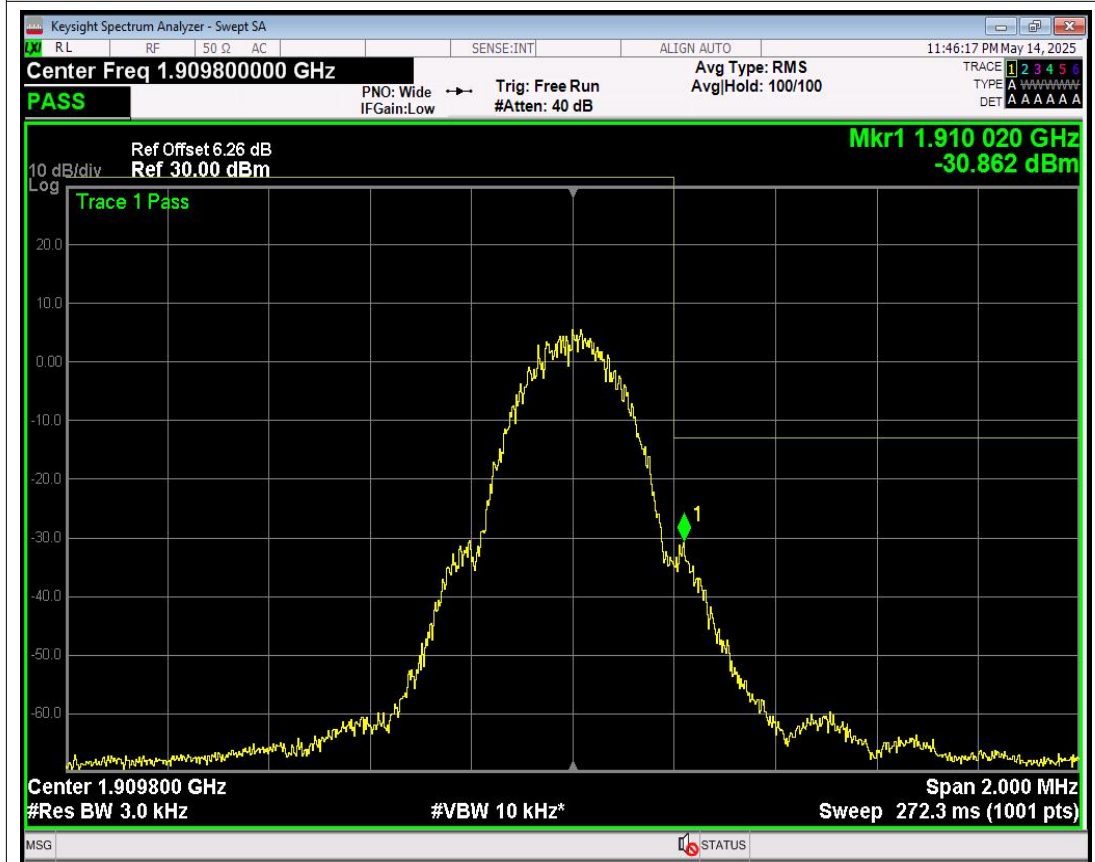

GSM1900 Channel=810

11 Band edge

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
GPRS850	128	824.2	823.99	-27.30	-13	PASS
GPRS850	251	848.8	849.02	-28.06	-13	PASS
GPRS1900	512	1850.2	1850.00	-29.60	-13	PASS
GPRS1900	810	1909.8	1910.02	-32.28	-13	PASS




GPRS850 Channel=128



GPRS850 Channel=251




GPRS1900 Channel=512

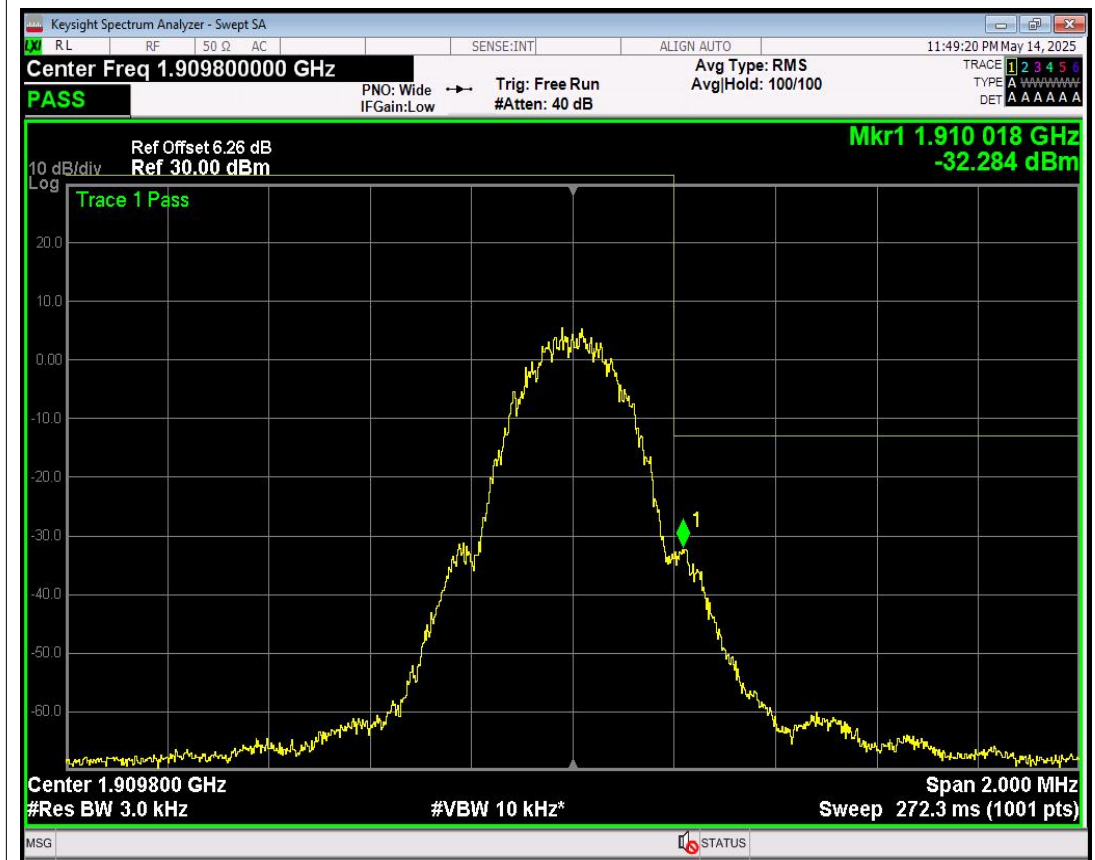


GPRS1900 Channel=810

06 Out-of-band emissions


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
GSM850	128	824.2	7068.32	-31.52	-13	PASS
GSM850	190	836.6	3457.19	-32.01	-13	PASS
GSM850	251	848.8	5617.19	-32.02	-13	PASS
GSM1900	512	1850.2	16520.73	-27.20	-13	PASS
GSM1900	661	1880	16533.21	-27.45	-13	PASS
GSM1900	810	1909.8	16266.61	-27.03	-13	PASS

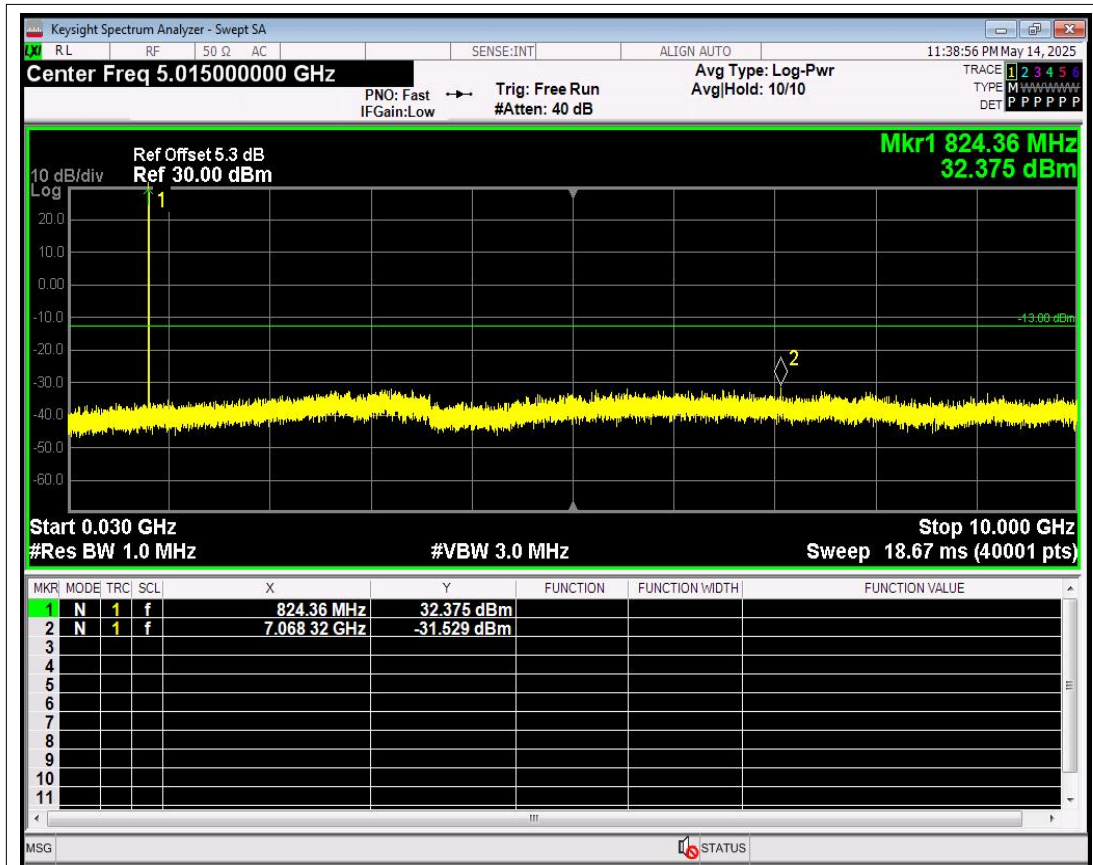


GSM850 Channel=128

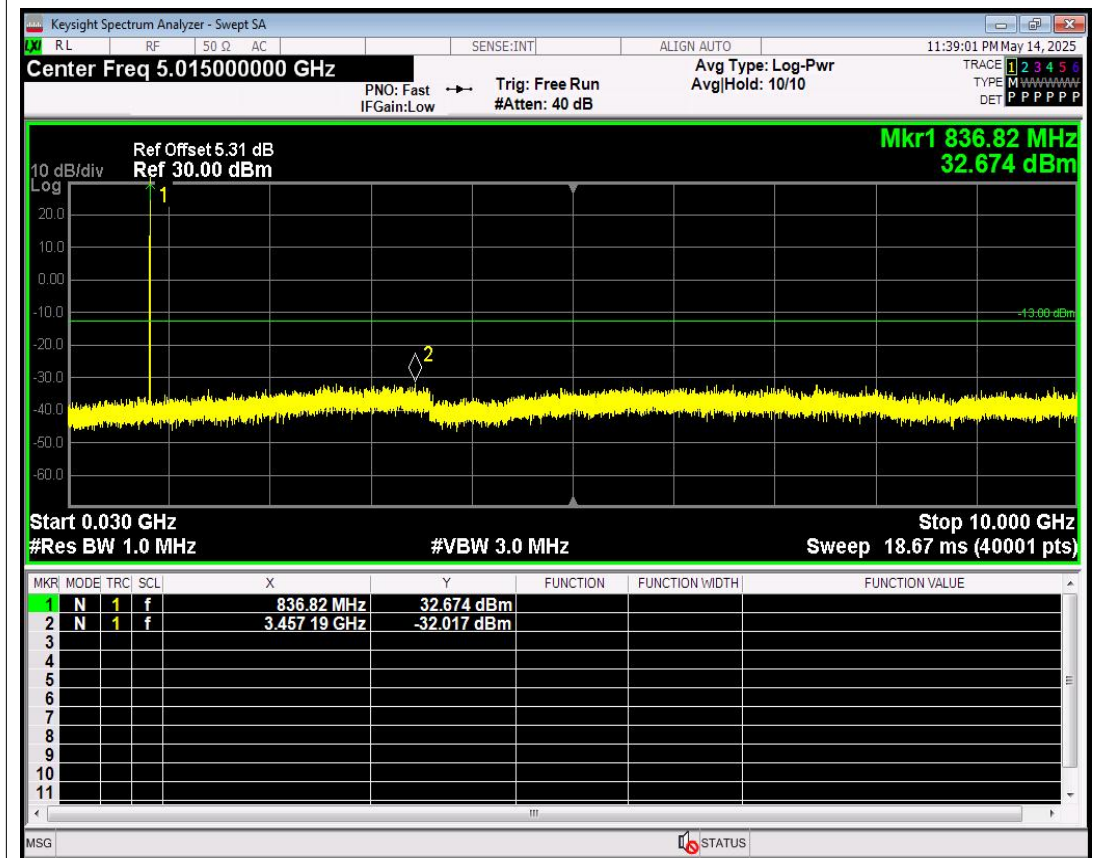


GSM850 Channel=190

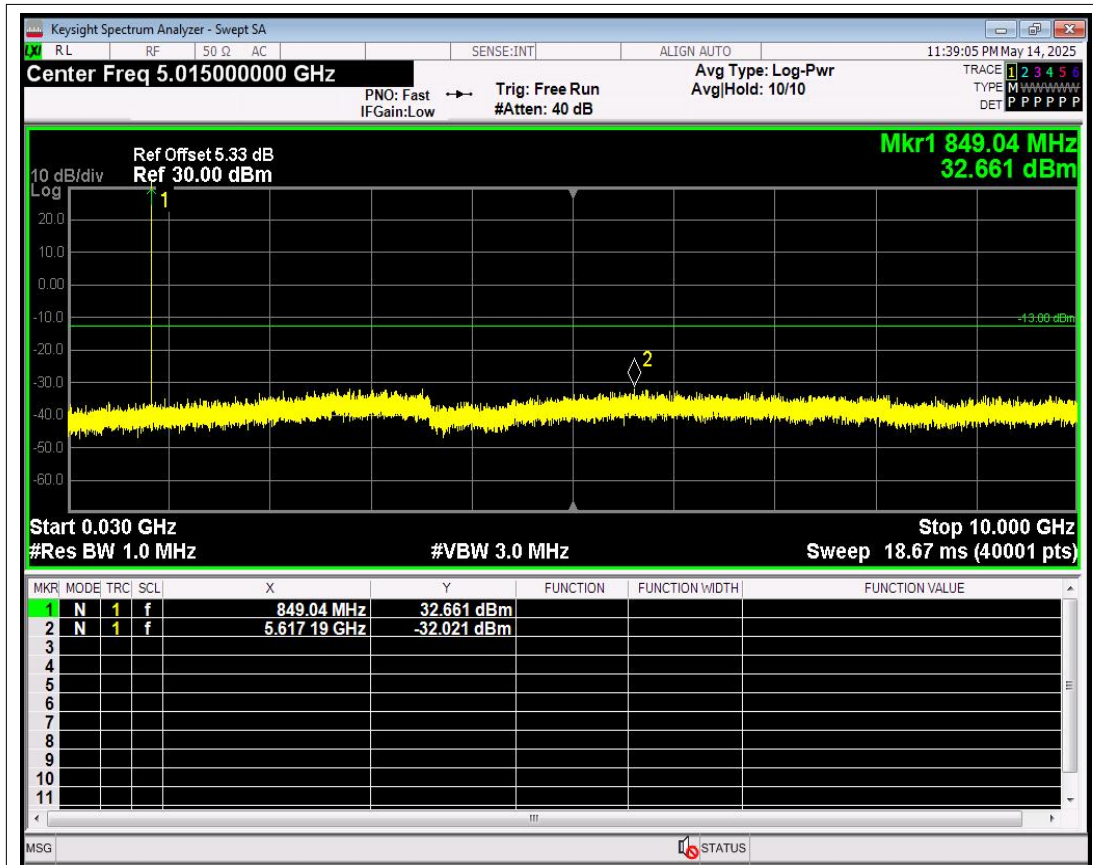


GSM850 Channel=251

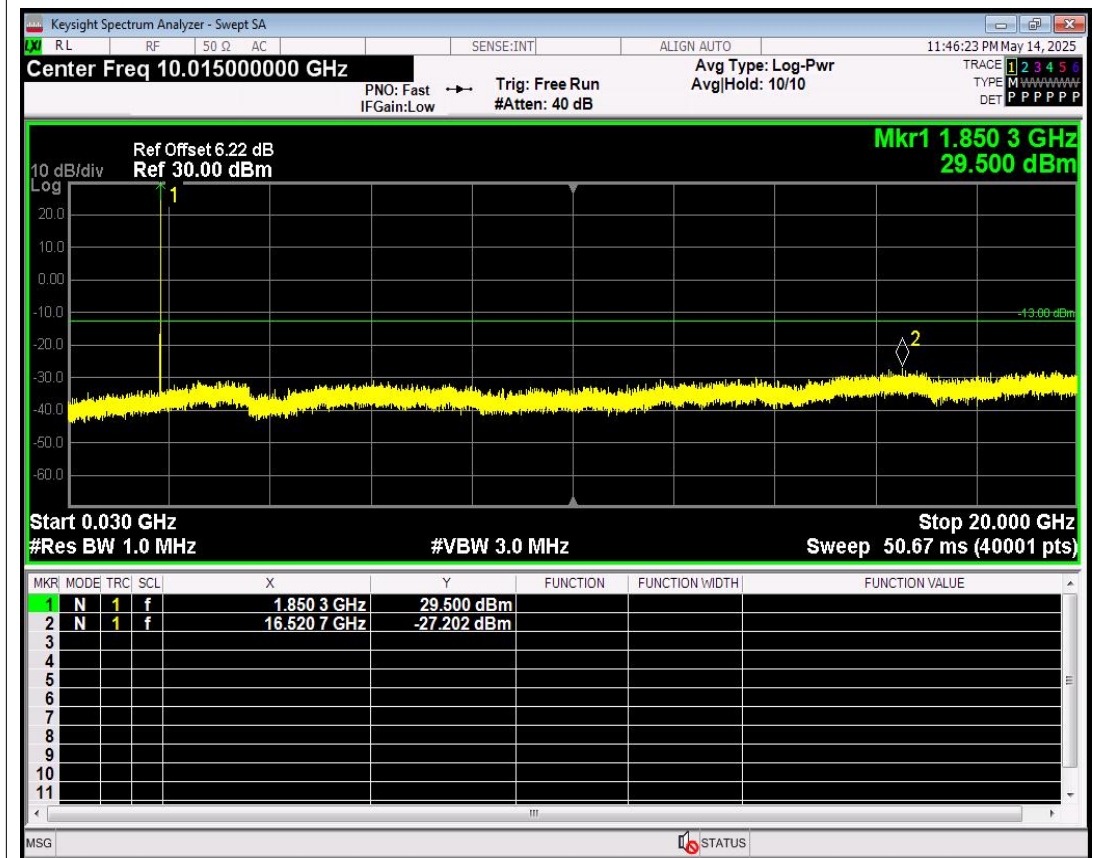

GSM1900 Channel=512

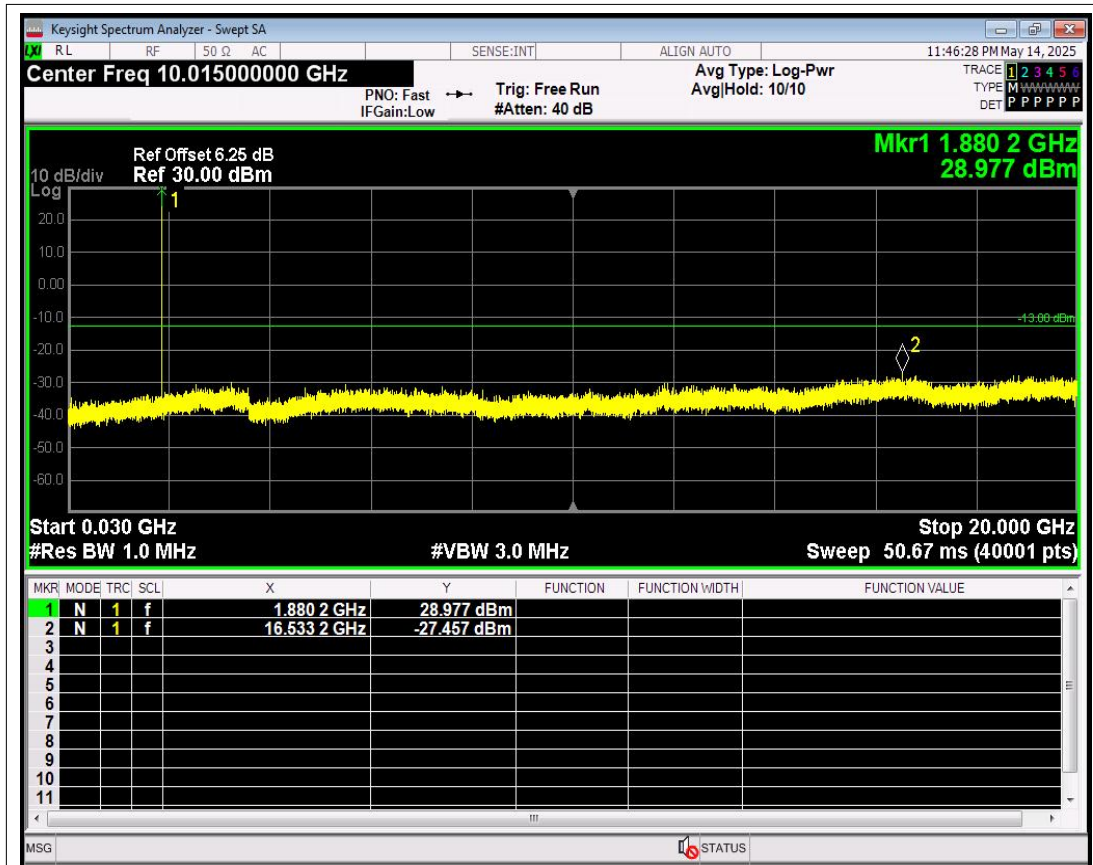


GSM1900 Channel=661

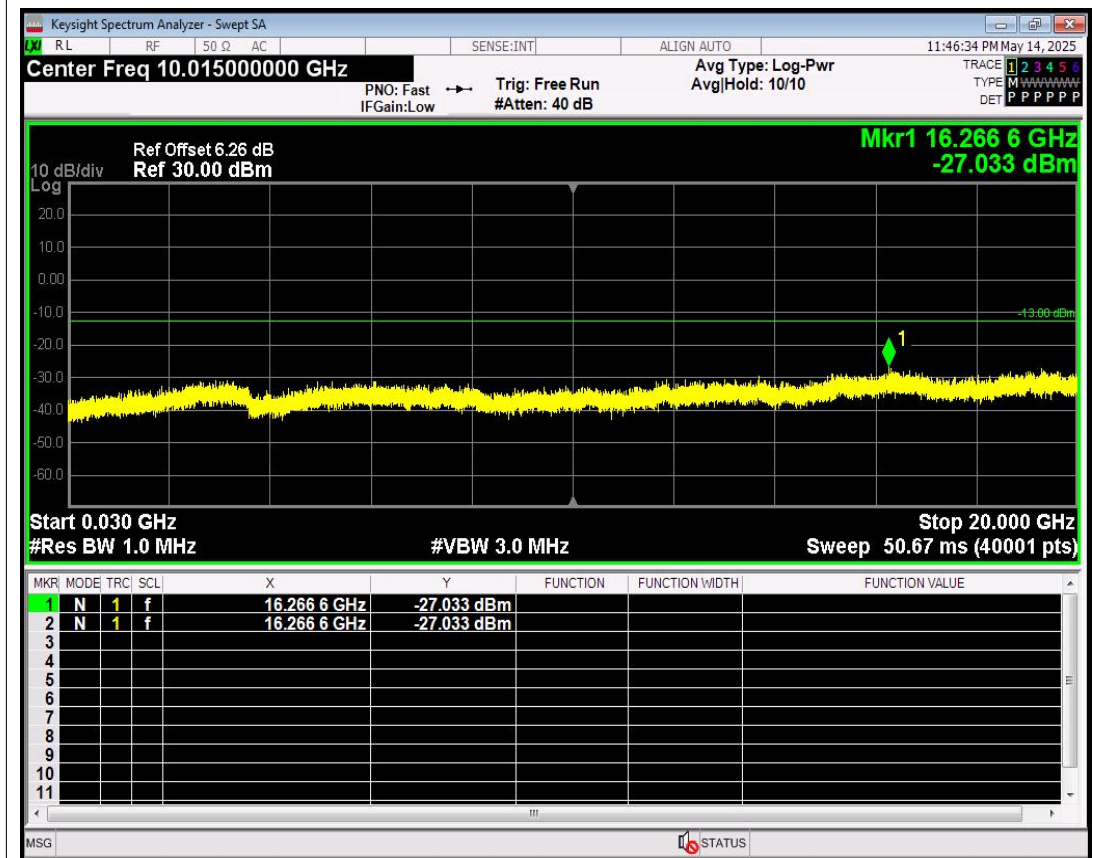


GSM1900 Channel=810

18 Out-of-band emissions


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	3165.57	-30.68	-13	PASS
EGPRS850	190	836.6	2771.25	-31.86	-13	PASS
EGPRS850	251	848.8	2635.66	-31.48	-13	PASS
EGPRS1900	512	1850.2	16362.46	-27.25	-13	PASS
EGPRS1900	661	1880	18919.12	-27.69	-13	PASS
EGPRS1900	810	1909.8	16519.73	-27.82	-13	PASS

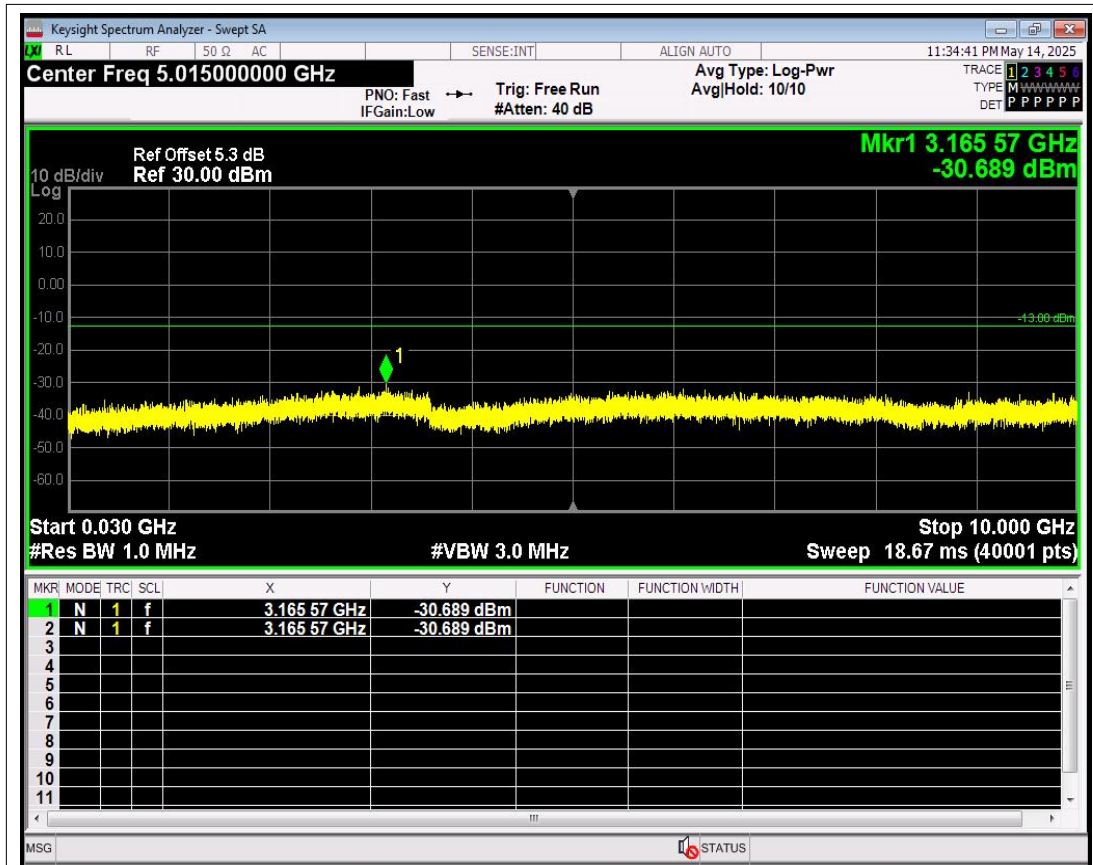


EGPRS850 Channel=128

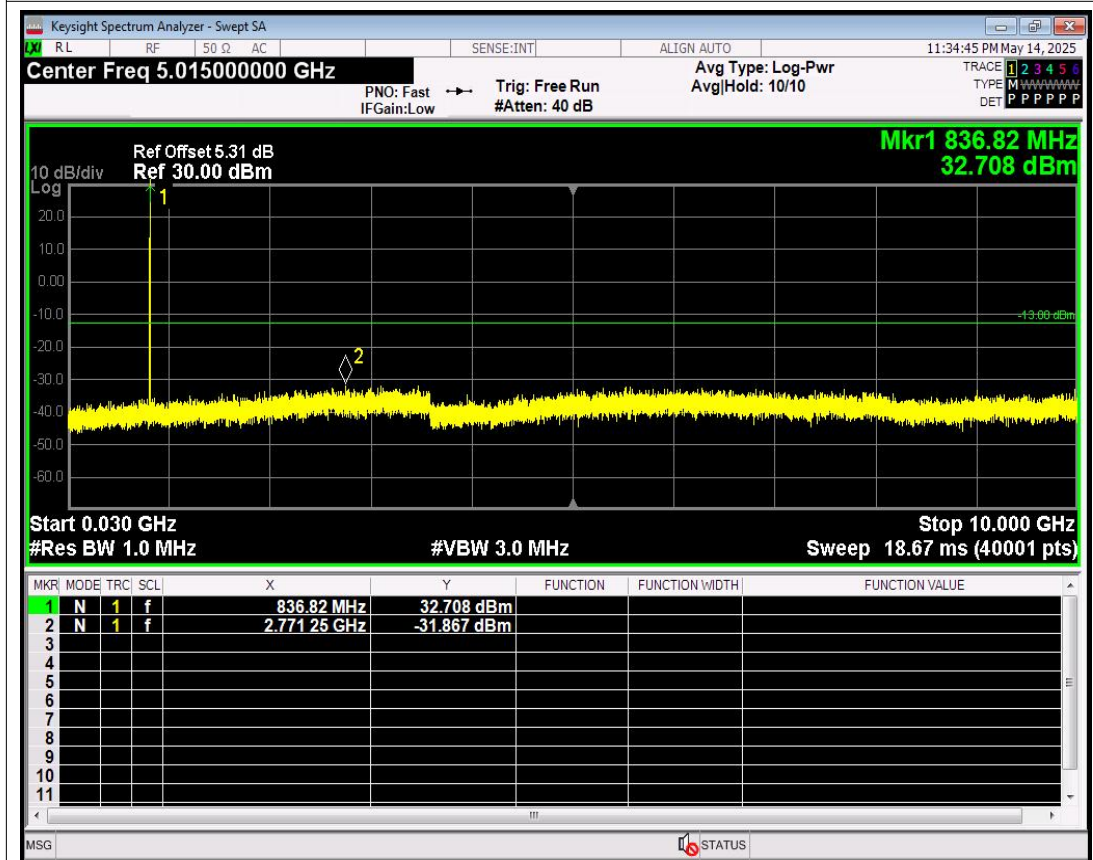


EGPRS850 Channel=190

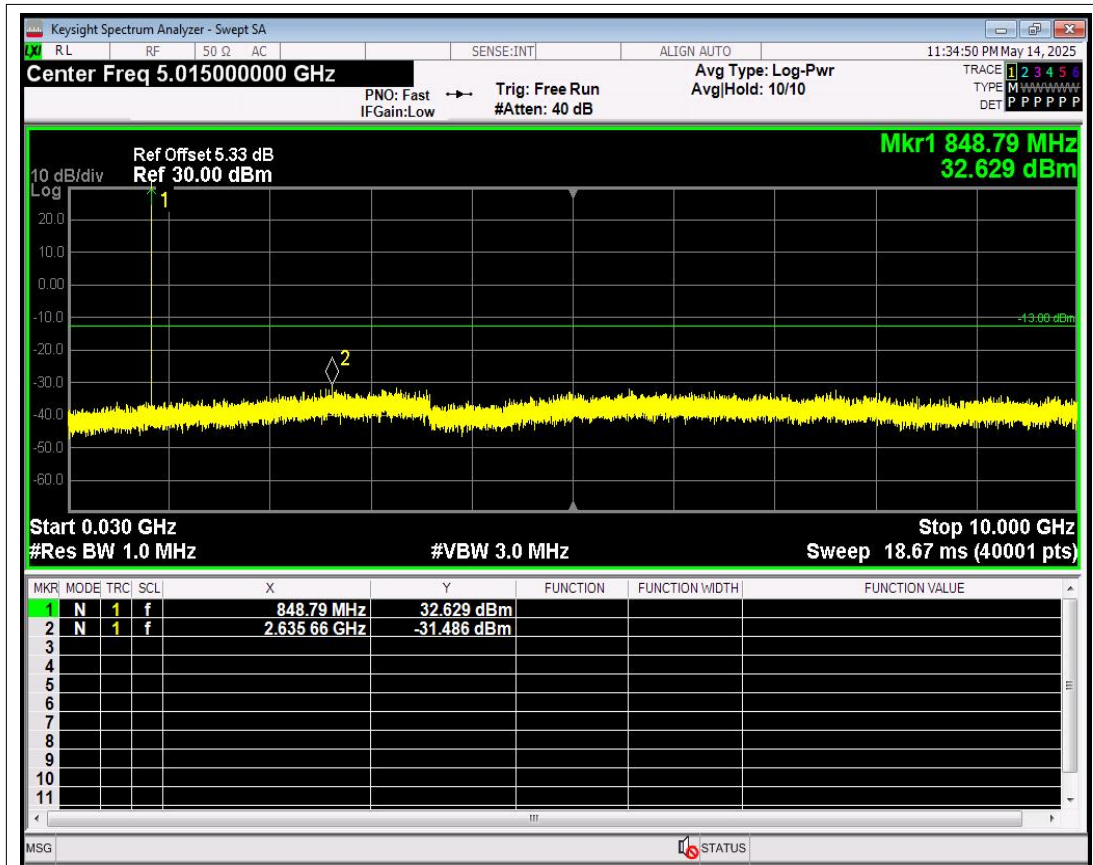


EGPRS850 Channel=251

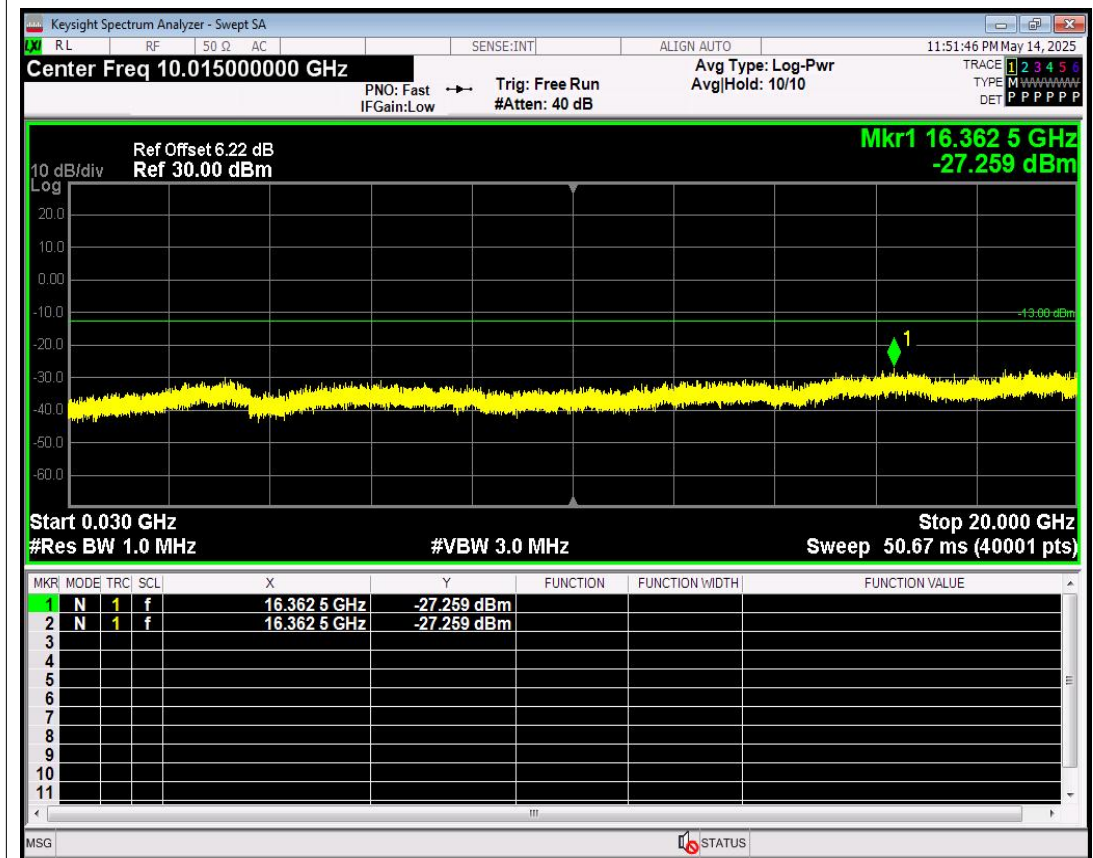

EGPRS1900 Channel=512

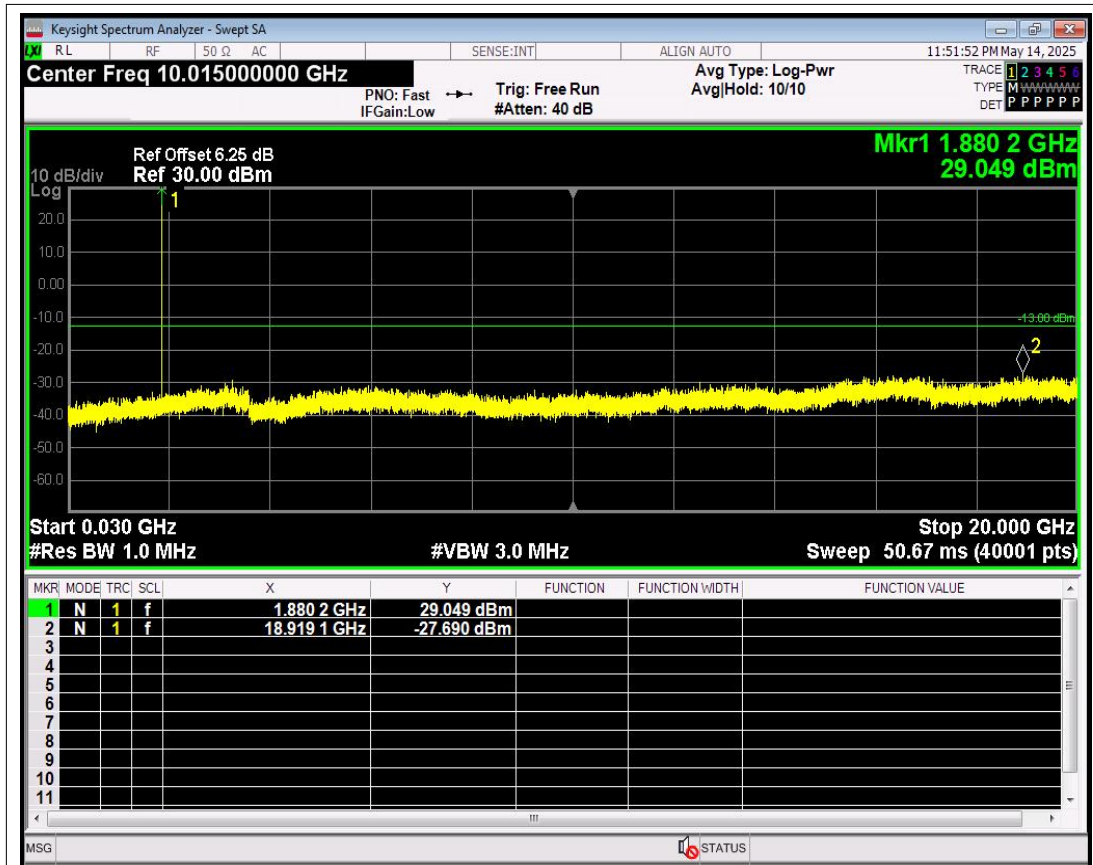


EGPRS1900 Channel=661

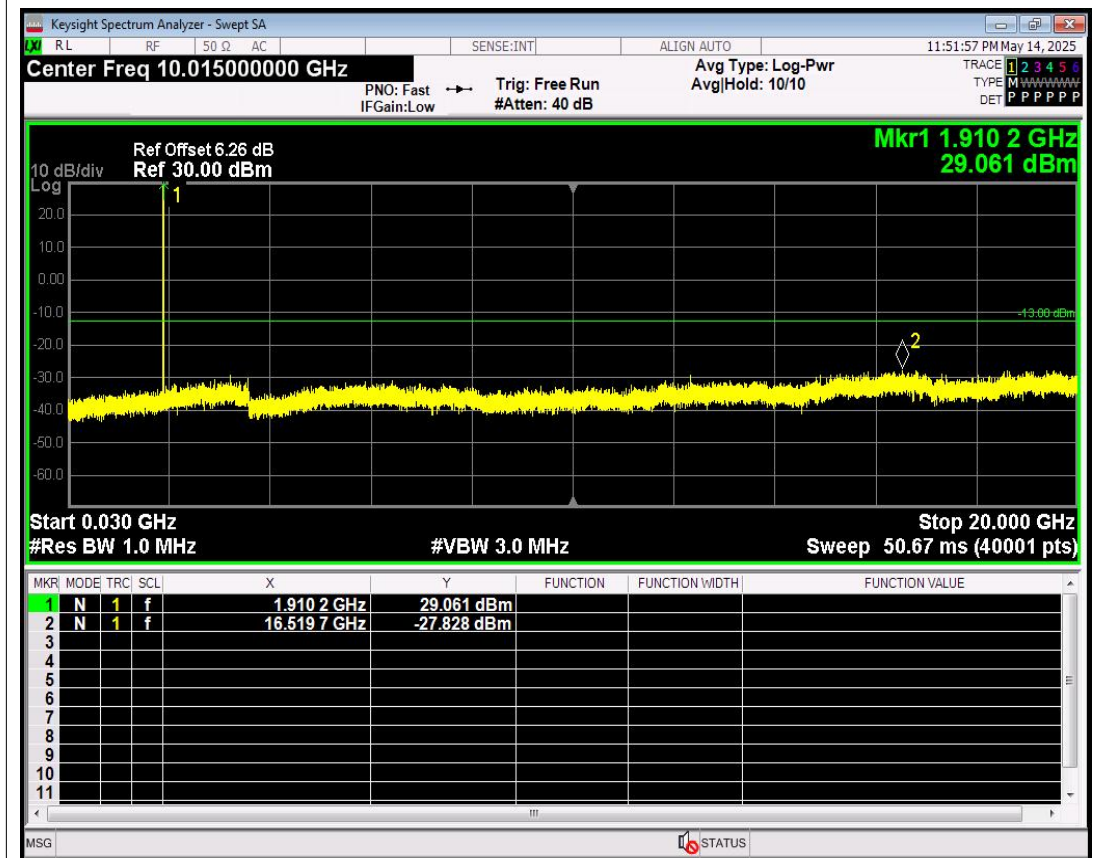


EGPRS1900 Channel=810

12 Out-of-band emissions


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
GPRS850	128	824.2	3047.67	-31.42	-13	PASS
GPRS850	190	836.6	3289.19	-31.04	-13	PASS
GPRS850	251	848.8	3058.14	-31.44	-13	PASS
GPRS1900	512	1850.2	15785.33	-27.21	-13	PASS
GPRS1900	661	1880	19546.18	-26.75	-13	PASS
GPRS1900	810	1909.8	16687.98	-27.98	-13	PASS

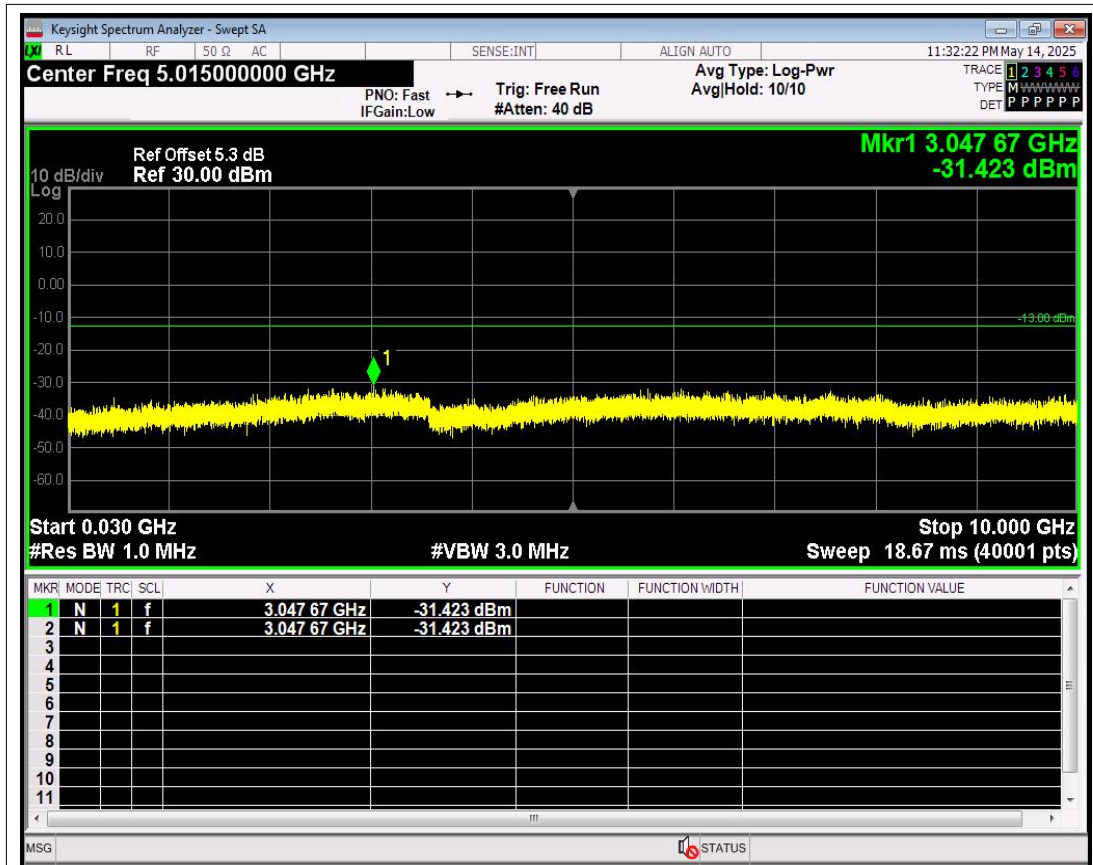


GPRS850 Channel=128

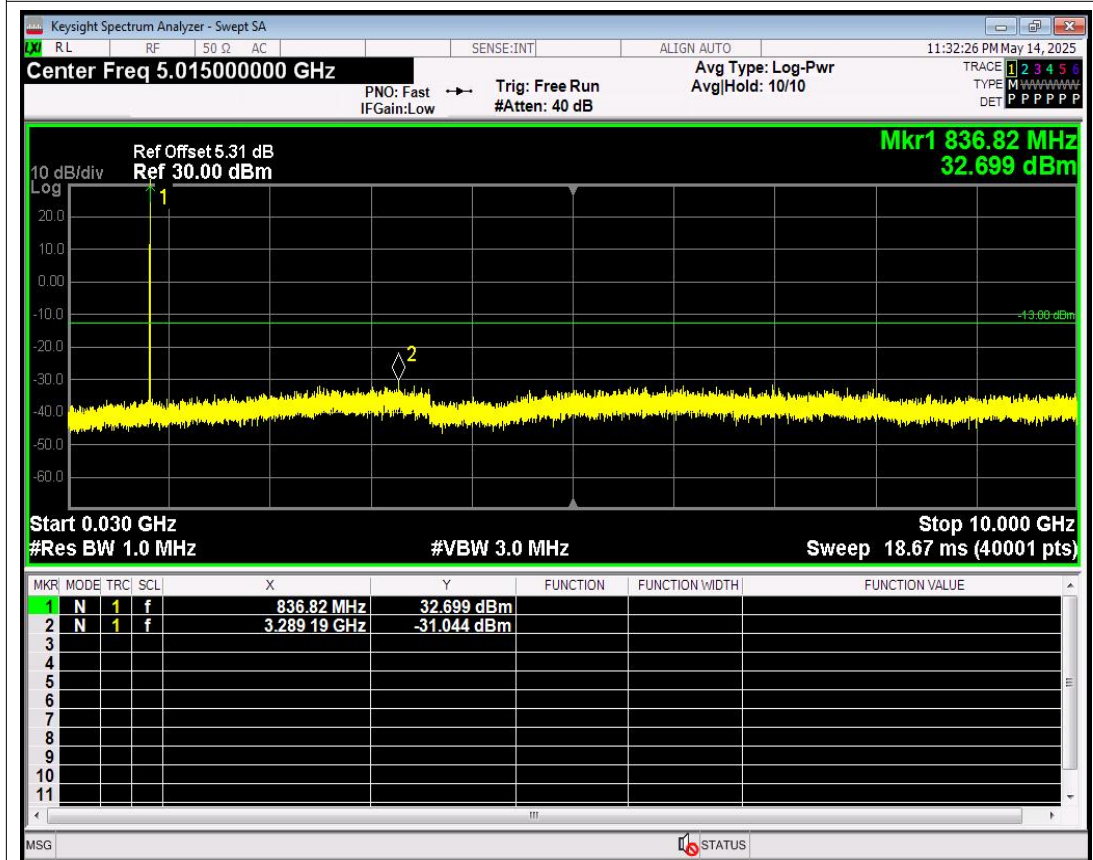


GPRS850 Channel=190

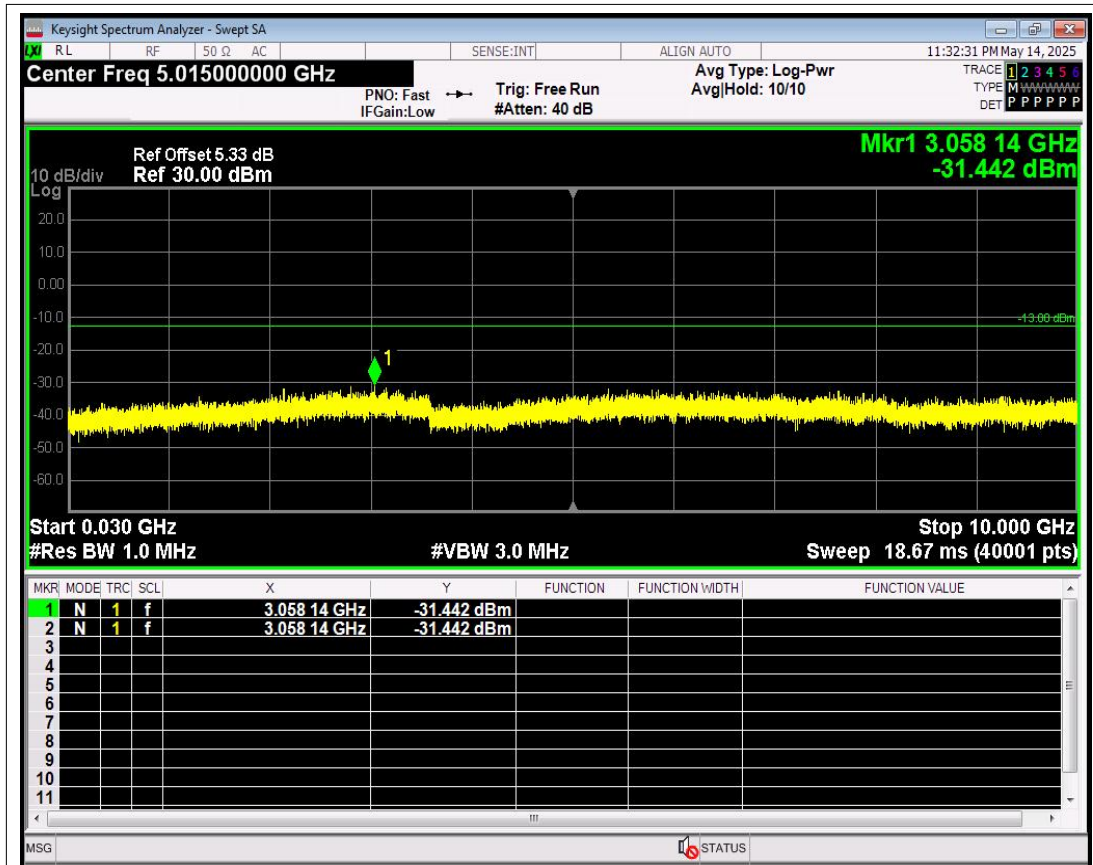


GPRS850 Channel=251

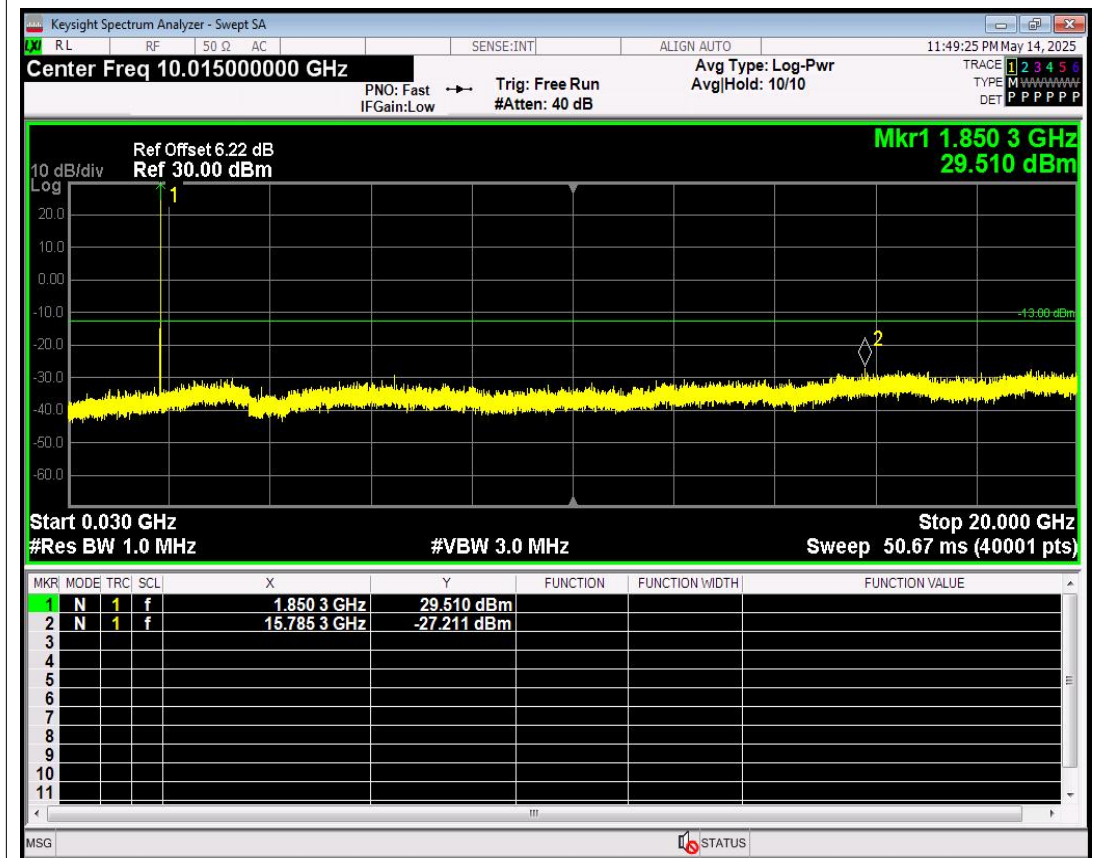

GPRS1900 Channel=512

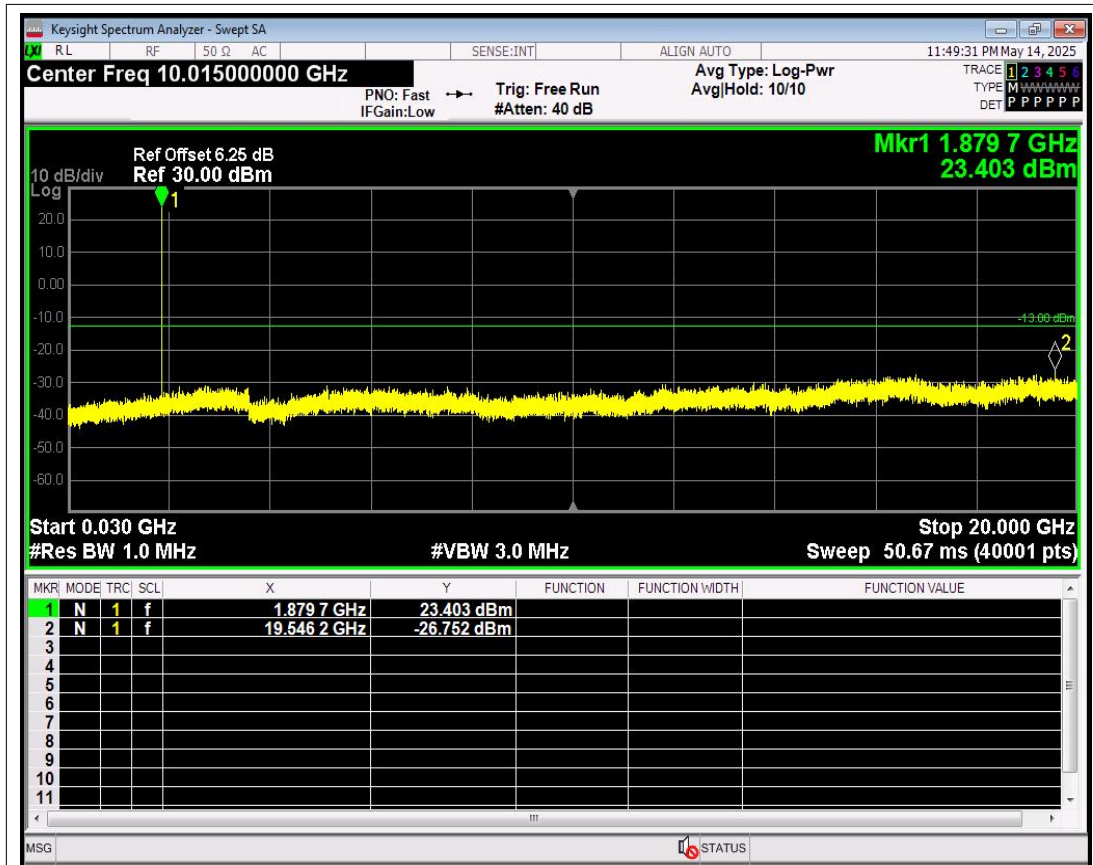

GPRS1900 Channel=661

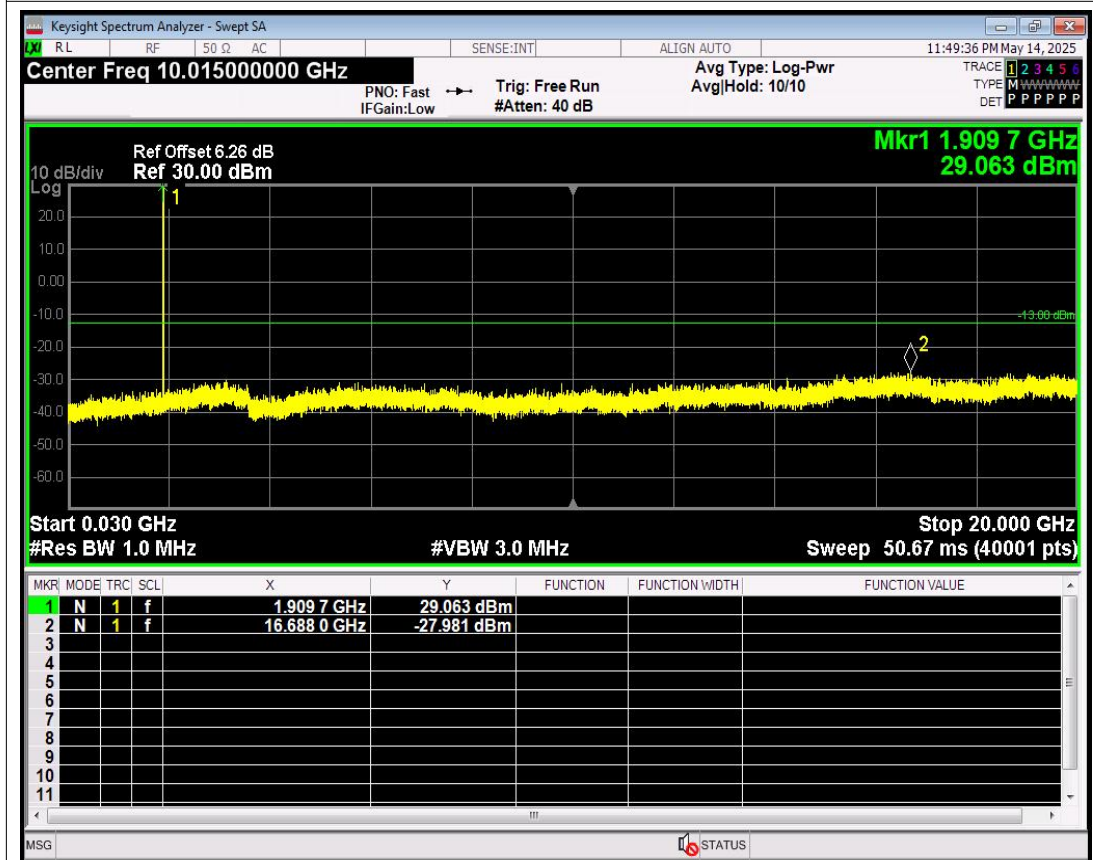


GPRS1900 Channel=810


07 Conducted output power (ERP) (EIRP)

Band	Channel	Frequency (MHz)	Power (dBm)	Gain (dBm)	ERP (dBm)	ERP Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
GPRS850 1 Slot	128	824.2	32.88	0	30.73	37	32.88	37	PASS
GPRS850 1 Slot	190	836.6	32.94	0	30.79	37	32.94	37	PASS
GPRS850 1 Slot	251	848.8	32.94	0	30.79	37	32.94	37	PASS
GPRS850 2 Slot	128	824.2	32.07	0	29.92	37	32.07	37	PASS
GPRS850 2 Slot	190	836.6	32.12	0	29.97	37	32.12	37	PASS
GPRS850 2 Slot	251	848.8	32.14	0	29.99	37	32.14	37	PASS
GPRS850 3 Slot	128	824.2	30.18	0	28.03	37	30.18	37	PASS
GPRS850 3 Slot	190	836.6	30.25	0	28.10	37	30.25	37	PASS
GPRS850 3 Slot	251	848.8	30.30	0	28.15	37	30.30	37	PASS
GPRS850 4 Slot	128	824.2	28.95	0	26.80	37	28.95	37	PASS
GPRS850 4 Slot	190	836.6	29.05	0	26.90	37	29.05	37	PASS
GPRS850 4 Slot	251	848.8	29.10	0	26.95	37	29.10	37	PASS
GPRS1900 1 Slot	512	1850.2	29.67	0	27.52	37	29.67	37	PASS
GPRS1900 1 Slot	661	1880	29.53	0	27.38	37	29.53	37	PASS
GPRS1900 1 Slot	810	1909.8	29.08	0	26.93	37	29.08	37	PASS
GPRS1900 2 Slot	512	1850.2	28.97	0	26.82	37	28.97	37	PASS
GPRS1900 2 Slot	661	1880	28.84	0	26.69	37	28.84	37	PASS
GPRS1900 2 Slot	810	1909.8	28.39	0	26.24	37	28.39	37	PASS
GPRS1900 3 Slot	512	1850.2	27.26	0	25.11	37	27.26	37	PASS
GPRS1900 3 Slot	661	1880	27.17	0	25.02	37	27.17	37	PASS


GPRS1900 3 Slot	810	1909.8	26.73	0	24.58	37	26.73	37	PASS
GPRS1900 4 Slot	512	1850.2	26.18	0	24.03	37	26.18	37	PASS
GPRS1900 4 Slot	661	1880	26.11	0	23.96	37	26.11	37	PASS
GPRS1900 4 Slot	810	1909.8	25.70	0	23.55	37	25.70	37	PASS

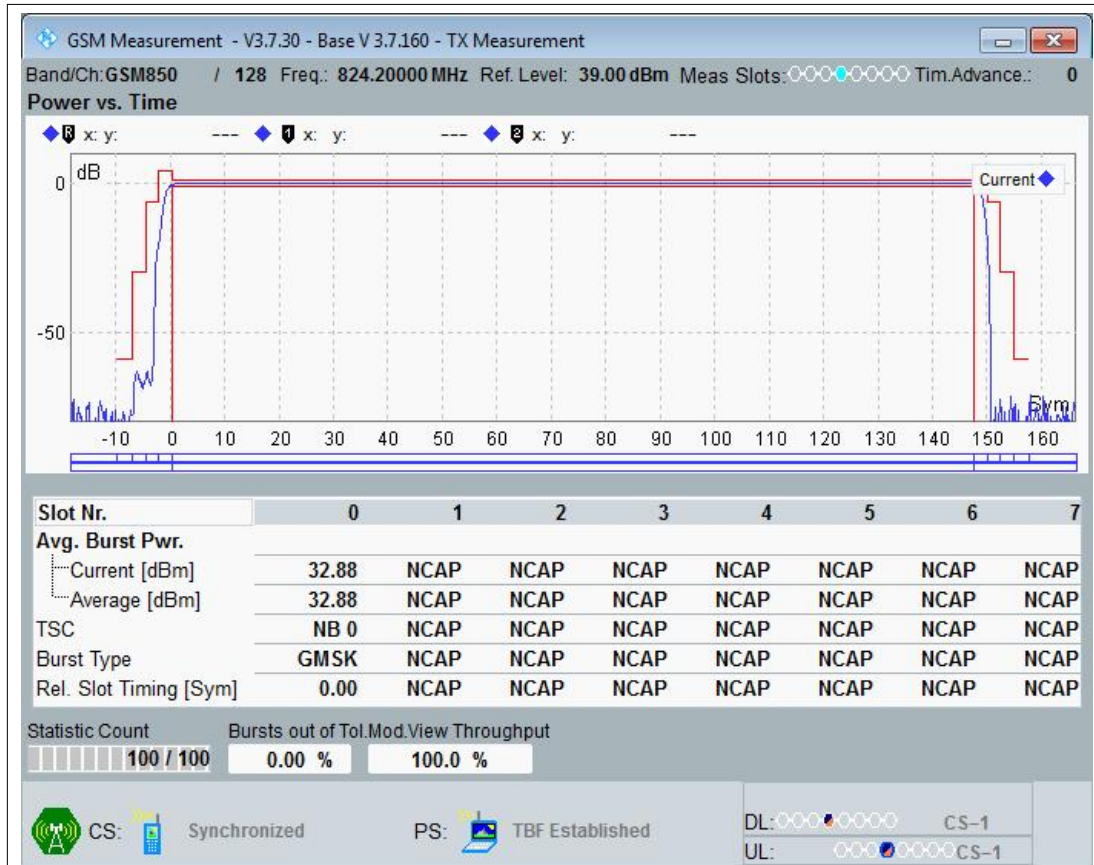


GPRS850 1 Slot Channel=128 1 Slot

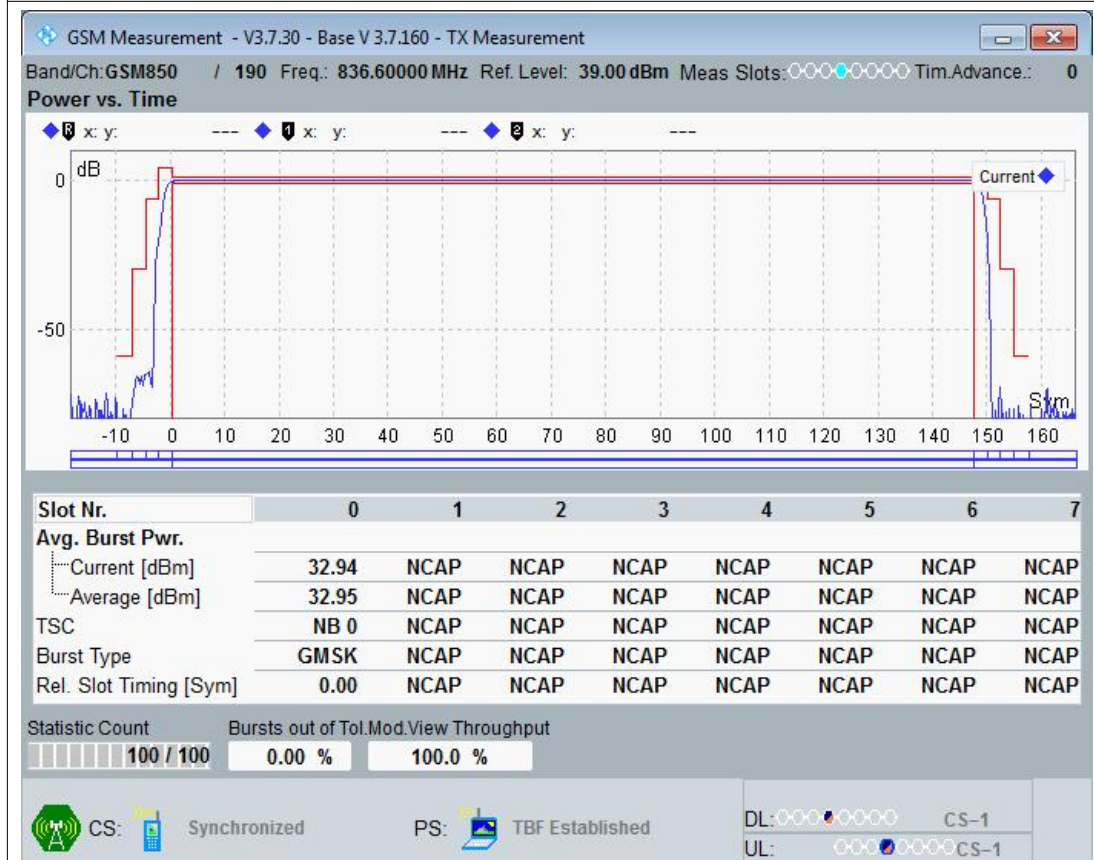


GPRS850 1 Slot Channel=190 1 Slot

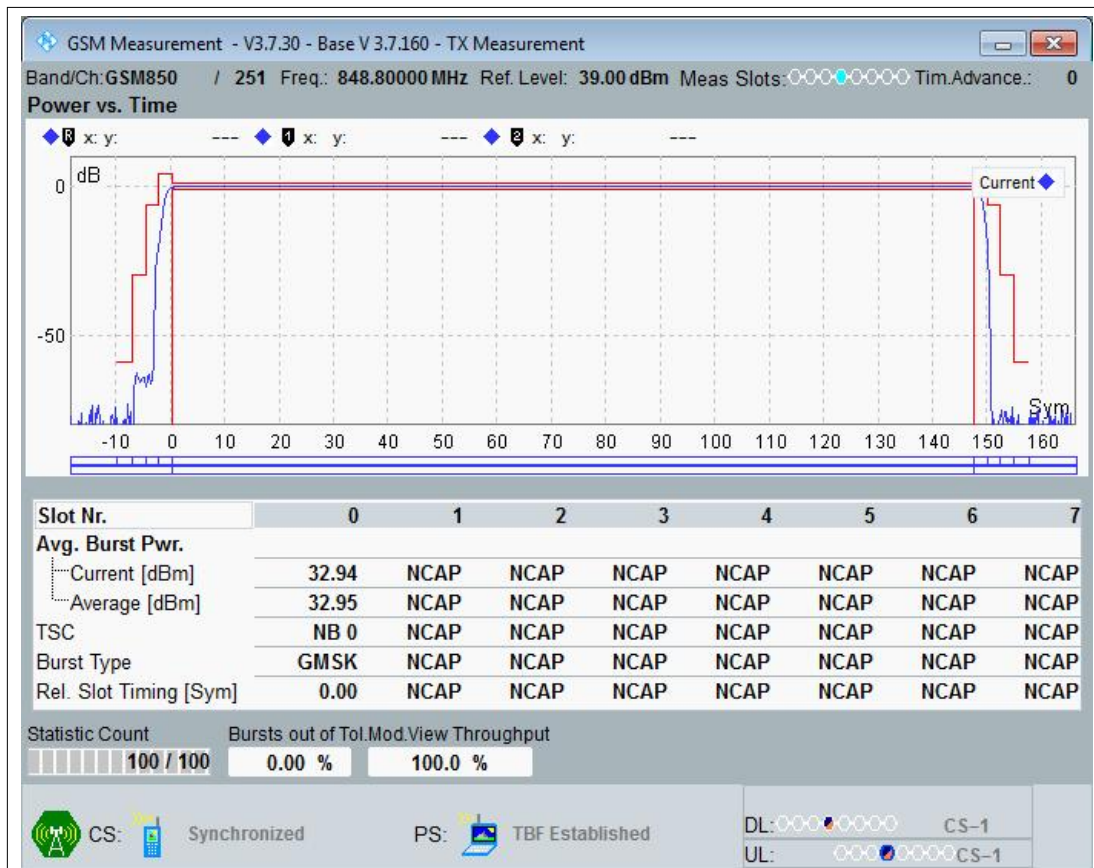


GPRS850 1 Slot Channel=251 1 Slot

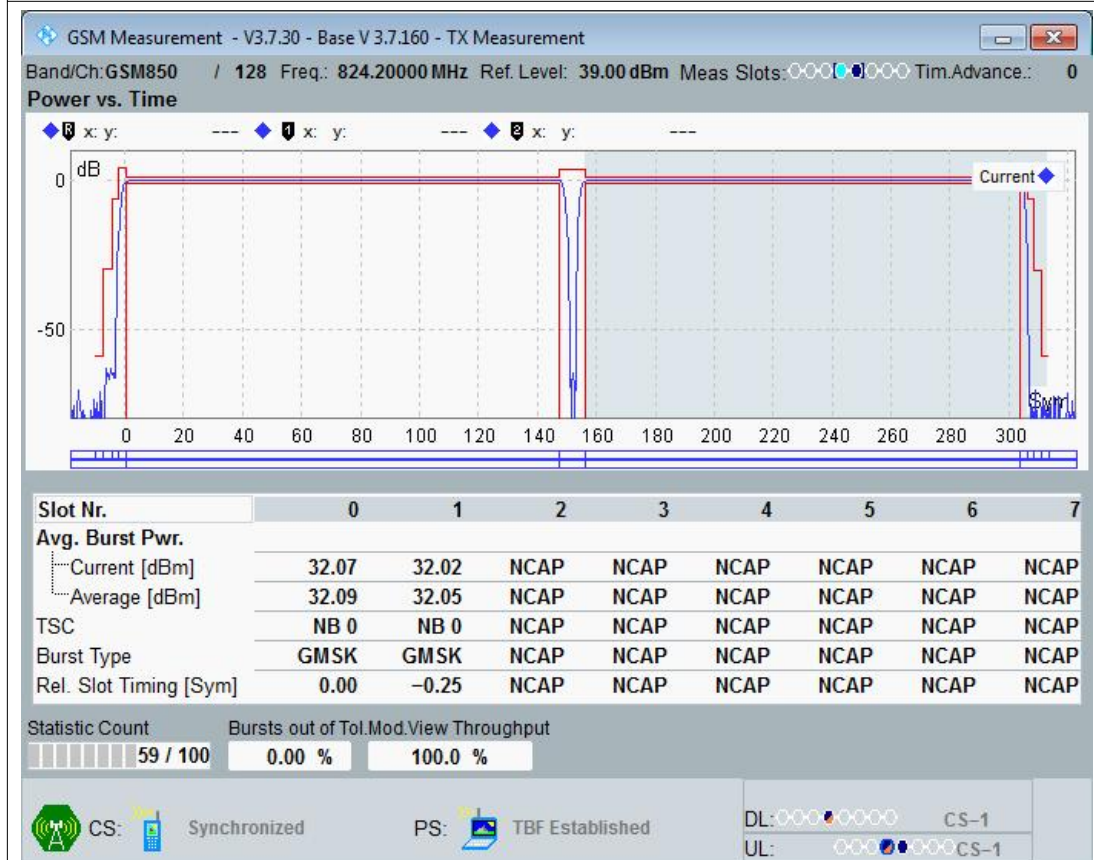


GPRS850 2 Slot Channel=128 2 Slot

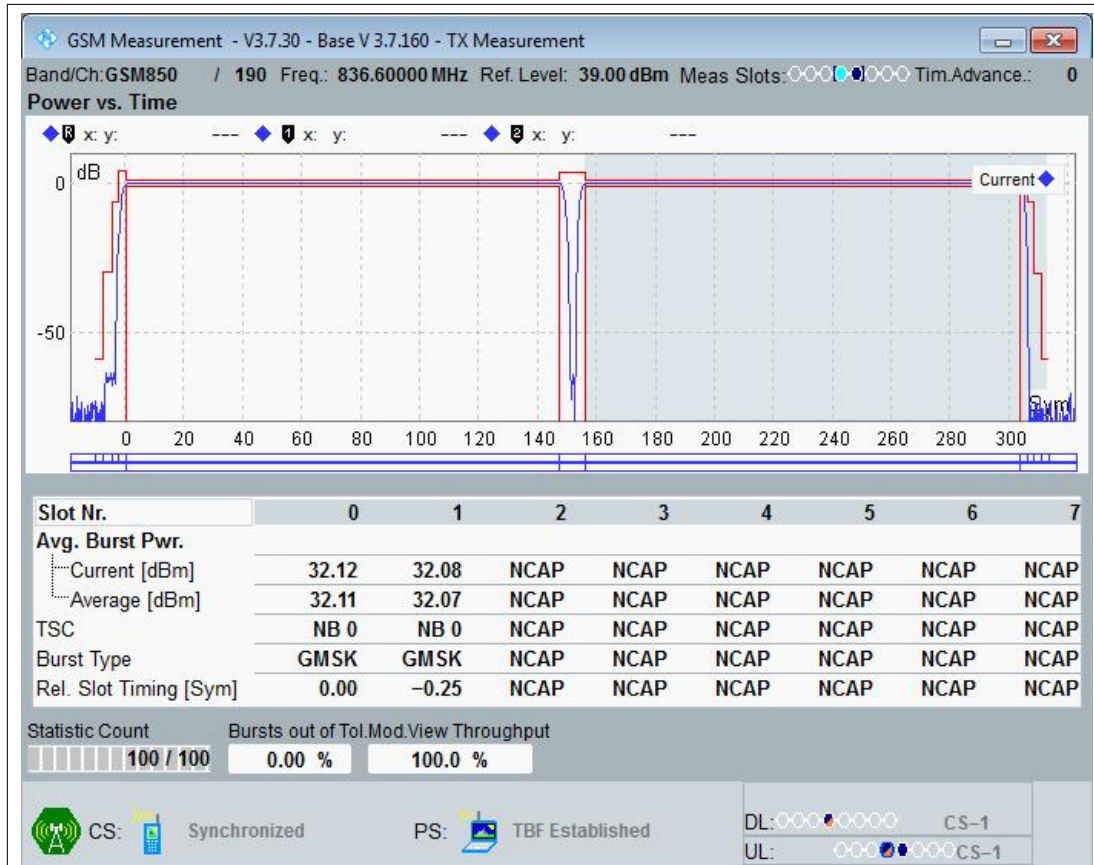


GPRS850 2 Slot Channel=190 2 Slot

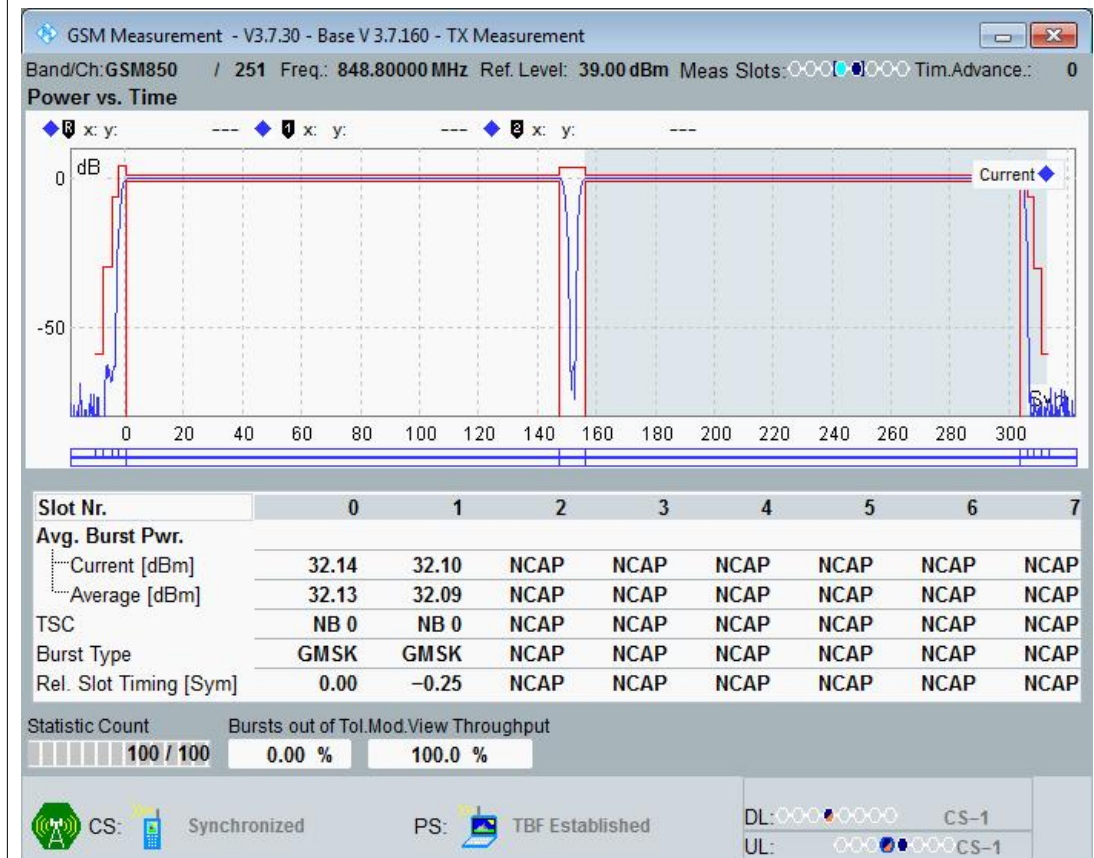

GPRS850 2 Slot Channel=251 2 Slot

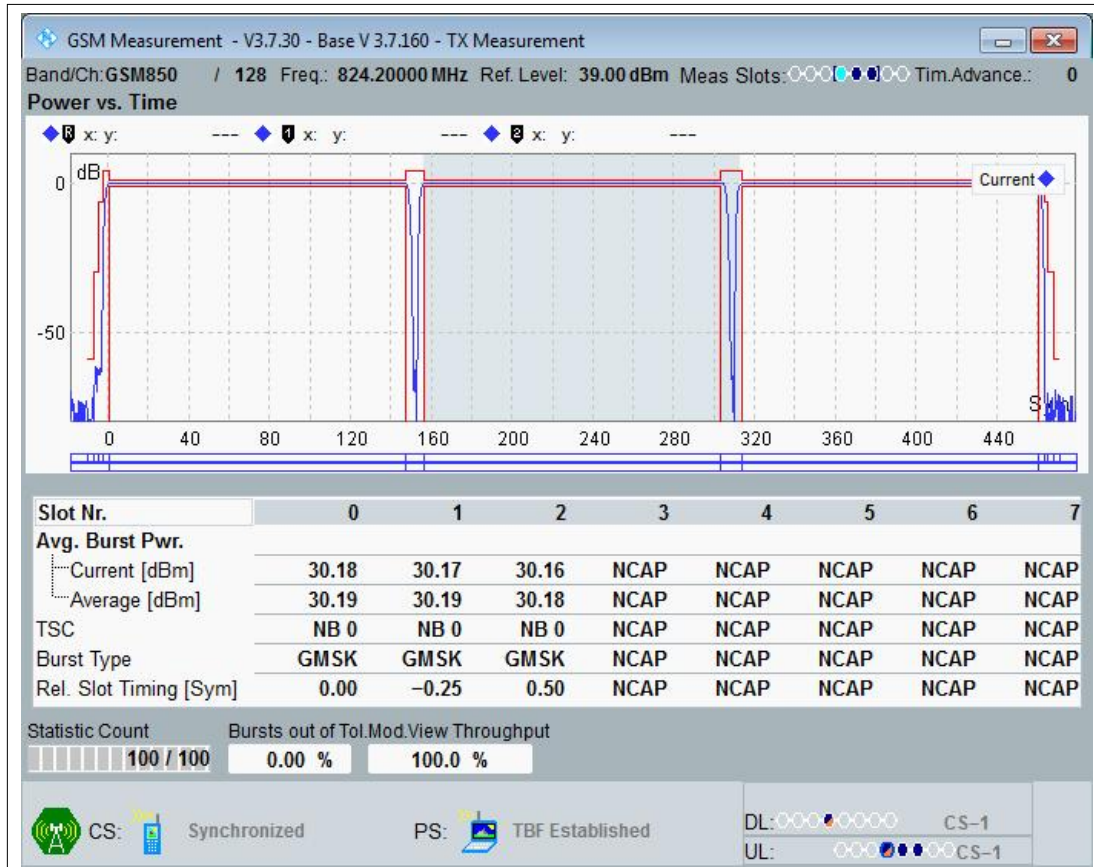

GPRS850 3 Slot Channel=128 3 Slot

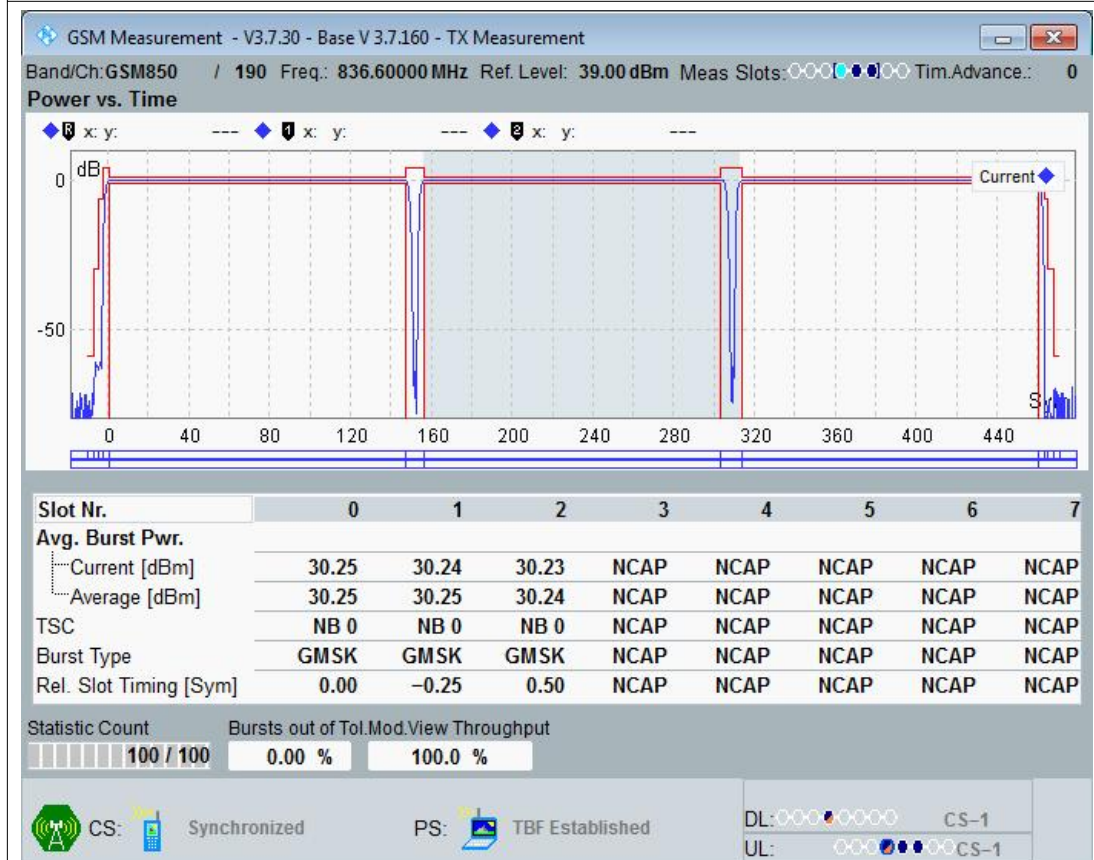

GPRS850 3 Slot Channel=190 3 Slot