

Antenna specification

Antenna Sample Confirmation From

Name of supplier	ShenZhen Aihui Technology Co. , Ltd				
Customer name	Chuang Zhi Shi				
Sample name	F900-V2.0				
model					
Sample size	128mm, 1.13mm wire diameter, black, double-ended tin-plated				
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit	(AOYang)	Business confirm ation	
The following is to be completed by the client					

Customer feedback	
Customer signature/seal	date:

Antenna Test Report

Test Unit: Shenzhen Aihui Technology Co. , Ltd.

Materials	FPC coaxial line		
Antenna type	Monopole	Type	Polarization mode Linear
Application scenario			

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen

Working band	WIFI	VSWR	≤2
Power	Max: 2W	Impedance	50Ω
dB _i			
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable		
Antenna Description:: 1. Grounding processing and picture description: no 2. Need to change the motherboard to match: no <ul style="list-style-type: none">● Test voltage: 3.6V, check the antenna contact is good before testing.● The RF cable of the integrated tester is kept in a natural state and can not be curled. Specification: test the specified power level, all indicators must conform to the specifications.			

1.Project Image

2.Test Fixture

3.Antenna matching circuit

4.S11 test

5.Antenna passive efficiency and gain

6.Darkroom test equipment and data

7.Schematic diagram of antenna assembly

8.Antenna environment handling

9.Antenna mass production index

10.Structural drawing

1. Project Image


The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment

2. Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making

Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole), and the other end is connected to the SMA joint. The diagram is as follows:

3. Antenna matching circuit

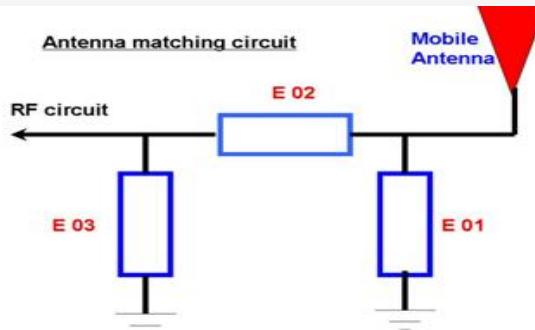


Modify

E01	E02	E03
No	No	No


Note: The match is unmodified.

4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

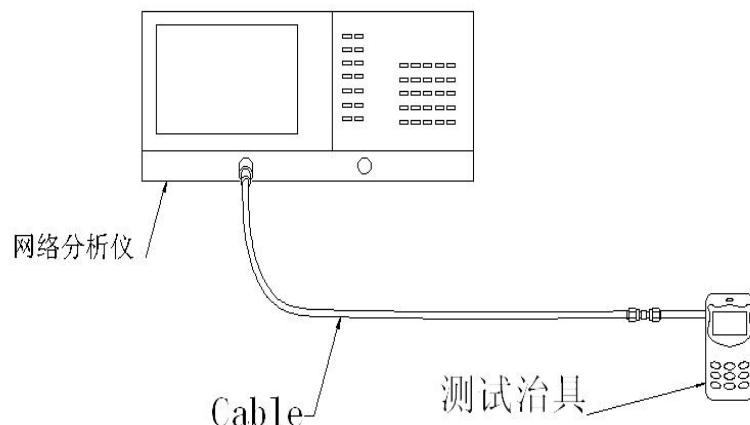

Main antenna passive standing wave ratio

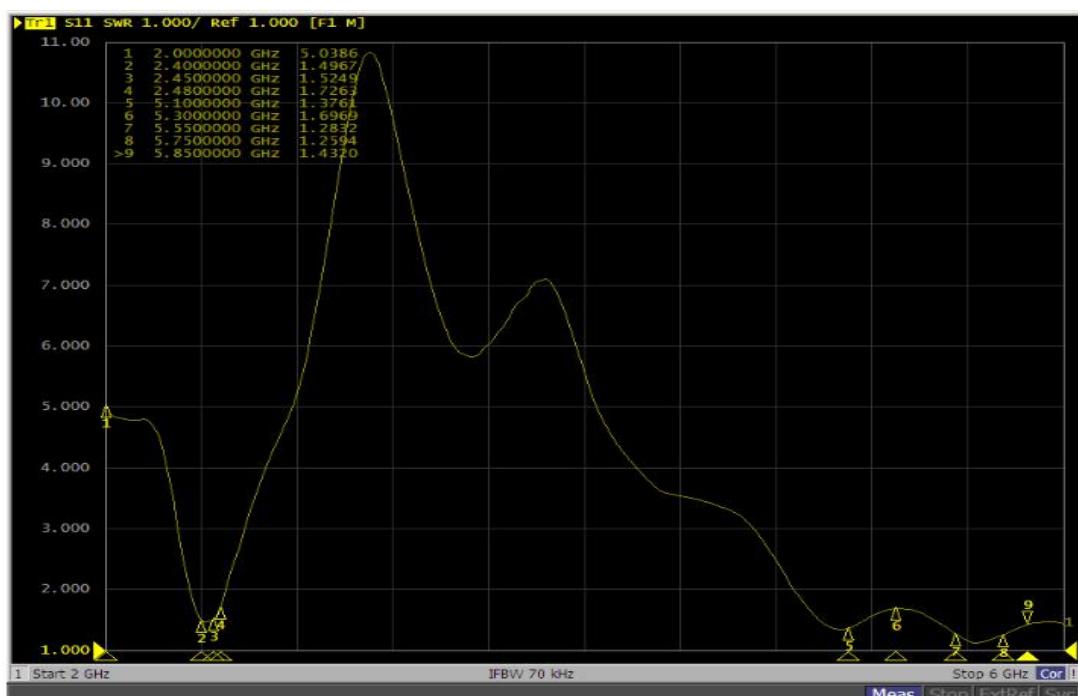

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen

5.2.Test Equipment

Test system: shielded darkroom

The temperature was $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and the humidity was $50\% \pm 15\%$

Test equipment: when testing passive data, use the Network analyzer AGILENT 5071C to test active data, use the omnibus CMW500



6.Antenna passive test data

测试数据：		
WIFI 2.4G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	58.57	1.85
2410	59.32	1.25
2420	60.11	1.48
2430	62.32	1.36
2440	64.25	1.25
2450	62.30	1.71
2460	61.51	1.44
2470	59.85	1.63
2480	58.41	1.55

7.1.Antenna environment handling

/

Address: 402TEL: 0755-23203435fax: 0755-23203435, Block C, Juxin Science and Technology Industrial Park, Nanchang community, xixiang, Baoan District, Shenzhen

8.Antenna mass production index

When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard. Based on the differences of the project itself, the following criteria are given:	Standard for volume production
2400MHZ-2500Mhz	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

9. Structural drawings

