

# Test Report

**Report No.** : MTi250523001-0203E2

**Date of Issue** : 2025-07-22

**Applicant** : DIFUNG SMARTECH INC

**Product** : Magnetic Wireless Powerbank

**Model(s)** : M120

**FCC ID** : 2BQIT-M120

**Shenzhen Microtest Co., Ltd.**

# TEST REPORT


Report No.: MTi250523001-0203E2

## Table of contents

<b>1 General Description .....</b>	<b>4</b>
1.1 Description of the EUT .....	4
1.2 Description of test modes .....	4
1.3 Description of support units .....	5
<b>2 Measurement uncertainty .....</b>	<b>5</b>
<b>3 Test facilities and accreditations .....</b>	<b>5</b>
3.1 Test laboratory .....	5
<b>4 List of test equipment .....</b>	<b>6</b>
<b>5 Test result .....</b>	<b>7</b>
5.2 Test setup .....	8
5.3 Test Procedures .....	8
5.4 Information of test equipment .....	9
5.5 Test results .....	10
<b>Photographs of the Test Setup .....</b>	<b>18</b>
<b>Photographs of the EUT .....</b>	<b>18</b>

**TEST REPORT**

Report No.: MTi250523001-0203E2

<b>Test Result Certification</b>		
Applicant	DIFUNG SMARTECH INC	
Applicant Address	709 Brea Canyon Rd, Ste 7, Walnut, CA 91789, the United States	
Manufacturer	Shenzhen Difung Energy Technology Co., Ltd.	
Manufacturer Address	2/F, Building C, Bada Industrial Zone, Heping Community, Fuhai Street, Baoan District, Shenzhen, China	
Factory	Shenzhen Difung Energy Technology Co., Ltd.	
Factory Address	2/F, Building C, Bada Industrial Zone, Heping Community, Fuhai Street, Baoan District, Shenzhen, China	
<b>Product description</b>		
Product name	Magnetic Wireless Powerbank	
Trademark	NINE CARAT	
Model name	M120	
Series Model(s)	N/A	
Standards	FCC CFR 47 PART 1, § 1.1310 Part 2.1093	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
<b>Testing Information</b>		
Date of test	2025-07-11 to 2025-07-15	
Test Result	Pass	
Prepared by:	Maleah Deng	
Reviewed by:	David Lee	
Approved by:	Lewis Lian	

# TEST REPORT

Report No.: MTi250523001-0203E2

## 1 General Description

### 1.1 Description of the EUT

Product name:	Magnetic Wireless Powerbank
Model name:	M120
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: USB-C: DC 5V/3A, DC 9V/2A, DC 12V/1.5A USB-C Output: DC 5V/3A, DC 9V/2.22A, DC12V/1.67A(Max) Wireless Output: 5W, 7.5W, 10W, 15W(Max) Battery: DC 3.85V, 10000mAh
Accessories:	Cable: USB-C to USB-C cable 30cm*1
Hardware version:	YH-DF-M120-938-V2
Software version:	V1-EBFA
Test sample(s) number:	MTi250523001-02-R001

### RF specification:

Operation frequency:	115-205kHz(5W, 10W, 15W); 360kHz(7.5W)
Modulation type:	ASK
Antenna type:	Coil Antenna

### 1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Charging+Wireless Output(5W)
Mode2	Wireless Output(5W)
Mode3	Wireless Output(7.5W)
Mode4	Wireless Output(10W)
Mode5	Wireless Output(15W)
Mode6	Standby

# TEST REPORT

Report No.: MTi250523001-0203E2

## 1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

<b>Support equipment list</b>			
Description	Model	Serial No.	Manufacturer
Mobile phone	Find X3	/	OPPO
Mobile phone	iPhone 11	/	APPLE
<b>Support cable list</b>			
Description	Length (m)	From	To
/	/	/	/

## 2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	±14.8%
Electric field measurements(3kHz~10MHz)	±17.5%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 3 Test facilities and accreditations

### 3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

# TEST REPORT

Report No.: MTi250523001-0203E2

## 4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

# TEST REPORT

Report No.: MTI250523001-0203E2

## 5 Test result

### 5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

**Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(i) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
<b>(ii) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30


f = frequency in MHz

\* = Plane-wave equivalent power density

**Note 1:** Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

**Note 2:** General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

## 5.2 Test setup

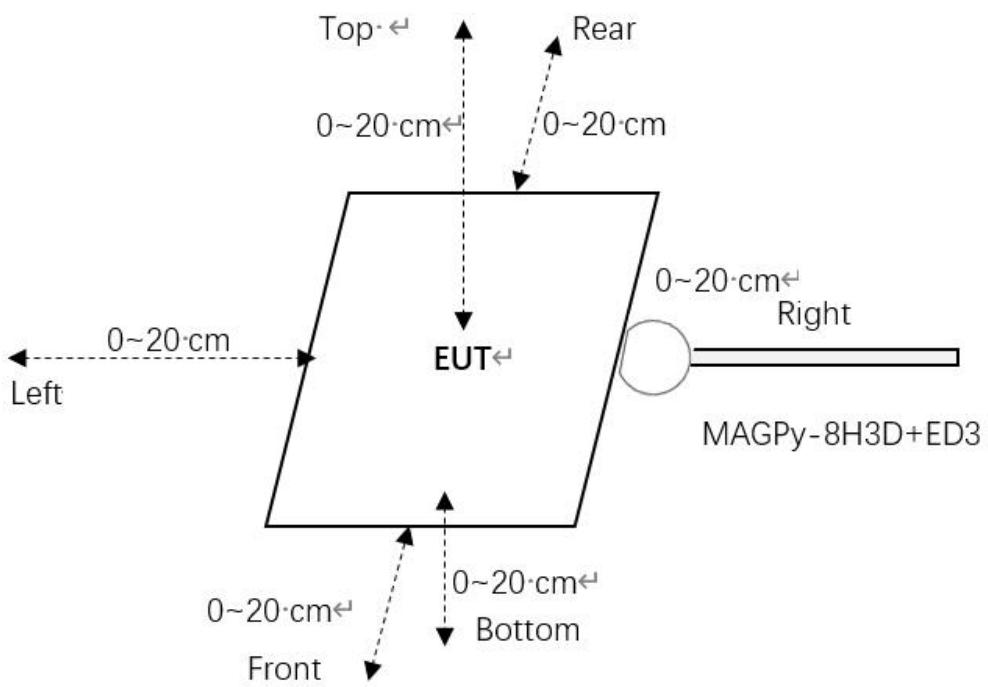

Note: tips mode of the test probe is used for 0cm measurement.


## 5.3 Test Procedures

a. H-field measurements should be taken 0 cm ~ 20 cm with 2 cm increments from the center of the probe.

The center of the probe to the tip surface of the probe is 18.5 mm, so the directly testing can be performed at the probe center from 2 cm to 20 cm.

To measure the 0 cm H-field, the probe tip mode is used. The total H-field at the tip-surface  $H_{tip-surface}$  can be extrapolated using the total H-field measured at the top and bottom sensors,  $H_{top}$  and  $H_{bottom}$ , as well as the normalized H-field gradient  $G_n$ . The field extrapolation formula is a polynomial function of  $G_n$  ( $\Delta d = 18.5$  mm)

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i$$

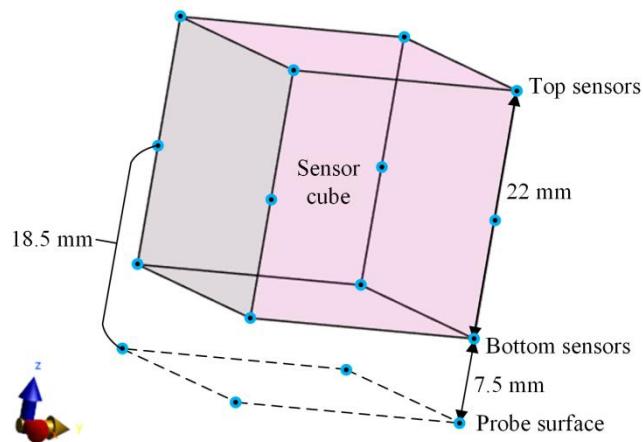

# TEST REPORT

Report No.: MTi250523001-0203E2

## 5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm <sup>2</sup> arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

Item	Specification
Test frequency range:	3kHz ~ 10MHz
Probe sensitivity	E-filed: 0.08-2000 V/m H-filed: 0.1-3200 A/m
Probe level response	E-filed: ±1dB H-field: ±1dB
linearity error	E-filed: ±0.3dB H-field: ±0.3dB
Isotropy	E-filed: ±0.8dB H-field: ±0.6dB

# TEST REPORT

Report No.: MTi250523001-0203E2

## 5.5 Test results

All client power has been assessed (1%, 50%, 99%), and the 1% battery status of client device was the worst.

**Test condition 1: Mode3 operating mode with client device (1 % battery status of client device)**

-estimated value: 0cm

**Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.5	1.63	98.16%
Left	0.11		
Right	0.92		
Front	0.76		
Rear	0.43		
Bottom	1.6		

**Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)**

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.3	1.63	18.40%
Left	0.10		
Right	0.12		
Front	0.17		
Rear	0.11		
Bottom	0.24		

# TEST REPORT

Report No.: MTi250523001-0203E2

**Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)**
**- Test distance: 4cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	3.68%
Left	0.030		
Right	0.02		
Front	0.03		
Rear	0.01		
Bottom	0.060		

**Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)**
**- Test distance: 6cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.02	1.63	1.23%
Left	0.009		
Right	0.01		
Front	0.01		
Rear	0.01		
Bottom	0.020		

**Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)**
**- Test distance: 8cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.01	1.63	0.61%
Left	0.007		
Right	0.006		
Front	0.006		
Rear	0.004		
Bottom	0.01		

# TEST REPORT

Report No.: MTi250523001-0203E2

**Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)**
**- Test distance: 10cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.007	1.63	0.43%
Left	0.003		
Right	0.004		
Front	0.004		
Rear	0.004		
Bottom	0.006		

**Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)**
**- Test distance: 12cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0059	1.63	0.36%
Left	0.0025		
Right	0.0034		
Front	0.0035		
Rear	0.0037		
Bottom	0.0050		

**Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)**
**- Test distance: 14cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0044	1.63	0.27%
Left	0.0019		
Right	0.0025		
Front	0.0026		
Rear	0.0028		
Bottom	0.0038		

# TEST REPORT

Report No.: MTi250523001-0203E2

Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0028	1.63	0.17%
Left	0.0012		
Right	0.0016		
Front	0.0017		
Rear	0.0018		
Bottom	0.0024		

Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0014	1.63	0.08%
Left	0.0006		
Right	0.0008		
Front	0.0008		
Rear	0.0009		
Bottom	0.0012		

Test condition 2: Mode3 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.0011	1.63	0.07%
Left	0.0005		
Right	0.0006		
Front	0.0007		
Rear	0.0007		
Bottom	0.0009		

# TEST REPORT

Report No.: MTI250523001-0203E2

**Test condition 1: Mode5 operating mode with client device (1 % battery status of client device)**

**-estimated value: 0cm**

**Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.62	1.63	99.39%
Left	1.43		
Right	1.21		
Front	1.52		
Rear	1.38		
Bottom	1.34		

**Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)**

**- Test distance: 2cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.41	1.63	86.50%
Left	1.05		
Right	1.16		
Front	1.07		
Rear	1.15		
Bottom	0.43		

# TEST REPORT

Report No.: MTi250523001-0203E2

**Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)**
**- Test distance: 4cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.55	1.63	43.56%
Left	0.64		
Right	0.71		
Front	0.53		
Rear	0.33		
Bottom	0.21		

**Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)**
**- Test distance: 6cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.30	1.63	20.25%
Left	0.33		
Right	0.28		
Front	0.24		
Rear	0.27		
Bottom	0.12		

**Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)**
**- Test distance: 8cm**

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.16	1.63	16.56%
Left	0.19		
Right	0.27		
Front	0.13		
Rear	0.14		
Bottom	0.09		

# TEST REPORT

Report No.: MTi250523001-0203E2

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.1	1.63	7.36%
Left	0.12		
Right	0.09		
Front	0.08		
Rear	0.09		
Bottom	0.06		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.08	1.63	6.04%
Left	0.10		
Right	0.07		
Front	0.07		
Rear	0.07		
Bottom	0.05		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.05	1.63	4.04%
Left	0.07		
Right	0.05		
Front	0.04		
Rear	0.05		
Bottom	0.03		

# TEST REPORT

Report No.: MTi250523001-0203E2

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.021	1.63	1.58%
Left	0.026		
Right	0.019		
Front	0.017		
Rear	0.019		
Bottom	0.013		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.010	1.63	0.74%
Left	0.012		
Right	0.009		
Front	0.008		
Rear	0.001		
Bottom	0.006		

Test condition 2: Mode5 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.006	1.63	0.44%
Left	0.007		
Right	0.005		
Front	0.005		
Rear	0.001		
Bottom	0.004		



# TEST REPORT

Report No.: MTI250523001-0203E2

## Photographs of the Test Setup

See the Appendix - Test Setup Photos.



## Photographs of the EUT

See the Appendix - EUT Photos.



## Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

\*\*\*\*\* END OF REPORT \*\*\*\*\*