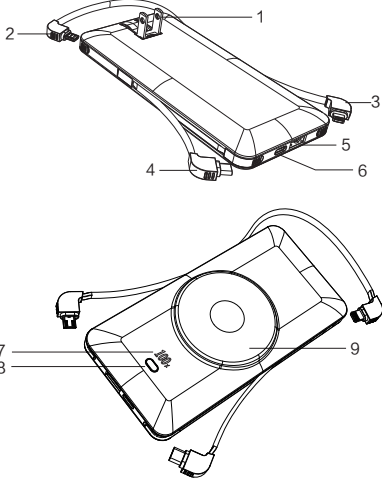


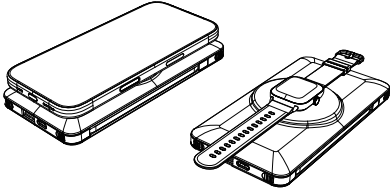






PB180无线充英文说明书（数显款）

User Manual 10000mAh Power bank	Description  1. AC plug 2. iPhone Charging cable 1 3. Micro usb Charging cable 2 4. USB-C Charging cable 3 5. USB Output port 6. USB-C input/Output 7. Power indicator 8. Power Button on/off 9. Wireless charger	Specifications Item No: PB180W Capacity: 3.85V $\approx$ 10000mAh 38.5Wh Output Capacity: 5V 6380mAh AC input: 110-240V-0.5A 50/60Hz USB-C input: 5V $\approx$ 2A, 9V $\approx$ 2A, 12V $\approx$ 1.5A USB-C Output: 5V $\approx$ 3A, 9V $\approx$ 2.2A, 12V $\approx$ 1.5A USB Output: 5V $\approx$ 3A Cable Output1: 5V $\approx$ 2.4A Cable Output2: 5V $\approx$ 2.4A Cable Output3: 5V $\approx$ 3A, 9V $\approx$ 2A, 12V $\approx$ 1.5A Wireless Output: 5W/7.5W/10W/15W Watch Output: 2.5W Max Output: 5V $\approx$ 3A(Shared) Operation Instructions To turn on/ off the power bank 1. Quick press the power button to turn on the power bank 2. Double click the power button to turn off the power bank. 3. When mobile phone is fully charged or the power bank is not using, the power bank will automatically power off after 30s / 10 minutes of standby time for different output port. Charging your devices 1. Using the built-in charging cable, your smartphone electronic devices like etc. will be charged by power bank automatically once connected with the built-in cable. If not, please press the power button to turn on the power bank. 
2. Connect to the USB output port through other charging cable (not included) Connected to the USB output port to your devices with charging cable that come with your electronic device. Then power bank will start charging. If not, please press the power button to turn on the power bank.  3. Wireless charging is Compatible with Apple Watch and phones and headphones that support wireless charging. Press the power button to turn on the wireless charging module, and place a device above the power bank. Then the power bank will start charging them. 	Charging the Power Bank Optional 1: Using the Built-in AC plug Taking out the AC plug and Plugging it into the wall AC outlet to Recharge the power bank. The digital screen will show the current battery level % and blinking light.  Optional 2: Using the USB-C charging cable(not included) Connected power bank to AC wall charger/adaptor through the USB-C USB charging cable(not included), the digital LCD screen will show the current battery level % and blinking light. 	Important safety Instructions 1. During the use of the product, it is normal for the shell to become slightly hot. After being fully charged, its temperature will gradually return to normal room temperature. 2. Do not exposed power bank excessive heat such as sunshine, fire or the like. 3. Do not exposed power bank to dripping or splashing and no objects filled with liquids such as vases, shall be placed on the devices. 4. Do not disassemble the power bank, incorrect assemble the power bank may result in a risk of fire or injury to persons. 5. If the product is physically damaged, please do not continue to use it. 6. children are prohibited from using.   MADE IN CHINA

材质：书写纸
折页尺寸：60*100mm
正反面黑白印刷

OMPLIANCE WITH FCC REGULATION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF exposure statement:

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.