


Product Name:8-way remote control controller

Package Included					
Accessories	Quantity	Accessories	Quantity	Accessories	Quantity
	1		2		10
	2		2		1
	1		2		16
	1		2		8

SWITCH PANEL INSTALLATION

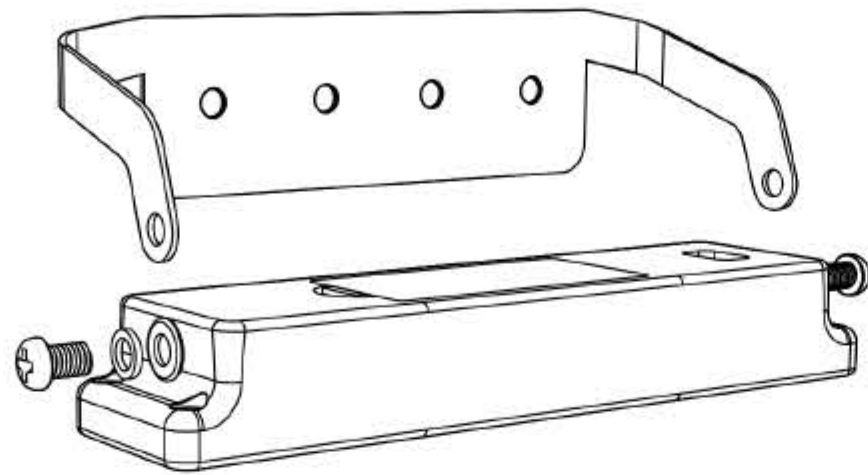

Power Supply:




Two AAA batteries (Included)



USB Cable (Included)

1

4 GANG WIRING DIAGRAM

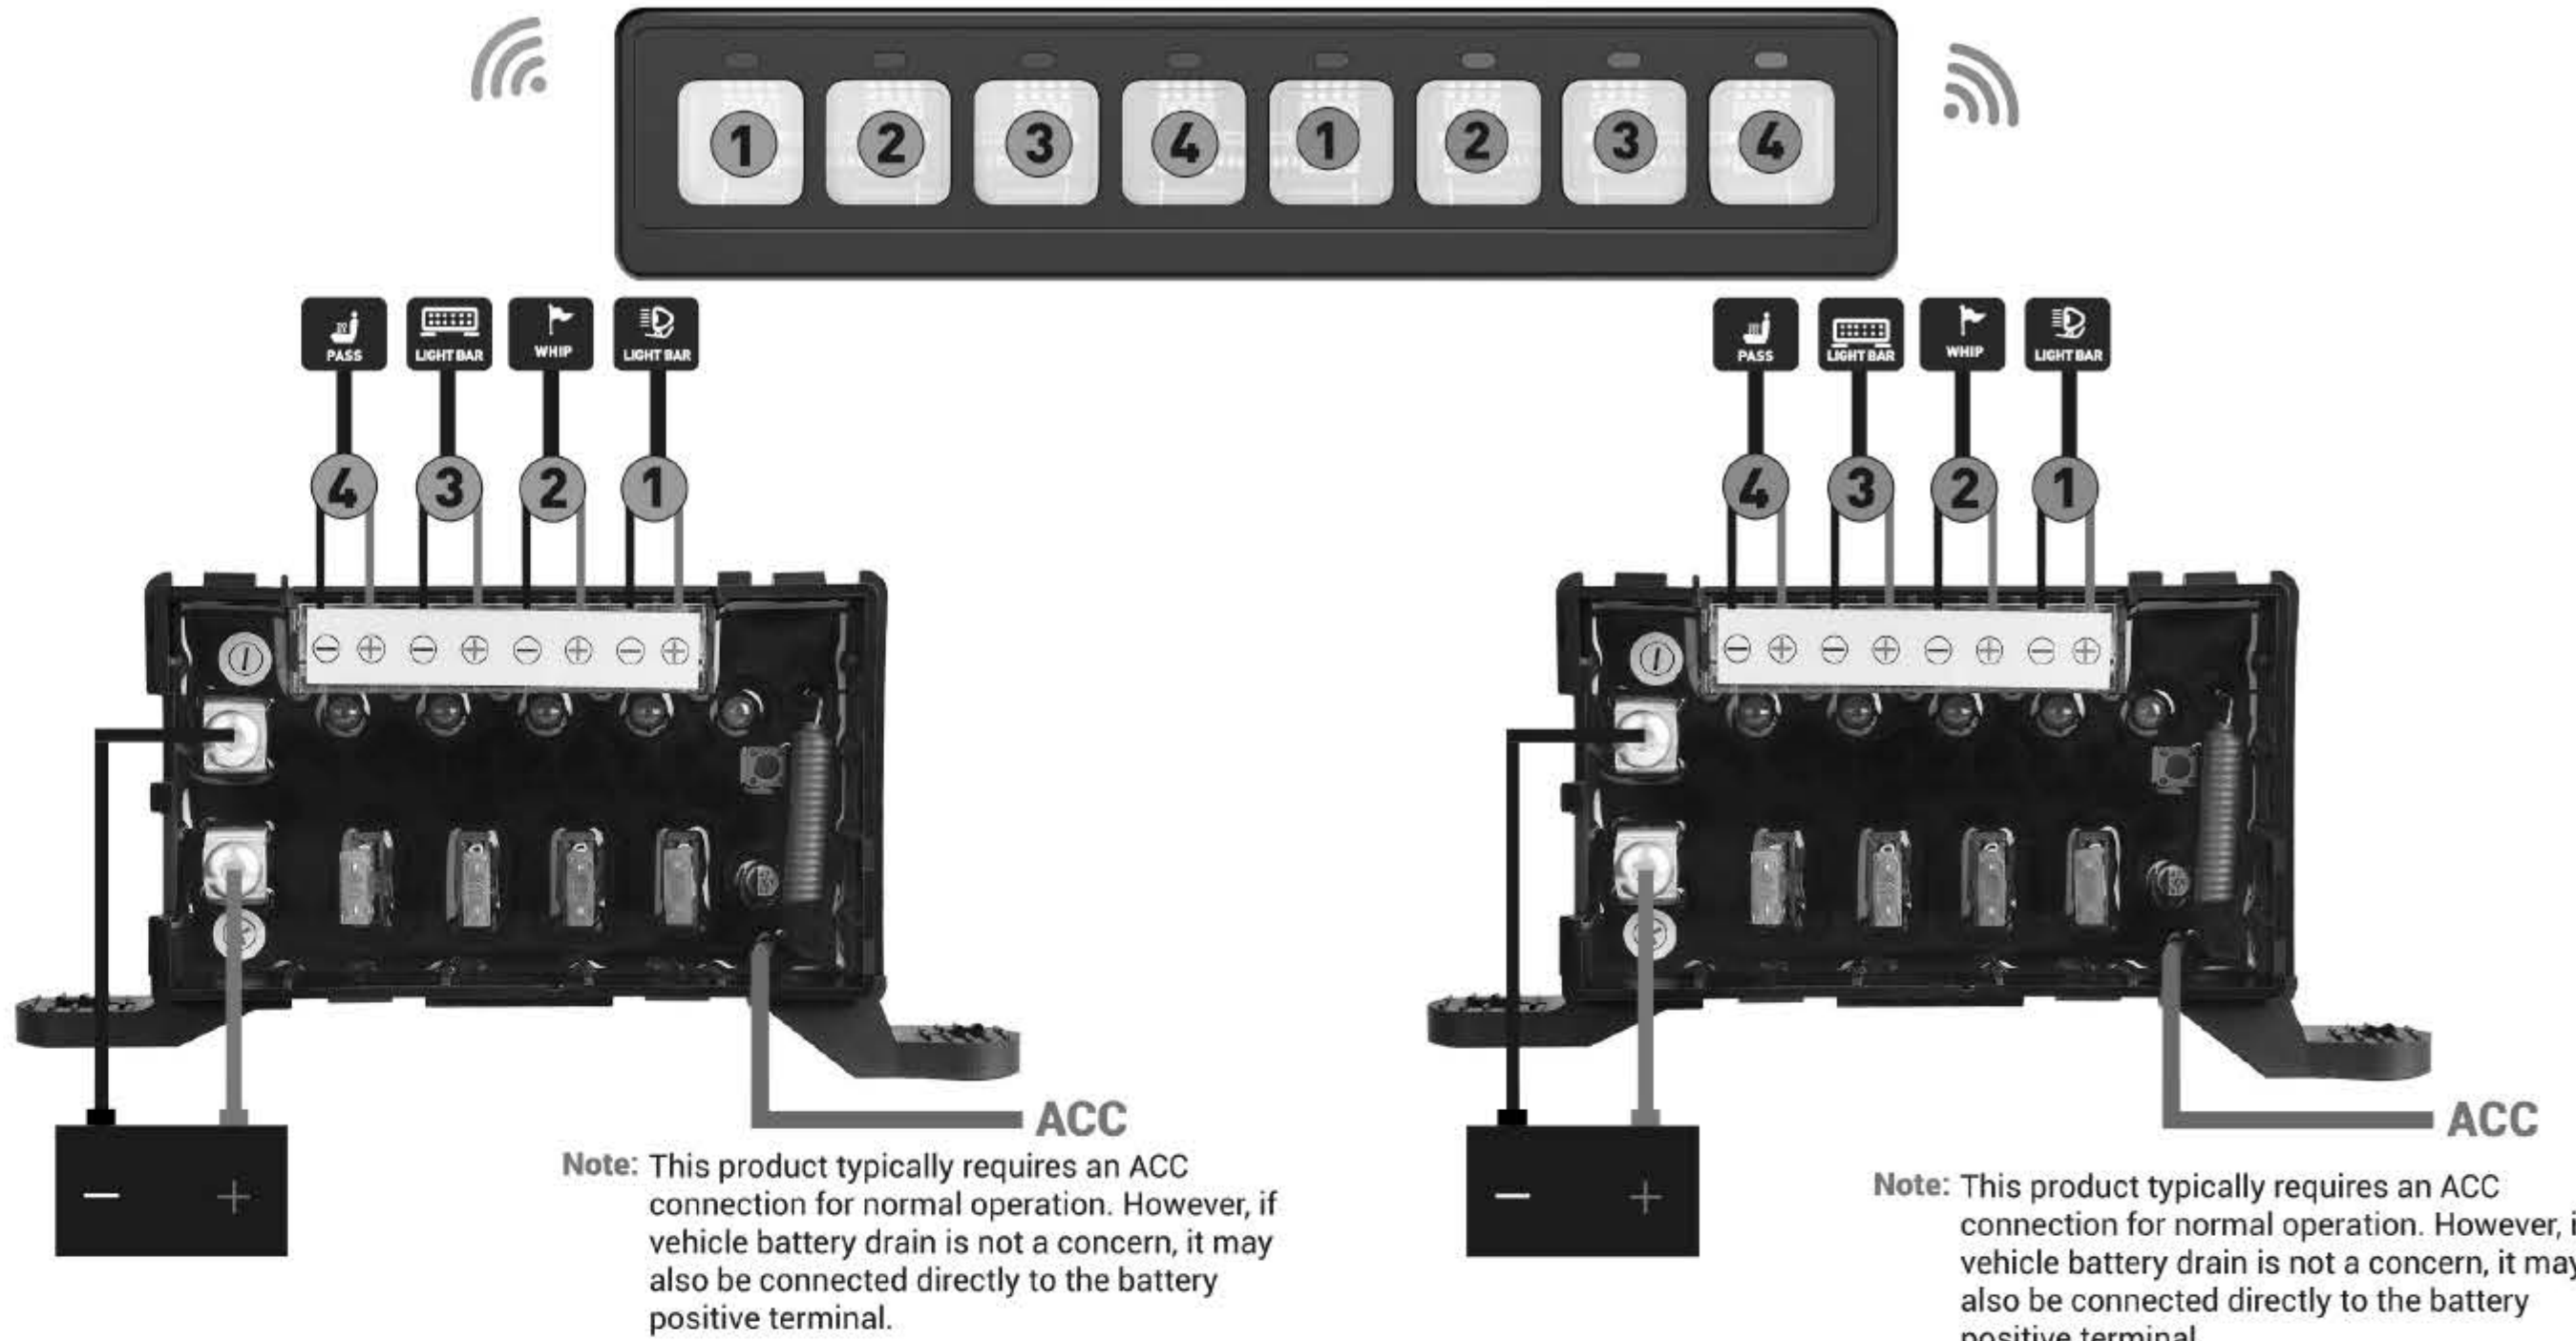

4 circuit fuse block:

circuit 1	circuit 2
10A	20A
circuit 3	circuit 4
10A	20A

Specification:

Voltage : 12V/24V DC Power : 720W at 12V/1440W at 24V
Maximum Current : 60A Operating Temperature : - 30°C to 85°C

2

4 circuit fuse block:

circuit 1	circuit 2
10A	20A
circuit 3	circuit 4
10A	20A

Specification:

Voltage : 12V/24V DC Power : 720W at 12V/1440W at 24V
Maximum Current : 60A Operating Temperature : - 30°C to 85°C

3

OPERATION INSTRUCTIONS



Press any two buttons on the panel at the same time, and the WHITE backlight will light up, indicating that it enters the standby state.



In the standby state, press any button, and the YELLOW indicator lights up, indicating that it enters the working state.



Press any two buttons again at the same time, the indicator will be off, indicating that it is powered off.

4


HOW TO PAIR



Make sure the Switch Panel & Power Hub are powered on. Turn on the switch panel by short pressing any 2 switches. Press the Paring Button on Power Hub 1. When power hub's indicator lights up, you've entered the pairing state.



Press any one of the First Four Switches on the Switch Panel.

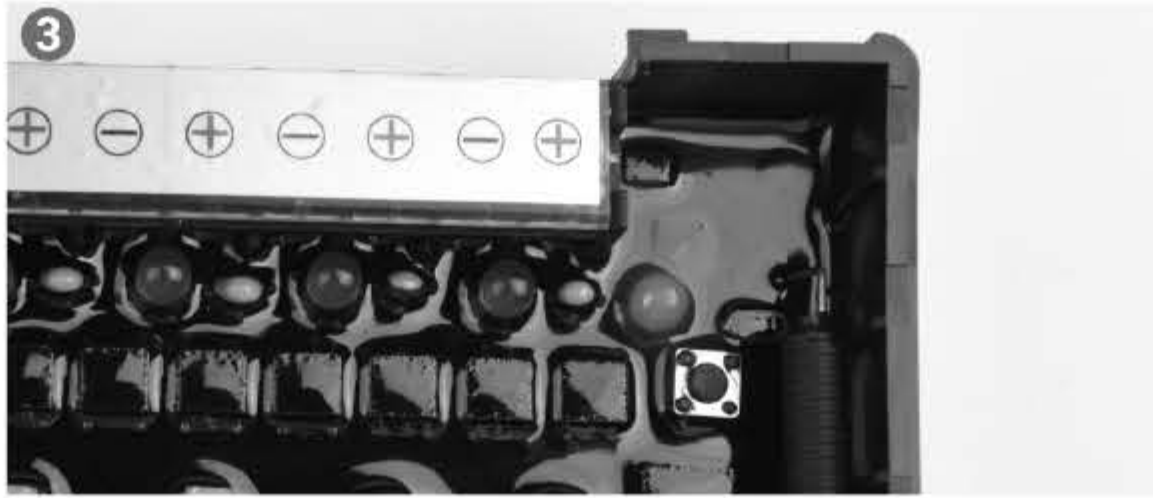

When power hub's indicator flashes then goes off, you've successfully paired Power Hub 1 to the First Four Switches.
NOTE: Each panel group allows connection of up to 3 power hubs.

5

CONTROL MODE SETTING



Long press any 2 switches together until all indicators light up/flash, you've entered the setting state.



Set control modes by checking the indicator status
① Slow flashes - Flash ② Rapid flashes - Strobe
③ Light off - Momentary ④ Light on - Toggle
Each time you press a certain switch, it switches to a different mode. Set all switches to your desired mode.



Long press any 2 switches together until all indicators flash then turn off, you've successfully saved your setting.
NOTE: After saving settings, please wait for 2 seconds before turning off the panel, to avoid saving failure.

6

FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

7