

Appendix E

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Android All-in-one Panel PC

Test Model: TPC070-A410

Environmental Conditions


Temperature:	23.8°C
Relative Humidity:	52.3%
ATM Pressure:	100.0 kPa
Test Engineer:	Suichao Lai
Supervised by:	Yan Chen

E.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.345	≥ 0.5	Pass
NVNT	a	5785	Ant1	16.335	≥ 0.5	Pass
NVNT	a	5825	Ant1	16.334	≥ 0.5	Pass
NVNT	n20	5745	Ant1	17.532	≥ 0.5	Pass
NVNT	n20	5785	Ant1	17.539	≥ 0.5	Pass
NVNT	n20	5825	Ant1	17.56	≥ 0.5	Pass
NVNT	n40	5755	Ant1	36.439	≥ 0.5	Pass
NVNT	n40	5795	Ant1	36.093	≥ 0.5	Pass
NVNT	ac20	5745	Ant1	17.493	≥ 0.5	Pass
NVNT	ac20	5785	Ant1	17.22	≥ 0.5	Pass
NVNT	ac20	5825	Ant1	17.551	≥ 0.5	Pass
NVNT	ac40	5755	Ant1	36.307	≥ 0.5	Pass
NVNT	ac40	5795	Ant1	36.242	≥ 0.5	Pass
NVNT	ac80	5775	Ant1	75.355	≥ 0.5	Pass
NVNT	ax20	5745	Ant1	17.623	≥ 0.5	Pass
NVNT	ax20	5785	Ant1	17.299	≥ 0.5	Pass
NVNT	ax20	5825	Ant1	17.537	≥ 0.5	Pass
NVNT	ax40	5755	Ant1	36.422	≥ 0.5	Pass
NVNT	ax40	5795	Ant1	36.248	≥ 0.5	Pass
NVNT	ax80	5775	Ant1	75.6	≥ 0.5	Pass

Test Graphs


-6dB Bandwidth NVNT a 5745MHz Ant1

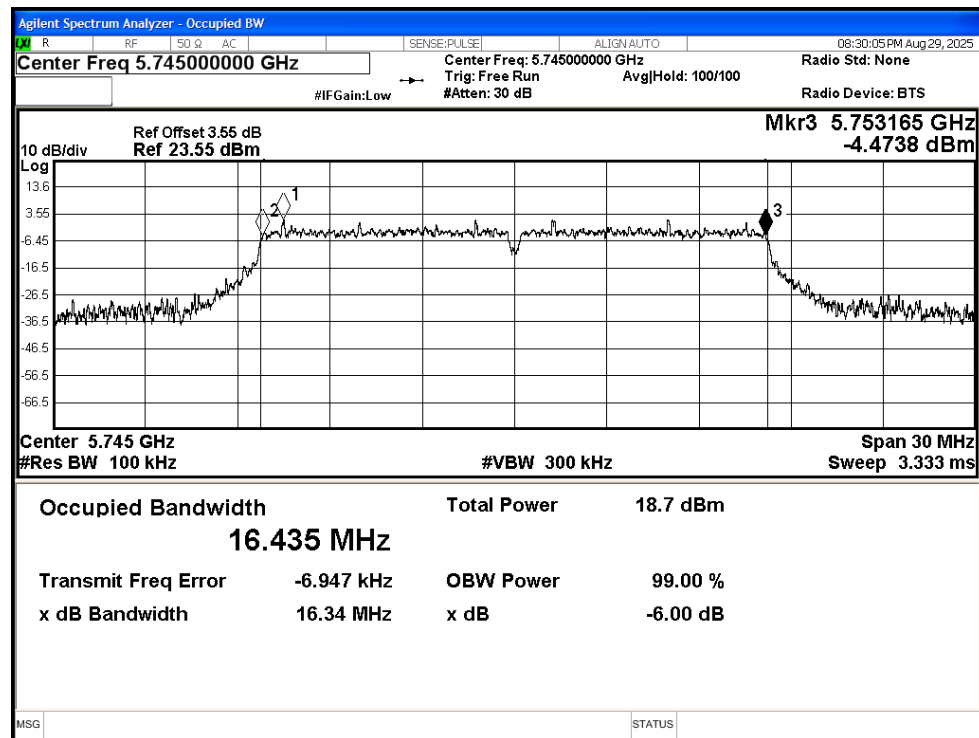


-6dB Bandwidth NVNT a 5785MHz Ant1

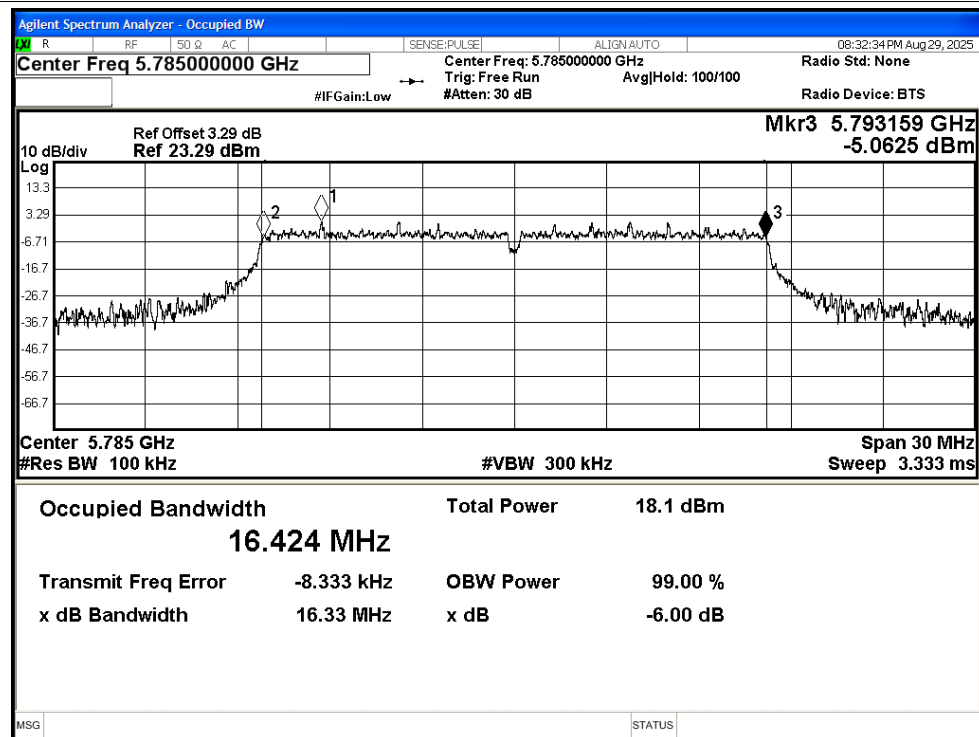


-6dB Bandwidth NVNT a 5825MHz Ant1

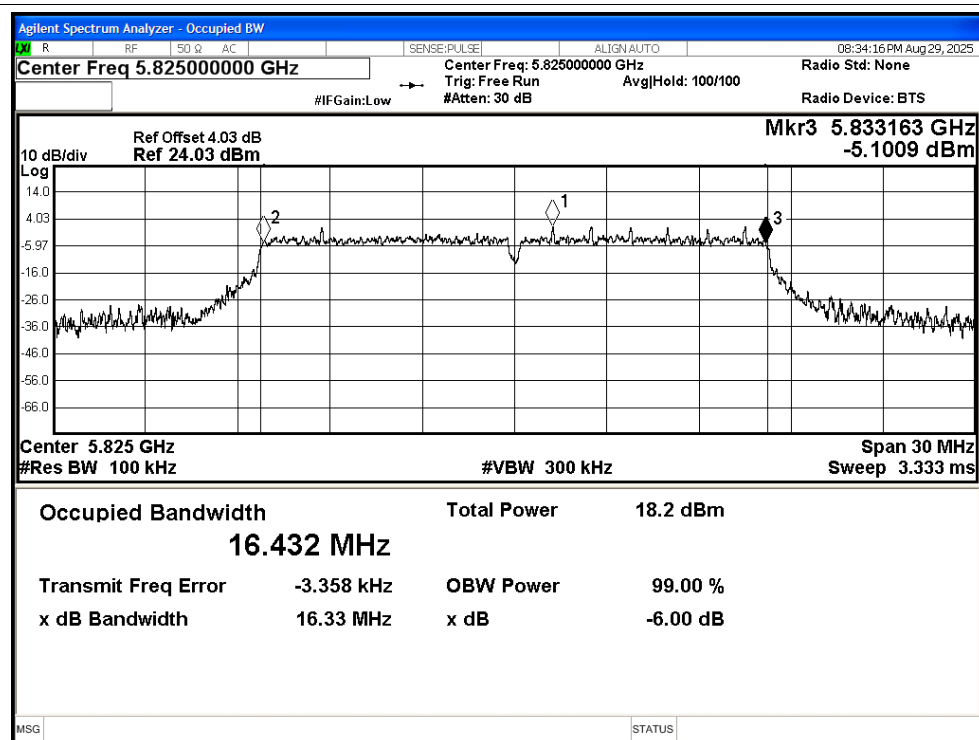


-6dB Bandwidth NVNT n20 5745MHz Ant1

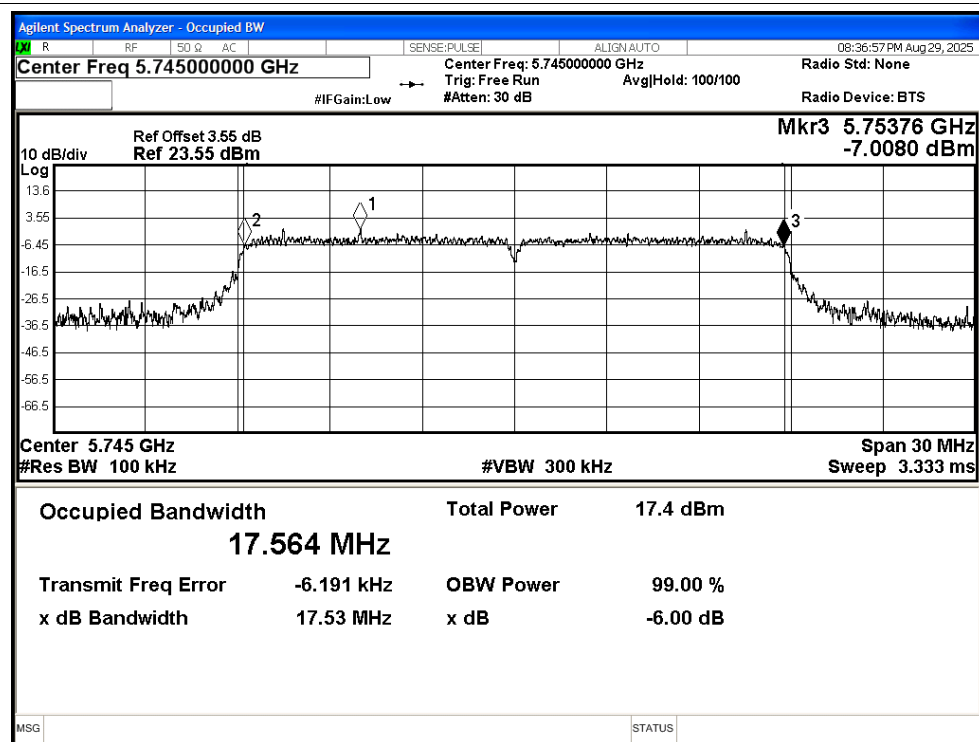


-6dB Bandwidth NVNT n20 5785MHz Ant1

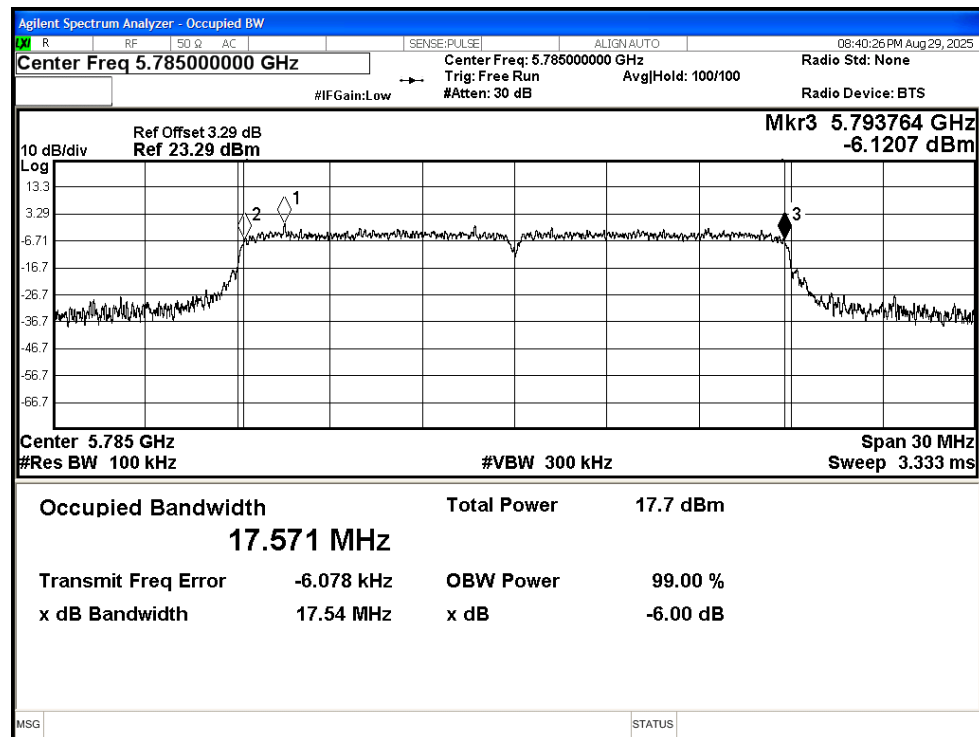


-6dB Bandwidth NVNT n20 5825MHz Ant1


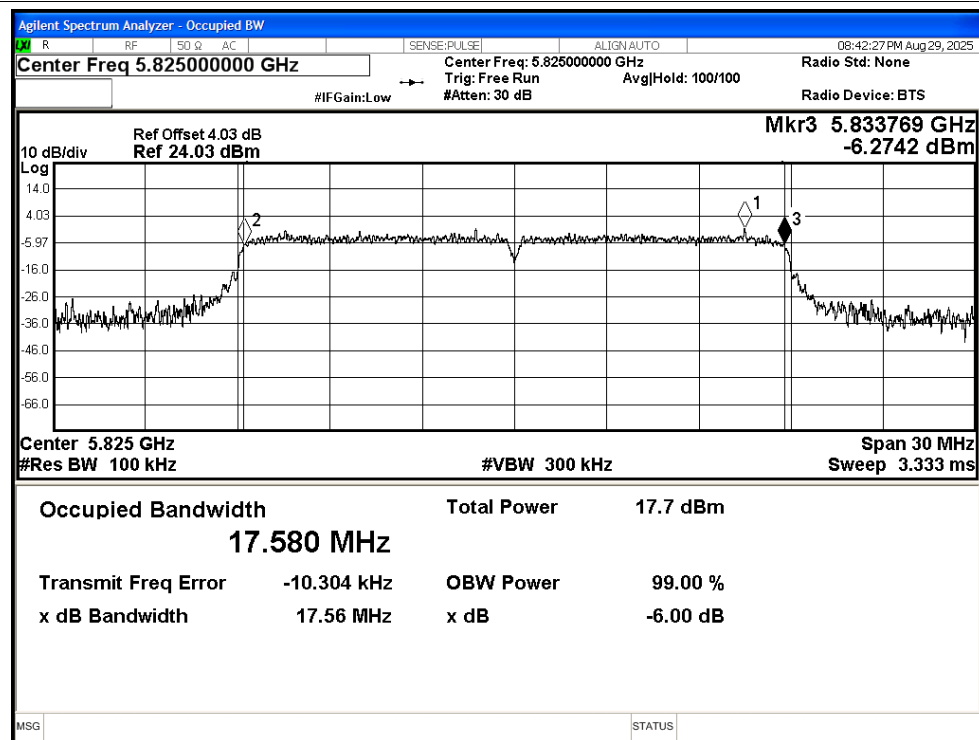


-6dB Bandwidth NVNT n40 5755MHz Ant1

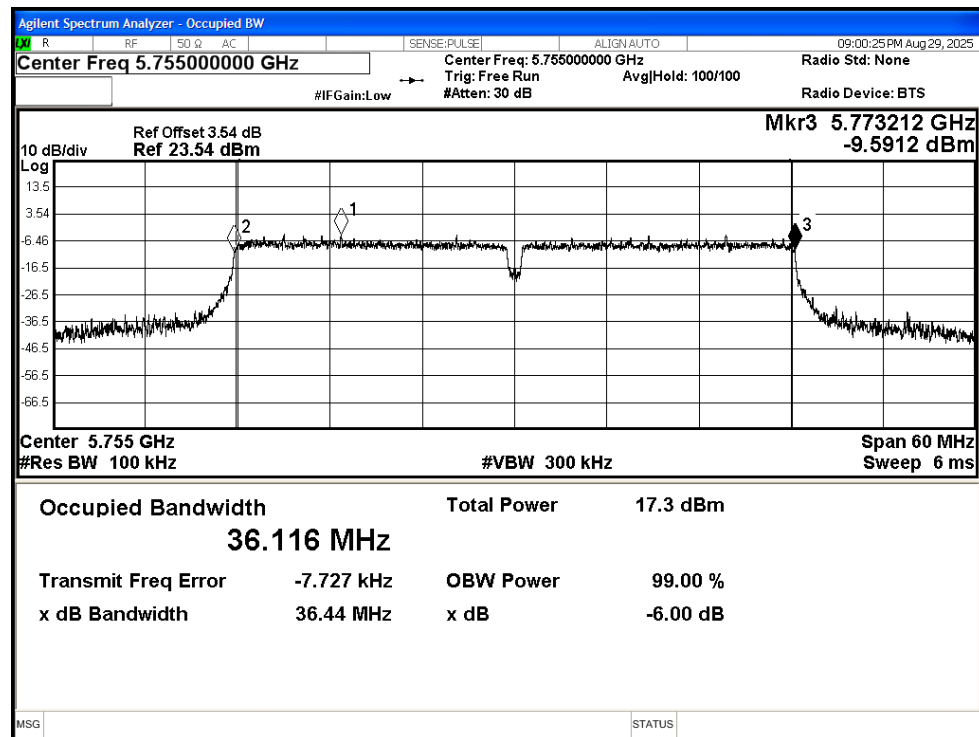


-6dB Bandwidth NVNT n40 5795MHz Ant1

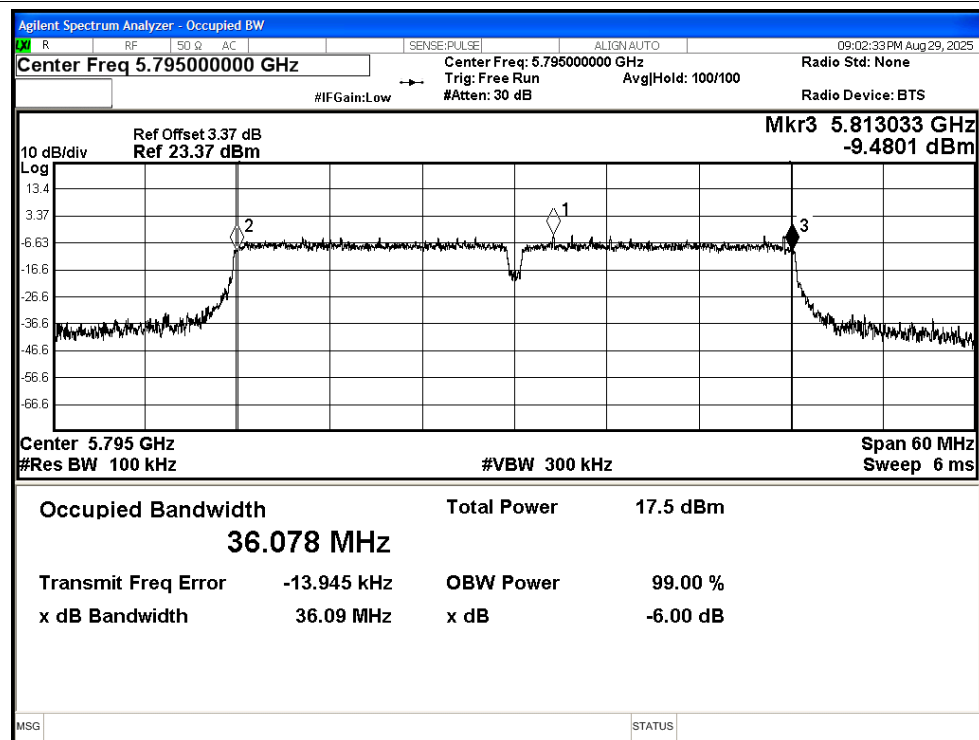


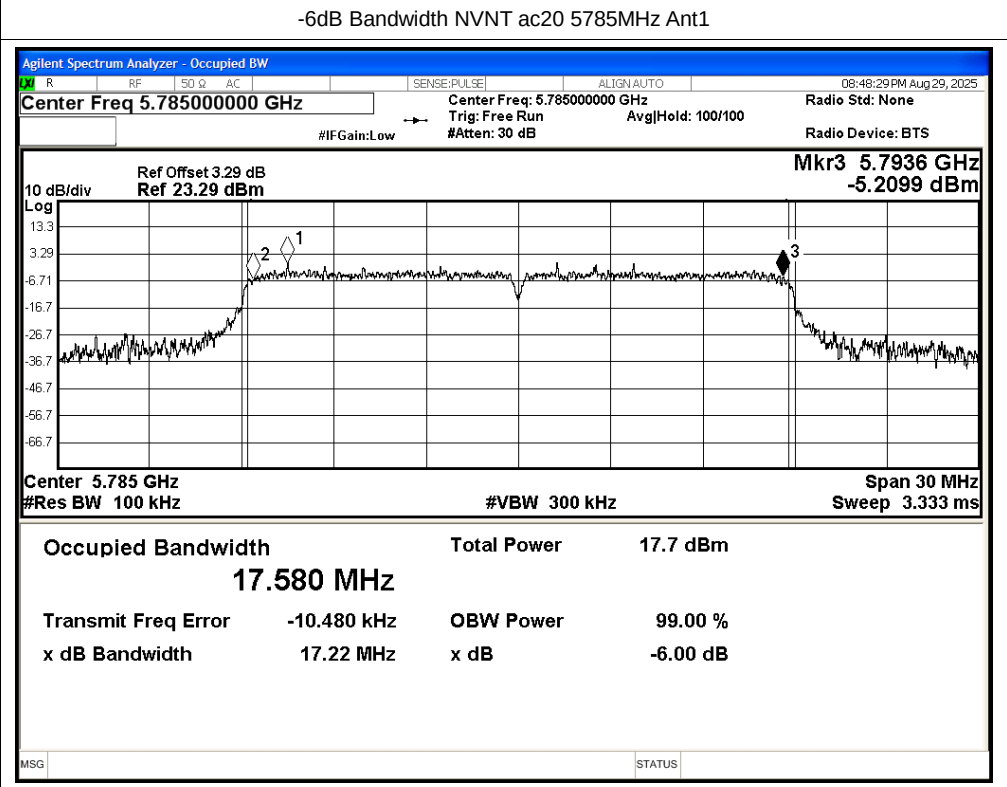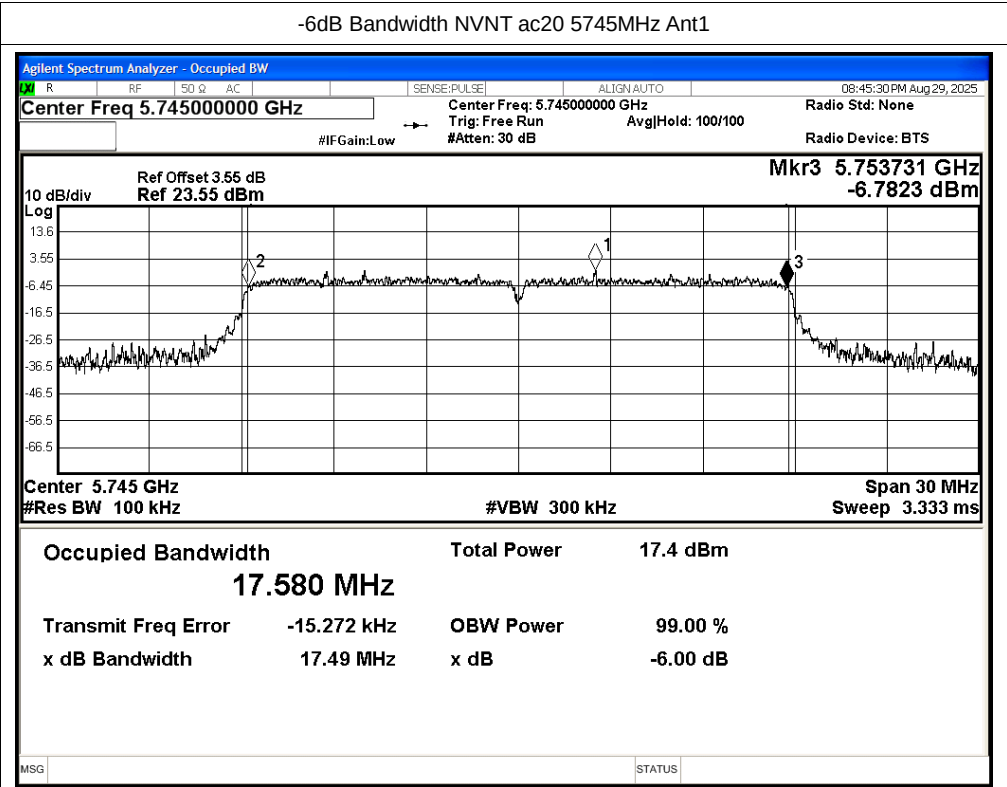


-6dB Bandwidth NVNT ac20 5825MHz Ant1

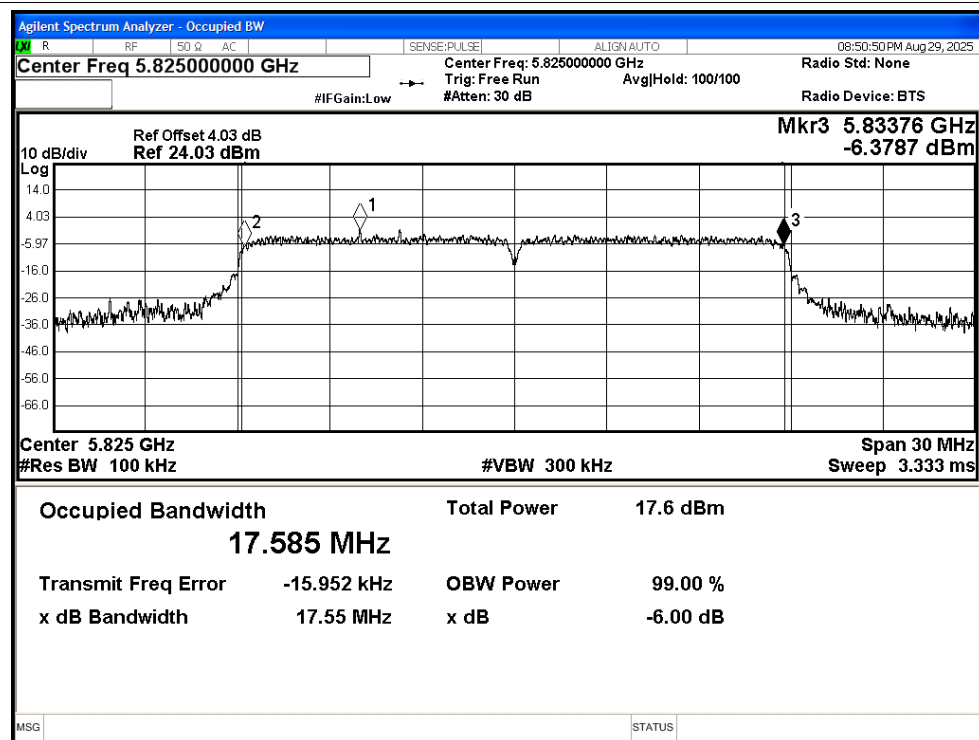


-6dB Bandwidth NVNT ac40 5755MHz Ant1

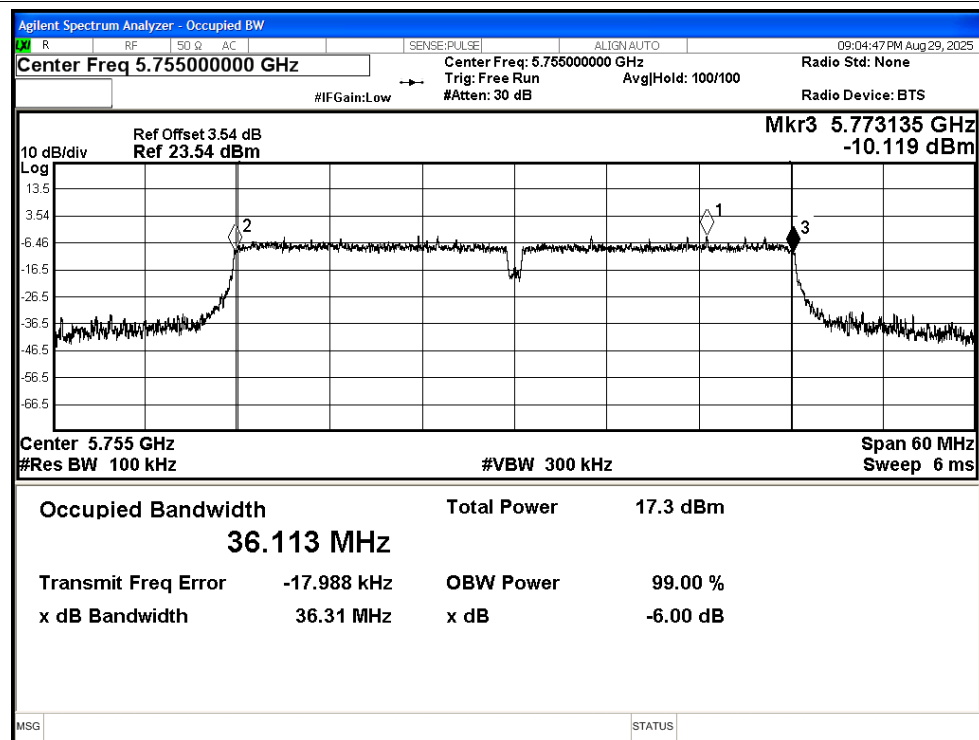


-6dB Bandwidth NVNT ac40 5795MHz Ant1

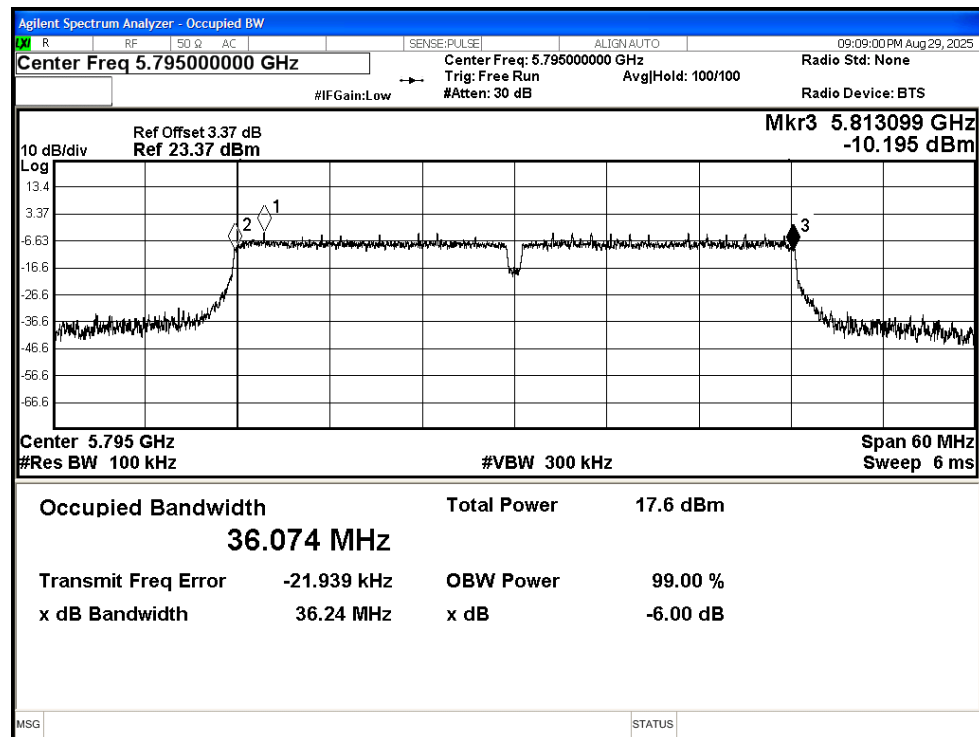


-6dB Bandwidth NVNT ac80 5775MHz Ant1


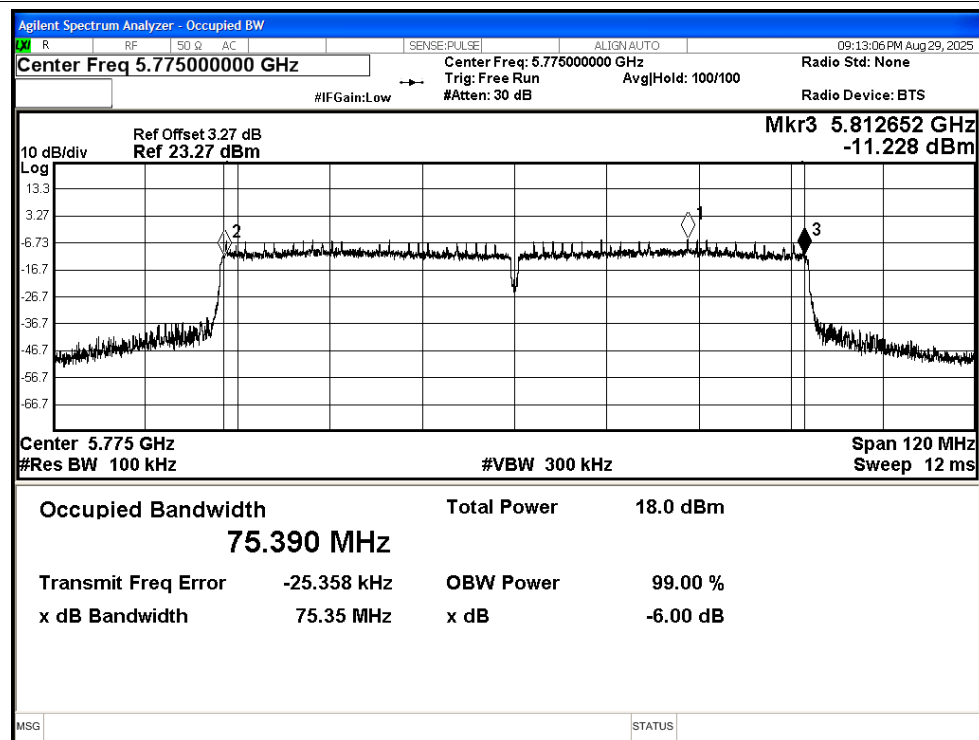




-6dB Bandwidth NVNT ax20 5745MHz Ant1

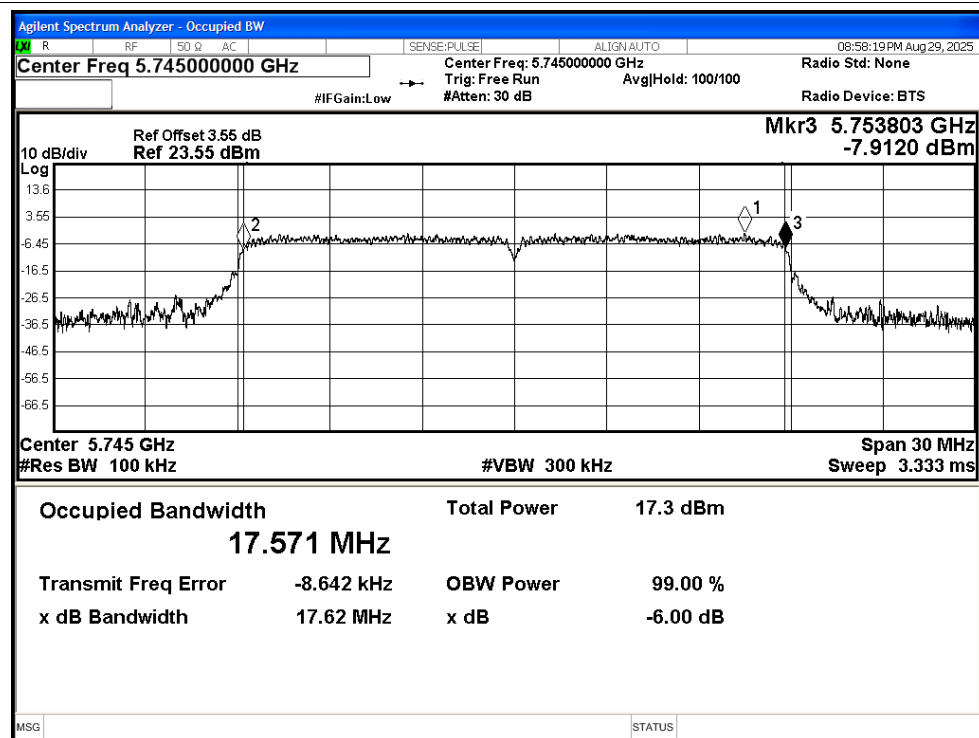

-6dB Bandwidth NVNT ax20 5785MHz Ant1

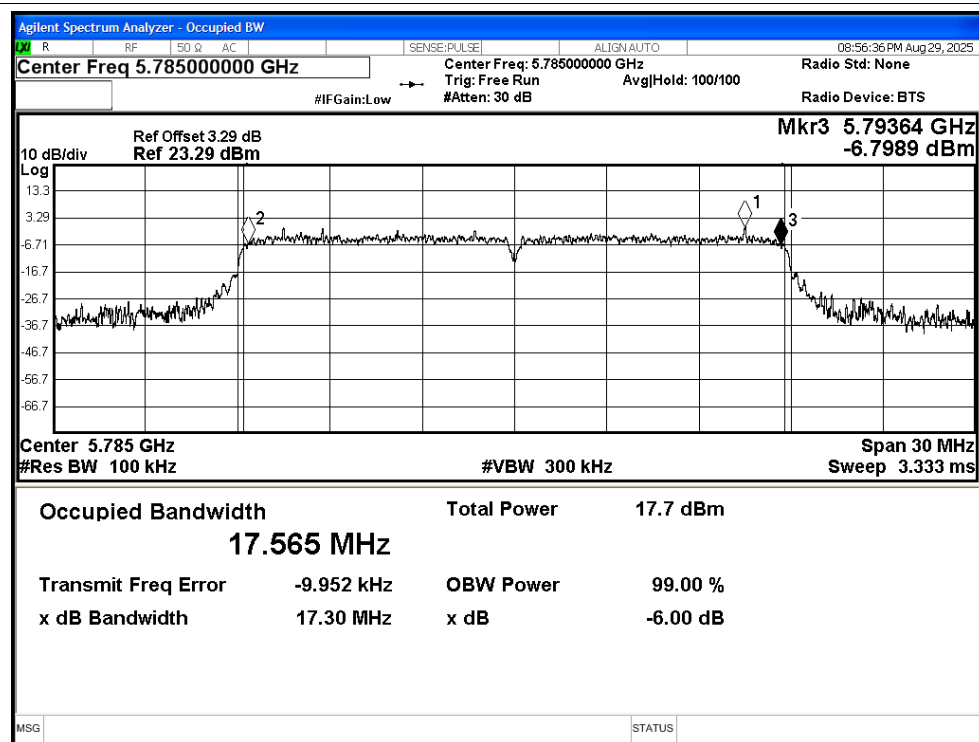

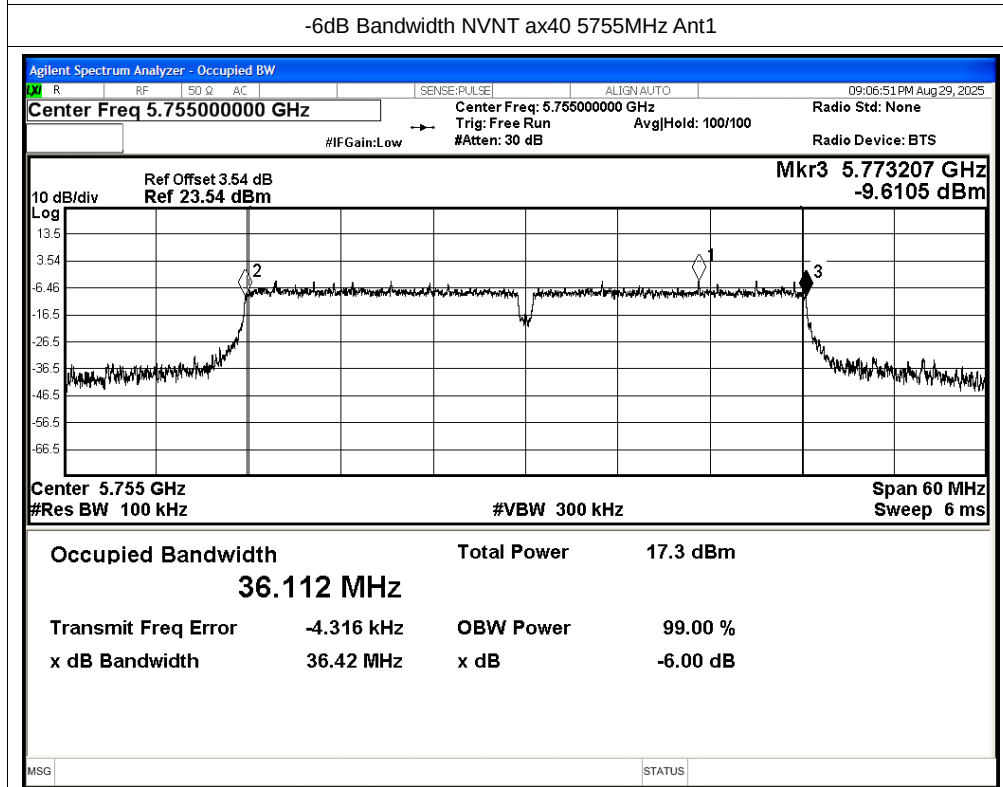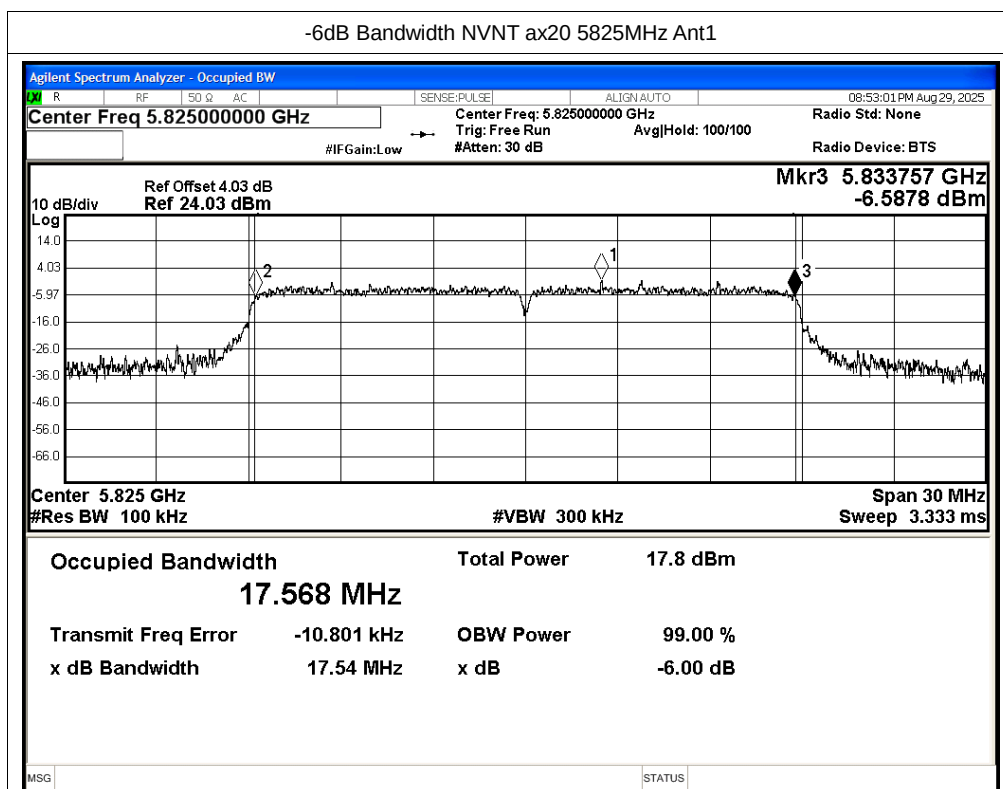

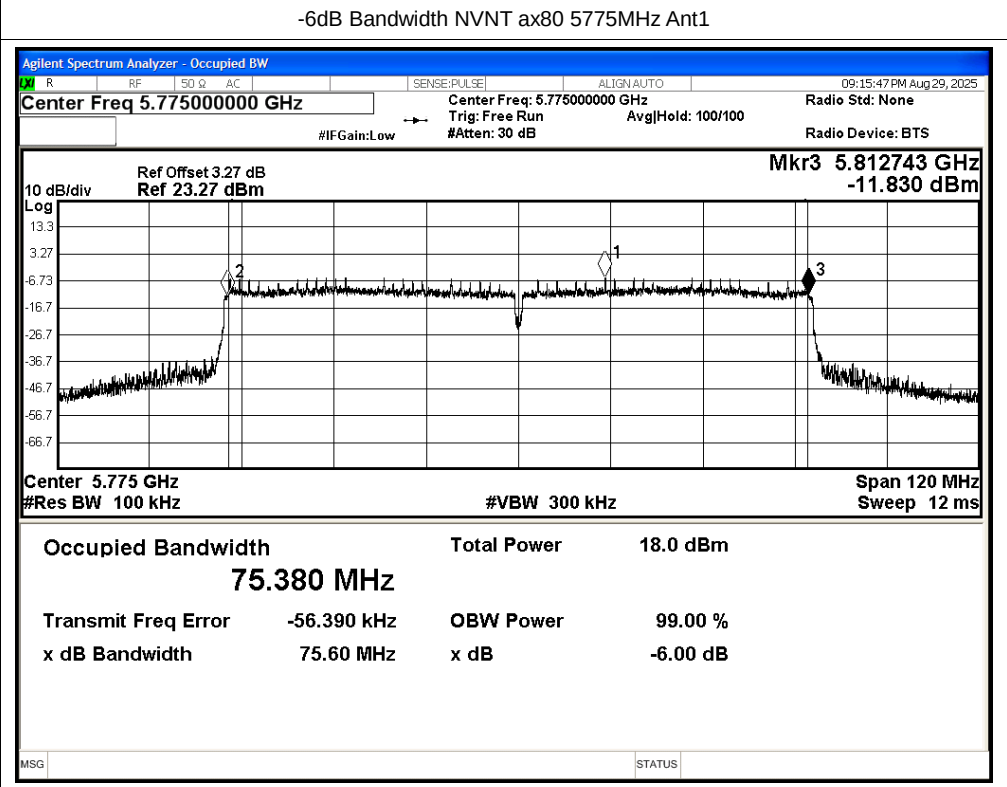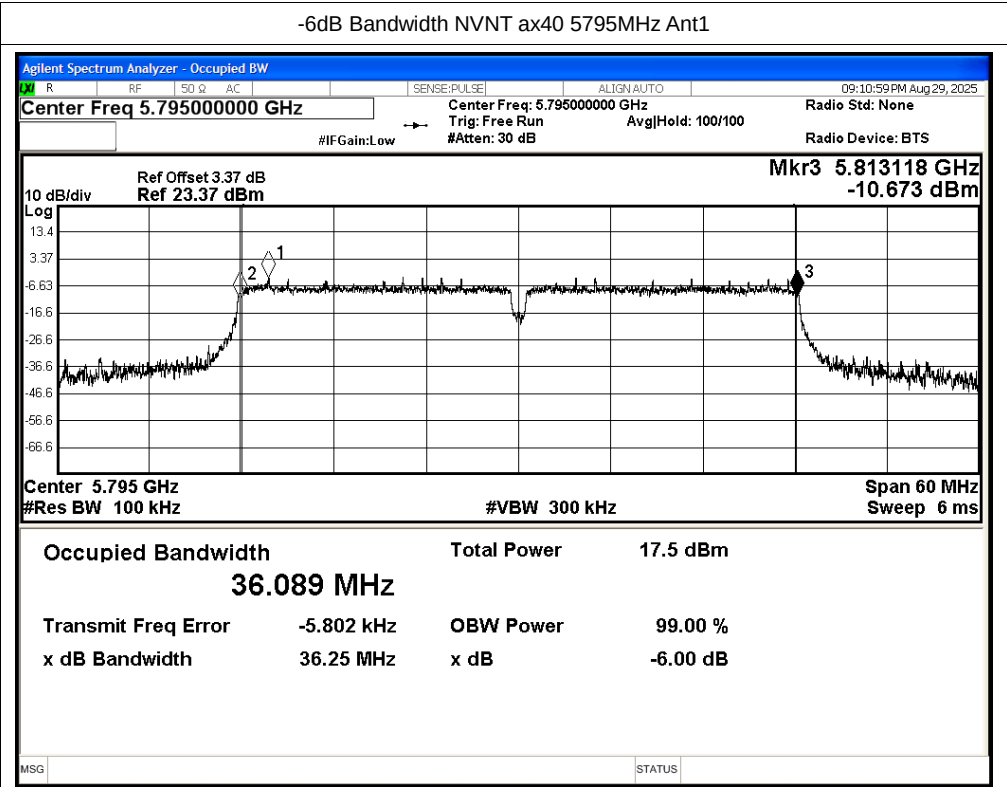


E.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	12.38	0.24	12.62	30	Pass
NVNT	a	5785	Ant1	12.03	0.24	12.27	30	Pass
NVNT	a	5825	Ant1	12.14	0.24	12.38	30	Pass
NVNT	n20	5745	Ant1	11.27	0.12	11.39	30	Pass
NVNT	n20	5785	Ant1	11.44	0.12	11.56	30	Pass
NVNT	n20	5825	Ant1	11.55	0.12	11.67	30	Pass
NVNT	n40	5755	Ant1	10.71	0.24	10.95	30	Pass
NVNT	n40	5795	Ant1	10.97	0.24	11.21	30	Pass
NVNT	ac20	5745	Ant1	11.22	0.12	11.34	30	Pass
NVNT	ac20	5785	Ant1	11.44	0.12	11.56	30	Pass
NVNT	ac20	5825	Ant1	11.53	0.12	11.65	30	Pass
NVNT	ac40	5755	Ant1	10.76	0.24	11	30	Pass
NVNT	ac40	5795	Ant1	10.94	0.24	11.18	30	Pass
NVNT	ac80	5775	Ant1	10.76	0.47	11.23	30	Pass
NVNT	ax20	5745	Ant1	11.2	0.12	11.32	30	Pass
NVNT	ax20	5785	Ant1	11.5	0.12	11.62	30	Pass
NVNT	ax20	5825	Ant1	11.57	0.12	11.69	30	Pass
NVNT	ax40	5755	Ant1	10.71	0.24	10.95	30	Pass
NVNT	ax40	5795	Ant1	10.92	0.24	11.16	30	Pass
NVNT	ax80	5775	Ant1	10.75	0.47	11.22	30	Pass



Test Graphs



Power NVNT a 5745MHz Ant1


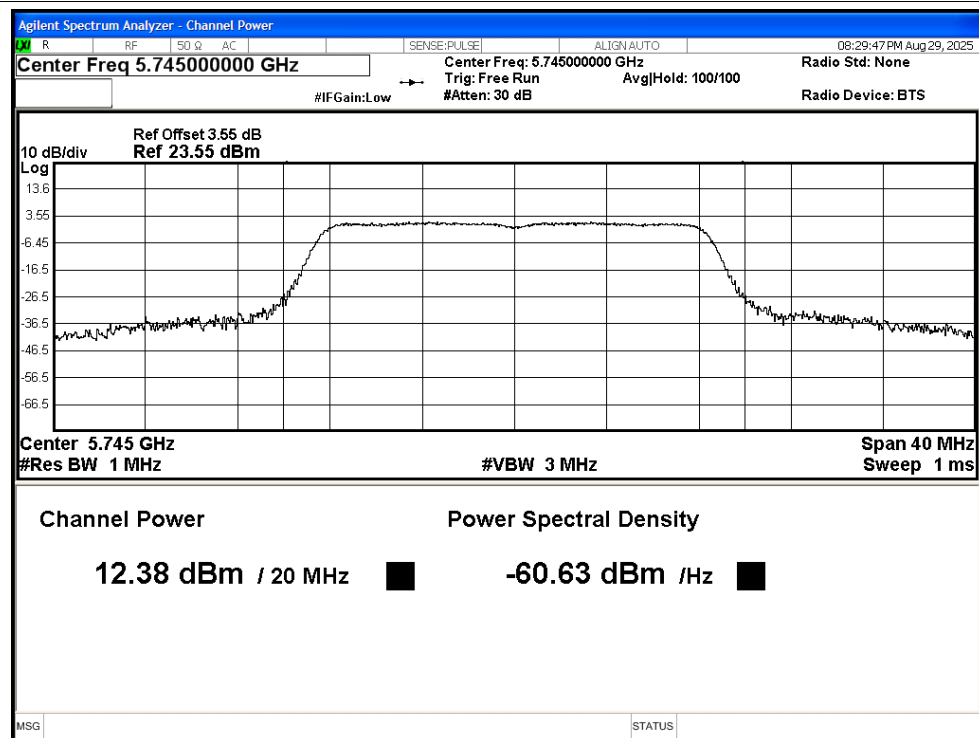




Power NVNT a 5785MHz Ant1


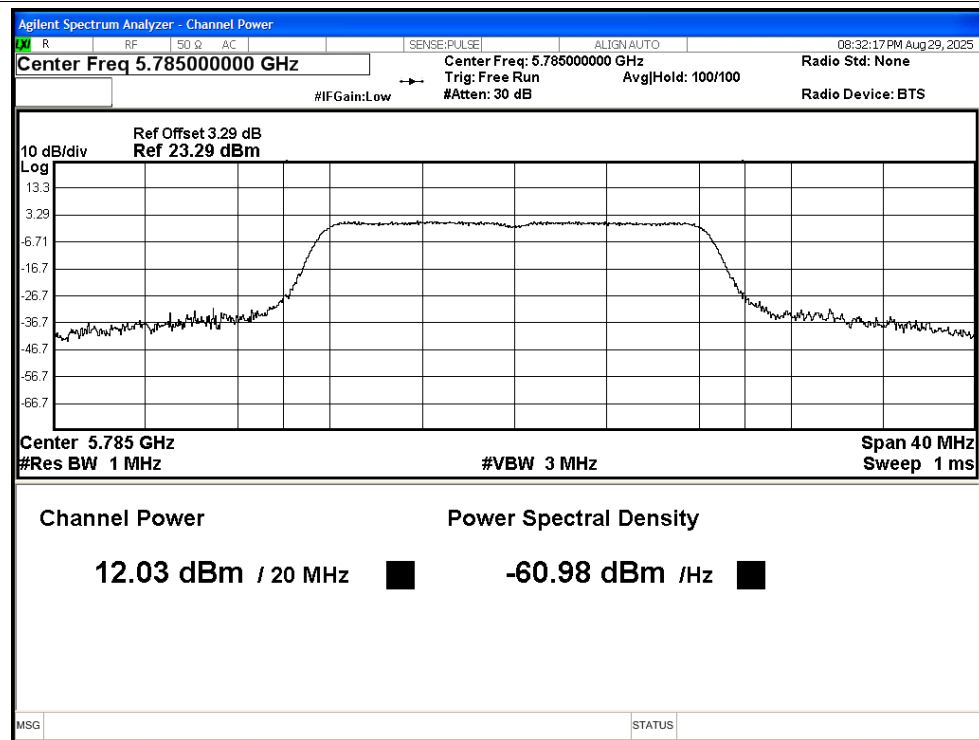


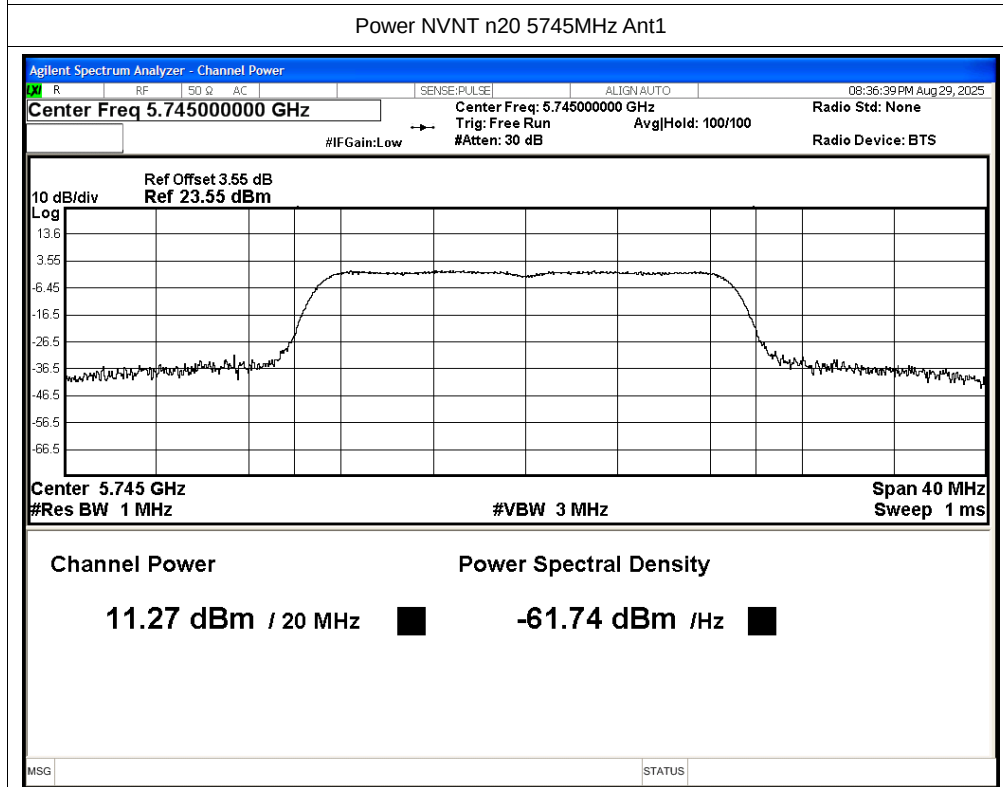
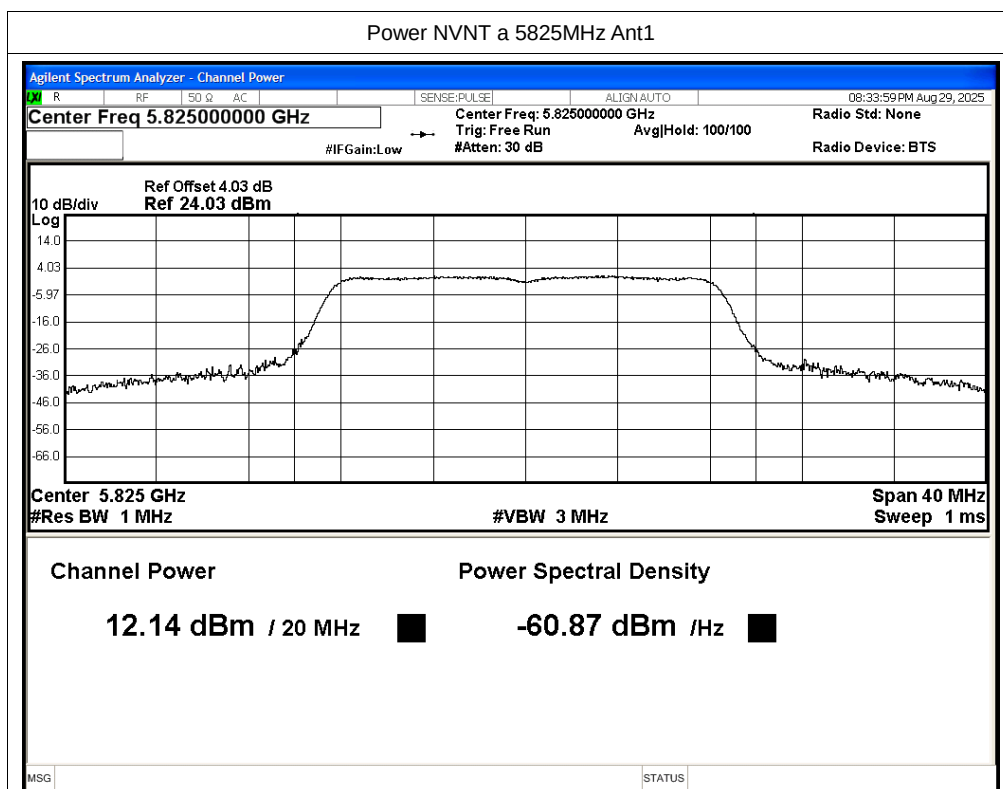


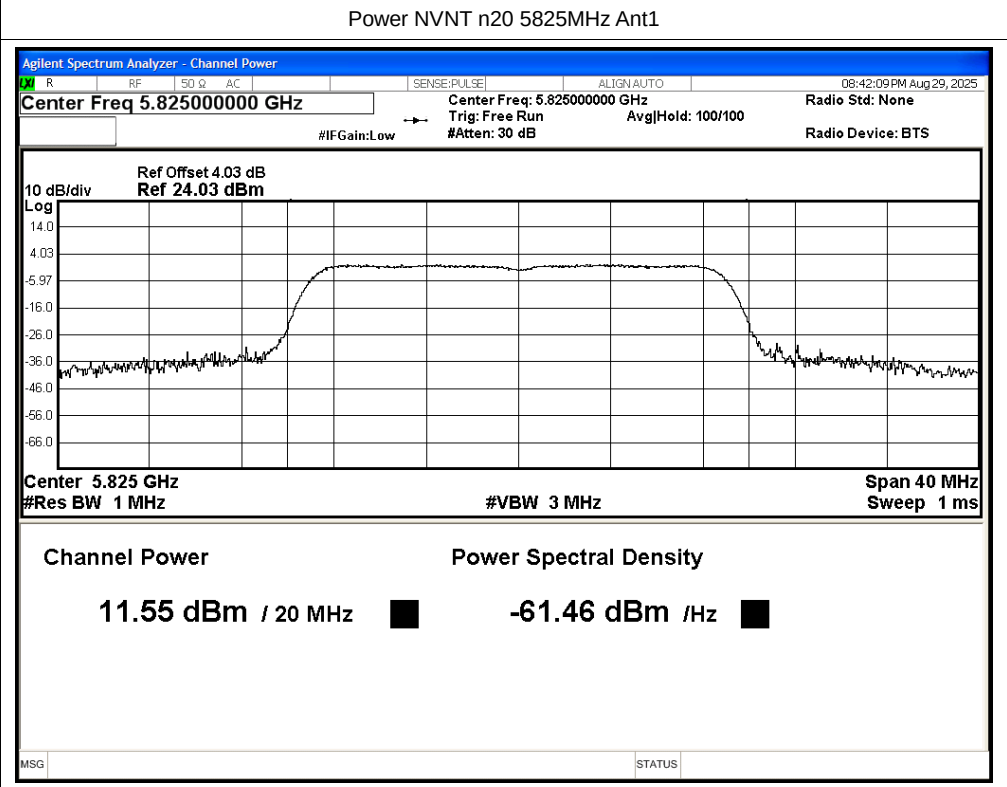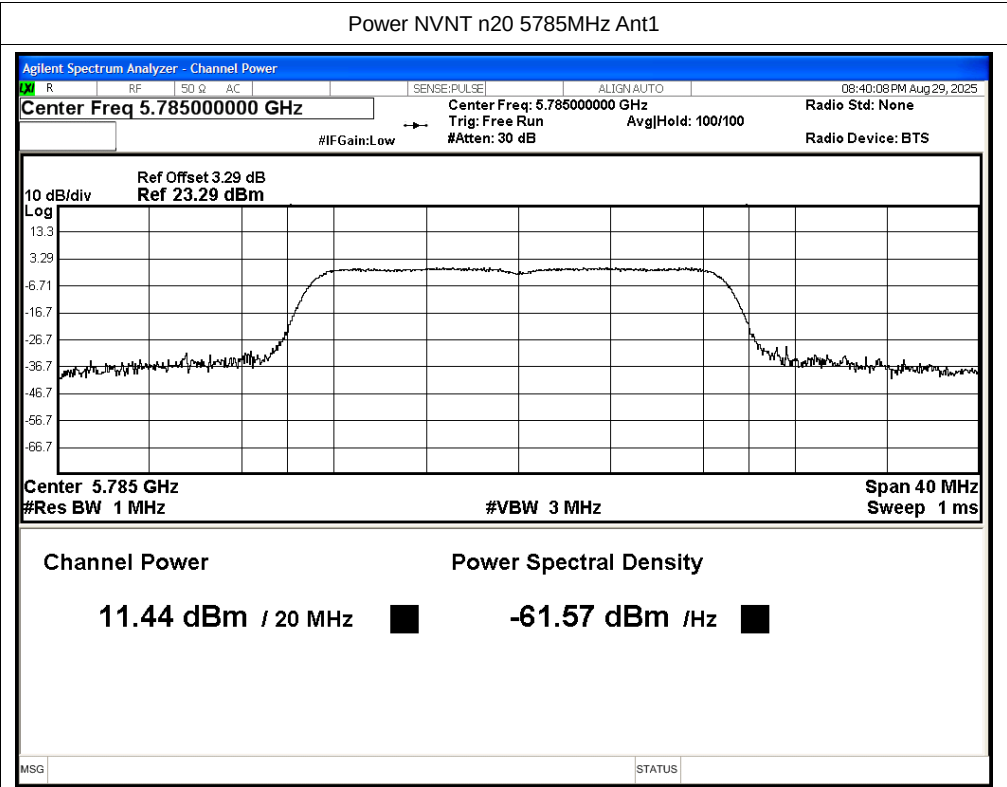


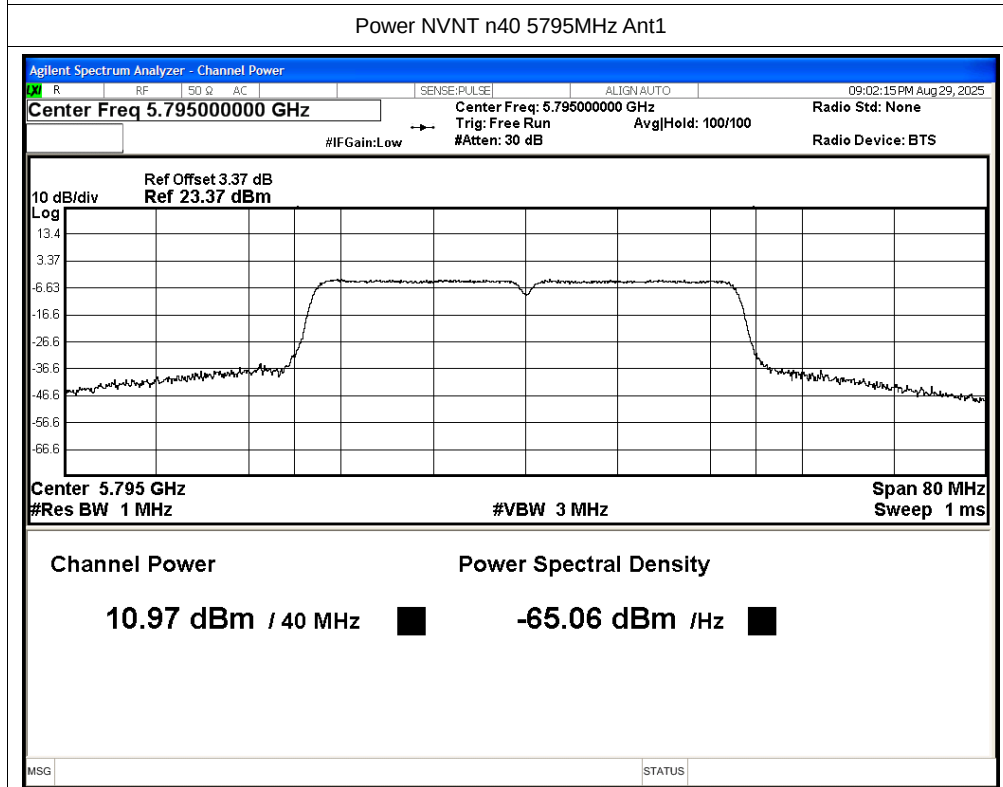
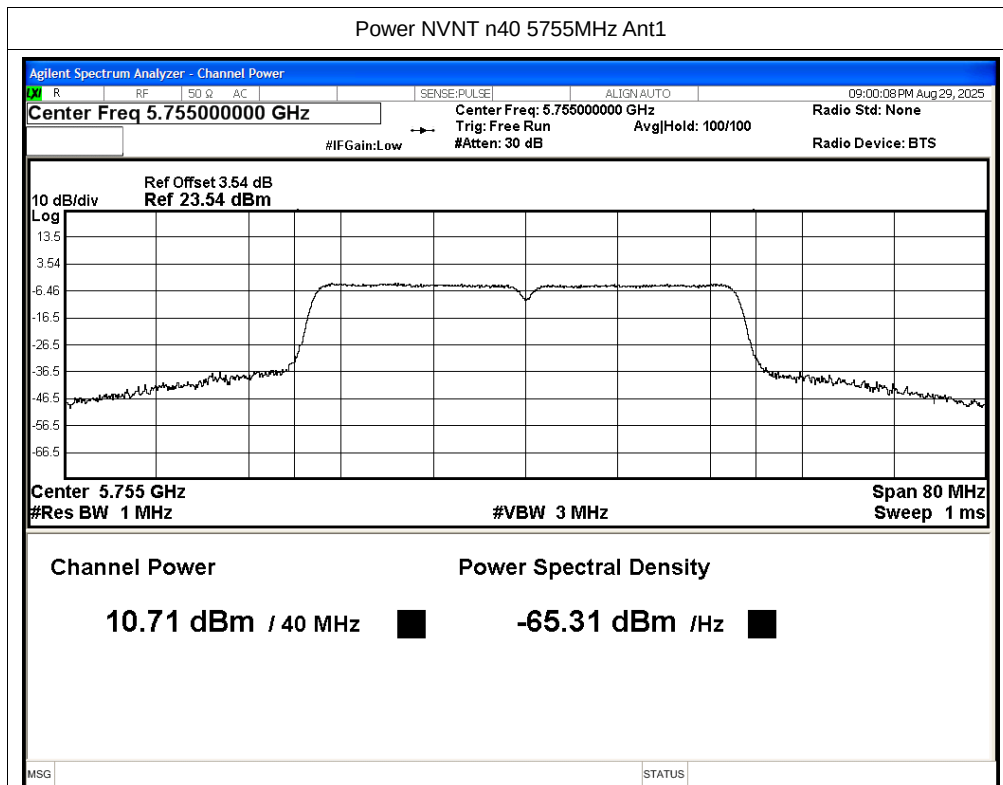


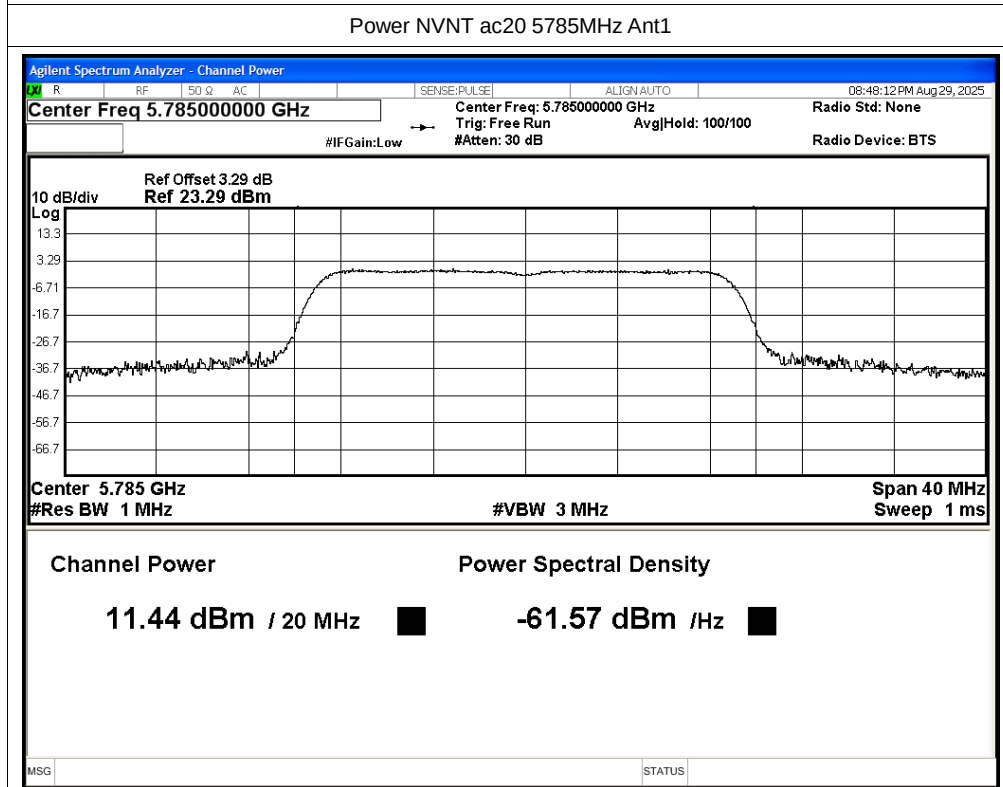
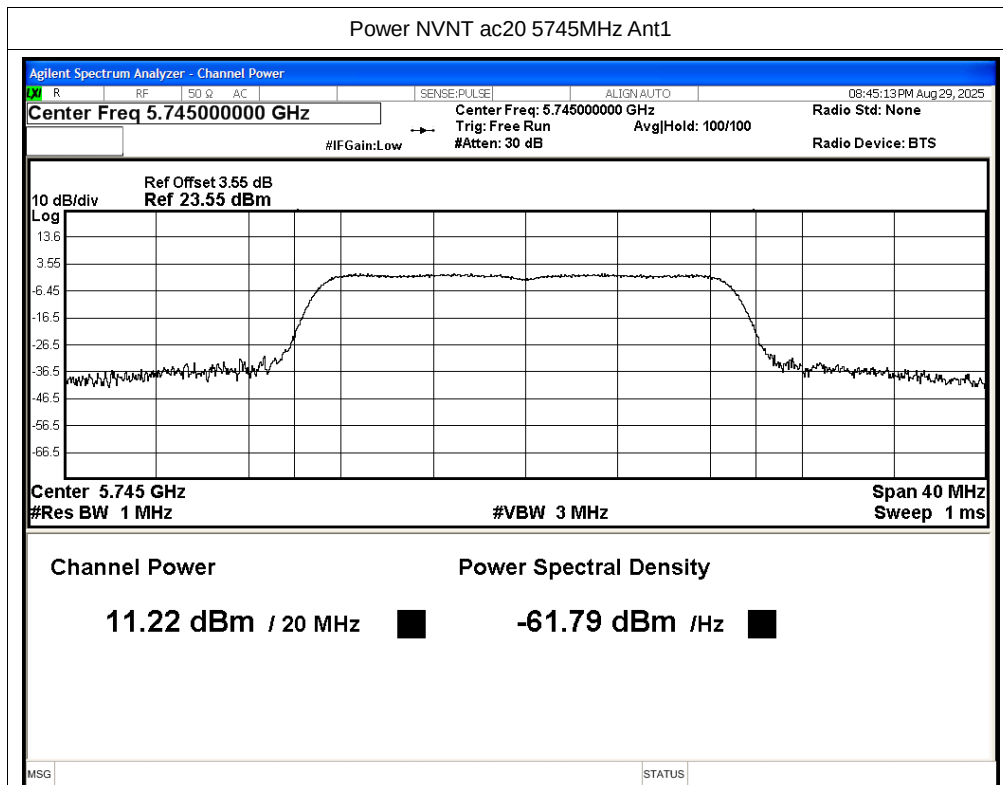


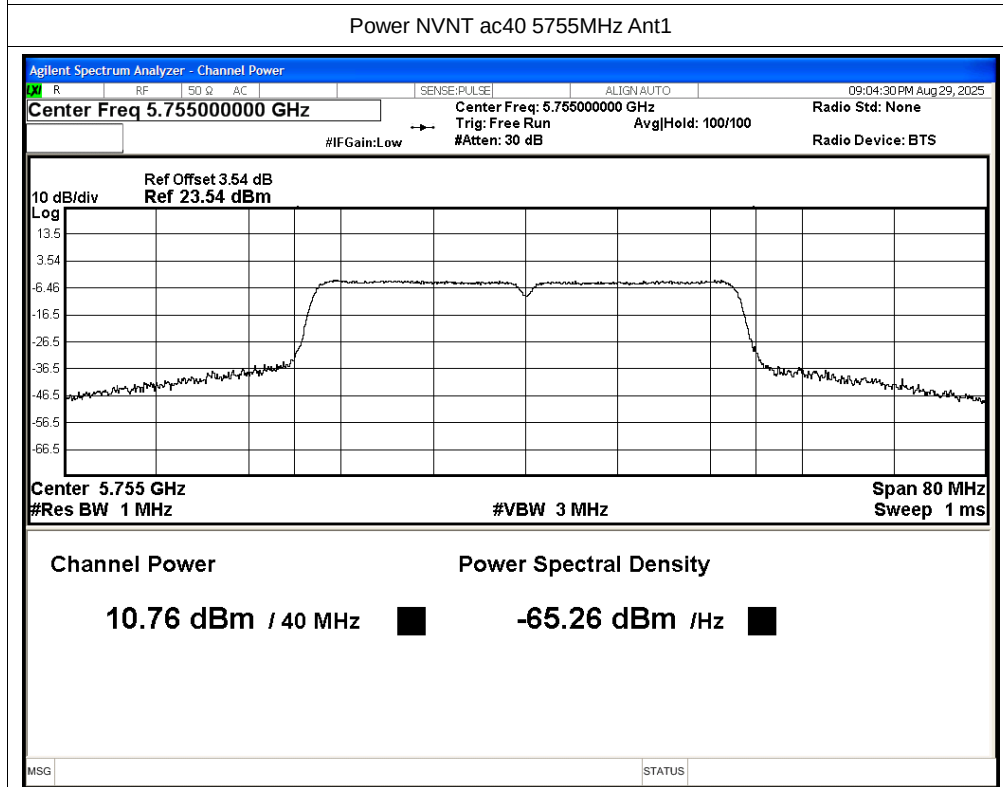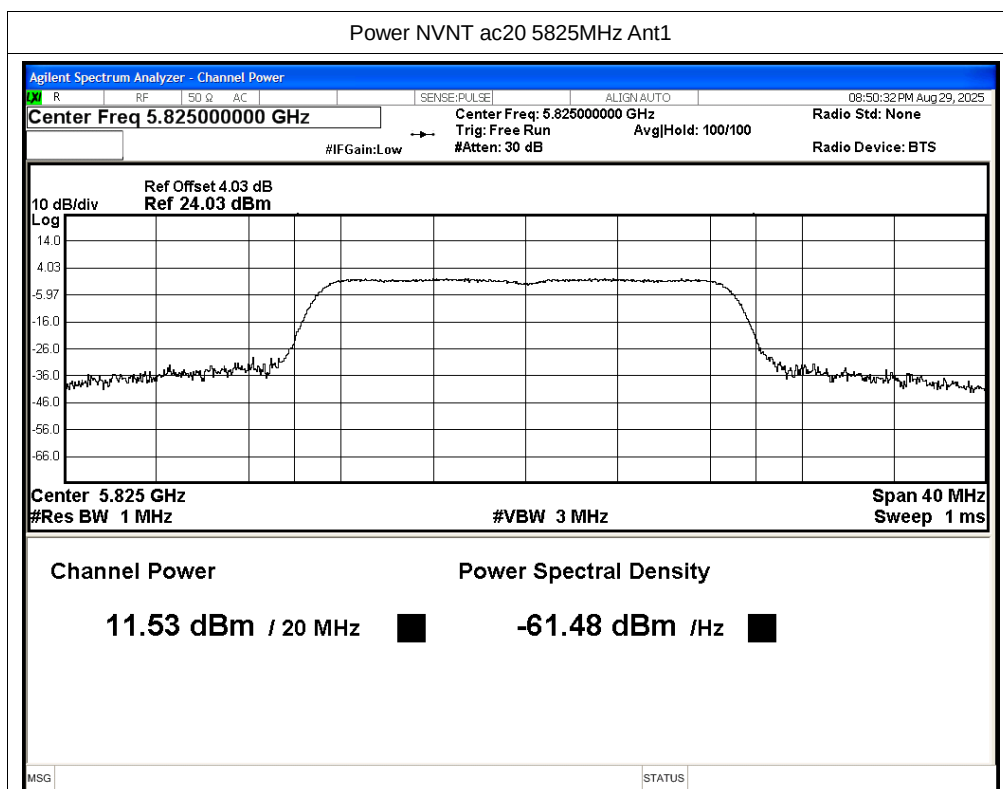

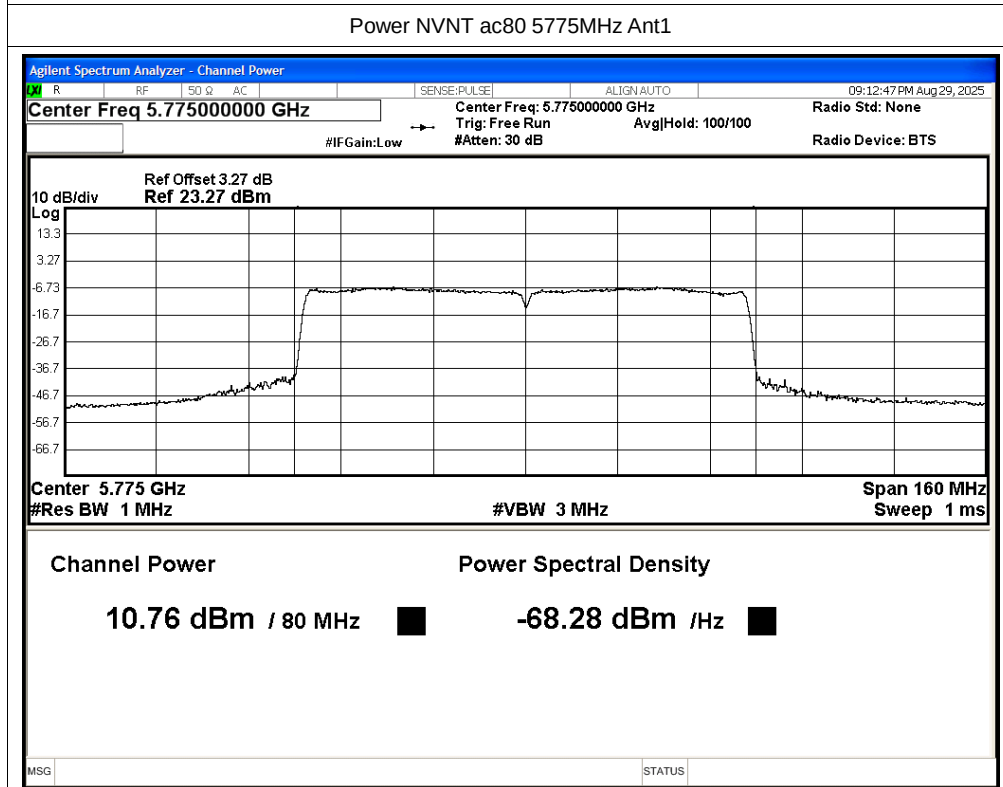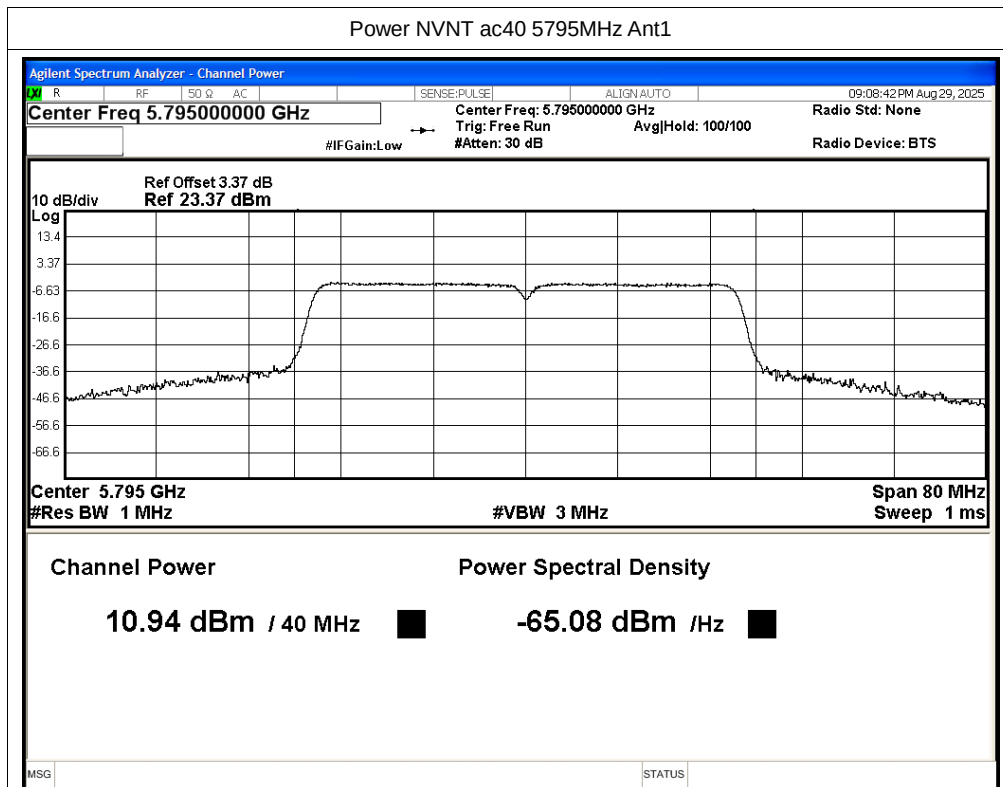

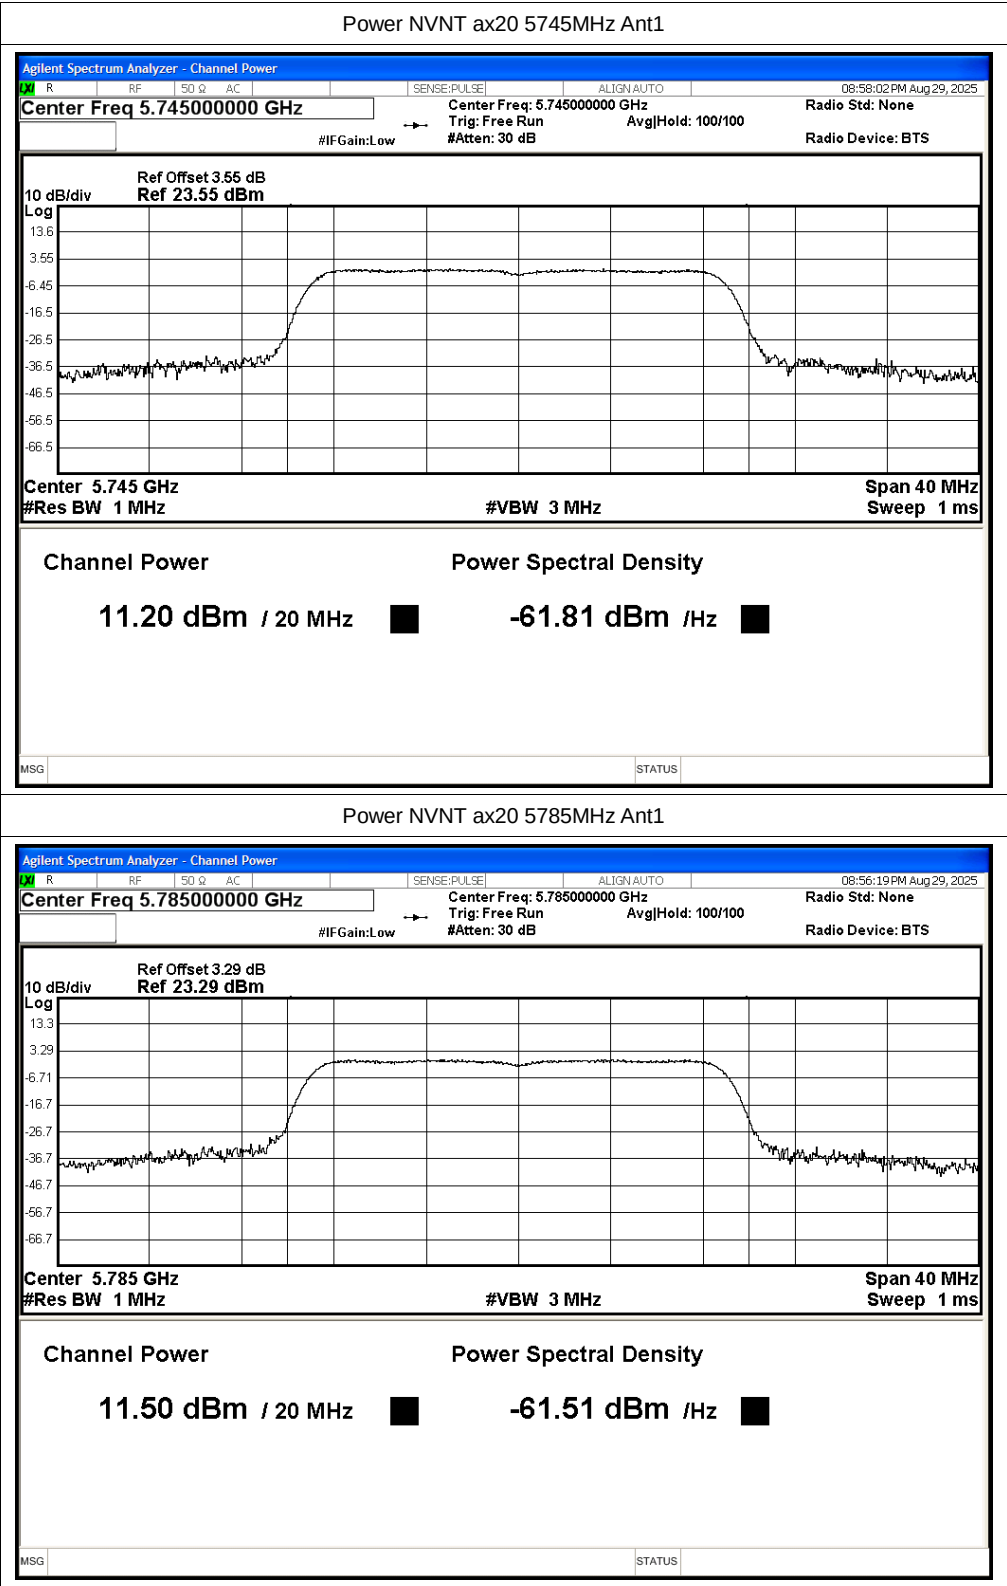

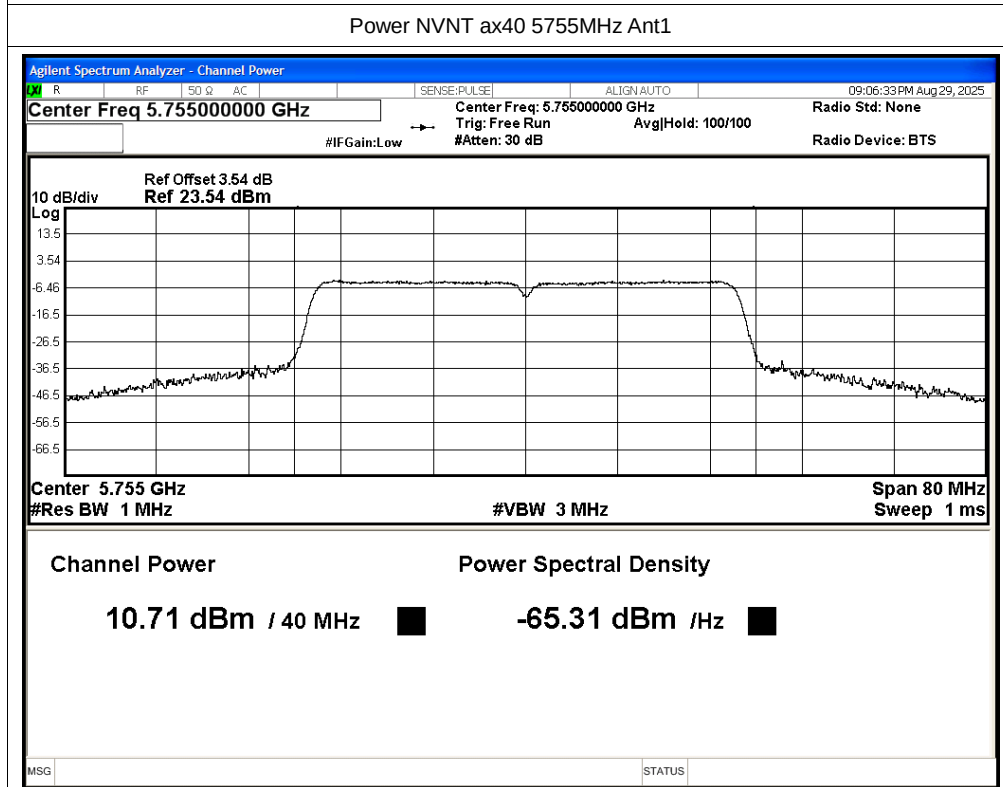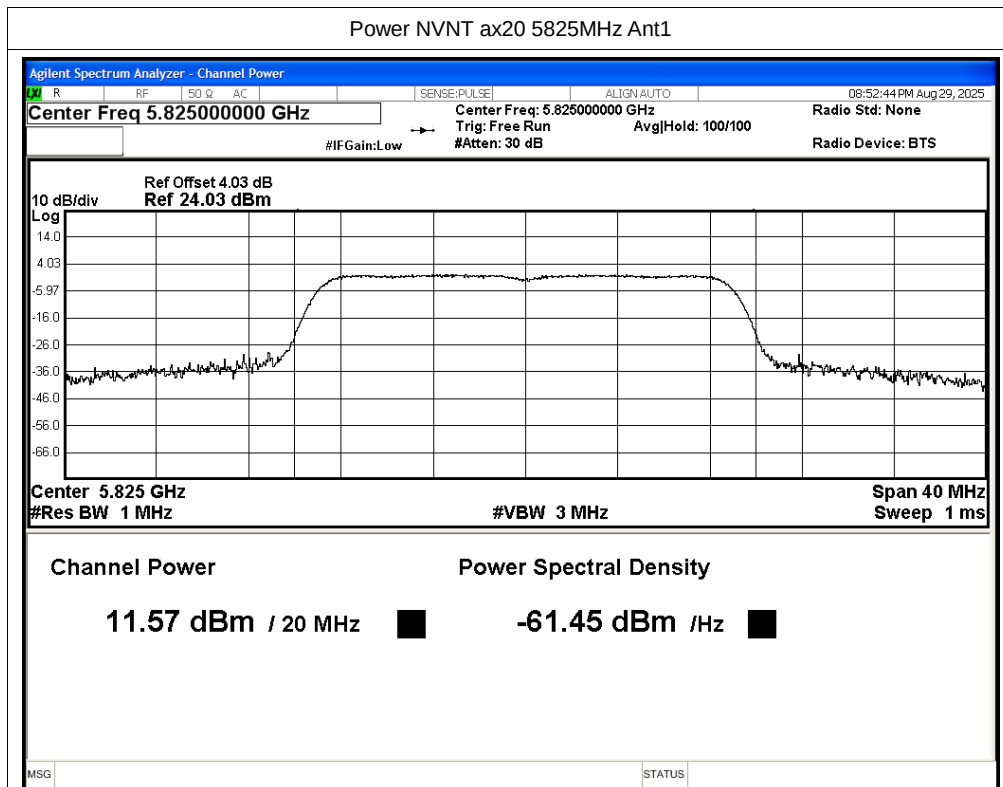

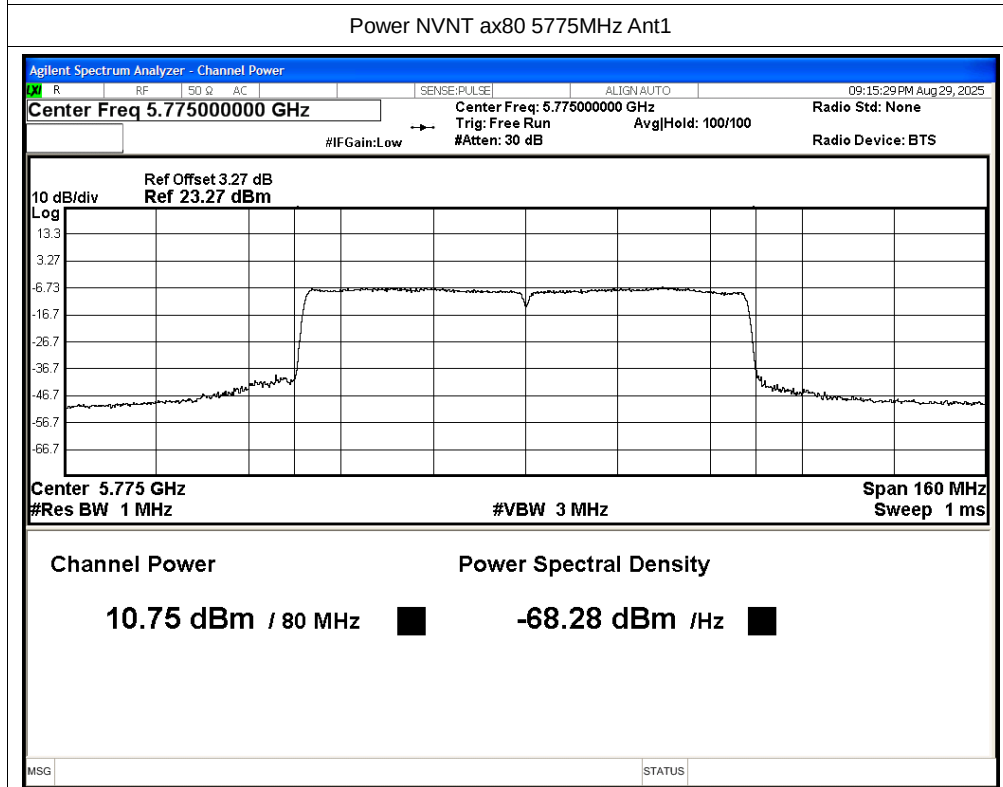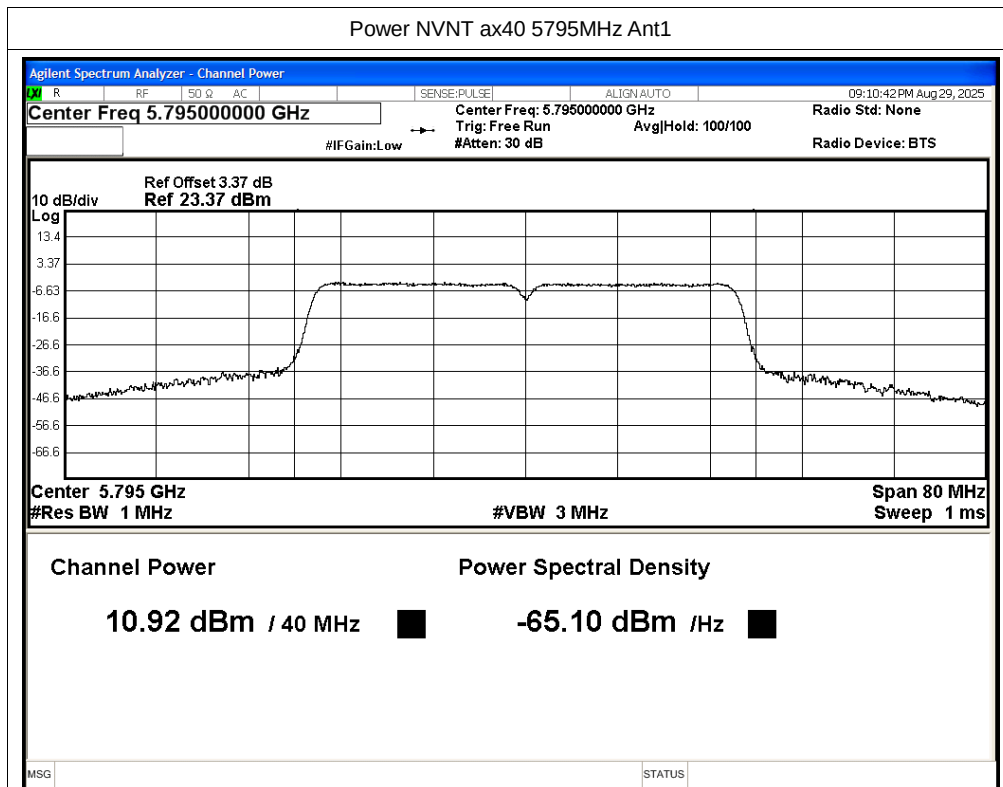


E.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant1	-0.77	0.24	-0.53	30	Pass
NVNT	a	5785	Ant1	-1.63	0.24	-1.39	30	Pass
NVNT	a	5825	Ant1	-1.58	0.24	-1.34	30	Pass
NVNT	n20	5745	Ant1	-2.63	0.12	-2.51	30	Pass
NVNT	n20	5785	Ant1	-2.47	0.12	-2.35	30	Pass
NVNT	n20	5825	Ant1	-2.45	0.12	-2.33	30	Pass
NVNT	n40	5755	Ant1	-5.84	0.24	-5.6	30	Pass
NVNT	n40	5795	Ant1	-6.02	0.24	-5.78	30	Pass
NVNT	ac20	5745	Ant1	-2.81	0.12	-2.69	30	Pass
NVNT	ac20	5785	Ant1	-2.28	0.12	-2.16	30	Pass
NVNT	ac20	5825	Ant1	-2.02	0.12	-1.9	30	Pass
NVNT	ac40	5755	Ant1	-6	0.24	-5.76	30	Pass
NVNT	ac40	5795	Ant1	-5.87	0.24	-5.63	30	Pass
NVNT	ac80	5775	Ant1	-8.8	0.47	-8.33	30	Pass
NVNT	ax20	5745	Ant1	-2.44	0.12	-2.32	30	Pass
NVNT	ax20	5785	Ant1	-2.38	0.12	-2.26	30	Pass
NVNT	ax20	5825	Ant1	-2.36	0.12	-2.24	30	Pass
NVNT	ax40	5755	Ant1	-6.16	0.24	-5.92	30	Pass
NVNT	ax40	5795	Ant1	-5.87	0.24	-5.63	30	Pass
NVNT	ax80	5775	Ant1	-8.66	0.47	-8.19	30	Pass


Test Graphs


PSD NVNT a 5745MHz Ant1

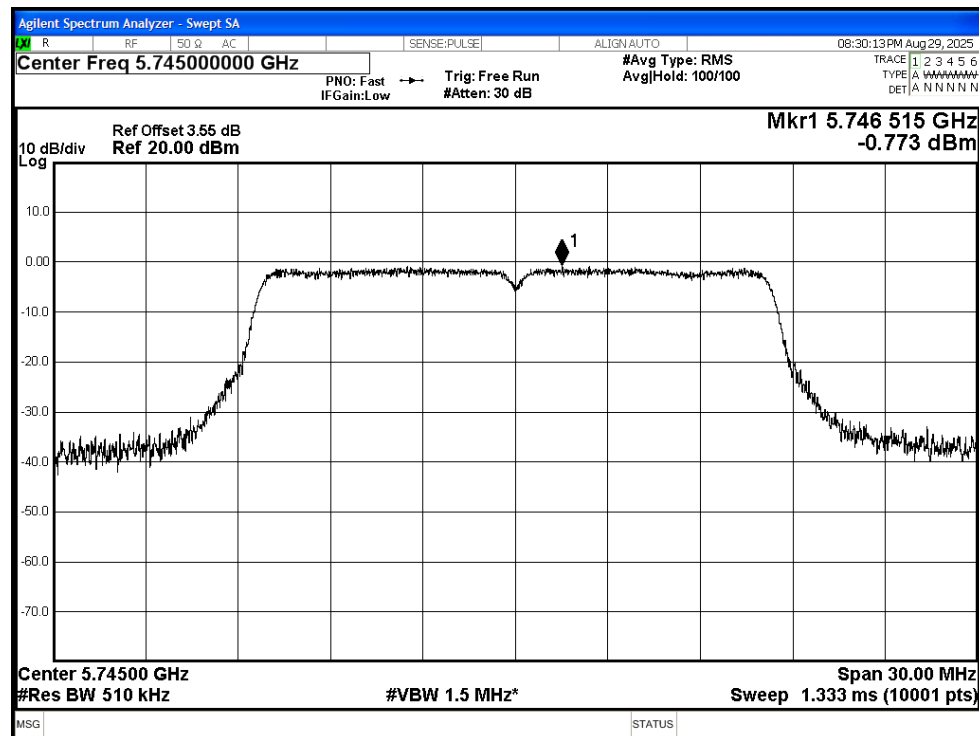



PSD NVNT a 5785MHz Ant1

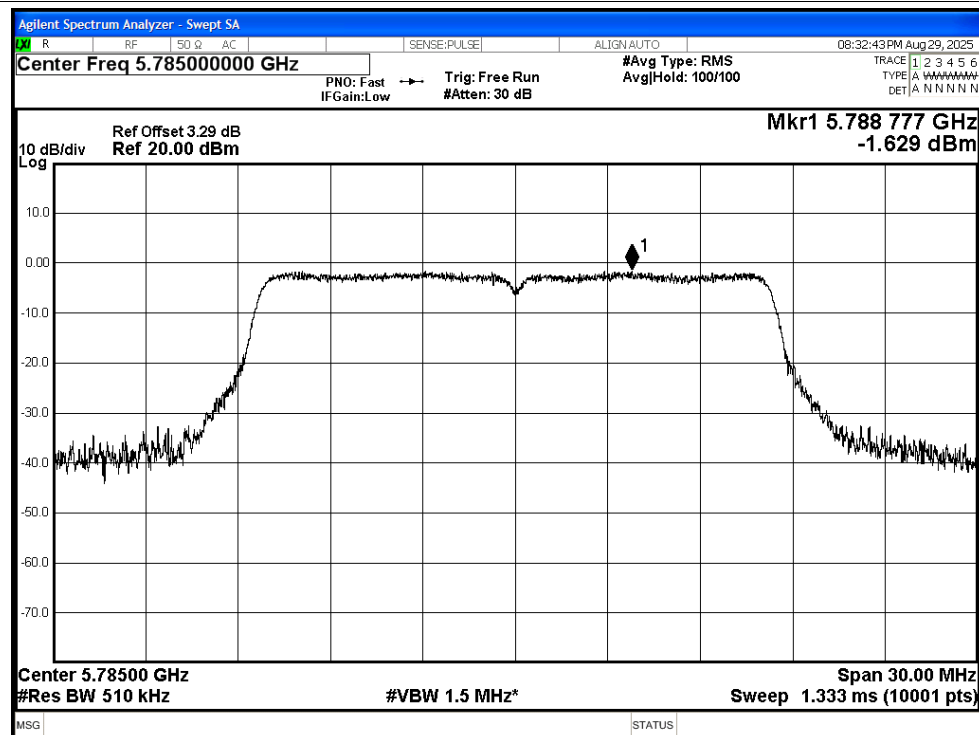



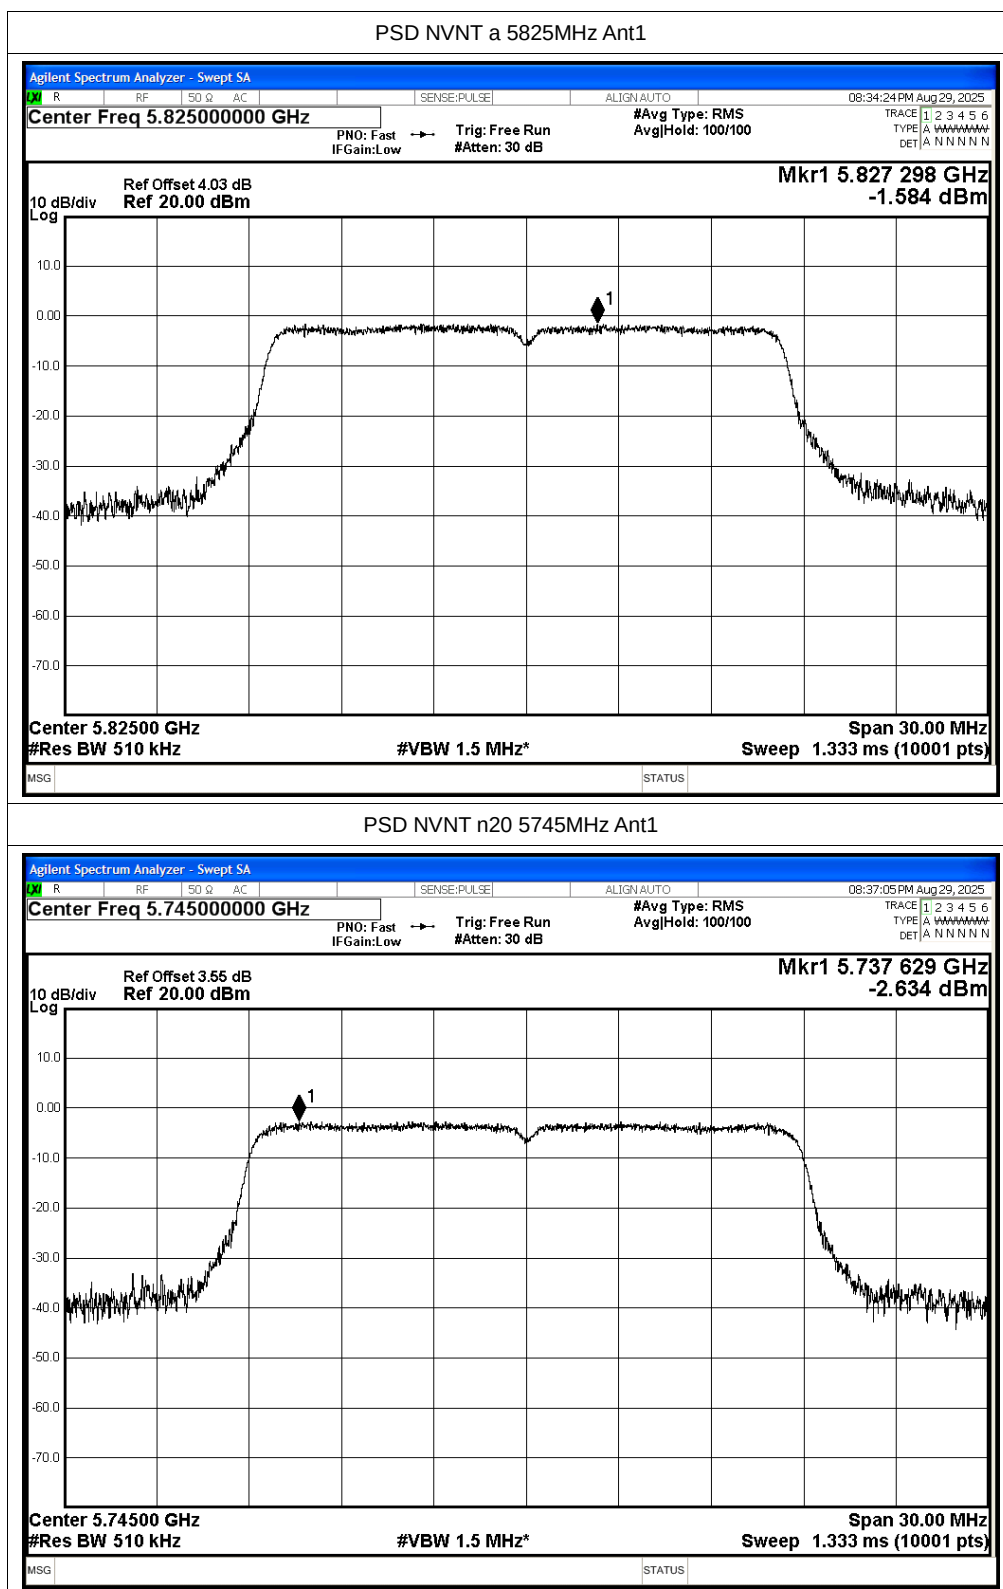



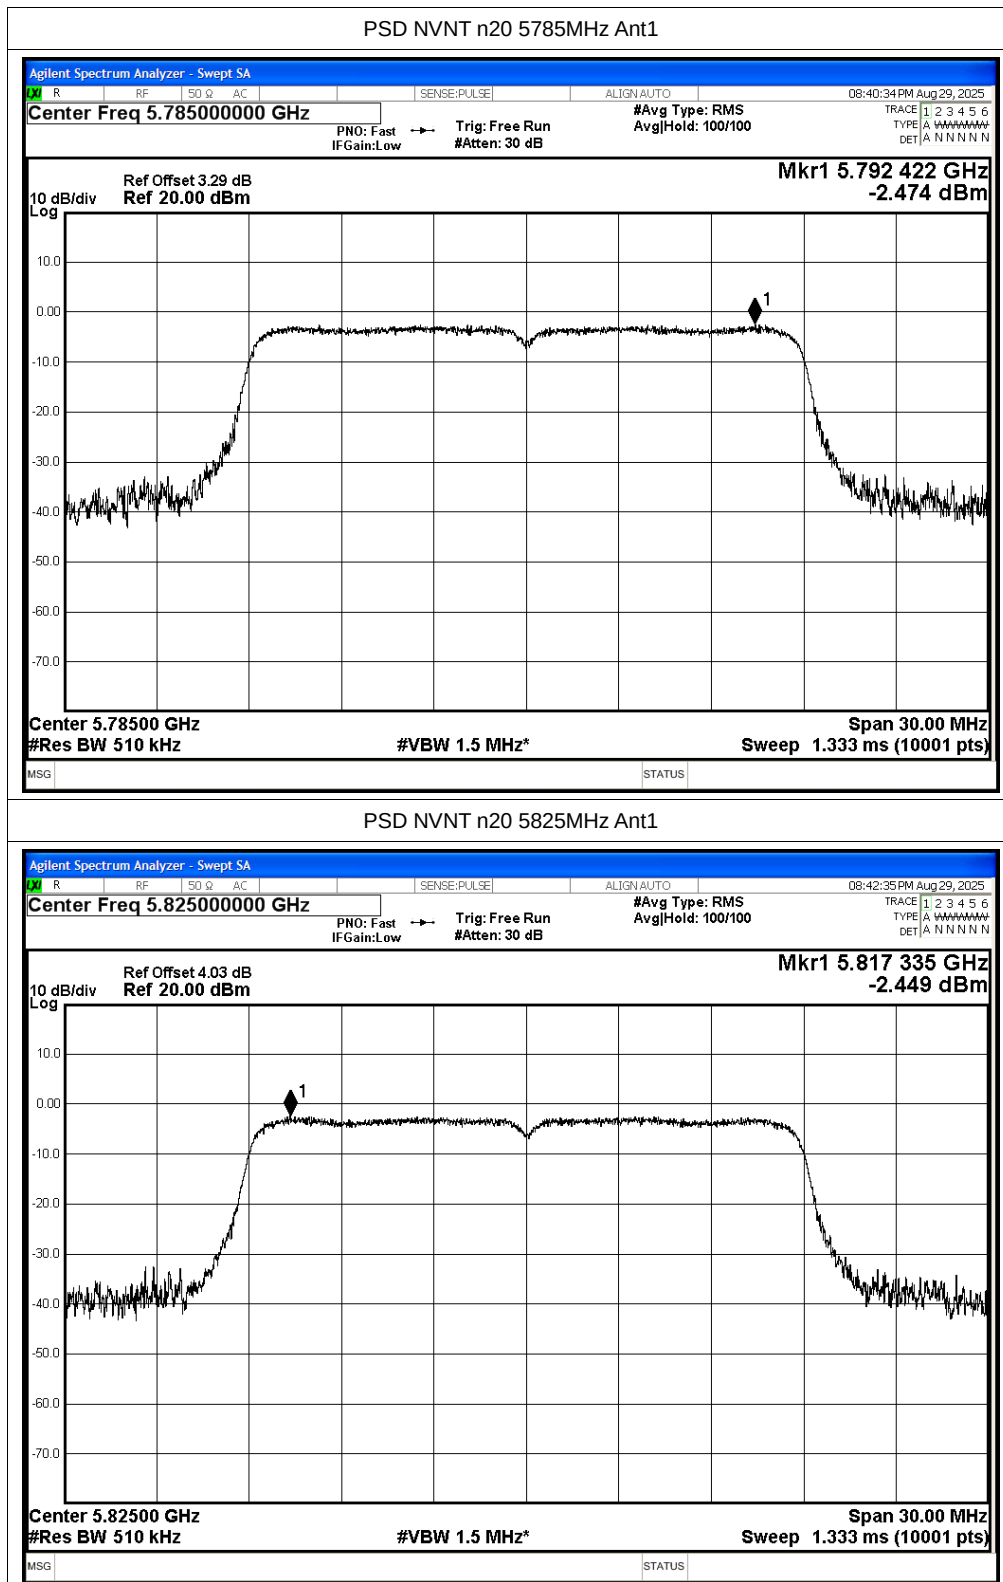


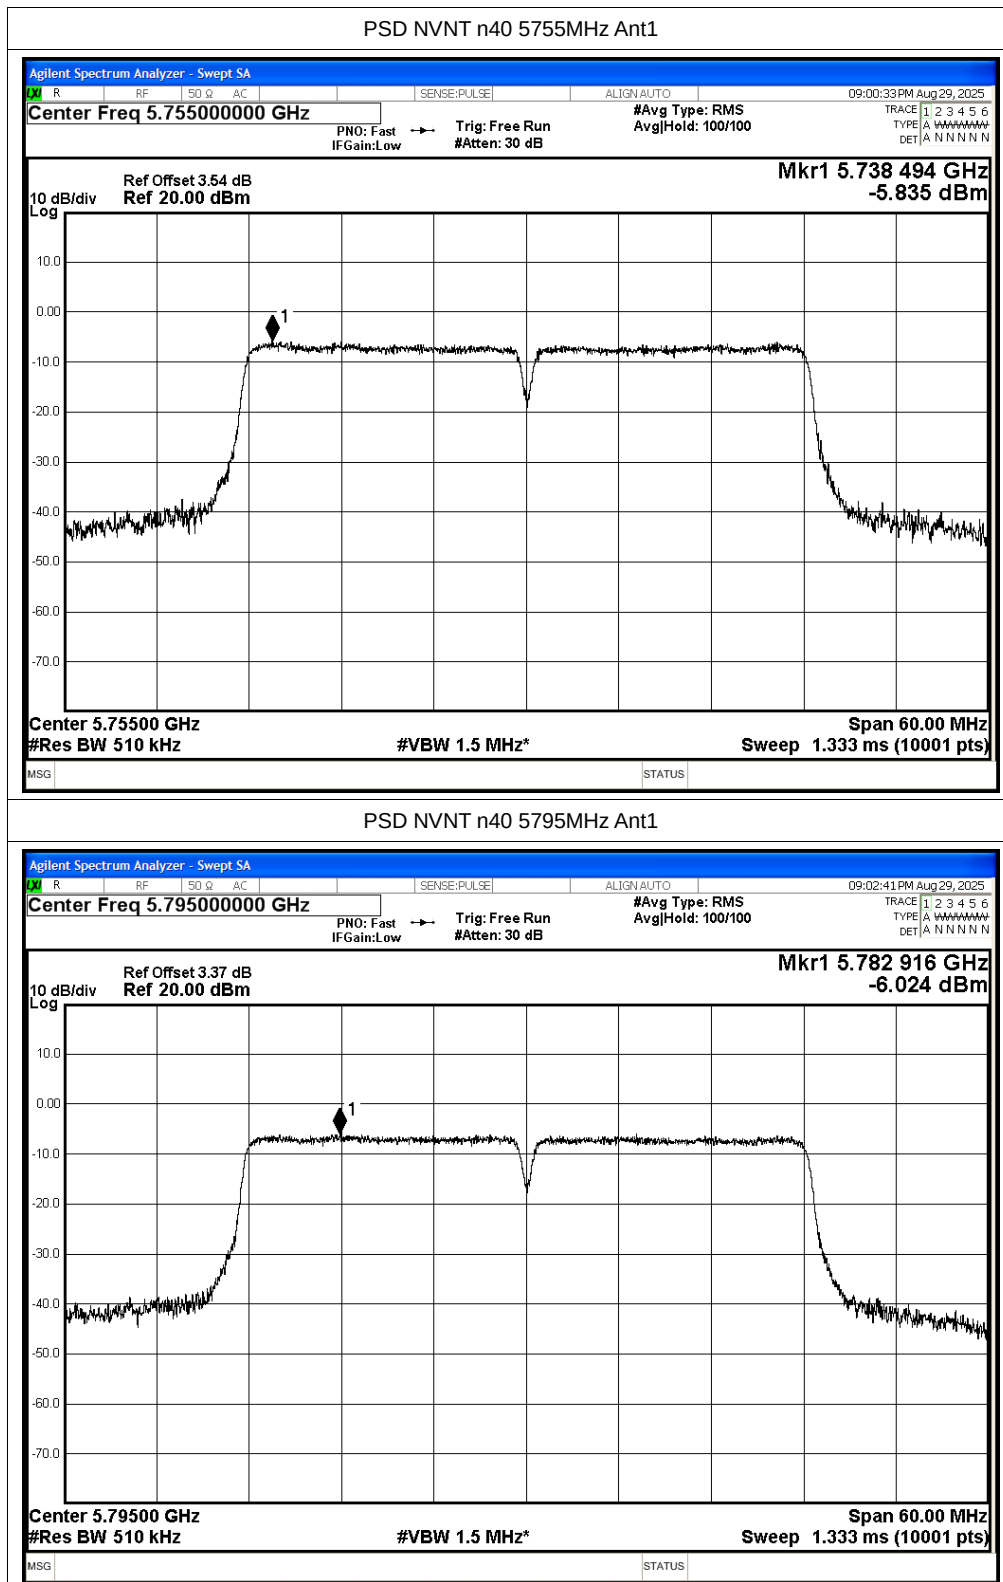


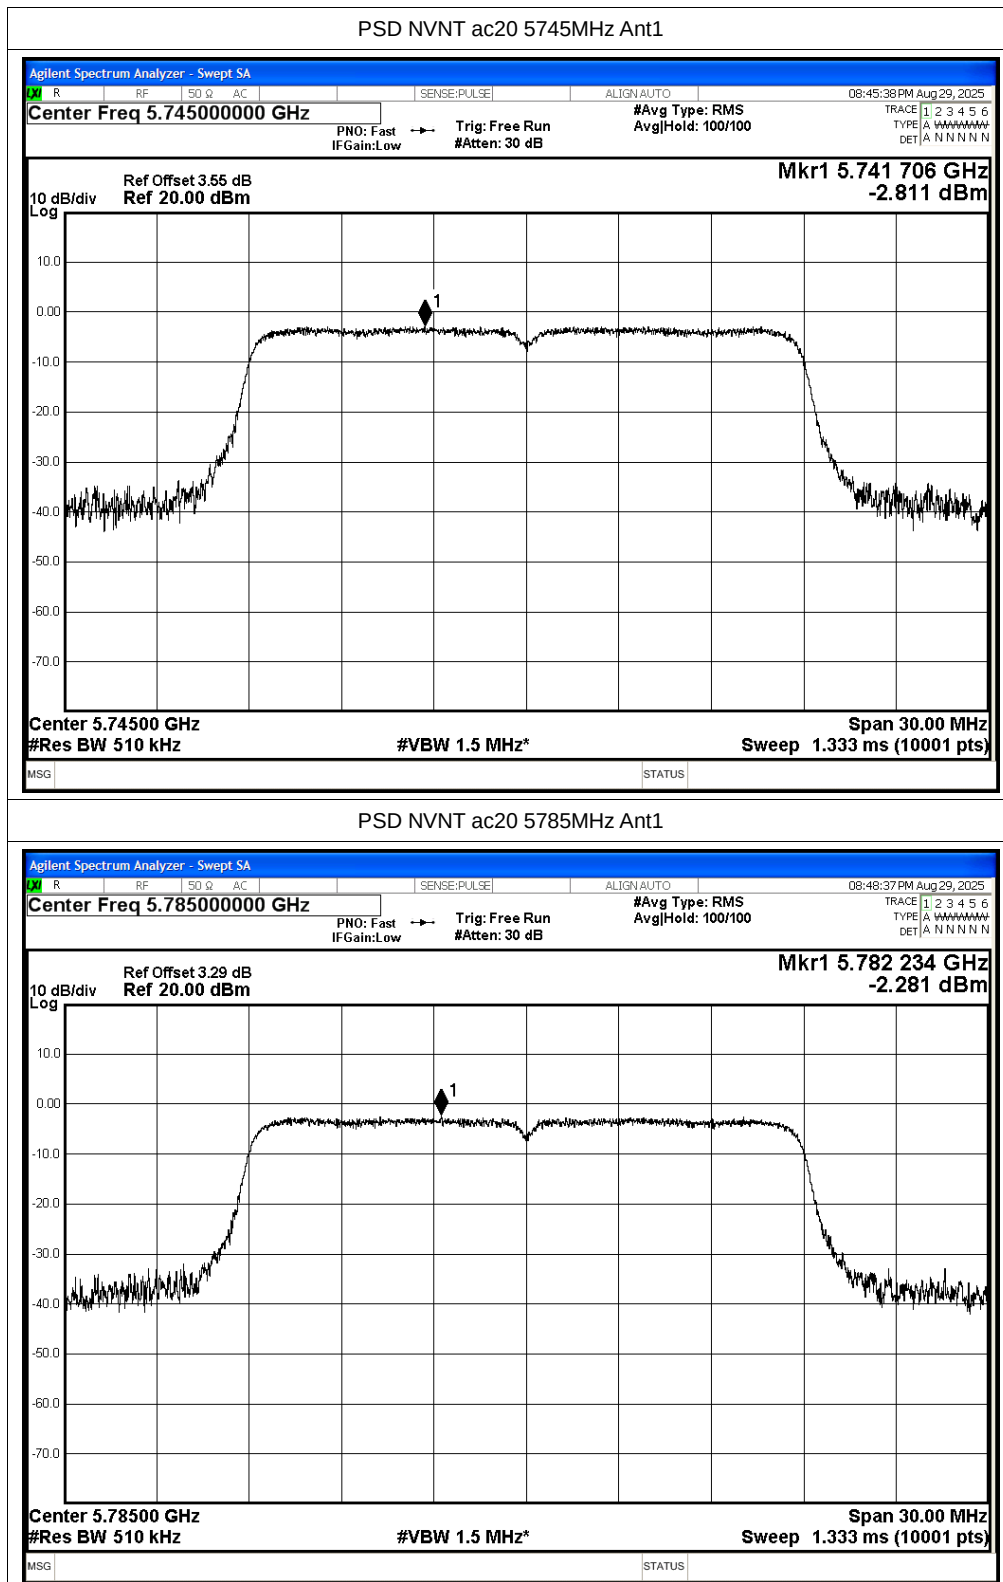


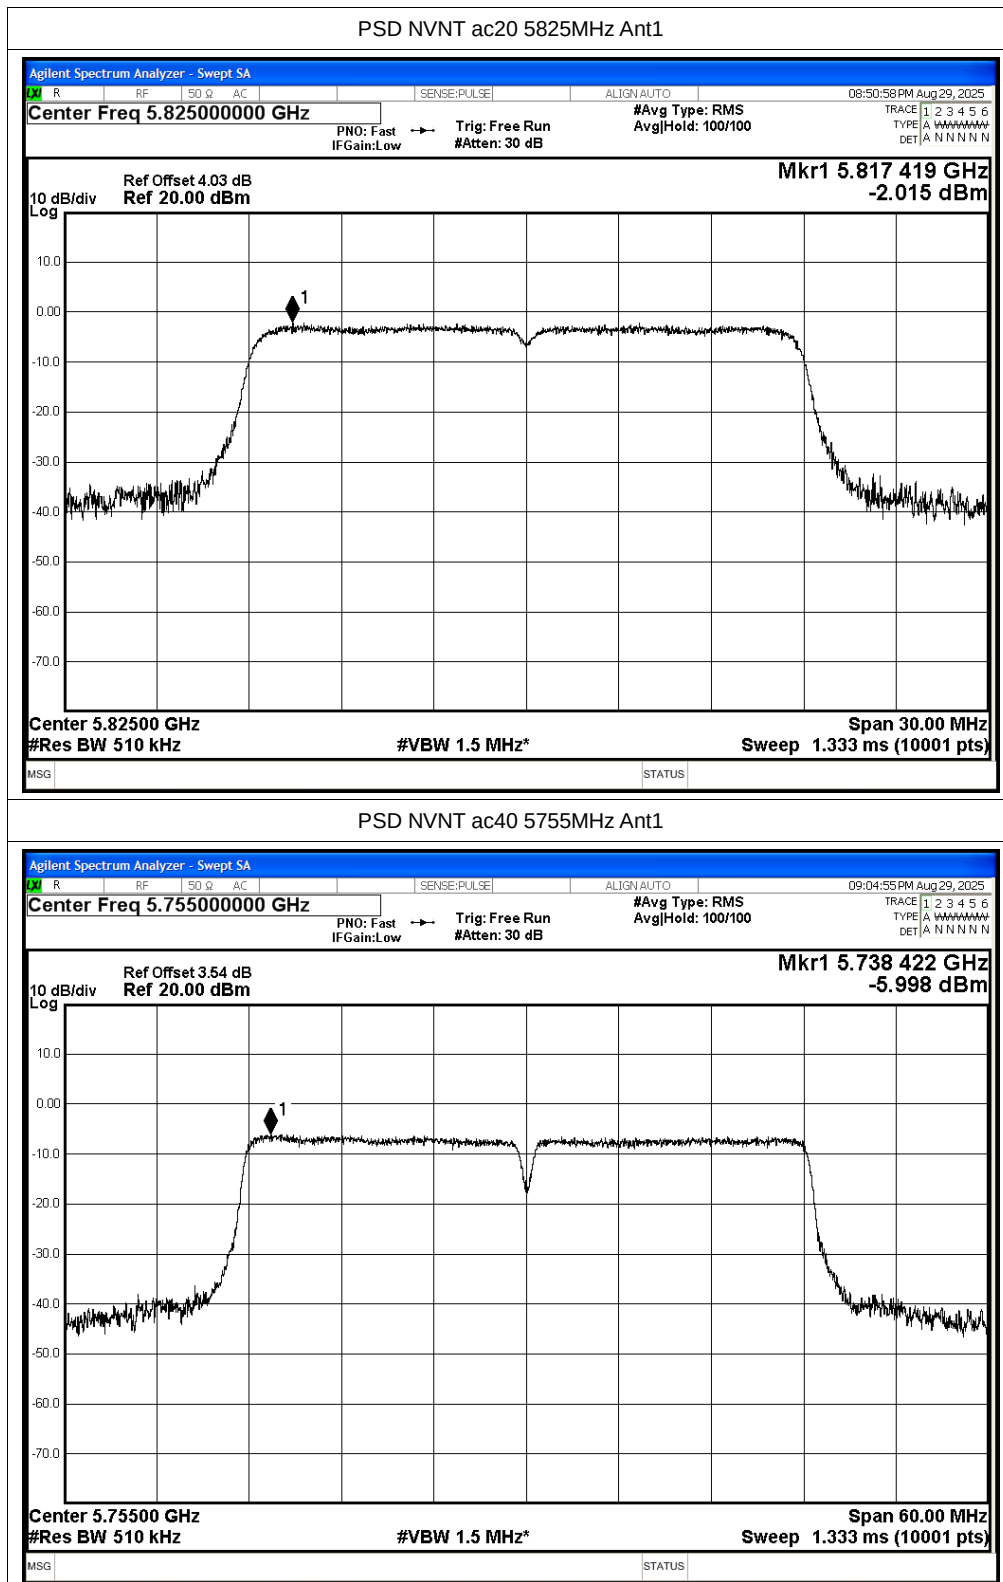

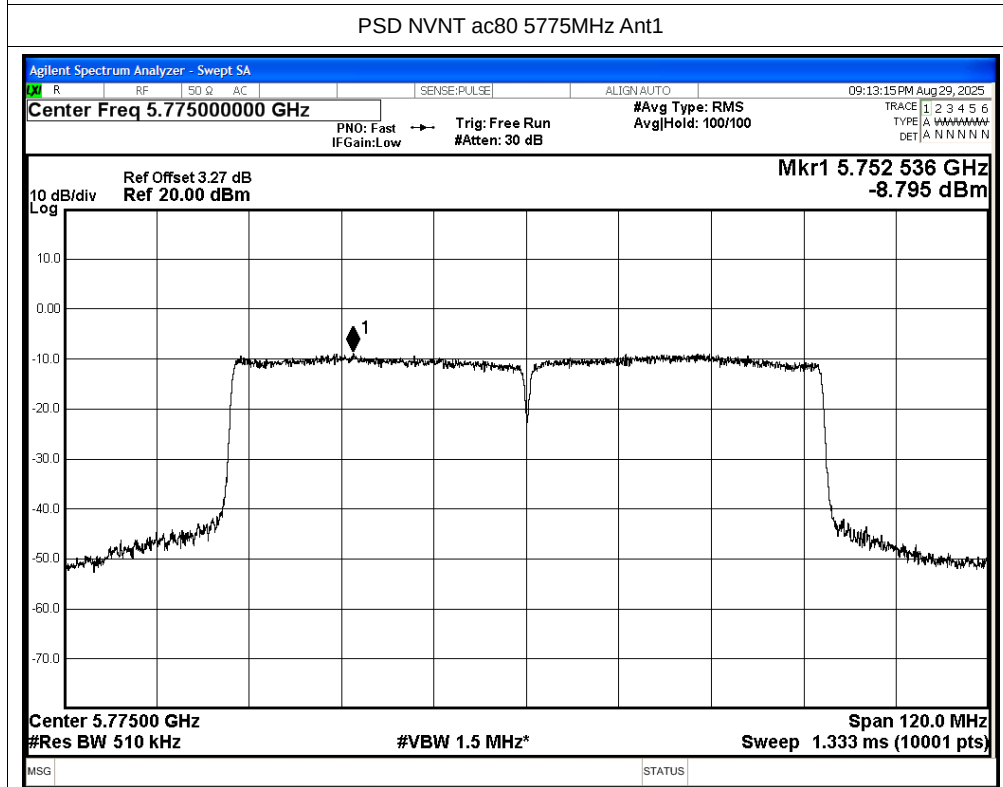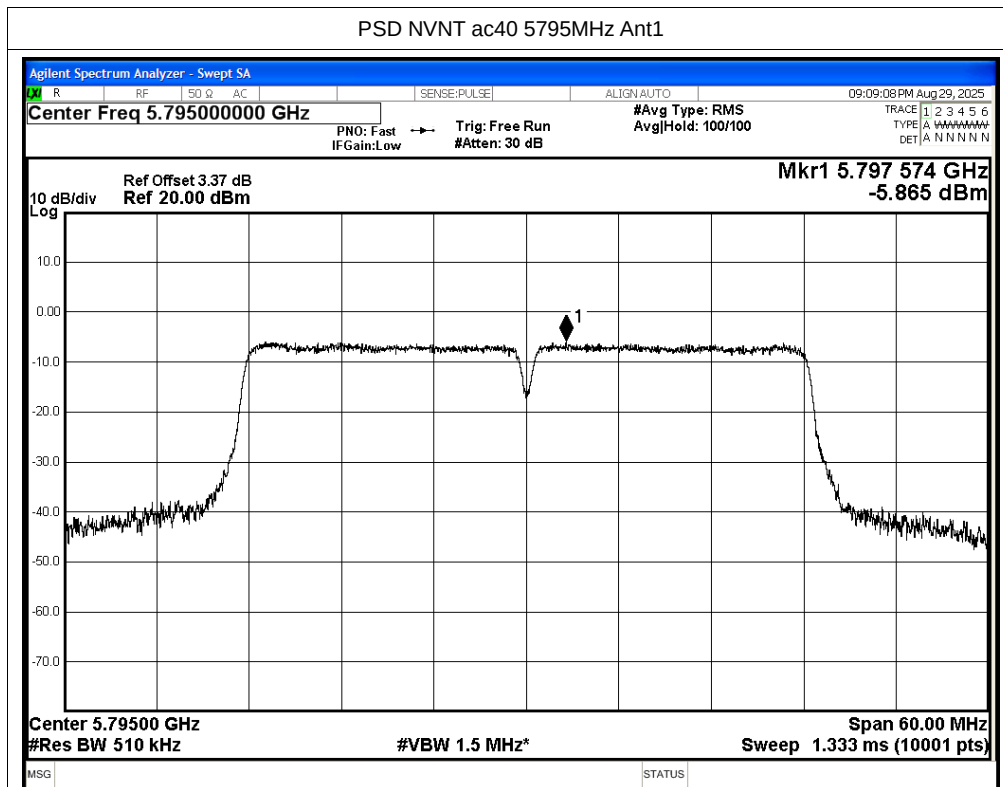

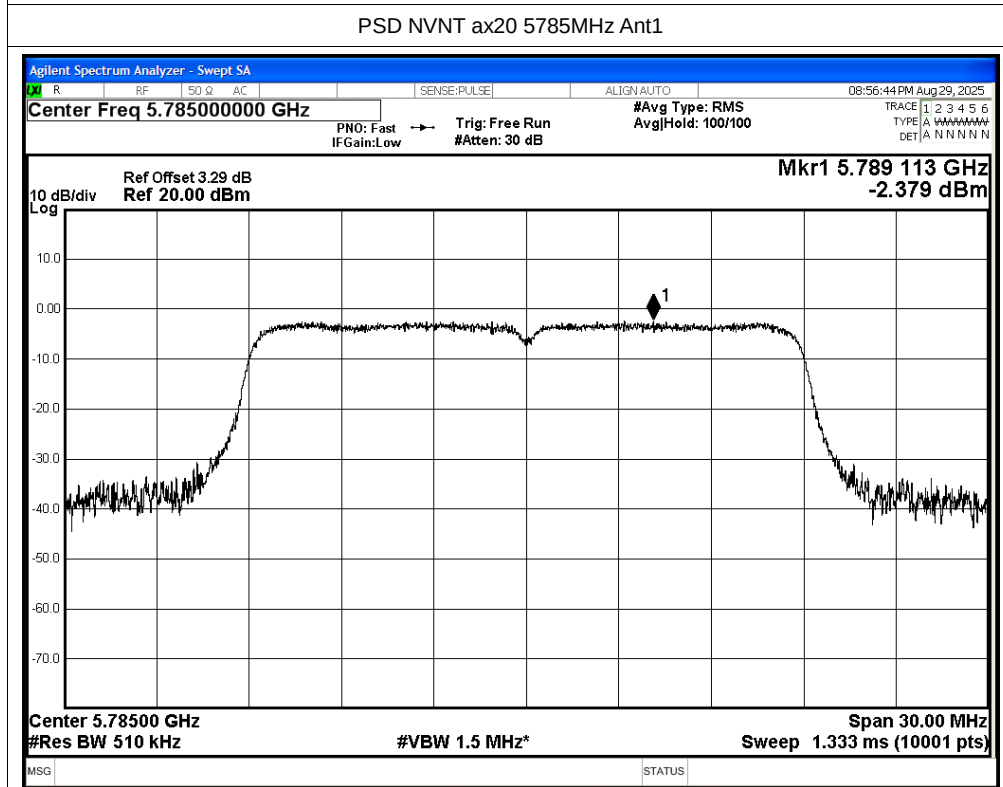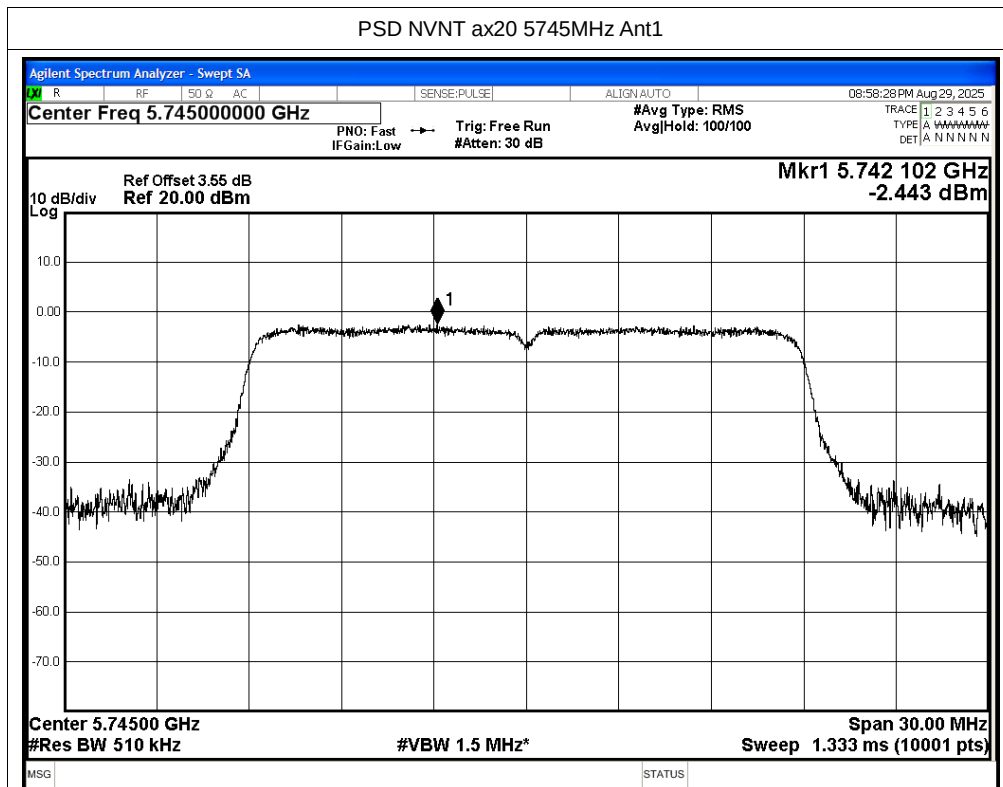

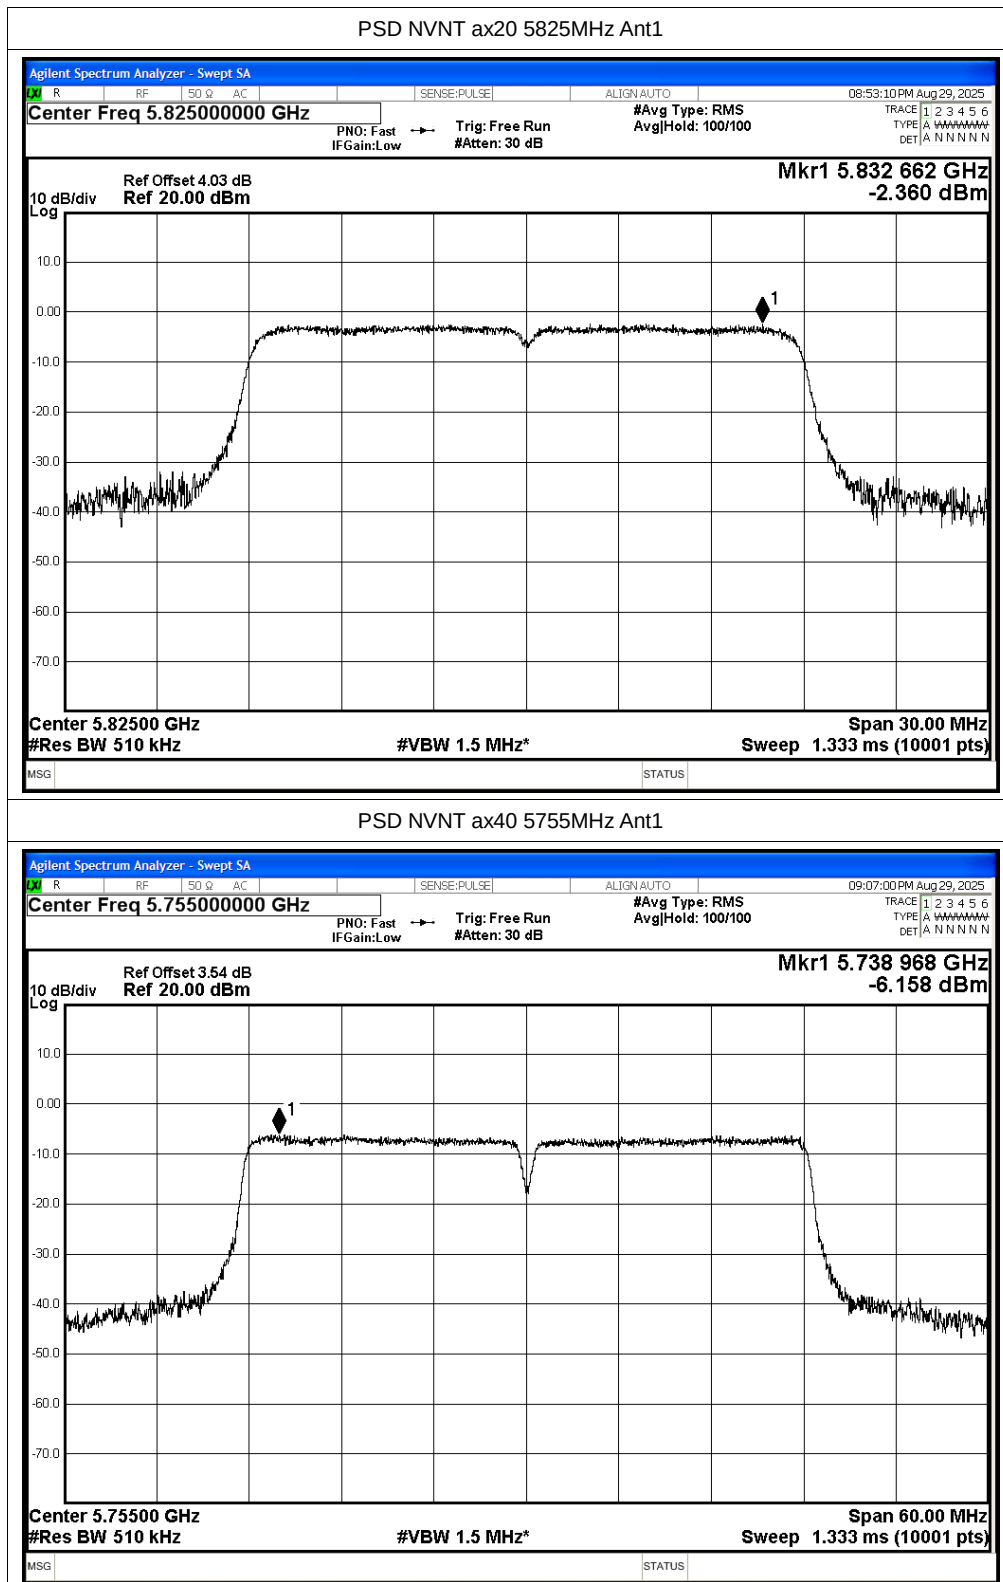

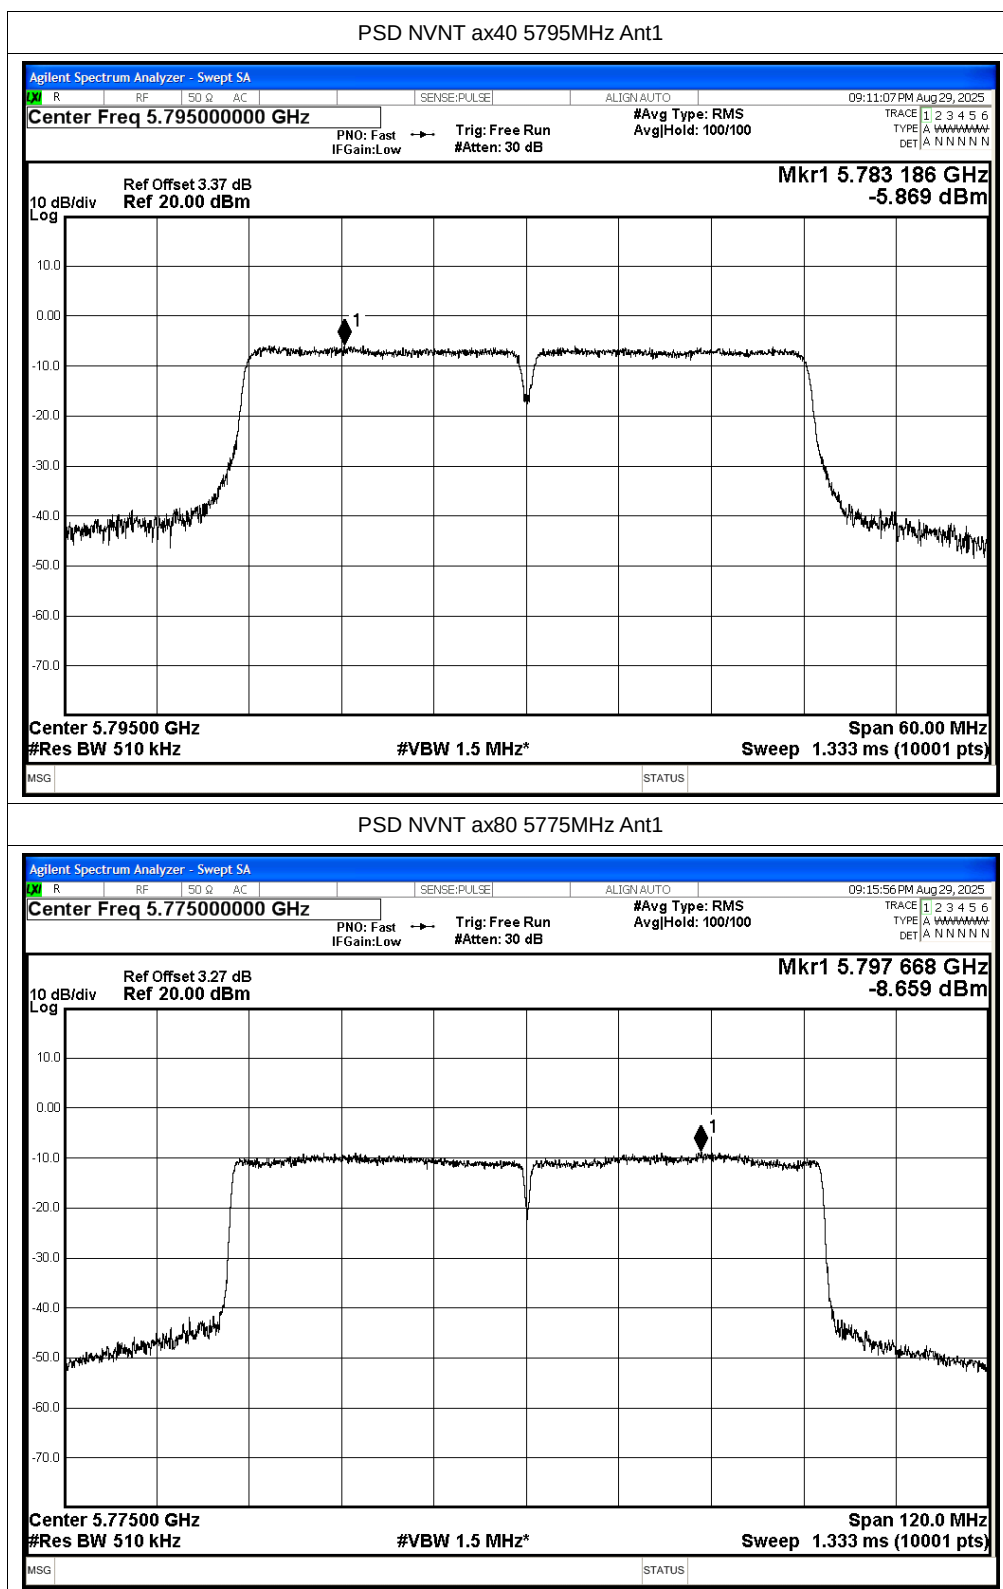



E.4 Restrict Band



Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	5650	-49.85	2.02	-	-47.83	Peak	-27	Pass
NVNT	a	5745	Ant1	5650	-57.06	2.02	0.24	-54.80	Average	-27	Pass
NVNT	a	5745	Ant1	5700	-46.43	2.02	-	-44.41	Peak	10	Pass
NVNT	a	5745	Ant1	5700	-54.59	2.02	0.24	-52.33	Average	10	Pass
NVNT	a	5745	Ant1	5720	-33.15	2.02	-	-31.13	Peak	15.6	Pass
NVNT	a	5745	Ant1	5720	-45.94	2.02	0.24	-43.68	Average	15.6	Pass
NVNT	a	5745	Ant1	5725	-28.53	2.02	-	-26.51	Peak	27	Pass
NVNT	a	5745	Ant1	5725	-42.36	2.02	0.24	-40.10	Average	27	Pass
NVNT	a	5825	Ant1	5850	-36.21	2.02	-	-34.19	Peak	27	Pass
NVNT	a	5825	Ant1	5850	-48.58	2.02	0.24	-46.32	Average	27	Pass
NVNT	a	5825	Ant1	5855	-39.42	2.02	-	-37.40	Peak	15.6	Pass
NVNT	a	5825	Ant1	5855	-52.86	2.02	0.24	-50.60	Average	15.6	Pass
NVNT	a	5825	Ant1	5875	-46.24	2.02	-	-44.22	Peak	10	Pass
NVNT	a	5825	Ant1	5875	-55.18	2.02	0.24	-52.92	Average	10	Pass
NVNT	a	5825	Ant1	5925	-47.75	2.02	-	-45.73	Peak	-27	Pass
NVNT	a	5825	Ant1	5925	-55.83	2.02	0.24	-53.57	Average	-27	Pass
NVNT	n20	5745	Ant1	5650	-47.21	2.02	-	-45.19	Peak	-27	Pass
NVNT	n20	5745	Ant1	5650	-57.16	2.02	0.12	-55.02	Average	-27	Pass
NVNT	n20	5745	Ant1	5700	-45.31	2.02	-	-43.29	Peak	10	Pass
NVNT	n20	5745	Ant1	5700	-54.96	2.02	0.12	-52.82	Average	10	Pass
NVNT	n20	5745	Ant1	5720	-31.8	2.02	-	-29.78	Peak	15.6	Pass
NVNT	n20	5745	Ant1	5720	-46.56	2.02	0.12	-44.42	Average	15.6	Pass
NVNT	n20	5745	Ant1	5725	-24.59	2.02	-	-22.57	Peak	27	Pass
NVNT	n20	5745	Ant1	5725	-39.49	2.02	0.12	-37.35	Average	27	Pass
NVNT	n20	5825	Ant1	5850	-30.24	2.02	-	-28.22	Peak	27	Pass
NVNT	n20	5825	Ant1	5850	-44.15	2.02	0.12	-42.01	Average	27	Pass
NVNT	n20	5825	Ant1	5855	-35.93	2.02	-	-33.91	Peak	15.6	Pass
NVNT	n20	5825	Ant1	5855	-48.9	2.02	0.12	-46.76	Average	15.6	Pass
NVNT	n20	5825	Ant1	5875	-47.62	2.02	-	-45.60	Peak	10	Pass
NVNT	n20	5825	Ant1	5875	-54.63	2.02	0.12	-52.49	Average	10	Pass
NVNT	n20	5825	Ant1	5925	-47.21	2.02	-	-45.19	Peak	-27	Pass
NVNT	n20	5825	Ant1	5925	-55.49	2.02	0.12	-53.35	Average	-27	Pass
NVNT	n40	5755	Ant1	5650	-48.83	2.02	-	-46.81	Peak	-27	Pass
NVNT	n40	5755	Ant1	5650	-56.95	2.02	0.24	-54.69	Average	-27	Pass
NVNT	n40	5755	Ant1	5700	-46.81	2.02	-	-44.79	Peak	10	Pass
NVNT	n40	5755	Ant1	5700	-54.22	2.02	0.24	-51.96	Average	10	Pass
NVNT	n40	5755	Ant1	5720	-31.53	2.02	-	-29.51	Peak	15.6	Pass
NVNT	n40	5755	Ant1	5720	-44.62	2.02	0.24	-42.36	Average	15.6	Pass

NVNT	n40	5755	Ant1	5725	-28.88	2.02	-	-26.86	Peak	27	Pass
NVNT	n40	5755	Ant1	5725	-40.42	2.02	0.24	-38.16	Average	27	Pass
NVNT	n40	5795	Ant1	5850	-45.92	2.02	-	-43.90	Peak	27	Pass
NVNT	n40	5795	Ant1	5850	-55.05	2.02	0.24	-52.79	Average	27	Pass
NVNT	n40	5795	Ant1	5855	-46.9	2.02	-	-44.88	Peak	15.6	Pass
NVNT	n40	5795	Ant1	5855	-56.29	2.02	0.24	-54.03	Average	15.6	Pass
NVNT	n40	5795	Ant1	5875	-48.23	2.02	-	-46.21	Peak	10	Pass
NVNT	n40	5795	Ant1	5875	-57.08	2.02	0.24	-54.82	Average	10	Pass
NVNT	n40	5795	Ant1	5925	-49.66	2.02	-	-47.64	Peak	-27	Pass
NVNT	n40	5795	Ant1	5925	-57.36	2.02	0.24	-55.10	Average	-27	Pass
NVNT	ac20	5745	Ant1	5650	-49.9	2.02	-	-47.88	Peak	-27	Pass
NVNT	ac20	5745	Ant1	5650	-56.99	2.02	0.12	-54.85	Average	-27	Pass
NVNT	ac20	5745	Ant1	5700	-47.82	2.02	-	-45.80	Peak	10	Pass
NVNT	ac20	5745	Ant1	5700	-55.06	2.02	0.12	-52.92	Average	10	Pass
NVNT	ac20	5745	Ant1	5720	-29.86	2.02	-	-27.84	Peak	15.6	Pass
NVNT	ac20	5745	Ant1	5720	-44.5	2.02	0.12	-42.36	Average	15.6	Pass
NVNT	ac20	5745	Ant1	5725	-24.44	2.02	-	-22.42	Peak	27	Pass
NVNT	ac20	5745	Ant1	5725	-40.46	2.02	0.12	-38.32	Average	27	Pass
NVNT	ac20	5825	Ant1	5850	-29.46	2.02	-	-27.44	Peak	27	Pass
NVNT	ac20	5825	Ant1	5850	-48.76	2.02	0.12	-46.62	Average	27	Pass
NVNT	ac20	5825	Ant1	5855	-41.15	2.02	-	-39.13	Peak	15.6	Pass
NVNT	ac20	5825	Ant1	5855	-51.98	2.02	0.12	-49.84	Average	15.6	Pass
NVNT	ac20	5825	Ant1	5875	-46.59	2.02	-	-44.57	Peak	10	Pass
NVNT	ac20	5825	Ant1	5875	-55.57	2.02	0.12	-53.43	Average	10	Pass
NVNT	ac20	5825	Ant1	5925	-46.77	2.02	-	-44.75	Peak	-27	Pass
NVNT	ac20	5825	Ant1	5925	-55.76	2.02	0.12	-53.62	Average	-27	Pass
NVNT	ac40	5755	Ant1	5650	-49.39	2.02	-	-47.37	Peak	-27	Pass
NVNT	ac40	5755	Ant1	5650	-56.94	2.02	0.24	-54.68	Average	-27	Pass
NVNT	ac40	5755	Ant1	5700	-47.76	2.02	-	-45.74	Peak	10	Pass
NVNT	ac40	5755	Ant1	5700	-54.33	2.02	0.24	-52.07	Average	10	Pass
NVNT	ac40	5755	Ant1	5720	-32.4	2.02	-	-30.38	Peak	15.6	Pass
NVNT	ac40	5755	Ant1	5720	-44.5	2.02	0.24	-42.24	Average	15.6	Pass
NVNT	ac40	5755	Ant1	5725	-27.59	2.02	-	-25.57	Peak	27	Pass
NVNT	ac40	5755	Ant1	5725	-42.03	2.02	0.24	-39.77	Average	27	Pass
NVNT	ac40	5795	Ant1	5850	-46.4	2.02	-	-44.38	Peak	27	Pass
NVNT	ac40	5795	Ant1	5850	-55.43	2.02	0.24	-53.17	Average	27	Pass
NVNT	ac40	5795	Ant1	5855	-47.67	2.02	-	-45.65	Peak	15.6	Pass
NVNT	ac40	5795	Ant1	5855	-54.99	2.02	0.24	-52.73	Average	15.6	Pass
NVNT	ac40	5795	Ant1	5875	-49.52	2.02	-	-47.50	Peak	10	Pass
NVNT	ac40	5795	Ant1	5875	-57.44	2.02	0.24	-55.18	Average	10	Pass
NVNT	ac40	5795	Ant1	5925	-49.62	2.02	-	-47.60	Peak	-27	Pass
NVNT	ac40	5795	Ant1	5925	-56.59	2.02	0.24	-54.33	Average	-27	Pass
NVNT	ac80	5775	Ant1	5850	-38.99	2.02	-	-36.97	Peak	27	Pass


NVNT	ac80	5775	Ant1	5850	-49.28	2.02	0.47	-46.79	Average	27	Pass
NVNT	ac80	5775	Ant1	5855	-39.49	2.02	-	-37.47	Peak	15.6	Pass
NVNT	ac80	5775	Ant1	5855	-49.39	2.02	0.47	-46.90	Average	15.6	Pass
NVNT	ac80	5775	Ant1	5875	-45.12	2.02	-	-43.10	Peak	10	Pass
NVNT	ac80	5775	Ant1	5875	-53.64	2.02	0.47	-51.15	Average	10	Pass
NVNT	ac80	5775	Ant1	5925	-48.77	2.02	-	-46.75	Peak	-27	Pass
NVNT	ac80	5775	Ant1	5925	-57.02	2.02	0.47	-54.53	Average	-27	Pass
NVNT	ac80	5775	Ant1	5650	-46.97	2.02	-	-44.95	Peak	-27	Pass
NVNT	ac80	5775	Ant1	5650	-56.05	2.02	0.47	-53.56	Average	-27	Pass
NVNT	ac80	5775	Ant1	5700	-41.06	2.02	-	-39.04	Peak	10	Pass
NVNT	ac80	5775	Ant1	5700	-51.17	2.02	0.47	-48.68	Average	10	Pass
NVNT	ac80	5775	Ant1	5720	-30.6	2.02	-	-28.58	Peak	15.6	Pass
NVNT	ac80	5775	Ant1	5720	-47.09	2.02	0.47	-44.60	Average	15.6	Pass
NVNT	ac80	5775	Ant1	5725	-27.7	2.02	-	-25.68	Peak	27	Pass
NVNT	ac80	5775	Ant1	5725	-43.21	2.02	0.47	-40.72	Average	27	Pass
NVNT	ax20	5745	Ant1	5650	-48.96	2.02	-	-46.94	Peak	-27	Pass
NVNT	ax20	5745	Ant1	5650	-56.94	2.02	0.12	-54.80	Average	-27	Pass
NVNT	ax20	5745	Ant1	5700	-46.07	2.02	-	-44.05	Peak	10	Pass
NVNT	ax20	5745	Ant1	5700	-54.93	2.02	0.12	-52.79	Average	10	Pass
NVNT	ax20	5745	Ant1	5720	-31.86	2.02	-	-29.84	Peak	15.6	Pass
NVNT	ax20	5745	Ant1	5720	-46.32	2.02	0.12	-44.18	Average	15.6	Pass
NVNT	ax20	5745	Ant1	5725	-27.11	2.02	-	-25.09	Peak	27	Pass
NVNT	ax20	5745	Ant1	5725	-41.34	2.02	0.12	-39.20	Average	27	Pass
NVNT	ax20	5825	Ant1	5850	-34	2.02	-	-31.98	Peak	27	Pass
NVNT	ax20	5825	Ant1	5850	-47.17	2.02	0.12	-45.03	Average	27	Pass
NVNT	ax20	5825	Ant1	5855	-40.72	2.02	-	-38.70	Peak	15.6	Pass
NVNT	ax20	5825	Ant1	5855	-51.88	2.02	0.12	-49.74	Average	15.6	Pass
NVNT	ax20	5825	Ant1	5875	-47.65	2.02	-	-45.63	Peak	10	Pass
NVNT	ax20	5825	Ant1	5875	-55.57	2.02	0.12	-53.43	Average	10	Pass
NVNT	ax20	5825	Ant1	5925	-47.92	2.02	-	-45.90	Peak	-27	Pass
NVNT	ax20	5825	Ant1	5925	-55.41	2.02	0.12	-53.27	Average	-27	Pass
NVNT	ax40	5755	Ant1	5650	-48.69	2.02	-	-46.67	Peak	-27	Pass
NVNT	ax40	5755	Ant1	5650	-56.85	2.02	0.24	-54.59	Average	-27	Pass
NVNT	ax40	5755	Ant1	5700	-47.3	2.02	-	-45.28	Peak	10	Pass
NVNT	ax40	5755	Ant1	5700	-54.58	2.02	0.24	-52.32	Average	10	Pass
NVNT	ax40	5755	Ant1	5720	-31.07	2.02	-	-29.05	Peak	15.6	Pass
NVNT	ax40	5755	Ant1	5720	-45.49	2.02	0.24	-43.23	Average	15.6	Pass
NVNT	ax40	5755	Ant1	5725	-27.76	2.02	-	-25.74	Peak	27	Pass
NVNT	ax40	5755	Ant1	5725	-42.8	2.02	0.24	-40.54	Average	27	Pass
NVNT	ax40	5795	Ant1	5850	-47.98	2.02	-	-45.96	Peak	27	Pass
NVNT	ax40	5795	Ant1	5850	-55.27	2.02	0.24	-53.01	Average	27	Pass
NVNT	ax40	5795	Ant1	5855	-46.8	2.02	-	-44.78	Peak	15.6	Pass
NVNT	ax40	5795	Ant1	5855	-55.53	2.02	0.24	-53.27	Average	15.6	Pass

NVNT	ax40	5795	Ant1	5875	-48.96	2.02	-	-46.94	Peak	10	Pass
NVNT	ax40	5795	Ant1	5875	-57.09	2.02	0.24	-54.83	Average	10	Pass
NVNT	ax40	5795	Ant1	5925	-48.36	2.02	-	-46.34	Peak	-27	Pass
NVNT	ax40	5795	Ant1	5925	-56.62	2.02	0.24	-54.36	Average	-27	Pass
NVNT	ax80	5775	Ant1	5850	-38.88	2.02	-	-36.86	Peak	27	Pass
NVNT	ax80	5775	Ant1	5850	-49.72	2.02	0.47	-47.23	Average	27	Pass
NVNT	ax80	5775	Ant1	5855	-38.65	2.02	-	-36.63	Peak	15.6	Pass
NVNT	ax80	5775	Ant1	5855	-50.09	2.02	0.47	-47.60	Average	15.6	Pass
NVNT	ax80	5775	Ant1	5875	-40.08	2.02	-	-38.06	Peak	10	Pass
NVNT	ax80	5775	Ant1	5875	-53.53	2.02	0.47	-51.04	Average	10	Pass
NVNT	ax80	5775	Ant1	5925	-48.92	2.02	-	-46.90	Peak	-27	Pass
NVNT	ax80	5775	Ant1	5925	-56.43	2.02	0.47	-53.94	Average	-27	Pass
NVNT	ax80	5775	Ant1	5650	-46.63	2.02	-	-44.61	Peak	-27	Pass
NVNT	ax80	5775	Ant1	5650	-55.71	2.02	0.47	-53.22	Average	-27	Pass
NVNT	ax80	5775	Ant1	5700	-40.12	2.02	-	-38.10	Peak	10	Pass
NVNT	ax80	5775	Ant1	5700	-50.81	2.02	0.47	-48.32	Average	10	Pass
NVNT	ax80	5775	Ant1	5720	-37.29	2.02	-	-35.27	Peak	15.6	Pass
NVNT	ax80	5775	Ant1	5720	-45.74	2.02	0.47	-43.25	Average	15.6	Pass
NVNT	ax80	5775	Ant1	5725	-32.17	2.02	-	-30.15	Peak	27	Pass
NVNT	ax80	5775	Ant1	5725	-44.7	2.02	0.47	-42.21	Average	27	Pass

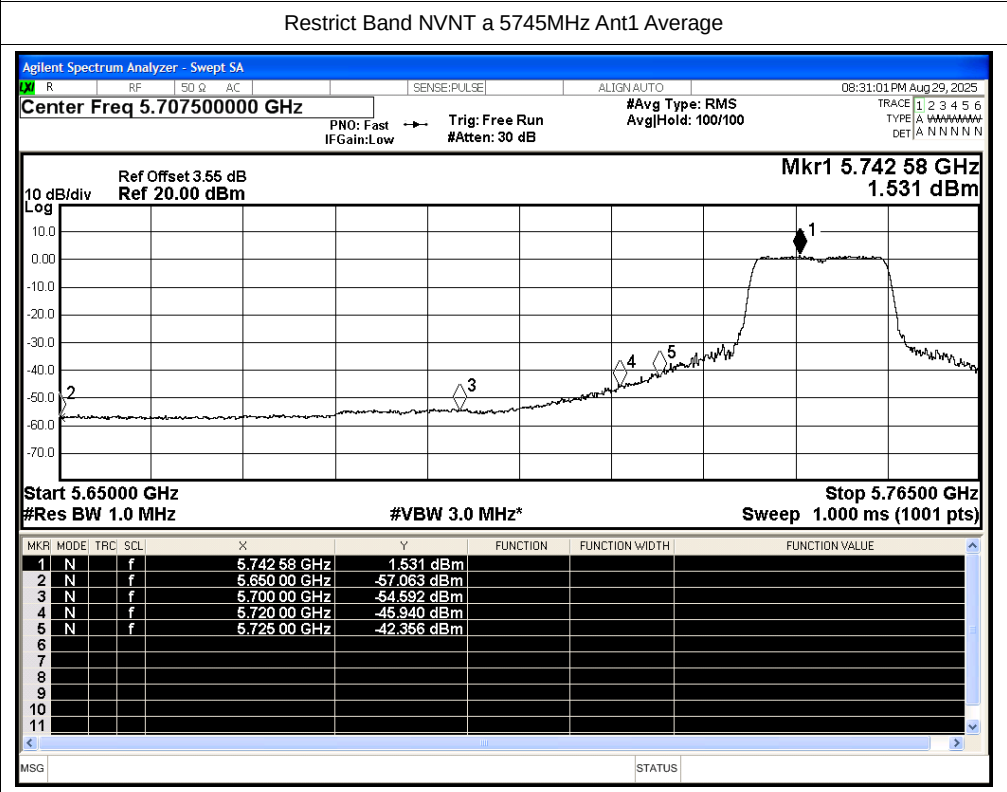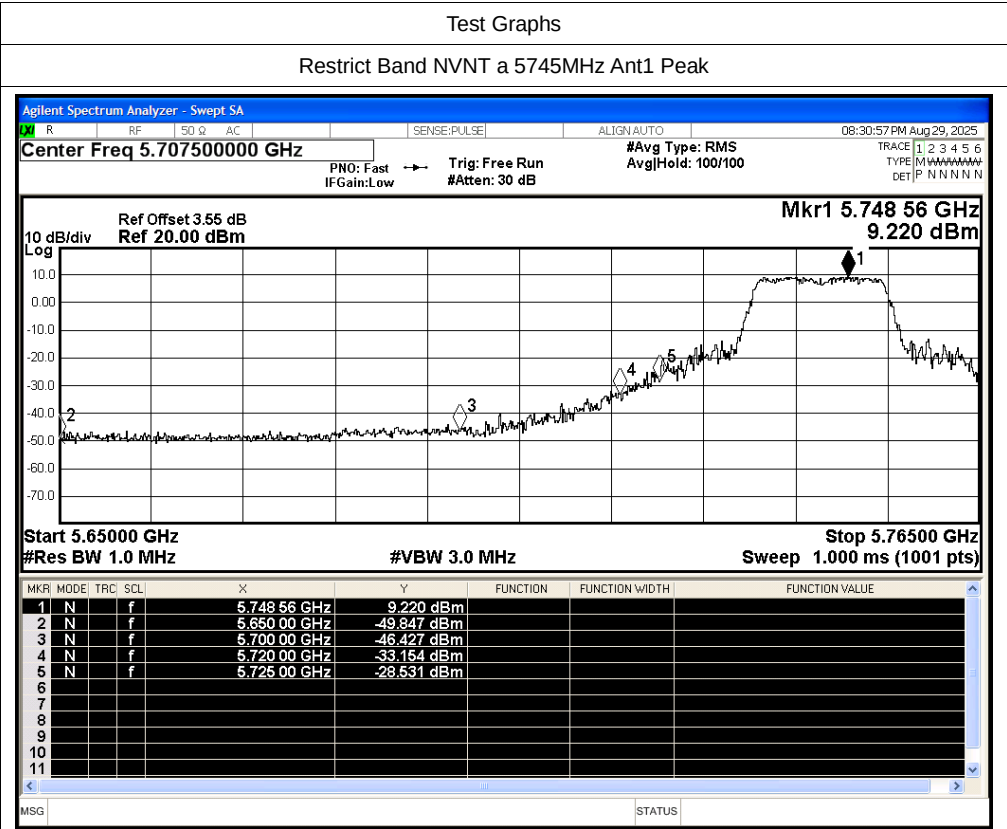


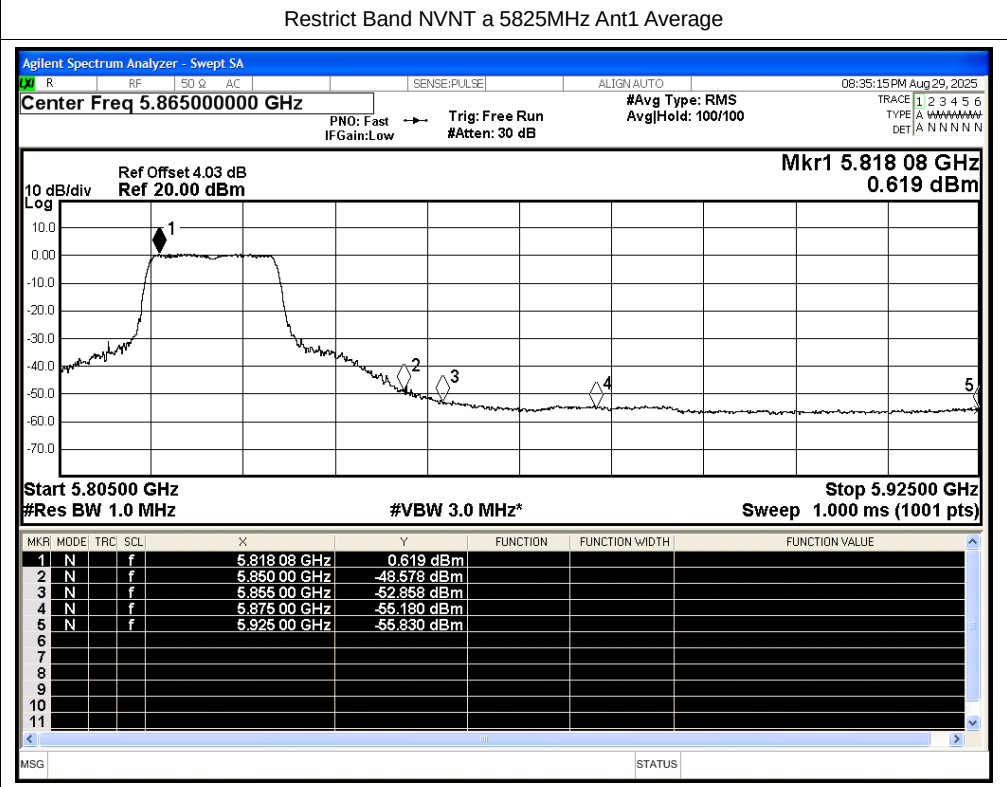
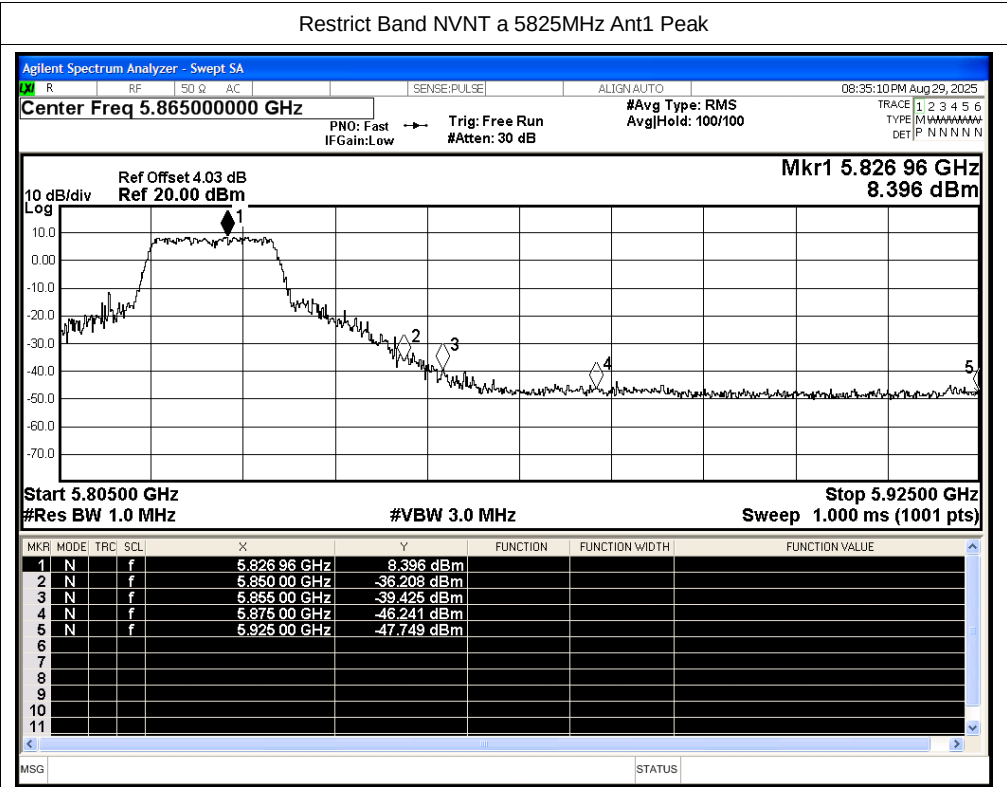




Restrict Band NVNT n20 5745MHz Ant1 Peak

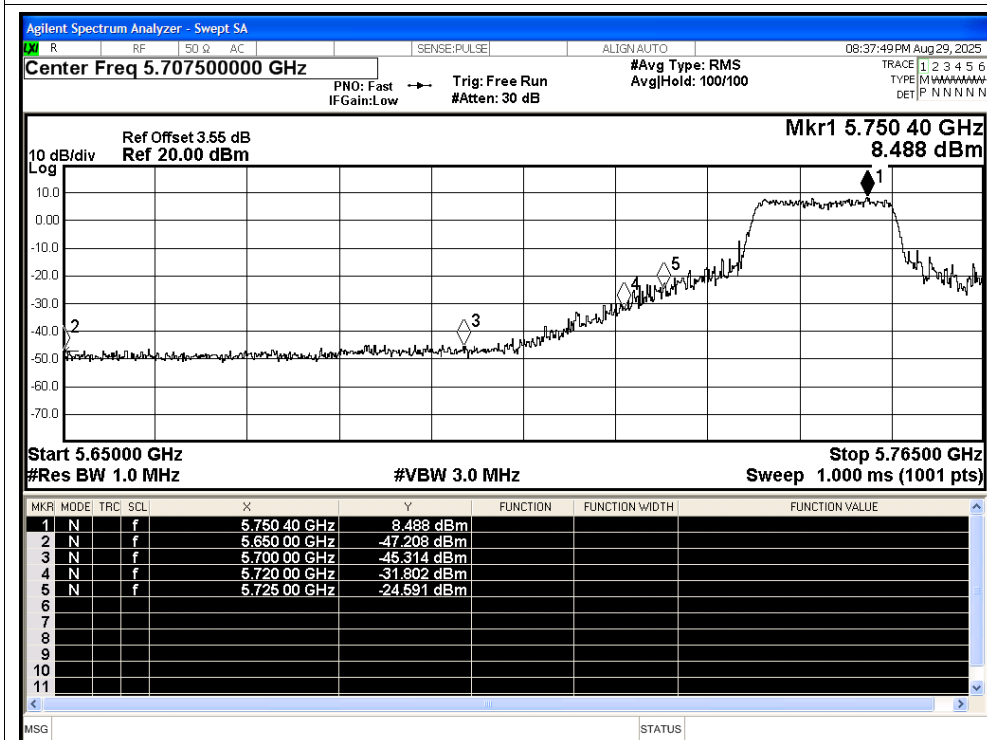


Restrict Band NVNT n20 5745MHz Ant1 Average

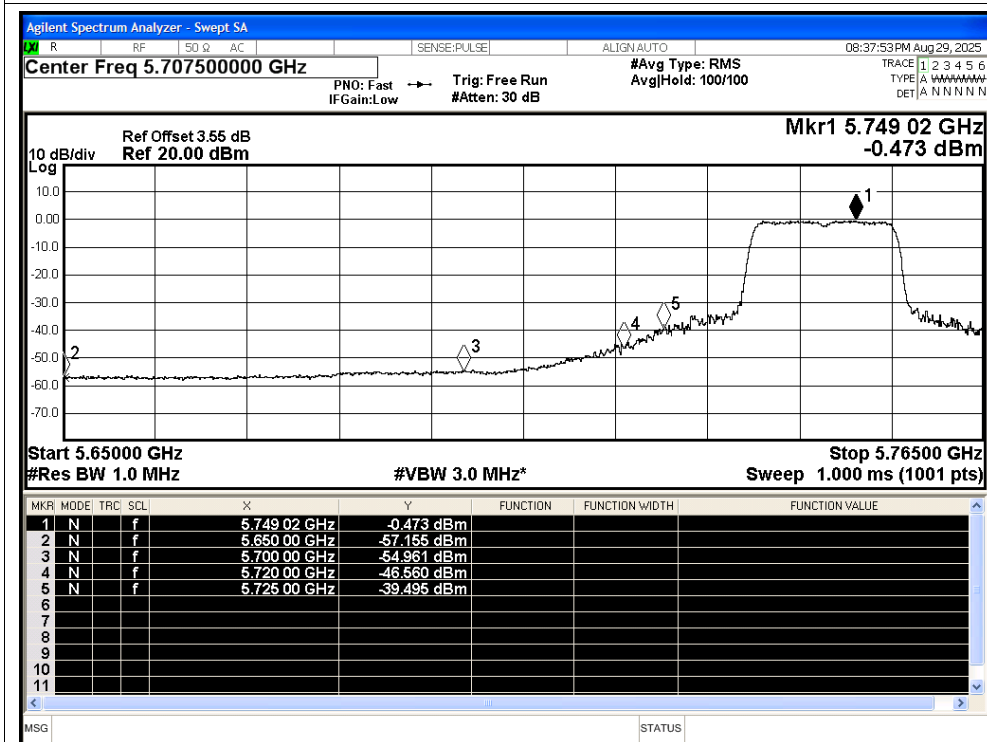

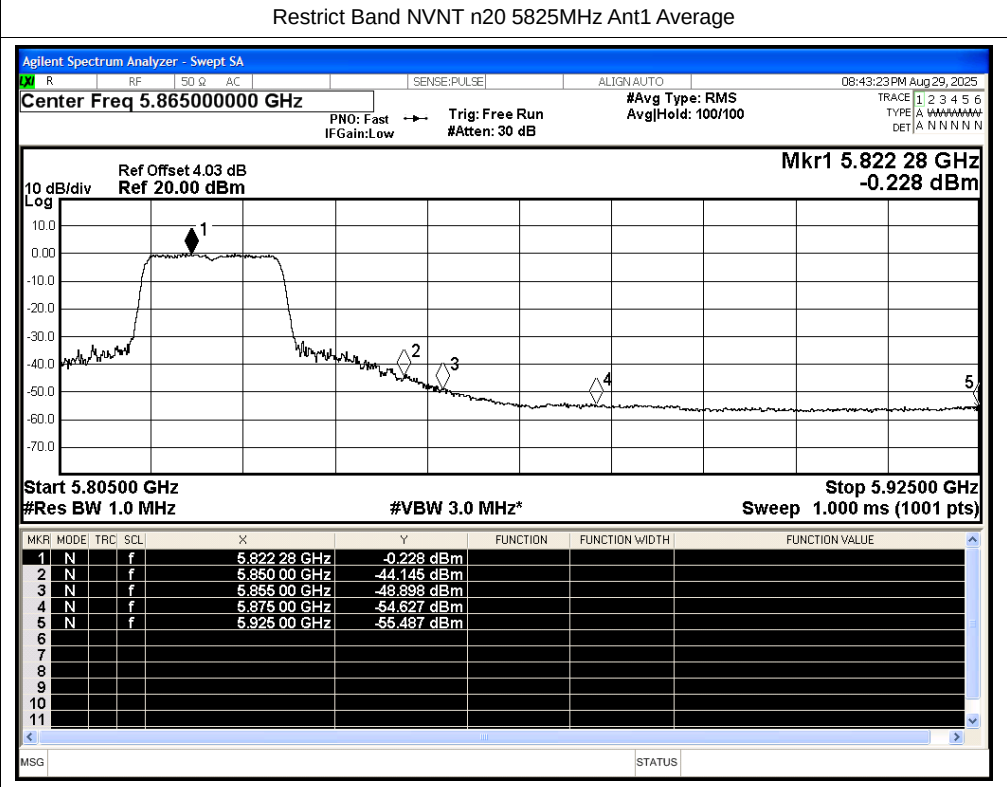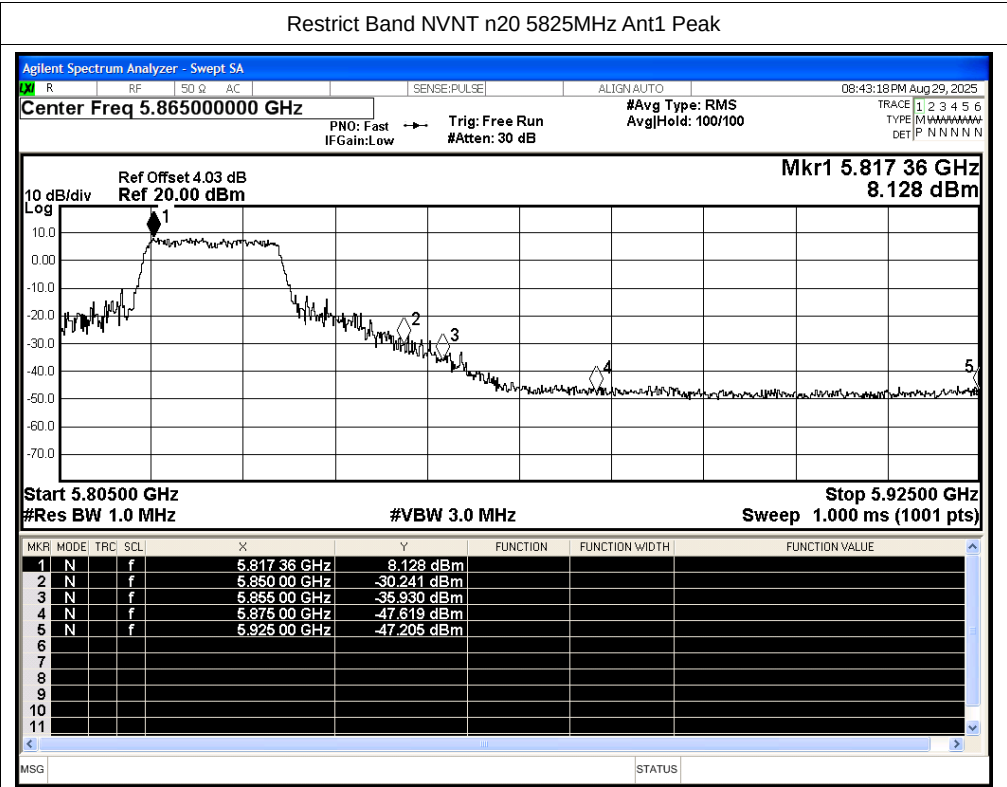


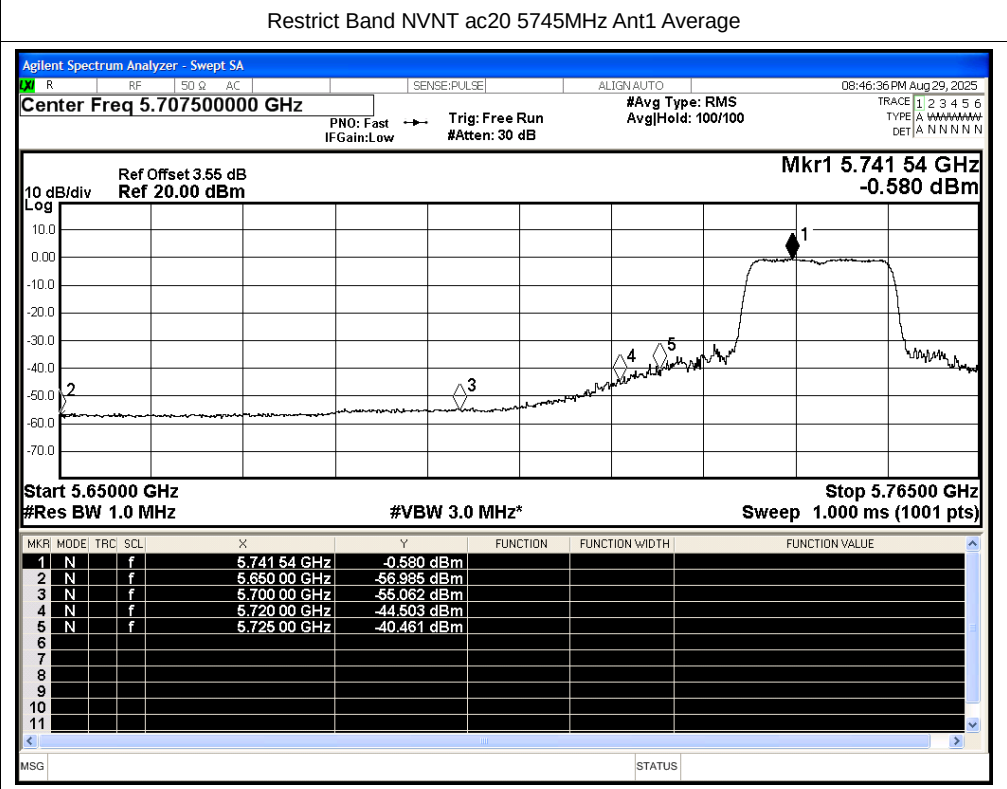
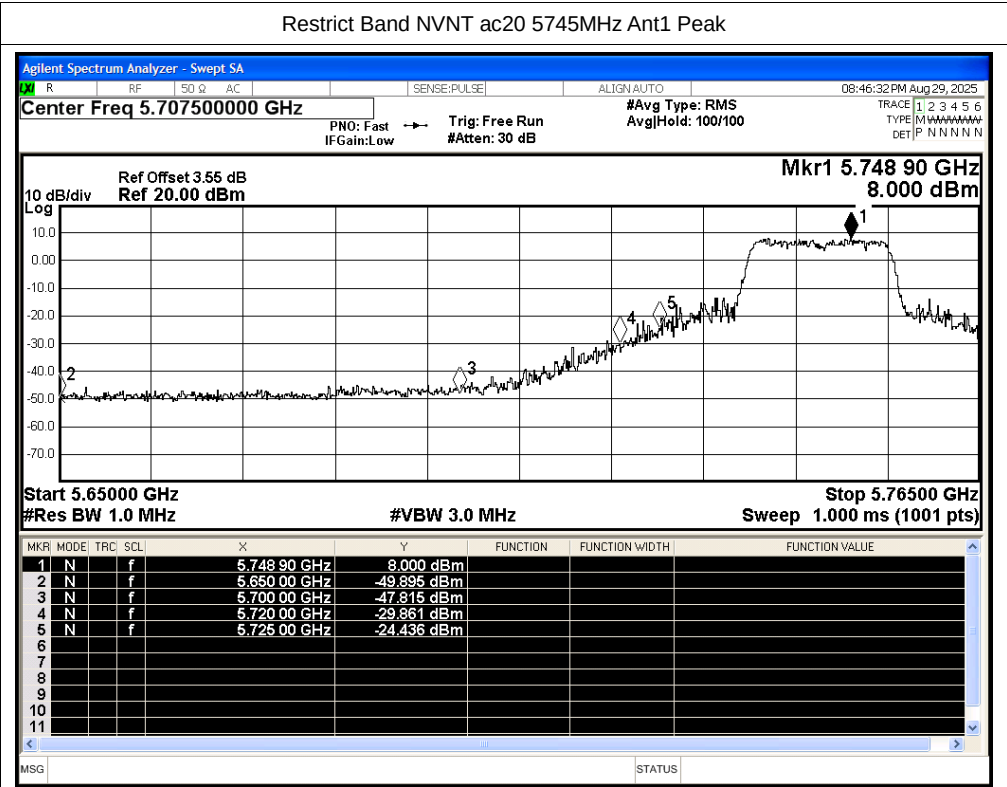


Restrict Band NVNT ac20 5825MHz Ant1 Peak

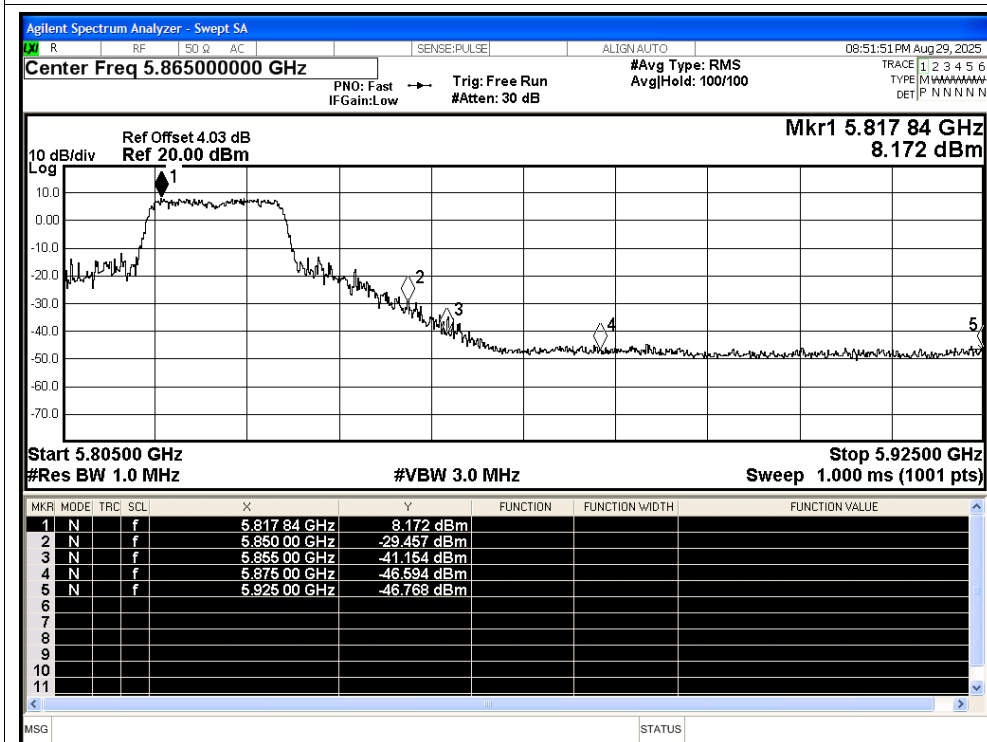


Restrict Band NVNT ac20 5825MHz Ant1 Average

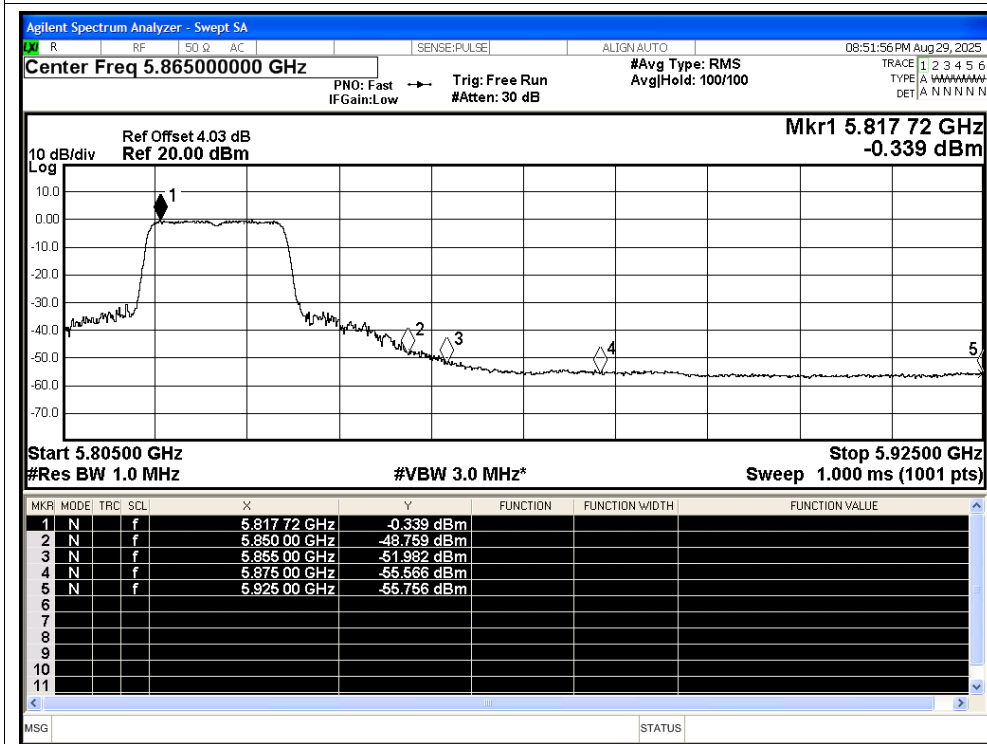


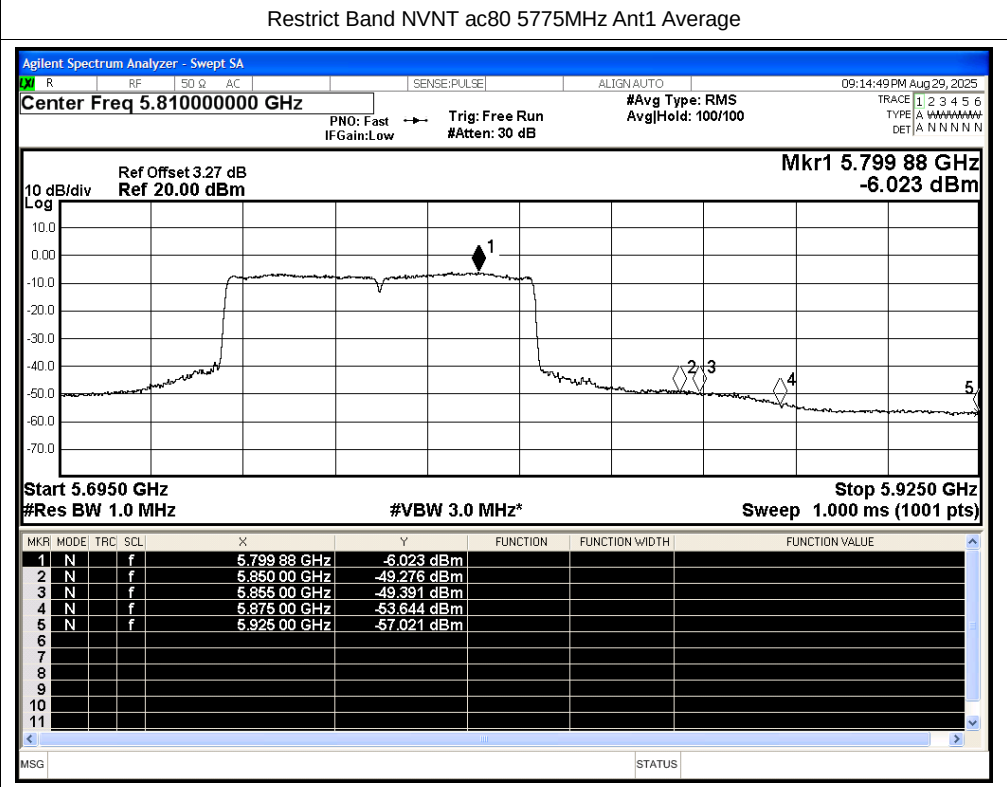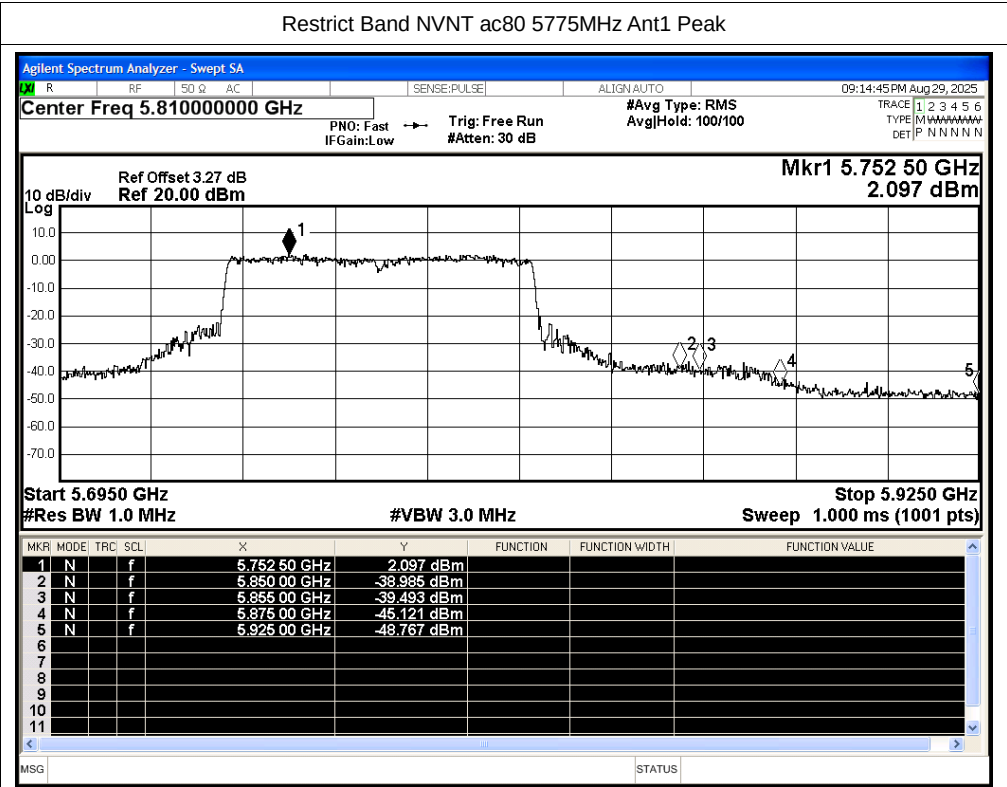

Restrict Band NVNT ac80 5775MHz Ant1 Peak

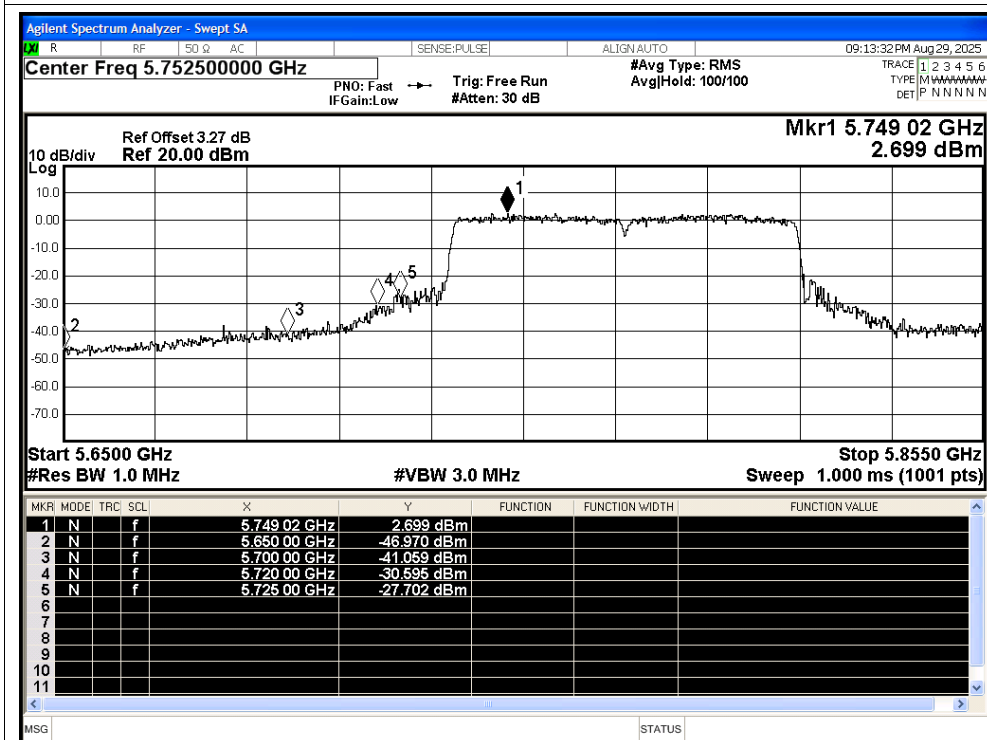




Restrict Band NVNT ac80 5775MHz Ant1 Average

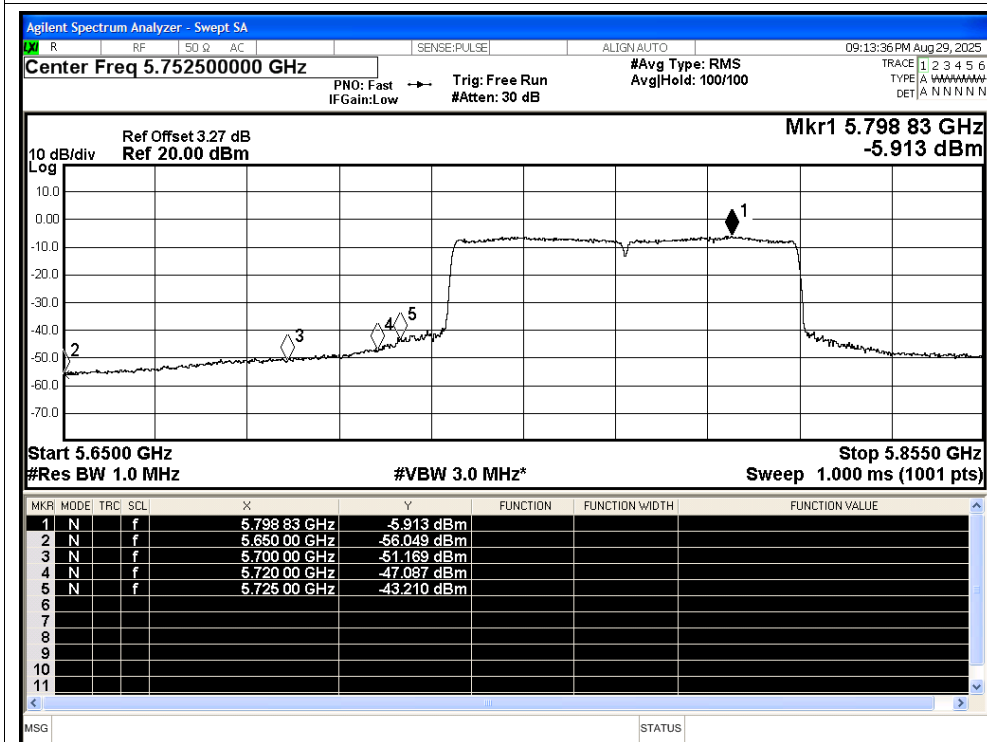


E.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5745	Ant1	5745	0	0	25	Pass
NVNT	a	5785	Ant1	5785	0	0	25	Pass
NVNT	a	5825	Ant1	5824.98	-20000	-3.43	25	Pass
NVNT	n20	5745	Ant1	5744.98	-20000	-3.48	25	Pass
NVNT	n20	5785	Ant1	5784.98	-20000	-3.46	25	Pass
NVNT	n20	5825	Ant1	5824.96	-40000	-6.87	25	Pass
NVNT	n40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
NVNT	n40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
NVNT	ac20	5745	Ant1	5744.98	-20000	-3.48	25	Pass
NVNT	ac20	5785	Ant1	5784.98	-20000	-3.46	25	Pass
NVNT	ac20	5825	Ant1	5824.98	-20000	-3.43	25	Pass
NVNT	ac40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
NVNT	ac40	5795	Ant1	5795	0	0	25	Pass
NVNT	ac80	5775	Ant1	5775	0	0	25	Pass
NVNT	ax20	5745	Ant1	5744.96	-40000	-6.96	25	Pass
NVNT	ax20	5785	Ant1	5784.98	-20000	-3.46	25	Pass
NVNT	ax20	5825	Ant1	5824.98	-20000	-3.43	25	Pass
NVNT	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
NVNT	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
NVNT	ax80	5775	Ant1	5775	0	0	25	Pass

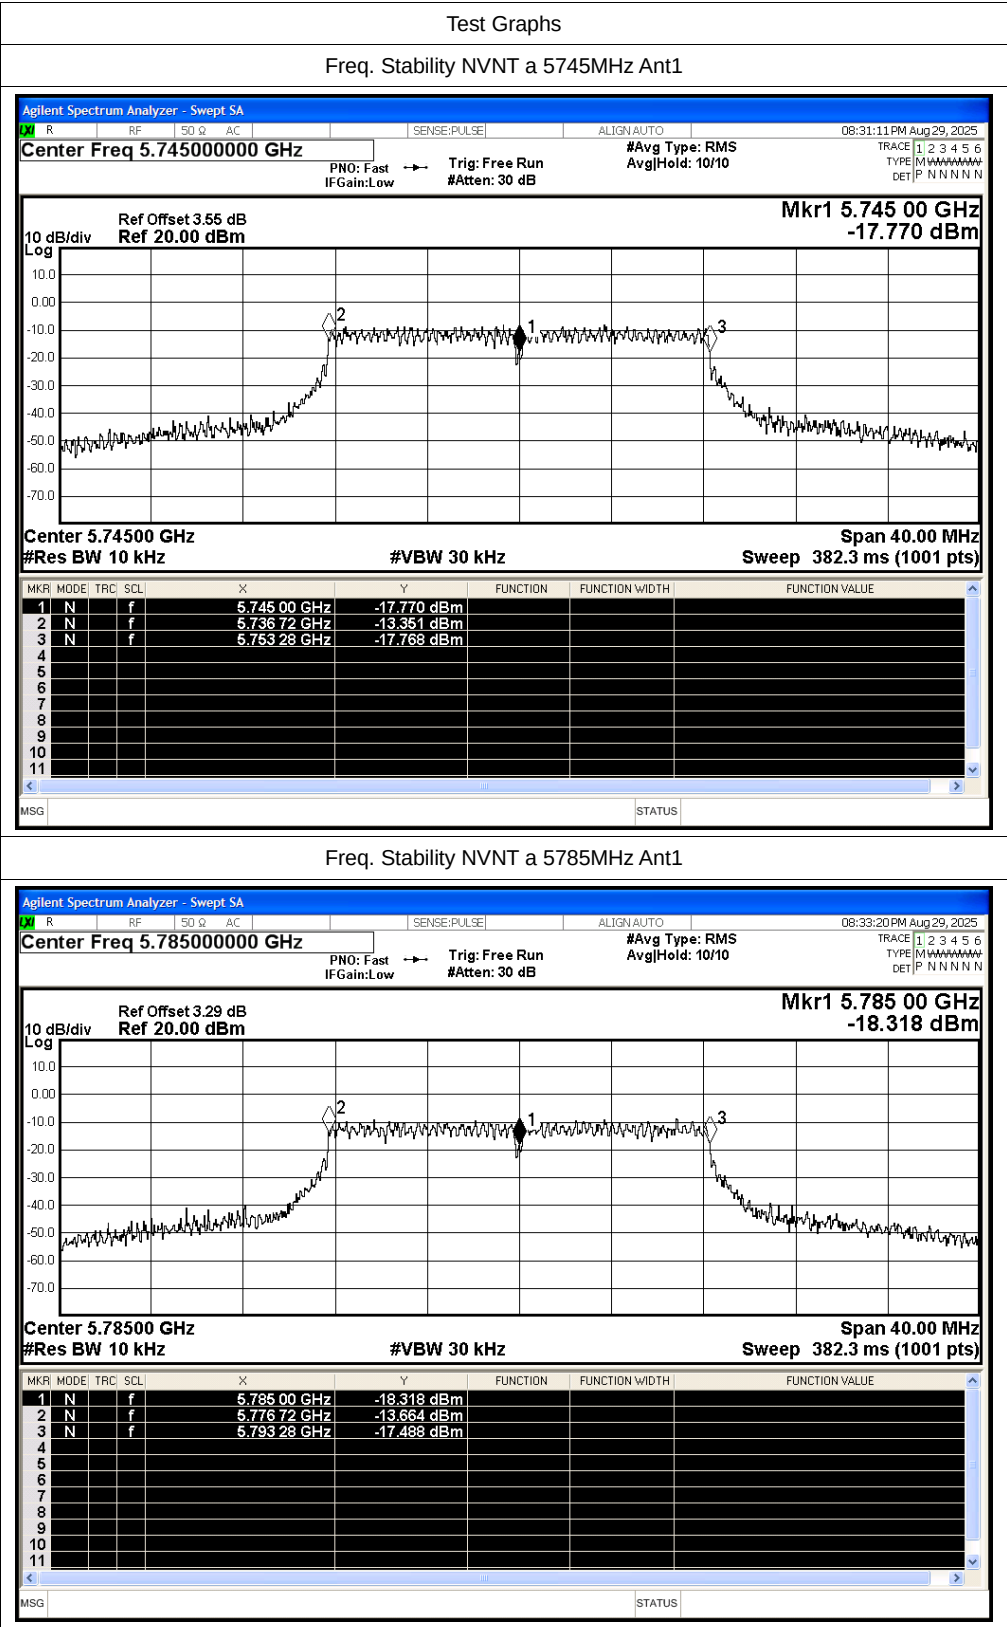


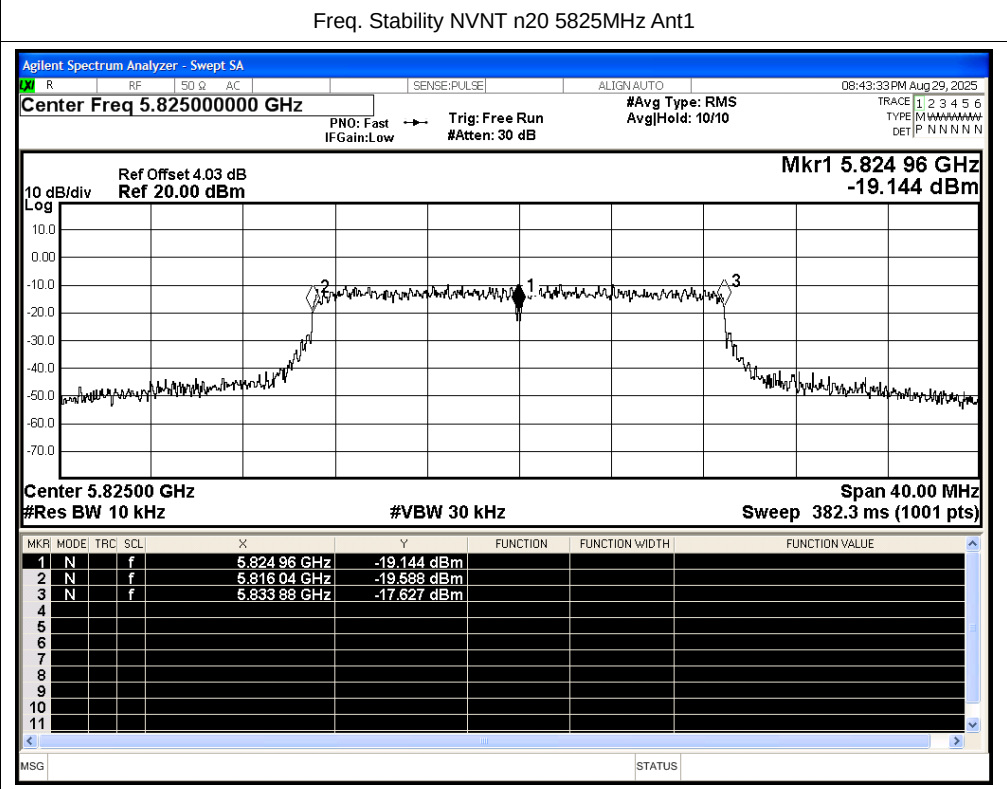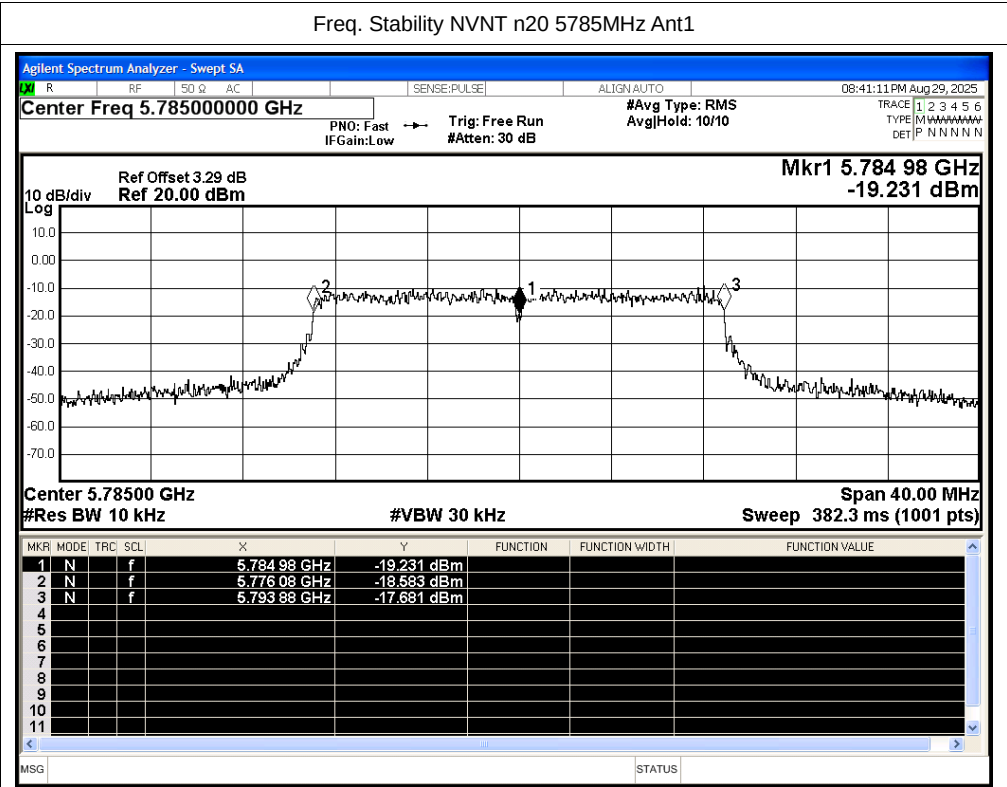


Freq. Stability NVNT n40 5755MHz Ant1

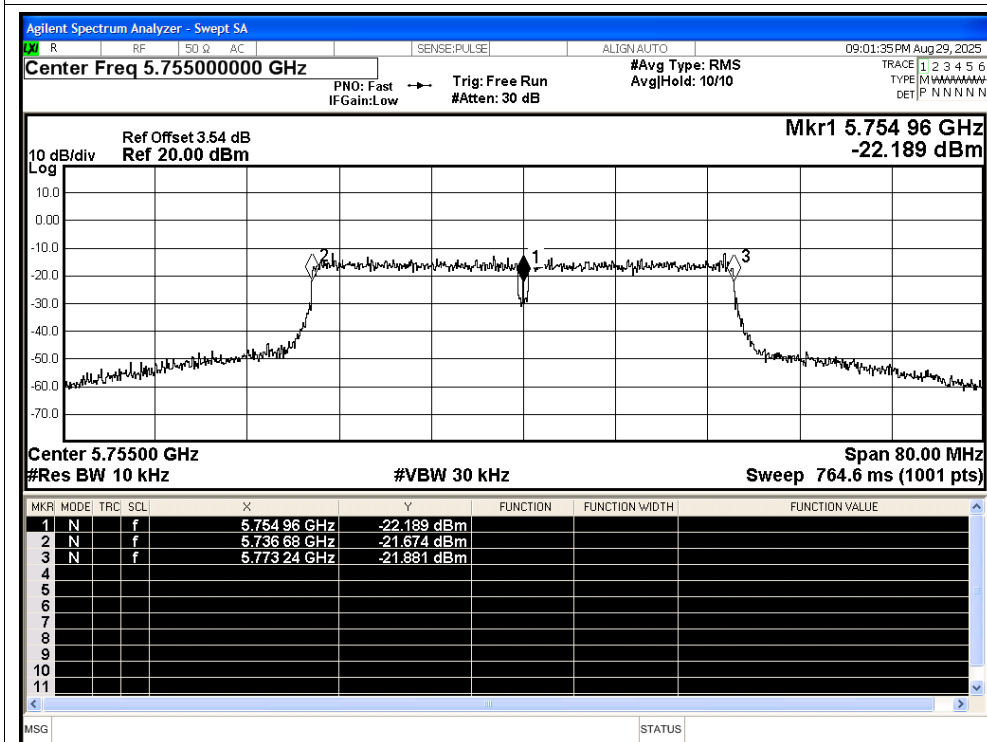


Freq. Stability NVNT n40 5795MHz Ant1


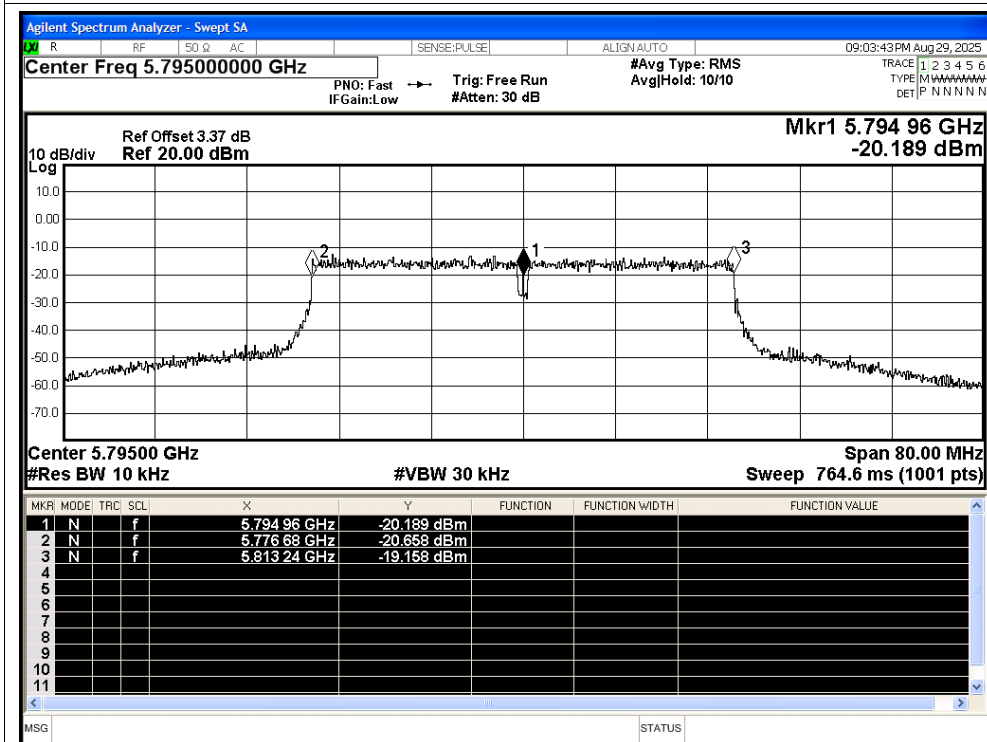




Freq. Stability NVNT ac20 5745MHz Ant1


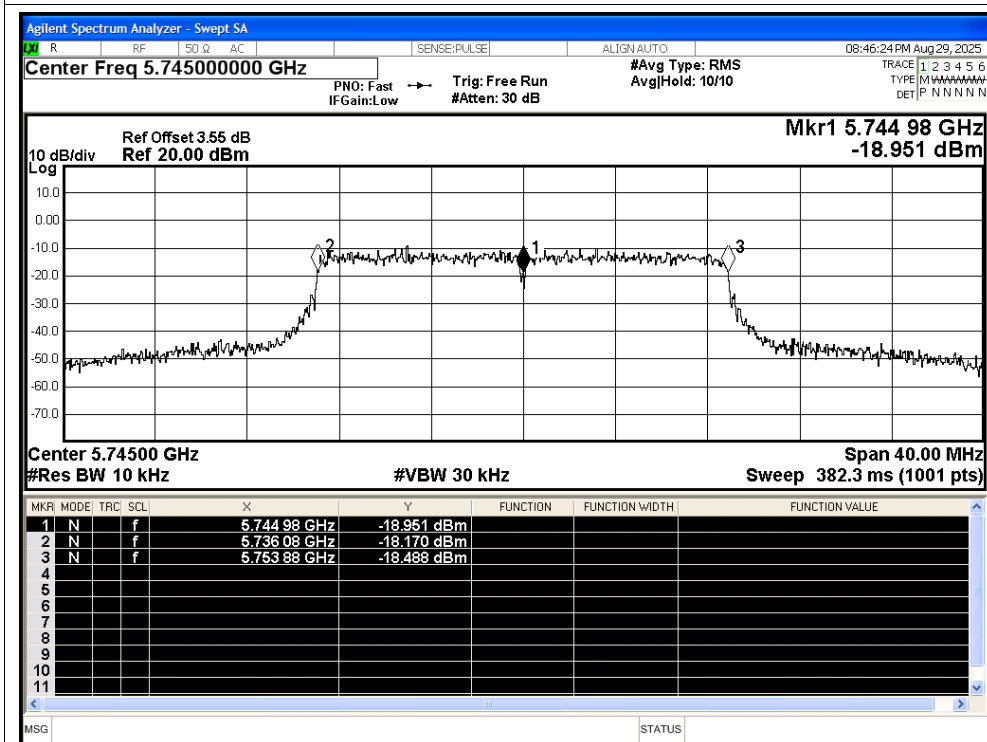




Freq. Stability NVNT ac20 5785MHz Ant1


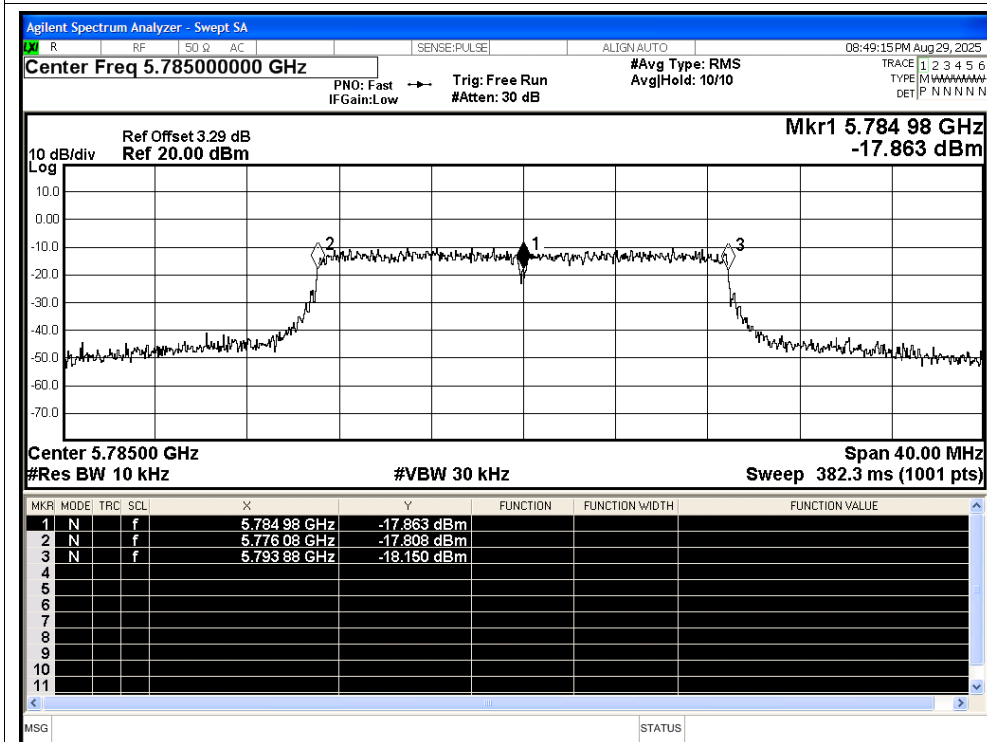


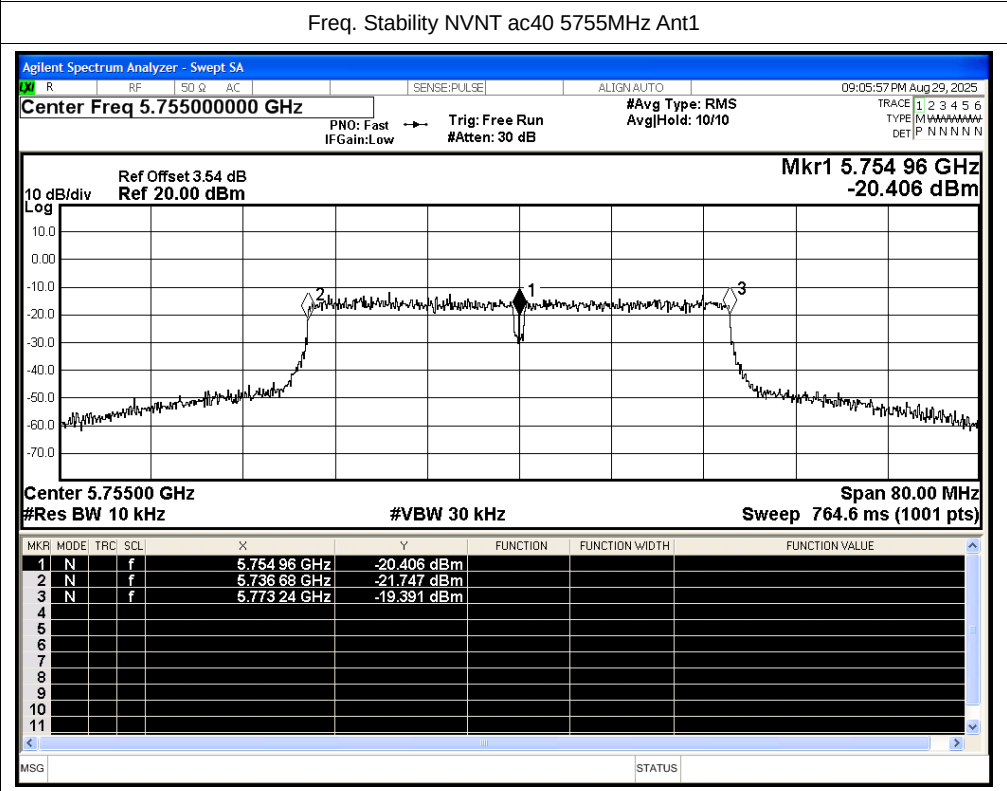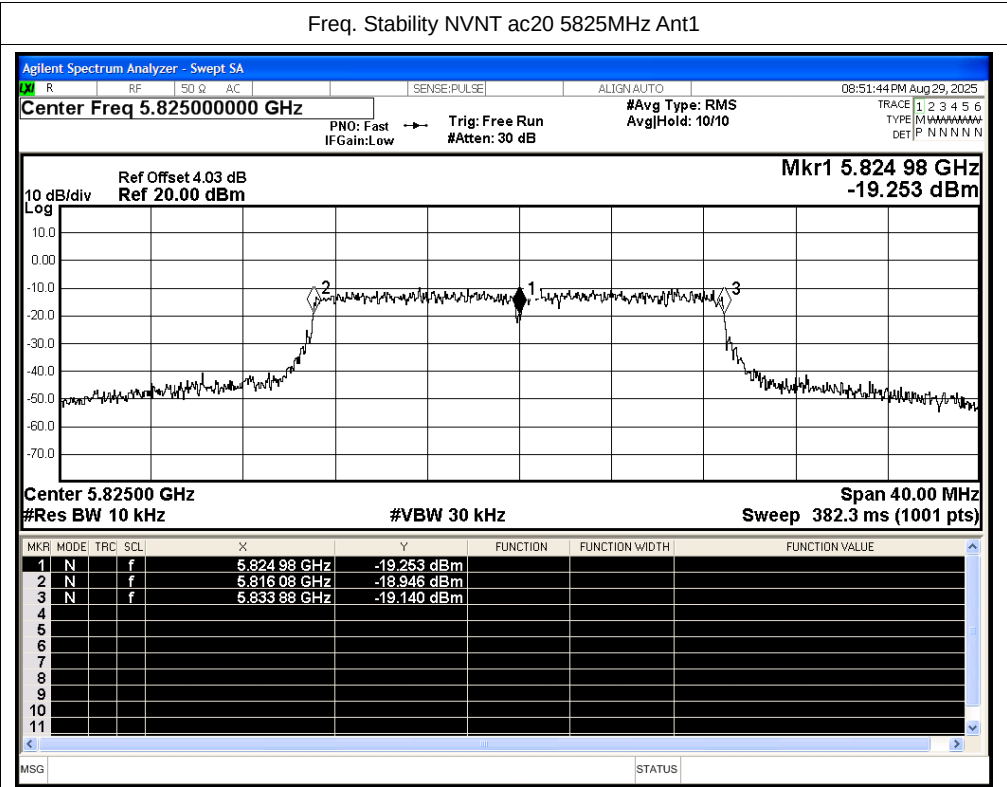

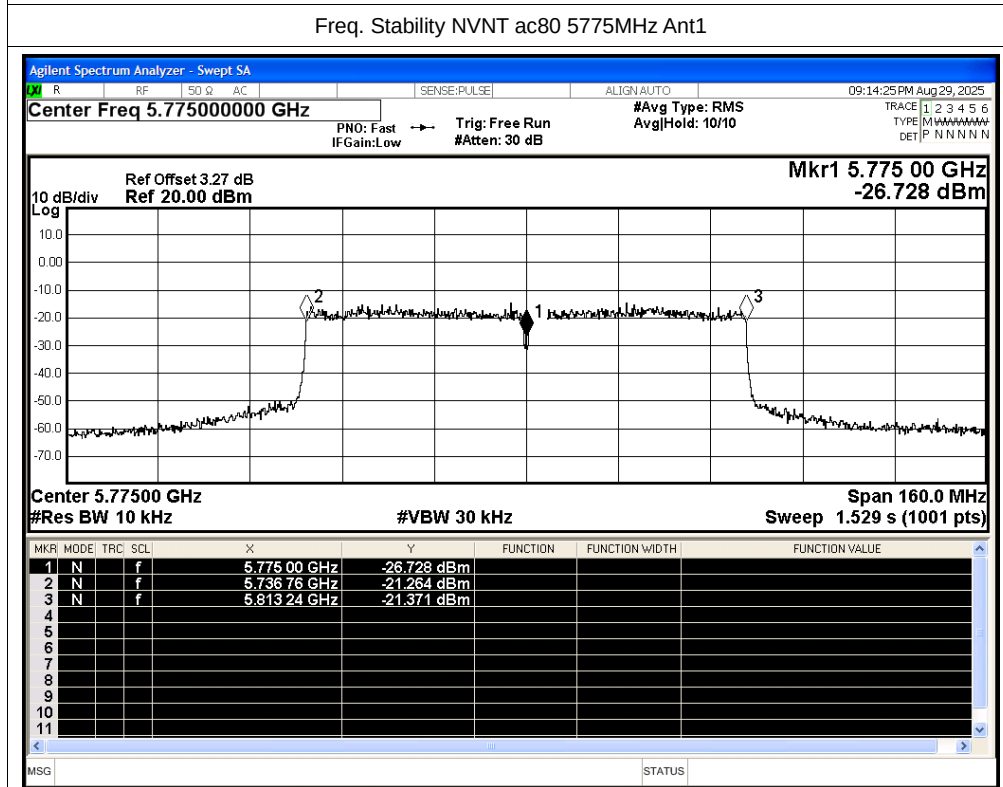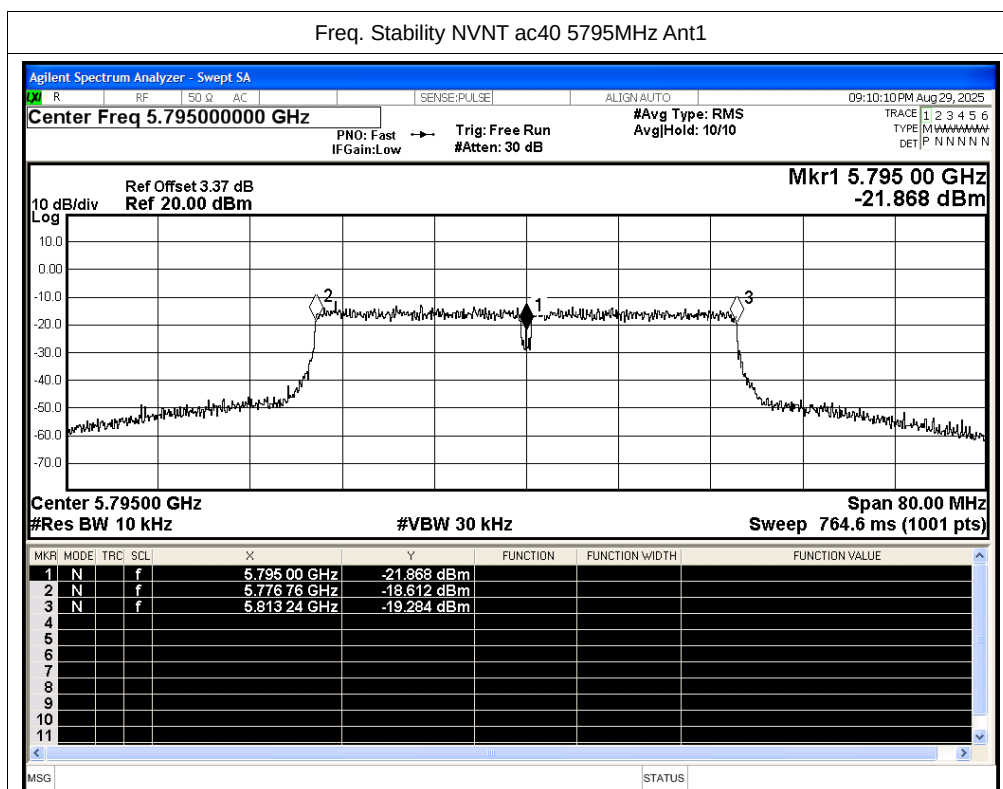

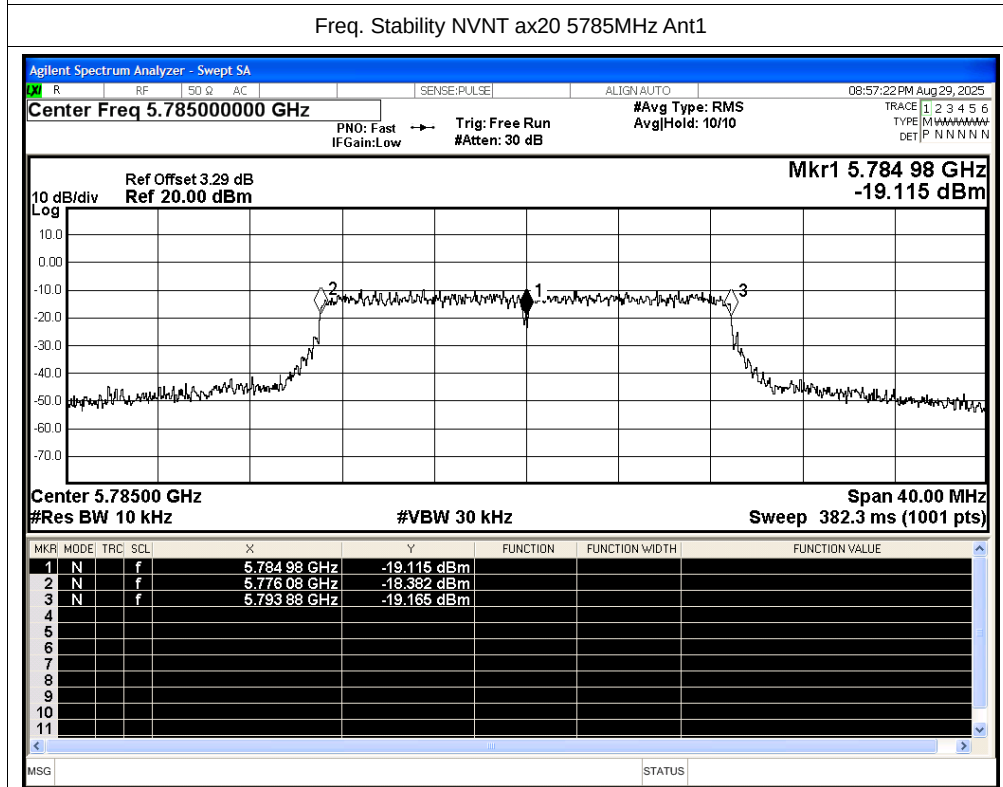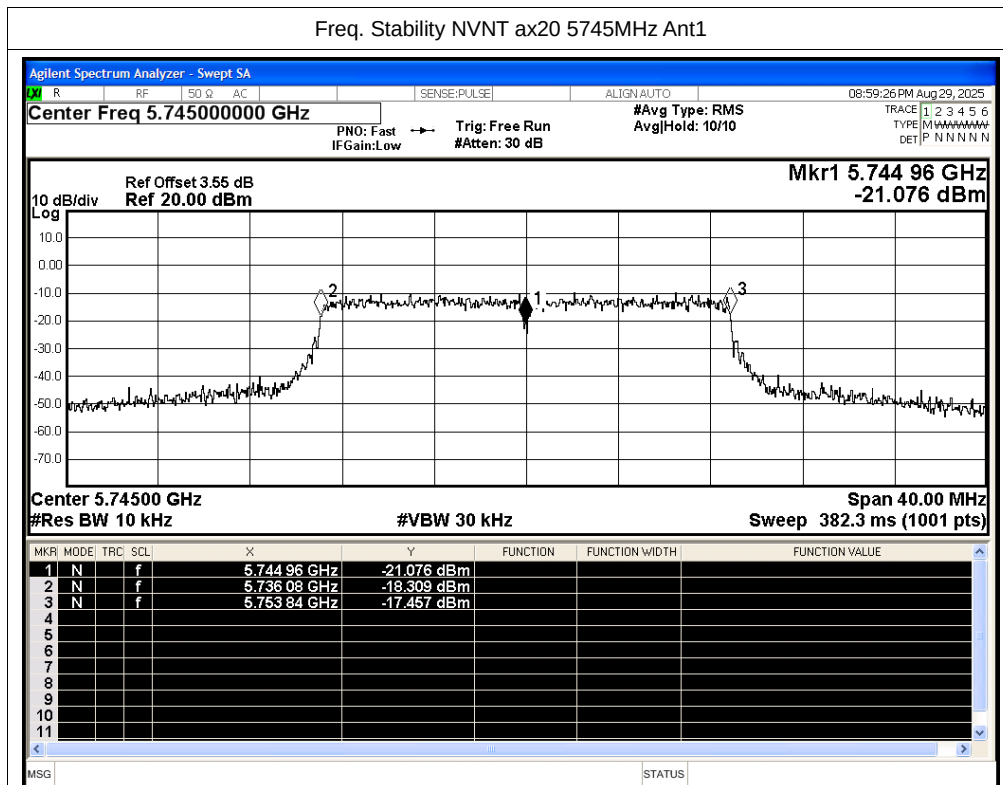


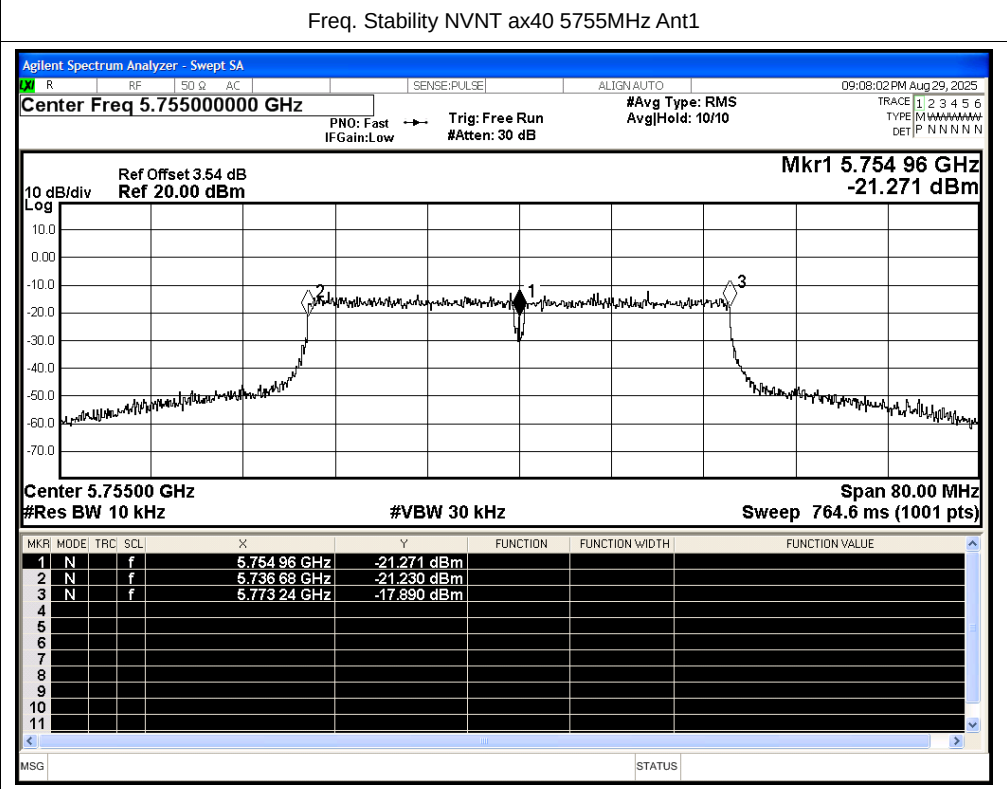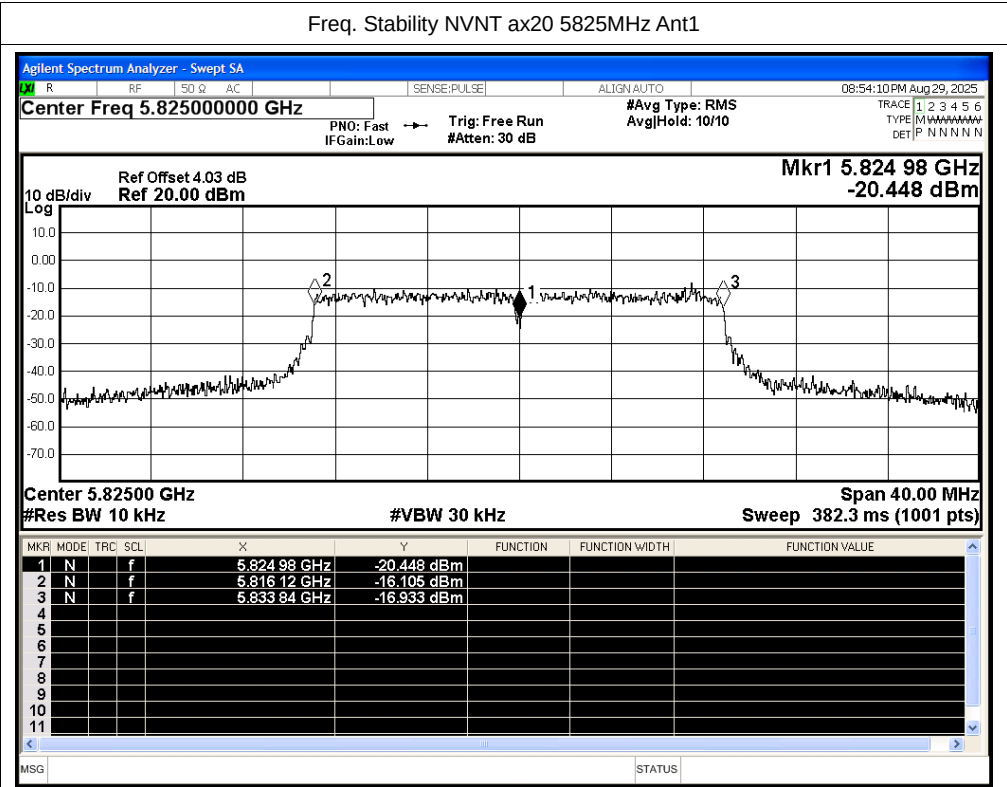


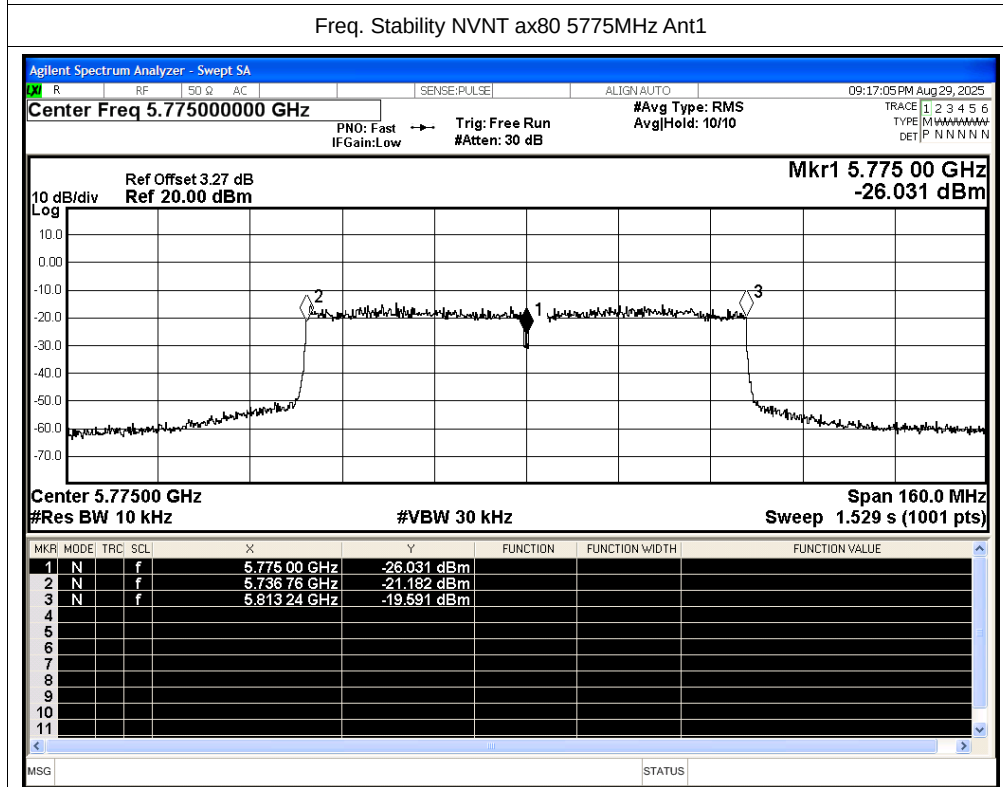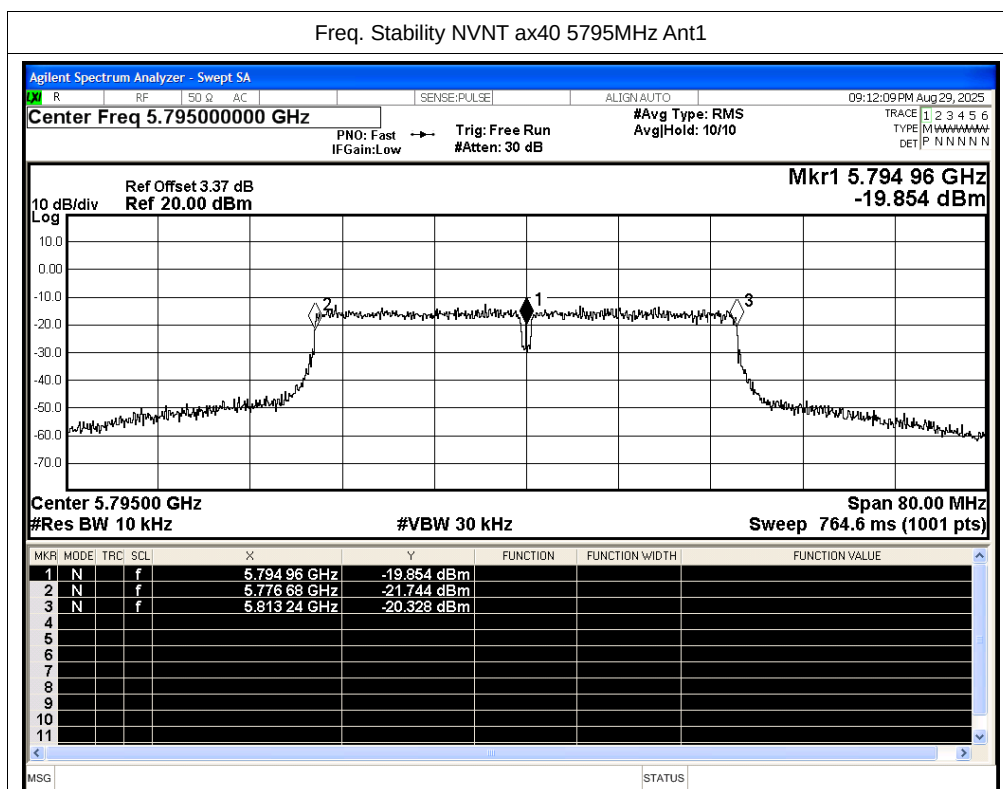




E.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	94.56	0.24	0.91
NVNT	a	5785	Ant1	94.56	0.24	0.91
NVNT	a	5825	Ant1	94.56	0.24	0.91
NVNT	n20	5745	Ant1	97.29	0.12	0.44
NVNT	n20	5785	Ant1	97.29	0.12	0.44
NVNT	n20	5825	Ant1	97.29	0.12	0.44
NVNT	n40	5755	Ant1	94.71	0.24	0.9
NVNT	n40	5795	Ant1	94.71	0.24	0.9
NVNT	ac20	5745	Ant1	97.3	0.12	0.44
NVNT	ac20	5785	Ant1	97.3	0.12	0.44
NVNT	ac20	5825	Ant1	97.34	0.12	0.44
NVNT	ac40	5755	Ant1	94.72	0.24	0.9
NVNT	ac40	5795	Ant1	94.72	0.24	0.9
NVNT	ac80	5775	Ant1	89.65	0.47	1.86
NVNT	ax20	5745	Ant1	97.3	0.12	0.44
NVNT	ax20	5785	Ant1	97.34	0.12	0.44
NVNT	ax20	5825	Ant1	97.34	0.12	0.44
NVNT	ax40	5755	Ant1	94.72	0.24	0.9
NVNT	ax40	5795	Ant1	94.72	0.24	0.9
NVNT	ax80	5775	Ant1	89.82	0.47	1.86

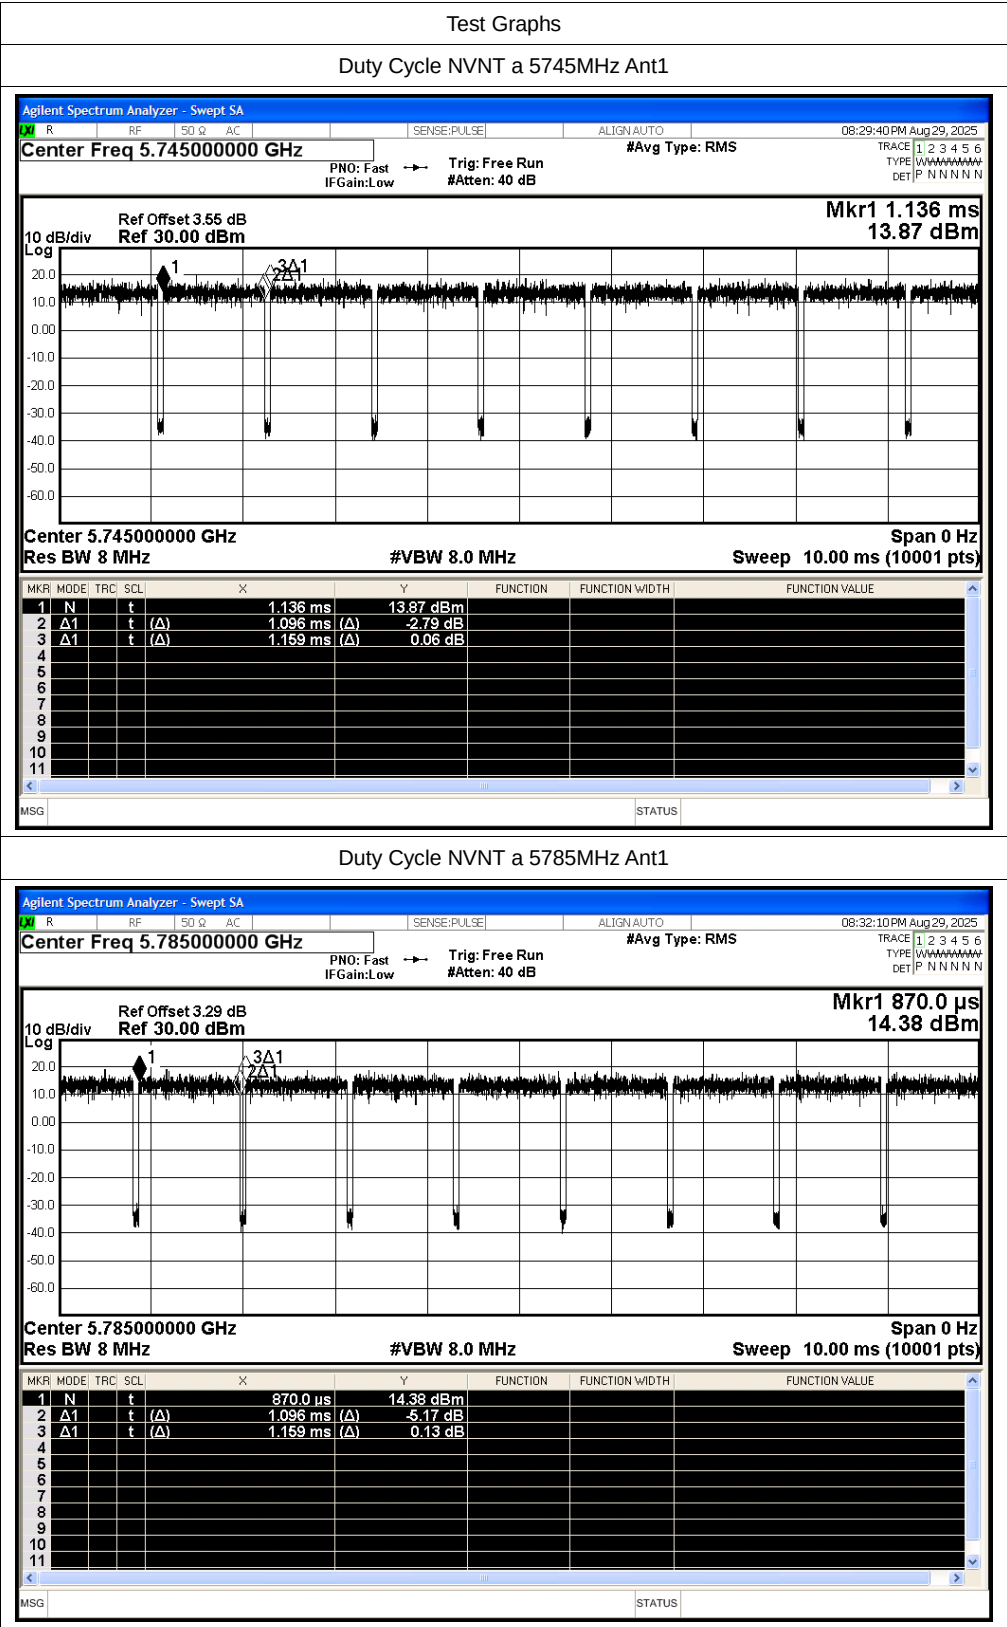


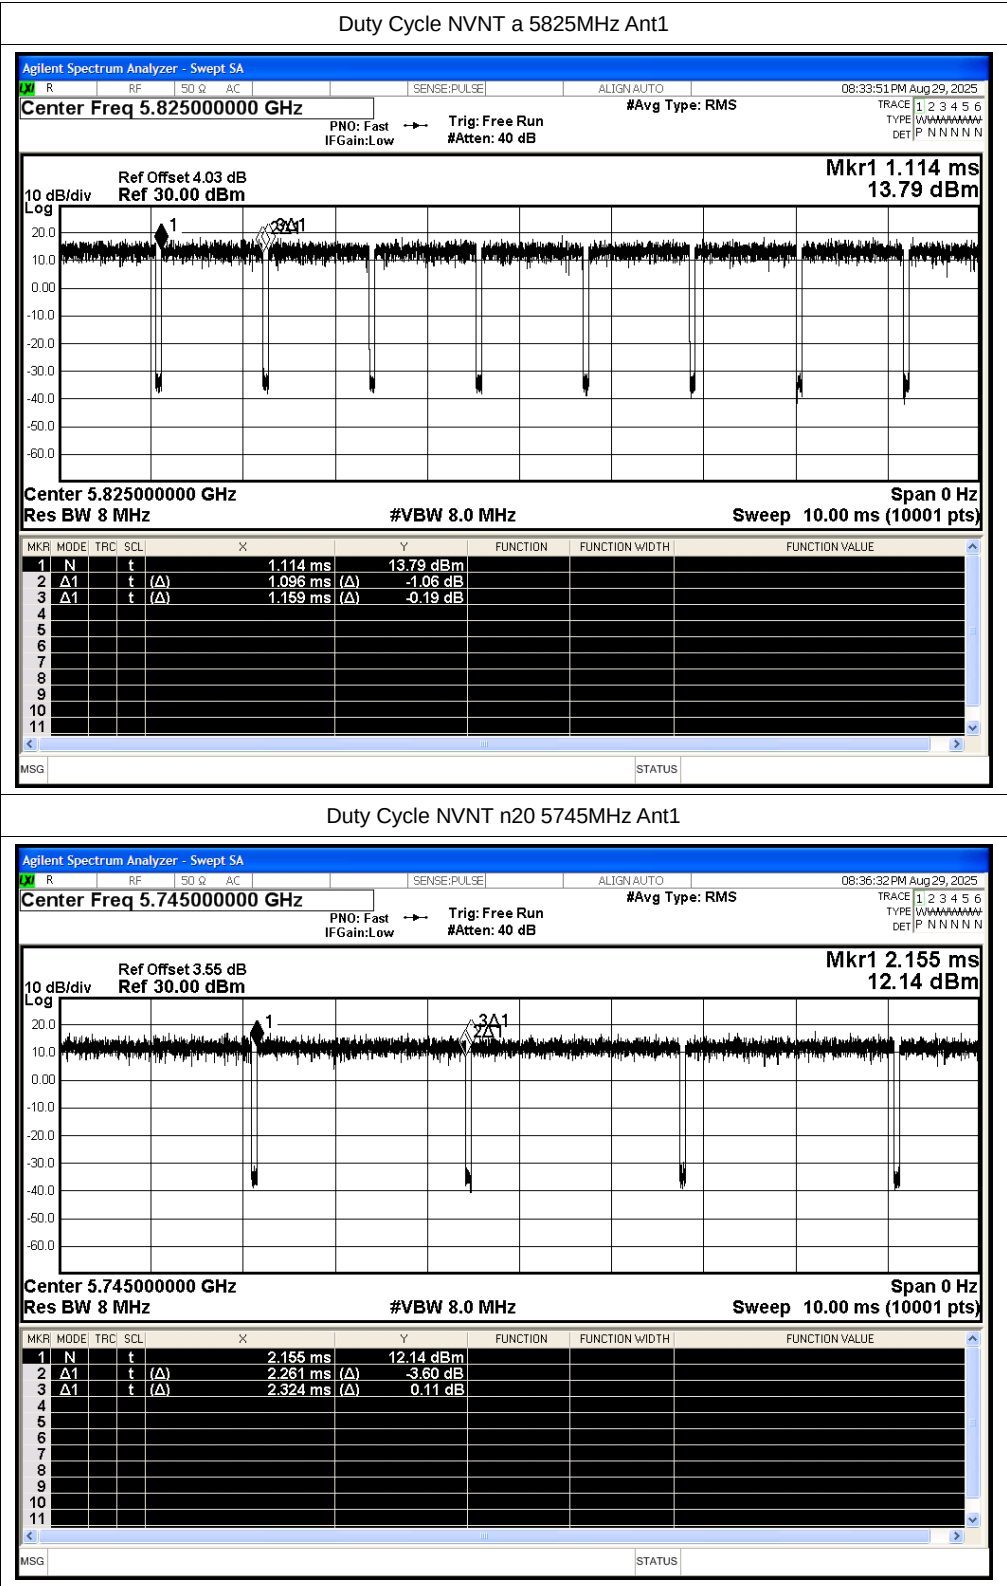

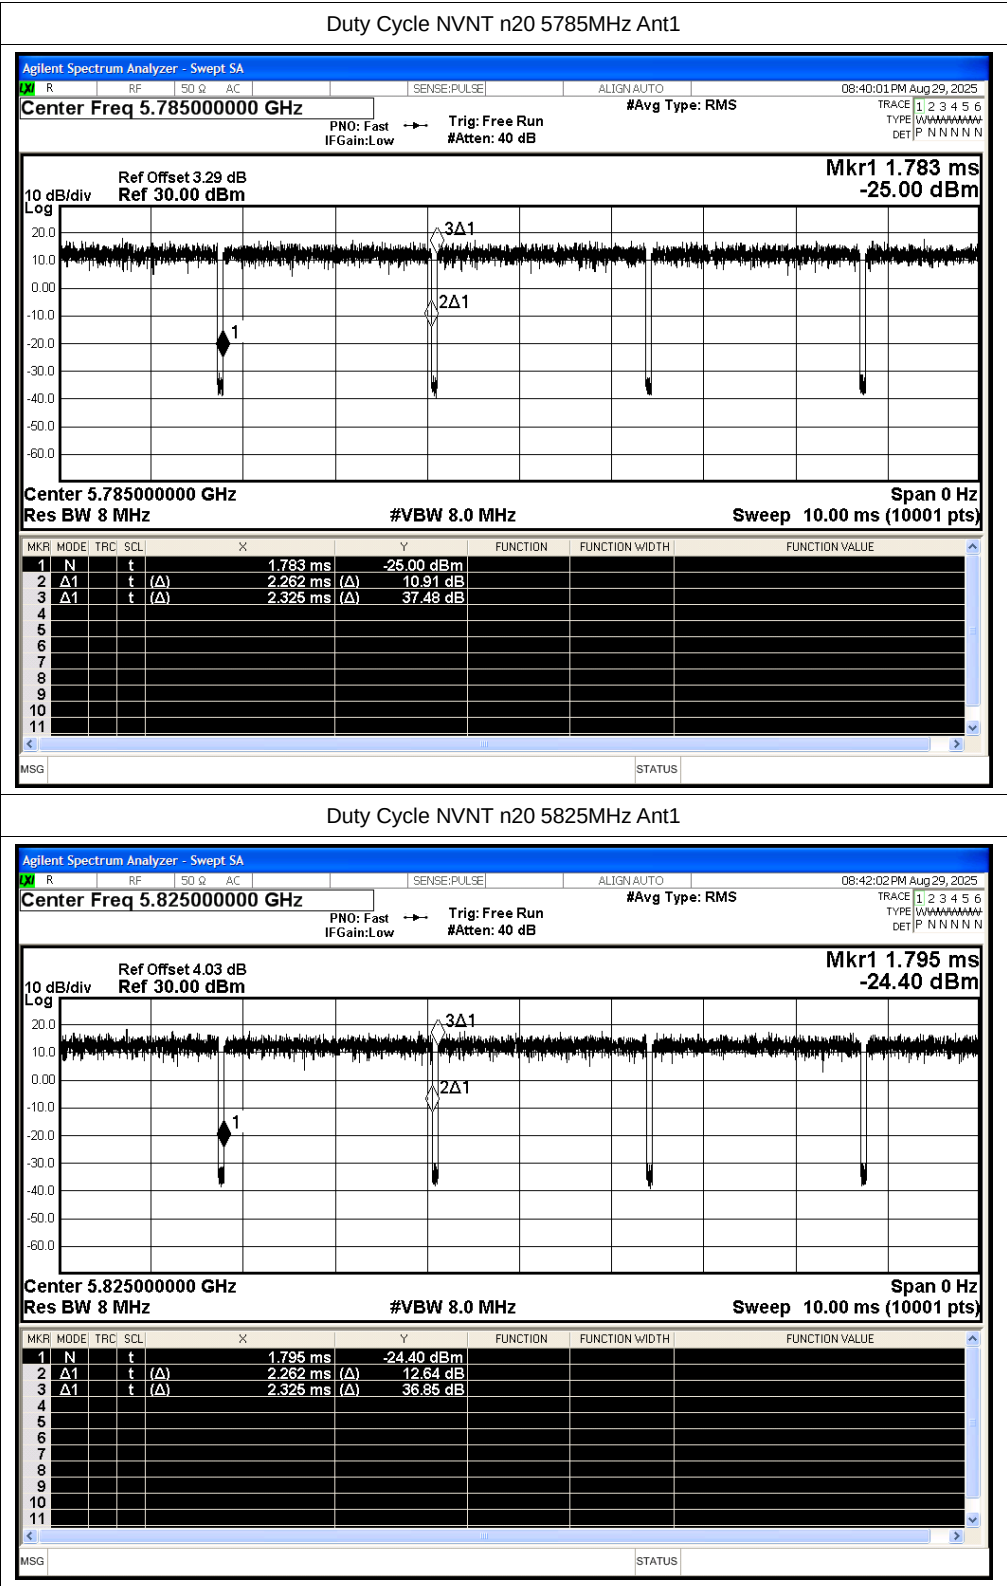

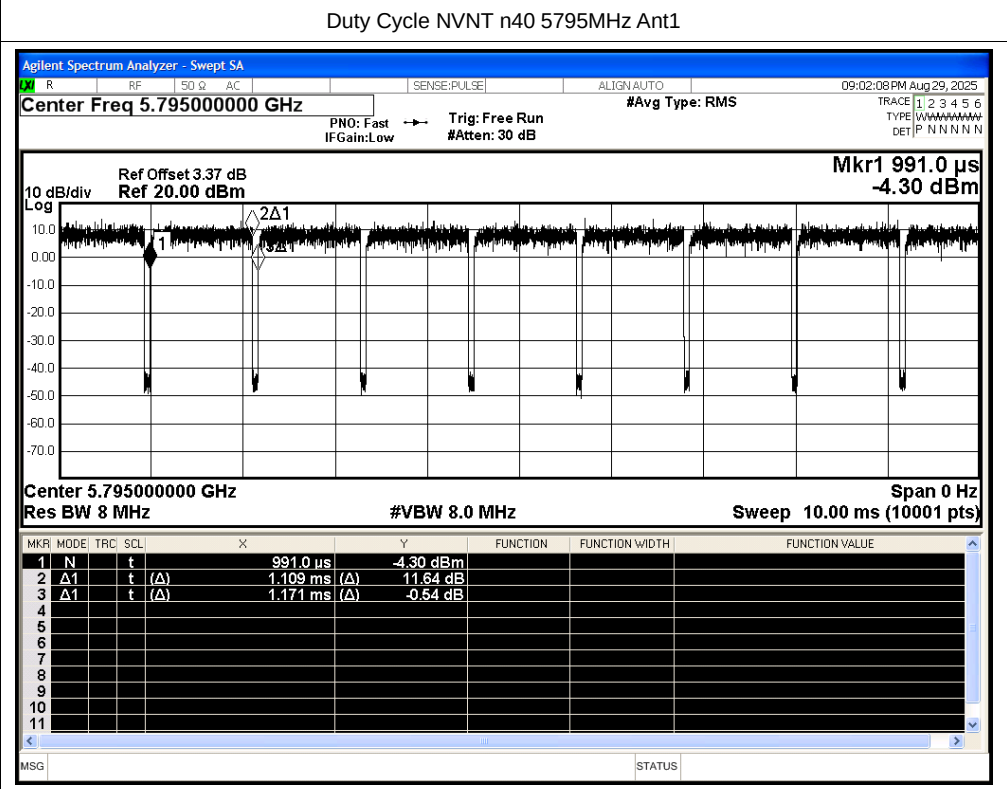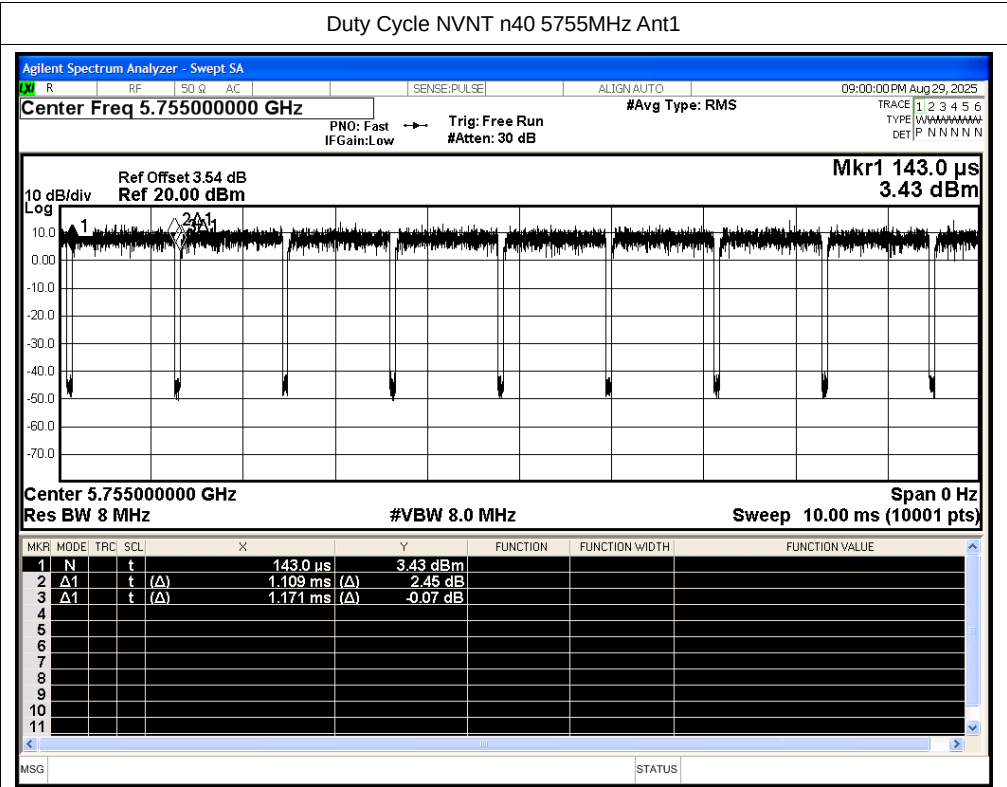

Duty Cycle NVNT ac20 5745MHz Ant1

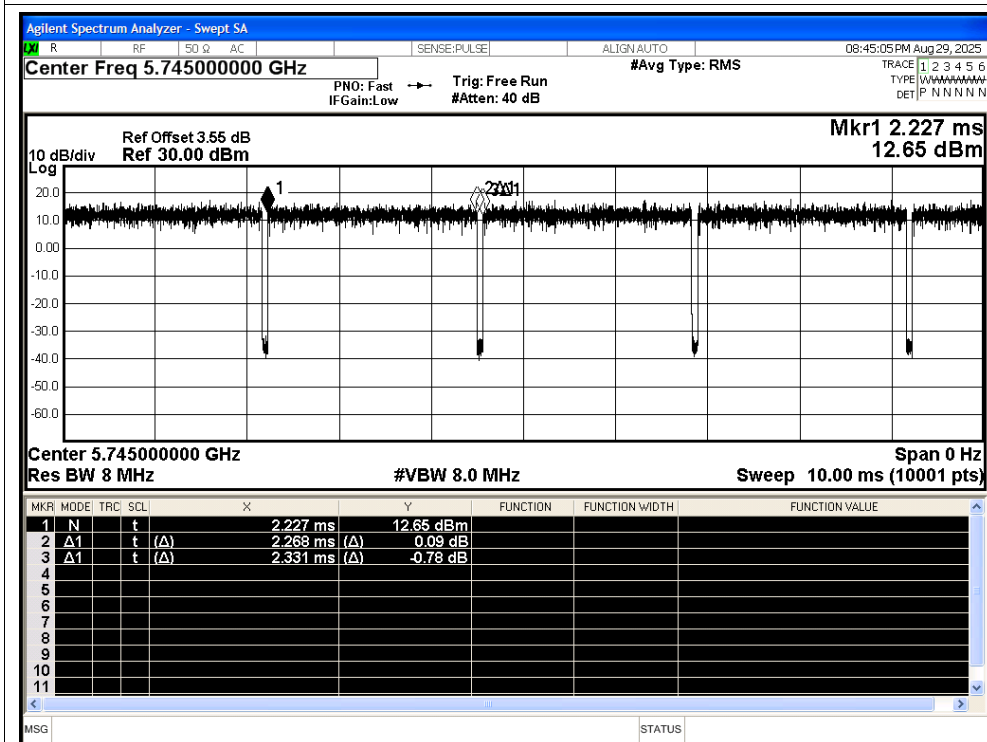

Duty Cycle NVNT ac20 5785MHz Ant1

