

Appendix Test Data for BLE (Conducted Measurement)

Product Name: FOWHAT Zero C1 wireless mouse

Trade Mark: FOWHAT, GravaStar

Test Model: FW C1

FCC ID: 2BRBZ-FWC1

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A


Appendix A: DTS Bandwidth


Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.692	2401.668	2402.360	0.5	PASS
BLE_1M	Ant1	2440	0.692	2439.676	2440.368	0.5	PASS
BLE_1M	Ant1	2480	0.712	2479.660	2480.372	0.5	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

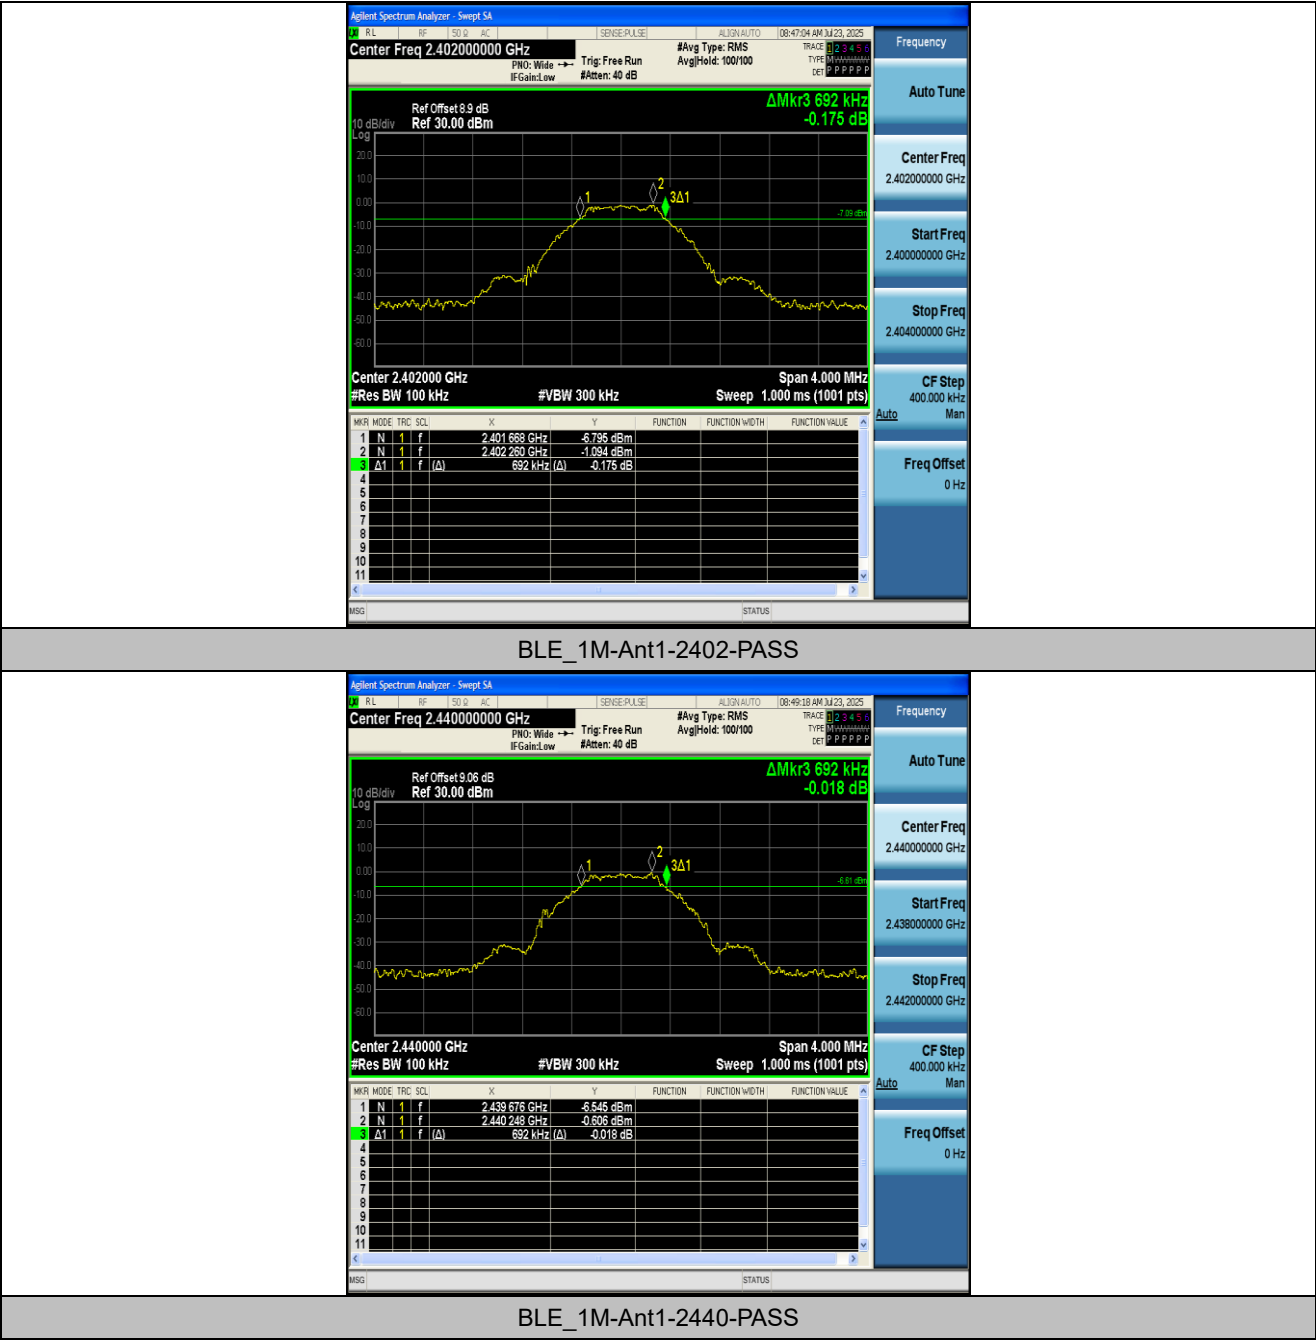

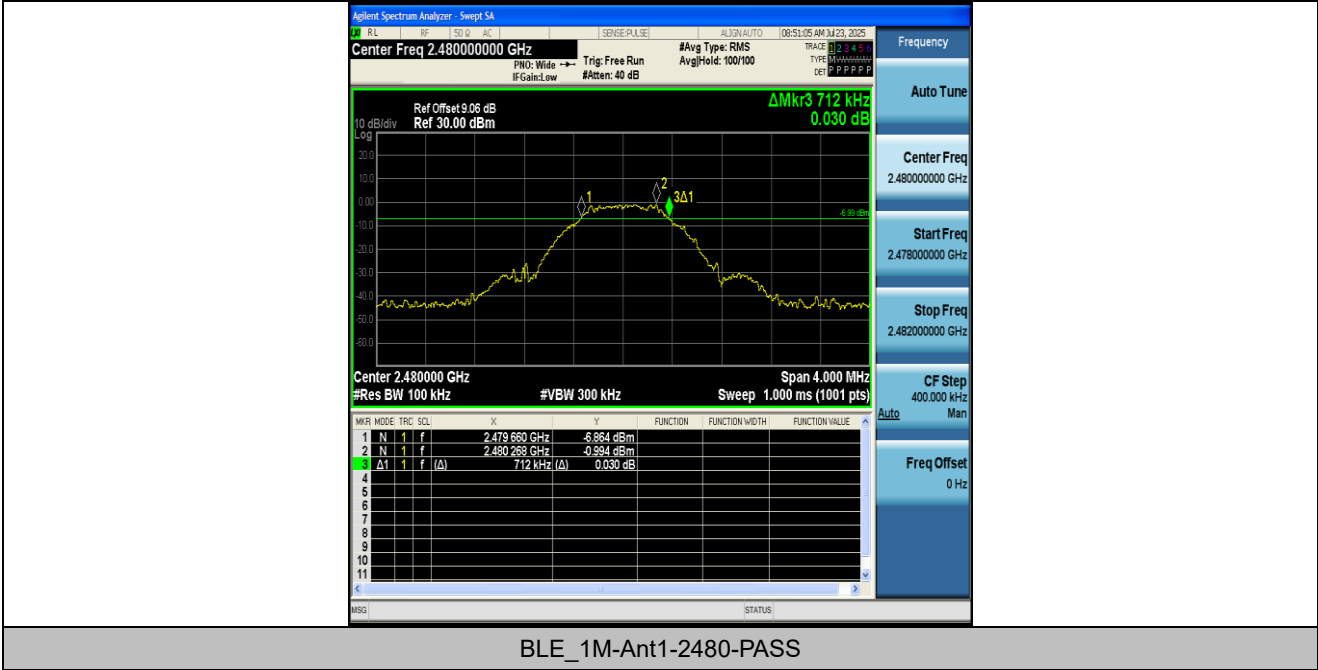

Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.0519	2401.4805	2402.5324	---	---
BLE_1M	Ant1	2440	1.0480	2439.4883	2440.5363	---	---
BLE_1M	Ant1	2480	1.0502	2479.4837	2480.5339	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs



BLE_1M-Ant1-2440



BLE_1M-Ant1-2480

Appendix C: Maximum peak conducted output power


Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.15	≤30	PASS
BLE_1M	Ant1	2440	0.52	≤30	PASS
BLE_1M	Ant1	2480	0.49	≤30	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs Peak



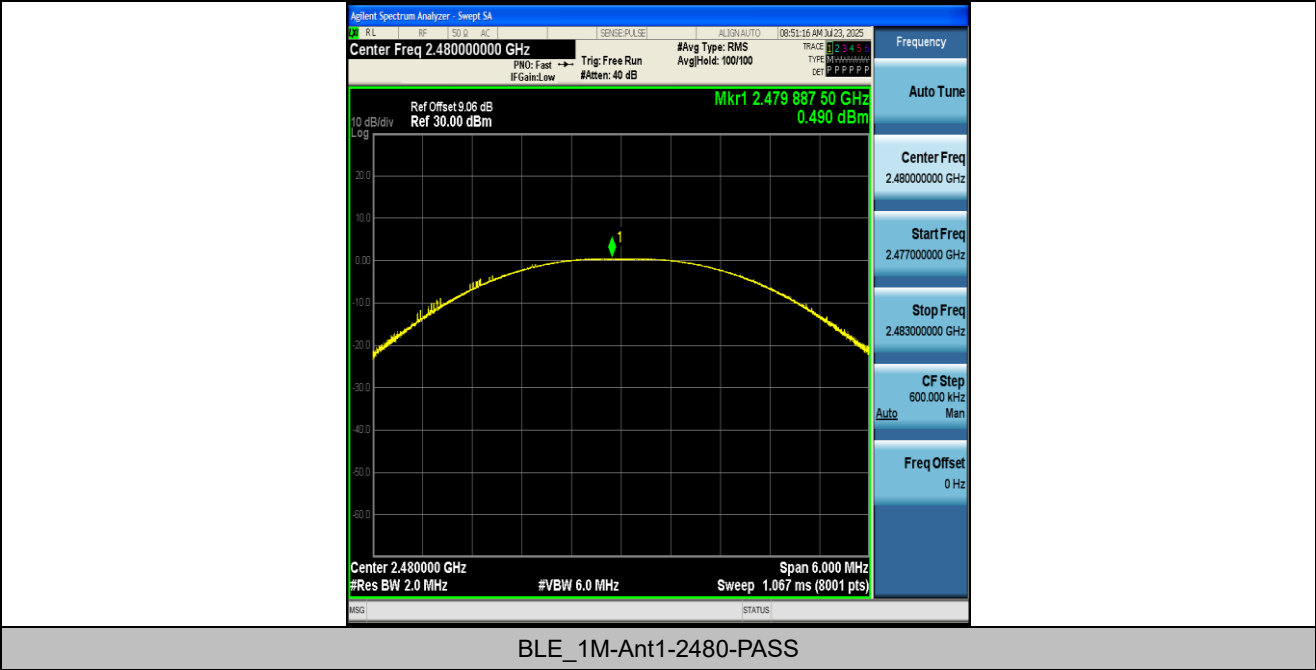


Appendix D: Maximum peak power spectral density


Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.28	≤8.00	PASS
BLE_1M	Ant1	2440	-14.79	≤8.00	PASS
BLE_1M	Ant1	2480	-14.05	≤8.00	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

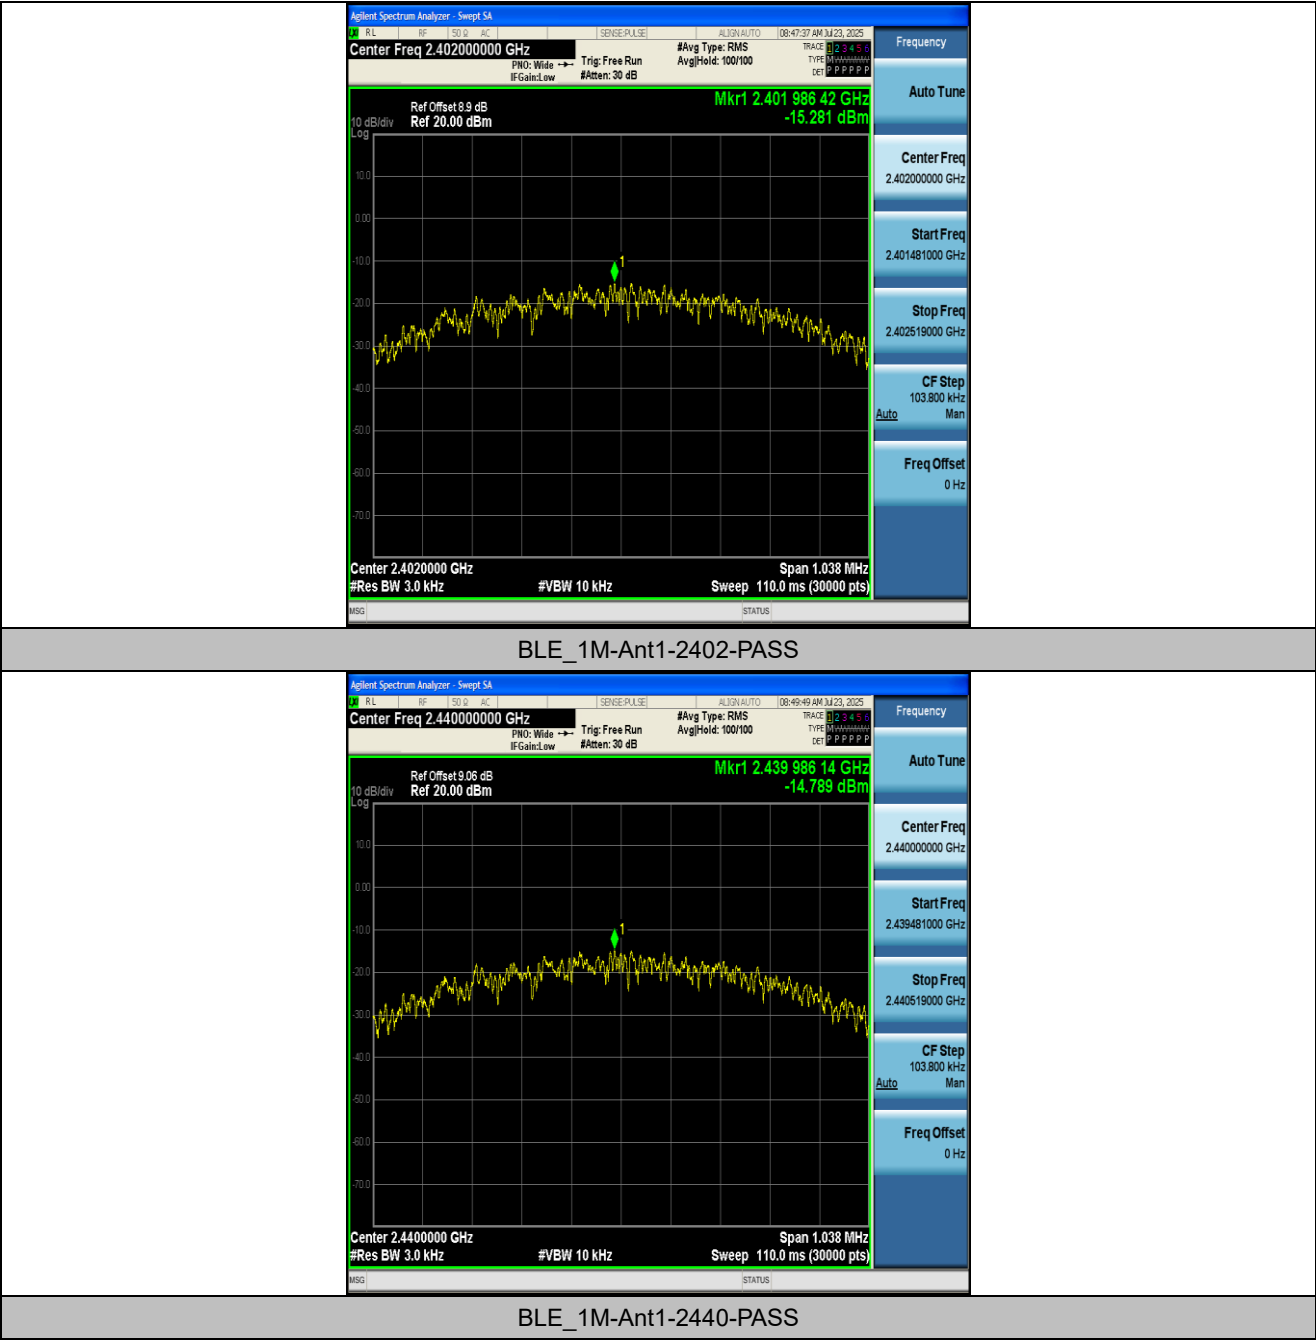




Appendix E: Band edge measurements

Test Result

Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.84	-48.9	≤ -20.84	PASS
BLE_1M	Ant1	High	2480	-0.46	-49.85	≤ -20.46	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

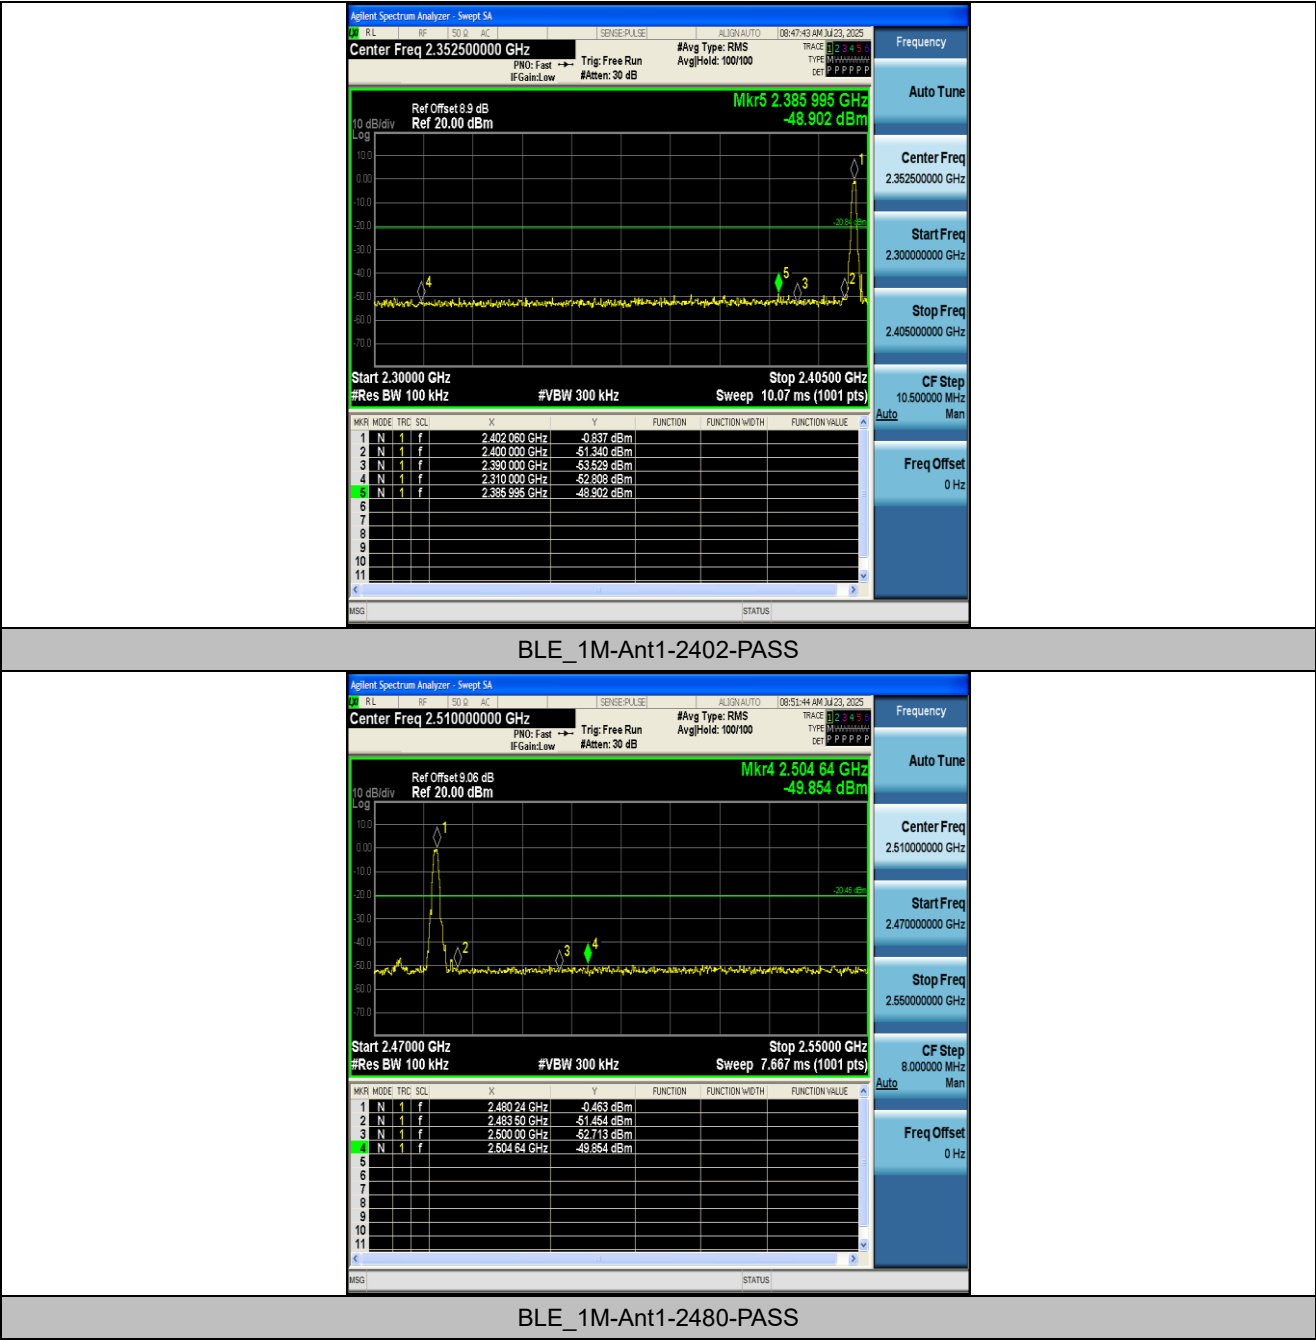


Appendix F: Conducted Spurious Emission


Test Result

Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	-1.14	-1.14	---	PASS
BLE_1M	Ant1	2402	30~1000	-1.14	-61.31	≤ -21.14	PASS
BLE_1M	Ant1	2402	1000~26500	-1.14	-38.92	≤ -21.14	PASS
BLE_1M	Ant1	2440	0~Reference	-0.67	-0.67	---	PASS
BLE_1M	Ant1	2440	30~1000	-0.67	-61.9	≤ -20.67	PASS
BLE_1M	Ant1	2440	1000~26500	-0.67	-45.07	≤ -20.67	PASS
BLE_1M	Ant1	2480	0~Reference	-0.63	-0.63	---	PASS
BLE_1M	Ant1	2480	30~1000	-0.63	-61.42	≤ -20.63	PASS
BLE_1M	Ant1	2480	1000~26500	-0.63	-43.92	≤ -20.63	PASS

Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.

Test Graphs

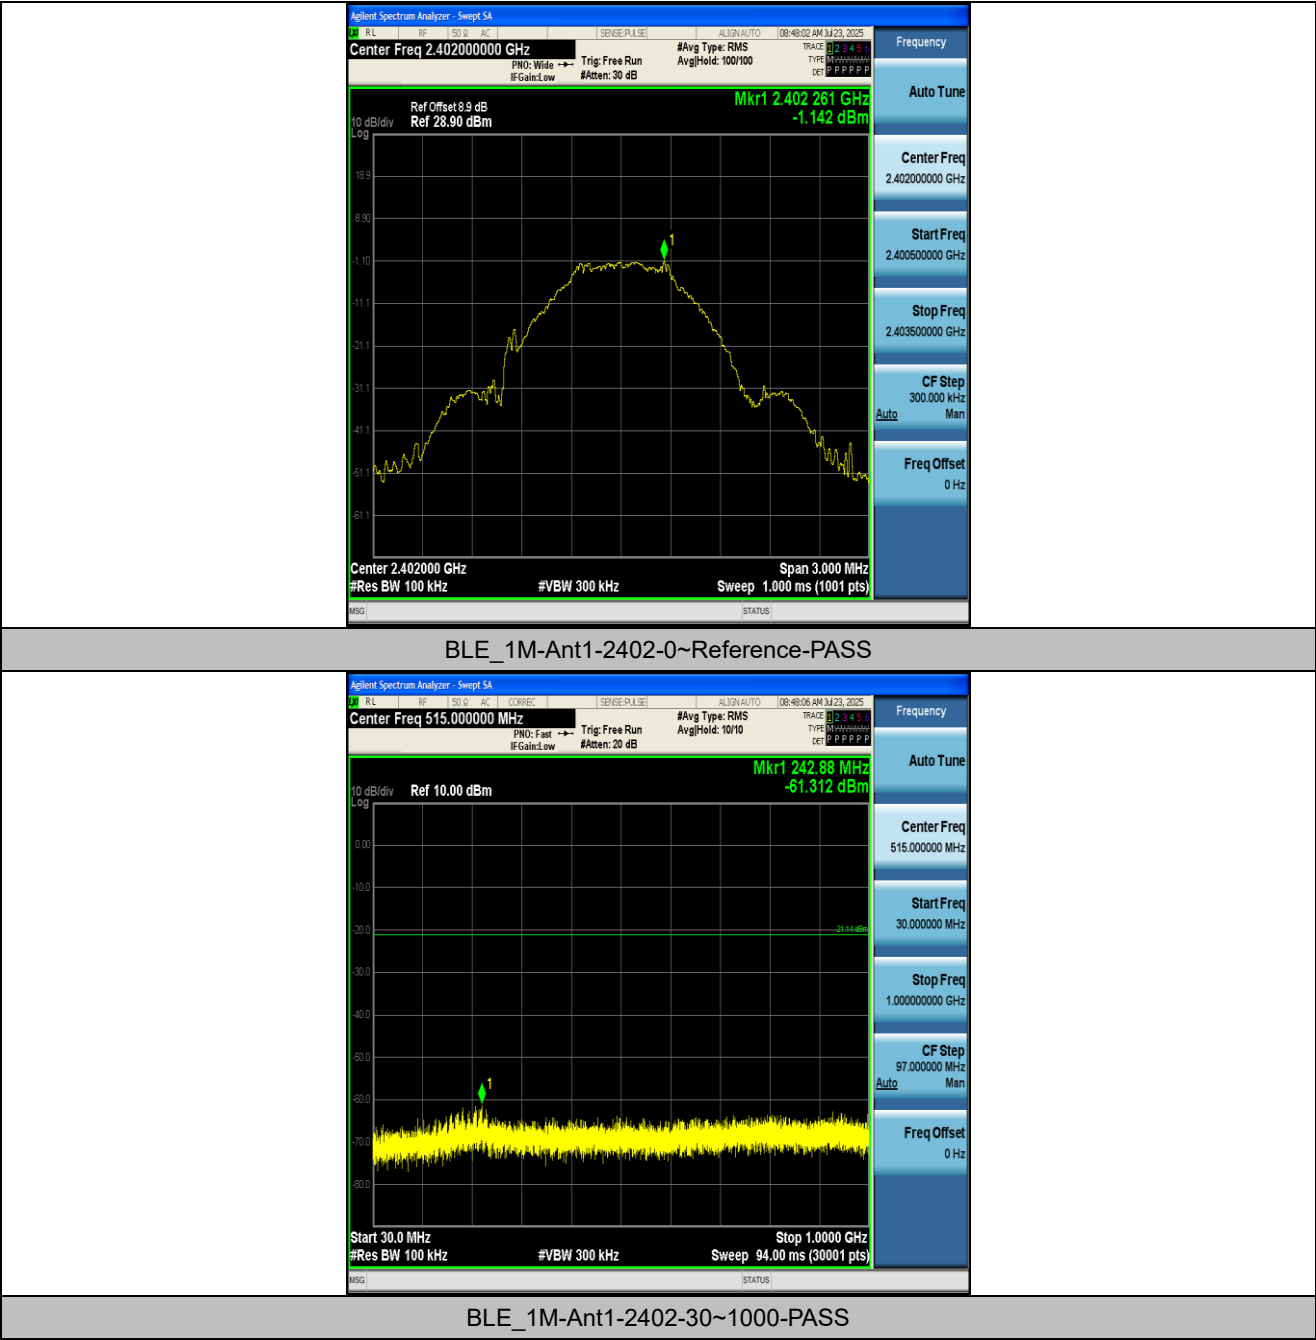


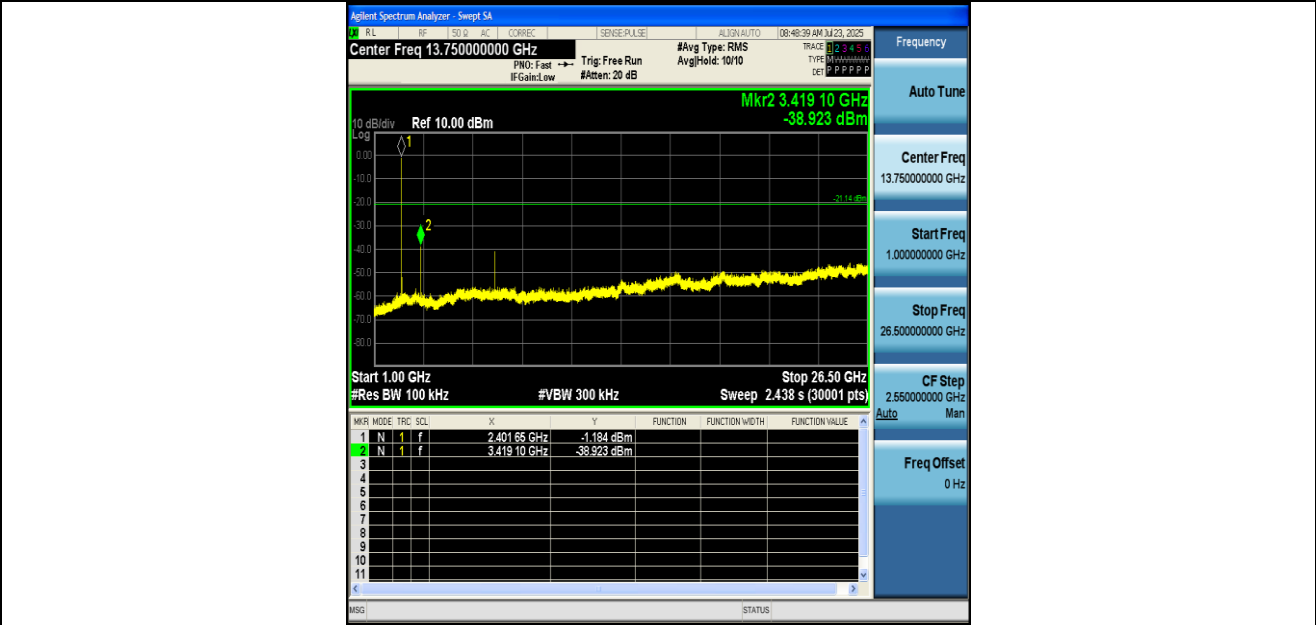


BLE_1M-Ant1-2402-1000~26500-PASS




BLE_1M-Ant1-2440-0~Reference-PASS

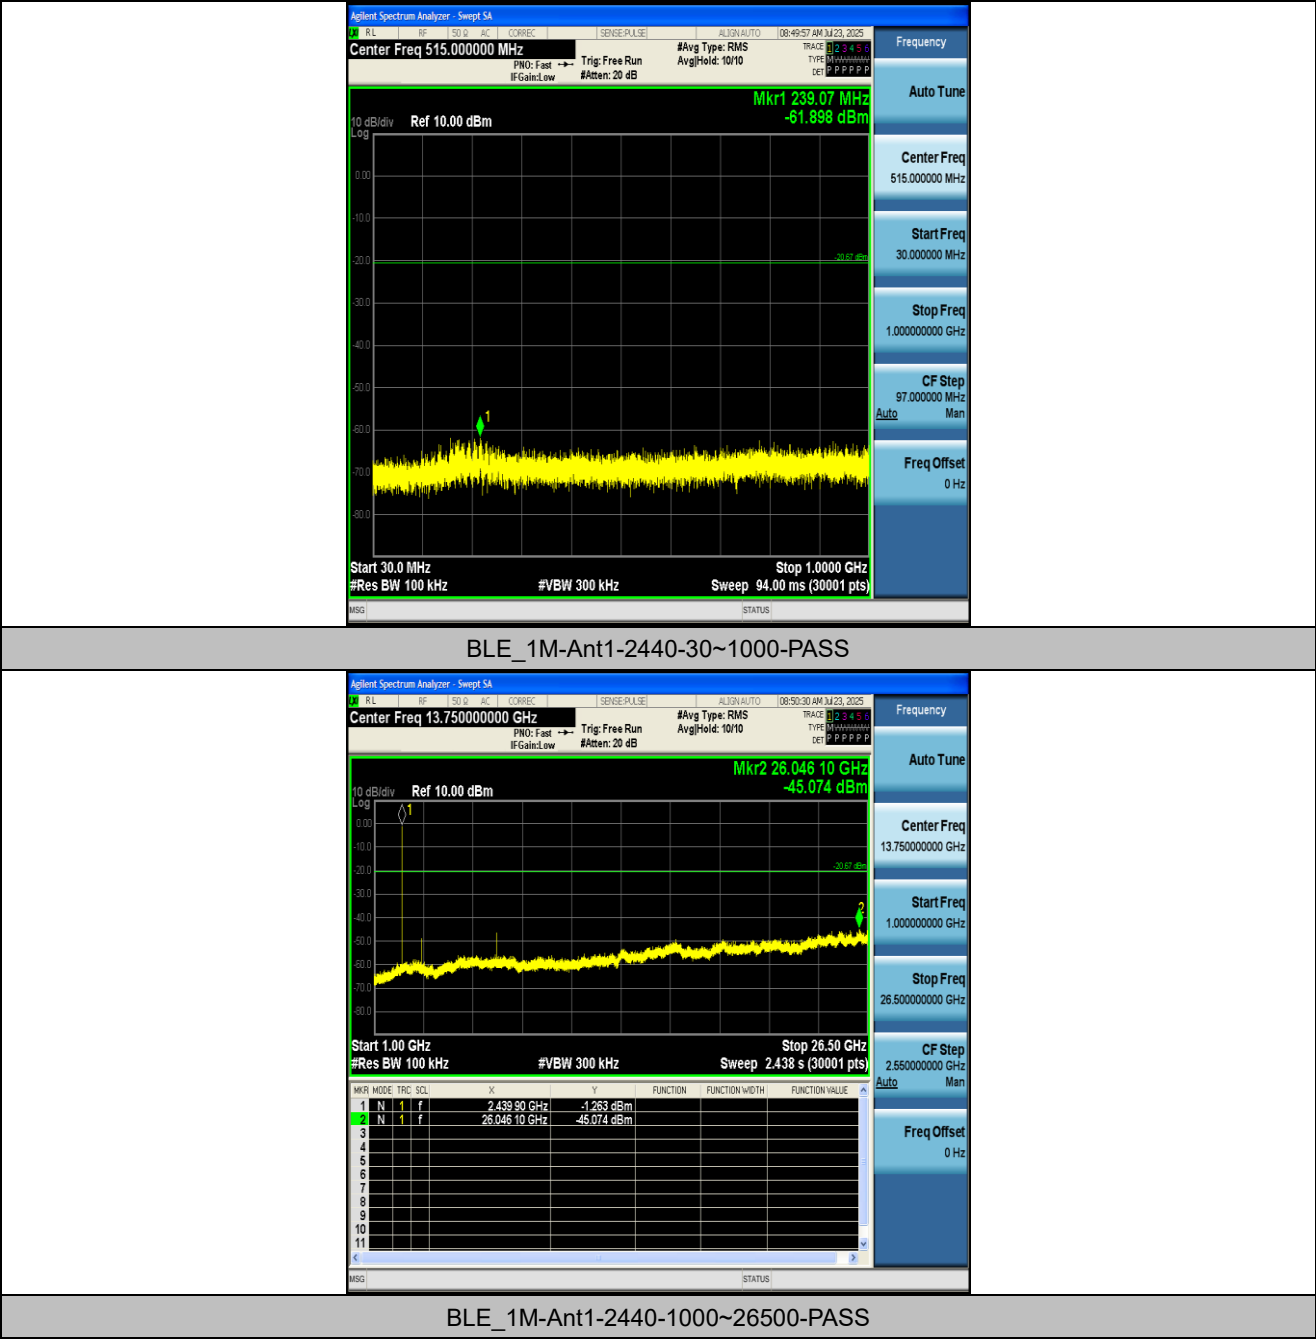


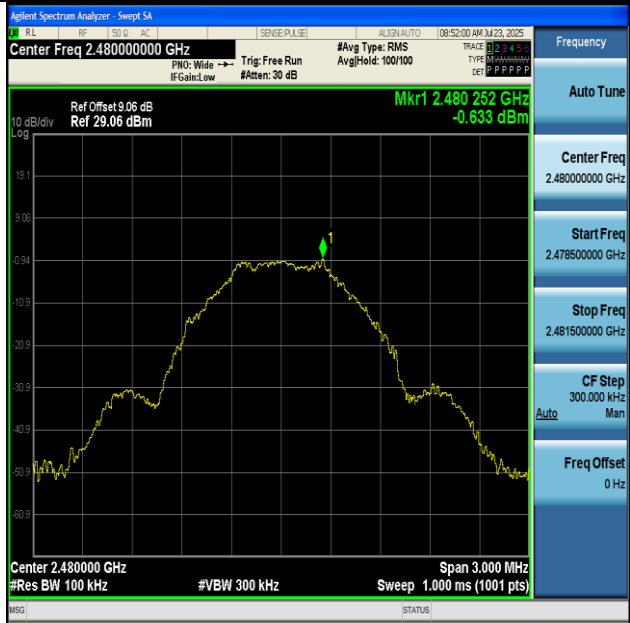

BLE_1M-Ant1-2480-0~Reference-PASS

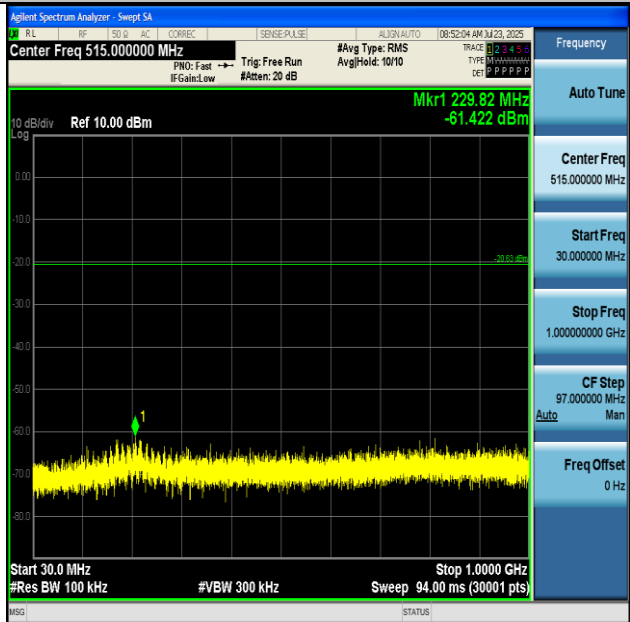

BLE_1M-Ant1-2480-30~1000-PASS

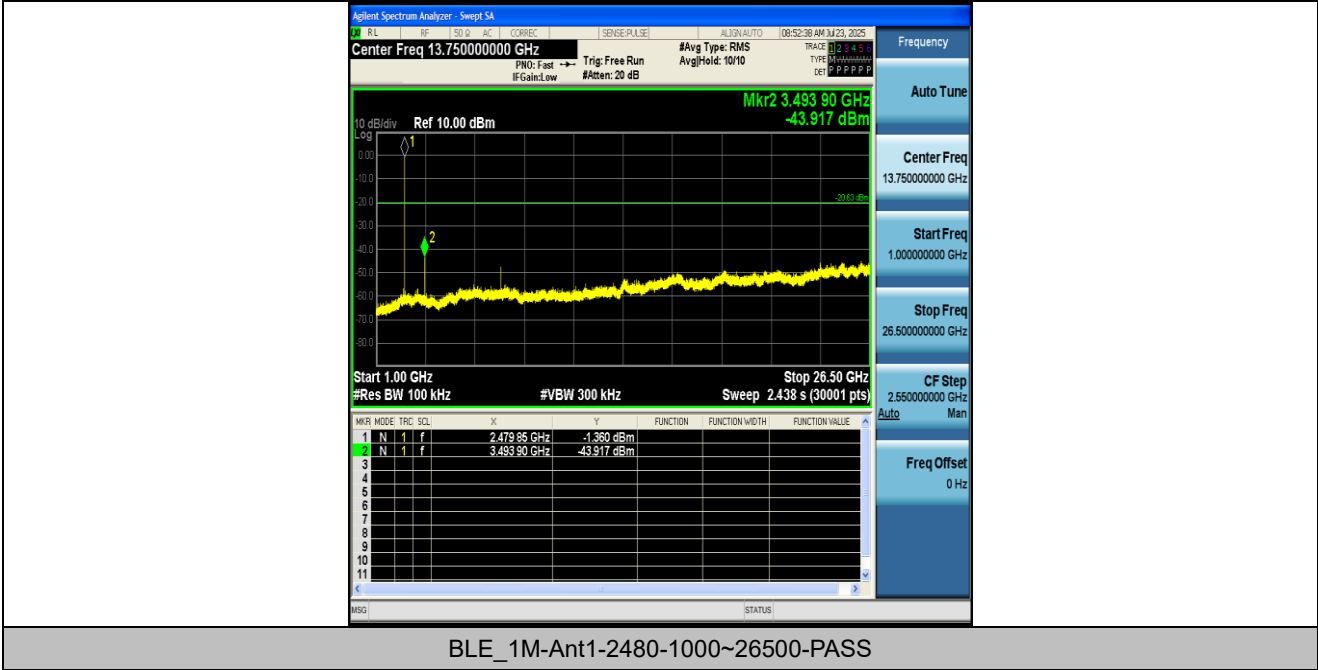

Appendix G: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
BLE_1M	Ant1	2402	2.78	3.55	78.31	1.06
BLE_1M	Ant1	2440	2.79	3.57	78.15	1.07
BLE_1M	Ant1	2480	2.79	3.57	78.15	1.07

Note: $\text{offset(dB)} = \text{cable loss(dB)} + \text{attenuator factor(dB)}$

Test Graphs

