

FCC Test Report

Report Reference No. : HK2507083703-4E

FCC ID : 2BRDV-IV-TC21

Compiled by

(position+printedname+signature).. : Testing Engineer Len Liao

Supervised by

(position+printedname+signature)... : Technical Manager Sliver Wan

Approved by

(position+printedname+signature)... : Authorized Signatory Jason Zhou

Date of issue : Aug. 26, 2025

Testing Laboratory Name : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : Shishi Technology (Shenzhen) Co., Ltd.

Address..... : Room 2101, Huichao Technology Building, 12 Jinhai Road, Bao'an
District, Shenzhen City, Guangdong Province, China

Test specification :

Standard : FCC CFR Title 47 Part 2, Part 22H

TRF Originator : Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : The Solar 4G AI Trail Camera

Trade Mark..... : N/A

Manufacturer : Shishi Technology (Shenzhen) Co., Ltd.

Model/Type reference..... : IV-TC21

Series Models : IV-TC

Modulation Type : QPSK, 16QAM

Rating..... : DC 5V From Type-C or DC 3.7V From Battery

Hardware version..... : V1.0

Software version : V1.0

Result..... : **PASS**

TEST REPORT

Test Report No. :	HK2507083703-4E	Aug. 26, 2025 Date of issue
--------------------------	------------------------	---------------------------------------

Equipment under Test : The Solar 4G AI Trail Camera

Model /Type : IV-TC21

Series Models : IV-TC

Applicant : **Shishi Technology (Shenzhen) Co., Ltd.**

Address : Room 2101, Huichao Technology Building, 12 Jinhai Road, Bao'an District, Shenzhen City, Guangdong Province, China

Manufacturer : **Shishi Technology (Shenzhen) Co., Ltd.**

Address : Room 2101, Huichao Technology Building, 12 Jinhai Road, Bao'an District, Shenzhen City, Guangdong Province, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	<u>Test Standards.....</u>	5
2	<u>Summary</u>	6
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment under Test	6
2.4	Normal Accessory Setting	7
2.5	EUT Configuration	7
2.6	Related Submittal(s) / Grant (s)	7
2.7	Modifications	7
2.8	General Test Conditions/Configurations	7
3	<u>Test Environment</u>	8
3.1	Information of the Test Laboratory	8
3.2	Environmental Conditions	8
3.3	Test Description	8
3.4	Equipments Used During The Test	9
4	<u>Test Conditions and Results</u>	10
4.1	Output Power	10
4.2	Peak-to-Average Ratio (PAR)	17
4.3	Occupied Bandwidth and Emission Bandwidth	22
4.4	Band Edge Compliance	27
4.5	Spurious Emission on Antenna Port	32
4.6	Radiated Spurious Emission	55
4.7	Frequency Stability	61
5	<u>Test Setup Photos of the EUT</u>	63
6	<u>External and Internal photos of the EUT.....</u>	65

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Aug. 26, 2025	Jason Zhou

1 Test Standards

The tests were performed according to following standards:

[FCC Part 2](#): Frequency Allocations And Radio Treaty Matters; General Rules And Regulations.

[FCC Part 22 Subpart H](#): Private Land Mobile Radio Services.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

[KDB971168 D01.v03r01](#) Measurement Guidance For Certification Of Licensed Digital Transmitters.

2 Summary

2.1 General Remarks

Date of receipt of test sample	:	Jul. 08, 2025
Testing commenced on	:	Jul. 08, 2025
Testing concluded on	:	Aug. 26, 2025

2.2 Product Description

Name of EUT:	The Solar 4G AI Trail Camera
Model/Type reference:	IV-TC21
Series Models:	IV-TC
Model Difference:	All model's the function, software and electric circuit are the same, only with a product model named different. Test sample mode: IV-TC21.
Power supply:	DC 5V From Type-C or DC 3.7V From Battery
Modulation Type:	QPSK,16QAM
Antenna type:	External Antenna
Antenna gain:	0.9dBi
Operation Frequency Band:	LTE BAND 5
Operation frequency:	LTE BAND 5:824~849 MHz
LTE Release:	R8
Extreme temp. Tolerance:	-30°C to +50°C
Extreme vol. Limits:	4.25VDC to 5.75VDC (nominal: 5.0VDC)
Note: 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain Refer to the antenna specifications. 3. The cable loss data is obtained from the supplier. 4. The test results in the report only apply to the tested sample.	

2.3 Equipment under Test

Power supply system utilised

Power supply voltage	:	☐ 120V/ 60 Hz	☐ 115V/60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 5V From Type-C or DC 3.7V From Battery

2.4 Normal Accessory Setting

Fully charged battery was used during the test.

2.5 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended filing to comply with FCC Part 22H, Rules.

2.7 Modifications

No modifications were implemented to meet testing criteria.

2.8 General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	4.25V
	VN	5.0V
	VH	5.75V

NOTE: VL=lower extreme test voltage VN=nominal voltage
VH=upper extreme test voltage TN=normal temperature



3 Test Environment

3.1 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

Band 5 (824~849 MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913(a)(2)	EIRP ≤ 2W	Pass
Peak-Average Ratio	§24.232(d)	FCC:Limit≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	Pass
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to Thefrequency block.	Pass
Spurious Emission at AntennaTerminals	§2.1051, §24.238	≤-13dBm/1MHz, from9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	Clause 7of KDB971168 D01 v02r02	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §22.355, §24.235	FCC:within authorized frequency block.	Pass

NOTE 1:For theverdict, the"N/A"denotes"not applicable", the"N/T"denotes "nottested".

Remark:

1. The measurement uncertainty is not included in the test result.



3.4 Equipments Used During The Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2025/02/19	2026/02/18
2	L.I.S.N.	R&S	ENV216	HKE-059	2025/02/19	2026/02/18
3	EMI Test Receiver	R&S	ESR	HKE-005	2025/02/19	2026/02/18
4	Spectrum analyzer	Agilent	N9020A	HKE-117	2025/02/19	2026/02/18
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2025/02/19	2026/02/18
6	Preamplifier	EMCI	EMC051845S	HKE-006	2025/02/19	2026/02/18
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2025/02/19	2026/02/18
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2025/02/19	2026/02/18
9	6d Attenuator	Pasternack	6db	HKE-184	2025/02/19	2026/02/18
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2025/02/19	2026/02/18
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2025/02/19	2026/02/18
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2025/02/19	2026/02/18
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2025/02/19	2026/02/18
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2025/02/19	2026/02/18
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2025/02/19	2026/02/18
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2025/06/09	2026/06/08
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2025/06/09	2026/06/08
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/
23	RSE Test Software	Tonscend	JS36-RSE 5.0.0	HKE-184	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



4 Test Conditions and Results


4.1 Output Power

4.1.1 Conducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

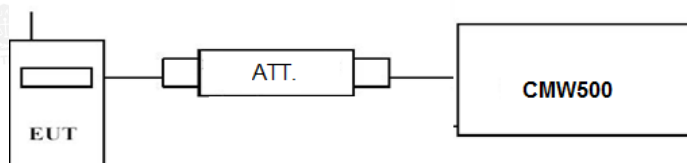

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

compliance *

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5;

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
Band5	1.4MHz	QPSK	20407	1RB#0	23.27
Band5	1.4MHz	QPSK	20407	1RB#2	22.90
Band5	1.4MHz	QPSK	20407	1RB#5	22.75
Band5	1.4MHz	QPSK	20407	3RB#0	22.52
Band5	1.4MHz	QPSK	20407	3RB#1	22.46
Band5	1.4MHz	QPSK	20407	3RB#3	22.40
Band5	1.4MHz	QPSK	20407	6RB#0	22.37
Band5	1.4MHz	16QAM	20407	1RB#0	22.13
Band5	1.4MHz	16QAM	20407	1RB#2	22.46
Band5	1.4MHz	16QAM	20407	1RB#5	22.57
Band5	1.4MHz	16QAM	20407	3RB#0	22.40
Band5	1.4MHz	16QAM	20407	3RB#1	22.29
Band5	1.4MHz	16QAM	20407	3RB#3	22.27
Band5	1.4MHz	16QAM	20407	6RB#0	23.42
Band5	1.4MHz	QPSK	20525	1RB#0	23.54
Band5	1.4MHz	QPSK	20525	1RB#2	23.19
Band5	1.4MHz	QPSK	20525	1RB#5	23.08
Band5	1.4MHz	QPSK	20525	3RB#0	23.13
Band5	1.4MHz	QPSK	20525	3RB#1	23.14
Band5	1.4MHz	QPSK	20525	3RB#3	23.03
Band5	1.4MHz	QPSK	20525	6RB#0	22.08



HUAKE TESTING

Band5	1.4MHz	16QAM	20525	1RB#0	22.22
Band5	1.4MHz	16QAM	20525	1RB#2	22.04
Band5	1.4MHz	16QAM	20525	1RB#5	22.06
Band5	1.4MHz	16QAM	20525	3RB#0	22.99
Band5	1.4MHz	16QAM	20525	3RB#1	22.06
Band5	1.4MHz	16QAM	20525	3RB#3	22.88
Band5	1.4MHz	16QAM	20525	6RB#0	22.05
Band5	1.4MHz	QPSK	20643	1RB#0	24.68
Band5	1.4MHz	QPSK	20643	1RB#2	24.11
Band5	1.4MHz	QPSK	20643	1RB#5	23.87
Band5	1.4MHz	QPSK	20643	3RB#0	23.80
Band5	1.4MHz	QPSK	20643	3RB#1	23.70
Band5	1.4MHz	QPSK	20643	3RB#3	23.68
Band5	1.4MHz	QPSK	20643	6RB#0	23.79
Band5	1.4MHz	16QAM	20643	1RB#0	23.18
Band5	1.4MHz	16QAM	20643	1RB#2	23.23
Band5	1.4MHz	16QAM	20643	1RB#5	23.79
Band5	1.4MHz	16QAM	20643	3RB#0	23.65
Band5	1.4MHz	16QAM	20643	3RB#1	23.71
Band5	1.4MHz	16QAM	20643	3RB#3	23.51
Band5	1.4MHz	16QAM	20643	6RB#0	23.81
Band5	3MHz	QPSK	20415	1RB#0	22.19
Band5	3MHz	QPSK	20415	1RB#8	22.15
Band5	3MHz	QPSK	20415	1RB#14	22.02
Band5	3MHz	QPSK	20415	8RB#0	21.18
Band5	3MHz	QPSK	20415	8RB#4	21.26
Band5	3MHz	QPSK	20415	8RB#7	21.26
Band5	3MHz	QPSK	20415	15RB#0	21.23
Band5	3MHz	16QAM	20415	1RB#0	21.25
Band5	3MHz	16QAM	20415	1RB#8	21.15
Band5	3MHz	16QAM	20415	1RB#14	21.24
Band5	3MHz	16QAM	20415	8RB#0	22.35
Band5	3MHz	16QAM	20415	8RB#4	21.37
Band5	3MHz	16QAM	20415	8RB#7	21.52
Band5	3MHz	16QAM	20415	15RB#0	21.41
Band5	3MHz	QPSK	20525	1RB#0	23.30
Band5	3MHz	QPSK	20525	1RB#8	23.05
Band5	3MHz	QPSK	20525	1RB#14	22.86
Band5	3MHz	QPSK	20525	8RB#0	22.13
Band5	3MHz	QPSK	20525	8RB#4	22.15
Band5	3MHz	QPSK	20525	8RB#7	22.09
Band5	3MHz	QPSK	20525	15RB#0	22.12
Band5	3MHz	16QAM	20525	1RB#0	22.04
Band5	3MHz	16QAM	20525	1RB#8	22.34
Band5	3MHz	16QAM	20525	1RB#14	22.77
Band5	3MHz	16QAM	20525	8RB#0	22.17
Band5	3MHz	16QAM	20525	8RB#4	23.07
Band5	3MHz	16QAM	20525	8RB#7	22.11
Band5	3MHz	16QAM	20525	15RB#0	22.17
Band5	3MHz	QPSK	20635	1RB#0	24.47
Band5	3MHz	QPSK	20635	1RB#8	24.22
Band5	3MHz	QPSK	20635	1RB#14	23.77
Band5	3MHz	QPSK	20635	8RB#0	23.00
Band5	3MHz	QPSK	20635	8RB#4	23.04
Band5	3MHz	QPSK	20635	8RB#7	23.96
Band5	3MHz	QPSK	20635	15RB#0	23.94
Band5	3MHz	16QAM	20635	1RB#0	23.13
Band5	3MHz	16QAM	20635	1RB#8	23.98
Band5	3MHz	16QAM	20635	1RB#14	23.73
Band5	3MHz	16QAM	20635	8RB#0	24.10
Band5	3MHz	16QAM	20635	8RB#4	23.07
Band5	3MHz	16QAM	20635	8RB#7	23.03
Band5	3MHz	16QAM	20635	15RB#0	23.95

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAKE TESTING

Band5	5MHz	QPSK	20425	1RB#0	22.60
Band5	5MHz	QPSK	20425	1RB#12	22.34
Band5	5MHz	QPSK	20425	1RB#24	22.76
Band5	5MHz	QPSK	20425	12RB#0	22.47
Band5	5MHz	QPSK	20425	12RB#6	22.50
Band5	5MHz	QPSK	20425	12RB#13	22.64
Band5	5MHz	QPSK	20425	25RB#0	22.60
Band5	5MHz	16QAM	20425	1RB#0	22.29
Band5	5MHz	16QAM	20425	1RB#12	22.20
Band5	5MHz	16QAM	20425	1RB#24	22.52
Band5	5MHz	16QAM	20425	12RB#0	22.65
Band5	5MHz	16QAM	20425	12RB#6	21.56
Band5	5MHz	16QAM	20425	12RB#13	21.82
Band5	5MHz	16QAM	20425	25RB#0	21.66
Band5	5MHz	QPSK	20525	1RB#0	23.70
Band5	5MHz	QPSK	20525	1RB#12	23.14
Band5	5MHz	QPSK	20525	1RB#24	23.01
Band5	5MHz	QPSK	20525	12RB#0	22.31
Band5	5MHz	QPSK	20525	12RB#6	22.21
Band5	5MHz	QPSK	20525	12RB#13	22.16
Band5	5MHz	QPSK	20525	25RB#0	22.25
Band5	5MHz	16QAM	20525	1RB#0	22.63
Band5	5MHz	16QAM	20525	1RB#12	22.31
Band5	5MHz	16QAM	20525	1RB#24	22.17
Band5	5MHz	16QAM	20525	12RB#0	22.43
Band5	5MHz	16QAM	20525	12RB#6	22.25
Band5	5MHz	16QAM	20525	12RB#13	22.25
Band5	5MHz	16QAM	20525	25RB#0	22.22
Band5	5MHz	QPSK	20625	1RB#0	24.53
Band5	5MHz	QPSK	20625	1RB#12	24.17
Band5	5MHz	QPSK	20625	1RB#24	24.06
Band5	5MHz	QPSK	20625	12RB#0	23.67
Band5	5MHz	QPSK	20625	12RB#6	23.77
Band5	5MHz	QPSK	20625	12RB#13	23.82
Band5	5MHz	QPSK	20625	25RB#0	23.77
Band5	5MHz	16QAM	20625	1RB#0	23.94
Band5	5MHz	16QAM	20625	1RB#12	23.72
Band5	5MHz	16QAM	20625	1RB#24	23.65
Band5	5MHz	16QAM	20625	12RB#0	23.72
Band5	5MHz	16QAM	20625	12RB#6	23.74
Band5	5MHz	16QAM	20625	12RB#13	23.84
Band5	5MHz	16QAM	20625	25RB#0	23.80
Band5	10MHz	QPSK	20450	1RB#0	21.44
Band5	10MHz	QPSK	20450	1RB#24	22.67
Band5	10MHz	QPSK	20450	1RB#49	22.25
Band5	10MHz	QPSK	20450	25RB#0	21.49
Band5	10MHz	QPSK	20450	25RB#12	21.74
Band5	10MHz	QPSK	20450	25RB#25	21.91
Band5	10MHz	QPSK	20450	50RB#0	21.96
Band5	10MHz	16QAM	20450	1RB#0	22.58
Band5	10MHz	16QAM	20450	1RB#24	21.63
Band5	10MHz	16QAM	20450	1RB#49	21.47
Band5	10MHz	16QAM	20450	25RB#0	22.66
Band5	10MHz	16QAM	20450	25RB#12	22.86
Band5	10MHz	16QAM	20450	25RB#25	21.10
Band5	10MHz	QPSK	20525	1RB#0	22.88
Band5	10MHz	QPSK	20525	1RB#24	23.52
Band5	10MHz	QPSK	20525	1RB#49	22.16
Band5	10MHz	QPSK	20525	25RB#0	22.48
Band5	10MHz	QPSK	20525	25RB#12	22.42
Band5	10MHz	QPSK	20525	25RB#25	22.30
Band5	10MHz	QPSK	20525	50RB#0	22.71

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



HUAKE TESTING

Band5	10MHz	16QAM	20525	1RB#0	22.62
Band5	10MHz	16QAM	20525	1RB#24	22.65
Band5	10MHz	16QAM	20525	1RB#49	22.99
Band5	10MHz	16QAM	20525	25RB#0	23.46
Band5	10MHz	16QAM	20525	25RB#12	22.46
Band5	10MHz	16QAM	20525	25RB#25	22.16
Band5	10MHz	QPSK	20600	1RB#0	22.93
Band5	10MHz	QPSK	20600	1RB#24	23.58
Band5	10MHz	QPSK	20600	1RB#49	22.60
Band5	10MHz	QPSK	20600	25RB#0	22.30
Band5	10MHz	QPSK	20600	25RB#12	22.37
Band5	10MHz	QPSK	20600	25RB#25	22.44
Band5	10MHz	QPSK	20600	50RB#0	22.95
Band5	10MHz	16QAM	20600	1RB#0	22.69
Band5	10MHz	16QAM	20600	1RB#24	23.13
Band5	10MHz	16QAM	20600	1RB#49	22.52
Band5	10MHz	16QAM	20600	25RB#0	22.36
Band5	10MHz	16QAM	20600	25RB#12	22.37
Band5	10MHz	16QAM	20600	25RB#25	22.51

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H.232(b) specifies, "Mobile/portable stations are limited to 7 watts e.i.r.p.

TEST CONFIGURATION

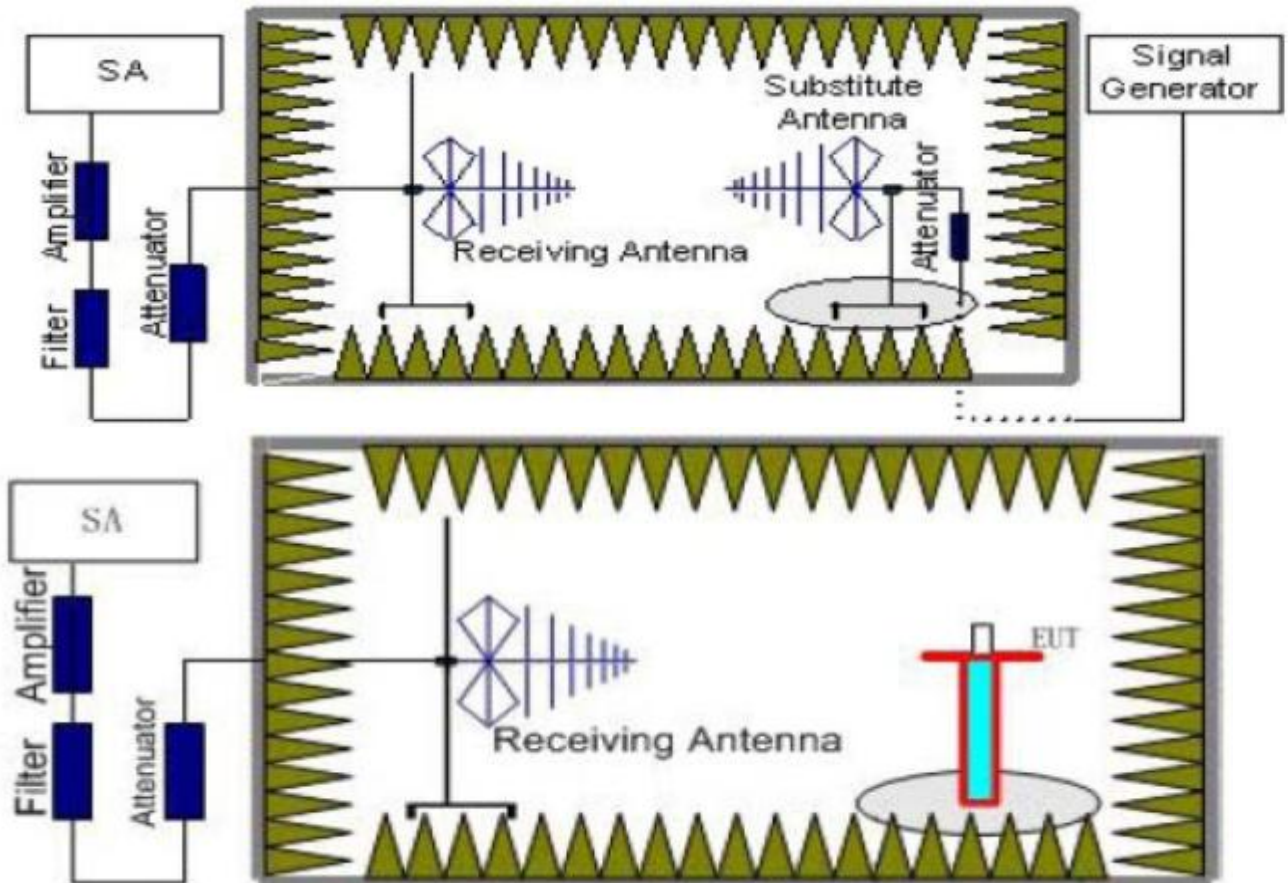

TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.

5. reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below: $\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$
We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:
 $\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.
2. $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
3. We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 5 Channel Bandwidth 1.4MHz QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-19.14	2.42	8.45	36.82	23.71	21.56	38.45	16.89	V
836.5	-17.03	3.46	8.45	36.82	24.78	22.63	38.45	15.82	V
848.3	-19.94	2.53	8.36	36.82	22.71	20.56	38.45	17.89	V

LTE FDD Band 5 Channel Bandwidth 3MHz QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-17.78	2.42	8.45	36.82	25.07	22.92	38.45	15.53	V
836.5	-17.37	3.46	8.45	36.82	24.44	22.29	38.45	16.16	V
847.5	-19.06	2.53	8.36	36.82	23.59	21.44	38.45	17.01	V

LTE FDD Band 5 Channel Bandwidth 5MHz QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-18.95	2.42	8.45	36.82	23.9	21.75	38.45	16.7	V
836.5	-16.56	3.46	8.45	36.82	25.25	23.1	38.45	15.35	V
846.5	-20.88	2.53	8.36	36.82	21.77	19.62	38.45	18.83	V

LTE FDD Band 5 Channel Bandwidth 10MHz QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.67	2.42	8.45	36.82	24.18	22.03	38.45	16.42	V
836.5	-15.22	3.46	8.45	36.82	26.59	24.44	38.45	14.01	V
844.0	-17.33	2.53	8.36	36.82	25.32	23.17	38.45	15.28	V

**LTE FDD Band 5_Channel Bandwidth 1.4MHz_16QAM**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-17.74	2.42	8.45	36.82	25.11	22.96	38.45	15.49	V
836.5	-16.73	3.46	8.45	36.82	25.08	22.93	38.45	15.52	V
848.3	-19.85	2.53	8.36	36.82	22.8	20.65	38.45	17.8	V

LTE FDD Band 5_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-17.73	2.42	8.45	36.82	25.12	22.97	38.45	15.48	V
836.5	-16.63	3.46	8.45	36.82	25.18	23.03	38.45	15.42	V
847.5	-19.29	2.53	8.36	36.82	23.36	21.21	38.45	17.24	V

LTE FDD Band 5_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-17.01	2.42	8.45	36.82	25.84	23.69	38.45	14.76	V
836.5	-16.68	3.46	8.45	36.82	25.13	22.98	38.45	15.47	V
846.5	-18.53	2.53	8.36	36.82	24.12	21.97	38.45	16.48	V

LTE FDD Band 5_Channel Bandwidth 10MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-17.14	2.42	8.45	36.82	25.71	23.56	38.45	14.89	V
836.5	-15.42	3.46	8.45	36.82	26.39	24.24	38.45	14.21	V
844.0	-18.36	2.53	8.36	36.82	24.29	22.14	38.45	16.31	V

4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

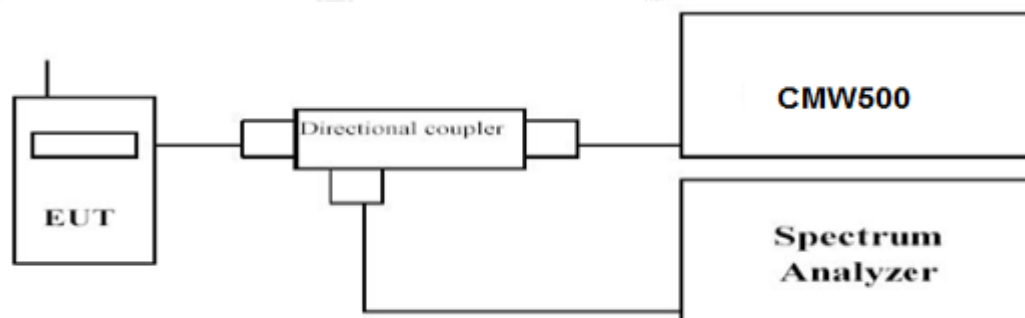

TEST PROCEDURE


1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS


Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.


LTE FDD Band 5				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
1.4 MHz	824.7	1RB#0	5.71	6.13
	836.5		5.29	6.27
	848.3		5.28	6.30
3 MHz	825.5	1RB#0	5.43	6.44
	836.5		5.49	6.32
	847.5		5.42	5.93
5 MHz	826.5	1RB#0	5.48	6.20
	836.5		5.32	6.11
	846.5		5.06	6.28
10 MHz	829.0	1RB#0	5.74	6.19
	836.5		5.31	6.26
	844.0		5.74	6.43

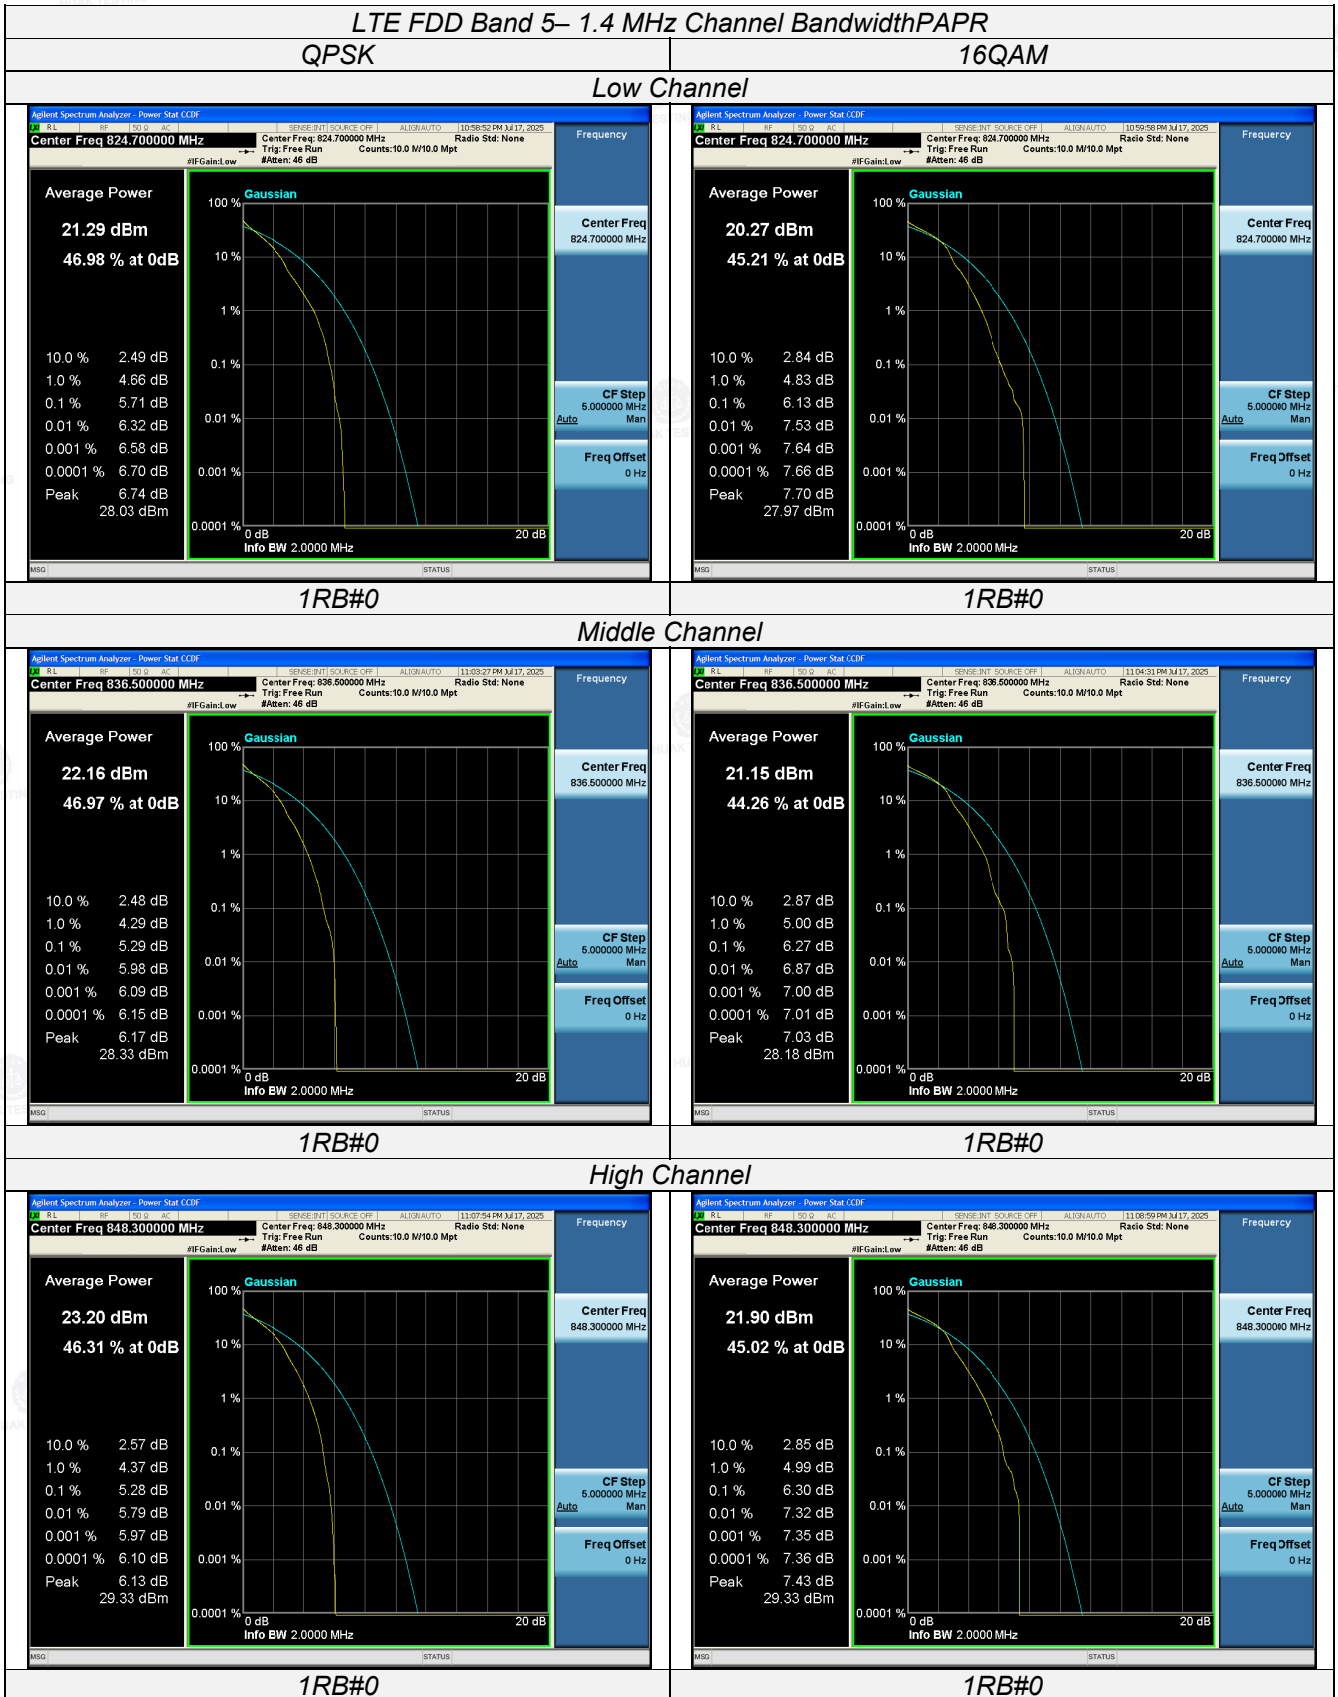


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

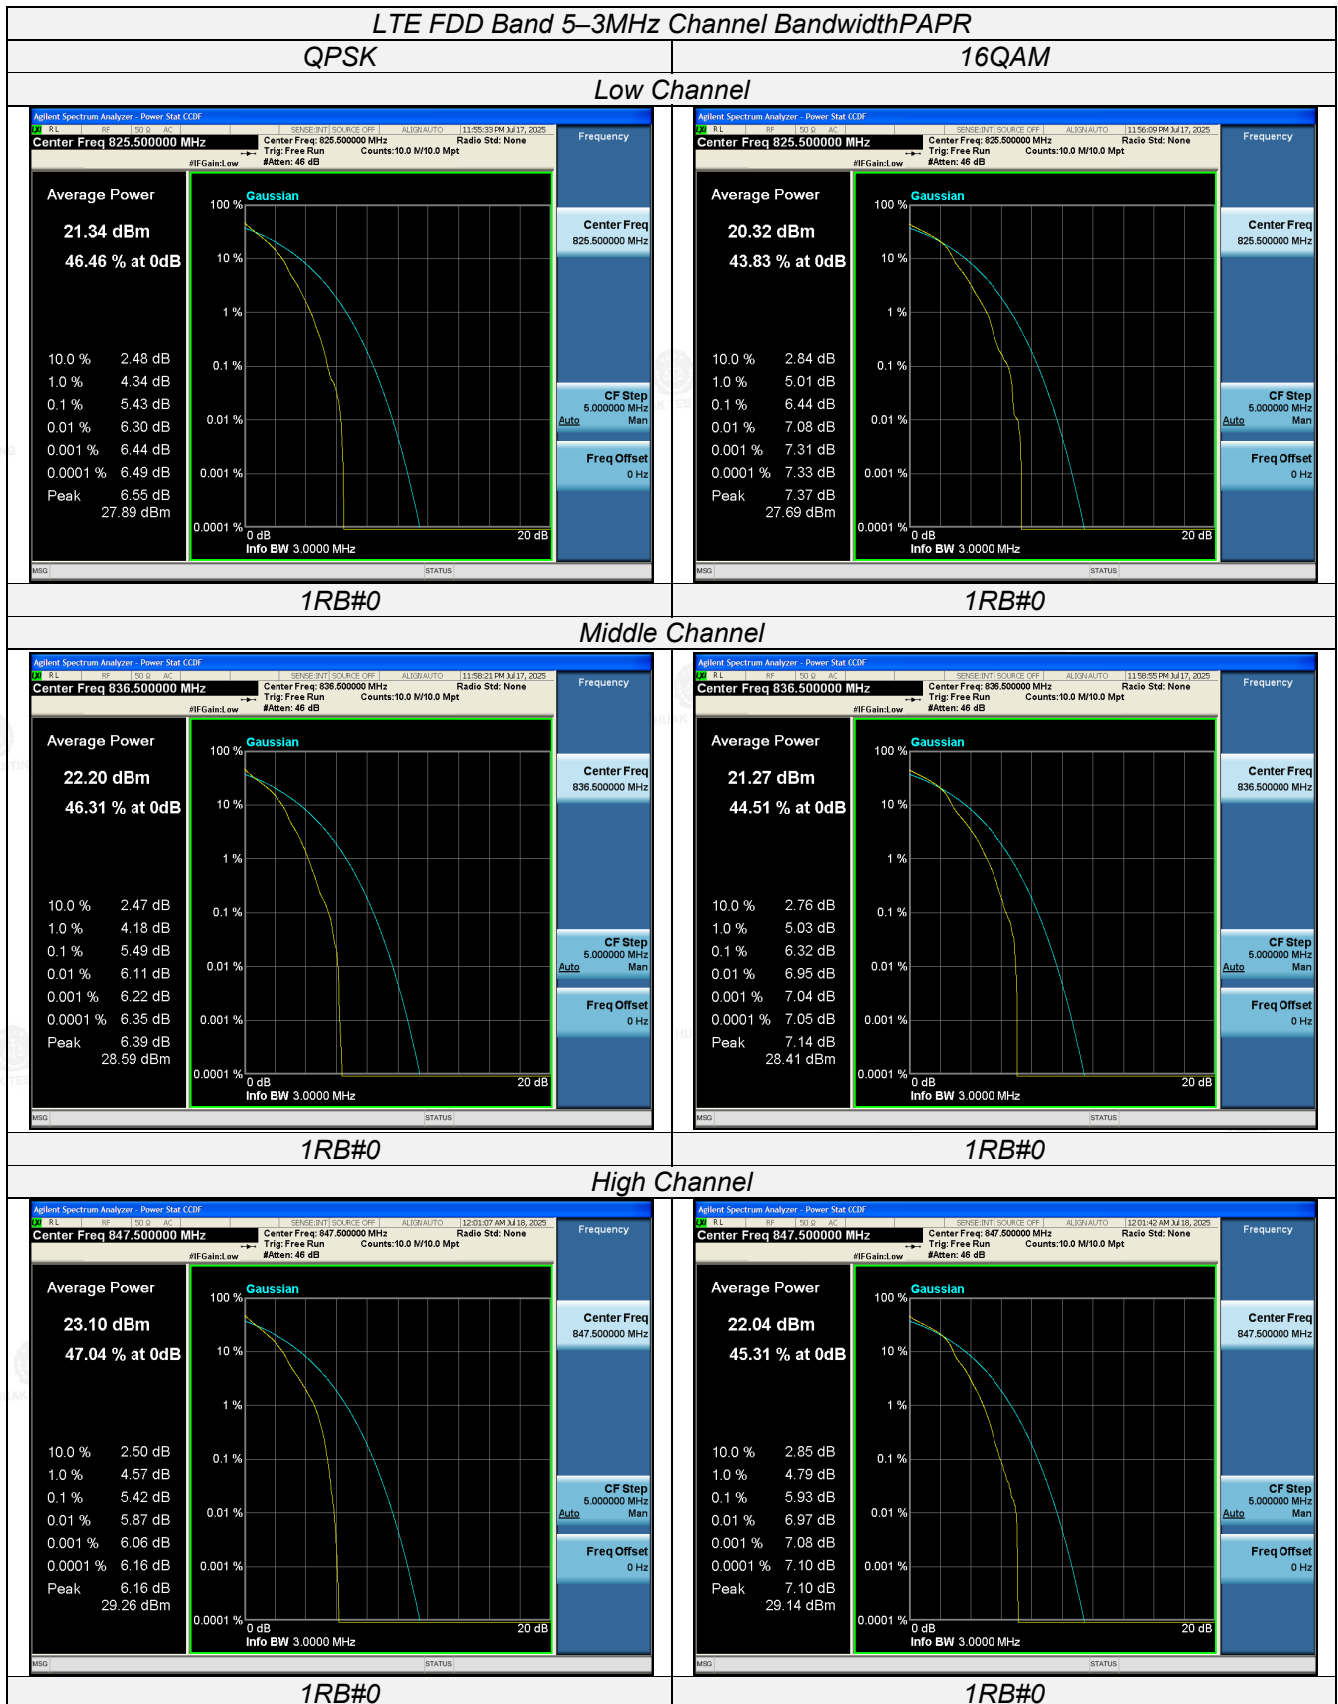

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

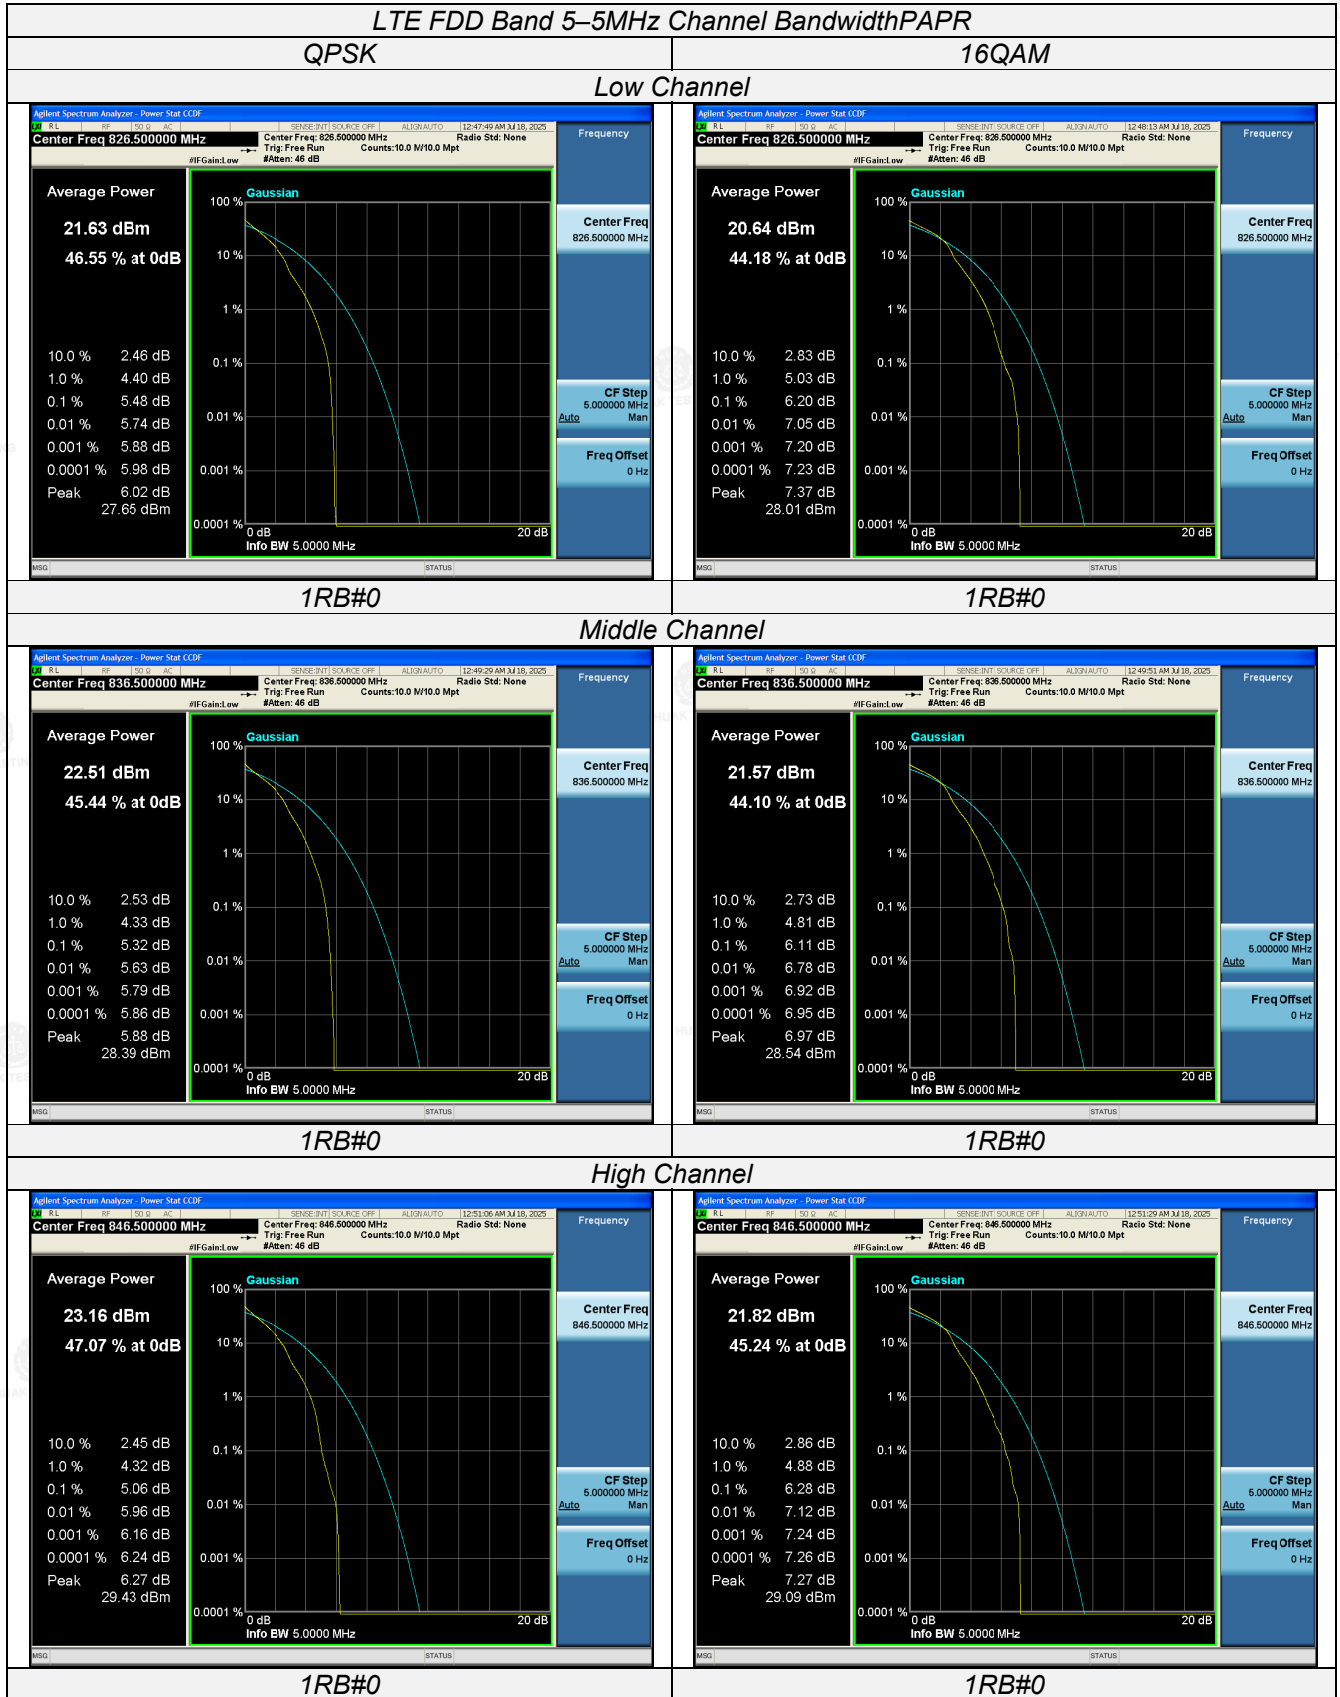

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

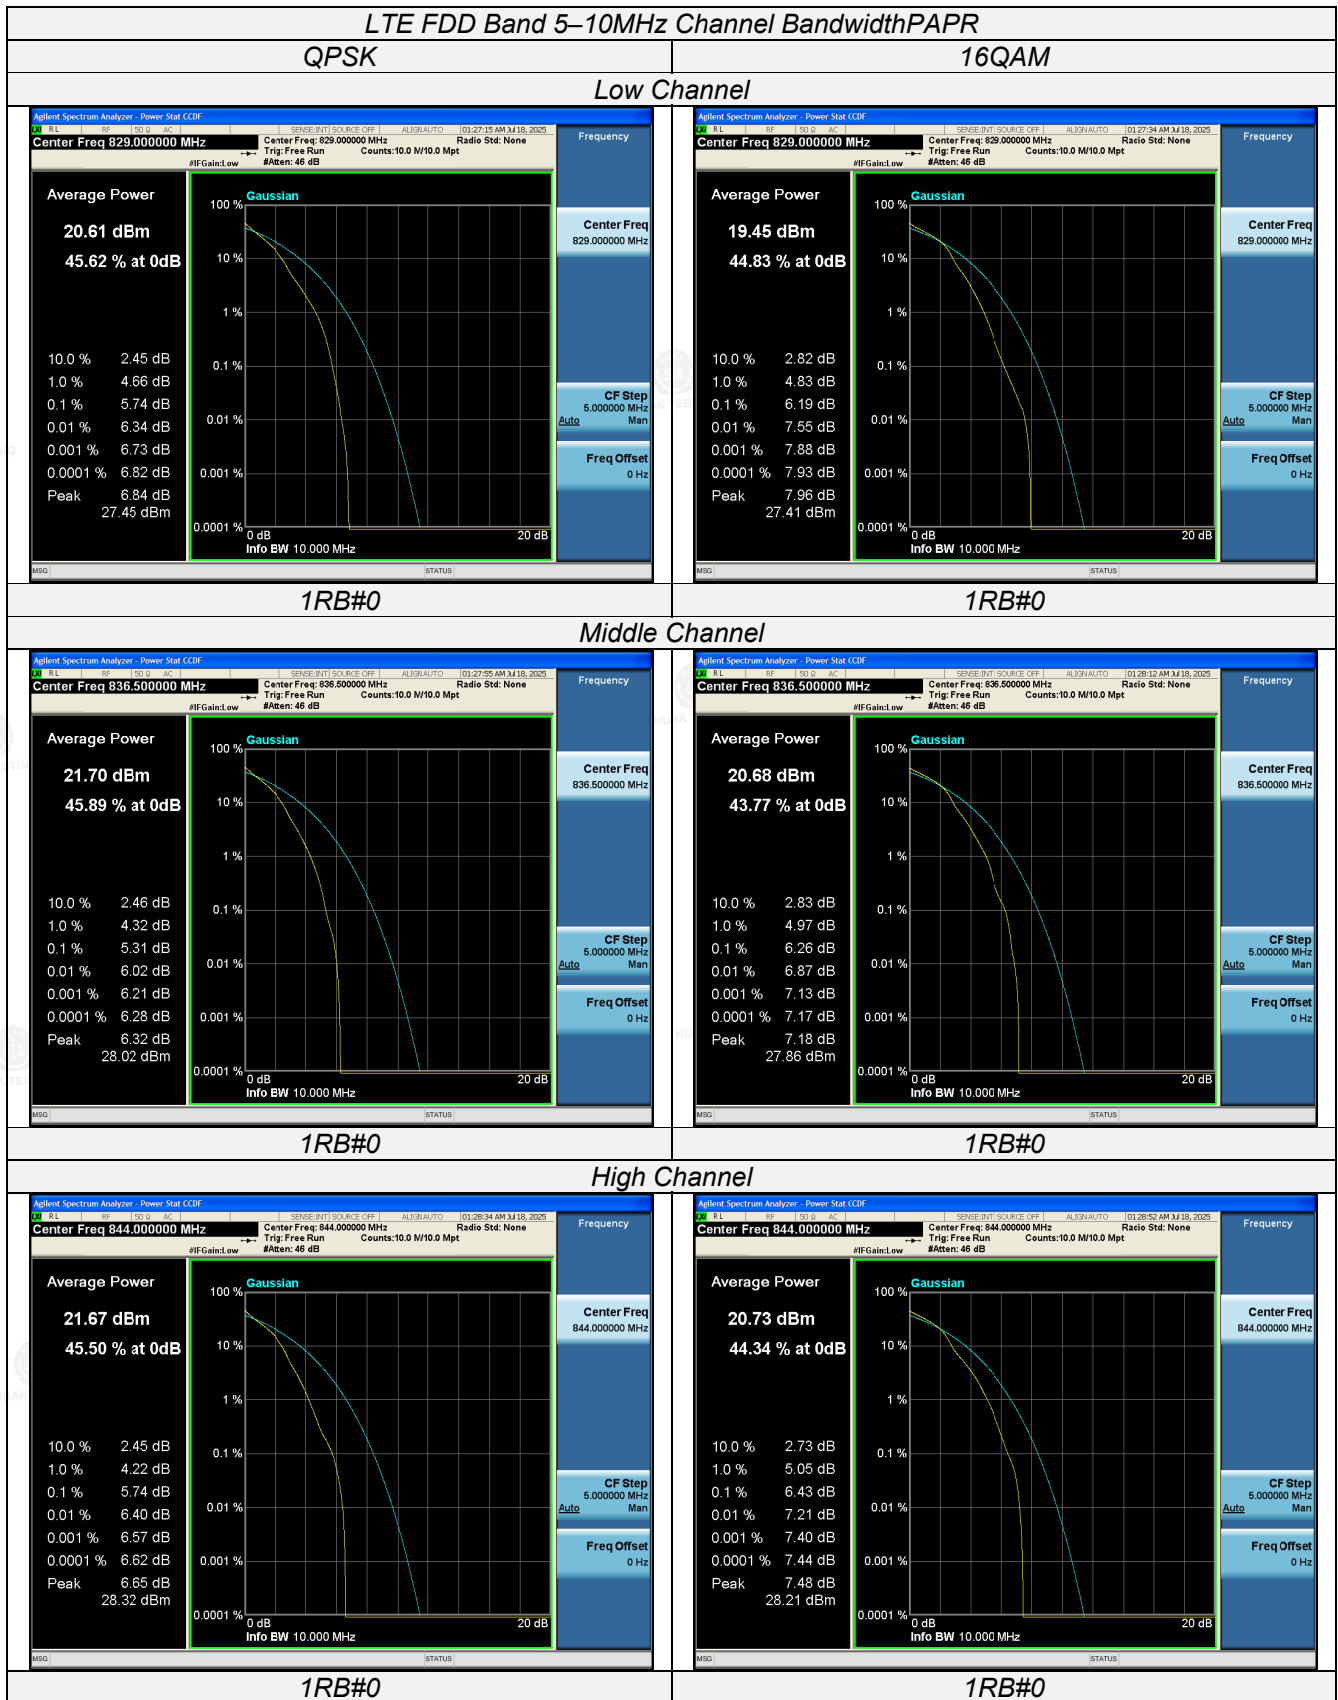


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

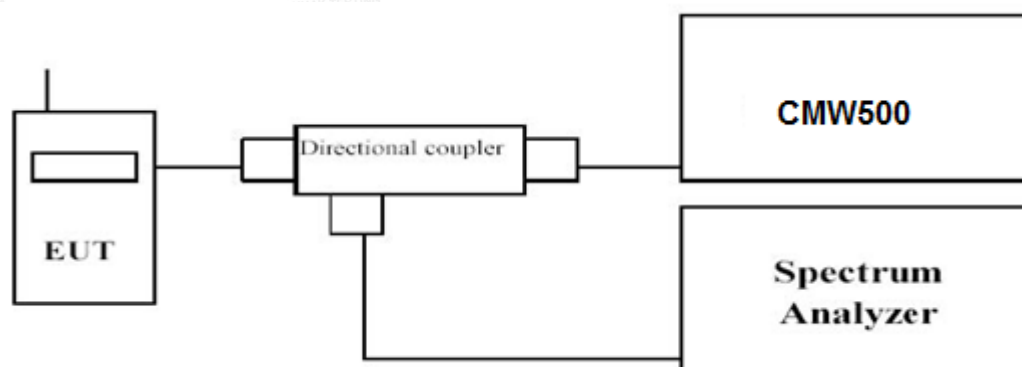

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW≥3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.


LTE FDD Band 5						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	824.7	1.287	1.300	1.0935	1.0936
		836.5	1.297	1.289	1.0899	1.0952
		848.3	1.275	1.289	1.0924	1.0917
3 MHz	15RB#0	825.5	3.046	3.016	2.7108	2.7056
		836.5	3.009	3.015	2.6988	2.6940
		847.5	3.007	2.980	2.6928	2.6939
5 MHz	25RB#0	826.5	5.130	5.100	4.5149	4.5061
		836.5	5.106	5.103	4.5092	4.5135
		846.5	5.106	5.084	4.5110	4.4972
10 MHz	50RB#0(QPSK) 25RB#25(16QAM)	829.0	10.04	6.386	8.9391	4.7654
		836.5	9.907	6.213	8.9283	4.7194
		844.0	10.03	6.363	8.9496	4.7193

LTE FDD Band 5- 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth


QPSK

16QAM

Low Channel

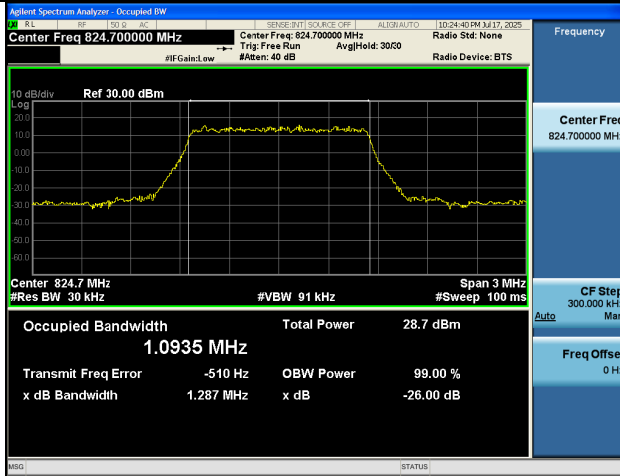


6RB#0

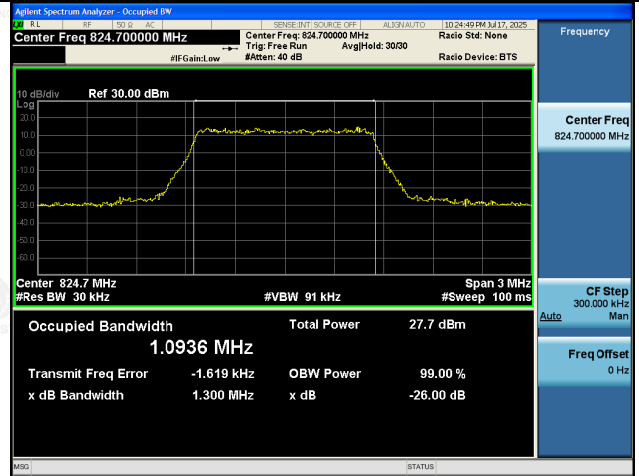


6RB#0

Middle Channel

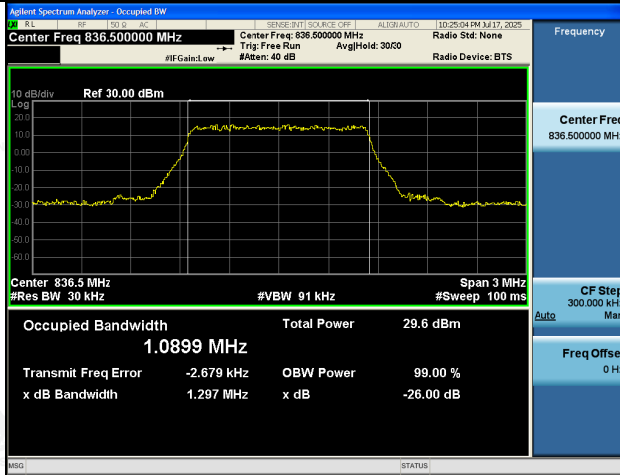


6RB#0

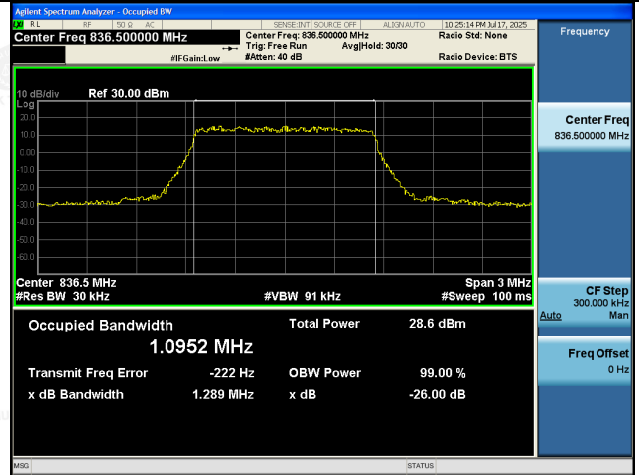


6RB#0

High Channel

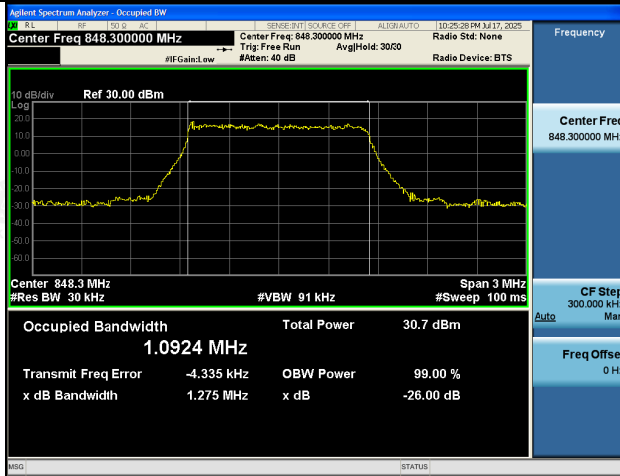

6RB#0

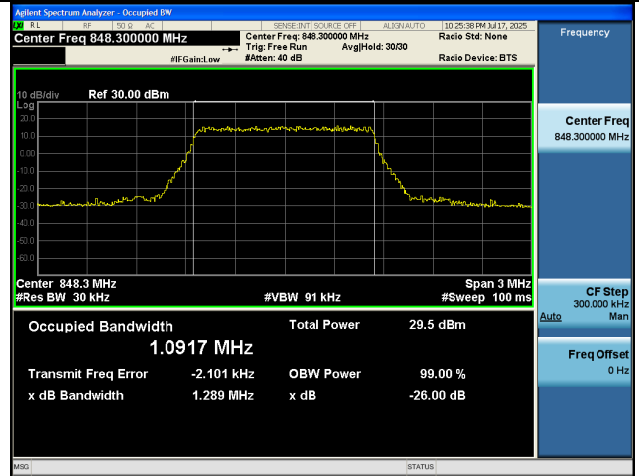

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

LTE FDD Band 5-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

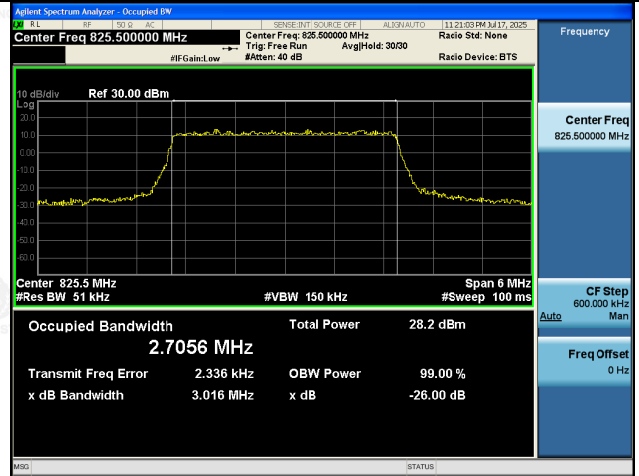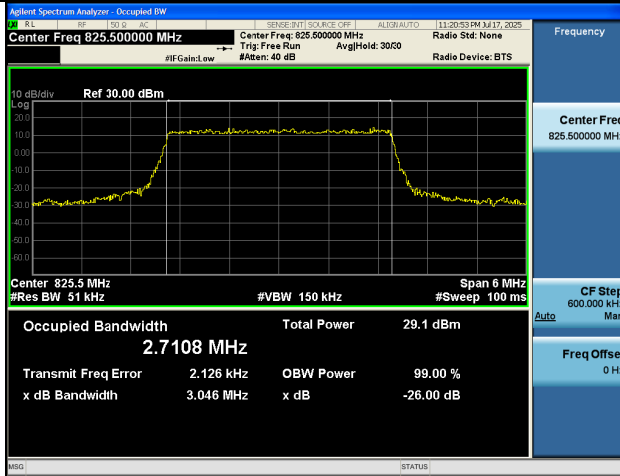

15RB#0

15RB#0



Middle Channel

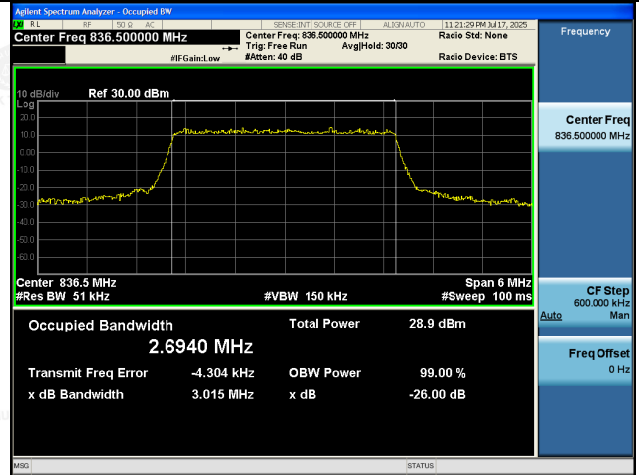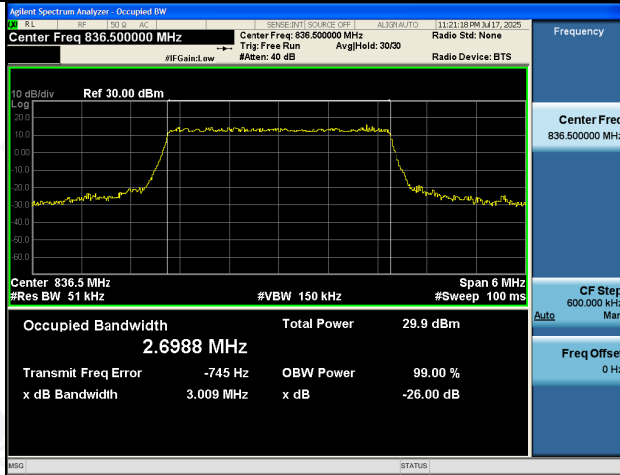

15RB#0


15RB#0

High Channel

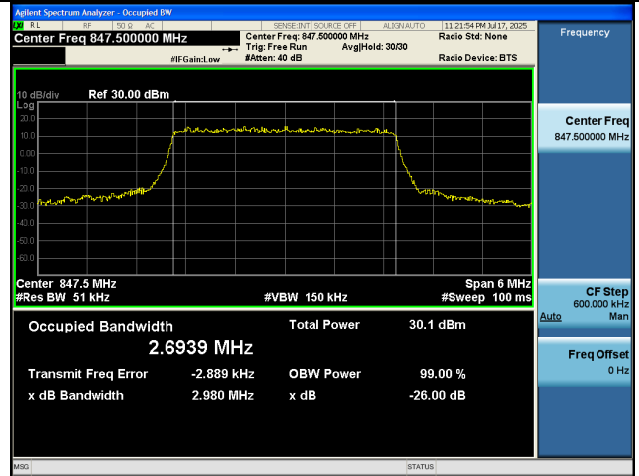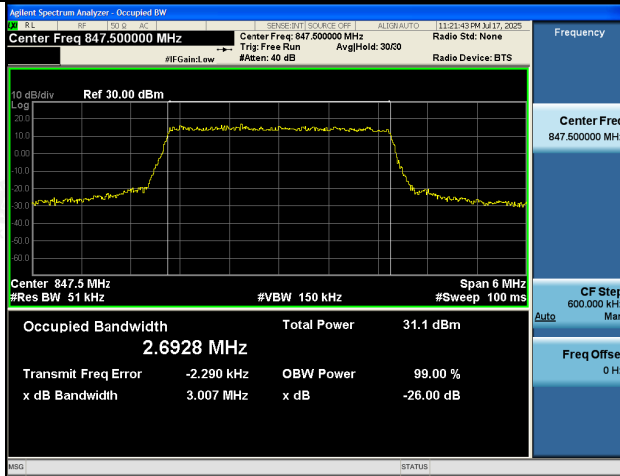

15RB#0


15RB#0

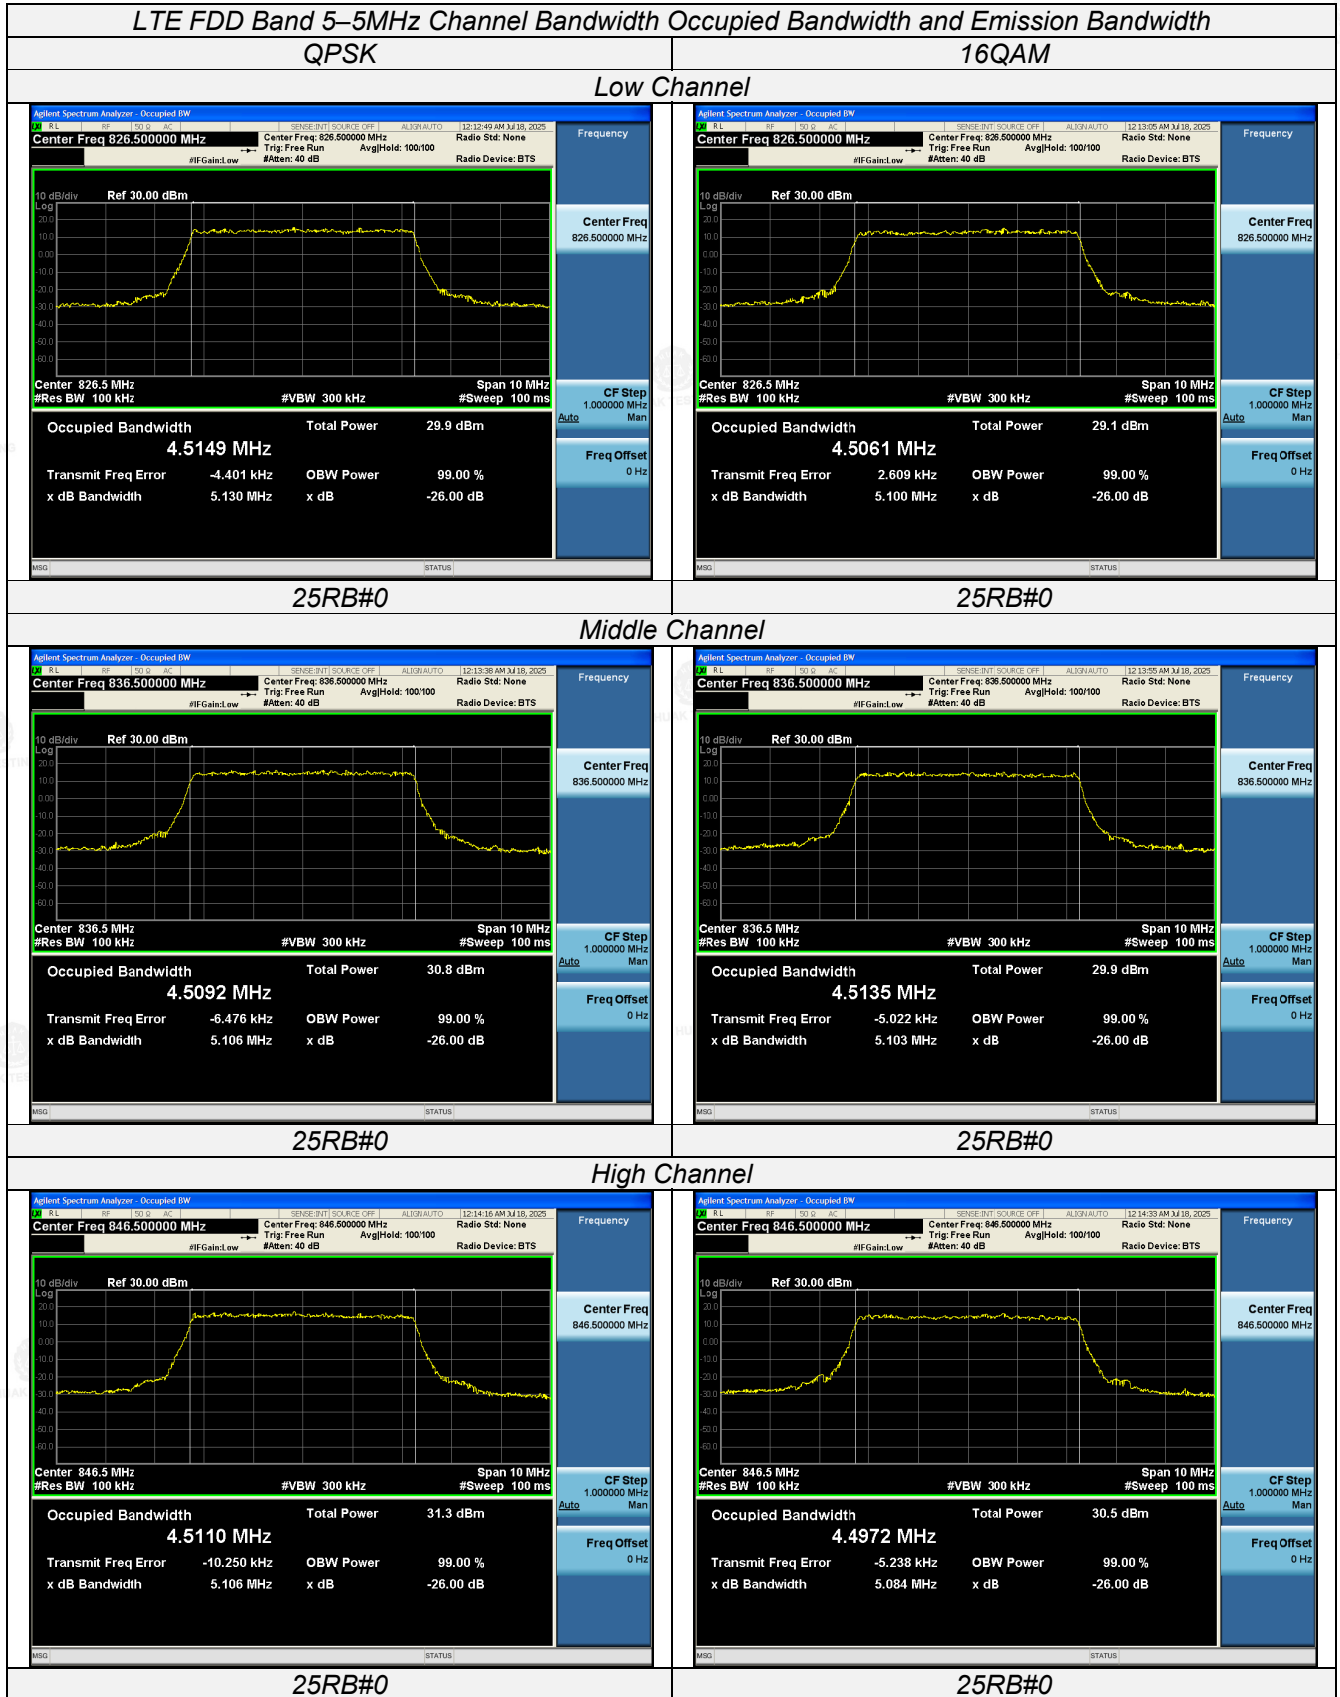


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

LTE FDD Band 5-10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

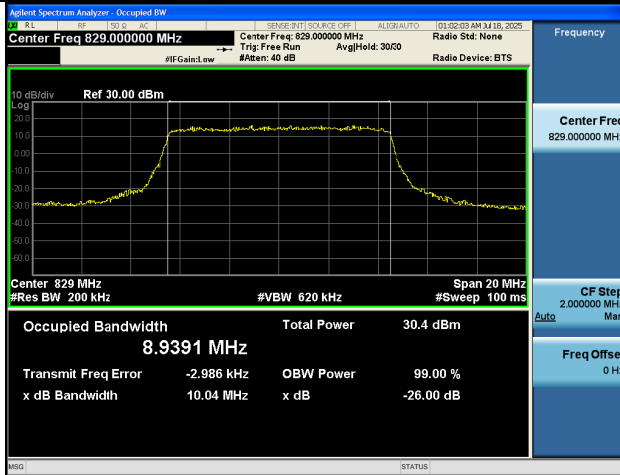



16QAM

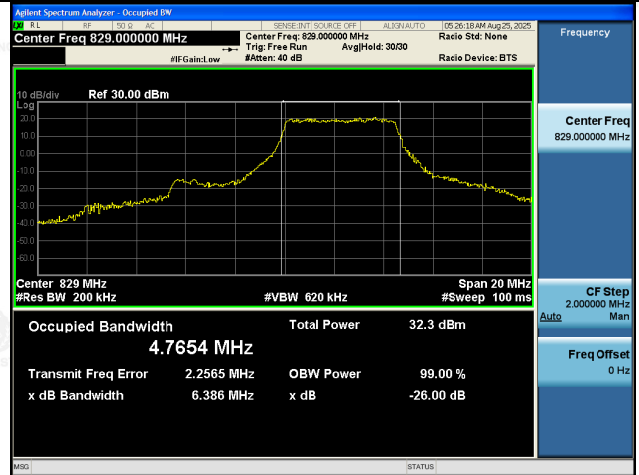

50RB#0

25RB#25



Low Channel

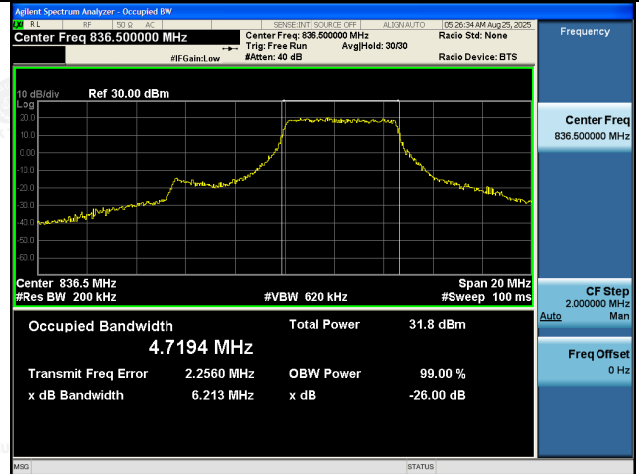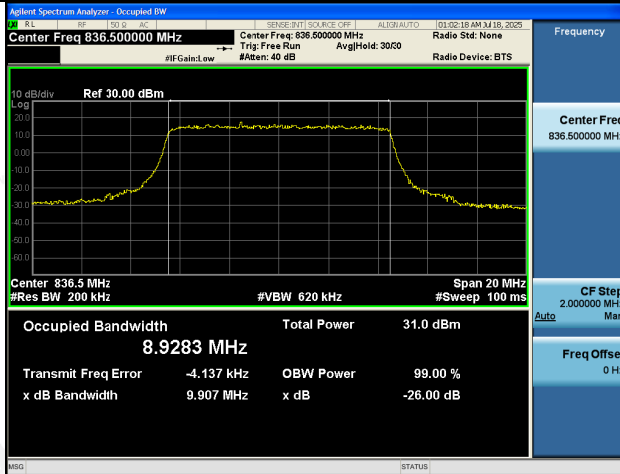

50RB#0

25RB#25

Middle Channel

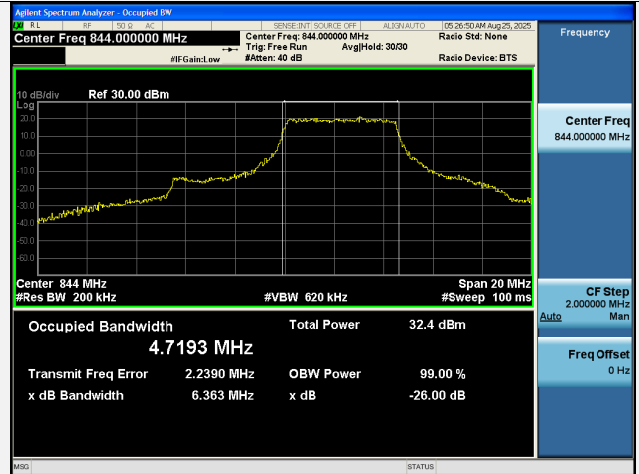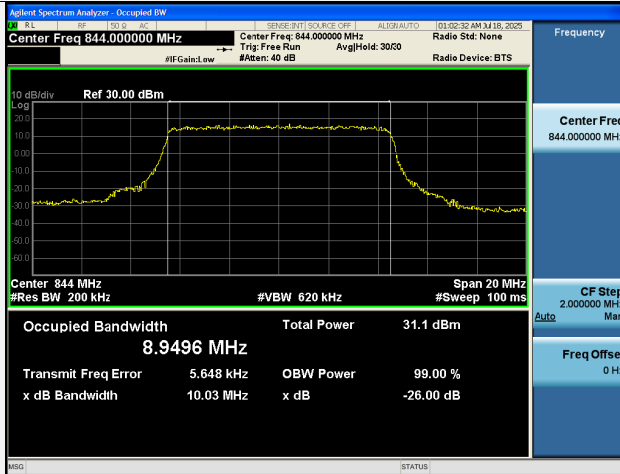

50RB#0

25RB#25

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.4 Band Edge Compliance

LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

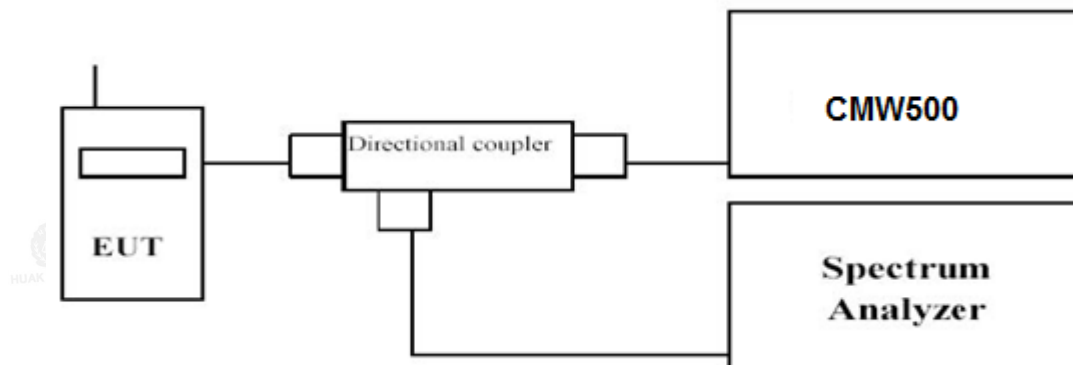


TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.


TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

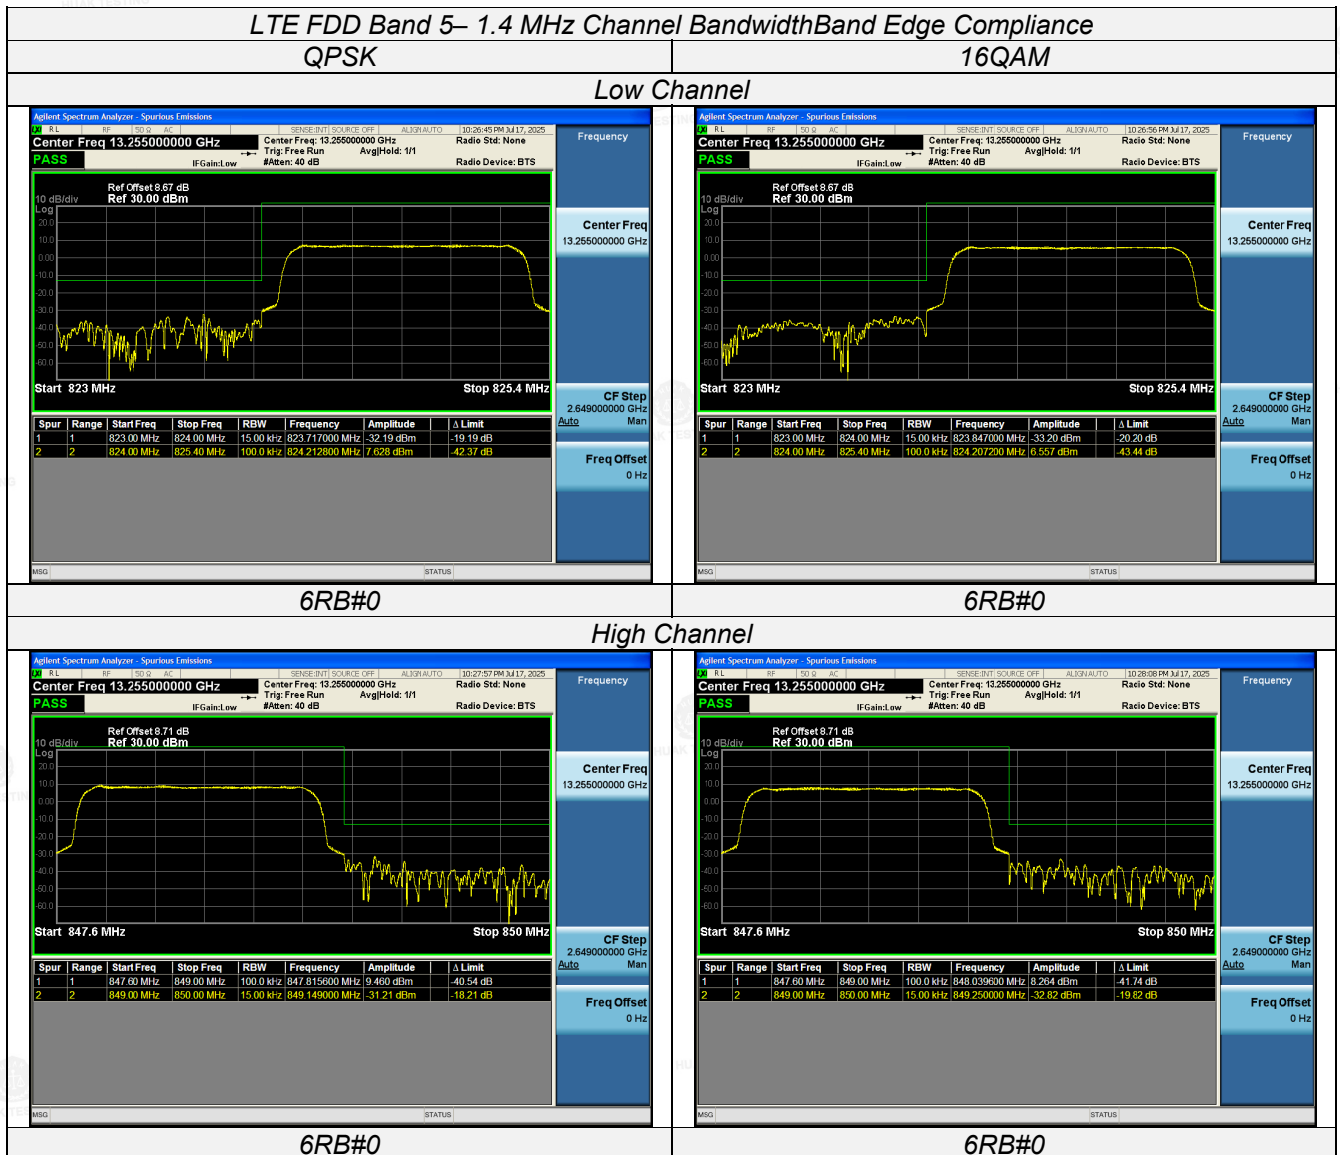


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

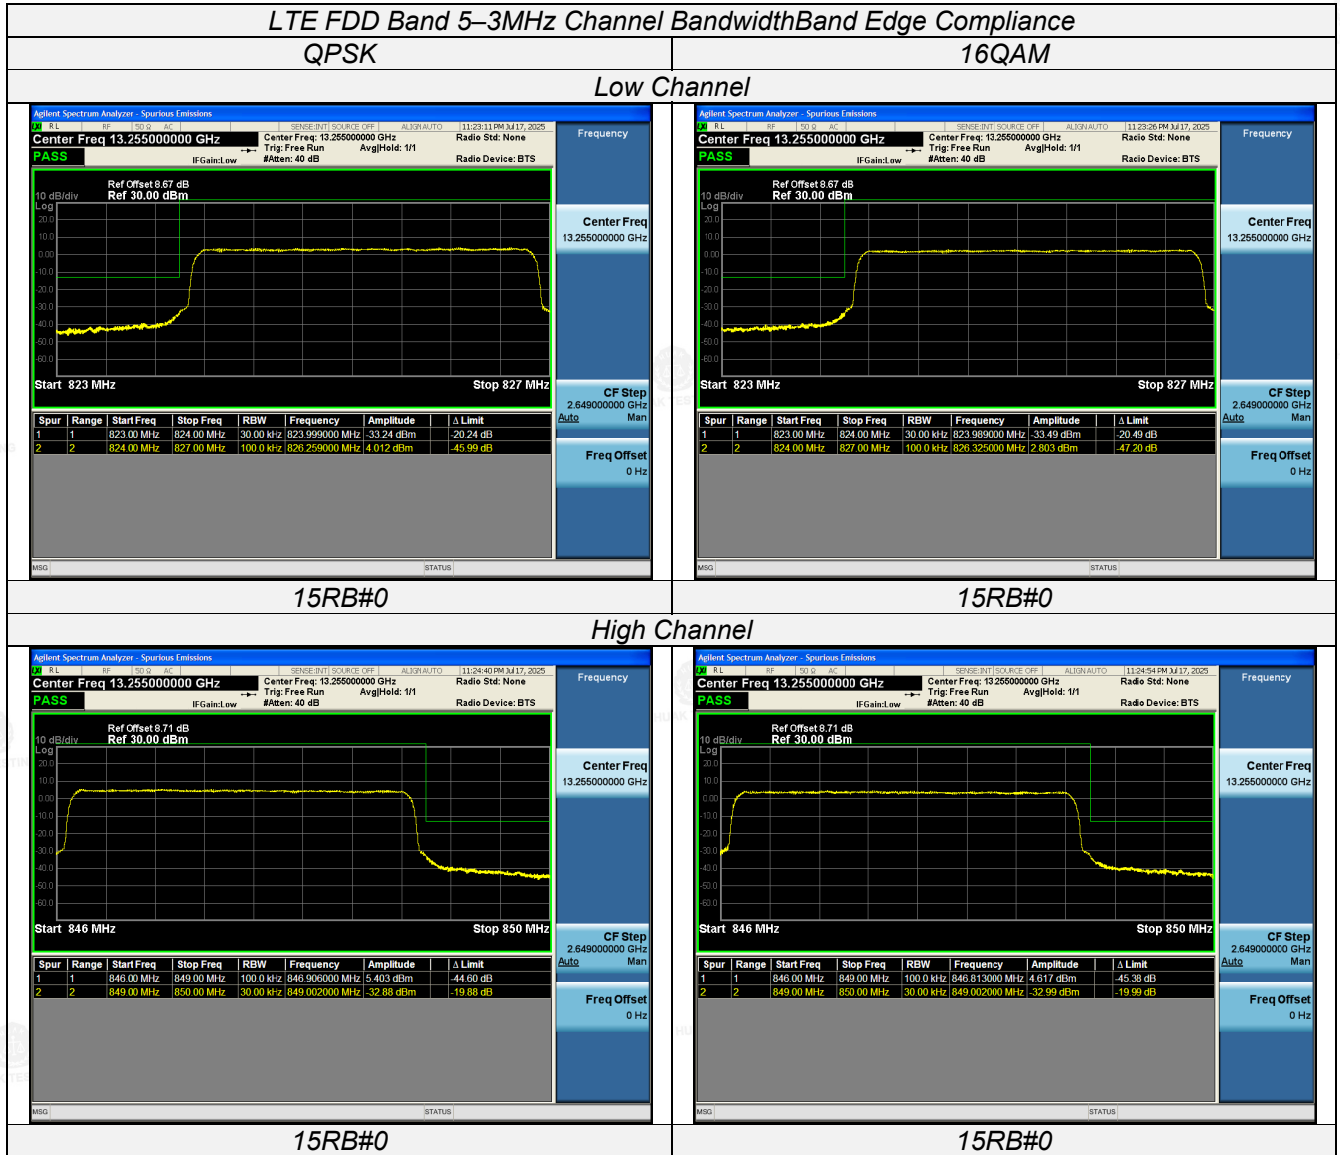


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

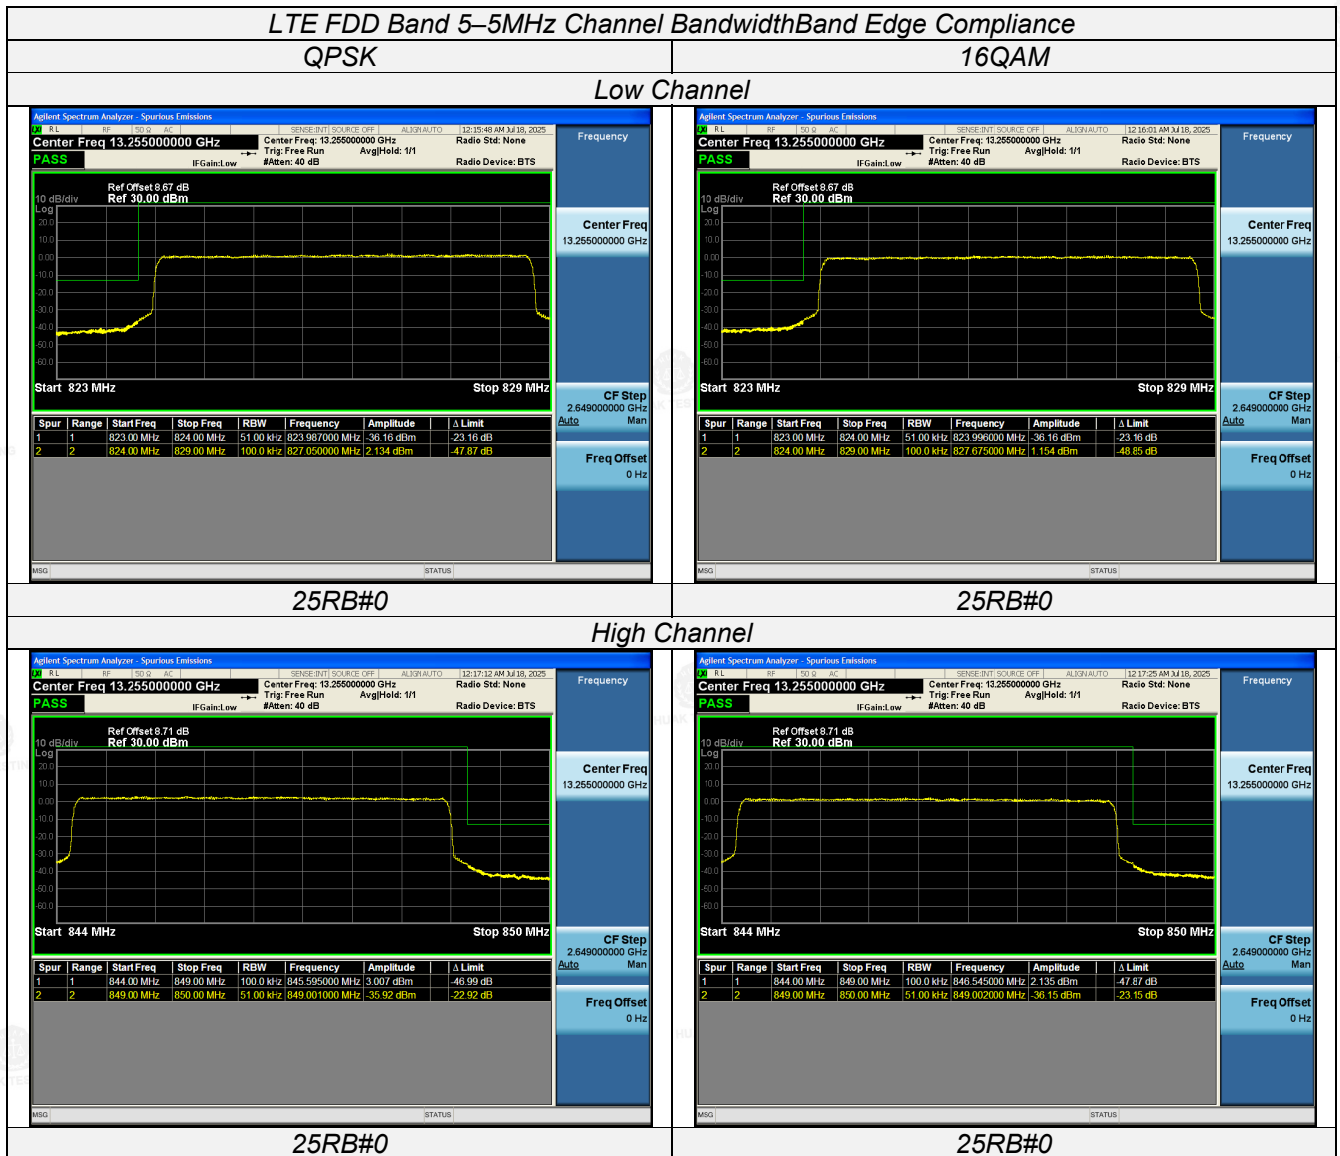

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

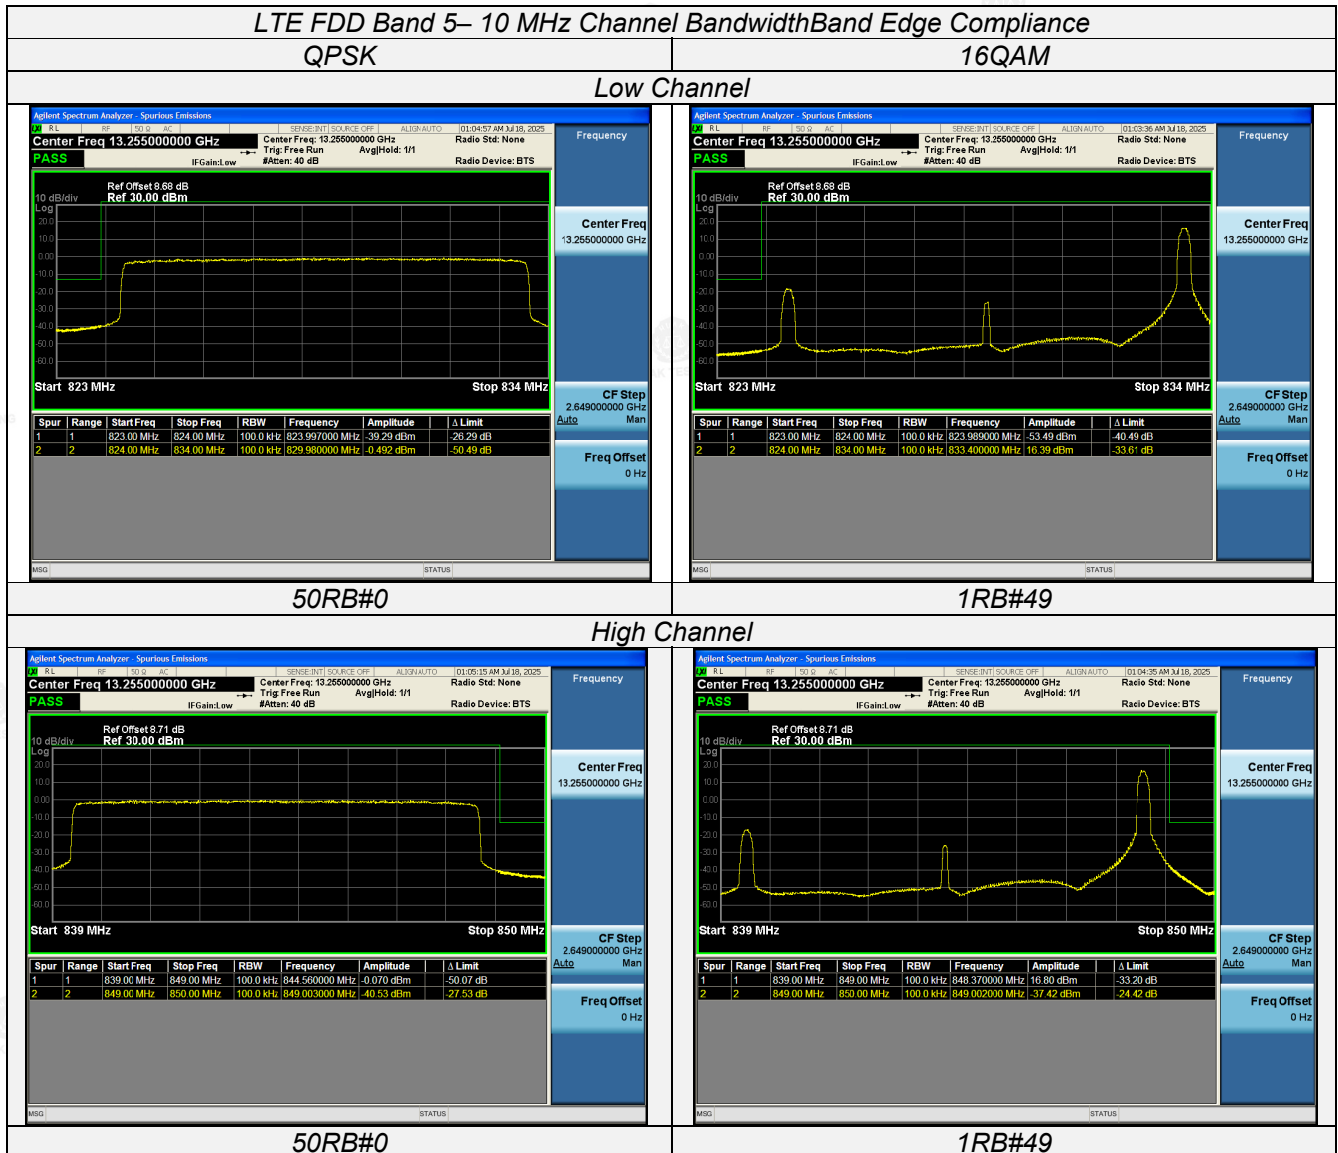

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.


Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.5 Spurious Emission on Antenna Port

LIMIT

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

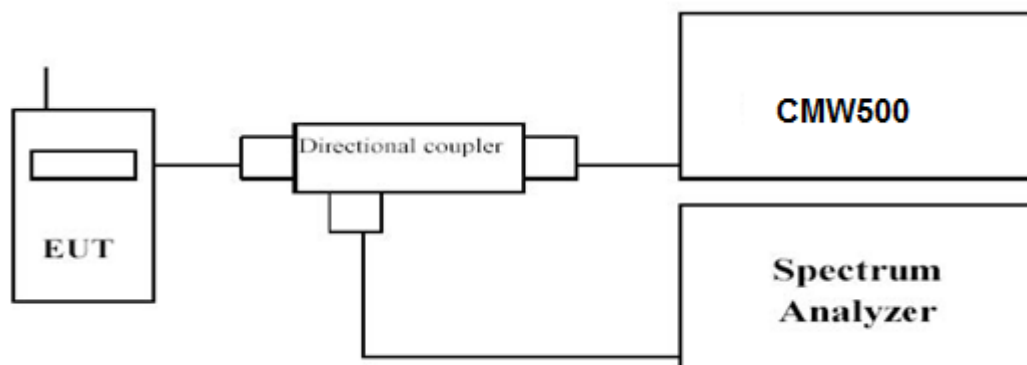

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.


- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10^{th} harmonic.
- Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 5	0.00015~0.03	10 KHz	30 KHz	Auto
	0.03~1	100 KHz	300 KHz	Auto
	1~3	1 MHz	3 MHz	Auto
	3~10	1 MHz	3 MHz	Auto



TEST RESULTS


Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case at the QPSK Mode for each Channel Bandwidth of LTE FDD Band 5.

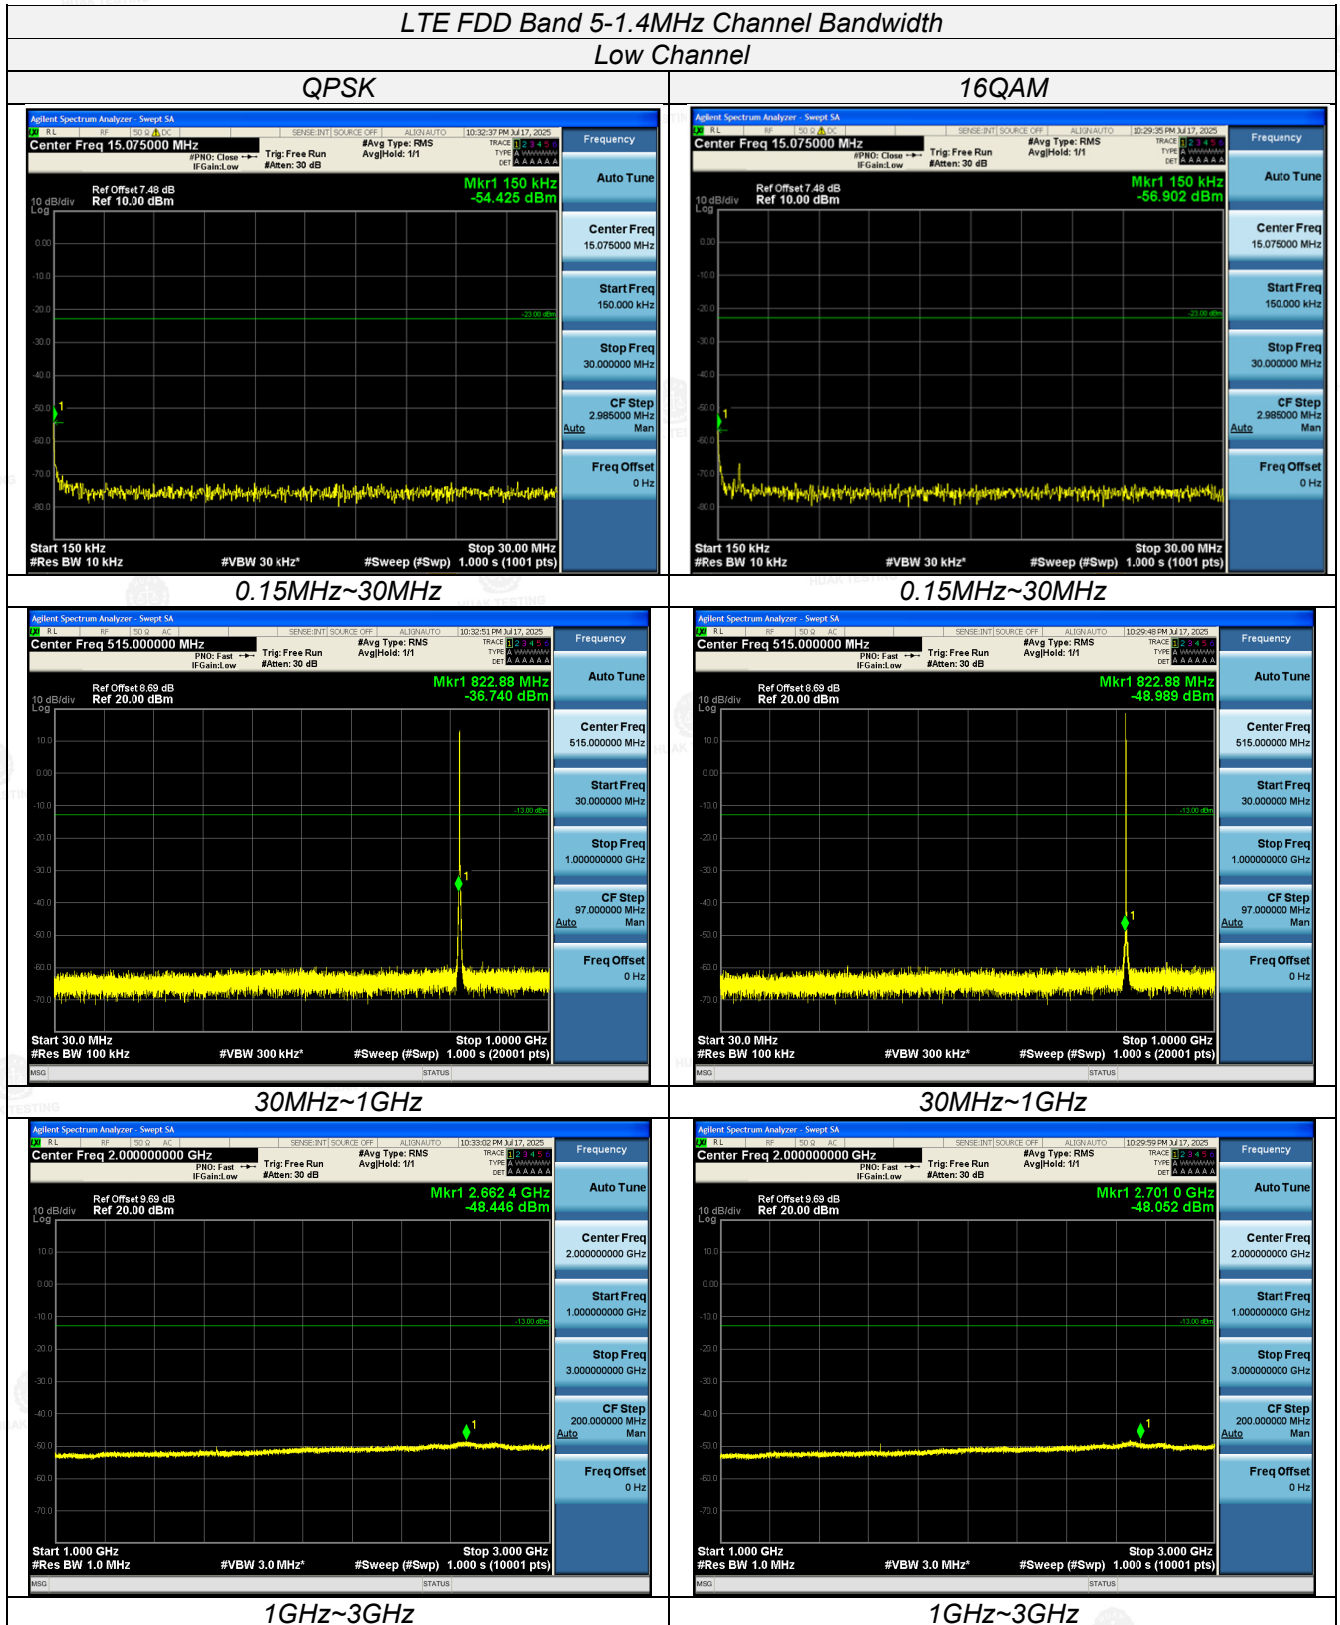


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

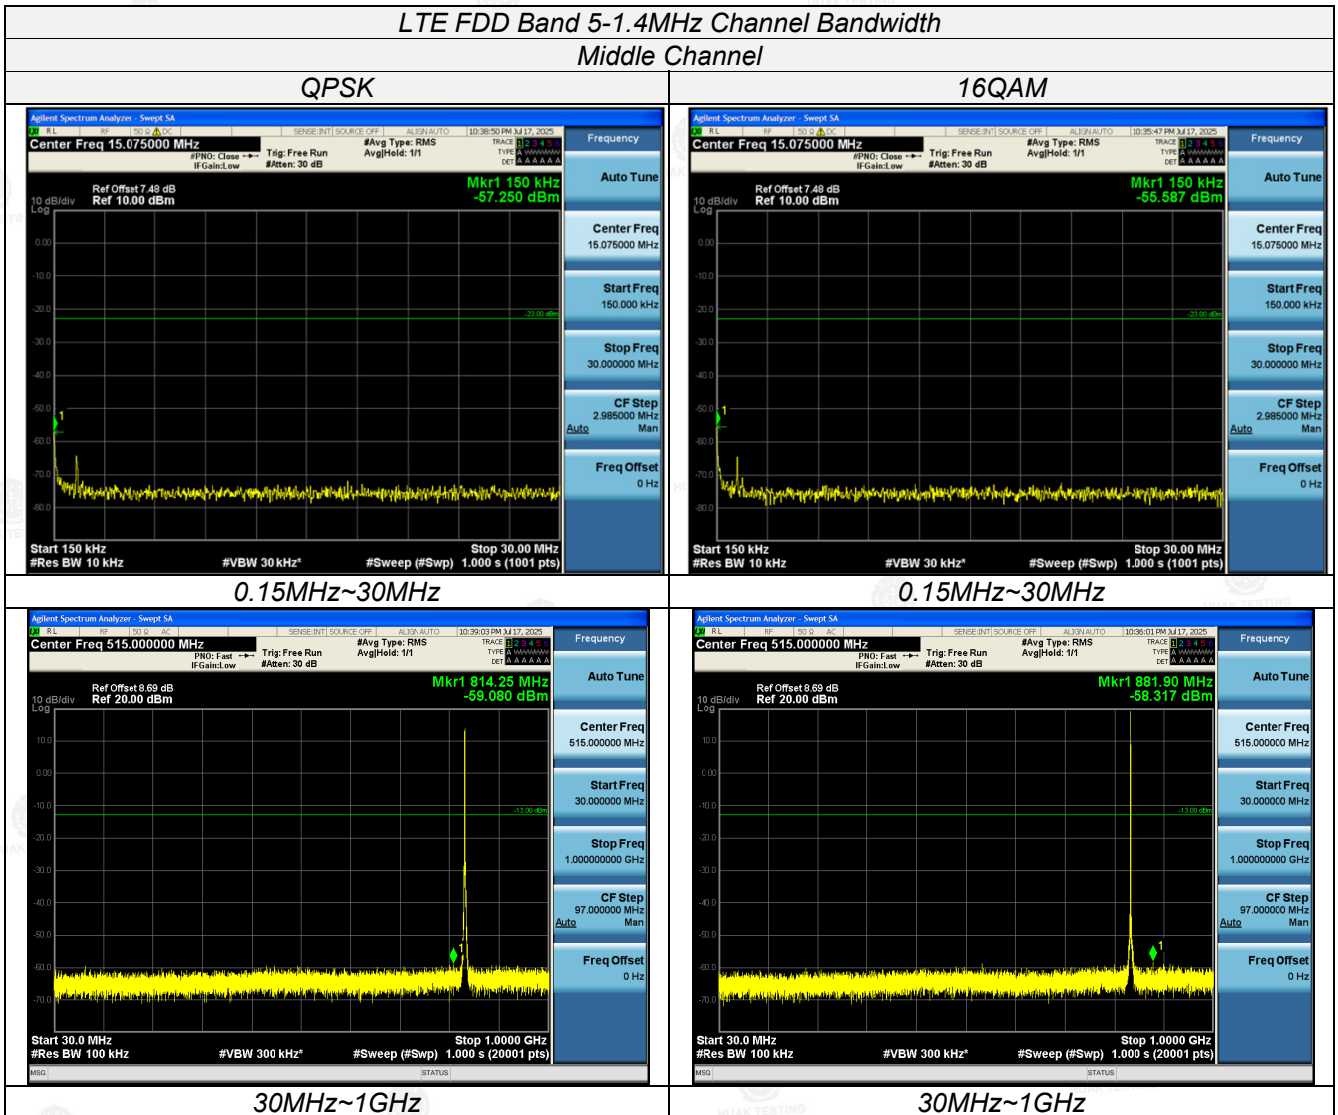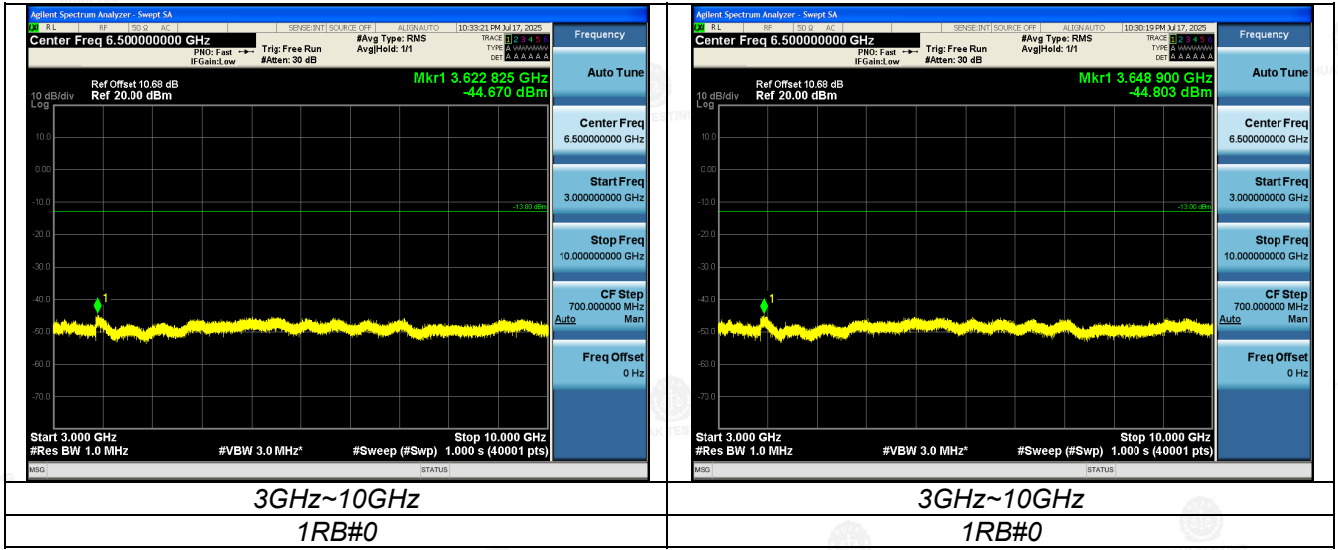

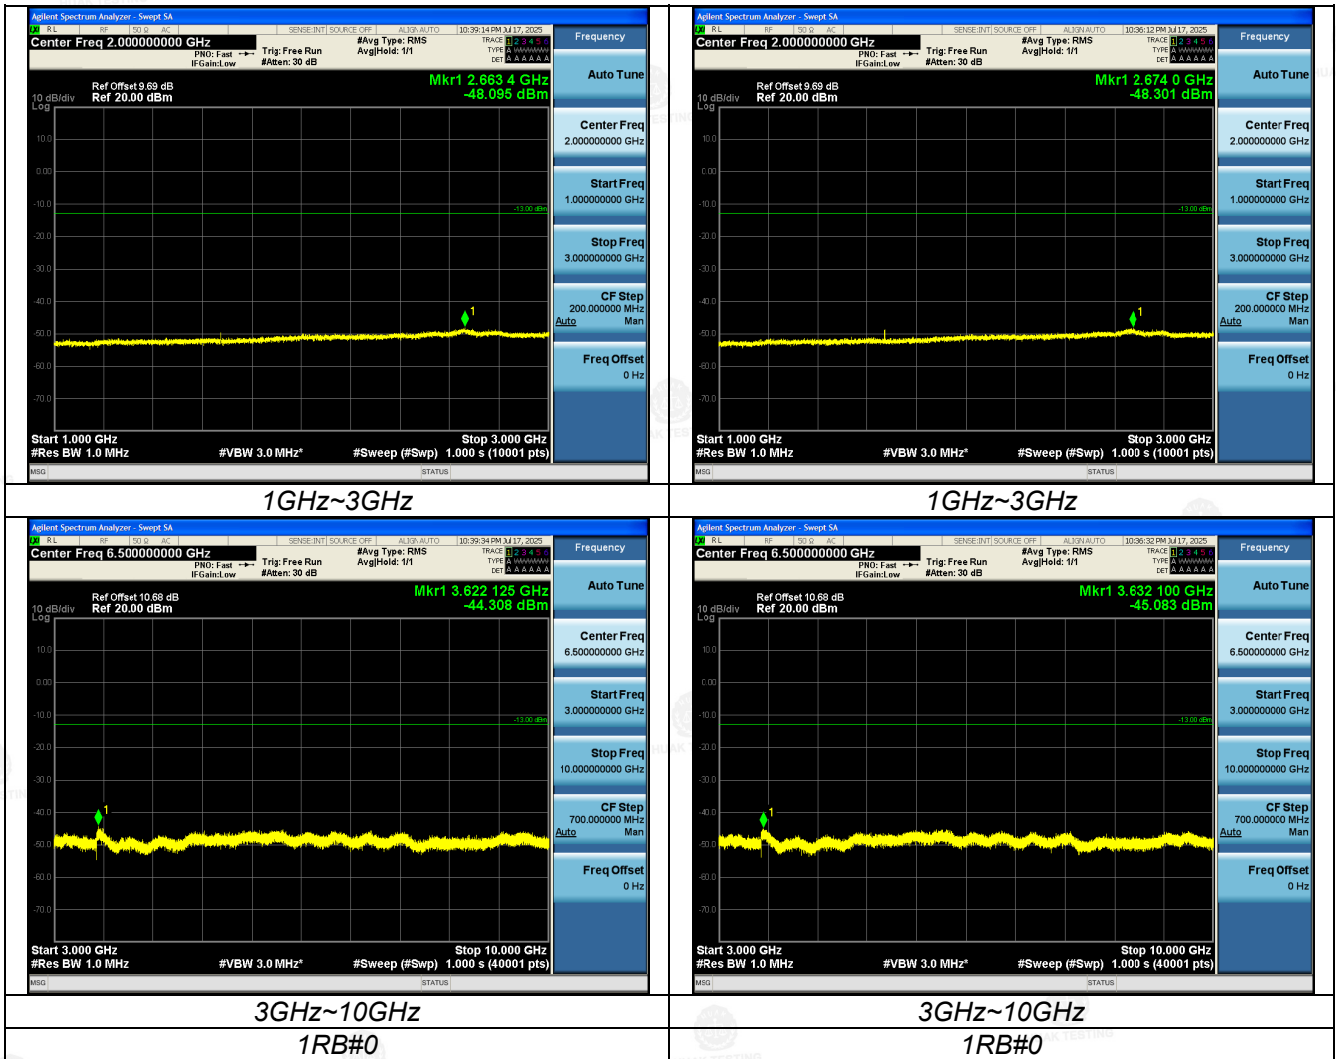


LTE FDD Band 5-1.4MHz Channel Bandwidth High Channel

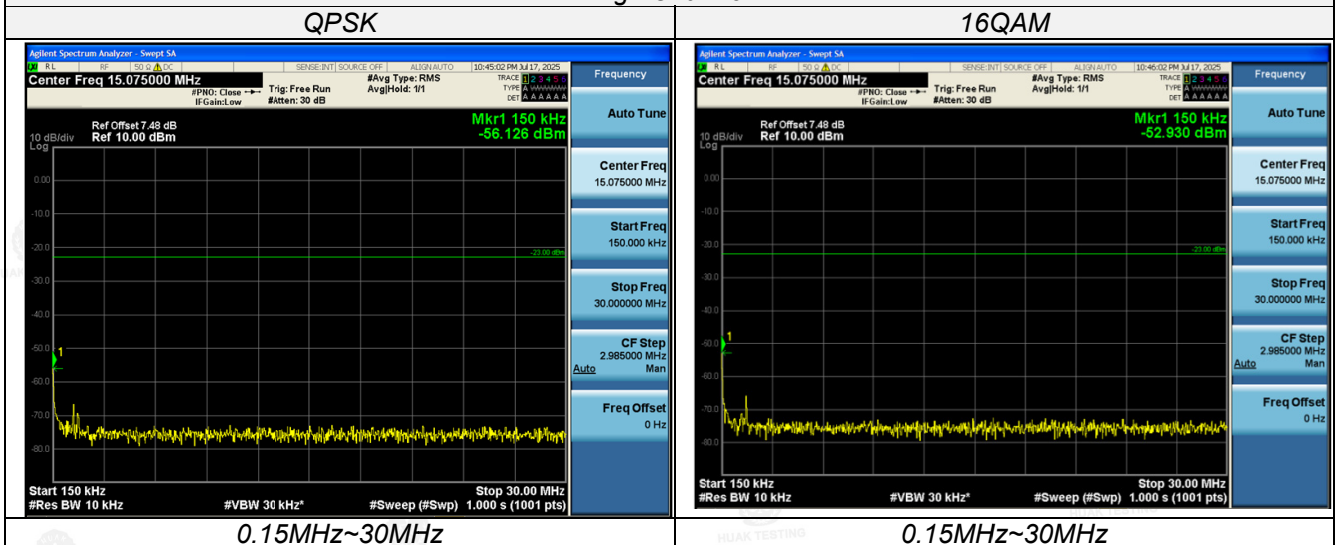

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

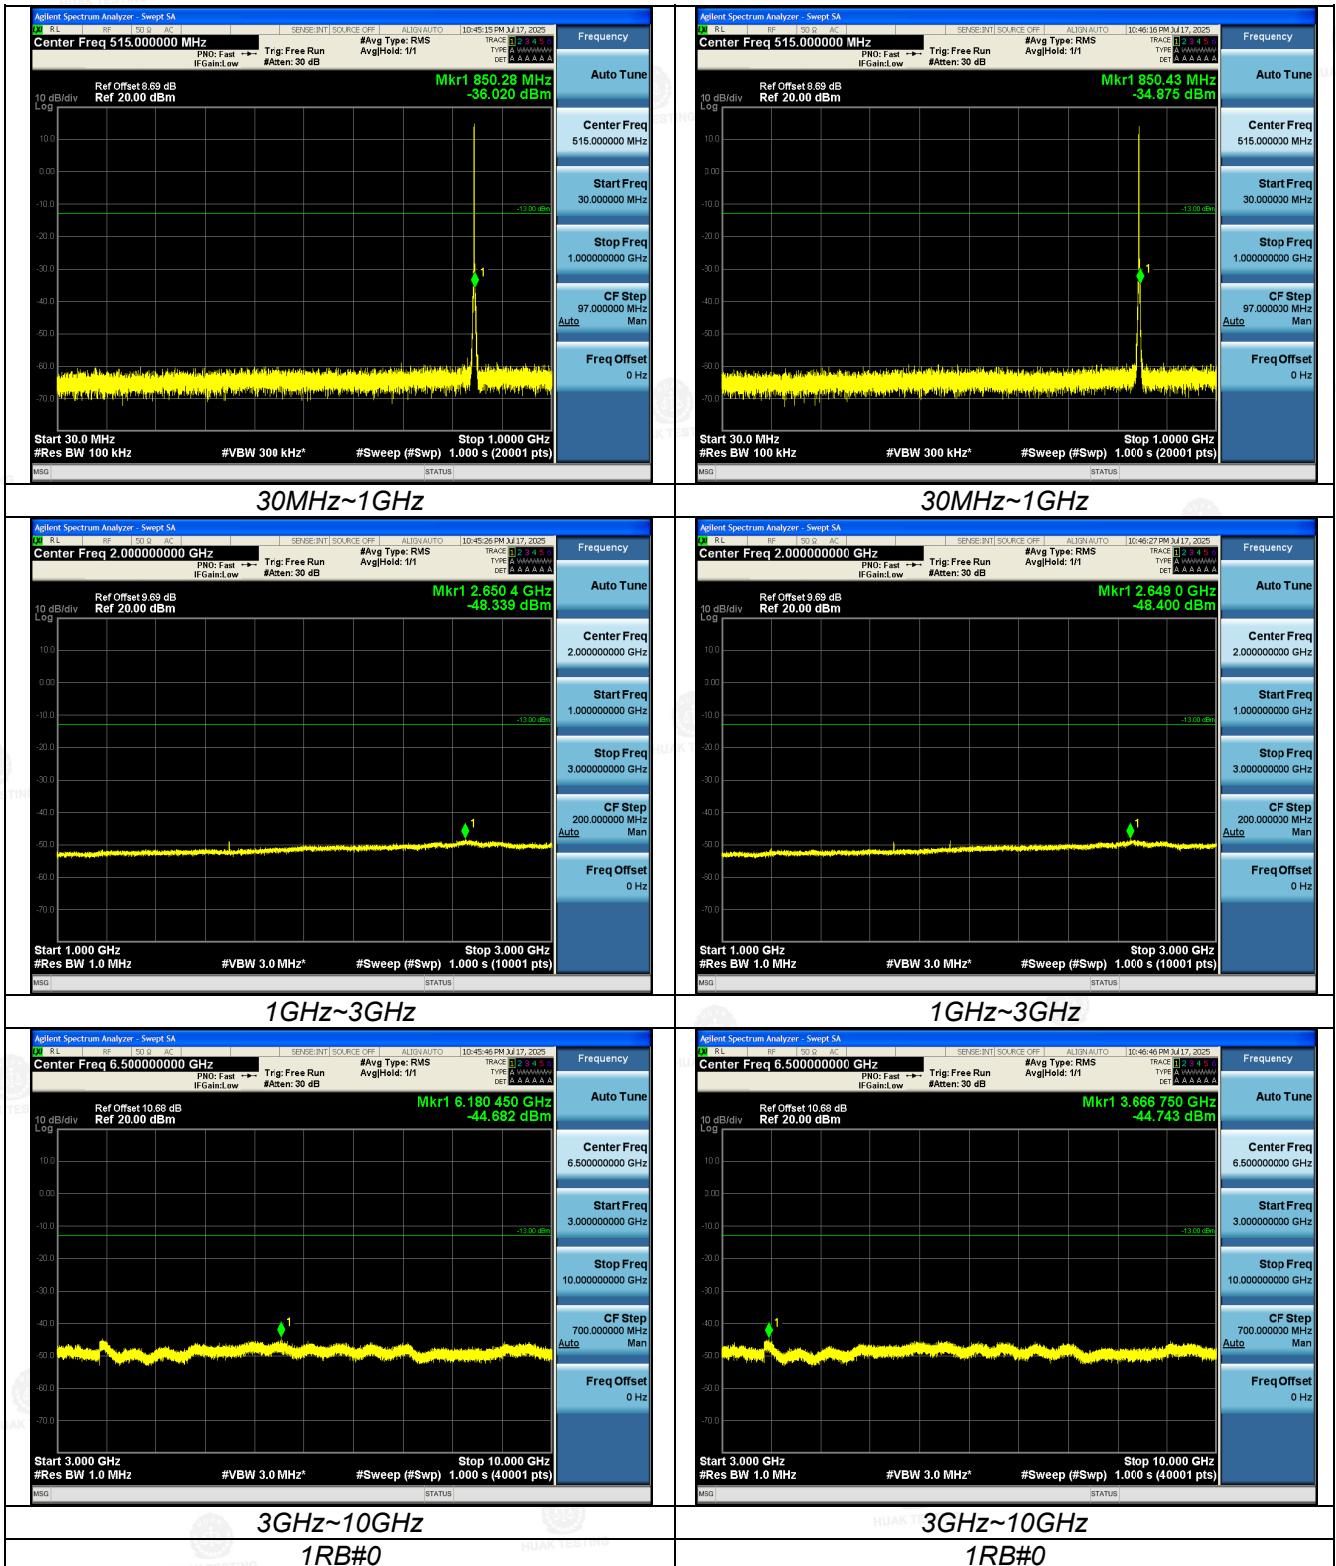

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China