

# RF EXPOSURE REPORT

Product Name: Wireless charger  
FCC ID: 2A4W9WP-02  
Trademark: SZWISECHIP  
Model Number: WP-02, WP-04, WP-10, WP-BK, WP-BK2  
Prepared For: Shenzhenshi xinxian keji youxiangongsi  
Address: Nanshanqu taoyuanjiedao pingshanshequ liuxiandadao 4088 hao bolintianrui huayuan 6 hao lou 13D  
Manufacturer: Shenzhenshi xinxian keji youxiangongsi  
Address: Nanshanqu taoyuanjiedao pingshanshequ liuxiandadao 4088 hao bolintianrui huayuan 6 hao lou 13D  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China  
Sample Received Date: Feb. 14, 2022  
Sample tested Date: Feb. 14, 2022 to Feb. 22, 2022  
Issue Date: Feb. 23, 2022  
Report No.: CTB220223035RF  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310, 47 CFR§2.1091; KDB 680106 D01 RF Exposure Wireless Charging App v03r01  
Test Results: PASS  
Remark: This is wireless charger EMF report.

Compiled by:

*Arron Liu*

Arron Liu

Reviewed by:

*Bin Mei*

Bin Mei

Approved by:



Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table of Contents

## Page

|                                                          |   |
|----------------------------------------------------------|---|
| 1 . GENERAL INFORMATION                                  | 3 |
| 1.1 . Independent Operation Mode                         | 3 |
| 1.2 . Test Supporting System                             | 3 |
| 2 .LIST OF TEST AND MEASUREMENT INSTRUMENTS              | 4 |
| 2.1 . For conducted emission at the mains terminals test | 4 |
| 3. METHOD OF MEASUREMENT                                 | 5 |
| 3. 1.Applicable Standard                                 | 5 |
| 4. TEST RESULT                                           | 5 |
| 4.1. Conducted Emission at the Mains Terminals Test      | 5 |
| 4.2. Equipment Approval Considerations:                  | 6 |
| 4.3. E and H field Strength                              | 6 |

# 1. GENERAL INFORMATION

## 1.1. Independent Operation Mode

The basic operation mode is:

1.1.1. wireless charger power: 10W

## 1.2. Test Supporting System

Adapter

Description : Adapter

Model No. : HKA03612030-7B

Power Input : AC100-240V~ 1.0A 50/60Hz

Output: 5V $\overline{\text{---}}$  3.0A

DC Line : Unshielded, Detachable 0.2m

## 2.LIST OF TEST AND MEASUREMENT INSTRUMENTS

### 2.1. For conducted emission at the mains terminals test

| Item | Equipment             | Brand      | Model No. | Frequency Range | Last calibration | Calibrated until |
|------|-----------------------|------------|-----------|-----------------|------------------|------------------|
| 1    | Broadband Field Meter | NARDA      | NBM-550   | -               | 2020.09.27       | 2022.08.05       |
| 2    | Magnetic Field Meter  | NARDA      | ELT-400   | 1 – 400kHz      | 2020.09.27       | 2022.08.05       |
| 3    | Magnetic Probe        | NARDA      | HF-3061   | 300kHz – 30MHz  | 2020.09.27       | 2022.08.05       |
| 4    | Magnetic Probe        | NARDA      | HF-0191   | 27 – 1000MHz    | 2020.09.27       | 2022.08.05       |
| 5    | Broadband Field Meter | NARDA      | NBM-550   | -               | 2020.09.27       | 2022.08.05       |
| 6    | Electric Field Meter  | COMBINOV A | EFM 200   | 5Hz – 400kHz    | 2020.09.27       | 2022.08.05       |
| 7    | E-Field Probe         | NARDA      | EF-0391   | 100kHz – 3GHz   | 2020.09.27       | 2022.08.05       |
| 8    | E-Field Probe         | NARDA      | EF-6091   | 100MHz – 60GHz  | 2020.09.27       | 2022.08.05       |




### 3. METHOD OF MEASUREMENT

#### 3. 1.Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB680106 D01: RF Exposure Wireless Charging App v03r01.

### 4. TEST RESULT

#### 4.1. Conducted Emission at the Mains Terminals Test

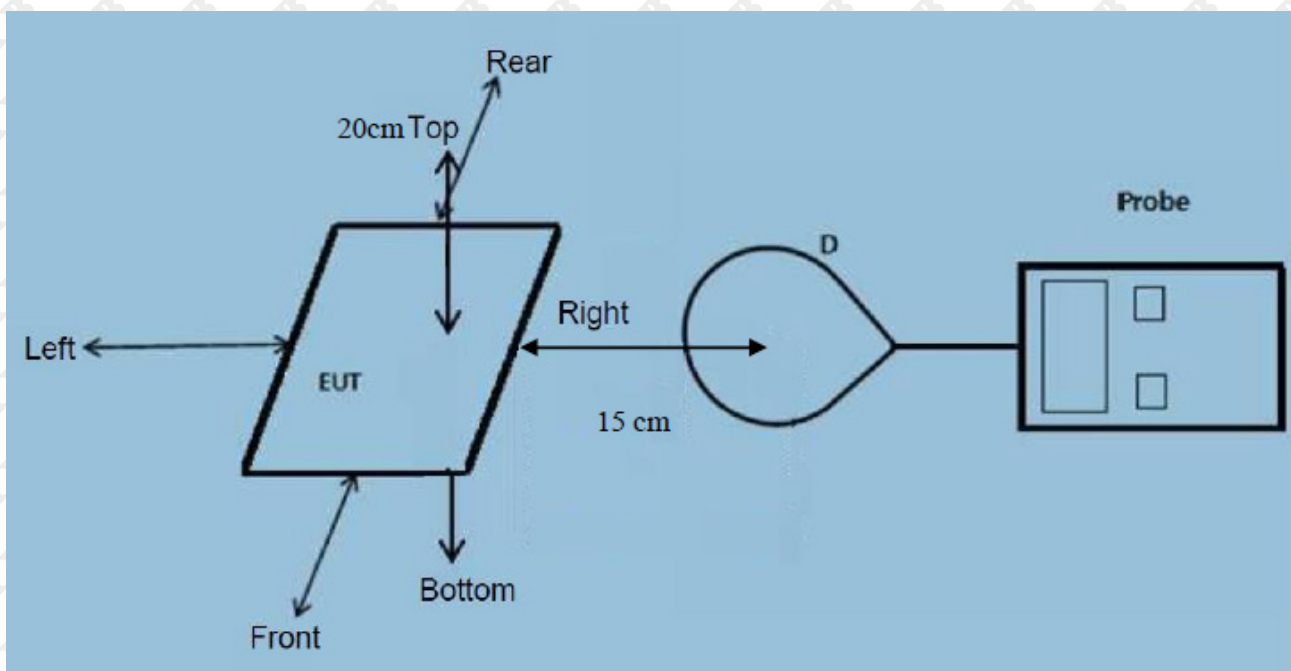

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the top, and 15cm measured from the center of the rest sides.

#### Test Procedure:

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- 20 cm measured from the center of the top, and 15cm measured from the center of the rest sides.
- The turn table was rotated 360 degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging App v03r01.

## 4.2. Equipment Approval Considerations:

The EUT does comply with item 5(b) of KDB 680106 D01 RF Exposure Wireless Charging App v03r01

- 1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 111KHz to 205KHz

- 2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 10000mW.

- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.

Yes, the transfer system includes only single primary and secondary coils.

- 4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, the EUT is a Mobile Wireless Charger

- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are less 50% x MPE limit.

## 4.3. E and H field Strength

E-Field Strength at 15 cm surrounding the EUT and for above the top surface of the EUT, 15cm and 20cm all have been tested, only worse case 15cm is reported.

| battery level | Frequency Range (kHz) | Test Position Right | Test Position Front | Test Position Rear | Test Position Left | Test Position Top | Limits Test (V/m) |
|---------------|-----------------------|---------------------|---------------------|--------------------|--------------------|-------------------|-------------------|
| 1%            | 146.1                 | 8.03                | 7.42                | 7.58               | 8.12               | 7.95              | 614               |
| 50%           | 146.1                 | 7.76                | 7.45                | 7.33               | 7.93               | 7.64              | 614               |
| 99%           | 146.1                 | 7.69                | 7.56                | 7.24               | 7.86               | 7.49              | 614               |

H-Field Strength at 15 cm surrounding the EUT and for above the top surface of the EUT, 15cm and 20cm all have been tested, only worse case 15cm is reported.

| battery level | Frequency Range (kHz) | Test Position Right | Test Position Front | Test Position Rear | Test Position Left | Test Position Top | Limits Test (A/m) |
|---------------|-----------------------|---------------------|---------------------|--------------------|--------------------|-------------------|-------------------|
| 1%            | 146.1                 | 0.20                | 0.21                | 0.22               | 0.24               | 0.25              | 1.63              |
| 50%           | 146.1                 | 0.16                | 0.13                | 0.13               | 0.24               | 0.26              | 1.63              |
| 99%           | 146.1                 | 0.06                | 0.12                | 0.05               | 0.16               | 0.28              | 1.63              |

\*\*\*\*\*THE END\*\*\*\*\*