

# 4G13 S1313SE A5正反面单色印刷 单折

正面

**artcilux**  
Silver Lake 4G13 S1313SE wireless hand sweep induction remote control switch

**1. Product Description**  
4G13 S1313SE wireless hand-scan induction remote control is a control switch based on 2.4GHz wireless technology. It adopts MCU+RF integrated chip, which has the advantages of low power consumption, high stability and long battery life. It is the preferred product for realizing the wireless control system of cabinet lighting.

**2. Product Information**


Environmental temperature: -20°C-50°C	Working voltage: 3.0-3.3V
Battery model: CR2450	Modulation mode: GFSK
Standby power consumption: <0.2mW	Working power consumption: <60mW
Wireless transmission frequency: 2.4GHz	Remote control distance: 10M
Hand-scan sensing distance: 1~3cm	Product size: 50x40x11.5mm

**3. Installation method**


**1. Visible mounting:**  
Use screws to lock the visible mounting base in the installation position of the shelf, and then slide the controller into the visible mounting base to complete the installation.


Assembled parts:  
 


**2. Embedding:**  
Slots need to be opened at the edge of the layer board, as shown in the figure below



**4. Operation of pairing code, clearing code and learning for wireless switches**  
The wireless remote control should be coded with our control box in the following way to achieve the matching use of the transmitter and receiver. Do not block the sensing surface during operation.  
Suitable for use with: S1361 series, S1015 series, S1310 series.  
Not suitable for use with: S1351 series, S1005 series, S1300 series

**Clear code versus code**  


**First use: remove the battery insulation**  


**Code:**  
  
Indicator light  
Scan the sensor surface with your hand  
After connecting the lamp to the intelligent power supply or control box, power on the device. Within 30S after powering on the device, long press the code key of the remote control. When the lamp flashes three times, it indicates that the code is successful at this time, and the remote control can control this group of lamps.

**Clear code:**  
  
After the receiving end is powered on for 5S, press the code key and clear code at the same time. After about 5S, the lamp flashes three times, and the code is cleared successfully; the remote control can no longer control this receiving end.

**5. Remote control switch usage instructions**  
When the hand sweep surface is blocked for more than 1-3cm, the light brightness will gradually dim or brighten. When the light brightness becomes the darkest or brightest, stop blocking the hand sweep surface and block it again. The light will gradually brighten or darken.

**6. Learning between remote controls**  
Unmatched remote control B: Long press the code key for 5S, and the indicator light will be on constantly. At this time, it enters the learning state.  

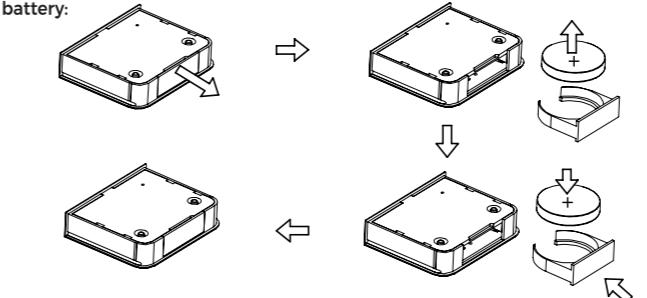

反面

**! NOTE**

Please note that changes or modifications of this product is not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

**7. Remote control code value method:**  
Long press the code key for 2S, and the remote control indicator light will be turned off. Learning is successful, and both remote controls A and B can control the same.

**Replace battery:**  


**pay attention to:**  
To ensure the normal service life of the remote control switch, please install it according to the instructions. If you use it without a fixed position, please pay attention to the placement of the switch, and do not touch the sensing surface with objects when touching or sweeping, so as to prevent the remote control from being in the triggering state all the time and wasting power.

**8. Precautions**

1. The remote control and receiver should not be wrapped in metal objects, and there should be no metal objects blocking the straight distance between them.
2. If the remote control does not work properly, please check whether the battery is used up and replace the battery in time.
3. Do not put the remote control into fire or liquid to avoid danger and damage the switch.
4. Prevent violent vibration, impact or compression during transportation, and handle with care during handling.

**Radiation Exposure Statement:** This equipment complies with FCC/IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0.5cm between the radiator & your body.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation.

