



FCC RADIO TEST REPORT

FCC ID : A4RG1KAW
Equipment : Wireless Device
Model Name : G1KAW
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 18, 2025 and testing was performed from Mar. 05, 2025 to Apr. 01, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4D1914H	01	Initial issue of report	Apr. 09, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang
Report Producer: Dara Chiu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs LTE/NTN, Bluetooth, BLE, BLE ASK, BLE GFSK, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, UWB, 60GHz, and GNSS.
Antenna Type Bluetooth: PIFA Antenna

EUT Information List	
S/N	Performed Test Item
51161WRBNL320R	RF Conducted Measurement
51161WRBNL31SK	Radiated Spurious Emission
51161WRBNL31TB	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-5.4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

<Bluetooth – LE GFSK>

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	-	-	27	2429	54	2456
	-	-	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	-	-	50	2452	-	-
	-	-	51	2453	-	-
	-	-	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz) radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth-LE GFSK / GFSK
	Mode 1: Bluetooth-LE GFSK Tx CH02_2404 MHz_1Mbps
	Mode 2: Bluetooth-LE GFSK Tx CH38_2440 MHz_1Mbps
	Mode 3: Bluetooth-LE GFSK Tx CH76_2478 MHz_1Mbps
	Mode 4: Bluetooth-LE GFSK Tx CH02_2404 MHz_2Mbps
	Mode 5: Bluetooth-LE GFSK Tx CH38_2440 MHz_2Mbps
	Mode 6: Bluetooth-LE GFSK Tx CH76_2478 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth-LE (CH. 38) GFSK Tx + USB Cable (Charging from AC Adapter)
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

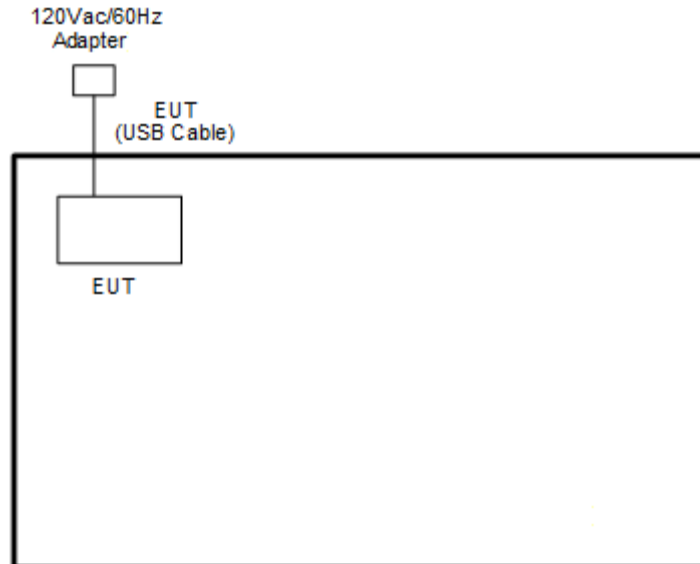

<Bluetooth-LE GFSK Tx Mode>

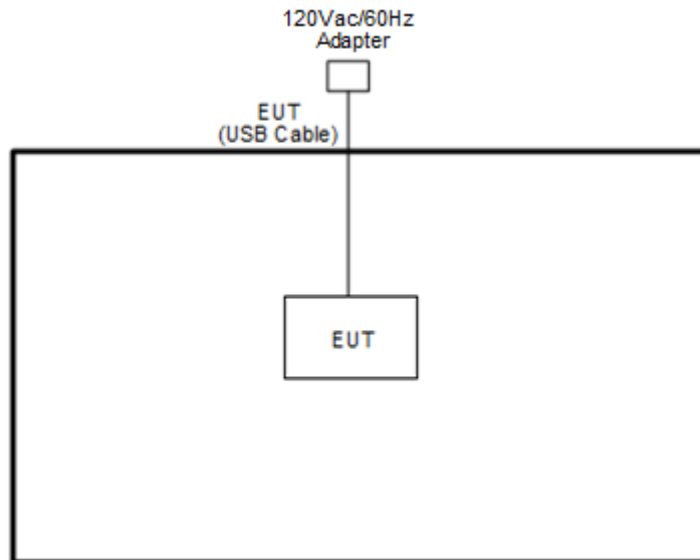

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.40” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

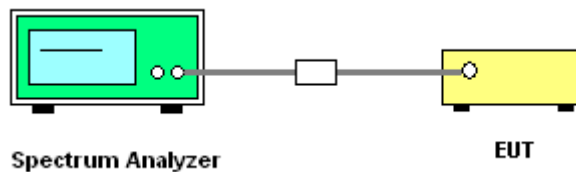

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

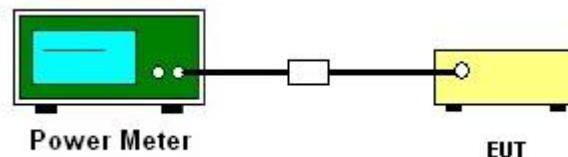

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

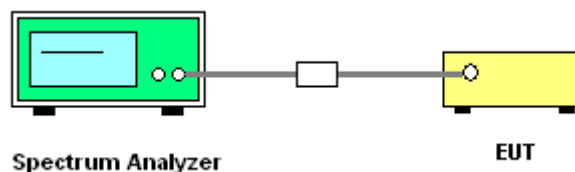

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

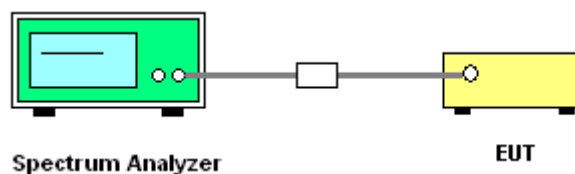

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

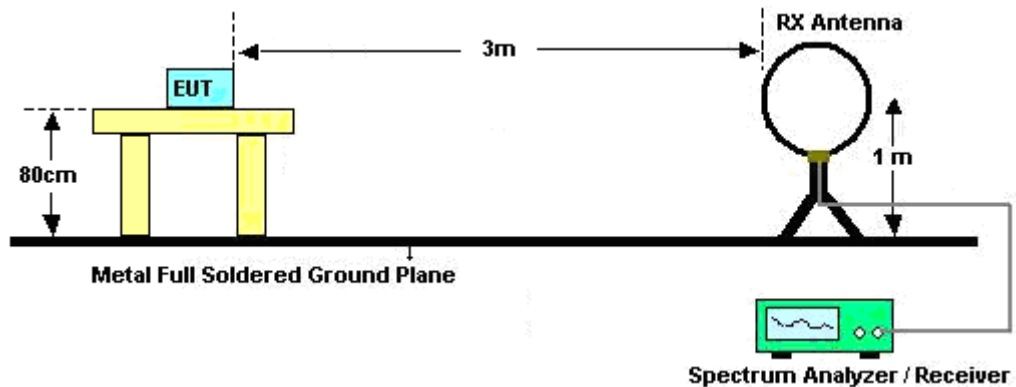


For radiated test from 30MHz to 1GHz

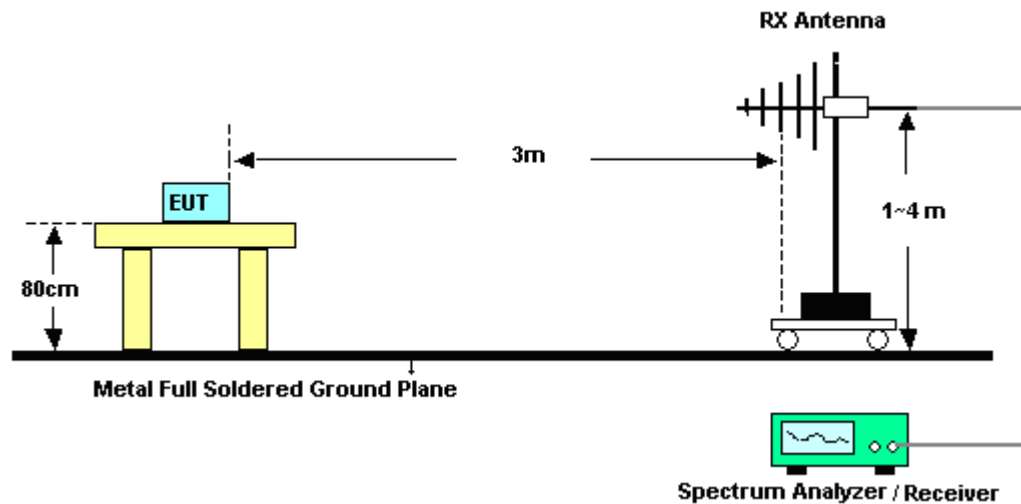

For radiated test from 1GHz to 18GHz

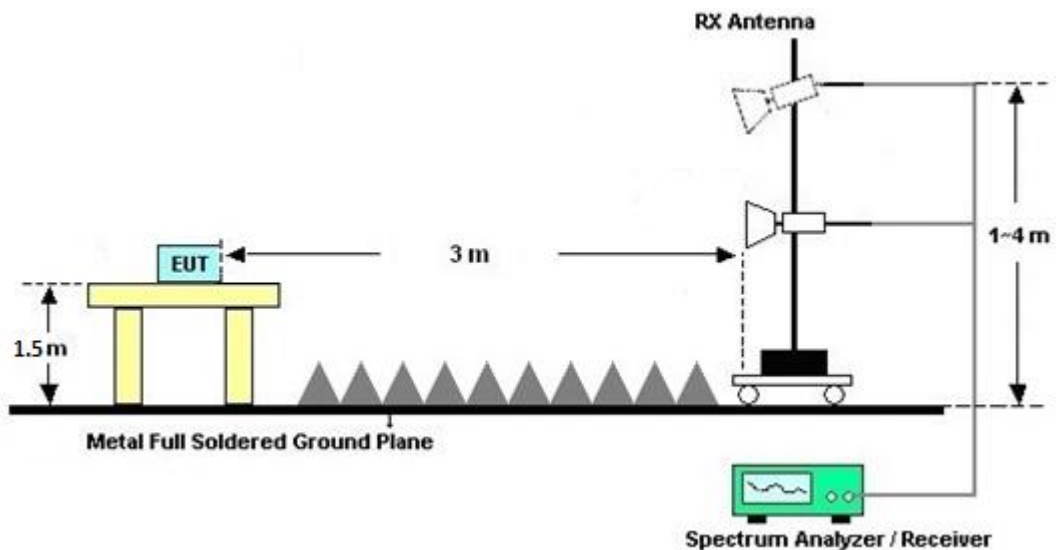

For radiated test above 18GHz

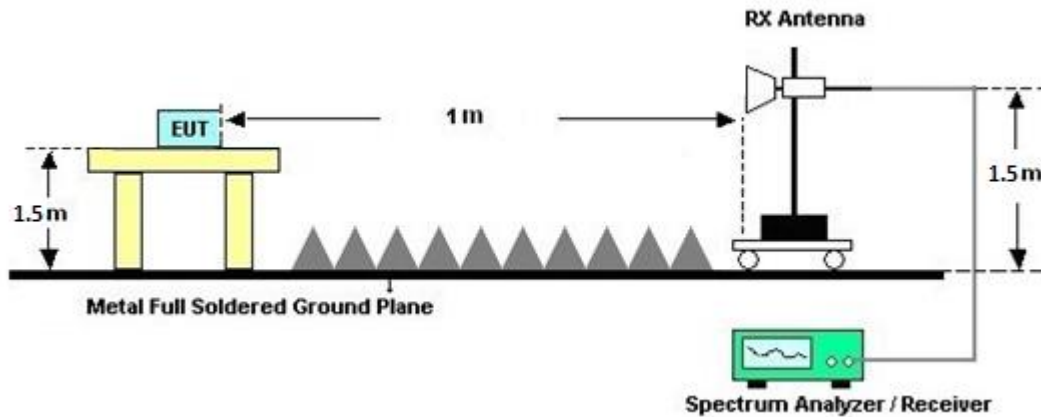

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

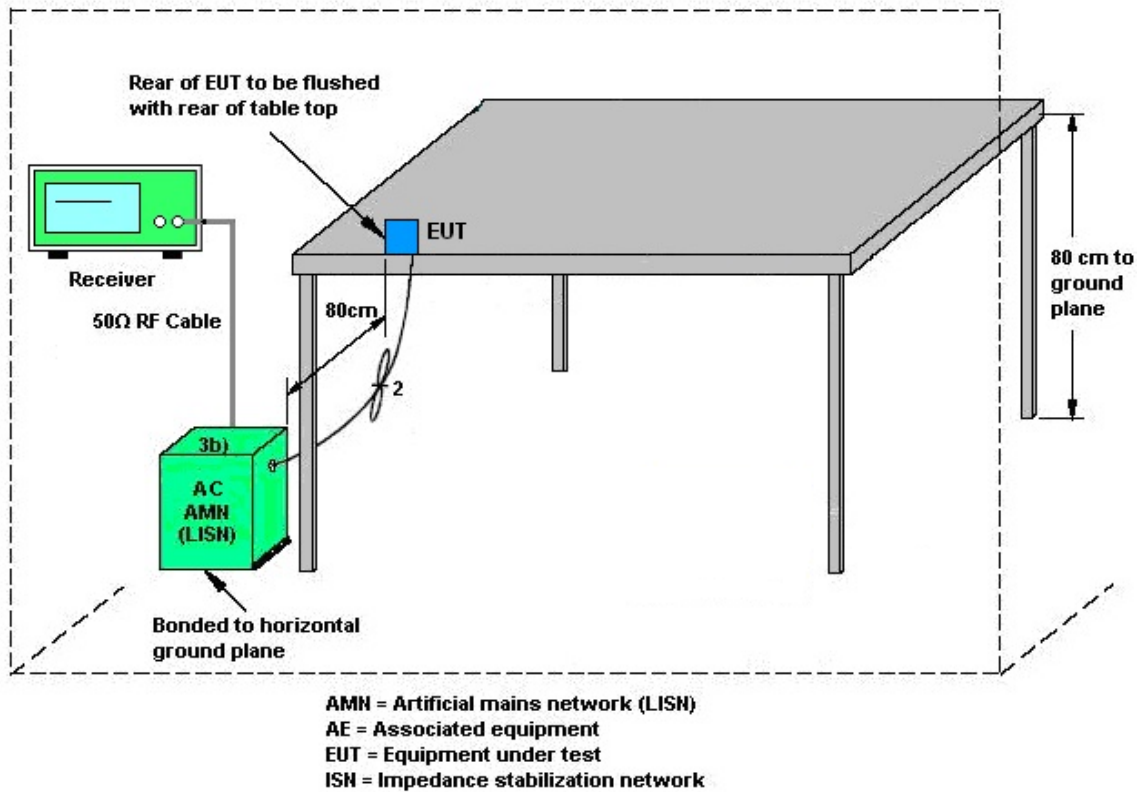

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Aug. 28, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Mar. 11, 2025 ~ Mar. 23, 2024	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 24, 2025	Mar. 24, 2025 ~ Mar. 28, 2024	Mar. 23, 2026	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 21, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Jan. 20, 2026	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 01, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 09, 2025	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 01, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 01, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz~200MHz	Oct. 23, 2024	Apr. 01, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Apr. 01, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Apr. 01, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Apr. 01, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 05, 2025~ Mar. 07, 2025	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Mar. 05, 2025~ Mar. 07, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar. 05, 2025~ Mar. 07, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 05, 2025~ Mar. 07, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Mar. 05, 2025~ Mar. 07, 2025	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/3/5~2025/3/7	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE GFSK	1Mbps	1	02	2404	1.056	0.690	0.50	Pass
	1Mbps	1	38	2440	1.056	0.697	0.50	Pass
	1Mbps	1	76	2478	1.049	0.685	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE GFSK	1Mbps	1	02	2404	19.47	30.00	-5.40	14.07	36.00	Pass
	1Mbps	1	38	2440	19.15	30.00	-5.40	13.75	36.00	Pass
	1Mbps	1	76	2478	19.13	30.00	-5.40	13.73	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE GFSK	1Mbps	1	02	2404	17.99	1.15	-5.40	8.00	Pass
	1Mbps	1	38	2440	17.30	1.03	-5.40	8.00	Pass
	1Mbps	1	76	2478	17.52	-0.42	-5.40	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE GFSK	2Mbps	1	02	2404	2.098	1.162	0.50	Pass
	2Mbps	1	38	2440	2.099	1.210	0.50	Pass
	2Mbps	1	76	2478	2.094	1.171	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE GFSK	2Mbps	1	02	2404	19.60	30.00	-5.40	14.20	36.00	Pass
	2Mbps	1	38	2440	19.53	30.00	-5.40	14.13	36.00	Pass
	2Mbps	1	76	2478	19.48	30.00	-5.40	14.08	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE GFSK	2Mbps	1	02	2404	17.48	-3.51	-5.40	8.00	Pass
	2Mbps	1	38	2440	17.11	-4.08	-5.40	8.00	Pass
	2Mbps	1	76	2478	17.21	-3.57	-5.40	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**6dB Bandwidth**


<1M>

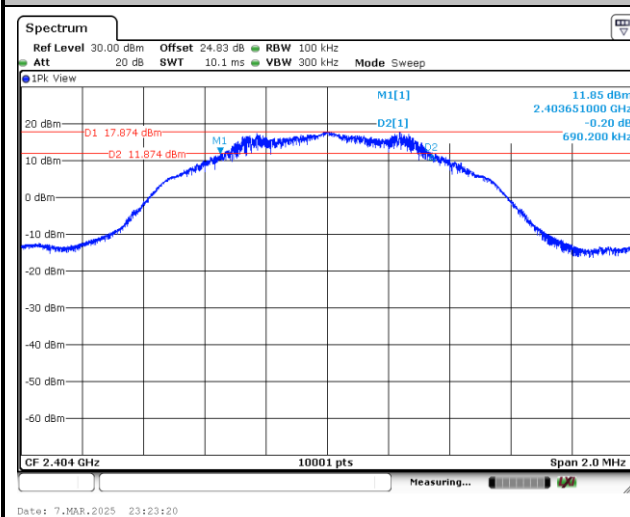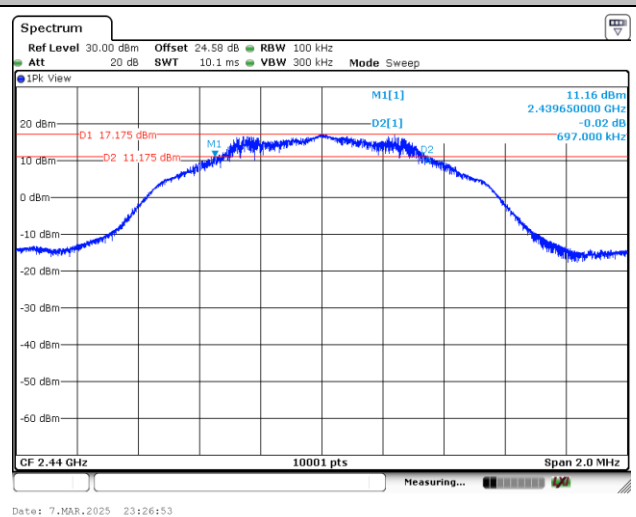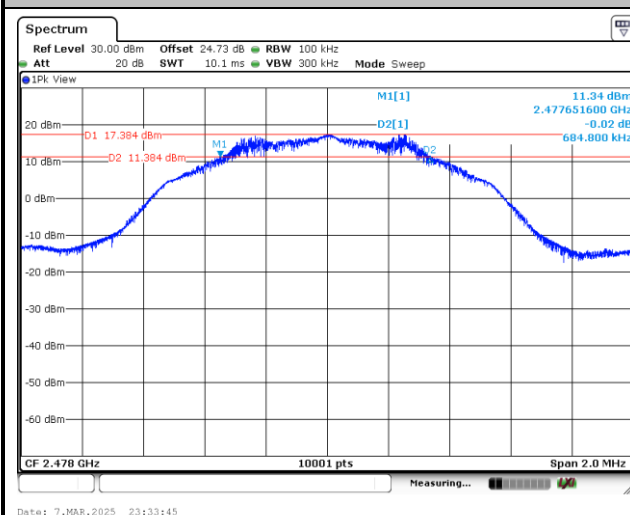6 dB Bandwidth Plot on Channel 01**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 38**




<2M>


6 dB Bandwidth Plot on Channel 01

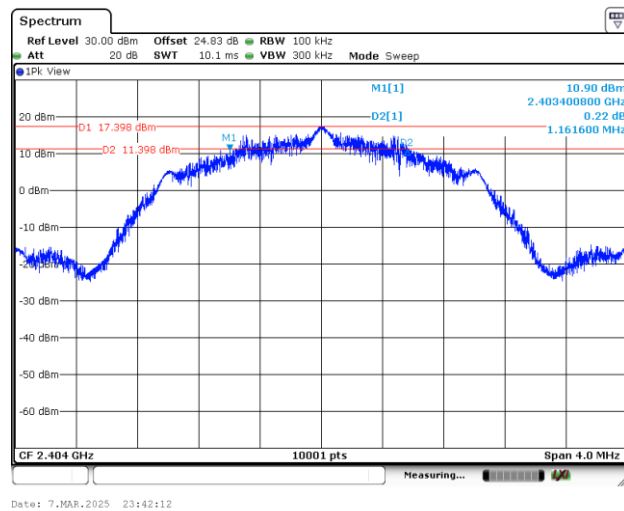

6 dB Bandwidth Plot on Channel 19



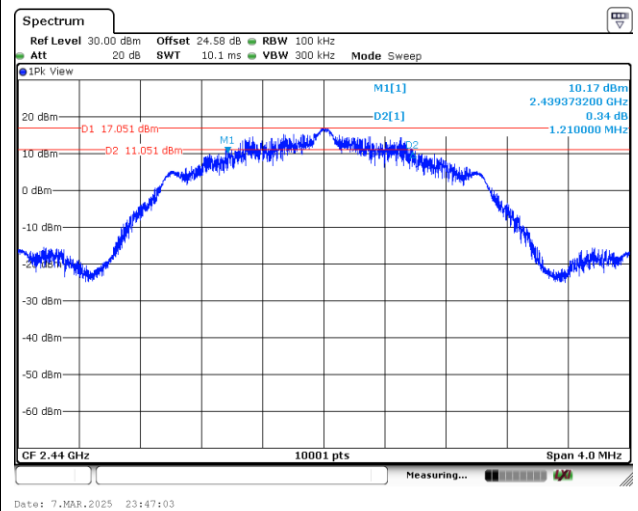


6 dB Bandwidth Plot on Channel 38

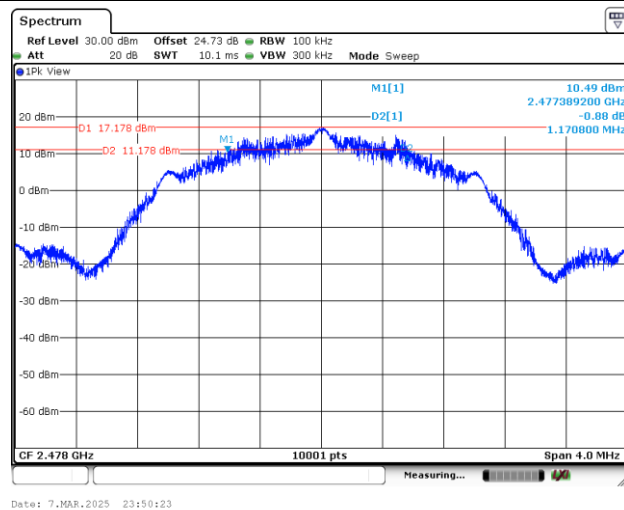

**99% Occupied Bandwidth**


<1M>

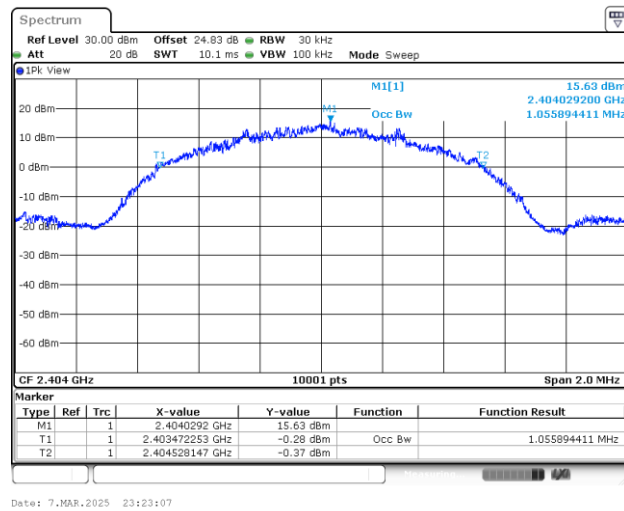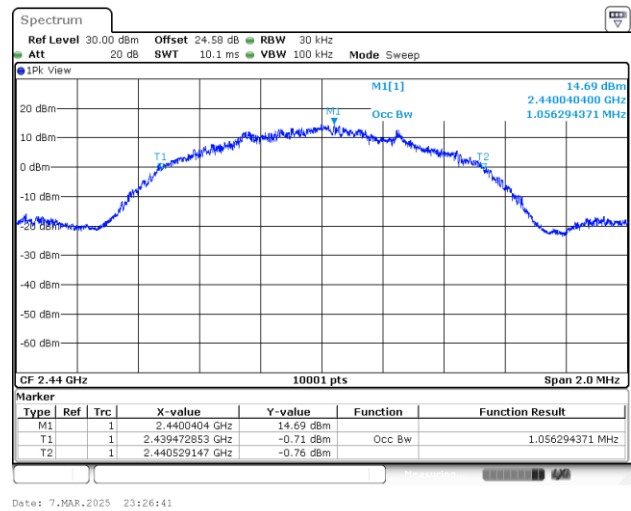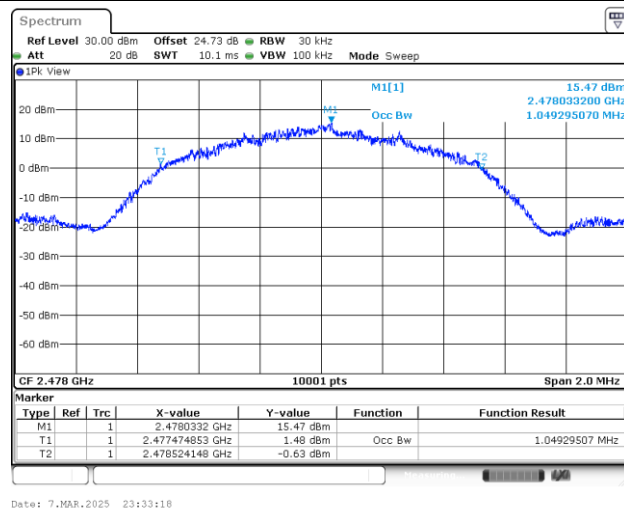99% Occupied Bandwidth Plot on Channel 01**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 38**




<2M>


99% Occupied Bandwidth Plot on Channel 01

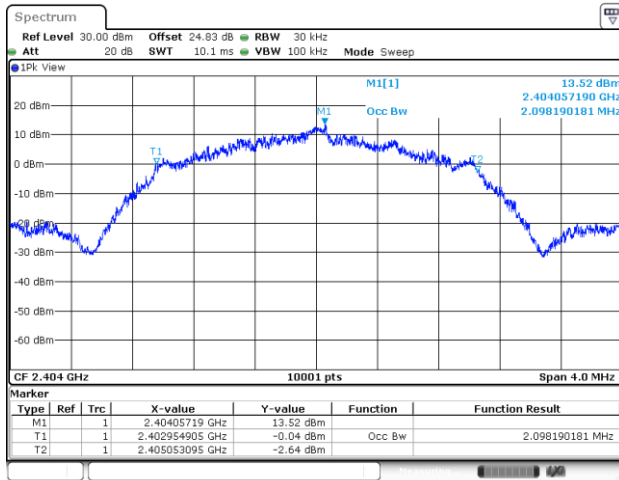

99% Occupied Bandwidth Plot on Channel 19



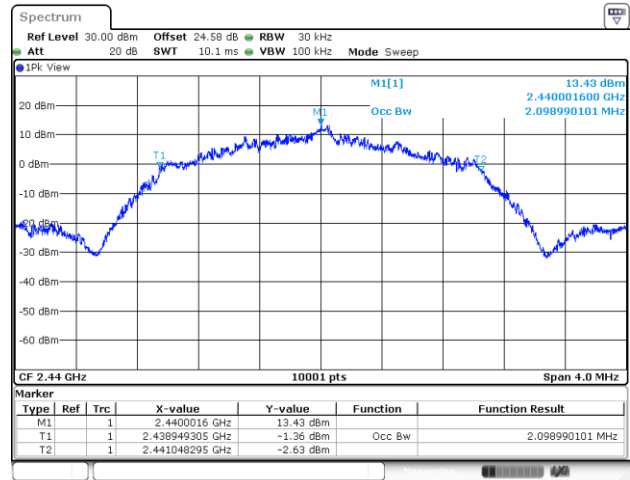


99% Occupied Bandwidth Plot on Channel 38

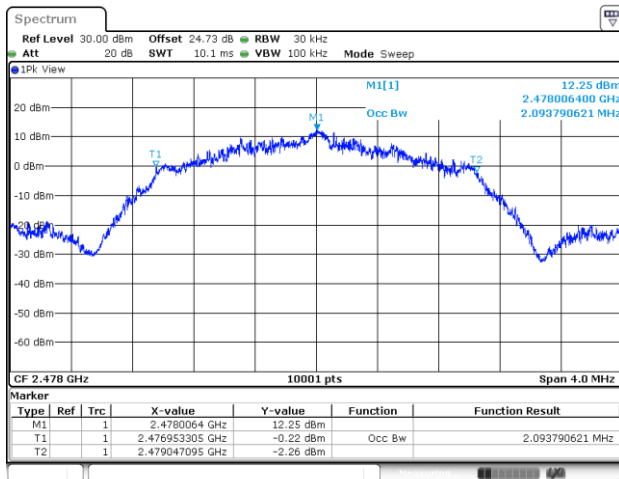

**Power Spectral Density (dBm/3kHz)**


<1M>

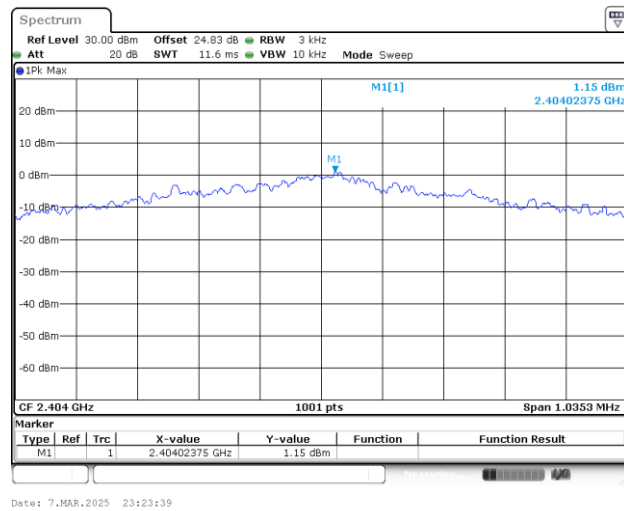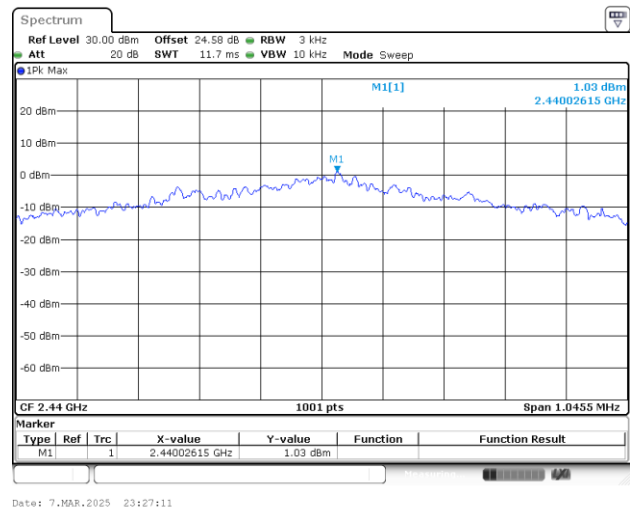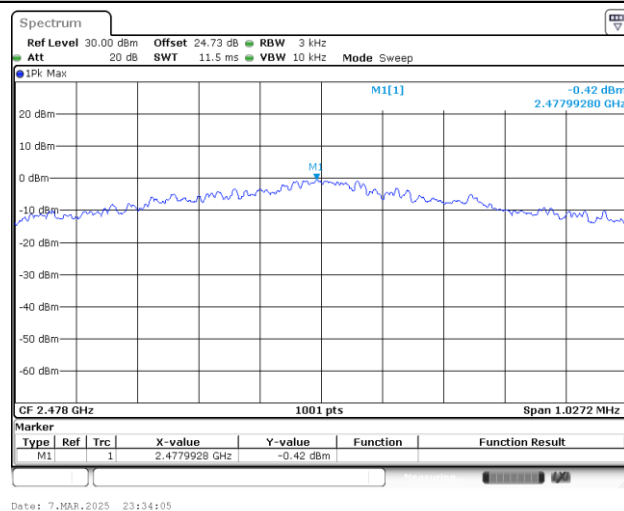Power Density (dBm/3kHz) Plot Channel 01**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 38**




<2M>


Power Density (dBm/3kHz) Plot Channel 01

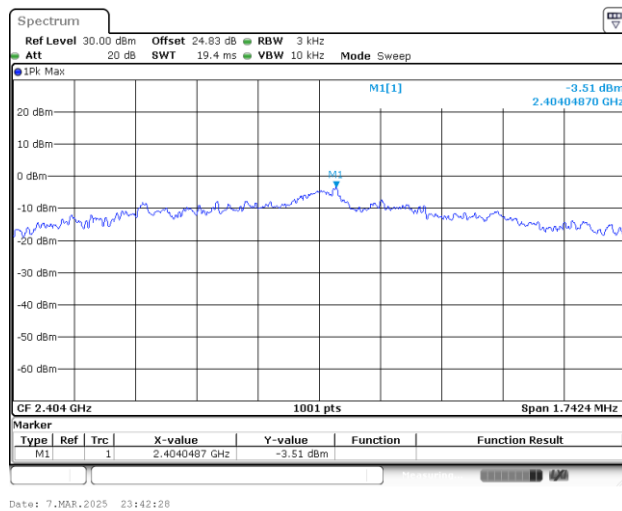

Power Density (dBm/3kHz) Plot Channel 19




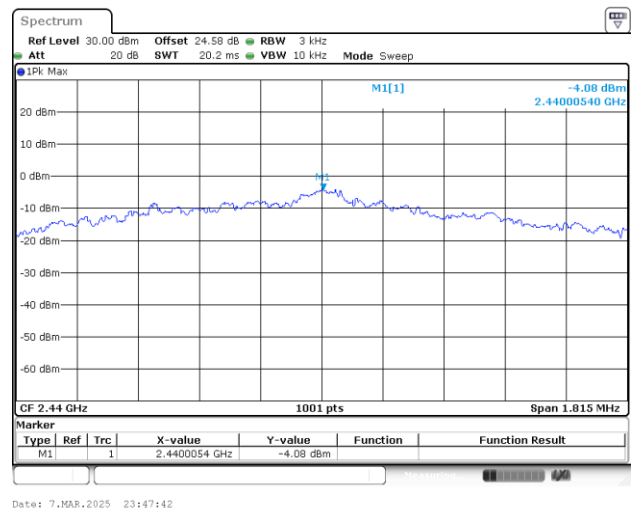


Power Density (dBm/3kHz) Plot Channel 38

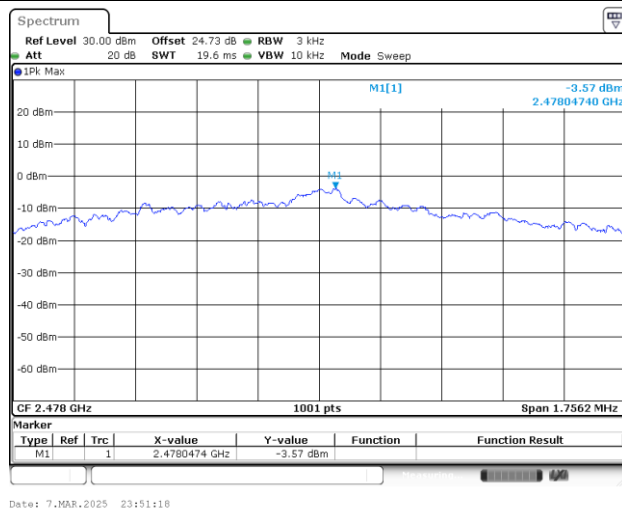

**Band Edge and Conducted Spurious Emission**


<1M>

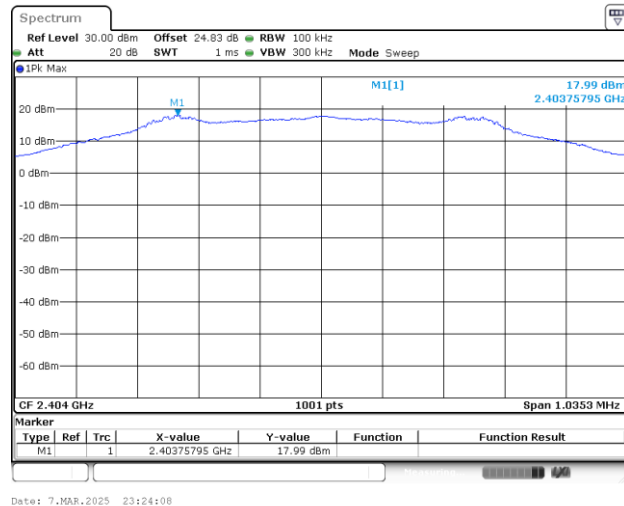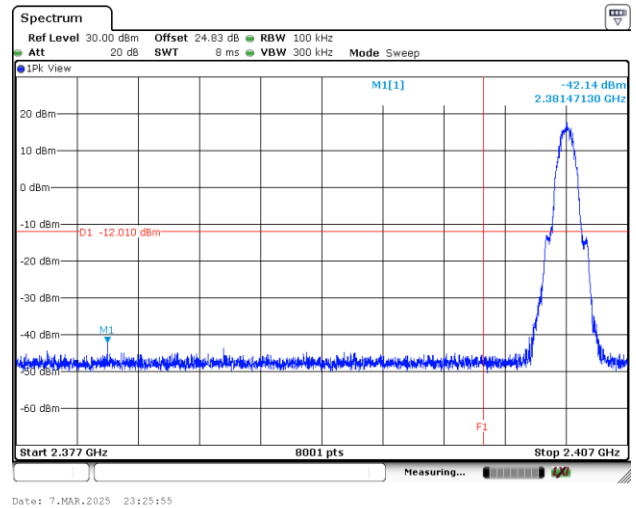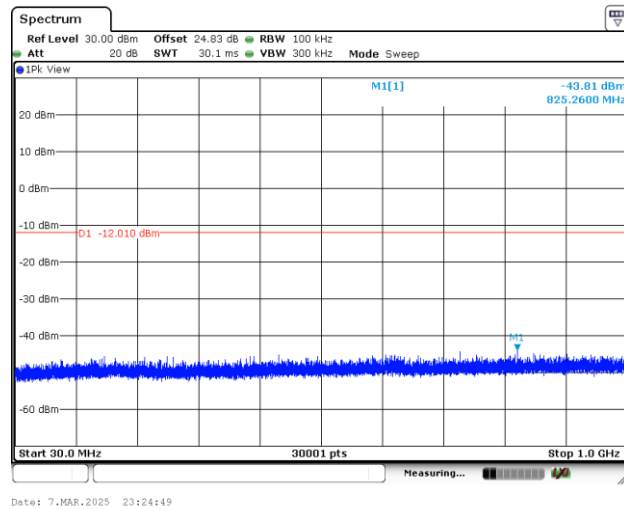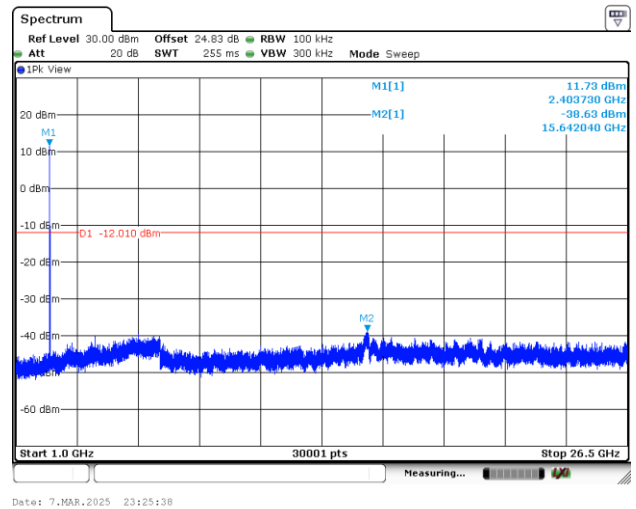Channel 01**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19

100kHz PSD reference Level Plot

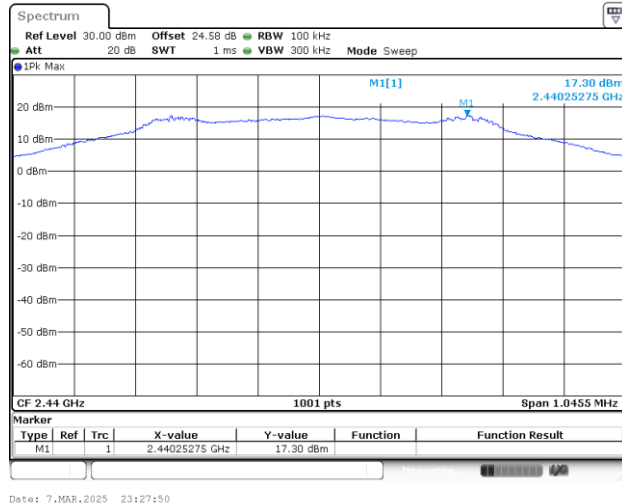


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

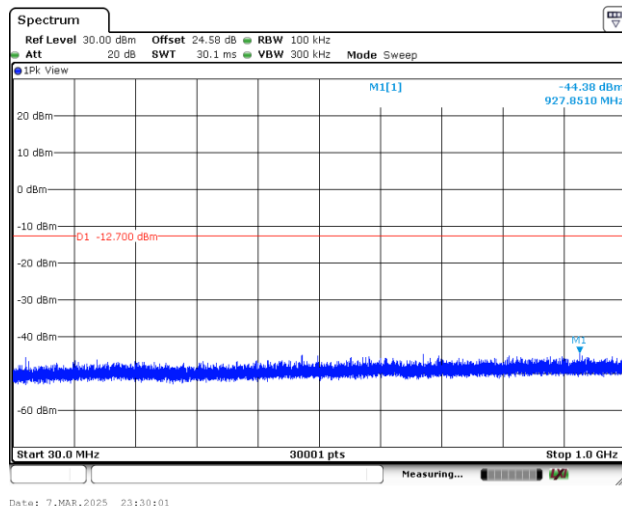


Spurious Emission 1GHz~26.5GHz Plot

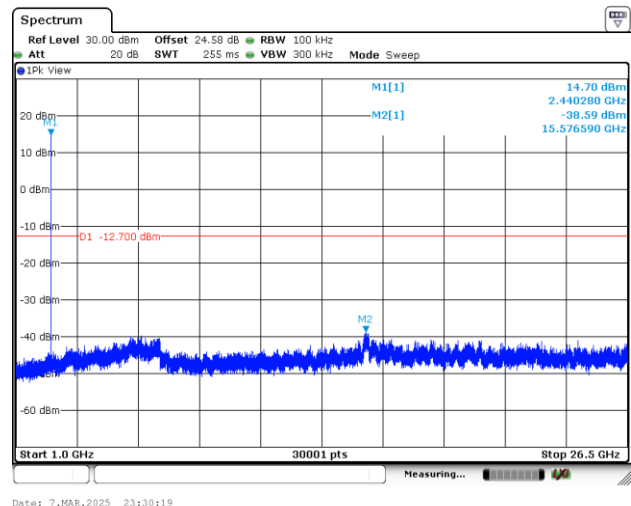




Channel 38


100kHz PSD reference Level Plot

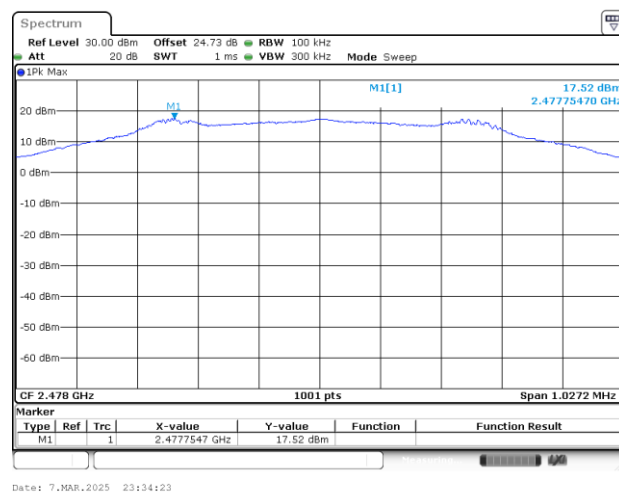


High Channel Plot

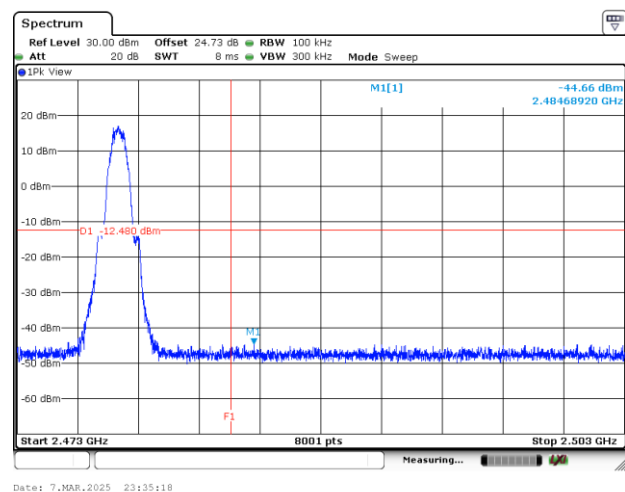

Spurious Emission 30MHz~1GHz Plot

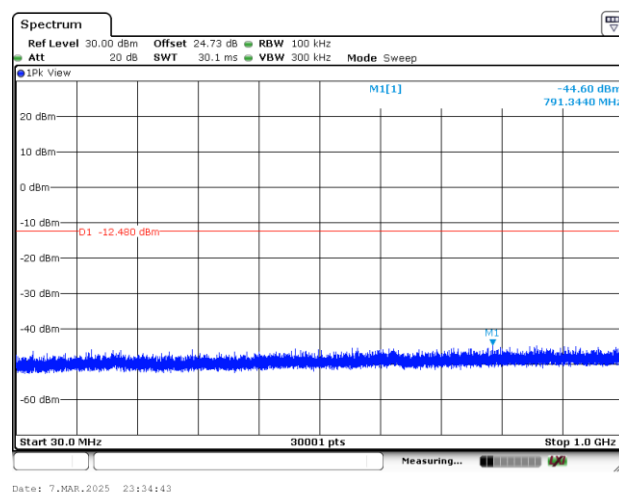


Spurious Emission 1GHz~26.5GHz Plot

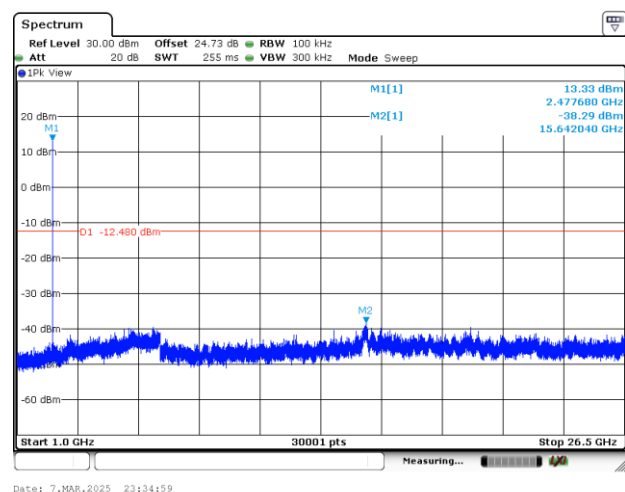




<2M>

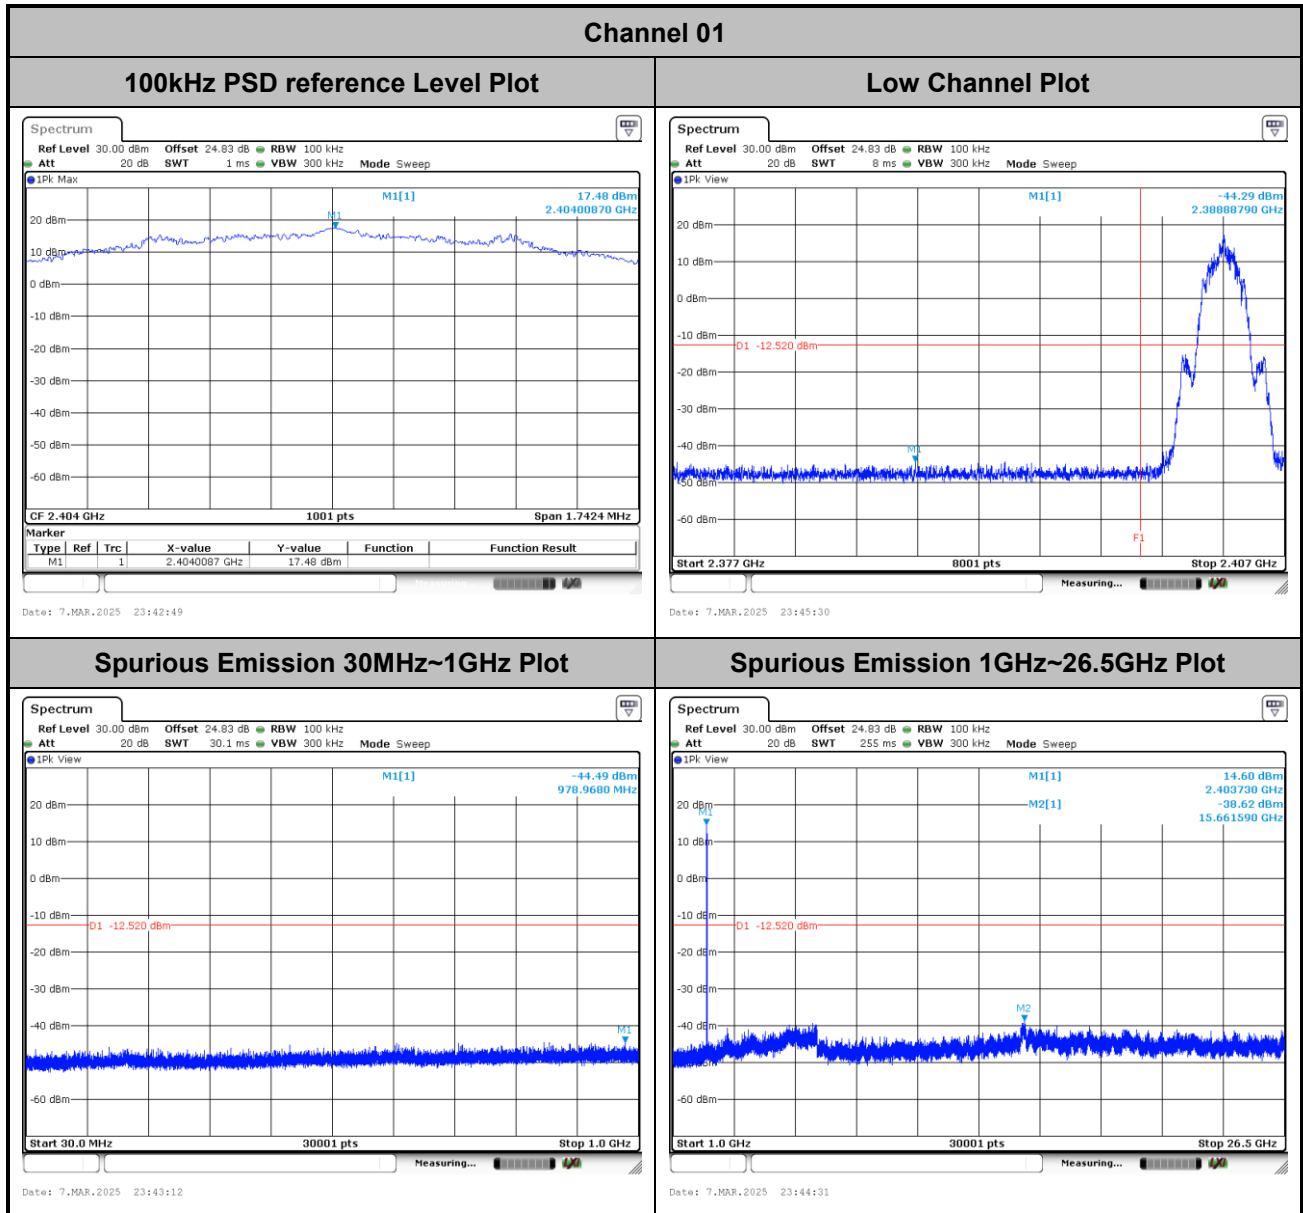




Channel 19

100kHz PSD reference Level Plot

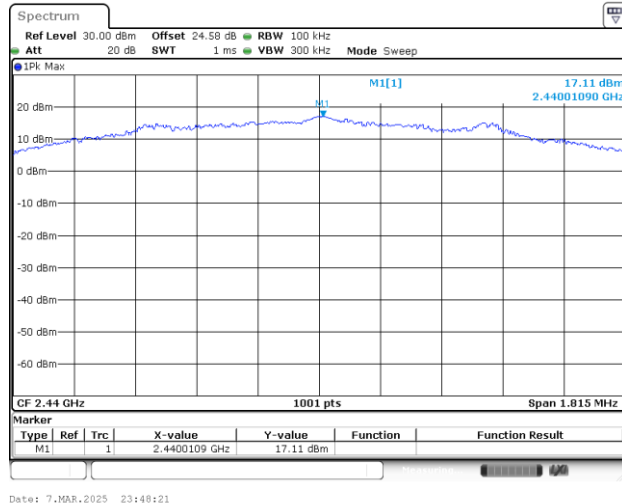






Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

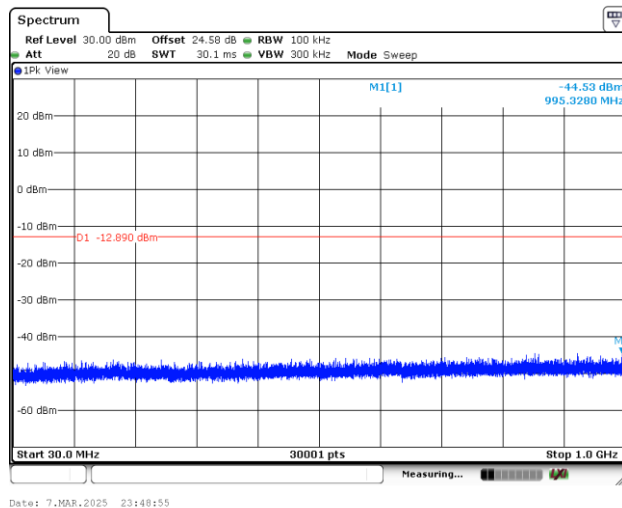

Spurious Emission 1GHz~26.5GHz Plot

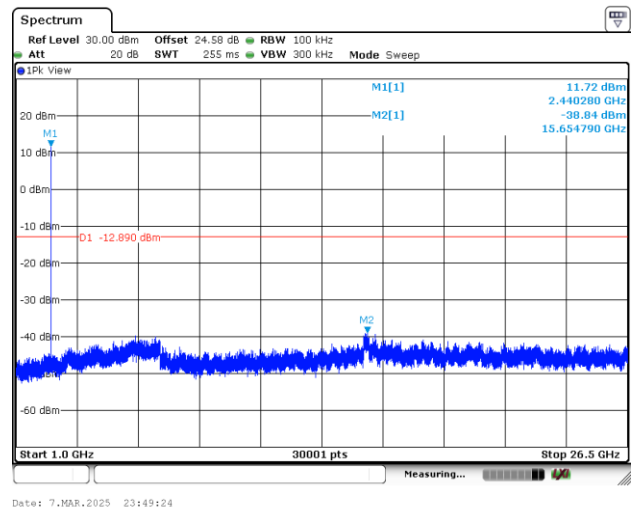

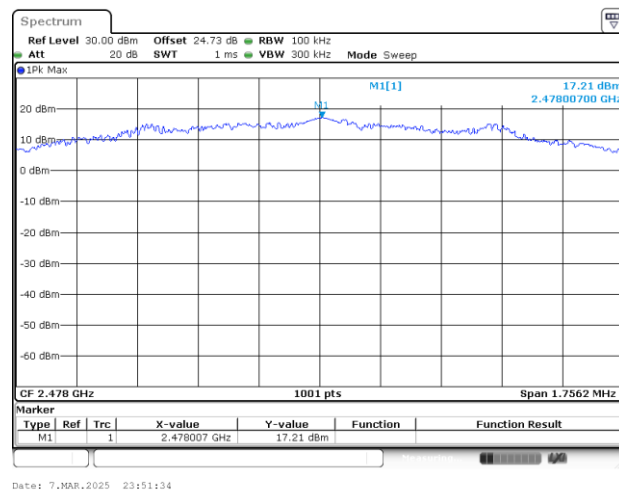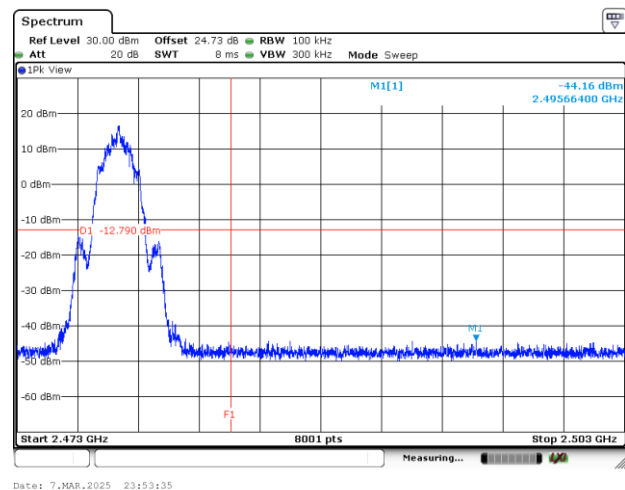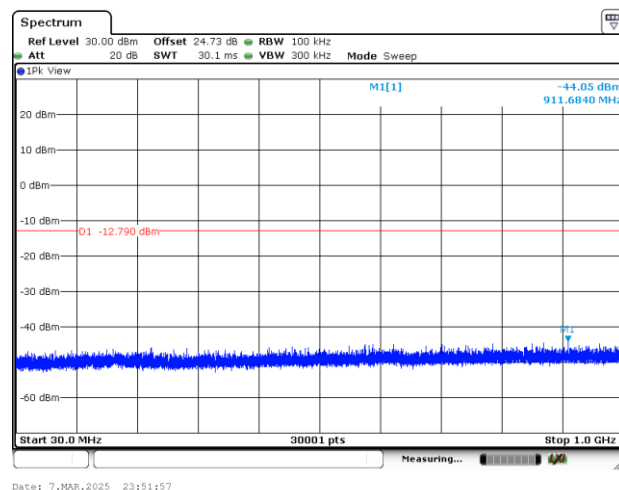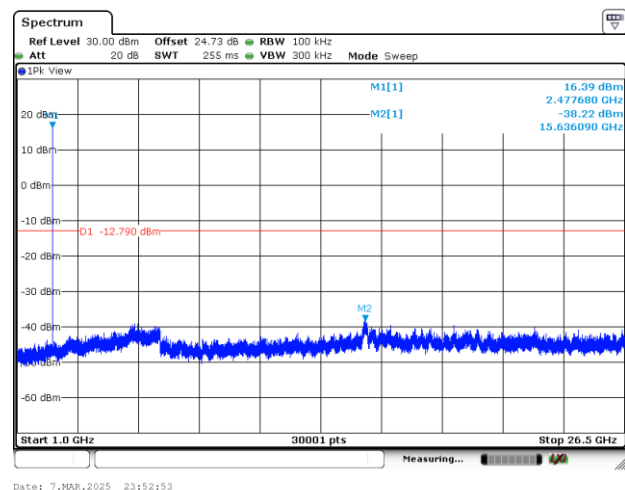Channel 38
100kHz PSD reference Level Plot

High Channel Plot

Spurious Emission 30MHz~1GHz Plot

Spurious Emission 1GHz~26.5GHz Plot




Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	17.2~22.3℃
		Relative Humidity :	58.2 ~ 65.3%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4D1914
Mode 1
120Vac/60Hz
Line

Full Spectrum

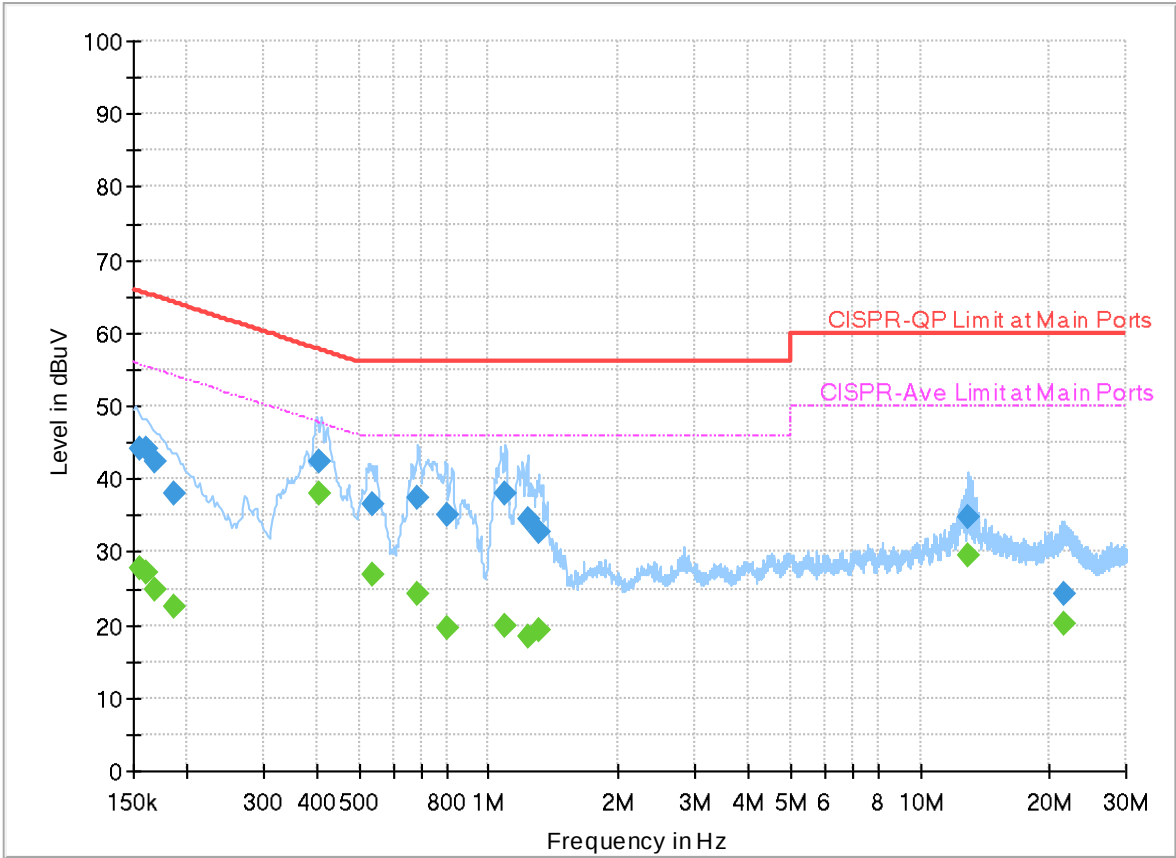

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.154500	---	27.77	55.75	27.98	L1	FLO	20.0
0.154500	44.08	---	65.75	21.67	L1	FLO	20.0
0.159720	---	27.21	55.48	28.27	L1	FLO	20.0
0.159720	44.28	---	65.48	21.20	L1	FLO	20.0
0.168000	---	24.73	55.06	30.33	L1	FLO	20.0
0.168000	42.42	---	65.06	22.64	L1	FLO	20.0
0.186000	---	22.63	54.21	31.58	L1	FLO	20.0
0.186000	37.89	---	64.21	26.32	L1	FLO	20.0
0.406500	---	38.14	47.72	9.58	L1	FLO	20.0
0.406500	42.33	---	57.72	15.39	L1	FLO	20.0
0.534750	---	26.88	46.00	19.12	L1	FLO	20.0
0.534750	36.60	---	56.00	19.40	L1	FLO	20.0
0.681000	---	24.19	46.00	21.81	L1	FLO	20.0
0.681000	37.44	---	56.00	18.56	L1	FLO	20.0
0.798000	---	19.69	46.00	26.31	L1	FLO	20.0
0.798000	35.09	---	56.00	20.91	L1	FLO	20.0
1.090500	---	19.92	46.00	26.08	L1	FLO	20.0
1.090500	38.13	---	56.00	17.87	L1	FLO	20.0
1.234500	---	18.34	46.00	27.66	L1	FLO	20.0


1.234500	34.55	---	56.00	21.45	L1	FLO	20.0
1.305600	---	19.29	46.00	26.71	L1	FLO	20.0
1.305600	32.62	---	56.00	23.38	L1	FLO	20.0
12.963570	---	29.45	50.00	20.55	L1	FLO	20.5
12.963570	34.78	---	60.00	25.22	L1	FLO	20.5
21.532110	---	20.04	50.00	29.96	L1	FLO	20.9
21.532110	24.32	---	60.00	35.68	L1	FLO	20.9

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4D1914
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

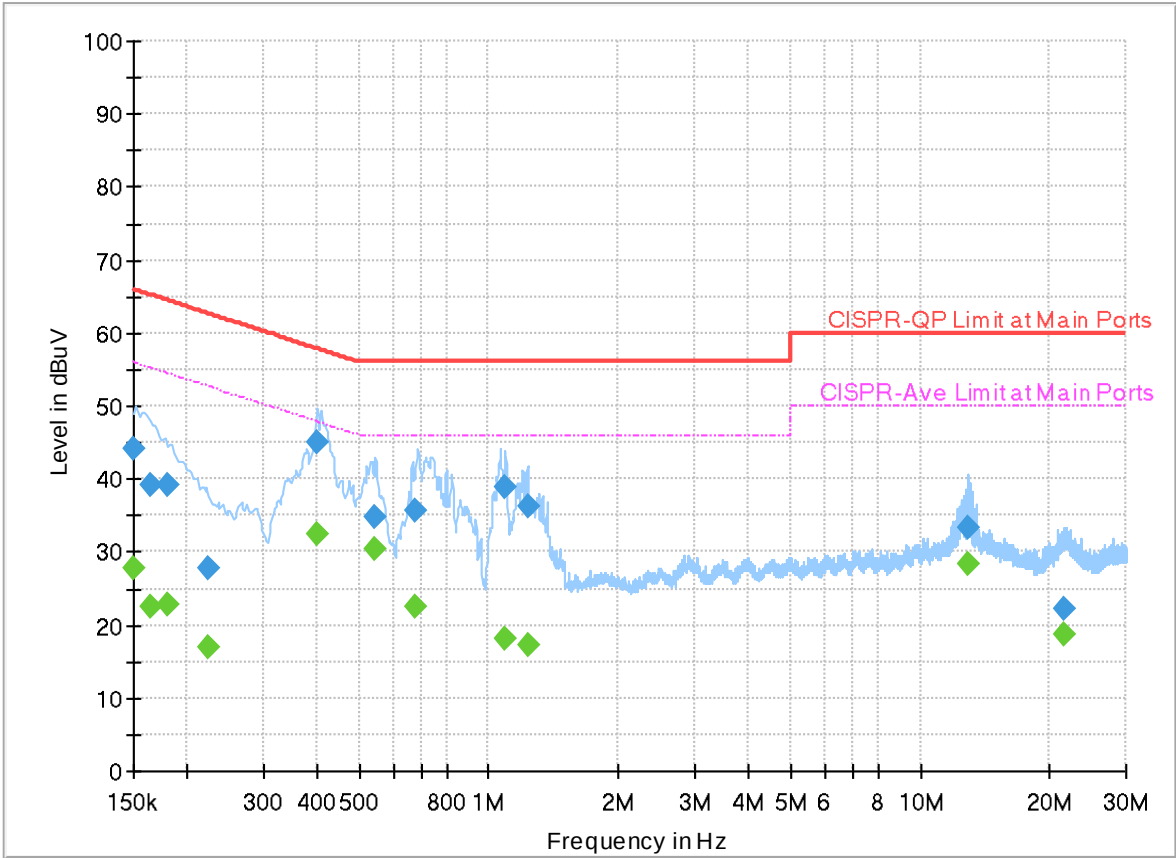

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.150000	---	27.88	56.00	28.12	N	FLO	20.0
0.150000	44.19	---	66.00	21.81	N	FLO	20.0
0.163500	---	22.44	55.28	32.84	N	FLO	20.0
0.163500	39.08	---	65.28	26.20	N	FLO	20.0
0.179250	---	22.83	54.52	31.69	N	FLO	20.0
0.179250	39.18	---	64.52	25.34	N	FLO	20.0
0.223170	---	17.02	52.70	35.68	N	FLO	20.0
0.223170	27.90	---	62.70	34.80	N	FLO	20.0
0.399120	---	32.55	47.87	15.32	N	FLO	20.0
0.399120	45.05	---	57.87	12.82	N	FLO	20.0
0.541500	---	30.34	46.00	15.66	N	FLO	20.0
0.541500	34.69	---	56.00	21.31	N	FLO	20.0
0.678750	---	22.37	46.00	23.63	N	FLO	20.0
0.678750	35.62	---	56.00	20.38	N	FLO	20.0
1.093290	---	18.07	46.00	27.93	N	FLO	20.0
1.093290	38.85	---	56.00	17.15	N	FLO	20.0
1.229550	---	17.28	46.00	28.72	N	FLO	20.0
1.229550	36.39	---	56.00	19.61	N	FLO	20.0
12.968250	---	28.28	50.00	21.72	N	FLO	20.5

12.968250	33.24	---	60.00	26.76	N	FLO	20.5
21.565500	---	18.69	50.00	31.31	N	FLO	20.9
21.565500	22.32	---	60.00	37.68	N	FLO	20.9

Appendix C. Radiated Spurious Emission Test Data

Test Engineer:	Daniel Lee, Fu Chen, Troye Hsieh	Temperature (°C):	19.1~21.9
		Relative Humidity (%):	50.2~65.2

Note symbol

-L	Low channel location
-R	High channel location





C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE GFSK	02	2404	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE GFSK	38	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE GFSK	76	2478	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE GFSK	02	2404	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE GFSK	38	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE GFSK	76	2478	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE GFSK	38	2440	2Mbps	-	SHF
Mode 8	2400-2483.5	1	Bluetooth-LE GFSK	38	2440	2Mbps	-	LF





C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE GFSK	02	2367.00	47.33	54.00	-6.67	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	02	4808.00	39.29	74.00	-34.71	V	Peak	Pass	-	Harmonic
2	Bluetooth-LE GFSK	38	2498.26	48.25	54.00	-5.75	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	38	7320.00	41.82	74.00	-32.18	V	Peak	Pass	-	Harmonic
3	Bluetooth-LE GFSK	76	2485.90	48.01	54.00	-5.99	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	76	7434.00	42.25	74.00	-31.75	V	Peak	Pass	-	Harmonic
4	Bluetooth-LE GFSK	02	2348.38	48.83	54.00	-5.17	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	02	4808.00	39.30	74.00	-34.70	H	Peak	Pass	-	Harmonic
5	Bluetooth-LE GFSK	38	2497.30	49.22	54.00	-4.78	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	38	7320.00	41.21	74.00	-32.79	V	Peak	Pass	-	Harmonic
6	Bluetooth-LE GFSK	76	2490.06	49.15	54.00	-4.85	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE GFSK	76	7434.00	42.63	74.00	-31.37	H	Peak	Pass	-	Harmonic
7	Bluetooth-LE GFSK	38	20957.32	41.09	74.00	-32.91	V	Peak	Pass	-	SHF
8	Bluetooth-LE GFSK	38	30.21	33.52	40.00	-6.48	H	QP	Pass	-	LF

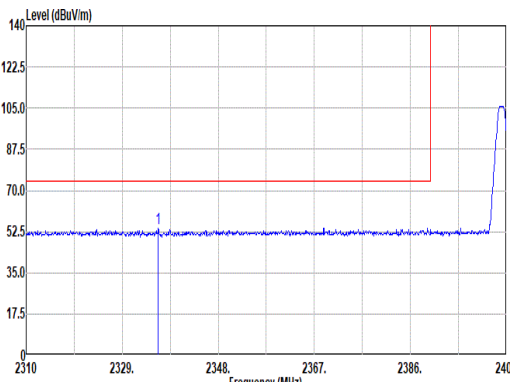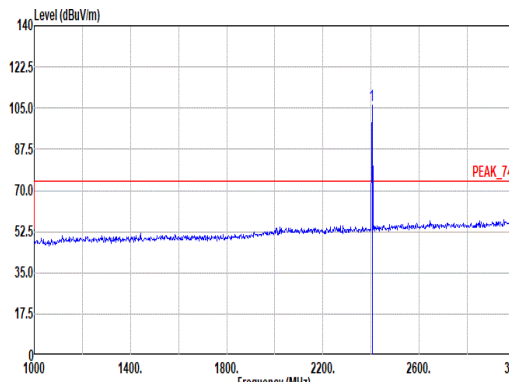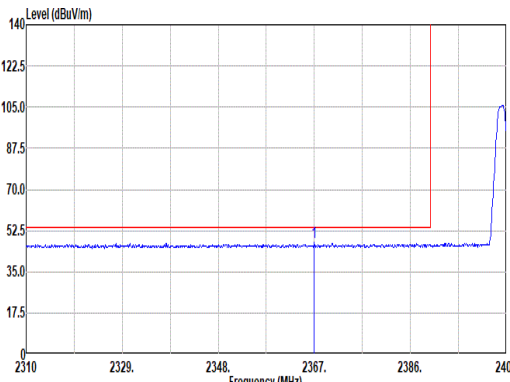
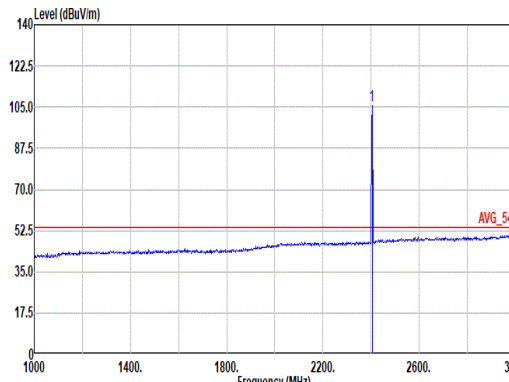


Mode	1																																																																																																										
	Band Edge																																																																																																										
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2336.13</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>43.20</td><td>27.10</td><td>7.11</td><td>33.37</td><td>10.01</td><td>300</td><td>253 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2336.13	54.05	74.00	-19.95	43.20	27.10	7.11	33.37	10.01	300	253 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>105.97</td><td>-----</td><td>-----</td><td>94.66</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>300</td><td>253 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	105.97	-----	-----	94.66	27.40	7.21	33.33	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2336.13	54.05	74.00	-19.95	43.20	27.10	7.11	33.37	10.01	300	253 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2404.00	105.97	-----	-----	94.66	27.40	7.21	33.33	10.03	300	253 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2367.00</td><td>47.33</td><td>54.00</td><td>-6.67</td><td>36.30</td><td>27.20</td><td>7.16</td><td>33.35</td><td>10.02</td><td>300</td><td>253 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2367.00	47.33	54.00	-6.67	36.30	27.20	7.16	33.35	10.02	300	253 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>105.52</td><td>-----</td><td>-----</td><td>94.21</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>300</td><td>253 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	105.52	-----	-----	94.21	27.40	7.21	33.33	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2367.00	47.33	54.00	-6.67	36.30	27.20	7.16	33.35	10.02	300	253 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2404.00	105.52	-----	-----	94.21	27.40	7.21	33.33	10.03	300	253 AVERAGE																																																																																																

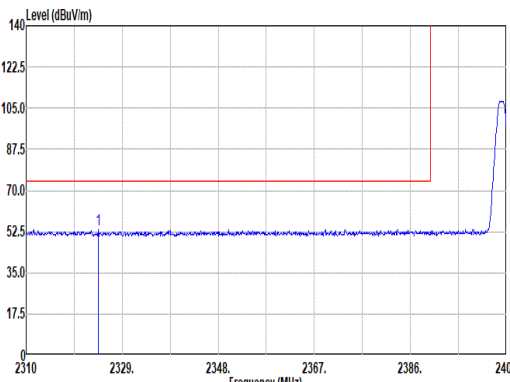
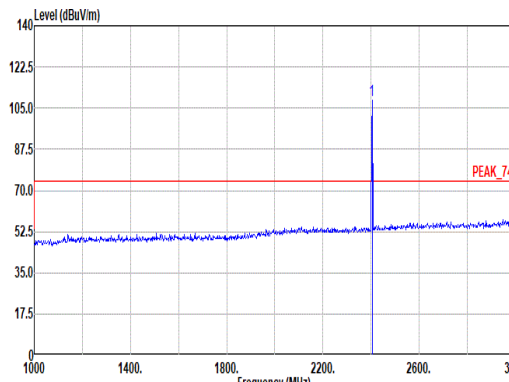
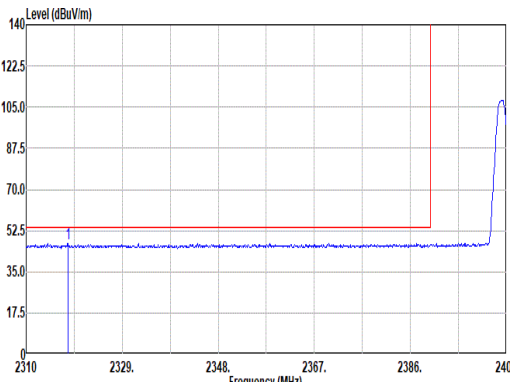
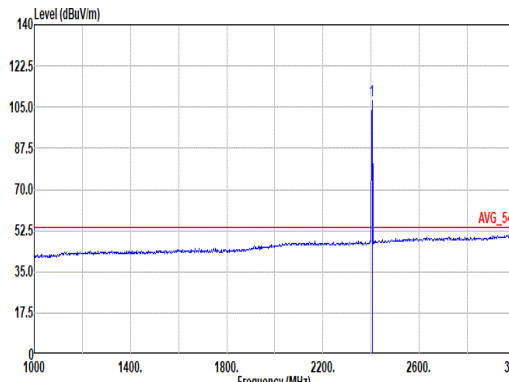


		1																																																																																																									
Mode	Band Edge																																																																																																										
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2324.35</td><td>53.47</td><td>74.00</td><td>-20.53</td><td>42.58</td><td>27.16</td><td>7.10</td><td>33.38</td><td>10.01</td><td>152</td><td>184 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2324.35	53.47	74.00	-20.53	42.58	27.16	7.10	33.38	10.01	152	184 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>108.23</td><td>-----</td><td>-----</td><td>96.92</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>152</td><td>184 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	108.23	-----	-----	96.92	27.40	7.21	33.33	10.03	152
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2324.35	53.47	74.00	-20.53	42.58	27.16	7.10	33.38	10.01	152	184 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2404.00	108.23	-----	-----	96.92	27.40	7.21	33.33	10.03	152	184 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2310.27</td><td>47.10</td><td>54.00</td><td>-6.90</td><td>36.18</td><td>27.20</td><td>7.09</td><td>33.38</td><td>10.01</td><td>152</td><td>184 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2310.27	47.10	54.00	-6.90	36.18	27.20	7.09	33.38	10.01	152	184 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>107.69</td><td>-----</td><td>-----</td><td>96.38</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>152</td><td>184 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2404.00	107.69	-----	-----	96.38	27.40	7.21	33.33	10.03	152
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2310.27	47.10	54.00	-6.90	36.18	27.20	7.09	33.38	10.01	152	184 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2404.00	107.69	-----	-----	96.38	27.40	7.21	33.33	10.03	152	184 AVERAGE																																																																																																



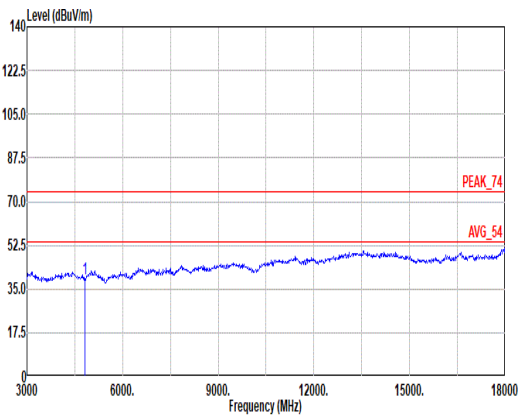
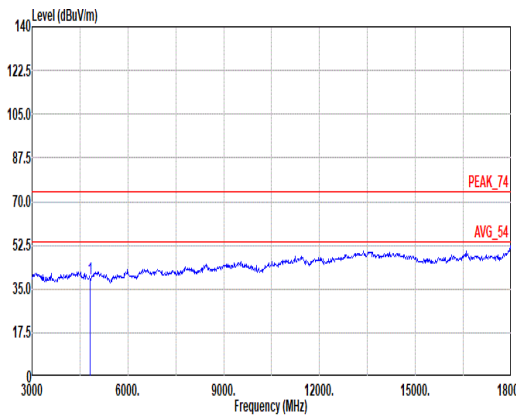


Mode	1																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg																																																																																																
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 1 Setting : 7F Plane : Z with adapter						Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 1 Setting : 7F Plane : Z with adapter																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4808.00</td><td>39.17</td><td>74.00</td><td>-34.83</td><td>63.19</td><td>32.35</td><td>9.88</td><td>66.75</td><td>0.50</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	39.17	74.00	-34.83	63.19	32.35	9.88	66.75	0.50	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4808.00</td><td>39.29</td><td>74.00</td><td>-34.71</td><td>63.31</td><td>32.35</td><td>9.88</td><td>66.75</td><td>0.50</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	39.29	74.00	-34.71	63.31	32.35	9.88	66.75	0.50	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4808.00	39.17	74.00	-34.83	63.19	32.35	9.88	66.75	0.50	--	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4808.00	39.29	74.00	-34.71	63.31	32.35	9.88	66.75	0.50	--	Peak																																																																																					

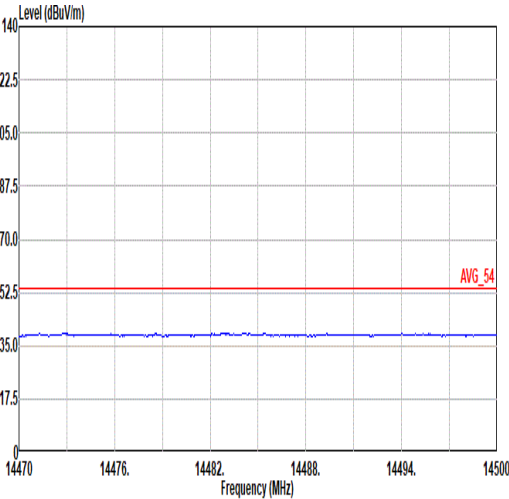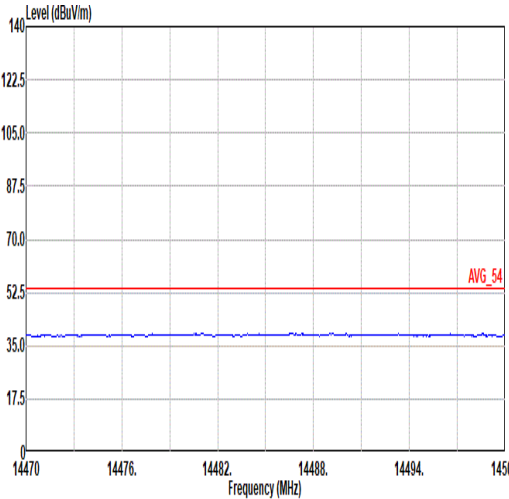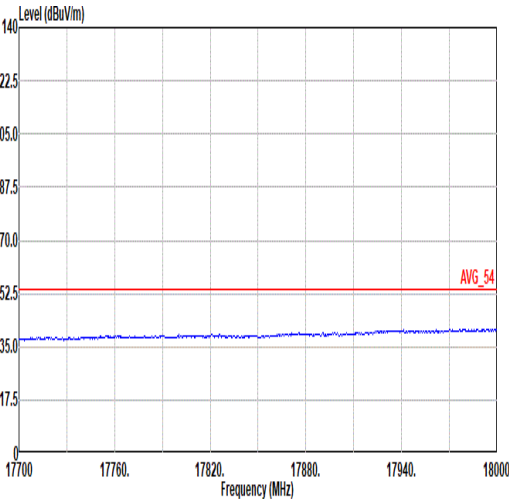
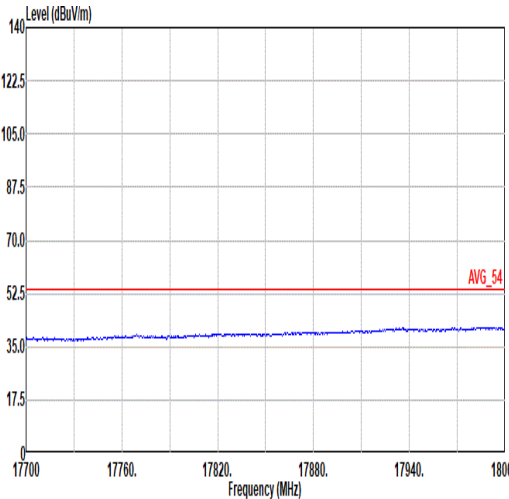


Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 7F Plane : Z with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 7F Plane : Z with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 7F Plane : Z with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 7F Plane : Z with adapter

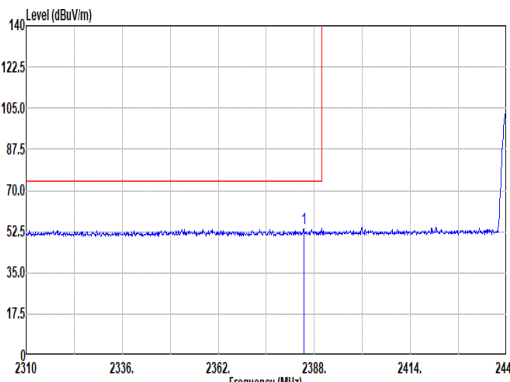
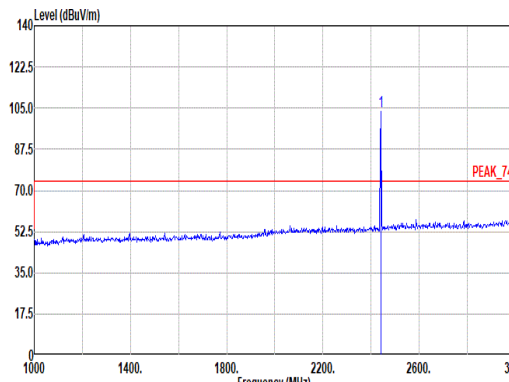
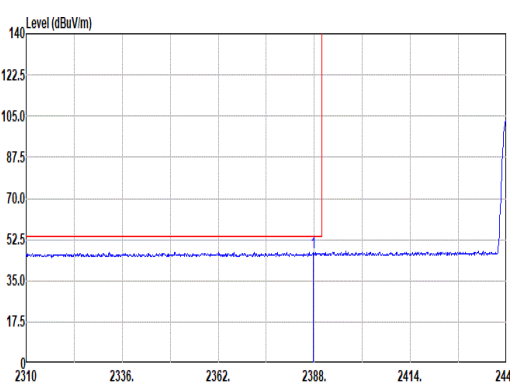
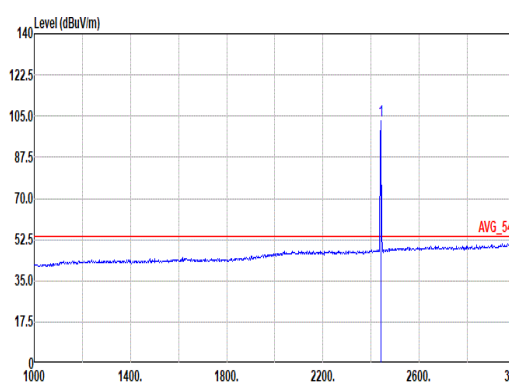


		2																																																																																																									
Mode	Band Edge - L																																																																																																										
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2385.14</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>42.64</td><td>27.25</td><td>7.18</td><td>33.34</td><td>10.03</td><td>200</td><td>227 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2385.14	53.76	74.00	-20.24	42.64	27.25	7.18	33.34	10.03	200	227 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>103.40</td><td>-----</td><td>-----</td><td>91.82</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>200</td><td>227 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	103.40	-----	-----	91.82	27.60	7.26	33.31	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2385.14	53.76	74.00	-20.24	42.64	27.25	7.18	33.34	10.03	200	227 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2440.00	103.40	-----	-----	91.82	27.60	7.26	33.31	10.03	200	227 PEAK																																																																																																
Avg																																																																																																											
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2387.61</td><td>47.26</td><td>54.00</td><td>-6.74</td><td>36.11</td><td>27.28</td><td>7.18</td><td>33.34</td><td>10.03</td><td>200</td><td>227 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2387.61	47.26	54.00	-6.74	36.11	27.28	7.18	33.34	10.03	200	227 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>103.07</td><td>-----</td><td>-----</td><td>91.49</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>200</td><td>227 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	103.07	-----	-----	91.49	27.60	7.26	33.31	10.03	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2387.61	47.26	54.00	-6.74	36.11	27.28	7.18	33.34	10.03	200	227 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	2440.00	103.07	-----	-----	91.49	27.60	7.26	33.31	10.03	200	227 AVERAGE																																																																																																

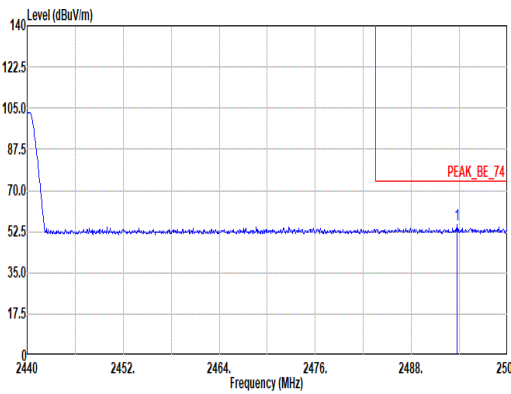
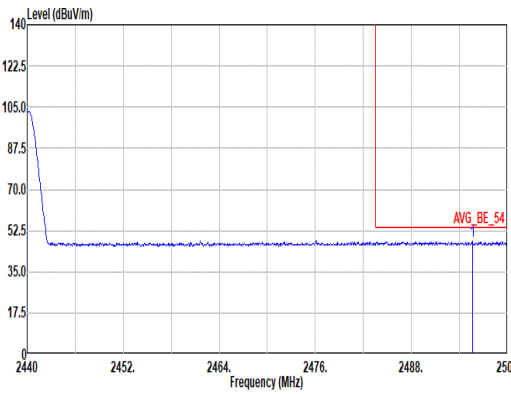


Mode	2																																							
	Band Edge - R																																							
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																							
ANT	1																																							
Pol.	Horizontal	Fundamental																																						
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2493.70</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>43.49</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03</td><td>200</td><td>227</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2493.70	55.48	74.00	-18.52	43.49	27.90	7.33	33.27	10.03	200	227	PEAK	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																													
1 2493.70	55.48	74.00	-18.52	43.49	27.90	7.33	33.27	10.03	200	227	PEAK																													
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:22.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2495.62</td><td>47.83</td><td>54.00</td><td>-6.17</td><td>35.84</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03</td><td>200</td><td>227</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2495.62	47.83	54.00	-6.17	35.84	27.90	7.33	33.27	10.03	200	227	AVERAGE	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																													
1 2495.62	47.83	54.00	-6.17	35.84	27.90	7.33	33.27	10.03	200	227	AVERAGE																													

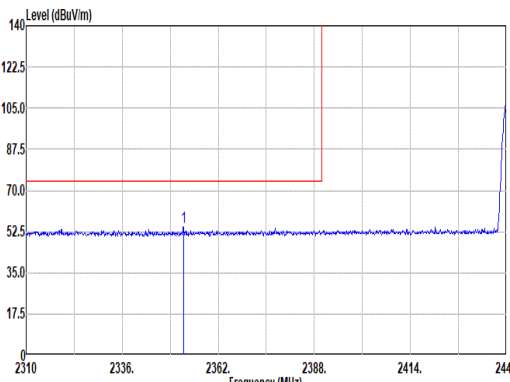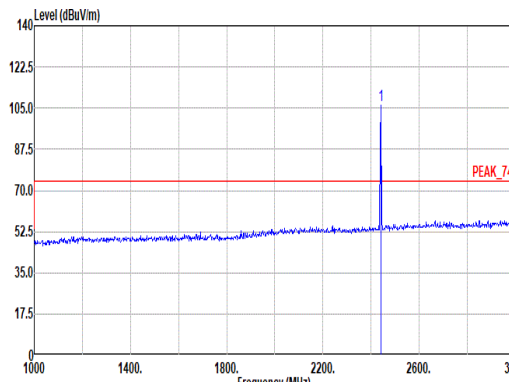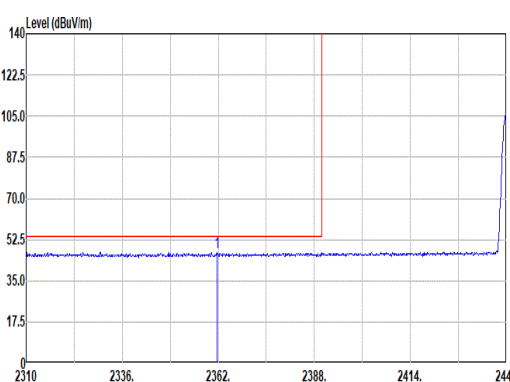
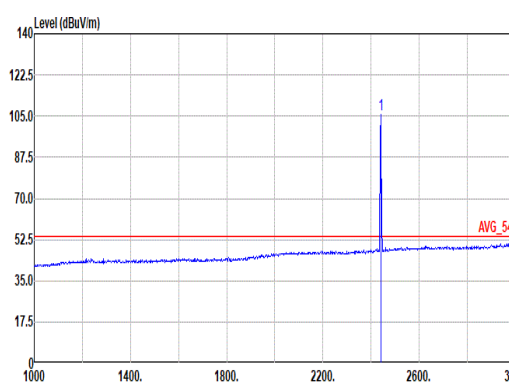


		2																																																																																																
Mode	Band Edge - L																																																																																																	
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical					Fundamental																																																																																												
Peak																																																																																																		
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2352.64</td><td>54.63</td><td>74.00</td><td>-19.37</td><td>43.63</td><td>27.20</td><td>7.14</td><td>33.36</td><td>10.02</td><td>100</td><td>189 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2352.64	54.63	74.00	-19.37	43.63	27.20	7.14	33.36	10.02	100	189 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>106.16</td><td>-----</td><td>-----</td><td>94.58</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>100</td><td>189 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	106.16	-----	-----	94.58	27.60	7.26	33.31	10.03	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2352.64	54.63	74.00	-19.37	43.63	27.20	7.14	33.36	10.02	100	189 PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	106.16	-----	-----	94.58	27.60	7.26	33.31	10.03	100	189 PEAK																																																																																							
Avg																																																																																																		
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2361.74</td><td>47.04</td><td>54.00</td><td>-6.96</td><td>36.03</td><td>27.20</td><td>7.15</td><td>33.36</td><td>10.02</td><td>100</td><td>189 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2361.74	47.04	54.00	-6.96	36.03	27.20	7.15	33.36	10.02	100	189 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>105.84</td><td>-----</td><td>-----</td><td>94.26</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>100</td><td>189 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	105.84	-----	-----	94.26	27.60	7.26	33.31	10.03	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2361.74	47.04	54.00	-6.96	36.03	27.20	7.15	33.36	10.02	100	189 AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	105.84	-----	-----	94.26	27.60	7.26	33.31	10.03	100	189 AVERAGE																																																																																							



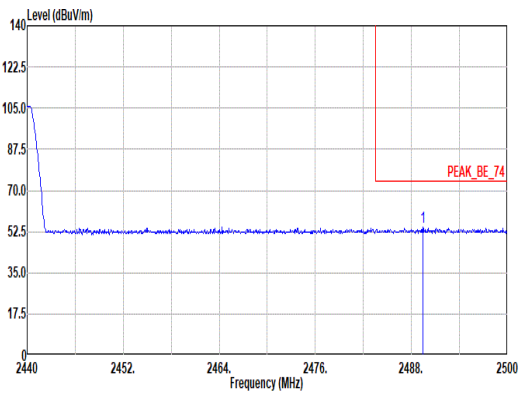
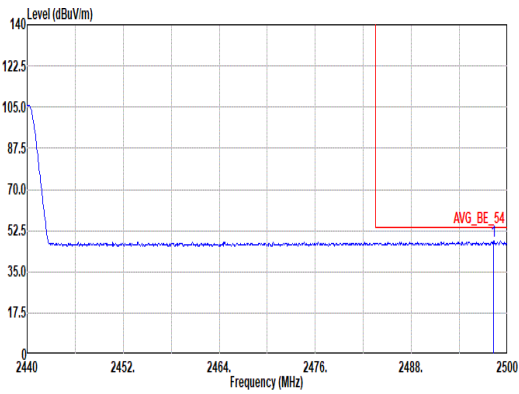


Mode	2																																							
	Band Edge - R																																							
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																							
ANT	1																																							
Pol.	Vertical	Fundamental																																						
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2489.44</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>42.24</td><td>27.89</td><td>7.33</td><td>33.28</td><td>10.03</td><td>100</td><td>189</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2489.44	54.21	74.00	-19.79	42.24	27.89	7.33	33.28	10.03	100	189	PEAK	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																													
1 2489.44	54.21	74.00	-19.79	42.24	27.89	7.33	33.28	10.03	100	189	PEAK																													
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:22.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 7F Plane : Z with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2498.26</td><td>48.25</td><td>54.00</td><td>-5.75</td><td>36.25</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>100</td><td>189</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2498.26	48.25	54.00	-5.75	36.25	27.90	7.34	33.27	10.03	100	189	AVERAGE	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																												
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																													
1 2498.26	48.25	54.00	-5.75	36.25	27.90	7.34	33.27	10.03	100	189	AVERAGE																													

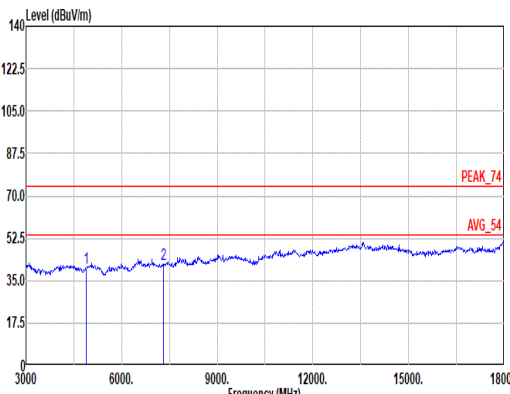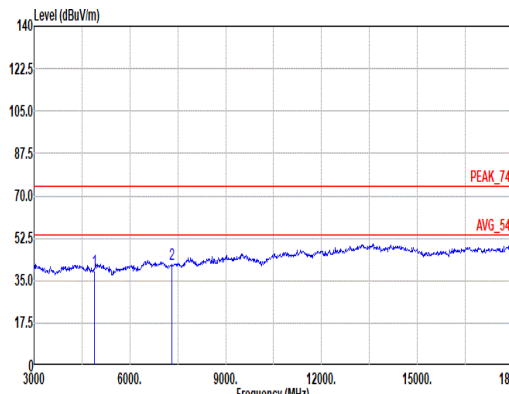

Mode	2																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_Bluetooth-LE GFSK _CH38_2440MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 7F Plane : Z with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>39.94</td><td>74.00</td><td>-34.06</td><td>63.28</td><td>32.72</td><td>10.10</td><td>66.70</td><td>0.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>41.63</td><td>74.00</td><td>-32.37</td><td>57.58</td><td>36.76</td><td>12.76</td><td>65.78</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	39.94	74.00	-34.06	63.28	32.72	10.10	66.70	0.54	--	--	Peak	2	7320.00	41.63	74.00	-32.37	57.58	36.76	12.76	65.78	0.31	--	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 7F Plane : Z with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>39.32</td><td>74.00</td><td>-34.68</td><td>62.66</td><td>32.72</td><td>10.10</td><td>66.70</td><td>0.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>41.82</td><td>74.00</td><td>-32.18</td><td>57.77</td><td>36.76</td><td>12.76</td><td>65.78</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	39.32	74.00	-34.68	62.66	32.72	10.10	66.70	0.54	--	--	Peak	2	7320.00	41.82	74.00	-32.18	57.77	36.76	12.76	65.78	0.31	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4880.00	39.94	74.00	-34.06	63.28	32.72	10.10	66.70	0.54	--	--	Peak																																																																																																																	
2	7320.00	41.63	74.00	-32.37	57.58	36.76	12.76	65.78	0.31	--	--	Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4880.00	39.32	74.00	-34.68	62.66	32.72	10.10	66.70	0.54	--	--	Peak																																																																																																																	
2	7320.00	41.82	74.00	-32.18	57.77	36.76	12.76	65.78	0.31	--	--	Peak																																																																																																																	

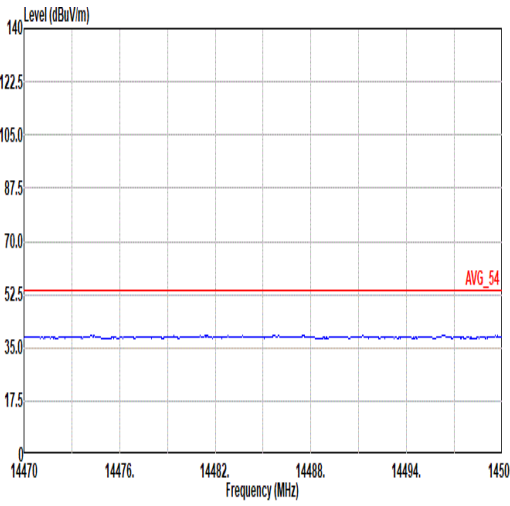
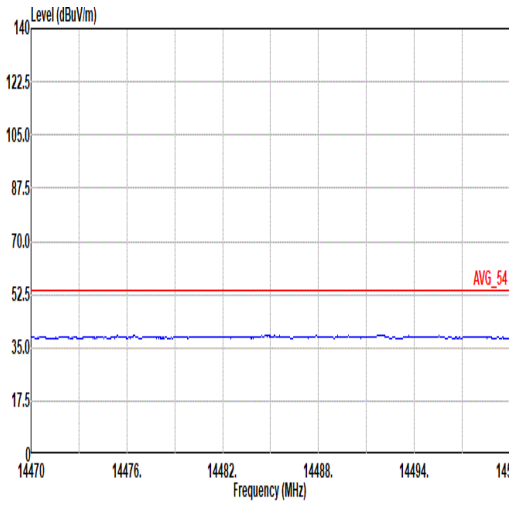
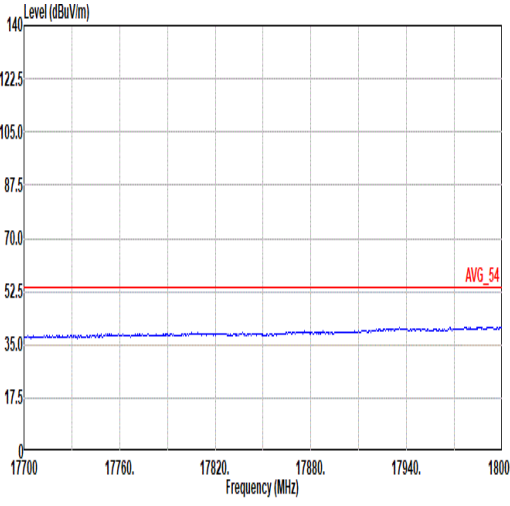
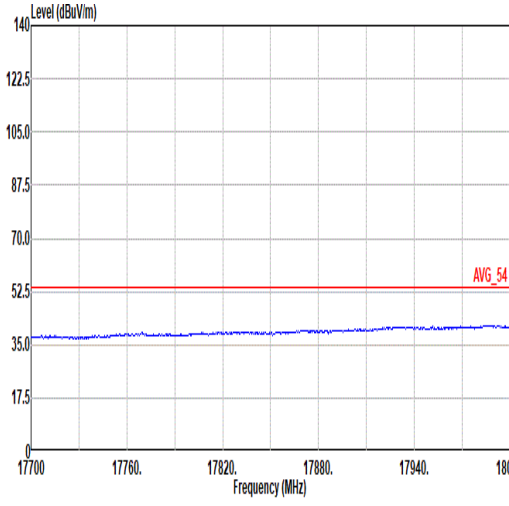


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 7F Plane : Z with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 7F Plane : Z with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 7F Plane : Z with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 7F Plane : Z with adapter



Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE GFSK_CH76_2478MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2483.76</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>42.32</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2483.76	54.23	74.00	-19.77	42.32	27.84	7.32	33.28	10.03	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2478.00</td><td>105.11</td><td>-----</td><td>-----</td><td>93.27</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2478.00	105.11	-----	-----	93.27	27.78	7.31	33.28	10.03
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2483.76	54.23	74.00	-19.77	42.32	27.84	7.32	33.28	10.03																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2478.00	105.11	-----	-----	93.27	27.78	7.31	33.28	10.03																																																																									
Avg	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2483.90</td><td>48.01</td><td>54.00</td><td>-5.99</td><td>36.00</td><td>27.06</td><td>7.32</td><td>33.28</td><td>10.03</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2483.90	48.01	54.00	-5.99	36.00	27.06	7.32	33.28	10.03	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2478.00</td><td>104.90</td><td>-----</td><td>-----</td><td>93.06</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2478.00	104.90	-----	-----	93.06	27.78	7.31	33.28	10.03
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2483.90	48.01	54.00	-5.99	36.00	27.06	7.32	33.28	10.03																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1	2478.00	104.90	-----	-----	93.06	27.78	7.31	33.28	10.03																																																																									

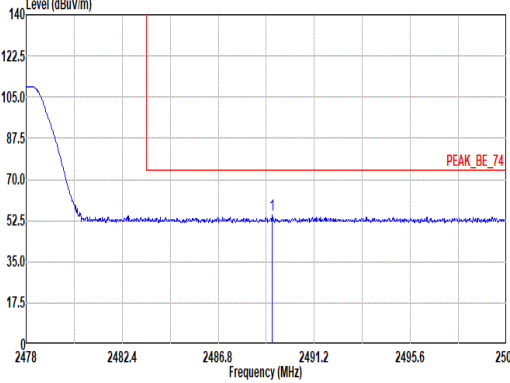
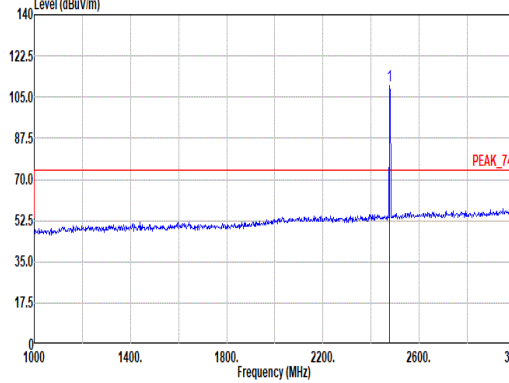
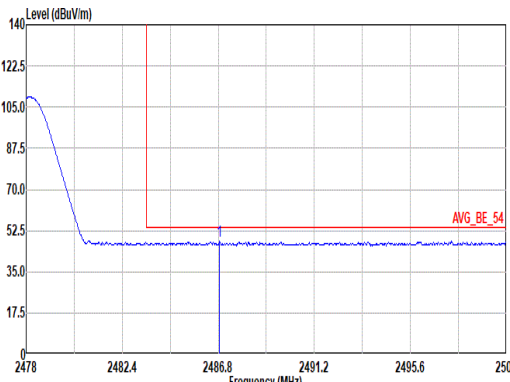
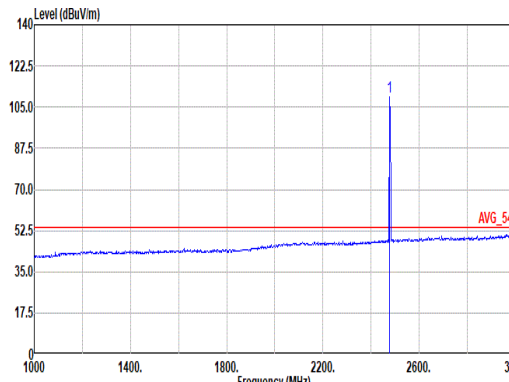


		3																																																																																																		
Mode		Band Edge																																																																																																		
		2400-2483.5_Bluetooth-LE GFSK_CH76_2478MHz																																																																																																		
ANT		1																																																																																																		
Pol.	Vertical											Fundamental																																																																																								
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2489.26</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>42.83</td><td>27.89</td><td>7.32</td><td>33.28</td><td>10.03</td><td>196</td><td>185</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2489.26	54.79	74.00	-19.21	42.83	27.89	7.32	33.28	10.03	196	185	PEAK	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2478.00</td><td>109.68</td><td>-----</td><td>-----</td><td>97.84</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td><td>196</td><td>185</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2478.00	109.68	-----	-----	97.84	27.78	7.31	33.28	10.03	196	185	PEAK
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2489.26	54.79	74.00	-19.21	42.83	27.89	7.32	33.28	10.03	196	185	PEAK																																																																																								
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2478.00	109.68	-----	-----	97.84	27.78	7.31	33.28	10.03	196	185	PEAK																																																																																								
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2486.84</td><td>47.97</td><td>54.00</td><td>-6.03</td><td>36.03</td><td>27.87</td><td>7.32</td><td>33.28</td><td>10.03</td><td>196</td><td>185</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2486.84	47.97	54.00	-6.03	36.03	27.87	7.32	33.28	10.03	196	185	AVERAGE	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 7F Plane : Z with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2478.00</td><td>109.28</td><td>-----</td><td>-----</td><td>97.44</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td><td>196</td><td>185</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2478.00	109.28	-----	-----	97.44	27.78	7.31	33.28	10.03	196	185	AVERAGE
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2486.84	47.97	54.00	-6.03	36.03	27.87	7.32	33.28	10.03	196	185	AVERAGE																																																																																								
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2478.00	109.28	-----	-----	97.44	27.78	7.31	33.28	10.03	196	185	AVERAGE																																																																																								







Mode	3																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_Bluetooth-LE GFSK _CH76_2478MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 7F Plane : Z with adapter						Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 7F Plane : Z with adapter																																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>41.38</td><td>74.00</td><td>-32.62</td><td>64.10</td><td>33.01</td><td>10.34</td><td>66.64</td><td>0.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>41.93</td><td>74.00</td><td>-32.07</td><td>58.47</td><td>36.26</td><td>12.81</td><td>65.92</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	41.38	74.00	-32.62	64.10	33.01	10.34	66.64	0.57	--	--	Peak	2	7434.00	41.93	74.00	-32.07	58.47	36.26	12.81	65.92	0.31	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>40.81</td><td>74.00</td><td>-33.19</td><td>63.53</td><td>33.01</td><td>10.34</td><td>66.64</td><td>0.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>42.25</td><td>74.00</td><td>-31.75</td><td>58.79</td><td>36.26</td><td>12.81</td><td>65.92</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	40.81	74.00	-33.19	63.53	33.01	10.34	66.64	0.57	--	--	Peak	2	7434.00	42.25	74.00	-31.75	58.79	36.26	12.81	65.92	0.31	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4956.00	41.38	74.00	-32.62	64.10	33.01	10.34	66.64	0.57	--	--	Peak																																																																																																																	
2	7434.00	41.93	74.00	-32.07	58.47	36.26	12.81	65.92	0.31	--	--	Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4956.00	40.81	74.00	-33.19	63.53	33.01	10.34	66.64	0.57	--	--	Peak																																																																																																																	
2	7434.00	42.25	74.00	-31.75	58.79	36.26	12.81	65.92	0.31	--	--	Peak																																																																																																																	

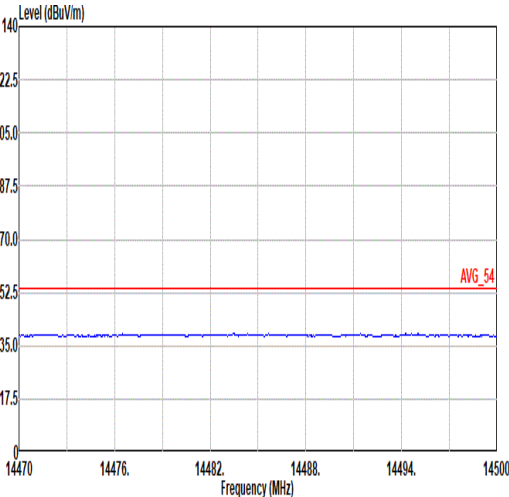
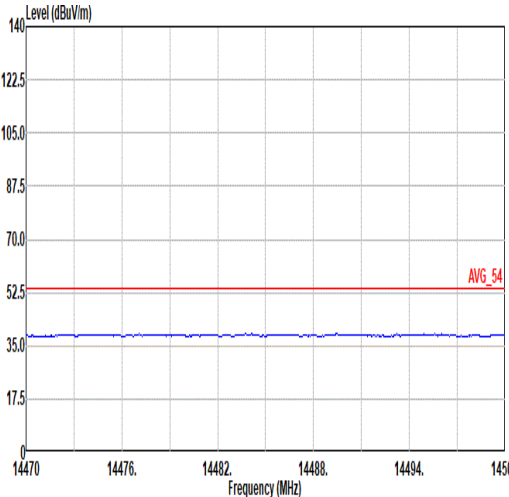
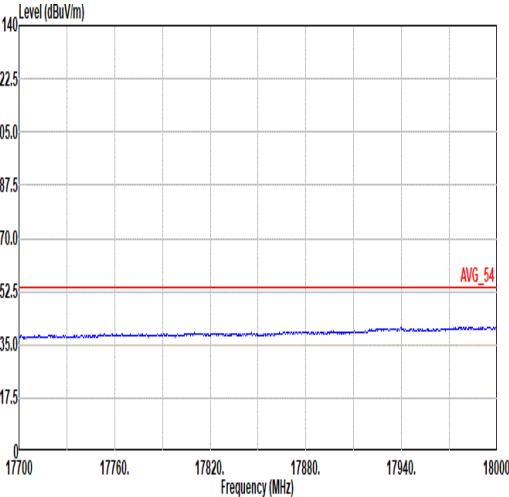
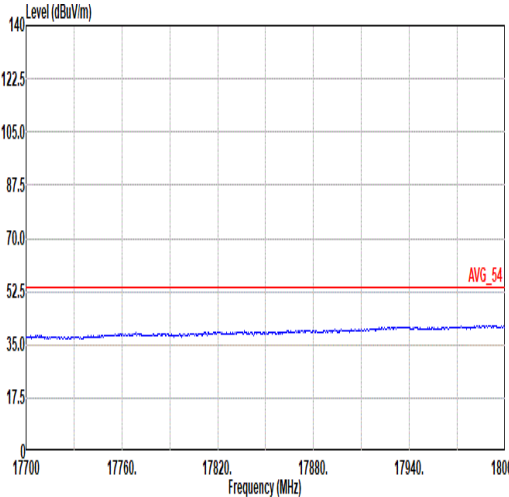


Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK_CH76_2478MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 7F Plane : Z with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 7F Plane : Z with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 7F Plane : Z with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 7F Plane : Z with adapter

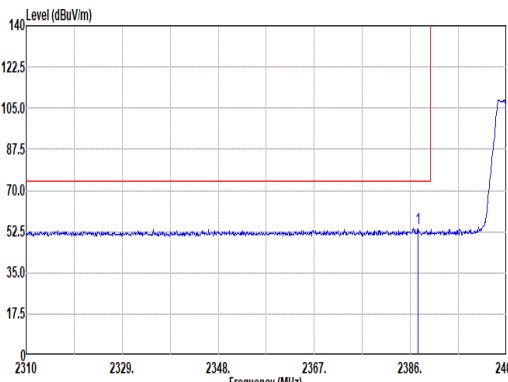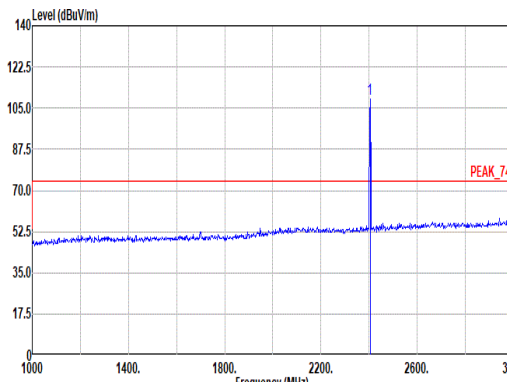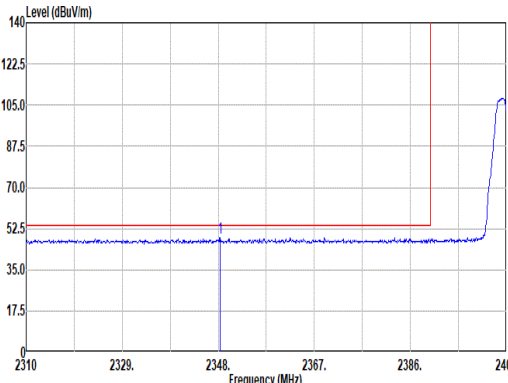
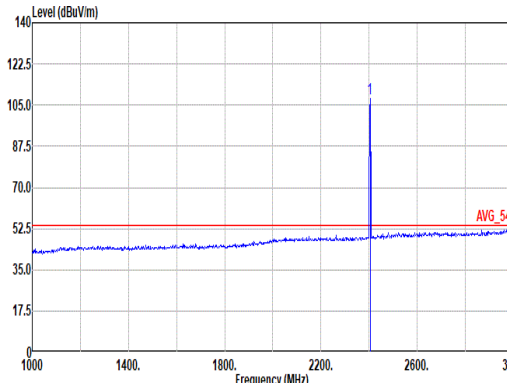


Mode	4																																																																																															
	Band Edge																																																																																															
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.52</td><td>53.73</td><td>74.00</td><td>-20.27</td><td>42.58</td><td>27.28</td><td>7.18</td><td>33.34</td><td>10.03</td><td>257</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.52	53.73	74.00	-20.27	42.58	27.28	7.18	33.34	10.03	257	0 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>108.70</td><td>-----</td><td>-----</td><td>97.39</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>257</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	108.70	-----	-----	97.39	27.40	7.21	33.33	10.03	257
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2387.52	53.73	74.00	-20.27	42.58	27.28	7.18	33.34	10.03	257	0 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2404.00	108.70	-----	-----	97.39	27.40	7.21	33.33	10.03	257	0 PEAK																																																																																					
Avg																																																																																																
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2348.38</td><td>48.83</td><td>54.00</td><td>-5.17</td><td>37.86</td><td>27.18</td><td>7.13</td><td>33.36</td><td>10.02</td><td>257</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2348.38	48.83	54.00	-5.17	37.86	27.18	7.13	33.36	10.02	257	0 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>107.76</td><td>-----</td><td>-----</td><td>96.45</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>257</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	107.76	-----	-----	96.45	27.40	7.21	33.33	10.03	257
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2348.38	48.83	54.00	-5.17	37.86	27.18	7.13	33.36	10.02	257	0 AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2404.00	107.76	-----	-----	96.45	27.40	7.21	33.33	10.03	257	0 AVERAGE																																																																																					

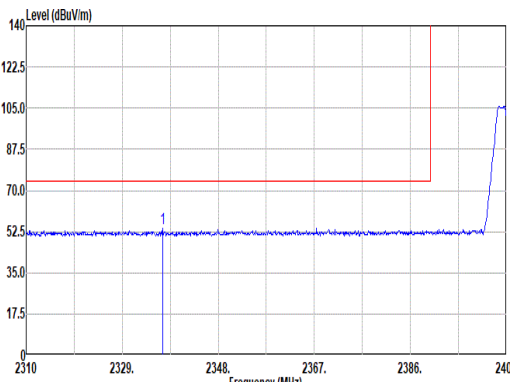
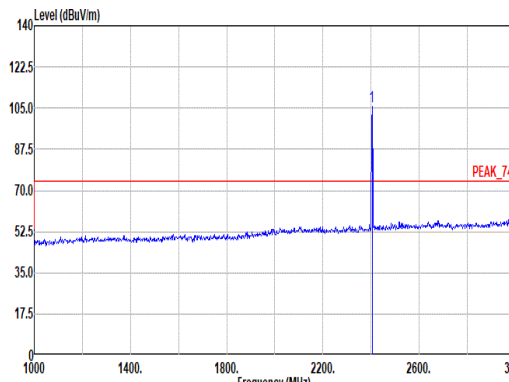
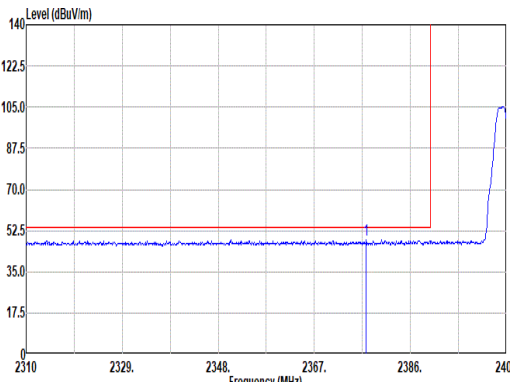
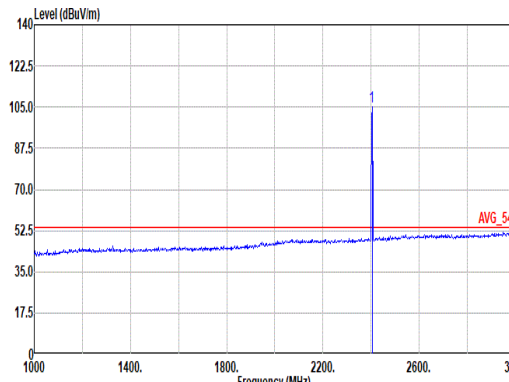


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2336.98</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>42.92</td><td>27.10</td><td>7.11</td><td>33.37</td><td>10.01</td><td>128</td><td>353</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2336.98	53.77	74.00	-20.23	42.92	27.10	7.11	33.37	10.01	128	353	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>105.79</td><td>-----</td><td>-----</td><td>94.48</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>128</td><td>353</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	105.79	-----	-----	94.48	27.40	7.21	33.33	10.03	128	353
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2336.98	53.77	74.00	-20.23	42.92	27.10	7.11	33.37	10.01	128	353	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2404.00	105.79	-----	-----	94.48	27.40	7.21	33.33	10.03	128	353	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.26</td><td>48.42</td><td>54.00</td><td>-5.58</td><td>37.38</td><td>27.20</td><td>7.17</td><td>33.35</td><td>10.02</td><td>128</td><td>353</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2377.26	48.42	54.00	-5.58	37.38	27.20	7.17	33.35	10.02	128	353	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>105.12</td><td>-----</td><td>-----</td><td>93.81</td><td>27.40</td><td>7.21</td><td>33.33</td><td>10.03</td><td>128</td><td>353</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	105.12	-----	-----	93.81	27.40	7.21	33.33	10.03	128	353
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2377.26	48.42	54.00	-5.58	37.38	27.20	7.17	33.35	10.02	128	353	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2404.00	105.12	-----	-----	93.81	27.40	7.21	33.33	10.03	128	353	AVERAGE																																																																																							



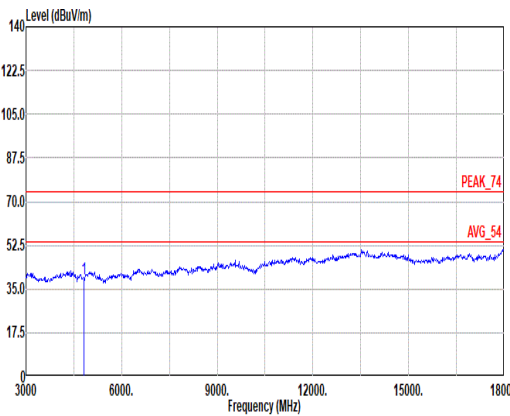
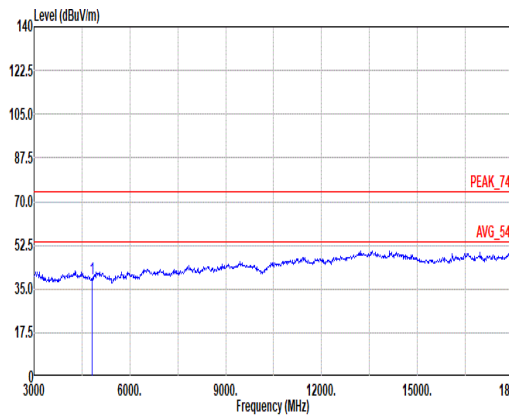


Mode	4																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak Avg																																																																																																
	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 4 Setting : 7F Plane : Y with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4808.00</td><td>39.30</td><td>74.00</td><td>-34.70</td><td>63.32</td><td>32.35</td><td>9.88</td><td>66.75</td><td>0.50</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	39.30	74.00	-34.70	63.32	32.35	9.88	66.75	0.50	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 4 Setting : 7F Plane : Y with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4808.00</td><td>39.16</td><td>74.00</td><td>-34.84</td><td>63.18</td><td>32.35</td><td>9.88</td><td>66.75</td><td>0.50</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	39.16	74.00	-34.84	63.18	32.35	9.88	66.75	0.50	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4808.00	39.30	74.00	-34.70	63.32	32.35	9.88	66.75	0.50	--	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4808.00	39.16	74.00	-34.84	63.18	32.35	9.88	66.75	0.50	--	Peak																																																																																					

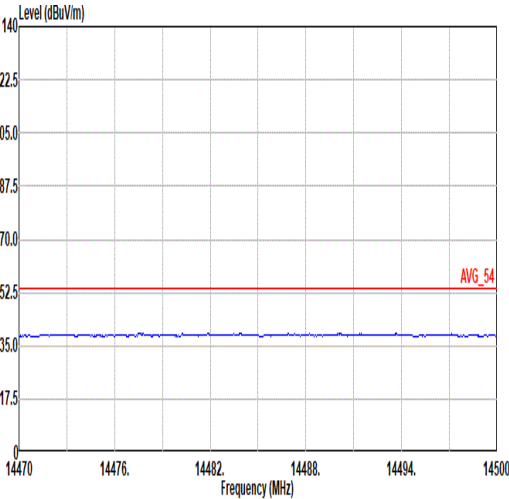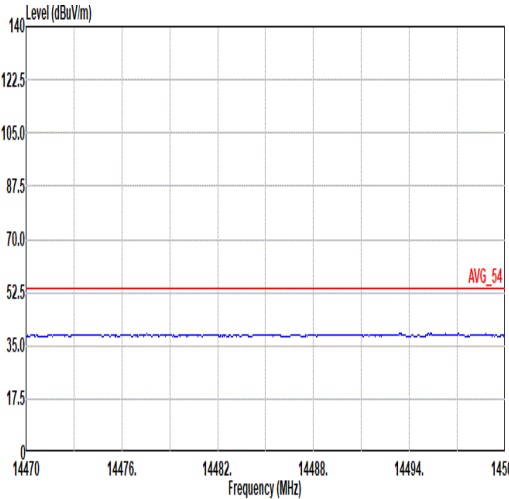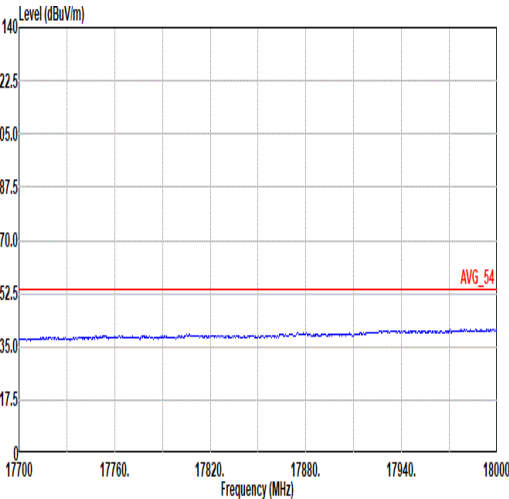
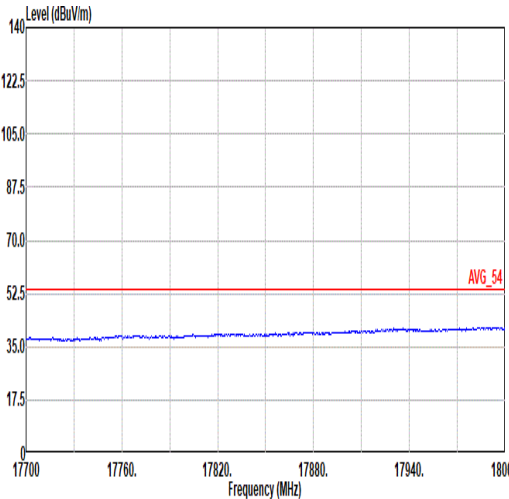


Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK_CH02_2404MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 7F Plane : Y with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 7F Plane : Y with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 7F Plane : Y with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 7F Plane : Y with adapter

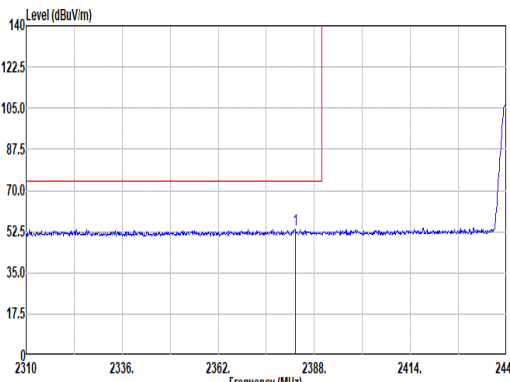
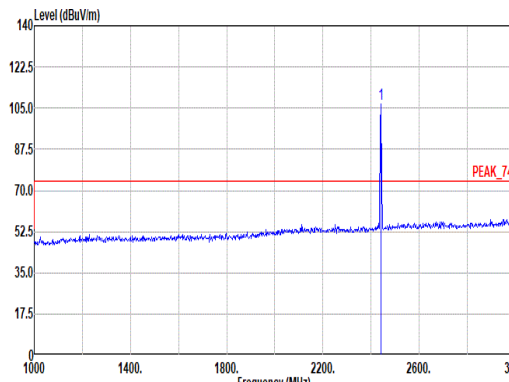
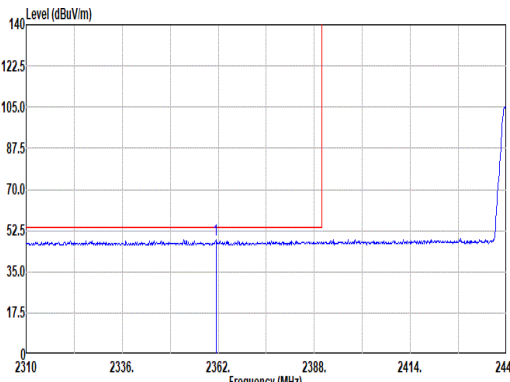
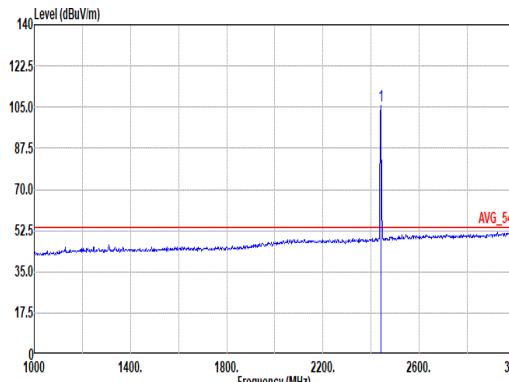


Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>42.48</td><td>27.23</td><td>7.18</td><td>33.34</td><td>10.03</td><td>362</td><td>150</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.00	53.58	74.00	-20.42	42.48	27.23	7.18	33.34	10.03	362	150	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>106.50</td><td>-----</td><td>-----</td><td>94.92</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>362</td><td>150</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	106.50	-----	-----	94.92	27.60	7.26	33.31	10.03	362	150
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2382.00	53.58	74.00	-20.42	42.48	27.23	7.18	33.34	10.03	362	150	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	106.50	-----	-----	94.92	27.60	7.26	33.31	10.03	362	150	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2361.35</td><td>48.53</td><td>54.00</td><td>-5.47</td><td>37.52</td><td>27.20</td><td>7.15</td><td>33.36</td><td>10.02</td><td>362</td><td>150</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2361.35	48.53	54.00	-5.47	37.52	27.20	7.15	33.36	10.02	362	150	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>105.84</td><td>-----</td><td>-----</td><td>94.26</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>362</td><td>150</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	105.84	-----	-----	94.26	27.60	7.26	33.31	10.03	362	150
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2361.35	48.53	54.00	-5.47	37.52	27.20	7.15	33.36	10.02	362	150	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2440.00	105.84	-----	-----	94.26	27.60	7.26	33.31	10.03	362	150	AVERAGE																																																																																							

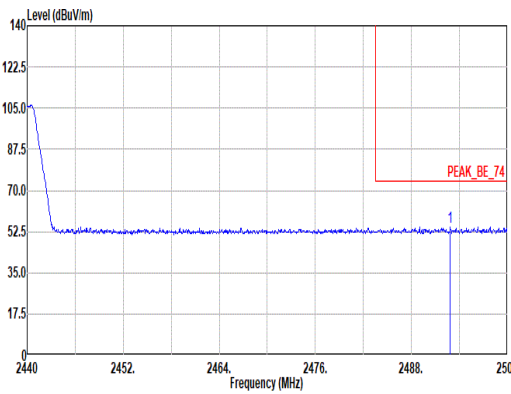
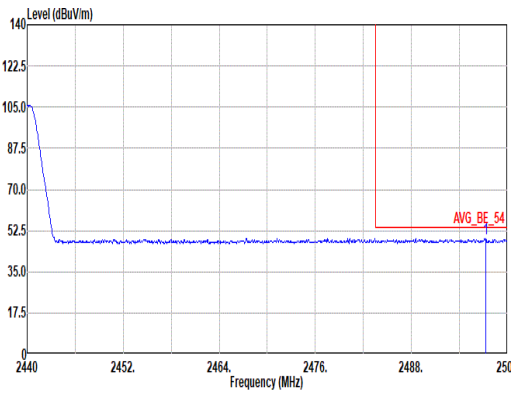


Mode	5																																										
	Band Edge - R																																										
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91280_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2492.86</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>42.63</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03</td><td>362</td><td>150</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	2492.86	54.62	74.00	-19.38	42.63	27.90	7.33	33.27	10.03	362	150	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																															
1	2492.86	54.62	74.00	-19.38	42.63	27.90	7.33	33.27	10.03	362	150	PEAK																															
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91280_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2497.30</td><td>49.22</td><td>54.00</td><td>-4.78</td><td>37.22</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>362</td><td>150</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	2497.30	49.22	54.00	-4.78	37.22	27.90	7.34	33.27	10.03	362	150	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																															
1	2497.30	49.22	54.00	-4.78	37.22	27.90	7.34	33.27	10.03	362	150	AVERAGE																															

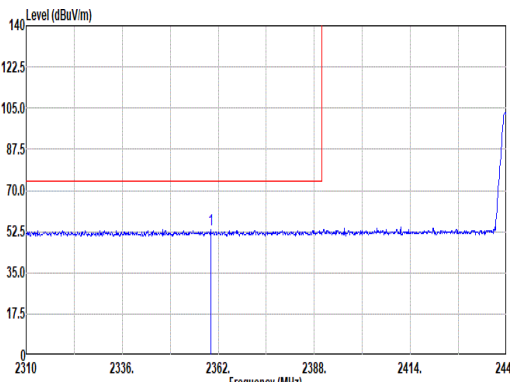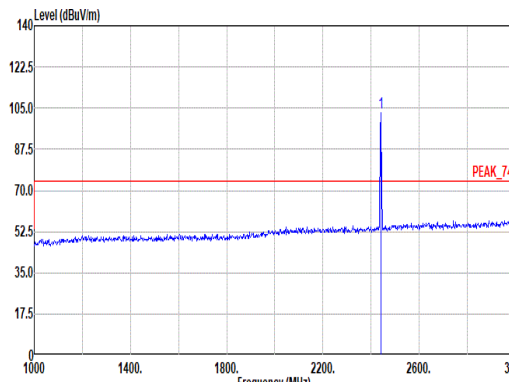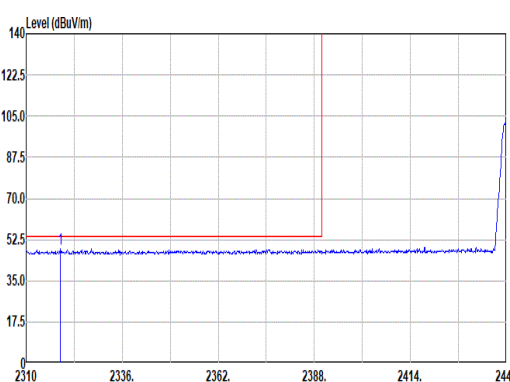
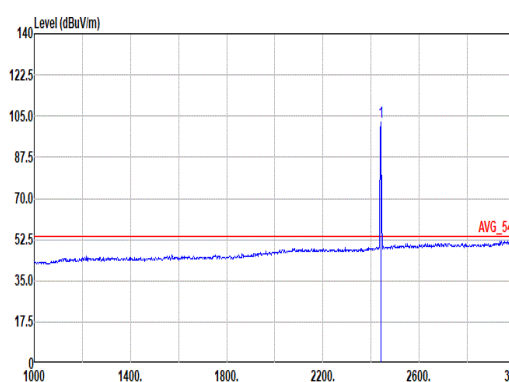


Mode	5																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2359.92</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>42.48</td><td>27.20</td><td>7.15</td><td>33.36</td><td>10.02</td><td>400</td><td>210</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2359.92	53.49	74.00	-20.51	42.48	27.20	7.15	33.36	10.02	400	210	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>PEAK</th></tr><tr><td>1</td><td>2440.00</td><td>103.26</td><td>-----</td><td>-----</td><td>91.68</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>400</td><td>210</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK	1	2440.00	103.26	-----	-----	91.68	27.60	7.26	33.31	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																								
1	2359.92	53.49	74.00	-20.51	42.48	27.20	7.15	33.36	10.02	400	210																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																																																								
1	2440.00	103.26	-----	-----	91.68	27.60	7.26	33.31	10.03	400	210																																																																																								
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2319.23</td><td>48.75</td><td>54.00</td><td>-5.25</td><td>37.63</td><td>27.20</td><td>7.09</td><td>33.38</td><td>10.01</td><td>400</td><td>210</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2319.23	48.75	54.00	-5.25	37.63	27.20	7.09	33.38	10.01	400	210	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>AVERAGE</th></tr><tr><td>1</td><td>2440.00</td><td>102.41</td><td>-----</td><td>-----</td><td>90.83</td><td>27.60</td><td>7.26</td><td>33.31</td><td>10.03</td><td>400</td><td>210</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1	2440.00	102.41	-----	-----	90.83	27.60	7.26	33.31	10.03	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																								
1	2319.23	48.75	54.00	-5.25	37.63	27.20	7.09	33.38	10.01	400	210																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																																																								
1	2440.00	102.41	-----	-----	90.83	27.60	7.26	33.31	10.03	400	210																																																																																								



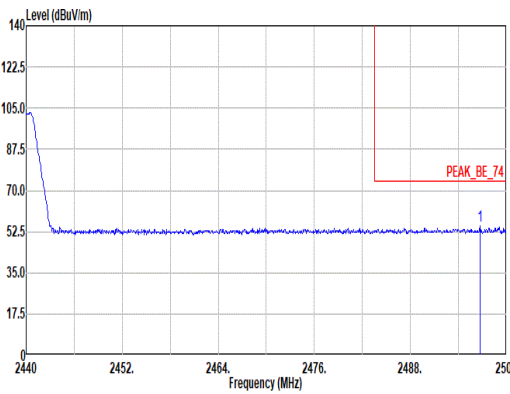
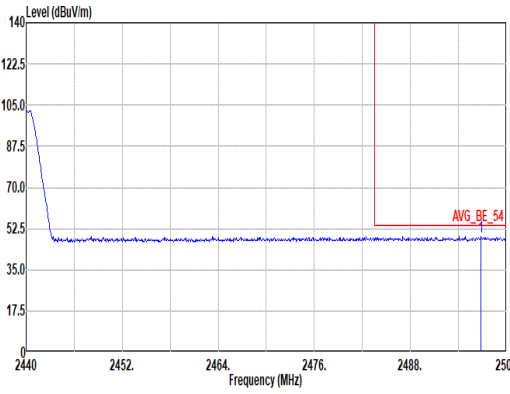


Mode	5																																																	
	Band Edge - R																																																	
	2400-2483.5_Bluetooth-LE GFSK _CH38_2440MHz																																																	
ANT	1																																																	
Pol.	Vertical						Fundamental																																											
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2496.78</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>43.05</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>400</td><td>210</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2496.78	55.05	74.00	-18.95	43.05	27.90	7.34	33.27	10.03	400	210	PEAK	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2496.78	55.05	74.00	-18.95	43.05	27.90	7.34	33.27	10.03	400	210	PEAK																																							
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 7F Plane : Y with adapter <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2496.82</td><td>49.18</td><td>54.00</td><td>-4.82</td><td>37.18</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>400</td><td>210</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2496.82	49.18	54.00	-4.82	37.18	27.90	7.34	33.27	10.03	400	210	AVERAGE	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1 2496.82	49.18	54.00	-4.82	37.18	27.90	7.34	33.27	10.03	400	210	AVERAGE																																							



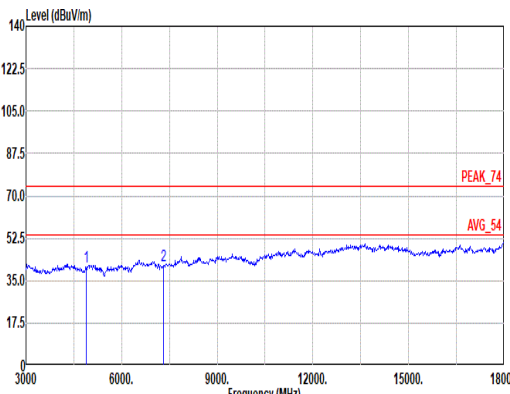
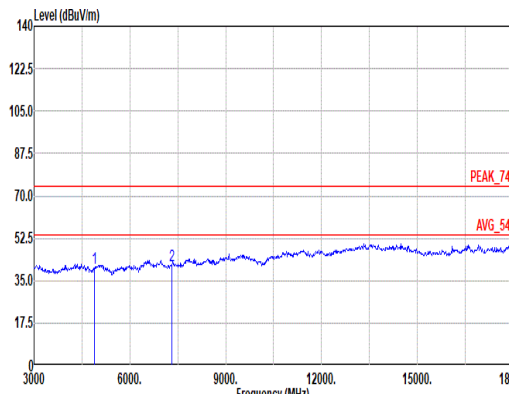


Mode	5																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_Bluetooth-LE GFSK _CH38_2440MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 7F Plane : Y with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>40.57</td><td>74.00</td><td>-33.43</td><td>63.91</td><td>32.72</td><td>10.10</td><td>66.70</td><td>0.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>41.13</td><td>74.00</td><td>-32.87</td><td>57.08</td><td>36.76</td><td>12.76</td><td>65.78</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.57	74.00	-33.43	63.91	32.72	10.10	66.70	0.54	--	--	Peak	2	7320.00	41.13	74.00	-32.87	57.08	36.76	12.76	65.78	0.31	--	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 7F Plane : Y with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>40.27</td><td>74.00</td><td>-33.73</td><td>63.61</td><td>32.72</td><td>10.10</td><td>66.70</td><td>0.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>41.21</td><td>74.00</td><td>-32.79</td><td>57.16</td><td>36.76</td><td>12.76</td><td>65.78</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.27	74.00	-33.73	63.61	32.72	10.10	66.70	0.54	--	--	Peak	2	7320.00	41.21	74.00	-32.79	57.16	36.76	12.76	65.78	0.31	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4880.00	40.57	74.00	-33.43	63.91	32.72	10.10	66.70	0.54	--	--	Peak																																																																																																																	
2	7320.00	41.13	74.00	-32.87	57.08	36.76	12.76	65.78	0.31	--	--	Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4880.00	40.27	74.00	-33.73	63.61	32.72	10.10	66.70	0.54	--	--	Peak																																																																																																																	
2	7320.00	41.21	74.00	-32.79	57.16	36.76	12.76	65.78	0.31	--	--	Peak																																																																																																																	

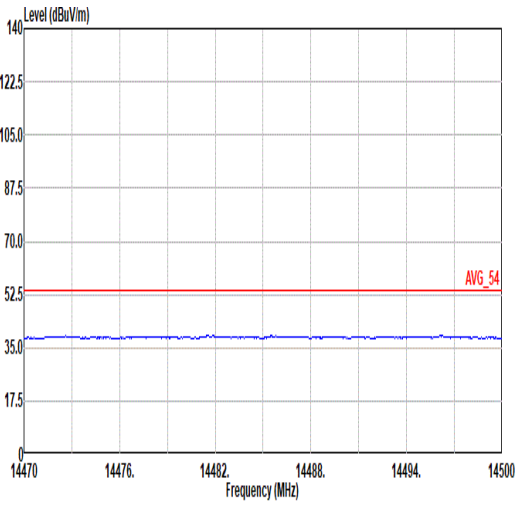
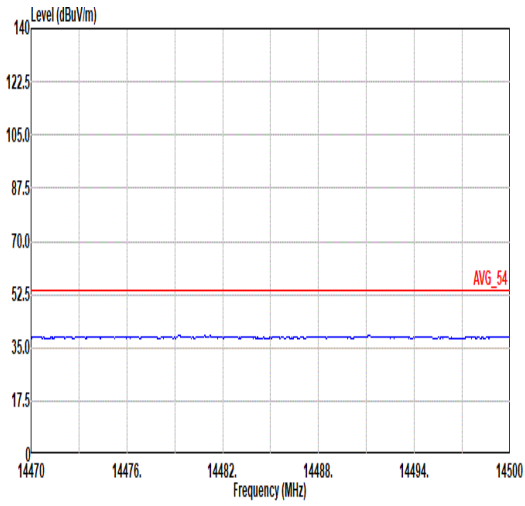
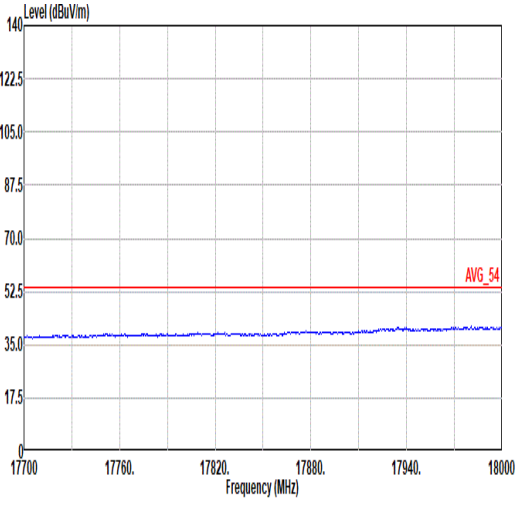
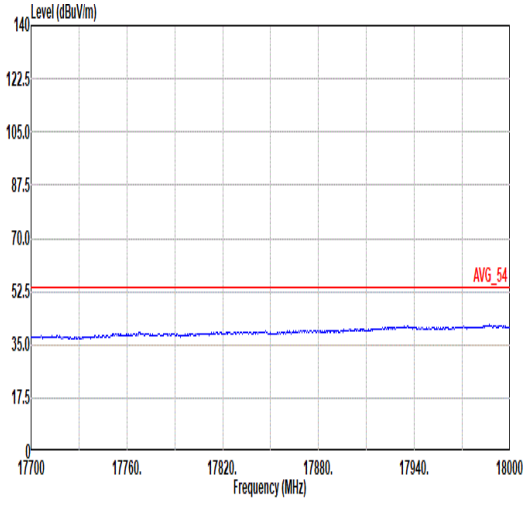


Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 7F Plane : Y with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 7F Plane : Y with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 7F Plane : Y with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 7F Plane : Y with adapter

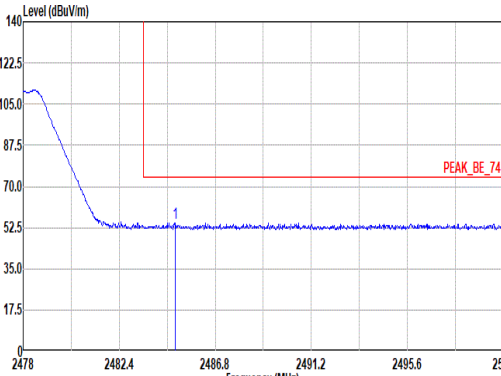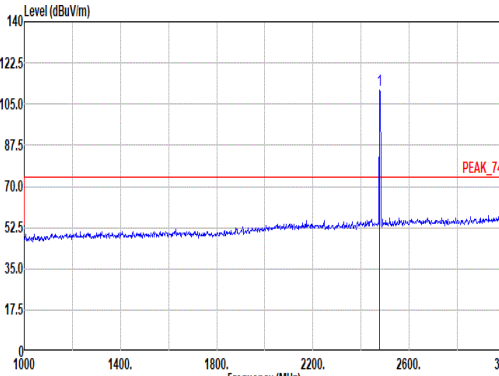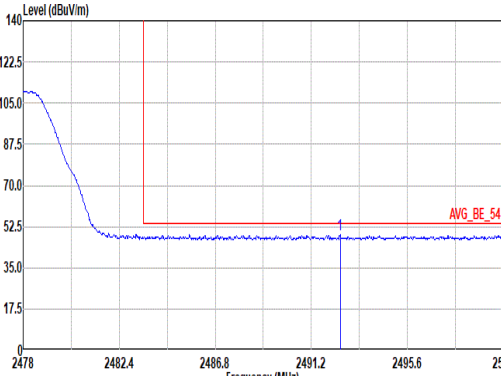
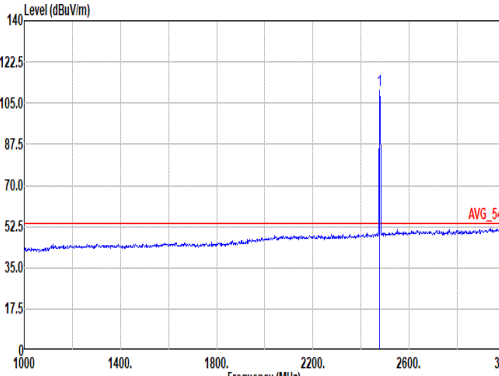


		6																																																																																																																																	
Mode		Band Edge																																																																																																																																	
		2400-2483.5_Bluetooth-LE GFSK_CH76_2478MHz																																																																																																																																	
ANT		1																																																																																																																																	
Pol.	Horizontal											Fundamental																																																																																																																							
Peak																																																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.95</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>42.52</td><td>27.85</td><td>7.32</td><td>33.28</td><td>10.03</td><td>250</td><td>320</td><td>PEAK</td></tr></table>																							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.95	54.44	74.00	-19.56	42.52	27.85	7.32	33.28	10.03	250	320	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>111.03</td><td>-----</td><td>-----</td><td>99.19</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td><td>250</td><td>320</td><td>PEAK</td></tr></table>																							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	111.03	-----	-----	99.19	27.78	7.31	33.28	10.03	250	320
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	2484.95	54.44	74.00	-19.56	42.52	27.85	7.32	33.28	10.03	250	320	PEAK																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	2478.00	111.03	-----	-----	99.19	27.78	7.31	33.28	10.03	250	320	PEAK																																																																																																																							
Avg																																																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.52</td><td>49.15</td><td>54.00</td><td>-4.85</td><td>37.16</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03</td><td>250</td><td>320</td><td>AVERAGE</td></tr></table>																							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.52	49.15	54.00	-4.85	37.16	27.90	7.33	33.27	10.03	250	320	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>110.41</td><td>-----</td><td>-----</td><td>98.57</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td><td>250</td><td>320</td><td>AVERAGE</td></tr></table>																							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	110.41	-----	-----	98.57	27.78	7.31	33.28	10.03	250	320
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	2492.52	49.15	54.00	-4.85	37.16	27.90	7.33	33.27	10.03	250	320	AVERAGE																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	2478.00	110.41	-----	-----	98.57	27.78	7.31	33.28	10.03	250	320	AVERAGE																																																																																																																							

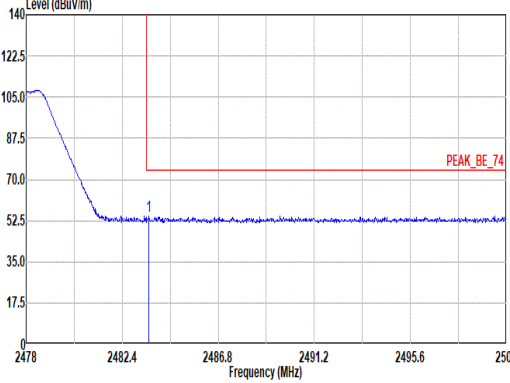
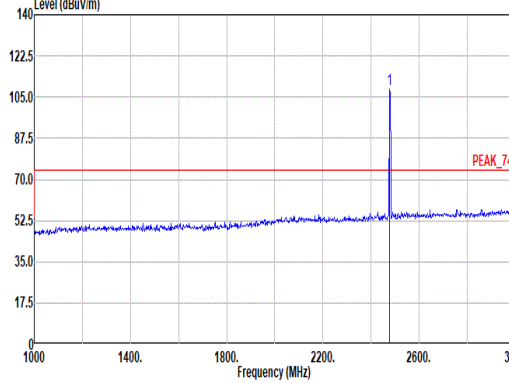
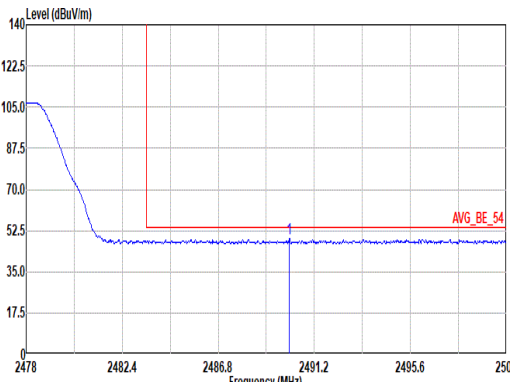
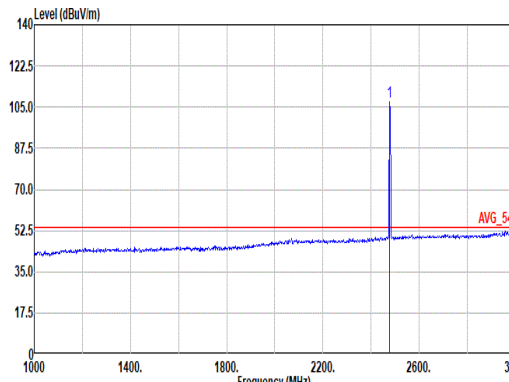


Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE GFSK_CH76_2478MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.63</td><td>54.25</td><td>74.00</td><td>-19.75</td><td>42.34</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>200</td><td>352</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.63	54.25	74.00	-19.75	42.34	27.84	7.32	33.28	10.03	200	352	PEAK	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>108.07</td><td>-----</td><td>-----</td><td>96.23</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td><td>200</td><td>352</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	108.07	-----	-----	96.23	27.78	7.31	33.28	10.03	200	352	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.63	54.25	74.00	-19.75	42.34	27.84	7.32	33.28	10.03	200	352	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2478.00	108.07	-----	-----	96.23	27.78	7.31	33.28	10.03	200	352	PEAK																																																																																								
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.06</td><td>49.15</td><td>54.00</td><td>-4.85</td><td>37.17</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td><td>200</td><td>352</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.06	49.15	54.00	-4.85	37.17	27.90	7.33	33.28	10.03	200	352	AVERAGE	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>107.23</td><td>-----</td><td>-----</td><td>95.39</td><td>27.78</td><td>7.31</td><td>33.28</td><td>10.03</td><td>200</td><td>352</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	107.23	-----	-----	95.39	27.78	7.31	33.28	10.03	200	352	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2490.06	49.15	54.00	-4.85	37.17	27.90	7.33	33.28	10.03	200	352	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2478.00	107.23	-----	-----	95.39	27.78	7.31	33.28	10.03	200	352	AVERAGE																																																																																								

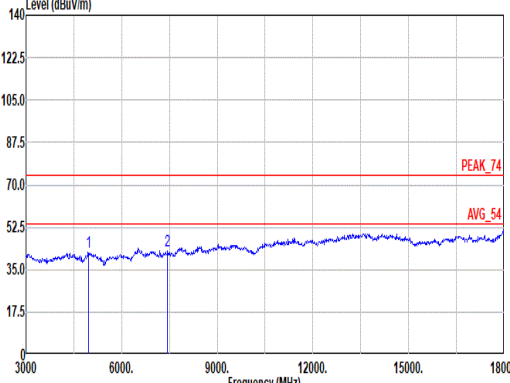
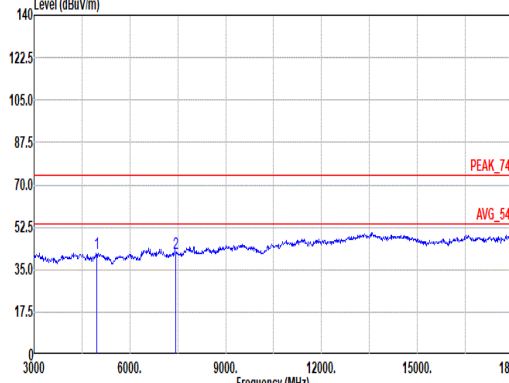


		6																																																																			
Mode		Harmonic																																																																			
		2400-2483.5_Bluetooth-LE GFSK _CH76_2478MHz																																																																			
ANT		1																																																																			
Pol.		Horizontal						Vertical																																																													
Peak Avg																																																																					
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>42.08</td><td>74.00</td><td>-31.92</td><td>64.80</td><td>33.01</td><td>10.34</td><td>66.64</td><td>0.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>42.63</td><td>74.00</td><td>-31.37</td><td>59.17</td><td>36.26</td><td>12.81</td><td>65.92</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	42.08	74.00	-31.92	64.80	33.01	10.34	66.64	0.57	--	--	Peak	2	7434.00	42.63	74.00	-31.37	59.17	36.26	12.81	65.92	0.31	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4956.00	42.08	74.00	-31.92	64.80	33.01	10.34	66.64	0.57	--	--	Peak																																																									
2	7434.00	42.63	74.00	-31.37	59.17	36.26	12.81	65.92	0.31	--	--	Peak																																																									
Peak Avg																																																																					
	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 7F Plane : Y with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>41.61</td><td>74.00</td><td>-32.39</td><td>64.33</td><td>33.01</td><td>10.34</td><td>66.64</td><td>0.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>41.92</td><td>74.00</td><td>-32.08</td><td>58.46</td><td>36.26</td><td>12.81</td><td>65.92</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	41.61	74.00	-32.39	64.33	33.01	10.34	66.64	0.57	--	--	Peak	2	7434.00	41.92	74.00	-32.08	58.46	36.26	12.81	65.92	0.31	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	4956.00	41.61	74.00	-32.39	64.33	33.01	10.34	66.64	0.57	--	--	Peak																																																									
2	7434.00	41.92	74.00	-32.08	58.46	36.26	12.81	65.92	0.31	--	--	Peak																																																									

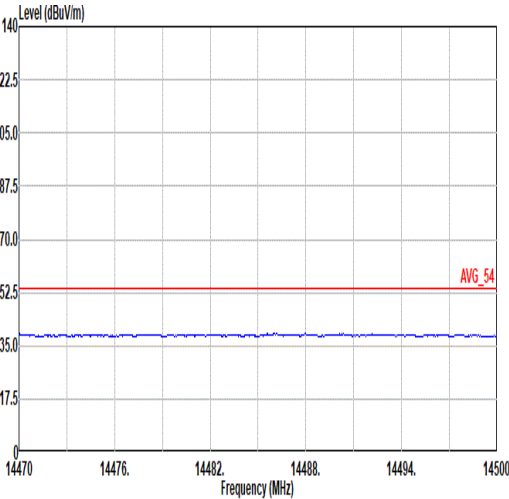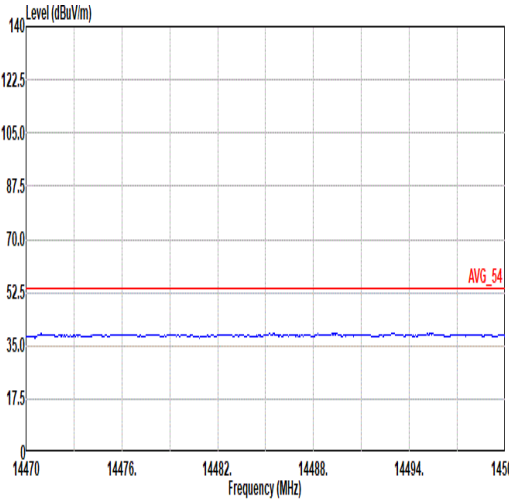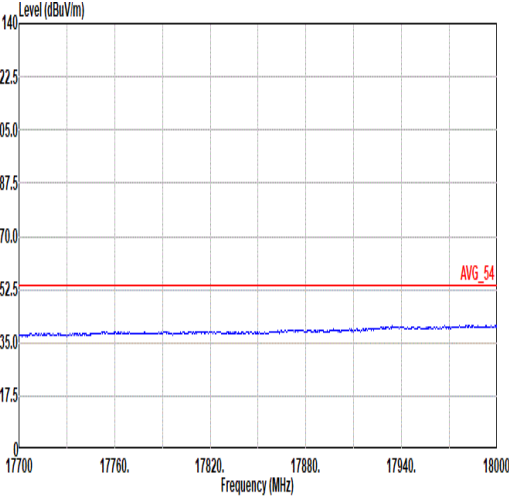
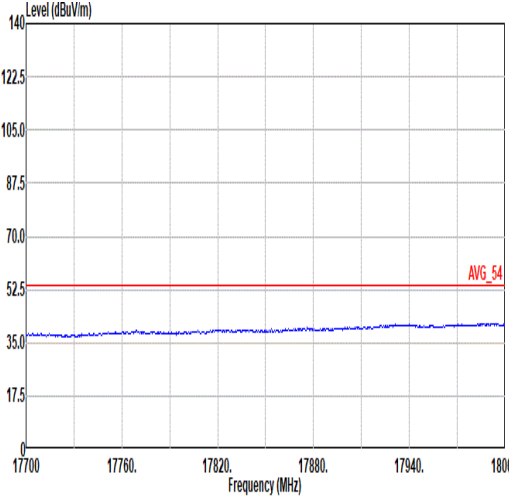


Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE GFSK_CH76_2478MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 7F Plane : Y with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 7F Plane : Y with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 7F Plane : Y with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 7F Plane : Y with adapter

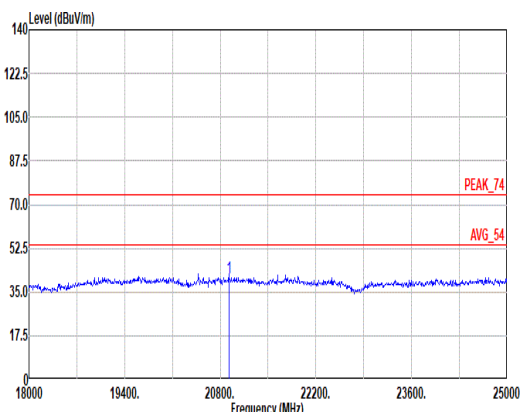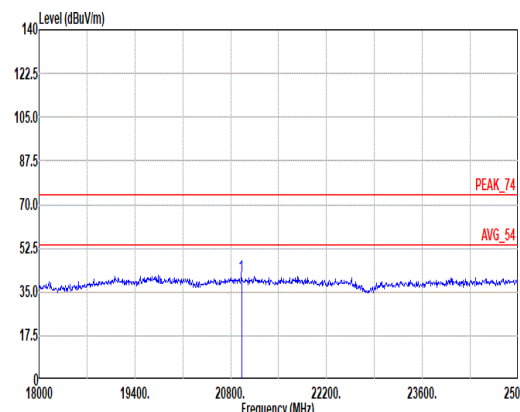

Mode	7																																																																																															
	SHF																																																																																															
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal						Vertical																																																																																									
Peak																																																																																																
	Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_240624 HORIZONTAL Mode : 7 Setting : 7F Plane : Y with adapter						Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_240624 VERTICAL Mode : 7 Setting : 7F Plane : Y with adapter																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>20930.77</td><td>40.78</td><td>74.00</td><td>-33.22</td><td>49.11</td><td>38.08</td><td>26.41</td><td>63.28</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	20930.77	40.78	74.00	-33.22	49.11	38.08	26.41	63.28	-9.54	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>20957.32</td><td>41.09</td><td>74.00</td><td>-32.91</td><td>49.26</td><td>38.20</td><td>26.42</td><td>63.25</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	20957.32	41.09	74.00	-32.91	49.26	38.20	26.42	63.25	-9.54	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	20930.77	40.78	74.00	-33.22	49.11	38.08	26.41	63.28	-9.54	--	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	20957.32	41.09	74.00	-32.91	49.26	38.20	26.42	63.25	-9.54	--	PEAK																																																																																					

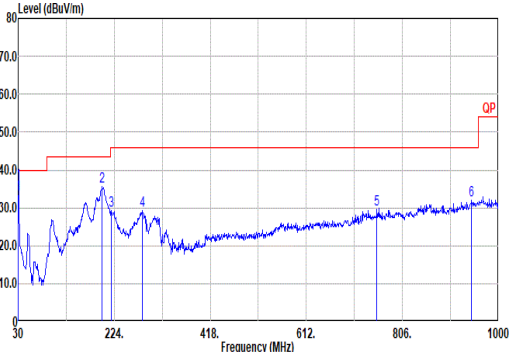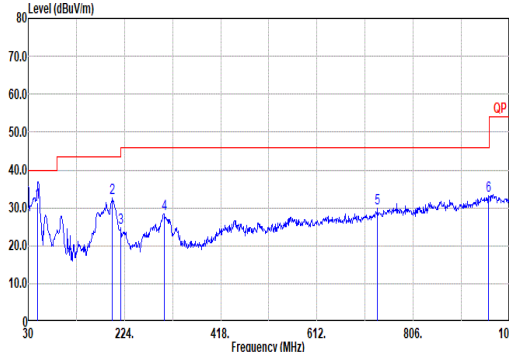


Mode	8																																																																																																																				
	LF																																																																																																																				
	2400-2483.5_Bluetooth-LE GFSK_CH38_2440MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
QPI Peak																																																																																																																					
	Site : 03CH11-HY Condition: QP 3m B1LOG_37059801_241127 HORIZONTAL Mode : 8 Setting : Plane : Y with adapter						Site : 03CH11-HY Condition: QP 3m B1LOG_37059801_241127 VERTICAL Mode : 8 Setting : Plane : Y with adapter																																																																																																														
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.21</td><td>33.52</td><td>40.00</td><td>-6.48</td><td>40.65</td><td>24.44</td><td>0.86</td><td>32.43</td><td>0.00</td><td>100</td><td>360</td><td>QP</td></tr><tr><td>2</td><td>199.75</td><td>35.62</td><td>43.50</td><td>-7.88</td><td>50.57</td><td>15.18</td><td>2.06</td><td>32.19</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>218.18</td><td>29.37</td><td>46.00</td><td>-16.63</td><td>44.18</td><td>15.22</td><td>2.16</td><td>32.19</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>280.26</td><td>29.33</td><td>46.00</td><td>-16.67</td><td>40.12</td><td>18.95</td><td>2.47</td><td>32.21</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>754.59</td><td>29.48</td><td>46.00</td><td>-16.52</td><td>29.19</td><td>28.37</td><td>4.00</td><td>32.08</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>945.68</td><td>31.90</td><td>46.00</td><td>-14.10</td><td>27.61</td><td>30.72</td><td>4.51</td><td>30.94</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	30.21	33.52	40.00	-6.48	40.65	24.44	0.86	32.43	0.00	100	360	QP	2	199.75	35.62	43.50	-7.88	50.57	15.18	2.06	32.19	0.00	--	--	Peak	3	218.18	29.37	46.00	-16.63	44.18	15.22	2.16	32.19	0.00	--	--	Peak	4	280.26	29.33	46.00	-16.67	40.12	18.95	2.47	32.21	0.00	--	--	Peak	5	754.59	29.48	46.00	-16.52	29.19	28.37	4.00	32.08	0.00	--	--	Peak	6	945.68	31.90	46.00	-14.10	27.61	30.72	4.51	30.94	0.00	--	--	Peak
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m		dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																								
1	30.21	33.52	40.00	-6.48	40.65	24.44	0.86	32.43	0.00	100	360	QP																																																																																																									
2	199.75	35.62	43.50	-7.88	50.57	15.18	2.06	32.19	0.00	--	--	Peak																																																																																																									
3	218.18	29.37	46.00	-16.63	44.18	15.22	2.16	32.19	0.00	--	--	Peak																																																																																																									
4	280.26	29.33	46.00	-16.67	40.12	18.95	2.47	32.21	0.00	--	--	Peak																																																																																																									
5	754.59	29.48	46.00	-16.52	29.19	28.37	4.00	32.08	0.00	--	--	Peak																																																																																																									
6	945.68	31.90	46.00	-14.10	27.61	30.72	4.51	30.94	0.00	--	--	Peak																																																																																																									



Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE GFSK for 1Mbps	15.45	44.5	22.472	22kHz
Bluetooth - LE GFSK for 2Mbps	10.69	27	37.037	39KHz

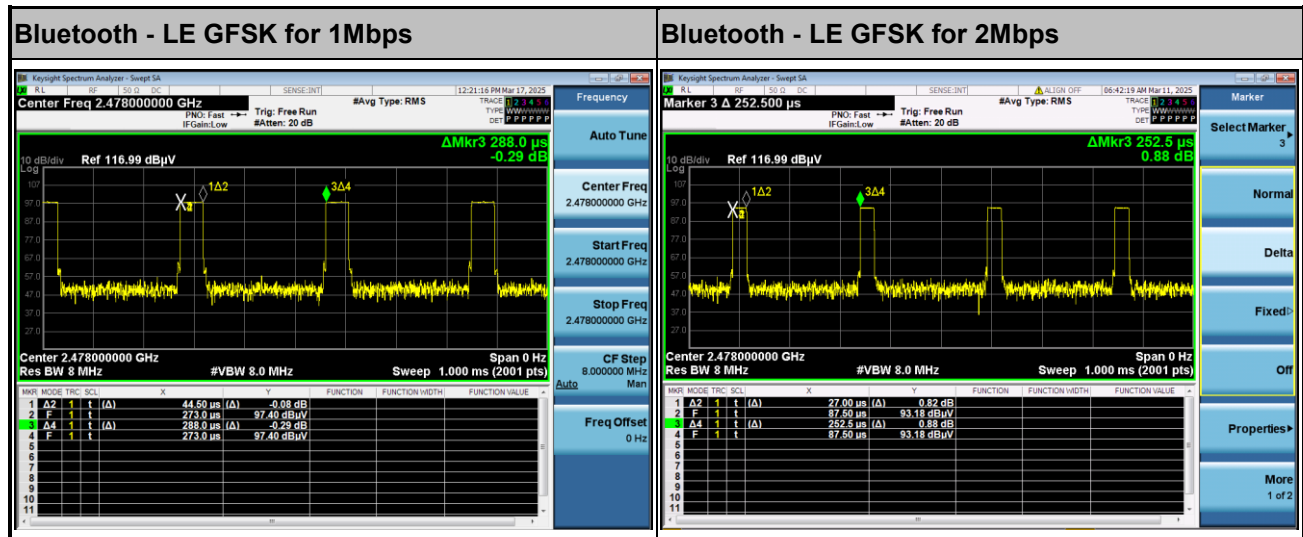

—THE END—