



TEST Report

Applicant: Shenzhen Speediance Living Technology Co., Ltd

Address of Applicant: 19th Floor, Gemdale Viseen Tower A, No.16, Gaoxin 10th South Road, High-tech Zone, Yuehai Street, Nanshan District, Shenzhen, China.

Manufacturer : Shenzhen Speediance Living Technology Co., Ltd

Address of Manufacturer : 19th Floor, Gemdale Viseen Tower A, No.16, Gaoxin 10th South Road, High-tech Zone, Yuehai Street, Nanshan District, Shenzhen, China.

Equipment Under Test (EUT)

Product Name: Interactive Multi-Media DigitalFitness Equipment

Model No.: GMBP2100A1

Series model: GMBP2100A2, GMBP2100A3, GMBP2100A4, GMBP2100A5

Trade Mark: N/A

FCC ID: 2A4WP-GMBP2100A1

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: Apr. 09, 2025

Date of Test: Apr. 09, 2025 ~ May. 12, 2025

Date of report issued: May. 12, 2025

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.



Report No.: HTT202503876F04

1. Version

Version No.	Date	Description
00	May. 12, 2025	Original

Tested/ Prepared By Heber He Date: May. 12, 2025
Project Engineer

Check By: Bruce Zhu Date: May. 12, 2025
Reviewer

Approved By : Kevin Yang Date: May. 12, 2025
Authorized Signature



2. Contents

Page

1. VERSION	2
2. CONTENTS	3
3. TEST SUMMARY	4
4. GENERAL INFORMATION	5
4.1. GENERAL DESCRIPTION OF EUT	5
4.2. TEST MODE	7
4.3. DESCRIPTION OF SUPPORT UNITS	7
4.4. DEVIATION FROM STANDARDS	7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS	7
4.6. TEST FACILITY	7
4.7. TEST LOCATION	7
4.8. ADDITIONAL INSTRUCTIONS	7
5. TEST INSTRUMENTS LIST	7
6. TEST RESULTS AND MEASUREMENT DATA	9
6.1. CONDUCTED EMISSIONS	9
6.2. CONDUCTED PEAK OUTPUT POWER	12
6.3. CHANNEL BANDWIDTH	13
6.4. POWER SPECTRAL DENSITY	23
6.5. BAND EDGE	34
6.5.1. Conducted Emission Method	34
6.5.2. Radiated Emission Method	41
6.6. SPURIOUS EMISSION	43
6.6.1. Conducted Emission Method	43
6.6.2. Radiated Emission Method	60
6.7. ANTENNA REQUIREMENT	67
7. TEST SETUP PHOTO	68
8. EUT CONSTRUCTIONAL DETAILS	68



3. Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
6dB Bandwidth	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.12 dB	(1)
Radiated Emission	30~1000MHz	4.37 dB	(1)
Radiated Emission	1~18GHz	5.40 dB	(1)
Radiated Emission	18-40GHz	5.45 dB	(1)
Conducted Disturbance	0.15~30MHz	2.68 dB	(1)
Spectrum bandwidth	/	1.2%	(1)
Output Peak power	30MHz~18GHz	0.57dB	(1)
Time	/	±10%	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



4. General Information

4.1. General Description of EUT

Product Name:	Interactive Multi-Media DigitalFitness Equipment
Model No.:	GMBP2100A1
Series model:	GMBP2100A2, GMBP2100A3, GMBP2100A4, GMBP2100A5
Test sample(s) ID:	HTT202503876-1(Engineer sample) HTT202503876-2(Normal sample)
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Copper tube copper column spring antenna
Antenna gain:	3.9 dBi for ANT 1 and 3.9 dBi for ANT 2
Power supply:	AC 100-230V



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

Test Software Version	EngineerMode v3.0		
Frequency	2412 MHz	2437MHz	2462 MHz
802.11b	/	/	/
802.11g	/	/	/
802.11n20	/	/	/
Frequency	2422 MHz	2437MHz	2452 MHz
802.11n40	/	/	/



4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

4.3. Description of Support Units

None.

4.4. Deviation from Standards

None.

4.5. Abnormalities from Standard Conditions

None.

4.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:
FCC-Registration No.: 779513 Designation Number: CN1319 Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.
A2LA-Lab Cert. No.: 6435.01 Shenzhen HTT Technology Co.,Ltd. has been accredited by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

4.7. Test Location

All tests were performed at:
Shenzhen HTT Technology Co.,Ltd. 1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road,Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23595200 Fax: 0755-23595201

4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default

5. Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory	Cal.Date	Cal.Due date
------	----------------	--------------	-----------	-----------	----------	--------------



Report No.: HTT202503876F04

				No.	(mm-dd-yy)	(mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2024	Aug. 09 2027
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2024	Aug. 09 2027
3	EMI Test Receiver	Rohde&Schwar	ESCI7	HTT-E022	Apr. 22 2025	Apr. 21 2026
4	Spectrum Analyzer	Rohde&Schwar	FSP	HTT-E037	Apr. 22 2025	Apr. 21 2026
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	Apr. 22 2025	Apr. 21 2026
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	Apr. 22 2025	Apr. 21 2026
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	Apr. 22 2025	Apr. 21 2026
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	Apr. 22 2025	Apr. 21 2026
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	Apr. 19 2025	Apr. 18 2026
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	Apr. 19 2025	Apr. 18 2026
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Apr. 19 2025	Apr. 18 2026
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Apr. 19 2025	Apr. 18 2026
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	Apr. 22 2025	Apr. 21 2026
14	high-frequency Amplifier	HP	8449B	HTT-E014	Apr. 22 2025	Apr. 21 2026
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	Apr. 22 2025	Apr. 21 2026
16	EMI Test Receiver	Rohde & Schwarz	ESCI3	HTT-E043	Apr. 22 2025	Apr. 21 2026
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	Apr. 22 2025	Apr. 21 2026
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	Apr. 22 2025	Apr. 21 2026
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	Apr. 22 2025	Apr. 21 2026
20	Attenuator	Rohde & Schwarz	ESH3-Z2	HTT-E045	Sep. 20 2024	Sep. 19 2025
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	Apr. 22 2025	Apr. 21 2026
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	Aug. 10 2024	Aug. 09 2027
23	DC power supply	Agilent	E3632A	HTT-E023	Apr. 22 2025	Apr. 21 2026
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	Apr. 22 2025	Apr. 21 2026
25	Analog signal generator	Agilent	N5181A	HTT-E025	Apr. 22 2025	Apr. 21 2026
26	Vector signal generator	Agilent	N5182A	HTT-E026	Apr. 22 2025	Apr. 21 2026
27	RF Switch box	Keysight	Switchbox	HTT-E047	Sep. 20 2024	Sep. 19 2025
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	Apr. 21 2025	Apr. 20 2026
29	Radiated Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
30	Conducted Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
31	RF Test Software	panshanrf	TST	N/A	N/A	N/A
32	Power Meter	R&S	NRVS	HTT-E057	Apr. 22 2025	Apr. 21 2026

6. Test results and Measurement Data

6.1. Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	
Test voltage:	AC 120V, 60Hz						
Test results:	PASS						


Remark: 1. All modes of 802.11b/g/n were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below:

2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:




Measurement data:

Line:

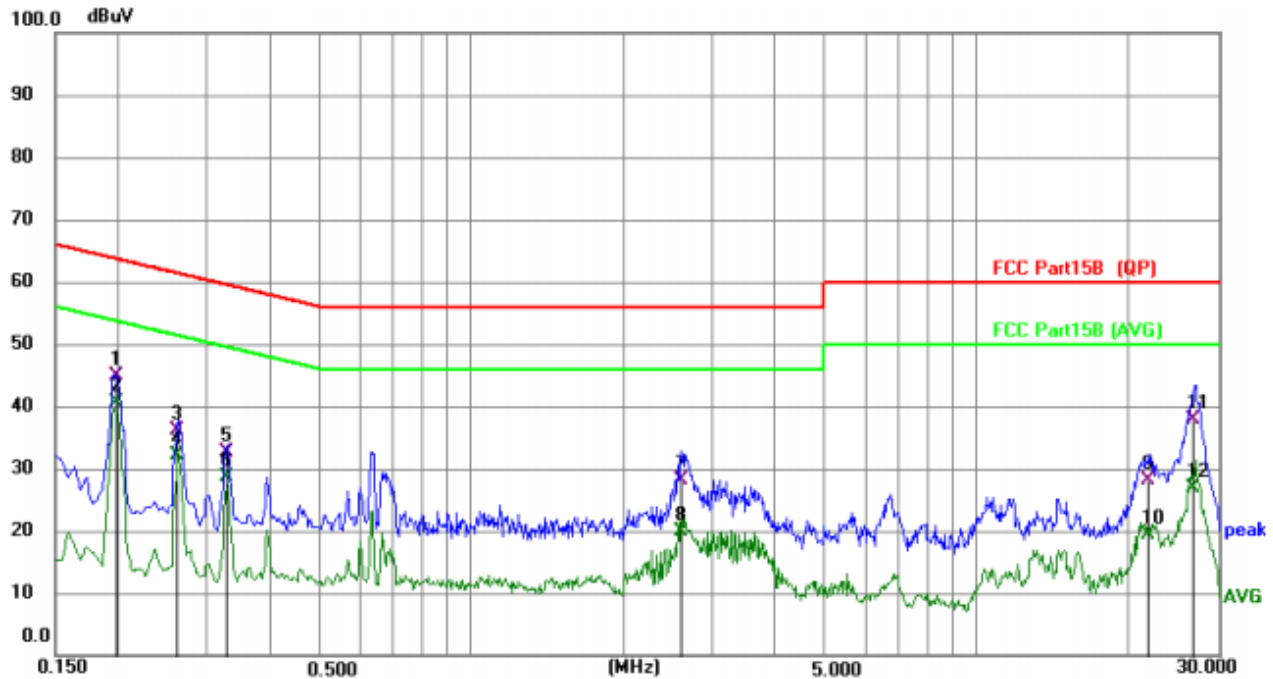

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
1		0.1977	34.62	10.18	44.80	63.71	-18.91	QP
2	*	0.1977	30.54	10.18	40.72	53.71	-12.99	AVG
3		0.2615	25.80	10.23	36.03	61.38	-25.35	QP
4		0.2615	21.80	10.23	32.03	51.38	-19.35	AVG
5		0.3277	22.54	10.17	32.71	59.51	-26.80	QP
6		0.3277	18.50	10.17	28.67	49.51	-20.84	AVG
7		2.6056	17.90	10.20	28.10	56.00	-27.90	QP
8		2.6056	9.70	10.20	19.90	46.00	-26.10	AVG
9		21.8827	16.77	11.29	28.06	60.00	-31.94	QP
10		21.8827	8.08	11.29	19.37	50.00	-30.63	AVG
11		26.8636	26.27	11.53	37.80	60.00	-22.20	QP
12		26.8636	15.43	11.53	26.96	50.00	-23.04	AVG

Neutral:

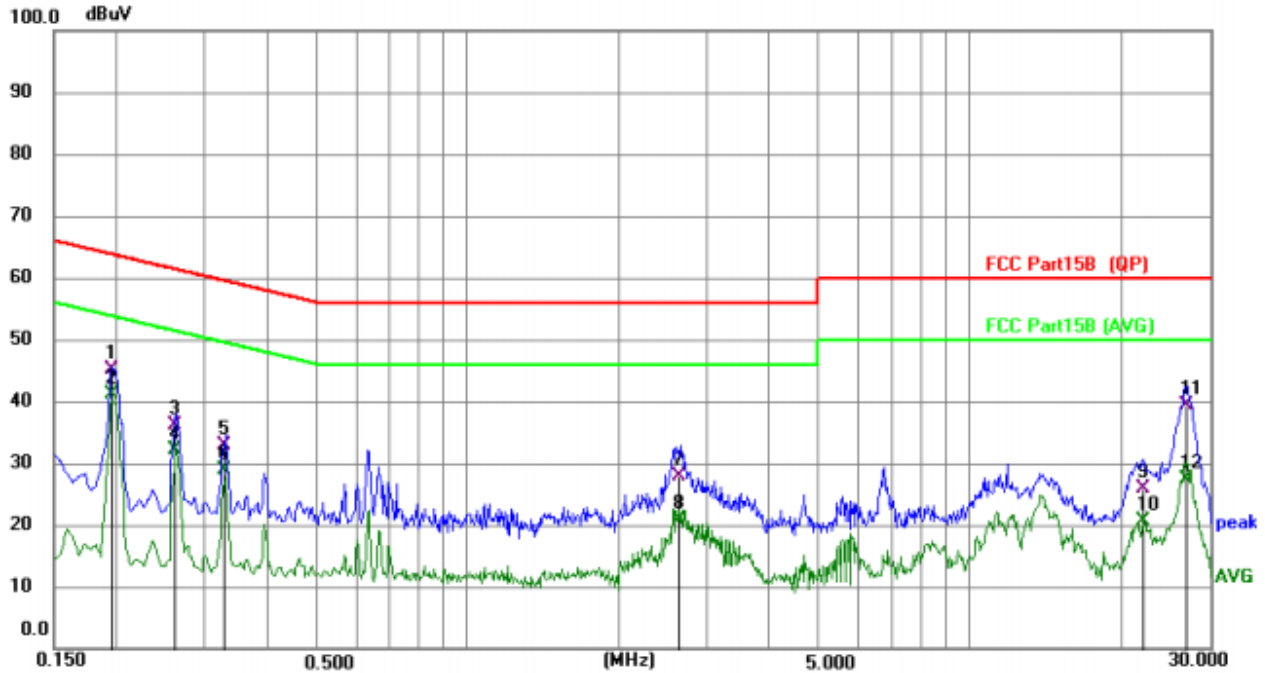


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1		0.1960	35.04	10.20	45.24	63.78	-18.54	QP
2	*	0.1960	30.93	10.20	41.13	53.78	-12.65	AVG
3		0.2618	25.97	10.20	36.17	61.37	-25.20	QP
4		0.2618	22.01	10.20	32.21	51.37	-19.16	AVG
5		0.3276	22.70	10.18	32.88	59.51	-26.63	QP
6		0.3276	18.65	10.18	28.83	49.51	-20.68	AVG
7		2.6591	17.63	10.24	27.87	56.00	-28.13	QP
8		2.6591	10.61	10.24	20.85	46.00	-25.15	AVG
9		22.0797	14.53	11.24	25.77	60.00	-34.23	QP
10		22.0797	9.30	11.24	20.54	50.00	-29.46	AVG
11		26.9303	27.81	11.53	39.34	60.00	-20.66	QP
12		26.9303	15.75	11.53	27.28	50.00	-22.72	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Los

6.2. Conducted Peak Output Power

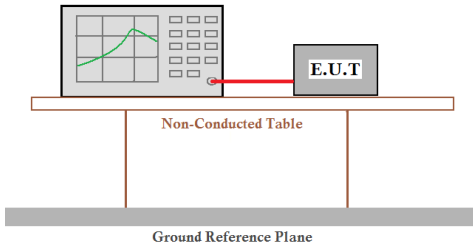Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	30dBm					
Test setup:	Power sensor and Spectrum analyzer  Non-Conducted Table Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)				Verdict
			ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	19.03	16.97	/	<=30	Pass
		2437	18.22	17.72	/	<=30	Pass
		2462	15.20	16.72	/	<=30	Pass
802.11g	SISO	2412	23.61	21.75	/	<=30	Pass
		2437	22.83	21.84	/	<=30	Pass
		2462	20.17	21.54	/	<=30	Pass
802.11n (HT20)	MIMO	2412	21.97	20.29	24.22	<=30	Pass
		2437	21.38	21.04	24.22	<=30	Pass
		2462	18.62	20.04	22.40	<=30	Pass
802.11n (HT40)	MIMO	2422	21.74	18.76	23.51	<=30	Pass
		2437	19.65	20.40	23.05	<=30	Pass
		2452	18.38	21.07	22.94	<=30	Pass
Note1: Antenna Gain: Ant1: 3.90dBi; Ant2: 3.90dBi;							
Note2: Directional Gain: 3.9dBi							

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13Mbps at IEEE 802.11n HT40

6.3. Channel Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	>500KHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	9.061	≥ 0.5	Pass
			2	8.609	≥ 0.5	Pass
		2437	1	8.615	≥ 0.5	Pass
			2	9.097	≥ 0.5	Pass
		2462	1	9.083	≥ 0.5	Pass
			2	9.098	≥ 0.5	Pass
802.11g	SISO	2412	1	15.751	≥ 0.5	Pass
			2	15.747	≥ 0.5	Pass
		2437	1	15.741	≥ 0.5	Pass
			2	15.758	≥ 0.5	Pass
		2462	1	15.782	≥ 0.5	Pass
			2	15.751	≥ 0.5	Pass
802.11n (HT20)	MIMO	2412	1	16.337	≥ 0.5	Pass
			2	16.406	≥ 0.5	Pass
		2437	1	16.354	≥ 0.5	Pass
			2	16.246	≥ 0.5	Pass
		2462	1	16.373	≥ 0.5	Pass
			2	16.387	≥ 0.5	Pass
802.11n (HT40)	MIMO	2422	1	21.353	≥ 0.5	Pass
			2	35.251	≥ 0.5	Pass
		2437	1	25.127	≥ 0.5	Pass
			2	33.888	≥ 0.5	Pass
		2452	1	35.291	≥ 0.5	Pass
			2	32.545	≥ 0.5	Pass

Note:



Report No.: HTT202503876F04


1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.




Report No.: HTT202503876F04

Test plot as follows:


802.11b LCH 2412MHz Ant1 (SISO) NTNv

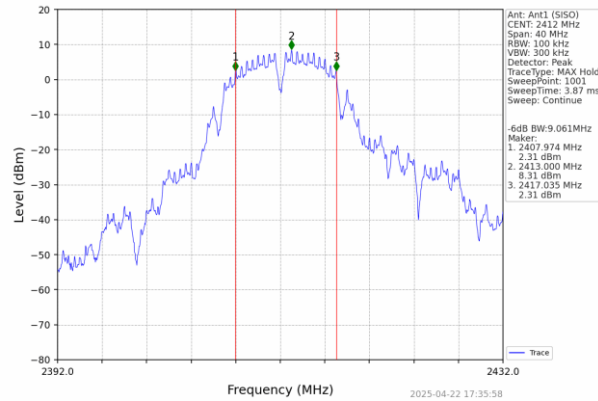

802.11b LCH 2412MHz Ant2 (SISO) NTNv

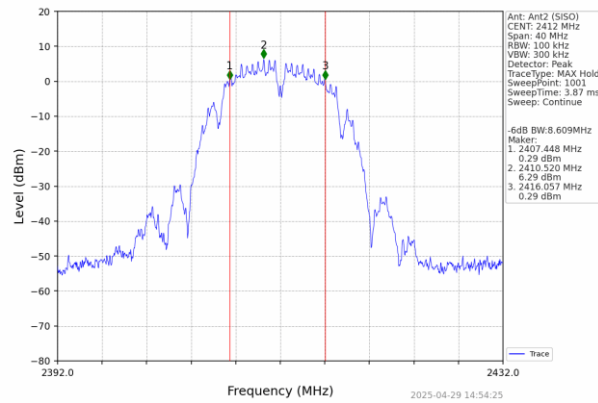


802.11b MCH 2437MHz Ant1 (SISO) NTNv

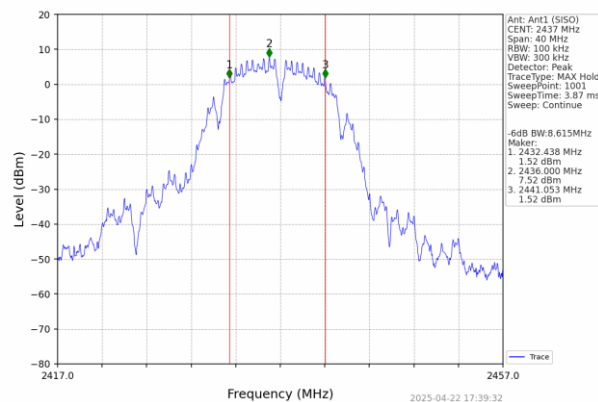




Report No.: HTT202503876F04


802.11b MCH 2437MHz Ant2 (SISO) NTNv

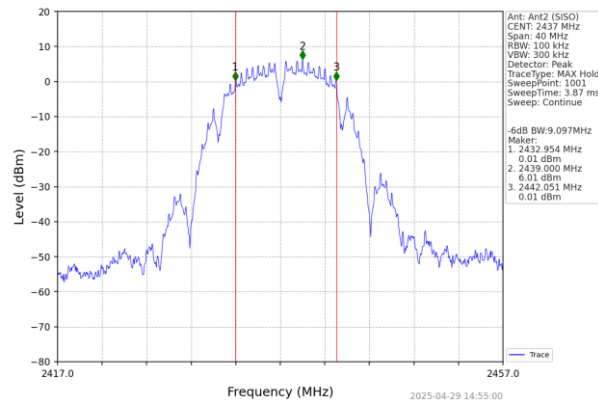

802.11b HCH 2462MHz Ant1 (SISO) NTNv

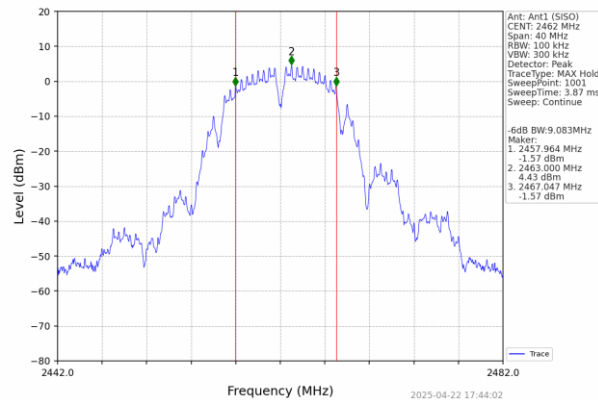


802.11b HCH 2462MHz Ant2 (SISO) NTNv

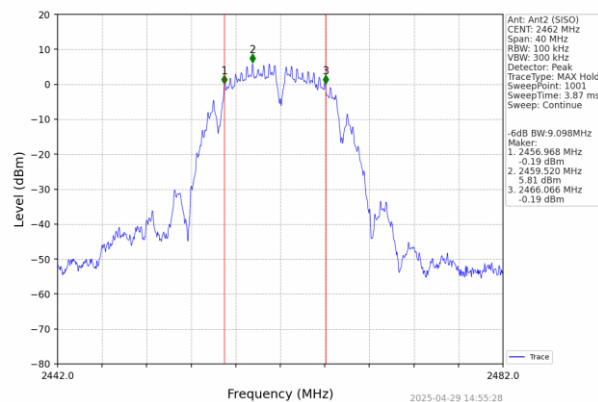




Report No.: HTT202503876F04


802.11g LCH 2412MHz Ant1 (SISO) NTN

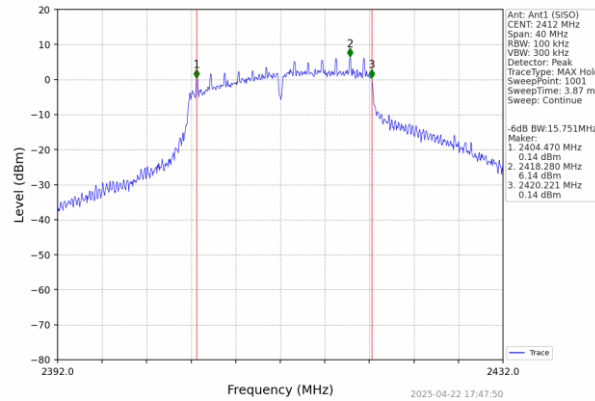

802.11g LCH 2412MHz Ant2 (SISO) NTN

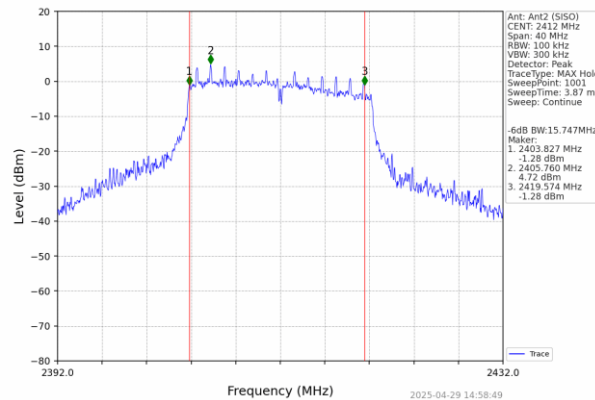


802.11g MCH 2437MHz Ant1 (SISO) NTN

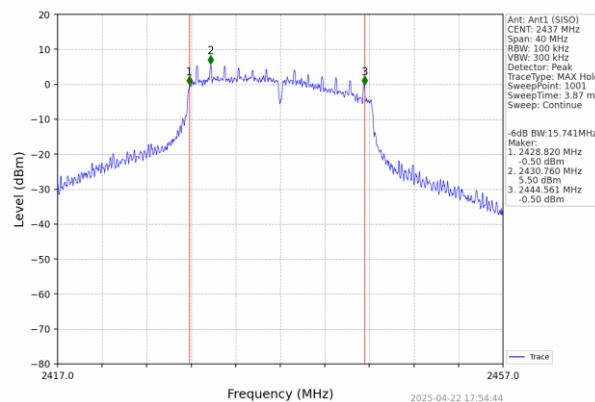




Report No.: HTT202503876F04


802.11g MCH 2437MHz Ant2 (SISO) NTNv

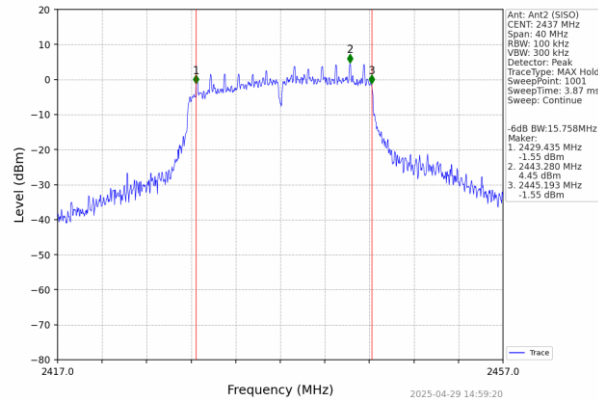

802.11g HCH 2462MHz Ant1 (SISO) NTNv

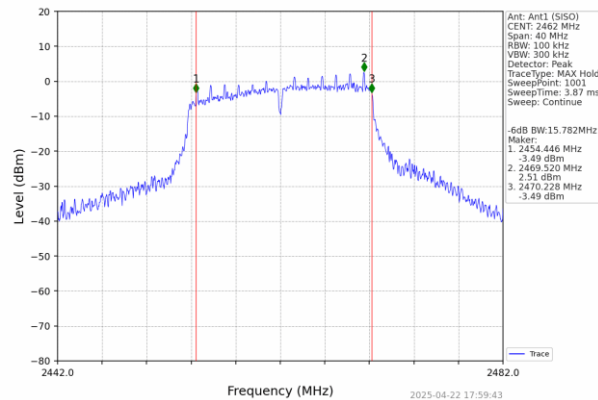


802.11g HCH 2462MHz Ant2 (SISO) NTNv

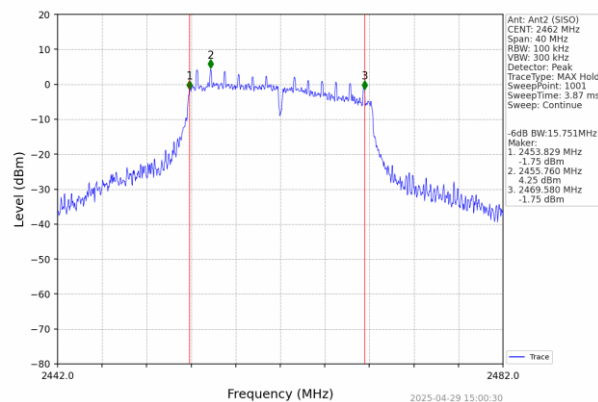




Report No.: HTT202503876F04


802.11n(HT20) LCH 2412MHz Ant1 (MIMO) NTN

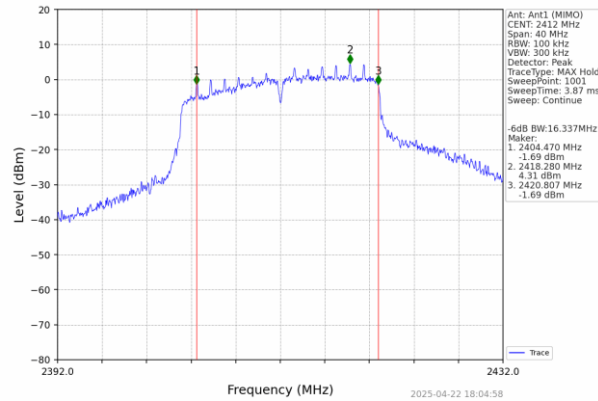

802.11n(HT20) LCH 2412MHz Ant2 (MIMO) NTN

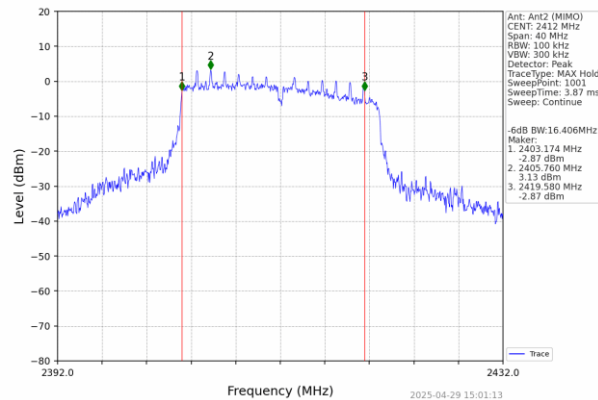


802.11n(HT20) MCH 2437MHz Ant1 (MIMO) NTN

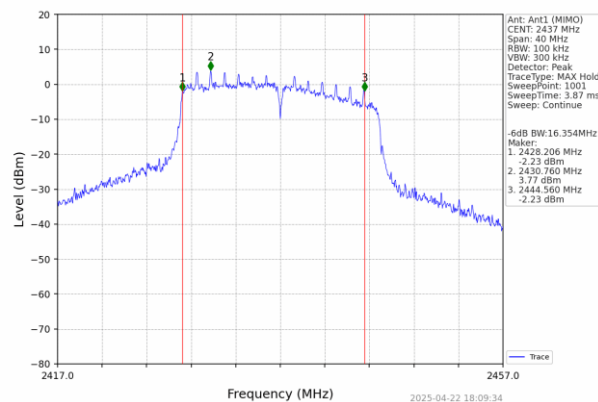





802.11n(HT20) MCH 2437MHz Ant2 (MIMO) NTN

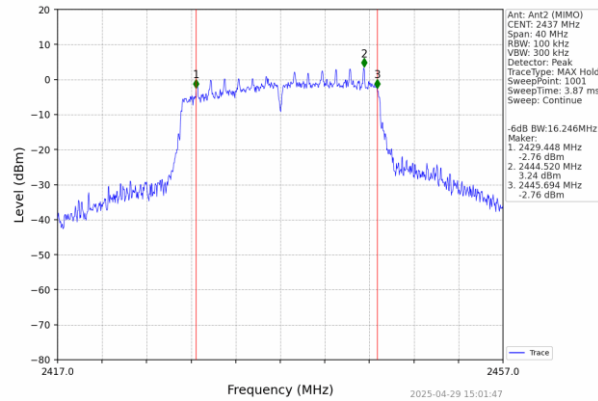

802.11n(HT20) HCH 2462MHz Ant1 (MIMO) NTN

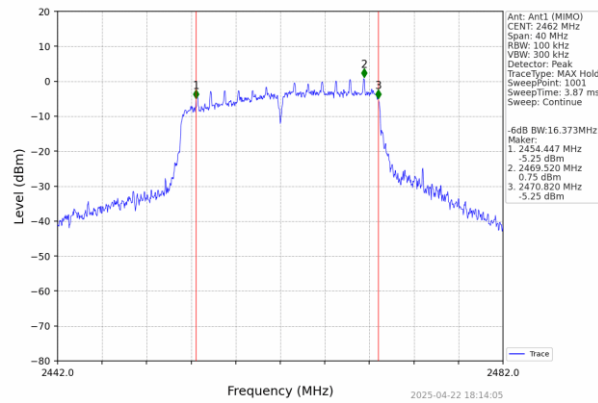


802.11n(HT20) HCH 2462MHz Ant2 (MIMO) NTN

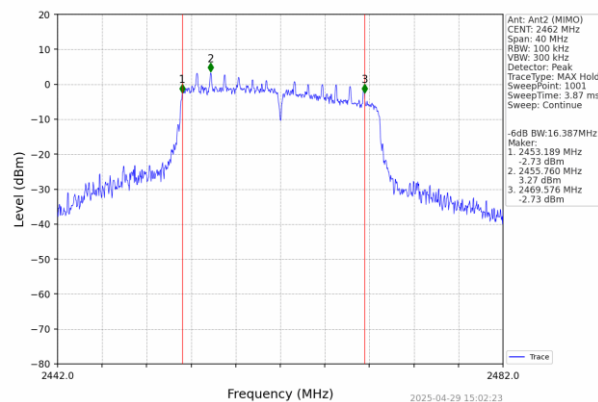




Report No.: HTT202503876F04


802.11n(HT40) LCH 2422MHz Ant1 (MIMO) NTN

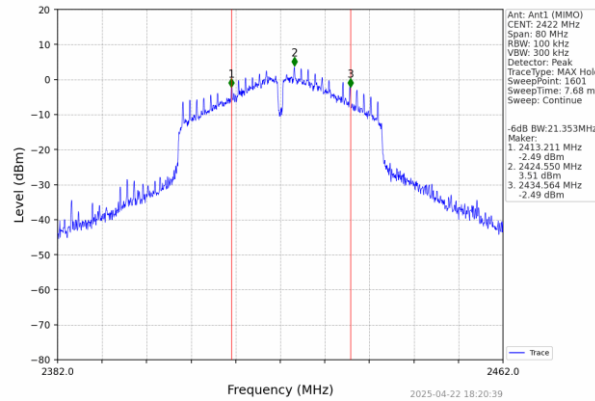

802.11n(HT40) LCH 2422MHz Ant2 (MIMO) NTN

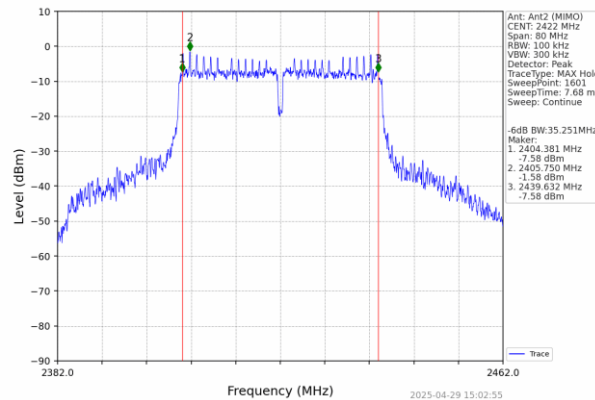


802.11n(HT40) MCH 2437MHz Ant1 (MIMO) NTN

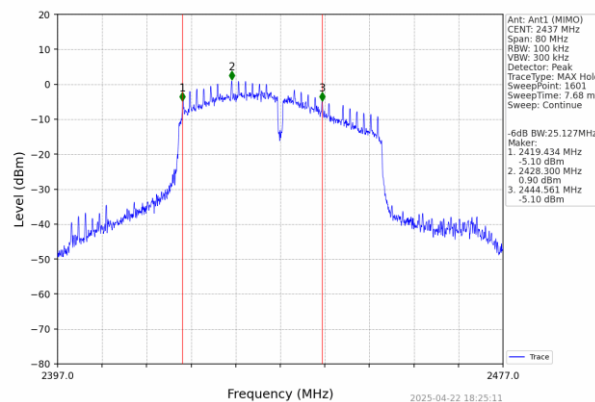





802.11n(HT40) MCH 2437MHz Ant2 (MIMO) NTN

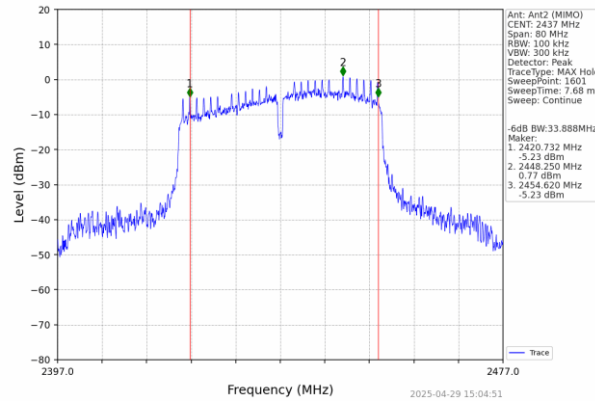


802.11n(HT40) HCH 2452MHz Ant1 (MIMO) NTN

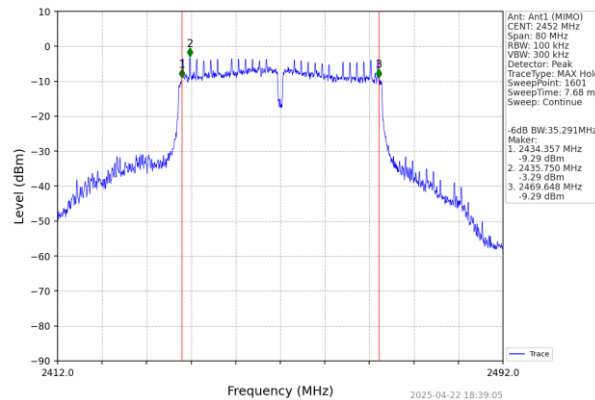

802.11n(HT40) HCH 2452MHz Ant2 (MIMO) NTN

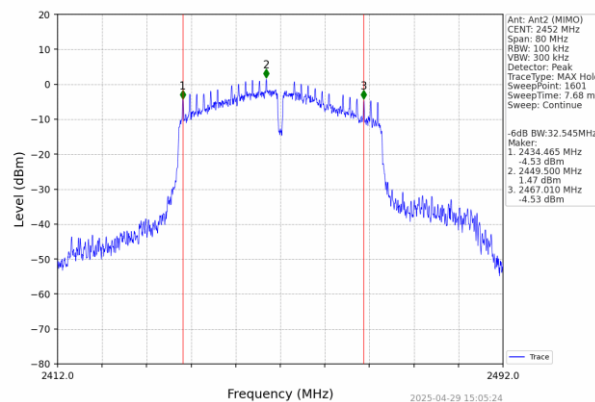

6.4. Power Spectral Density

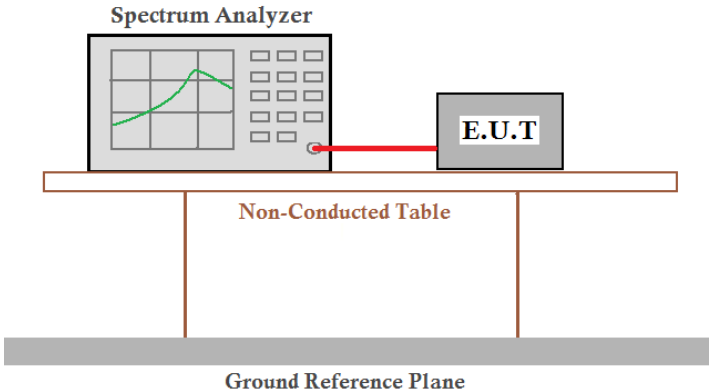Test Requirement:	FCC Part15 C Section 15.247 (e)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	8dBm/3kHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)				Verdict
			ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	-6.18	-6.90	/	<=8	Pass
		2437	-7.10	-6.53	/	<=8	Pass
		2462	-9.44	-7.52	/	<=8	Pass
802.11g	SISO	2412	-8.77	-9.67	/	<=8	Pass
		2437	-9.41	-10.59	/	<=8	Pass
		2462	-12.80	-10.45	/	<=8	Pass
802.11n (HT20)	MIMO	2412	-10.70	-11.52	-8.38	<=8	Pass
		2437	-11.04	-9.45	-8.16	<=8	Pass
		2462	-14.56	-10.34	-9.72	<=8	Pass
802.11n (HT40)	MIMO	2422	-10.04	-15.07	-9.81	<=8	Pass
		2437	-12.12	-11.31	-10.72	<=8	Pass
		2452	-16.28	-9.52	-9.10	<=8	Pass
Note1: Antenna Gain: Ant1: 3.90dBi; Ant2: 3.90dBi; Note2: Directional Gain: 3.9dBi							




Report No.: HTT202503876F04

Test plot as follows:


802.11b LCH 2412MHz_Ant1 (SISO) NTN

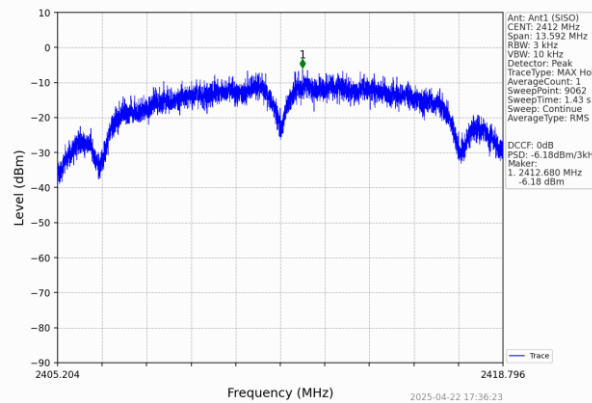

802.11b LCH 2412MHz_Ant2 (SISO) NTN

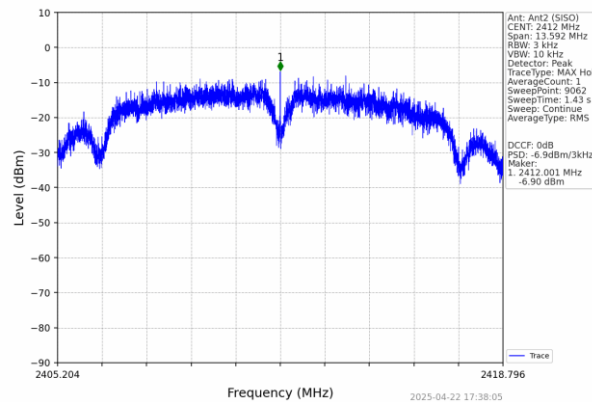


802.11b MCH 2437MHz_Ant1 (SISO) NTN

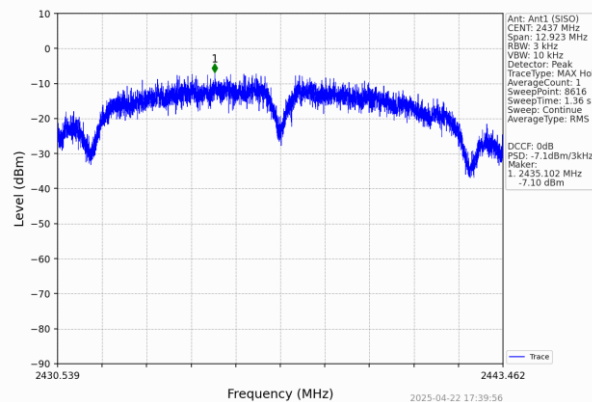




Report No.: HTT202503876F04


802.11b_MCH_2437MHz_Ant2 (SISO)_NTNV

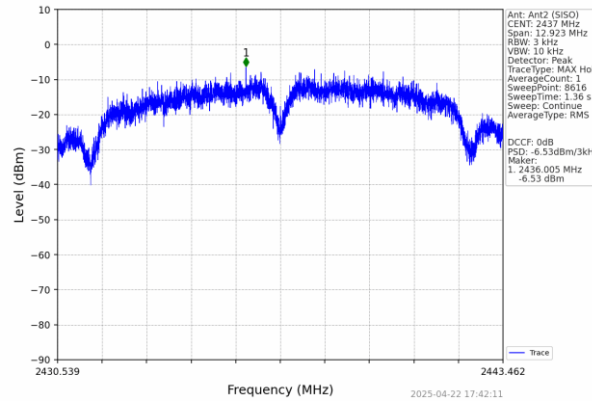

802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

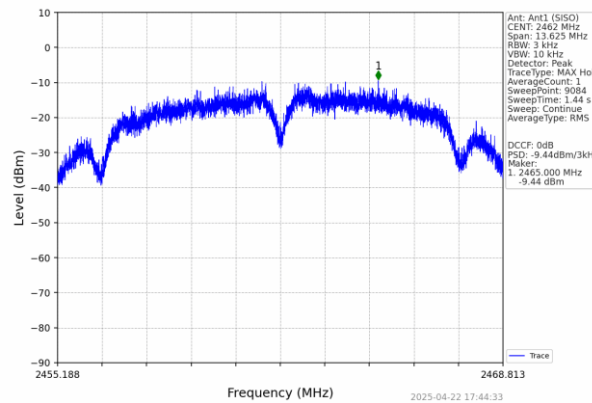


802.11b_HCH_2462MHz_Ant2 (SISO)_NTNV

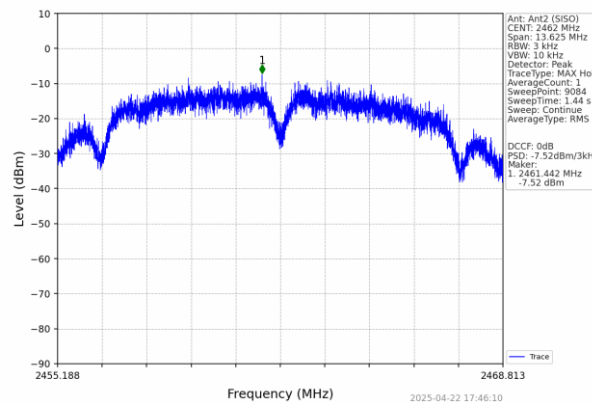





802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

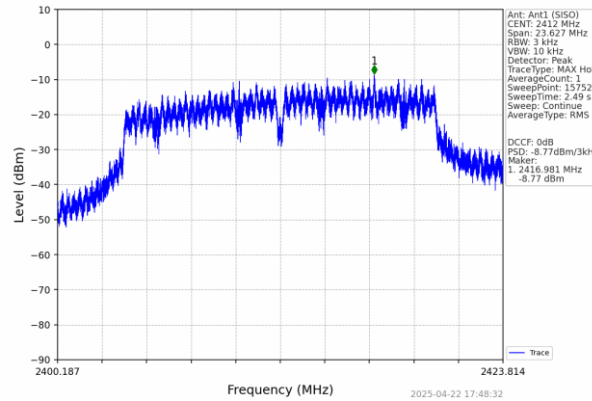

802.11g_LCH_2412MHz_Ant2 (SISO)_NTNV

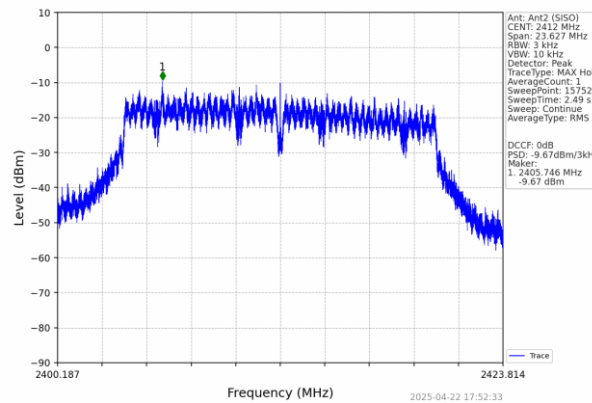


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

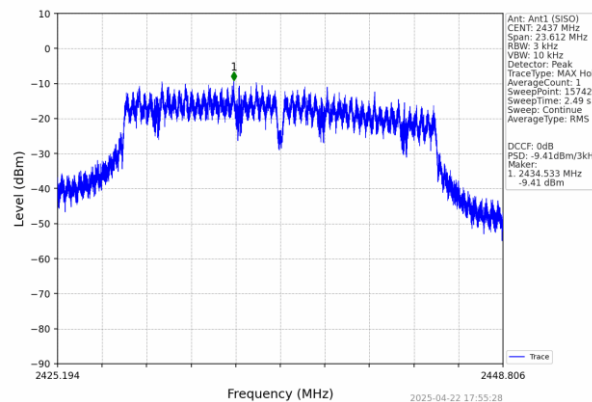




Report No.: HTT202503876F04


802.11g_MCH_2437MHz_Ant2 (SISO)_NTNV

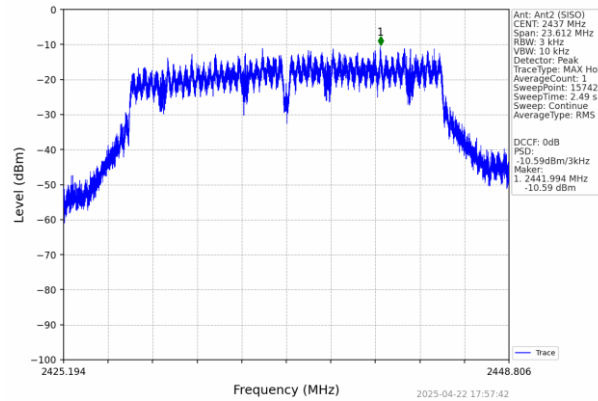

802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

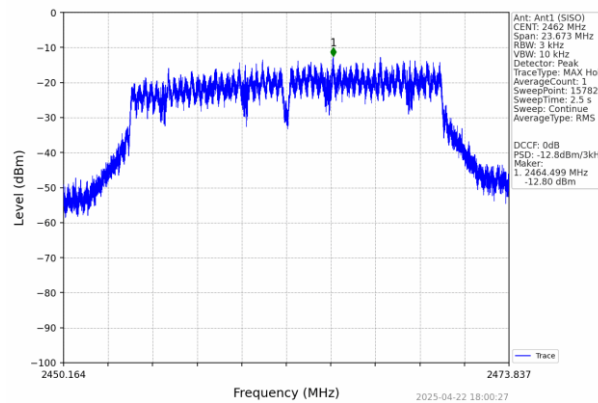


802.11g_HCH_2462MHz_Ant2 (SISO)_NTNV

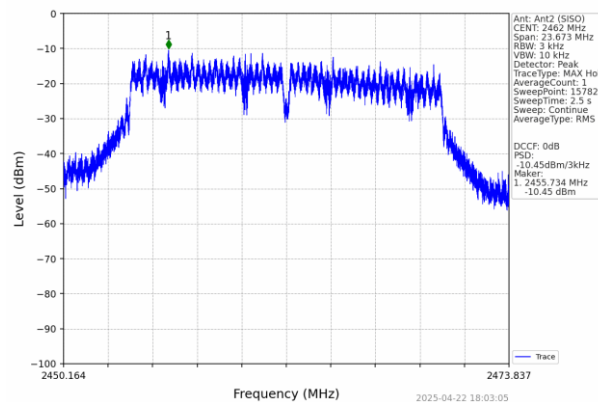




Report No.: HTT202503876F04


802.11n(HT20)_LCH_2412MHz_Ant1 (MIMO) NTN

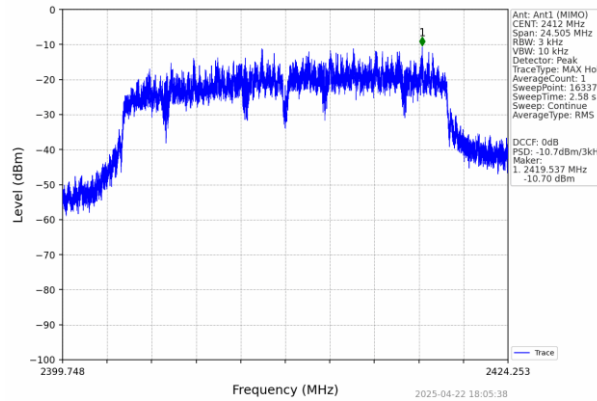

802.11n(HT20)_LCH_2412MHz_Ant2 (MIMO) NTN

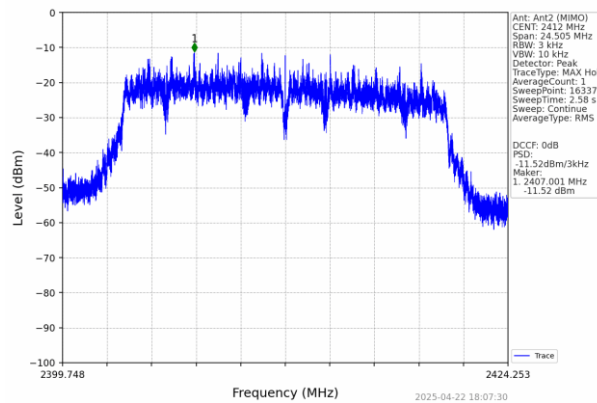


802.11n(HT20)_LCH_2412MHz_MIMO NTN

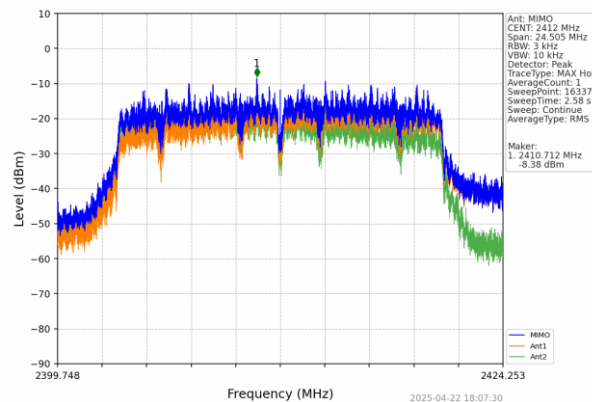




Report No.: HTT202503876F04


802.11n(HT20)_MCH_2437MHz_Ant1 (MIMO) NTN

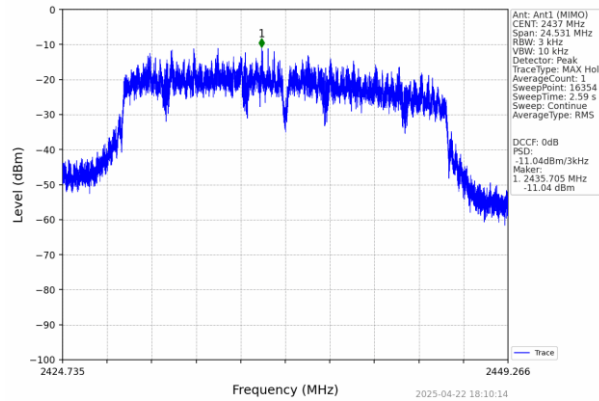

802.11n(HT20)_MCH_2437MHz_Ant2 (MIMO) NTN

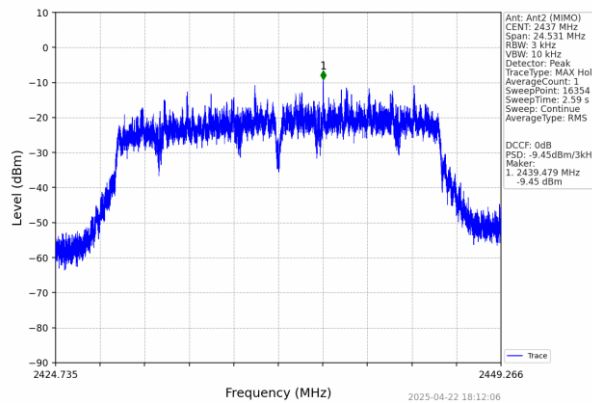


802.11n(HT20)_MCH_2437MHz_MIMO NTN

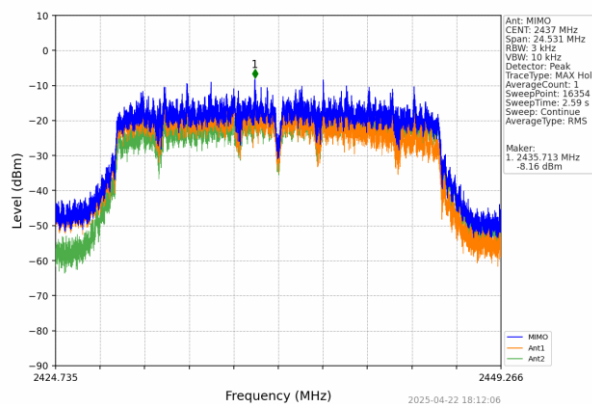




Report No.: HTT202503876F04


802.11n(HT20) HCH_2462MHz_Ant1 (MIMO) NTN

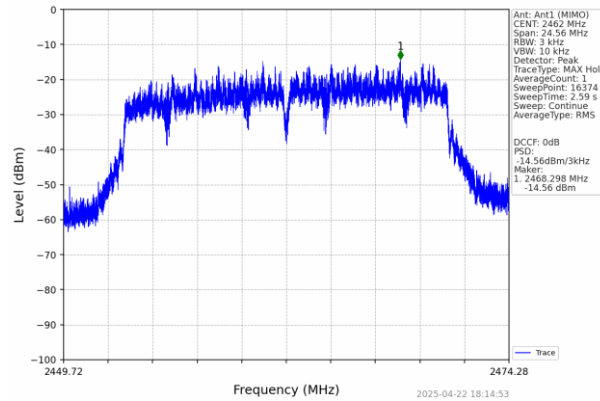

802.11n(HT20) HCH_2462MHz_Ant2 (MIMO) NTN

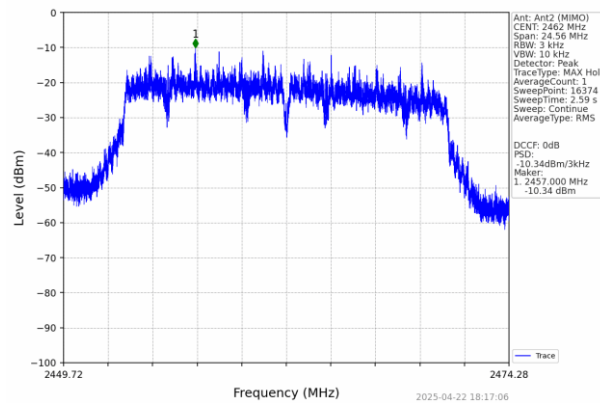


802.11n(HT20) HCH_2462MHz MIMO NTN

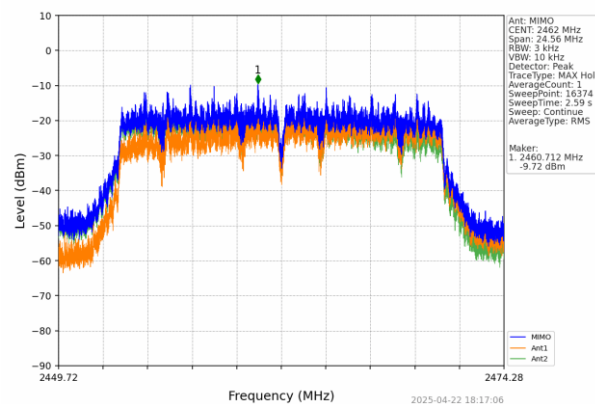




Report No.: HTT202503876F04


802.11n(HT40) LCH 2422MHz_Ant1 (MIMO) NTN

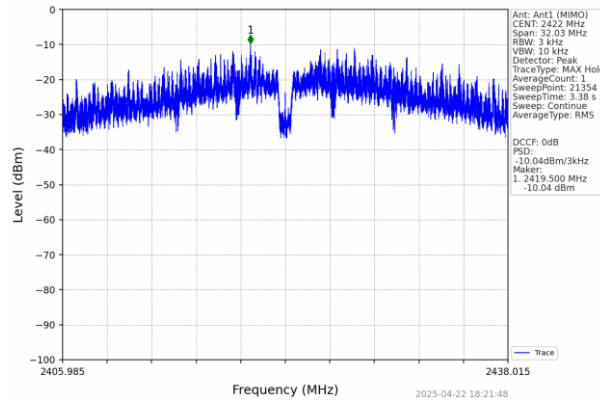

802.11n(HT40) LCH 2422MHz_Ant2 (MIMO) NTN

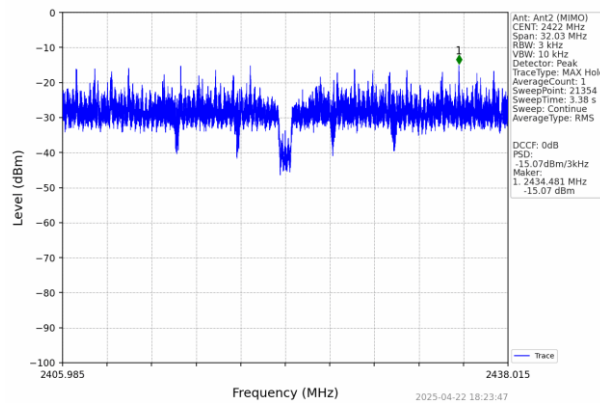


802.11n(HT40) LCH 2422MHz_MIMO NTN

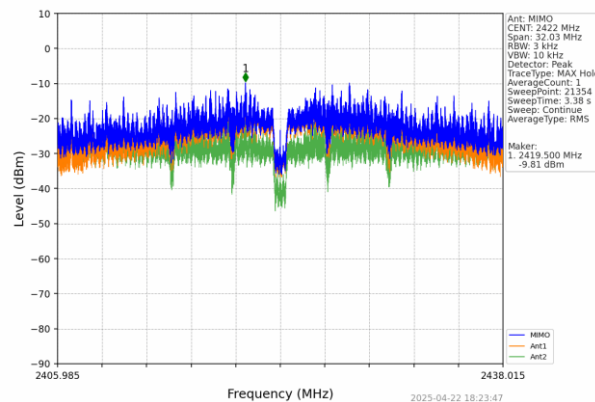




Report No.: HTT202503876F04


802.11n(HT40) MCH_2437MHz_Ant1 (MIMO) NTN

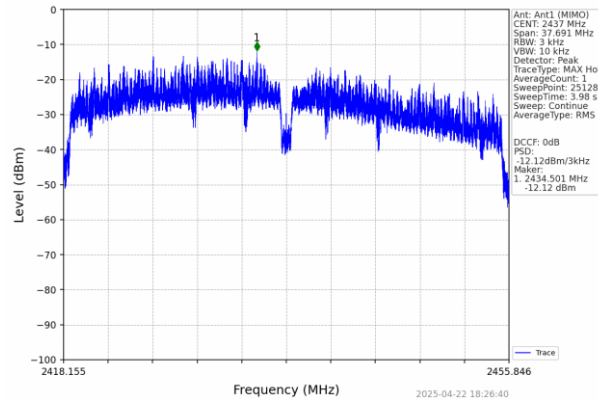

802.11n(HT40) MCH_2437MHz_Ant2 (MIMO) NTN

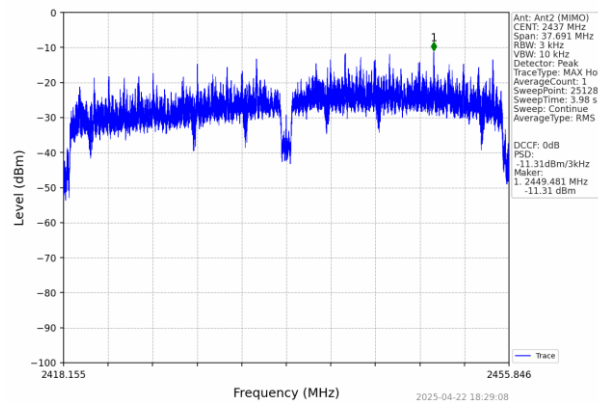


802.11n(HT40) MCH_2437MHz MIMO NTN

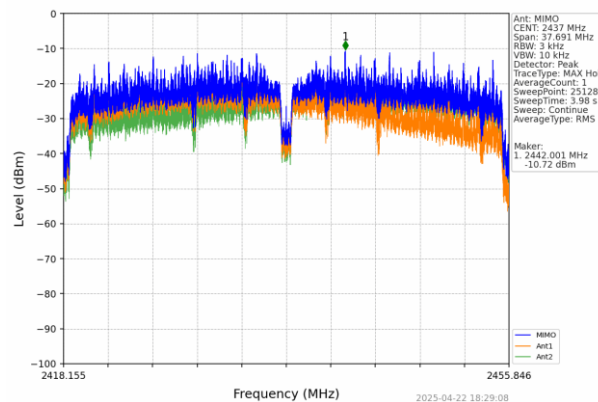





802.11n(HT40) HCH_2452MHz_Ant1 (MIMO) NTN

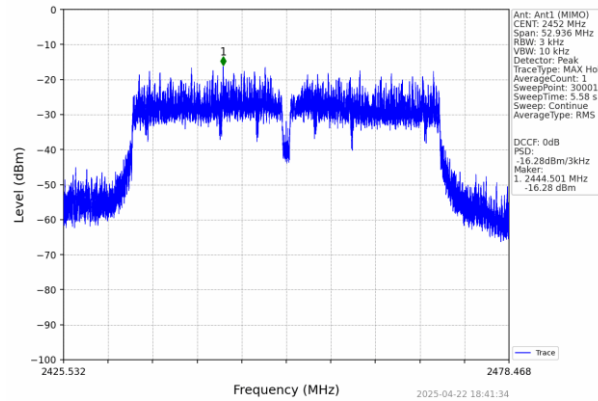

802.11n(HT40) HCH_2452MHz_Ant2 (MIMO) NTN

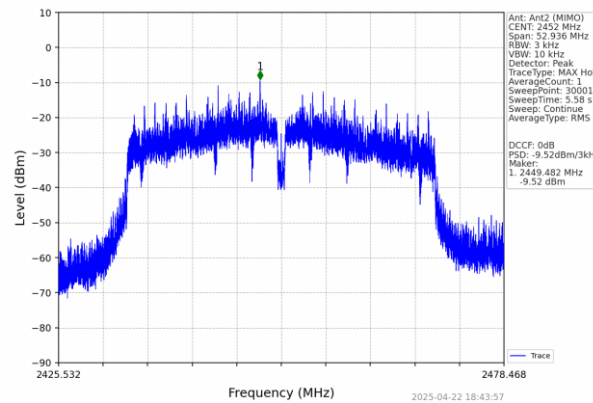


802.11n(HT40) HCH_2452MHz_MIMO NTN

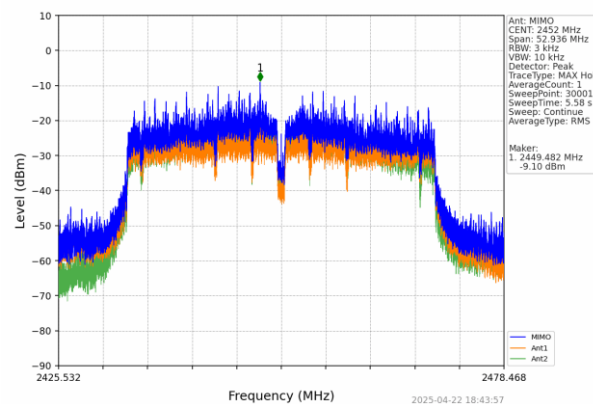

6.5. Band Edge

6.5.1. Conducted Emission Method

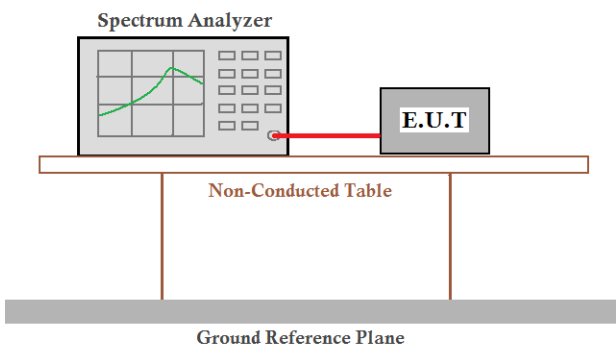Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar