


Power Density Evaluation Report

FCC ID : A4RG1MNW
Equipment : Phone
Model Name : G1MNW
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Mar. 09, 2023 and testing was started from Apr. 12, 2023 and completed on Apr. 20, 2023. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR part2.1093 and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Summary	4
2. Guidance Applied	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
4. RF Exposure Limits	6
4.1 Uncontrolled Environment	6
4.2 Controlled Environment	6
5. System Description and Setup	7
5.1 Test Site Location	7
5.2 EUMmWave Probe / E-Field 5G Probe	8
5.3 Data Acquisition Electronics (DAE)	9
5.4 Scan configuration	9
6. Test Equipment List	9
7. System Verification Source	10
8. Power Density System Verification	11
9. System Verification Results	11
9.1 Computation of the Electric Field Polarization Ellipse	12
9.2 Total Field and Power Flux Density Reconstruction	12
9.3 Test Positions	13
10. RF Exposure Evaluation Results	13
11. 5G NR + LTE + WLAN + BT Sim-Tx analysis	15
12. Standalone and Simultaneous-Tx combination	16
12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR	19
13. Uncertainty Assessment	31
14. References	32

Appendix A. Plots of System Performance Check
Appendix B. Plots of Power Density Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Setup Photo



History of this test report

Report No.	Version	Description	Issued Date
FA2D0206-01C	01	Initial issue of report	Jun. 23, 2023
FA2D0206-01C	02	Update section 3.1	Jul. 18, 2023
FA2D0206-01C	03	Update section 12	Aug. 21, 2023



1. Summary

The maximum measured average power density found during testing for Google LLC, Phone, are as follows.

Standalone transmission				Simultaneous transmission with other transmitters
RF Transmitter		Measured PD (mW/cm²)	Reported PD (mW/cm²)	Summation of Exposure Ratio
5G FR2	n258	0.319	0.75	0.973
	n260	0.330	0.75	
	n261	0.494	0.75	
Result		PASS		

This device is compliance with human exposure to RF radiation limit (1.0 mW/cm²) specified in FCC 47 CFR part1.1310

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Power Density testing specification, method, and procedure for this device is in accordance with the following standards, if the KDB standards were not list within TAF approval, because it is included in the KDB 447498.

- FCC 47 CFR Part 2.1091
- FCC 47 CFR Part 2.1093
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- TCBC workshop notes
- IEC TR 63170



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Phone
Model Name	G1MNV
FCC ID	A4RG1MNV
S / N	33141FDJG0004F
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz 5G NR n258 : 24.25 GHz~24.45 GHz, 24.75GHz ~25.25GHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2G Band: 5150 MHz ~ 5250 MHz WLAN 5.3G Band: 5250 MHz ~ 5350 MHz WLAN 5.5G Band: 5470 MHz ~ 5725 MHz WLAN 5.8G Band: 5725 MHz ~ 5850 MHz WLAN 5.9G Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz WPT: 110.1 KHz ~ 148.5 KHz UWB: 6489.6 MHz, 7987.2 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160 Bluetooth BR/EDR/LE/HR NFC: ASK WPT: ASK UWB: BPM-BPSK

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure above 6GHz to radio frequency (RF) radiation as specified in §1.1310.

General Population Basic restriction for power density for frequencies between 1.5GHz and 100 GHz is $1.0 \text{ mW/cm}^2 = 10 \text{ W/m}^2$


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Table 1

5. System Description and Setup

The system to be used for the near field power density measurement

- SPEAG DASY6 system
- SPEAG cDASY6 5G module software
- EUmmWVx probe
- 5G Phantom cover

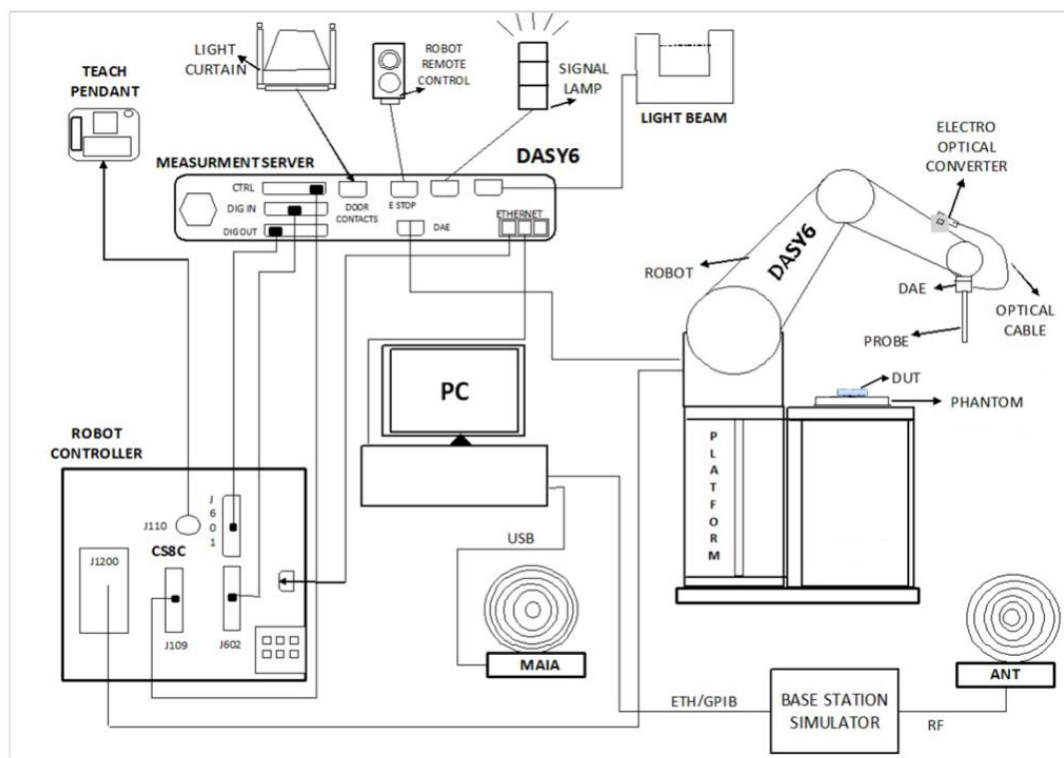

5.1 Test Site Location



Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI
Test Site No.	SAR06-HY

5.2 EUmmWave Probe / E-Field 5G Probe

The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm.


Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

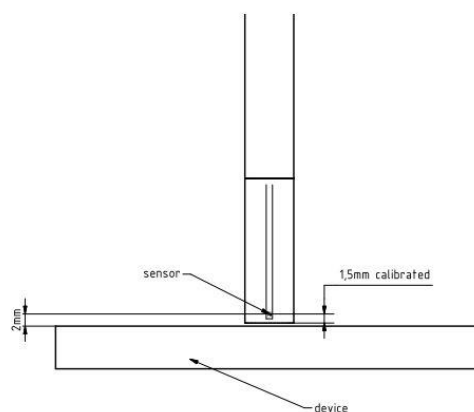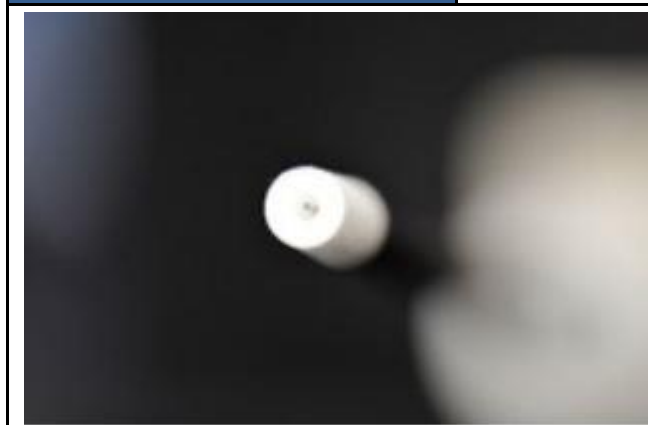

5.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

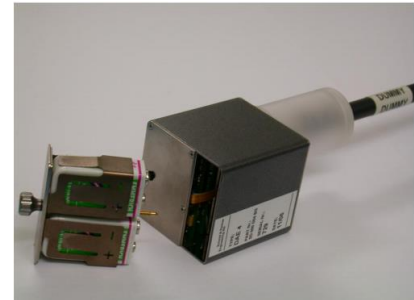

5.4 Scan configuration

Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to $\lambda/4$.

The (x, y) grid step is also set $\lambda/4$, the grid extent is set to sufficiently large to identify the field pattern and the peak.


6. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	5G Verification Source	30GHz	1009	May. 24, 2022	May. 23, 2023
SPEAG	EUmmWV Probe Tip Protection	EUmmWV3	9424	Mar. 21, 2023	Mar. 20, 2024
SPEAG	Data Acquisition Electronics	DAE4	854	Aug. 24, 2022	Aug. 23, 2023
TESTO	Hygro meter	608-H1	45256952	Nov. 02, 2022	Nov. 01, 2023
Aglient	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 17, 2023
Custom Microwave	Standard Horn antenna	M15RH	V91113-A	NCR	NCR

7. System Verification Source

The System Verification sources at 30 GHz and above comprise horn-antennas and very stable signal generators.

Model	Ka-band horn antenna
Calibrated frequency:	30 GHz at 10mm from the case surface
Frequency accuracy	± 100 MHz
E-field polarization	linear
Harmonics	-20 dBc
Total radiated power	14 dBm
Power stability	0.05 dB
Power consumption	5 W
Size	100 x 100 x 100 mm
Weight	1 kg

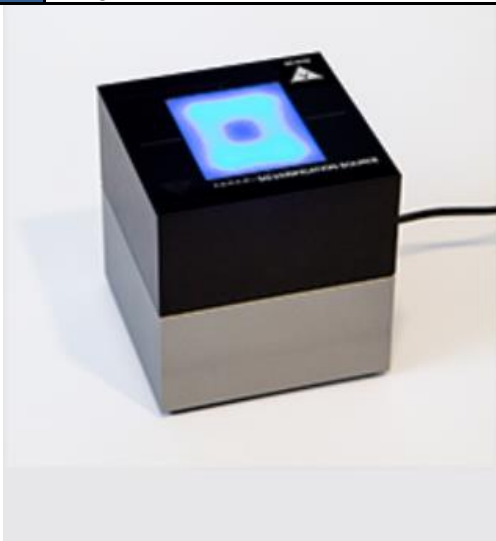



8. Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and the test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both spatially (shape) and numerically (level) have no noticeable difference. The measured results should be within 0.66dB of the calibrated targets.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	$0.25 \left(\frac{\lambda}{4}\right)$	120/120	16×16
30	$0.25 \left(\frac{\lambda}{4}\right)$	60/60	24×24
60	$0.25 \left(\frac{\lambda}{4}\right)$	32.5/32.5	26×26
90	$0.25 \left(\frac{\lambda}{4}\right)$	30/30	36×36

Settings for measurement of verification sources

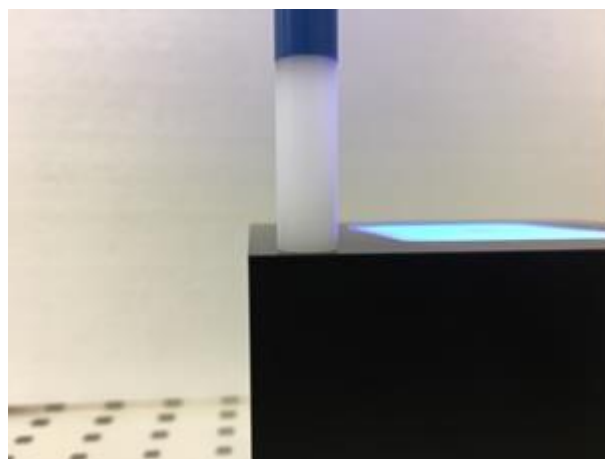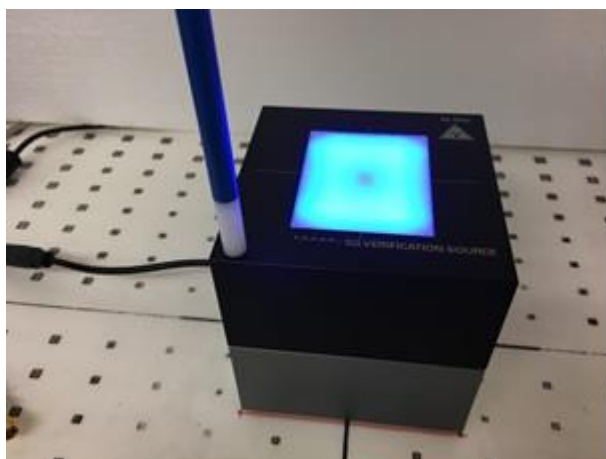

Verification Setup photo

9. System Verification Results

Test Site	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)	Date
SAR06-HY	30G	30GHz_1009	9424	854	10	30.7	29.8	0.13	2023/4/12
SAR06-HY	30G	30GHz_1009	9424	854	10	30.6	29.8	0.12	2023/4/20

Remark:

1. According to 2017 TCB workshop guidance, The mmWave System check is also required before each series of continuous measurement and, as applicable, repeated at least weekly

9.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (ϕ , θ), and one angle describing the tilt of the semi-major axis (ψ). For the two extreme cases, i.e., circular and linear polarizations, three parameters only (a , ϕ and θ) are sufficient for the description of the incident field.

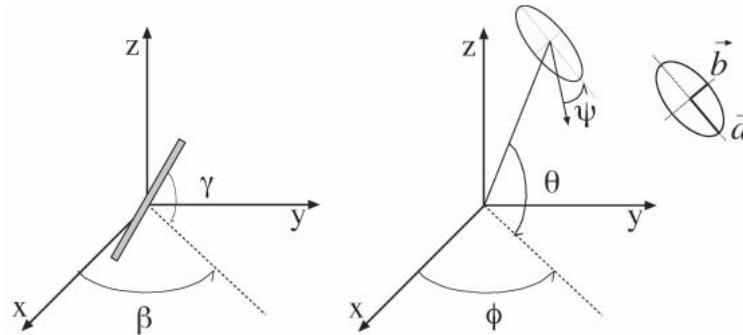


Illustration of the angles used for the numerical description of the sensor and the orientation of an ellipse in 3-D space.

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles (ϕ , θ and ψ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable that the system of equations be over determined. The solution to use a probe consisting of two sensors angled by r_1 and r_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at β_1 , β_2 and β_3 , results in over-determinations by a factor of two. If there is a need for more information or increased accuracy, more rotation angles can be added. The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the Givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of 90 degree ($r_2 = r_1 + 90$ degree), and to simplify, the first rotation angle of the probe (β_1) can be set to 0 degree.

9.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric and magnetic field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmWV2 probe.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. Two average power density values can be computed, the average total power density and the average incident power density, and the average total power density is used to determine compliance.

- $|Re\{S\}|$ is the total Poynting vector
- $\mathbf{n} \cdot Re\{S\}$ is the normal Poynting vector

The software post-processing reports to values, "S avg tot" and "S avg inc". "S avg tot" represents average total power density (all three xyz components included), and "S avg inc" represents average normal power density. The average total power density "S avg tot" is reported to determine the device compliance.

9.3 Test Positions

Band	Antenna Module	Measurement Plane					
		S1(Front) 2mm	S2(Back) 2mm	S3(Right) 2mm	S4(Left) 2mm	S5(Top) 2mm	S6(Bottom) 2mm
5G NR Band 258/260/261	Plane A sub-module	V	V	X	V	V	X
	Plane B sub-module	V	V	X	V	V	X

From the Part 0 and simulation report, beam IDs with highest PD and corresponding Plimit were selected to be tested for each antenna module and for each frequency band.

10. RF Exposure Evaluation Results

- The PD test was performed at a 2 mm separation between sensor and EUT surface (the probe tip is 0.5mm to the EUT surface).
- According to TCBC Workshop in October 2018, 4 cm² averaging area are used.
- This device is enabled with Samsung S.LSI TAS feature, S.LSI TAS will manage and ensure LTE and 5G simultaneous transmission is compliant. The validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report.
- Plimit parameter for 5G mmW NR radio was calculated in RF Exposure Part 0 test report.
- According the KDB inquiry guidance, the back surface was measured on the camera bump 2 mm surface, and reporting simulation PD at 2 mm from antenna-adjacent housing.
- TAS algorithm makes use of the target power per slot in determining consumed SAR. The EIRP control can maintain the required amount of power for either CW tone or actual waveform to ensure the accuracy of actual transmit power. Plimit derived from CW tone signals can be confirmed to apply irrespective of the waveform, therefore the device was configured to transmit CW wave signal for testing.
- Run PD test, from the beam ID with the highest simulated for selected side at middle channel
 - Horizontal polarization (H-only), CW tone signal.
 - Vertical polarization (V-only), CW tone signal.
 - Horizontal + Vertical polarization (H+V) , CW tone signal
 - If step b to c result > 50% limit, then repeat for 2nd highest beam ID. If 2nd beam ID result is also > 50% limit, then repeat for 3rd beam ID
 - For Maximum among 2)–3), test low and high channel
 - For Maximum among 2)–4), test other sides, which is within 2.5 cm from the mmwave antenna module
 - Apply the ratio from simulation to scale PD values@2 mm separation distance to PD values@10 mm separation distance.
Repeat steps a)-f) for the rest of the bands and plane
- It's illustrated in Part 0 report that, for 5G mmW NR since there is total design-related uncertainty arising from TxAGC and device-to-device variation, the worst-case RF exposure should be determined by accounting for this device uncertainty of 2.3 dB, as well as PD design target of 4.42 W/m². Therefore, 5G mmW NR RF exposure for this DUT is evaluated by reported PD calculated as:
Reported PD= PD design target +2.3 dB =7.5 W/m² = 0.75 mW/cm²



Test Number	Antenna Module	Beam ID 1	Beam ID 2	Band	Frequency (GHz)	Exposure Surface	Input Power limit	Test Separation (mm)	Modulation	Epeak (V/m)	Hpeak (A/m)	Measured results Savg inc 4cm ² (W/m ²)	Measured results Savg tot 4cm ² (W/m ²)
01	Plane A sub-module	4	-	n261	27.925	Top (S5)	9.5	2mm	CW	50.4	0.124	1.43	1.68
	Plane A sub-module	-	2	n261	27.925	Top (S5)	9.5	2mm	CW	77.6	0.216	1.88	2.27
	Plane A sub-module	3	3	n261	27.925	Top (S5)	9.5	2mm	CW	92.5	0.254	4.17	4.94
	Plane A sub-module	3	3	n261	27.500	Top (S5)	9.5	2mm	CW	81.8	0.214	3.52	4.3
	Plane A sub-module	3	3	n261	28.350	Top (S5)	9.5	2mm	CW	76.1	0.173	2.63	3.05
	Plane A sub-module	3	3	n261	27.925	Front (S1)	9.5	2mm	CW	36.2	0.094	0.771	1.17
	Plane A sub-module	1	1	n261	27.925	Back (S2)	9.5	2mm	CW	20.6	0.055	0.495	0.528
	Plane A sub-module	6	6	n261	27.925	Left (S4)	9.5	2mm	CW	17.7	0.065	0.555	0.577
	Plane B sub-module	4	-	n261	27.925	Back (S2)	8.95	2mm	CW	37.7	0.099	1.13	1.23
	Plane B sub-module	-	2	n261	27.925	Back (S2)	8.95	2mm	CW	43.4	0.121	1.44	1.52
	Plane B sub-module	2	2	n261	27.925	Back (S2)	8.95	2mm	CW	55.4	0.13	2.27	2.68
	Plane B sub-module	2	2	n261	27.500	Back (S2)	8.95	2mm	CW	40.1	0.105	1.19	1.39
	Plane B sub-module	2	2	n261	28.350	Back (S2)	8.95	2mm	CW	51.4	0.146	2.43	2.72
	Plane B sub-module	3	3	n261	28.350	Front (S1)	8.95	2mm	CW	11.5	0.036	0.098	0.111
	Plane B sub-module	0	0	n261	28.350	Top (S5)	8.95	2mm	CW	34.4	0.085	0.611	0.89
	Plane B sub-module	6	6	n261	28.350	Left (S4)	8.95	2mm	CW	25.2	0.072	0.719	0.913
02	Plane A sub-module	2	-	n260	38.500	Top (S5)	11.49	2mm	CW	58.1	0.13	1.39	1.61
	Plane A sub-module	-	4	n260	38.500	Top (S5)	11.49	2mm	CW	62.4	0.174	1.65	1.85
	Plane A sub-module	6	6	n260	38.500	Top (S5)	11.49	2mm	CW	86.2	0.198	2.56	3.24
	Plane A sub-module	3	3	n260	37.000	Top (S5)	11.49	2mm	CW	58.3	0.151	1.79	2.09
	Plane A sub-module	6	6	n260	40.000	Top (S5)	11.49	2mm	CW	86.8	0.214	2.79	3.3
	Plane A sub-module	3	3	n260	40.000	Front (S1)	11.49	2mm	CW	37.4	0.103	0.512	0.71
	Plane A sub-module	2	2	n260	40.000	Back (S2)	11.49	2mm	CW	18.3	0.048	0.252	0.298
	Plane A sub-module	6	6	n260	40.000	Left (S4)	11.49	2mm	CW	14.6	0.037	0.332	0.382
	Plane B sub-module	6	-	n260	38.500	Back (S2)	12.3	2mm	CW	29.9	0.076	0.725	0.799
	Plane B sub-module	-	0	n260	38.500	Back (S2)	12.3	2mm	CW	32.3	0.078	0.647	0.807
	Plane B sub-module	6	6	n260	38.500	Back (S2)	12.3	2mm	CW	48.2	0.148	1.56	1.71
	Plane B sub-module	4	4	n260	37.000	Back (S2)	12.3	2mm	CW	64	0.166	2.7	2.91
	Plane B sub-module	1	1	n260	40.000	Back (S2)	12.3	2mm	CW	60.9	0.153	2.28	2.67
	Plane B sub-module	5	5	n260	37.000	Front (S1)	12.3	2mm	CW	11.4	0.03	0.083	0.094
	Plane B sub-module	4	4	n260	37.000	Top (S5)	12.3	2mm	CW	33.2	0.101	0.85	1.02
	Plane B sub-module	6	6	n260	37.000	Left (S4)	12.3	2mm	CW	28.6	0.079	1.37	1.44
	Plane A sub-module	5	-	n258	24.750	Top (S5)	8.14	2mm	CW	39.9	0.098	0.728	0.863
	Plane A sub-module	-	2	n258	24.750	Top (S5)	8.14	2mm	CW	45.9	0.112	1.06	1.28
	Plane A sub-module	3	3	n258	24.750	Top (S5)	8.14	2mm	CW	63.7	0.165	2.65	3.12
	Plane A sub-module	3	3	n258	24.250	Top (S5)	8.14	2mm	CW	40.2	0.121	1.17	1.39
	Plane A sub-module	3	3	n258	25.250	Top (S5)	8.14	2mm	CW	49	0.123	1.56	1.89
	Plane A sub-module	3	3	n258	24.750	Front (S1)	8.14	2mm	CW	35.8	0.081	0.812	1.13
	Plane A sub-module	5	5	n258	24.750	Back (S2)	8.14	2mm	CW	19.2	0.064	0.321	0.393
	Plane A sub-module	5	5	n258	24.750	Left (S4)	8.14	2mm	CW	12.2	0.04	0.184	0.201
03	Plane B sub-module	3	-	n258	24.750	Back (S2)	9.48	2mm	CW	43.7	0.11	1.51	1.64
	Plane B sub-module	-	3	n258	24.750	Back (S2)	9.48	2mm	CW	37.8	0.094	0.926	1.05
	Plane B sub-module	1	1	n258	24.750	Back (S2)	9.48	2mm	CW	63.2	0.141	2.82	3.16
	Plane B sub-module	4	4	n258	24.250	Back (S2)	9.48	2mm	CW	60.4	0.142	2.71	2.87
	Plane B sub-module	1	1	n258	25.250	Back (S2)	9.48	2mm	CW	57	0.154	2.96	3.19
	Plane B sub-module	5	5	n258	25.250	Front (S1)	9.48	2mm	CW	15.4	0.052	0.403	0.435
	Plane B sub-module	3	3	n258	25.250	Top (S5)	9.48	2mm	CW	32.6	0.077	0.752	0.865
	Plane B sub-module	6	6	n258	25.250	Left (S4)	9.48	2mm	CW	20.8	0.056	0.587	0.802

11. 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR FR2 and LTE transmission are managed and controlled by Samsung S.LSI TAS feature, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

TAS managed and controlled for Multi-RATs (5G NR + LTE)

The power ratio factors are g_1 and g_2 for LTE and FR2 respectively. The main purpose of these power ratio factors is to split the available SAR budget among different RATs, so $g_1 + g_2 \leq 1$. The value of g_1 is computed based on the need of the LTE anchor and can be changed if the anchor changes its power request. Based on the SAR Budget portion allocated to the anchor, the value of g_2 will be computed. At steady state (where all RATs are being on for a while), the allocated power ratio factors will guarantee that the total exposure ratio never exceeds the highest exposure of either one.

The reported time-averaged PD is applicable for the worst-surface of the device, and for other surfaces the reported PD is determined as below

1. Calculate ratio of simulated PD for desired surface to simulated PD of worst surface for a given beam
 2. Repeat 1 to obtain ratios for all supported beams, and determine maximum ratio
 3. Repeat 1~2 to obtain the corresponding worst-case PD for other surfaces which are needed for TER analysis.
- *For body-worn and hotspot scenario, if SAR was measured at 15mm and 10mm, respectively, then the worst-case PD at 15mm and 10mm separation distance should be determined per surface as*
 - $15\text{mm_worst-case_PD} = \text{PD_ratio_15mm_to_2mm} * \text{reported time-averaged PD}$
 - $10\text{mm_worst-case_PD} = \text{PD_ratio_10mm_to_2mm} * \text{reported time-averaged PD}$

12. Standalone and Simultaneous-Tx combination

Exposure Condition	Tx mode	Capable TX Configurations	WWAN Power Index	WiFi Power Index	BT Power Index
Head	WWAN standalone	WWAN	Index 2		
	WiFi standalone	WiFi 2.4G SISO (Ant4 or Ant3)		Index 1	
		WiFi 2.4G MIMO/CDD (Ant4+3)			
		WiFi 5G MIMO (Ant4+3)			
		WiFi 6E MIMO (Ant4+3)			
		WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 5G MIMO (Ant4+3)		Index 2 (RSDB)	
		WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 6E MIMO (Ant4+3)			
		WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	WiFi +BT	WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)		Index 1	Index 1
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			
	WWAN + WiFi	WWAN + WiFi 2.4G SISO (Ant4 or Ant3)		Index 3	
		WWAN + WiFi 2.4G MIMO/CDD (Ant4+3)			
		WWAN + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3)			
		WWAN + WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 5G MIMO (Ant4+3)		(RSDB)	
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 6E MIMO (Ant4+3)			
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	WWAN + BT	WWAN + Bluetooth (Ant4)	Index 3		Index 1
		WWAN + Bluetooth (Ant3)			
		WWAN + Bluetooth (Ant4+3)			
	WWAN + WiFi +BT	WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)		Index 3	Index 1
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			

Exposure Condition	Tx mode	Capable TX Configurations	WWAN Power Index	WiFi Power Index	BT Power Index
Body	WWAN standalone	WWAN	Index 5		
	WiFi standalone	WiFi 2.4G SISO (Ant4 or Ant3)		Index 5	
		WiFi 2.4G MIMO/CDD (Ant4+3)			
		WiFi 5G MIMO (Ant4+3)			
		WiFi 6E MIMO (Ant4+3)			
		WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 5G MIMO (Ant4+3)		Index 6 (RSDB)	
		WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 6E MIMO (Ant4+3)			
		WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	BT standalone	Bluetooth (Ant4)			Index 2
		Bluetooth (Ant3)			
		Bluetooth (Ant4+3)			
	WiFi +BT	WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)		Index 5	Index 3
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			
	WWAN + WiFi	WWAN + WiFi 2.4G SISO (Ant4 or Ant3)	Index 4 / 6	Index 7	
		WWAN + WiFi 2.4G MIMO/CDD (Ant4+3)			
		WWAN + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3)			
		WWAN + WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 5G MIMO (Ant4+3)		Index 8 (RSDB)	
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 6E MIMO (Ant4+3)			
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	WWAN + BT	WWAN + Bluetooth (Ant4)	Index 4 / 6		Index 3
		WWAN + Bluetooth (Ant3)			
		WWAN + Bluetooth (Ant4+3)			
	WWAN + WiFi +BT	WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)	Index 4 / 6	Index 9	Index 4
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			

Exposure Condition	Tx mode	Capable TX Configurations	WWAN Power Index	WiFi Power Index	BT Power Index
Extremity	WWAN standalone / WWAN + NFC	WWAN / WWAN + NFC	Index 5		
	WiFi standalone / WLAN + NFC	WiFi 2.4G SISO (Ant4 or Ant3) / WiFi 2.4G SISO (Ant4 or Ant3) + NFC		Index 5	
		WiFi 2.4G MIMO/CDD (Ant4+3) / WiFi 2.4G MIMO/CDD (Ant4+3) + NFC			
		WiFi 5G MIMO (Ant4+3) / WiFi 5G MIMO (Ant4+3) + NFC			
		WiFi 6E MIMO (Ant4+3) / WiFi 6E MIMO (Ant4+3) + NFC			
		WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 5G MIMO (Ant4+3) / WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 5G MIMO (Ant4+3) + NFC		Index 6 (RSDB)	
		WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3) / WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3) + NFC			
		WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 6E MIMO (Ant4+3) / WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 6E MIMO (Ant4+3) + NFC			
		WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3) / WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3) + NFC			
	BT standalone / BT + NFC	Bluetooth (Ant4) / Bluetooth (Ant4) + NFC			Index 2
		Bluetooth (Ant3) / Bluetooth (Ant3) + NFC			
		Bluetooth (Ant4+3) / Bluetooth (Ant4+3) + NFC			
	NFC standalone	NFC			
	WiFi +BT + NFC	WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4) + NFC		Index 5	Index 3
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3) + NFC			
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3) + NFC			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4) + NFC			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3) + NFC			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3) + NFC			
	WWAN + WiFi + NFC	WWAN + WiFi 2.4G SISO (Ant4 or Ant3) + NFC	Index 4 / 6	Index 7	Index 8 (RSDB)
		WWAN + WiFi 2.4G MIMO/CDD (Ant4+3) + NFC			
		WWAN + WiFi 5G MIMO (Ant4+3) + NFC			
		WWAN + WiFi 6E MIMO (Ant4+3) + NFC			
		WWAN + WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 5G MIMO (Ant4+3) + NFC		Index 8 (RSDB)	
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3) + NFC			
		WWAN + WiFi 2.4G SISO (Ant4 or Ant3) + WiFi 6E MIMO (Ant4+3) + NFC			
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3) + NFC			
	WWAN + BT + NFC	WWAN + Bluetooth (Ant4) + NFC	Index 4 / 6		Index 3
		WWAN + Bluetooth (Ant3) + NFC			
		WWAN + Bluetooth (Ant4+3) + NFC			
	WWAN + WiFi +BT + NFC	WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4) + NFC	Index 4 / 6	Index 9	Index 4
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3) + NFC			
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3) + NFC			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4) + NFC			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3) + NFC			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3) + NFC			
Max Power Condition	All combinations		Index 1	Index 0	Index 0

General Note:

- The FR2 Plimit is fixed regardless of use cases.
- Max Power condition use case were evaluated in the appendix G of Part1 SAR report no.: FA2D0206-01F.
- The WLAN and Bluetooth SAR test results referenced from the Part1 SAR Report No. FA2D0206-01F and using for Sim-Tx analysis with FR2.
- The Sim-Tx configuration combination include in operation description will be match the title in the below Sum-Tx evaluation table
- For LTE+5GNR+WiFi+BT, due to the TAS control, simultaneous transmission compliance can be assessed on LTE+WiFi/BT and 5GNR +WiFi/BT, and the validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report. For 5GNR FR2 with WiFi, total exposure ratio is calculated as below formula, LTE/FR1 + WIFI simultaneous transmission analysis referring from the report of FCC ID: A4RG1MNV (Sporton SAR Report No. FA2D0206-01F).

The $\sum$ of (the highest measured or estimated SAR for each standalone antenna configuration, adjusted for maximum tune-up tolerance) / 1.6 or 4.0 W/kg] + $\sum$ of MPE ratios] is ≤ 1.0 .

12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR

*Ratio is highest ratio of (PD on desired exposure plane) / (PD on worst-surface) out of all beams and out of all channels illustrated in Power Density Simulation Report.

NR Band	Antenna Module	Exposure condition	Exposure Surface		Evaluation	Ratio*	PD_Design Target +Total uncertainty (W/m ²)	PD_Design Target +Total uncertainty)*Ratio (W/m ²)
					Distance			
					(mm)			
n258	Plane A sub-module	Head	Front Surface	S1	2 mm	0.67	7.5	5.03
n258	Plane B sub-module		Front Surface	S1	2 mm	0.10	7.5	0.77
n260	Plane A sub-module		Front Surface	S1	2 mm	0.62	7.5	4.68
n260	Plane B sub-module		Front Surface	S1	2 mm	0.08	7.5	0.60
n261	Plane A sub-module		Front Surface	S1	2 mm	0.80	7.5	5.97
n261	Plane B sub-module		Front Surface	S1	2 mm	0.11	7.5	0.81

NR Band	Antenna Module	Exposure condition	Exposure Surface		Evaluation	Ratio*	PD_Design Target +Total uncertainty (W/m ²)	PD_Design Target +Total uncertainty)*Ratio (W/m ²)
					Distance			
					(mm)			
n258	Plane A sub-module	Body Worn/Hotspot	worst-surface	S5	10 mm	0.57	7.5	4.29
n258	Plane B sub-module		worst-surface	S2	10 mm	0.66	7.5	4.97
n260	Plane A sub-module		worst-surface	S5	10 mm	0.63	7.5	4.71
n260	Plane B sub-module		worst-surface	S2	10 mm	0.66	7.5	4.92
n261	Plane A sub-module		worst-surface	S5	10 mm	0.66	7.5	4.95
n261	Plane B sub-module		worst-surface	S2	10 mm	0.58	7.5	4.34

NR Band	Antenna Module	Exposure condition	Exposure Surface		Evaluation	Ratio*	PD_Design Target +Total uncertainty	PD_Design Target +Total uncertainty)*Ratio
					Distance		(W/m^2)	
					(mm)		(W/m^2)	
n258	Plane A sub-module	Extremity	Front Surface	S1	2 mm	0.67	7.5	5.03
			Back Surface	S2	2 mm	0.61	7.5	4.58
			Right side	S3	2 mm	Excluded		
			Left side	S4	2 mm	0.19	7.5	1.42
			Top side	S5	2 mm	1.00	7.5	7.50
			Bottom side	S6	2 mm	Excluded		
n258	Plane B sub-module		Front Surface	S1	2 mm	0.10	7.5	0.77
			Back Surface	S2	2 mm	1.00	7.5	7.50
			Right side	S3	2 mm	Excluded		
			Left side	S4	2 mm	0.26	7.5	1.96
			Top side	S5	2 mm	0.45	7.5	3.35
			Bottom side	S6	2 mm	Excluded		
n260	Plane A sub-module		Front Surface	S1	2 mm	0.62	7.5	4.68
			Back Surface	S2	2 mm	0.47	7.5	3.49
			Right side	S3	2 mm	Excluded		
			Left side	S4	2 mm	0.27	7.5	2.02
			Top side	S5	2 mm	1.00	7.5	7.50
			Bottom side	S6	2 mm	Excluded		
n260	Plane B sub-module		Front Surface	S1	2 mm	0.08	7.5	0.60
			Back Surface	S2	2 mm	1.00	7.5	7.50
			Right side	S3	2 mm	Excluded		
			Left side	S4	2 mm	0.29	7.5	2.20
			Top side	S5	2 mm	0.45	7.5	3.37
			Bottom side	S6	2 mm	Excluded		
n261	Plane A sub-module		Front Surface	S1	2 mm	0.80	7.5	5.97
			Back Surface	S2	2 mm	0.50	7.5	3.74
			Right side	S3	2 mm	Excluded		
			Left side	S4	2 mm	0.19	7.5	1.42
			Top side	S5	2 mm	1.00	7.5	7.50
			Bottom side	S6	2 mm	Excluded		
n261	Plane B sub-module		Front Surface	S1	2 mm	0.11	7.5	0.81
			Back Surface	S2	2 mm	1.00	7.5	7.50
			Right side	S3	2 mm	Excluded		
			Left side	S4	2 mm	0.29	7.5	2.18
			Top side	S5	2 mm	0.49	7.5	3.65
			Bottom side	S6	2 mm	Excluded		

<Head Exposure Condition>
<5GNR FR2, WLAN Index 3, BT Index 1>

FR2 Band		Exposure Position	1	2	3	4	5	6	7	5	Reported SAR/1.6 + PD/10 Summation					
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 3+4	PD	1+8 Summed	2+8 Summed	3+8 Summed	4+5+8 Summed	4+6+8 Summed	4+7+8 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)						
n258	Antenna Module A	Right Cheek at 0mm	0.098	0.283	0.073	0.306	0.053	0.068	0.041	5.030	0.564	0.680	0.549	0.727	0.737	0.720
		Right Tilted at 0mm	0.100	0.085	0.122	0.154	0.062	0.016	0.063	5.030	0.566	0.556	0.579	0.638	0.609	0.639
		Left Cheek at 0mm	0.267	0.504	0.248	0.300	0.155	0.143	0.139	5.030	0.670	0.818	0.658	0.787	0.780	0.777
		Left Tilted at 0mm	0.305	0.040	0.309	0.267	0.192	0.008	0.208	5.030	0.694	0.528	0.696	0.790	0.675	0.800
n258	Antenna Module B	Right Cheek at 0mm	0.098	0.283	0.073	0.306	0.053	0.068	0.041	0.770	0.138	0.254	0.123	0.301	0.311	0.294
		Right Tilted at 0mm	0.100	0.085	0.122	0.154	0.062	0.016	0.063	0.770	0.140	0.130	0.153	0.212	0.183	0.213
		Left Cheek at 0mm	0.267	0.504	0.248	0.300	0.155	0.143	0.139	0.770	0.244	0.392	0.232	0.361	0.354	0.351
		Left Tilted at 0mm	0.305	0.040	0.309	0.267	0.192	0.008	0.208	0.770	0.268	0.102	0.270	0.364	0.249	0.374
n260	Antenna Module A	Right Cheek at 0mm	0.098	0.283	0.073	0.306	0.053	0.068	0.041	4.680	0.529	0.645	0.514	0.692	0.702	0.685
		Right Tilted at 0mm	0.100	0.085	0.122	0.154	0.062	0.016	0.063	4.680	0.531	0.521	0.544	0.603	0.574	0.604
		Left Cheek at 0mm	0.267	0.504	0.248	0.300	0.155	0.143	0.139	4.680	0.635	0.783	0.623	0.752	0.745	0.742
		Left Tilted at 0mm	0.305	0.040	0.309	0.267	0.192	0.008	0.208	4.680	0.659	0.493	0.661	0.755	0.640	0.765
n260	Antenna Module B	Right Cheek at 0mm	0.098	0.283	0.073	0.306	0.053	0.068	0.041	0.600	0.121	0.237	0.106	0.284	0.294	0.277
		Right Tilted at 0mm	0.100	0.085	0.122	0.154	0.062	0.016	0.063	0.600	0.123	0.113	0.136	0.195	0.166	0.196
		Left Cheek at 0mm	0.267	0.504	0.248	0.300	0.155	0.143	0.139	0.600	0.227	0.375	0.215	0.344	0.337	0.334
		Left Tilted at 0mm	0.305	0.040	0.309	0.267	0.192	0.008	0.208	0.600	0.251	0.085	0.253	0.347	0.232	0.357
n261	Antenna Module A	Right Cheek at 0mm	0.098	0.283	0.073	0.306	0.053	0.068	0.041	5.970	0.658	0.774	0.643	0.821	0.831	0.814
		Right Tilted at 0mm	0.100	0.085	0.122	0.154	0.062	0.016	0.063	5.970	0.660	0.650	0.673	0.732	0.703	0.733
		Left Cheek at 0mm	0.267	0.504	0.248	0.300	0.155	0.143	0.139	5.970	0.764	0.912	0.752	0.881	0.874	0.871
		Left Tilted at 0mm	0.305	0.040	0.309	0.267	0.192	0.008	0.208	5.970	0.788	0.622	0.790	0.884	0.769	0.894
n261	Antenna Module B	Right Cheek at 0mm	0.098	0.283	0.073	0.306	0.053	0.068	0.041	0.810	0.142	0.258	0.127	0.305	0.315	0.298
		Right Tilted at 0mm	0.100	0.085	0.122	0.154	0.062	0.016	0.063	0.810	0.144	0.134	0.157	0.216	0.187	0.217
		Left Cheek at 0mm	0.267	0.504	0.248	0.300	0.155	0.143	0.139	0.810	0.248	0.396	0.236	0.365	0.358	0.355
		Left Tilted at 0mm	0.305	0.040	0.309	0.267	0.192	0.008	0.208	0.810	0.272	0.106	0.274	0.368	0.253	0.378

<5G NR FR2, WLAN Index 4>

FR2 Band		Exposure Position	1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation		
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	PD	3+4+5 Summed	1+4+5 Summed	2+4+5 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm ² (W/m ²)			
n258	Antenna Module A	Right Cheek at 0mm	0.098	0.117	0.073	0.306	5.030	0.740	0.756	0.767
		Right Tilted at 0mm	0.100	0.033	0.122	0.154	5.030	0.676	0.662	0.620
		Left Cheek at 0mm	0.267	0.236	0.248	0.300	5.030	0.846	0.857	0.838
		Left Tilted at 0mm	0.305	0.016	0.309	0.267	5.030	0.863	0.861	0.680
	Antenna Module B	Right Cheek at 0mm	0.098	0.117	0.073	0.306	0.770	0.314	0.330	0.341
		Right Tilted at 0mm	0.100	0.033	0.122	0.154	0.770	0.250	0.236	0.194
		Left Cheek at 0mm	0.267	0.236	0.248	0.300	0.770	0.420	0.431	0.412
		Left Tilted at 0mm	0.305	0.016	0.309	0.267	0.770	0.437	0.435	0.254
n260	Antenna Module A	Right Cheek at 0mm	0.098	0.117	0.073	0.306	4.680	0.705	0.721	0.732
		Right Tilted at 0mm	0.100	0.033	0.122	0.154	4.680	0.641	0.627	0.585
		Left Cheek at 0mm	0.267	0.236	0.248	0.300	4.680	0.811	0.822	0.803
		Left Tilted at 0mm	0.305	0.016	0.309	0.267	4.680	0.828	0.826	0.645
	Antenna Module B	Right Cheek at 0mm	0.098	0.117	0.073	0.306	0.600	0.297	0.313	0.324
		Right Tilted at 0mm	0.100	0.033	0.122	0.154	0.600	0.233	0.219	0.177
		Left Cheek at 0mm	0.267	0.236	0.248	0.300	0.600	0.403	0.414	0.395
		Left Tilted at 0mm	0.305	0.016	0.309	0.267	0.600	0.420	0.418	0.237
n261	Antenna Module A	Right Cheek at 0mm	0.098	0.117	0.073	0.306	5.970	0.834	0.850	0.861
		Right Tilted at 0mm	0.100	0.033	0.122	0.154	5.970	0.770	0.756	0.714
		Left Cheek at 0mm	0.267	0.236	0.248	0.300	5.970	0.940	0.951	0.932
		Left Tilted at 0mm	0.305	0.016	0.309	0.267	5.970	0.957	0.955	0.774
	Antenna Module B	Right Cheek at 0mm	0.098	0.117	0.073	0.306	0.810	0.318	0.334	0.345
		Right Tilted at 0mm	0.100	0.033	0.122	0.154	0.810	0.254	0.240	0.198
		Left Cheek at 0mm	0.267	0.236	0.248	0.300	0.810	0.424	0.435	0.416
		Left Tilted at 0mm	0.305	0.016	0.309	0.267	0.810	0.441	0.439	0.258

<Hotspot Exposure Condition>
<5G NR FR2, WLAN Index 7>

WWAN Band		Exposure Position	1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation			
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	PD	1+5 Summed	2+5 Summed	3+5 Summed	4+5 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)				
n258	Antenna Module A	Front at 10mm	0.308	0.362	0.391	0.187	4.290	0.622	0.655	0.673	0.546
		Back at 10mm	0.313	0.458	0.436	0.606	4.290	0.625	0.715	0.702	0.808
		Left side at 10mm	0.001	0.634	0.274	0.357	4.290	0.430	0.825	0.600	0.652
		Right side at 10mm	0.364	0.001	0.431	0.264	4.290	0.657	0.430	0.698	0.594
		Top side at 10mm	0.537	0.049	0.604	0.275	4.290	0.765	0.460	0.807	0.601
		Bottom side at 10mm					4.290	0.429	0.429	0.429	0.429
	Antenna Module B	Front at 10mm	0.308	0.362	0.391	0.187	4.970	0.690	0.723	0.741	0.614
		Back at 10mm	0.313	0.458	0.436	0.606	4.970	0.693	0.783	0.770	0.876
		Left side at 10mm	0.001	0.634	0.274	0.357	4.970	0.498	0.893	0.668	0.720
		Right side at 10mm	0.364	0.001	0.431	0.264	4.970	0.725	0.498	0.766	0.662
		Top side at 10mm	0.537	0.049	0.604	0.275	4.970	0.833	0.528	0.875	0.669
		Bottom side at 10mm					4.970	0.497	0.497	0.497	0.497
n260	Antenna Module A	Front at 10mm	0.308	0.362	0.391	0.187	4.710	0.664	0.697	0.715	0.588
		Back at 10mm	0.313	0.458	0.436	0.606	4.710	0.667	0.757	0.744	0.850
		Left side at 10mm	0.001	0.634	0.274	0.357	4.710	0.472	0.867	0.642	0.694
		Right side at 10mm	0.364	0.001	0.431	0.264	4.710	0.699	0.472	0.740	0.636
		Top side at 10mm	0.537	0.049	0.604	0.275	4.710	0.807	0.502	0.849	0.643
		Bottom side at 10mm					4.710	0.471	0.471	0.471	0.471
	Antenna Module B	Front at 10mm	0.308	0.362	0.391	0.187	4.920	0.685	0.718	0.736	0.609
		Back at 10mm	0.313	0.458	0.436	0.606	4.920	0.688	0.778	0.765	0.871
		Left side at 10mm	0.001	0.634	0.274	0.357	4.920	0.493	0.888	0.663	0.715
		Right side at 10mm	0.364	0.001	0.431	0.264	4.920	0.720	0.493	0.761	0.657
		Top side at 10mm	0.537	0.049	0.604	0.275	4.920	0.828	0.523	0.870	0.664
		Bottom side at 10mm					4.920	0.492	0.492	0.492	0.492
n261	Antenna Module A	Front at 10mm	0.308	0.362	0.391	0.187	4.950	0.688	0.721	0.739	0.612
		Back at 10mm	0.313	0.458	0.436	0.606	4.950	0.691	0.781	0.768	0.874
		Left side at 10mm	0.001	0.634	0.274	0.357	4.950	0.496	0.891	0.666	0.718
		Right side at 10mm	0.364	0.001	0.431	0.264	4.950	0.723	0.496	0.764	0.660
		Top side at 10mm	0.537	0.049	0.604	0.275	4.950	0.831	0.526	0.873	0.667
		Bottom side at 10mm					4.950	0.495	0.495	0.495	0.495
	Antenna Module B	Front at 10mm	0.308	0.362	0.391	0.187	4.340	0.627	0.660	0.678	0.551
		Back at 10mm	0.313	0.458	0.436	0.606	4.340	0.630	0.720	0.707	0.813
		Left side at 10mm	0.001	0.634	0.274	0.357	4.340	0.435	0.830	0.605	0.657
		Right side at 10mm	0.364	0.001	0.431	0.264	4.340	0.662	0.435	0.703	0.599
		Top side at 10mm	0.537	0.049	0.604	0.275	4.340	0.770	0.465	0.812	0.606
		Bottom side at 10mm					4.340	0.434	0.434	0.434	0.434

<5G NR FR2, WLAN Index 8>

WWAN Band		Exposure Position	1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation		
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	PD	1+4+5 Summed	2+4+5 Summed	3+4+5 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm ² (W/m ²)			
n258	Antenna Module A	Front at 10mm	0.176	0.139	0.105	0.181	4.290	0.626	0.605	0.652
		Back at 10mm	0.214	0.178	0.158	0.391	4.290	0.674	0.662	0.807
		Left side at 10mm	0.001	0.274	0.095	0.357	4.290	0.601	0.489	0.653
		Right side at 10mm	0.218	0.001	0.144	0.215	4.290	0.566	0.655	0.700
		Top side at 10mm	0.320	0.018	0.212	0.233	4.290	0.640	0.762	0.775
		Bottom side at 10mm					4.290	0.429	0.429	0.429
	Antenna Module B	Front at 10mm	0.176	0.139	0.105	0.181	4.970	0.694	0.673	0.720
		Back at 10mm	0.214	0.178	0.158	0.391	4.970	0.742	0.730	0.875
		Left side at 10mm	0.001	0.274	0.095	0.357	4.970	0.669	0.557	0.721
		Right side at 10mm	0.218	0.001	0.144	0.215	4.970	0.634	0.723	0.768
		Top side at 10mm	0.320	0.018	0.212	0.233	4.970	0.708	0.830	0.843
		Bottom side at 10mm					4.970	0.497	0.497	0.497
n260	Antenna Module A	Front at 10mm	0.176	0.139	0.105	0.181	4.710	0.668	0.647	0.694
		Back at 10mm	0.214	0.178	0.158	0.391	4.710	0.716	0.704	0.849
		Left side at 10mm	0.001	0.274	0.095	0.357	4.710	0.643	0.531	0.695
		Right side at 10mm	0.218	0.001	0.144	0.215	4.710	0.608	0.697	0.742
		Top side at 10mm	0.320	0.018	0.212	0.233	4.710	0.682	0.804	0.817
		Bottom side at 10mm					4.710	0.471	0.471	0.471
	Antenna Module B	Front at 10mm	0.176	0.139	0.105	0.181	4.920	0.689	0.668	0.715
		Back at 10mm	0.214	0.178	0.158	0.391	4.920	0.737	0.725	0.870
		Left side at 10mm	0.001	0.274	0.095	0.357	4.920	0.664	0.552	0.716
		Right side at 10mm	0.218	0.001	0.144	0.215	4.920	0.629	0.718	0.763
		Top side at 10mm	0.320	0.018	0.212	0.233	4.920	0.703	0.825	0.838
		Bottom side at 10mm					4.920	0.492	0.492	0.492
n261	Antenna Module A	Front at 10mm	0.176	0.139	0.105	0.181	4.950	0.692	0.671	0.718
		Back at 10mm	0.214	0.178	0.158	0.391	4.950	0.740	0.728	0.873
		Left side at 10mm	0.001	0.274	0.095	0.357	4.950	0.667	0.555	0.719
		Right side at 10mm	0.218	0.001	0.144	0.215	4.950	0.632	0.721	0.766
		Top side at 10mm	0.320	0.018	0.212	0.233	4.950	0.706	0.828	0.841
		Bottom side at 10mm					4.950	0.495	0.495	0.495
	Antenna Module B	Front at 10mm	0.176	0.139	0.105	0.181	4.340	0.631	0.610	0.657
		Back at 10mm	0.214	0.178	0.158	0.391	4.340	0.679	0.667	0.812
		Left side at 10mm	0.001	0.274	0.095	0.357	4.340	0.606	0.494	0.658
		Right side at 10mm	0.218	0.001	0.144	0.215	4.340	0.571	0.660	0.705
		Top side at 10mm	0.320	0.018	0.212	0.233	4.340	0.645	0.767	0.780
		Bottom side at 10mm					4.340	0.434	0.434	0.434

<5G NR FR2, WLAN Index 9, BT Index 3,4>

WWAN Band		Exposure Position	1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation		
			5/6GHz WLAN Ant 4+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3	PD	1+2+5 Summed	1+3+5 Summed	1+4+5 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)			
n258	Antenna Module A	Front at 10mm	0.181	0.169	0.119	0.167	4.290	0.648	0.617	0.647
		Back at 10mm	0.391	0.232	0.141	0.179	4.290	0.818	0.762	0.785
		Left side at 10mm	0.357	0.001	0.265	0.284	4.290	0.653	0.818	0.830
		Right side at 10mm	0.215	0.251	0.001	0.277	4.290	0.720	0.564	0.737
		Top side at 10mm	0.233	0.286	0.013	0.196	4.290	0.753	0.583	0.697
		Bottom side at 10mm					4.290	0.429	0.429	0.429
	Antenna Module B	Front at 10mm	0.181	0.169	0.119	0.167	4.970	0.716	0.685	0.715
		Back at 10mm	0.391	0.232	0.141	0.179	4.970	0.886	0.830	0.853
		Left side at 10mm	0.357	0.001	0.265	0.284	4.970	0.721	0.886	0.898
		Right side at 10mm	0.215	0.251	0.001	0.277	4.970	0.788	0.632	0.805
		Top side at 10mm	0.233	0.286	0.013	0.196	4.970	0.821	0.651	0.765
		Bottom side at 10mm					4.970	0.497	0.497	0.497
n260	Antenna Module A	Front at 10mm	0.181	0.169	0.119	0.167	4.710	0.690	0.659	0.689
		Back at 10mm	0.391	0.232	0.141	0.179	4.710	0.860	0.804	0.827
		Left side at 10mm	0.357	0.001	0.265	0.284	4.710	0.695	0.860	0.872
		Right side at 10mm	0.215	0.251	0.001	0.277	4.710	0.762	0.606	0.779
		Top side at 10mm	0.233	0.286	0.013	0.196	4.710	0.795	0.625	0.739
		Bottom side at 10mm					4.710	0.471	0.471	0.471
	Antenna Module B	Front at 10mm	0.181	0.169	0.119	0.167	4.920	0.711	0.680	0.710
		Back at 10mm	0.391	0.232	0.141	0.179	4.920	0.881	0.825	0.848
		Left side at 10mm	0.357	0.001	0.265	0.284	4.920	0.716	0.881	0.893
		Right side at 10mm	0.215	0.251	0.001	0.277	4.920	0.783	0.627	0.800
		Top side at 10mm	0.233	0.286	0.013	0.196	4.920	0.816	0.646	0.760
		Bottom side at 10mm					4.920	0.492	0.492	0.492
n261	Antenna Module A	Front at 10mm	0.181	0.169	0.119	0.167	4.950	0.714	0.683	0.713
		Back at 10mm	0.391	0.232	0.141	0.179	4.950	0.884	0.828	0.851
		Left side at 10mm	0.357	0.001	0.265	0.284	4.950	0.719	0.884	0.896
		Right side at 10mm	0.215	0.251	0.001	0.277	4.950	0.786	0.630	0.803
		Top side at 10mm	0.233	0.286	0.013	0.196	4.950	0.819	0.649	0.763
		Bottom side at 10mm					4.950	0.495	0.495	0.495
	Antenna Module B	Front at 10mm	0.181	0.169	0.119	0.167	4.340	0.653	0.622	0.652
		Back at 10mm	0.391	0.232	0.141	0.179	4.340	0.823	0.767	0.790
		Left side at 10mm	0.357	0.001	0.265	0.284	4.340	0.658	0.823	0.835
		Right side at 10mm	0.215	0.251	0.001	0.277	4.340	0.725	0.569	0.742
		Top side at 10mm	0.233	0.286	0.013	0.196	4.340	0.758	0.588	0.702
		Bottom side at 10mm					4.340	0.434	0.434	0.434

<Body-Worn Exposure Condition>

<5G NR FR2, WLAN Index 7>

WWAN Band			1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation			
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	PD	1+5 Summed	2+5 Summed	3+5 Summed	4+5 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm ² (W/m ²)				
n258	Antenna Module A	Front at 10mm	0.308	0.362	0.391	0.399	4.290	0.622	0.655	0.673	0.678
		Back at 10mm	0.389	0.458	0.436	0.713	4.290	0.672	0.715	0.702	0.875
	Antenna Module B	Front at 10mm	0.308	0.362	0.391	0.399	4.970	0.690	0.723	0.741	0.746
		Back at 10mm	0.389	0.458	0.436	0.713	4.970	0.740	0.783	0.770	0.943
n260	Antenna Module A	Front at 10mm	0.308	0.362	0.391	0.399	4.710	0.664	0.697	0.715	0.720
		Back at 10mm	0.389	0.458	0.436	0.713	4.710	0.714	0.757	0.744	0.917
	Antenna Module B	Front at 10mm	0.308	0.362	0.391	0.399	4.920	0.685	0.718	0.736	0.741
		Back at 10mm	0.389	0.458	0.436	0.713	4.920	0.735	0.778	0.765	0.938
n261	Antenna Module A	Front at 10mm	0.308	0.362	0.391	0.399	4.950	0.688	0.721	0.739	0.744
		Back at 10mm	0.389	0.458	0.436	0.713	4.950	0.738	0.781	0.768	0.941
	Antenna Module B	Front at 10mm	0.308	0.362	0.391	0.399	4.340	0.627	0.660	0.678	0.683
		Back at 10mm	0.389	0.458	0.436	0.713	4.340	0.677	0.720	0.707	0.880

<5G NR FR2, WLAN Index 8>

WWAN Band			1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation		
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	PD	1+4+5 Summed	2+4+5 Summed	3+4+5 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm ² (W/m ²)			
n258	Antenna Module A	Front at 10mm	0.176	0.139	0.105	0.267	4.290	0.626	0.605	0.706
		Back at 10mm	0.224	0.178	0.158	0.400	4.290	0.680	0.668	0.819
	Antenna Module B	Front at 10mm	0.176	0.139	0.105	0.267	4.970	0.694	0.673	0.774
		Back at 10mm	0.224	0.178	0.158	0.400	4.970	0.748	0.736	0.887
n260	Antenna Module A	Front at 10mm	0.176	0.139	0.105	0.267	4.710	0.668	0.647	0.748
		Back at 10mm	0.224	0.178	0.158	0.400	4.710	0.722	0.710	0.861
	Antenna Module B	Front at 10mm	0.176	0.139	0.105	0.267	4.920	0.689	0.668	0.769
		Back at 10mm	0.224	0.178	0.158	0.400	4.920	0.743	0.731	0.882
n261	Antenna Module A	Front at 10mm	0.176	0.139	0.105	0.267	4.950	0.692	0.671	0.772
		Back at 10mm	0.224	0.178	0.158	0.400	4.950	0.746	0.734	0.885
	Antenna Module B	Front at 10mm	0.176	0.139	0.105	0.267	4.340	0.631	0.610	0.711
		Back at 10mm	0.224	0.178	0.158	0.400	4.340	0.685	0.673	0.824

<5G NR FR2, WLAN Index 9, BT Index 3,4>

WWAN Band		Exposure Position	1	2	3	4	5	Reported SAR/1.6 + PD/10 Summation		
			5/6GHz WLAN Ant 4+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3	PD	1+2+5 Summed	1+3+5 Summed	1+4+5 Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm ² (W/m ²)			
n258	Antenna Module A	Front at 10mm	0.267	0.169	0.119	0.167	4.290	0.702	0.670	0.700
		Back at 10mm	0.400	0.232	0.200	0.320	4.290	0.824	0.804	0.879
	Antenna Module B	Front at 10mm	0.267	0.169	0.119	0.167	4.970	0.770	0.738	0.768
		Back at 10mm	0.400	0.232	0.200	0.320	4.970	0.892	0.872	0.947
n260	Antenna Module A	Front at 10mm	0.267	0.169	0.119	0.167	4.710	0.744	0.712	0.742
		Back at 10mm	0.400	0.232	0.200	0.320	4.710	0.866	0.846	0.921
	Antenna Module B	Front at 10mm	0.267	0.169	0.119	0.167	4.920	0.765	0.733	0.763
		Back at 10mm	0.400	0.232	0.200	0.320	4.920	0.887	0.867	0.942
n261	Antenna Module A	Front at 10mm	0.267	0.169	0.119	0.167	4.950	0.768	0.736	0.766
		Back at 10mm	0.400	0.232	0.200	0.320	4.950	0.890	0.870	0.945
	Antenna Module B	Front at 10mm	0.267	0.169	0.119	0.167	4.340	0.707	0.675	0.705
		Back at 10mm	0.400	0.232	0.200	0.320	4.340	0.829	0.809	0.884



<Product Specific Exposure Condition>

General Note:

1. Since the 2.4GHz WLAN and Bluetooth was not Perform Extremity condition due to the Hotspot SAR is less than 1.2W/kg.

<5G NR FR2, WLAN Index 7, NFC>

WWAN Band		Exposure Position	4	5	6	Reported SAR/4 + PD/10 Summation
			5/6GHz WLAN Ant 4+3 10g SAR (W/kg)	NFC 10g SAR (W/kg)	PD 4cm^2(W/m^2)	4+5+6 Summed
n258	Antenna Module A	Front at 0mm	1.333	0.001	5.030	0.837
		Back at 0mm	0.798	0.093	4.580	0.681
		Left side at 0mm	1.794	0.002	1.420	0.449
		Right side at 0mm	1.564	0.001		0.683
		Top side at 0mm	0.871		7.500	0.968
		Bottom side at 0mm				0.000
	Antenna Module B	Front at 0mm	1.333	0.001	0.770	0.411
		Back at 0mm	0.798	0.093	7.500	0.973
		Left side at 0mm	1.794	0.002	1.960	0.449
		Right side at 0mm	1.564	0.001		0.614
		Top side at 0mm	0.871		3.350	0.553
		Bottom side at 0mm				0.000
n260	Antenna Module A	Front at 0mm	1.333	0.001	4.680	0.802
		Back at 0mm	0.798	0.093	3.490	0.572
		Left side at 0mm	1.794	0.002	2.020	0.449
		Right side at 0mm	1.564	0.001		0.632
		Top side at 0mm	0.871		7.500	0.968
		Bottom side at 0mm				0.000
	Antenna Module B	Front at 0mm	1.333	0.001	0.600	0.394
		Back at 0mm	0.798	0.093	7.500	0.973
		Left side at 0mm	1.794	0.002	2.200	0.449
		Right side at 0mm	1.564	0.001		0.570
		Top side at 0mm	0.871		3.370	0.555
		Bottom side at 0mm				0.000
n261	Antenna Module A	Front at 0mm	1.333	0.001	5.970	0.931
		Back at 0mm	0.798	0.093	3.740	0.597
		Left side at 0mm	1.794	0.002	1.420	0.449
		Right side at 0mm	1.564	0.001		0.596
		Top side at 0mm	0.871		7.500	0.968
		Bottom side at 0mm				0.000
	Antenna Module B	Front at 0mm	1.333	0.001	0.810	0.415
		Back at 0mm	0.798	0.093	7.500	0.973
		Left side at 0mm	1.794	0.002	2.180	0.449
		Right side at 0mm	1.564	0.001		0.648
		Top side at 0mm	0.871		3.650	0.583
		Bottom side at 0mm				0.000



<5G NR FR2, WLAN Index 8,9, BT index 3,4, NFC>

WWAN Band		Exposure Position	1	5	6	Reported SAR/4 + PD/10 Summation
			5/6GHz WLAN Ant 4+3	NFC	PD	1+5+6 Summed
			10g SAR (W/kg)	10g SAR (W/kg)	4cm ² (W/m ²)	
n258	Antenna Module A	Front at 0mm	0.884	0.001	5.030	0.724
		Back at 0mm	0.475	0.093	4.580	0.600
		Left side at 0mm	1.528	0.002	1.420	0.383
		Right side at 0mm	0.866	0.001		0.509
		Top side at 0mm	0.756		7.500	0.939
		Bottom side at 0mm				0.000
	Antenna Module B	Front at 0mm	0.884	0.001	0.770	0.298
		Back at 0mm	0.475	0.093	7.500	0.892
		Left side at 0mm	1.528	0.002	1.960	0.383
		Right side at 0mm	0.866	0.001		0.440
		Top side at 0mm	0.756		3.350	0.524
		Bottom side at 0mm				0.000
n260	Antenna Module A	Front at 0mm	0.884	0.001	4.680	0.689
		Back at 0mm	0.475	0.093	3.490	0.491
		Left side at 0mm	1.528	0.002	2.020	0.383
		Right side at 0mm	0.866	0.001		0.458
		Top side at 0mm	0.756		7.500	0.939
		Bottom side at 0mm				0.000
	Antenna Module B	Front at 0mm	0.884	0.001	0.600	0.281
		Back at 0mm	0.475	0.093	7.500	0.892
		Left side at 0mm	1.528	0.002	2.200	0.383
		Right side at 0mm	0.866	0.001		0.396
		Top side at 0mm	0.756		3.370	0.526
		Bottom side at 0mm				0.000
n261	Antenna Module A	Front at 0mm	0.884	0.001	5.970	0.818
		Back at 0mm	0.475	0.093	3.740	0.516
		Left side at 0mm	1.528	0.002	1.420	0.383
		Right side at 0mm	0.866	0.001		0.422
		Top side at 0mm	0.756		7.500	0.939
		Bottom side at 0mm				0.000
	Antenna Module B	Front at 0mm	0.884	0.001	0.810	0.302
		Back at 0mm	0.475	0.093	7.500	0.892
		Left side at 0mm	1.528	0.002	2.180	0.383
		Right side at 0mm	0.866	0.001		0.474
		Top side at 0mm	0.756		3.650	0.554
		Bottom side at 0mm				0.000

**<5G NR FR2, WLAN Index 9>**

WWAN Band		Exposure Position	1	5	6	Reported SAR/4 + PD/10 Summation
			5/6GHz WLAN Ant 4+3	NFC	PD	1+5+6 Summed Ratio
			10g SAR (W/kg)	10g SAR (W/kg)	4cm ² (W/m ²)	
n258	Antenna Module A	Front	0.884	0.001	5.030	0.724
		Back	0.475	0.093	3.740	0.516
		Left side	1.528	0.002		0.383
		Right side	0.673	0.001	2.920	0.461
		Top side	0.756		7.500	0.939
		Bottom side				0.000
n258	Antenna Module B	Front	0.884	0.001	0.770	0.298
		Back	0.475	0.093	7.500	0.892
		Left side	1.528	0.002		0.383
		Right side	0.673	0.001	2.230	0.392
		Top side	0.756		3.350	0.524
		Bottom side				0.000
n260	Antenna Module A	Front	0.884	0.001	4.680	0.689
		Back	0.475	0.093	3.490	0.491
		Left side	1.528	0.002		0.383
		Right side	0.673	0.001	2.410	0.410
		Top side	0.756		7.500	0.939
		Bottom side				0.000
n260	Antenna Module B	Front	0.884	0.001	0.600	0.281
		Back	0.475	0.093	7.500	0.892
		Left side	1.528	0.002		0.383
		Right side	0.673	0.001	1.790	0.348
		Top side	0.756		3.370	0.526
		Bottom side				0.000
n261	Antenna Module A	Front	0.884	0.001	5.970	0.818
		Back	0.475	0.093	3.740	0.516
		Left side	1.528	0.002		0.383
		Right side	0.673	0.001	2.050	0.374
		Top side	0.756		7.500	0.939
		Bottom side				0.000
n261	Antenna Module B	Front	0.884	0.001	0.810	0.302
		Back	0.475	0.093	7.500	0.892
		Left side	1.528	0.002		0.383
		Right side	0.673	0.001	2.570	0.426
		Top side	0.756		3.650	0.554
		Bottom side				0.000

Test Engineer : Mood Huang and Bevis Chang

13. Uncertainty Assessment

The budget is valid for evaluation distances $> \lambda/2\pi$. For specific tests and configurations, the Uncertainty could be considerably smaller.

cDASY6 Module mmWave Uncertainty Budget Evaluation Distances to the Antennas $> \lambda/2\pi$					
Error Description	Uncertainty Value ($\pm$ dB)	Probability	Divisor	(Ci)	Standard Uncertainty ($\pm$ dB)
Uncertainty terms dependent on the measurement system					
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response (BW $\leq$ 1 GHz)	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependence	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	0.60	R	1.732	1	0.35
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					0.76 dB
Expanded STD Uncertainty (95%)					1.52 dB
Declaration of Conformity: The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.					
Comments and Explanations: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.					



14. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [3] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [4] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.