



FCC RADIO TEST REPORT

FCC ID : A4RG4QUR
Equipment : Phone
Model Name : G4QUR
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Dec. 25, 2024 and testing was performed from Jan. 15, 2025 to Apr. 17, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode	10
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	14
3 Test Result	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Fundamental Maximum EIRP Measurement	16
3.3 Fundamental Power Spectral Density Measurement	17
3.4 In-Band Emissions (Channel Mask)	19
3.5 Transmit Power Control (TPC)	21
3.6 AC Conducted Emission Measurement.....	23
3.7 Antenna Requirements.....	25
4 List of Measuring Equipment.....	26
5 Measurement Uncertainty	28
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4N0917I	01	Initial issue of report	Apr. 09, 2025
FR4N0917I	02	Revise Appendix A1, A2 and List of Measuring Equipment This report is an updated version, replacing the report issued on Apr. 09, 2025	Apr. 18, 2025
FR4N0917I	03	Revise section 2 and Appendix A This report is an updated version, replacing the report issued on Apr. 18, 2025.	Apr. 21, 2025
FR4N0917I	04	Revise Appendix A1-2 This report is an updated version, replacing the report issued on Apr. 21, 2025.	Apr. 22, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(10)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(9)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(9)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
-	15.407(d)(6)	Contention Based Protocol	Pass	See Note
3.5	15.407(d)(10)	Transmit Power Control (TPC)	Pass	-
-	15.407(b)	Unwanted Emissions	Pass	See Note
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Note: For Unwanted Emissions and Contention Based Protocol test data, please refer to Sporton report number FR4N0917G.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Josie Hsu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN , Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.
Antenna Type WLAN: <Ant. 3>: IFA Antenna <Ant. 4>: ILA Antenna

EUT Information List	
S/N	Performed Test Item
4C251FDCH00002	RF Conducted Measurement
51091FDCH0006V	Conducted Emission
4C261FDCH0000N 4B181FDCH00046	Transmit Power Control (TPC)

Antenna information for Directional Gain		
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	<6G_Ant3 + 6G_Ant4> Correlated: -5.72 Uncorrelated: -7.9
6425 MHz ~ 6525 MHz	Peak Gain (dBi)	<6G_Ant3 + 6G_Ant4> Correlated: -6.17 Uncorrelated: -8.31
6525 MHz ~ 6875 MHz	Peak Gain (dBi)	<6G_Ant3 + 6G_Ant4> Correlated: -5.96 Uncorrelated: -8.97
6875 MHz ~ 7125 MHz	Peak Gain (dBi)	<6G_Ant3 + 6G_Ant4> Correlated: -4.53 Uncorrelated: -7.02

Remark:

- The antenna gain is provided by the MIMO antenna report from manufacturer. For CDD mode, uncorrelated gain is used for EIRP output power calculation and correlated gain is for PSD EIRP calculation. For SDM mode, uncorrelated gain is used for EIRP output power/ PSD calculation.
- The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. DF02-HY (TAF Code: 1190)
Remark	The Transmit Power Control (TPC) test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), For radiated measurement, the test is covered by standard power client mode and low power indoor client mode because the VLP output power is lower than them.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							



BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225				229			
	Freq. (MHz)	7075				7095			
BW 40M	Channel	227							
	Freq. (MHz)	7085							

2.2 Test Mode

This device supports WiFi 802.11be 20MHz bandwidth for 2.4GHz and 160MHz bandwidth for both 5GHz and 6GHz.

This device supports 26/52/106/242/484/996 single tone RU modes for 802.11ax/be modes and the 242/484/996-tone RU modes are covered by 20/40/80MHz channels.

This device supports both CDD and SDM modes.

For bands other than LPI and VLP, SDM mode is covered by CDD mode due to identical power level.

For LPI and VLP bands, the output power and PSD are measured against EIRP and PSD limit for both CDD and SDM mode. All the other test cases are performed under CDD mode using SDM power level as worst case to show compliance.

This device supports MRU 52T+26T/106T+26T (small RU) and punctured modes 484+242-tone, 996+484+242-tone, and 996+484-tone (large RU) for 802.11be mode.

The PSD of partial RU/MRU modes are reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2018 and Oct. 2022 for WiFi 7 device.

The 802.11ax/be modes are investigated among full RU, single RU and MRU modes for emission spot check and the 11ax modes are covered by 11be modes.

The PSD and power of partial RU and MRU are less than full RU configurations so the full RU is chosen as main test configuration.

The power for 802.11ax mode is smaller than 802.11be mode, so all other conducted and radiated test is covered by 802.11be mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Specification	MCS index /Data Rate
802.11a	6 Mbps
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0

Index of MRU and puncture mode mapping

Small MRU

MRU	26T	52T	106T
52T+26T	70	71	72
106T+26T	82		83

Large MRU

484+242-tone MRU			
2	1	4	3
80MHz puncture 20			
8	4	2	1

996+484+242-tone MRU							
2	1	4	3	6	5	8	7
160MHz puncture 20							
128	64	32	16	8	4	2	1


996+484-tone MRU			
2	1	4	3
160MHz puncture 40			
192	48	12	3


Note: The RF waveform is identical for large MRU and puncture modes.

Test Cases	
AC Conducted Emission	Mode 1 : 802.11be EHT20 Channel 49 Tx + USB Cable 2 (Charging from AC Adapter)
Remark: 1. For Radiated Test Cases, the tests were performed with USB Cable 2. 2. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test. 3. Based on ANSI C63.10 clause 5.6.2.2, b) Spurious emissions, measure the mode with the highest output power and the mode with highest output power spectral density for each modulation family. 4. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

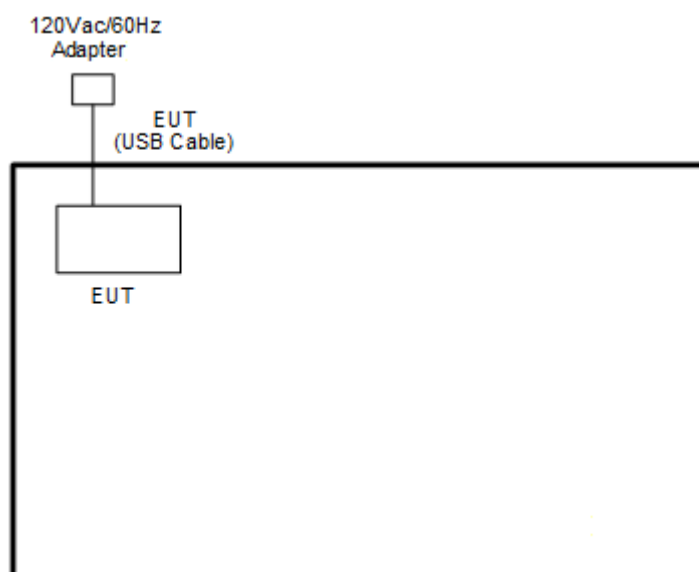
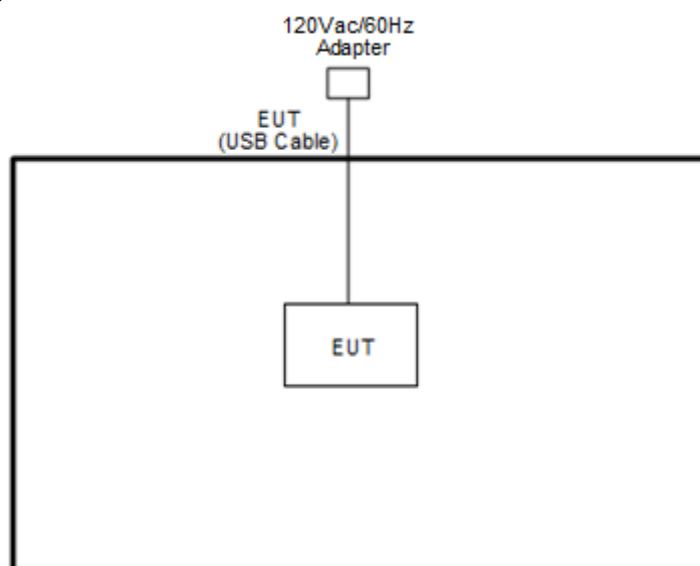
<WLAN Tx Mode>


2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	G9BR1	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “BTWIFI_Final_version_240823” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

For EIRP output power:

The EIRP output power result is derived from RF conducted power plus directional antenna gain.

EIRP = RF conducted power + directional antenna gain.

Following shows an offset computation example with conducted power 20.2 dBm and directional antenna gain 3dBi.

$$\begin{aligned}\text{EIRP(dBm)} &= \text{RF conducted power(dBm)} + \text{directional antenna gain(dBi)} \\ &= 20.2 + 3 = 23.2 \text{ (dBm)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(10) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

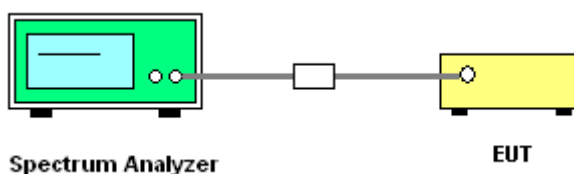

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

Note: The EBW spectrum setting is as following table for different nominal bandwidth.

setting	20MHz	40MHz	80MHz	160MHz
RBW	300kHz	1MHz	1MHz	2MHz
VBW	1MHz	3MHz	3MHz	10MHz

3.2 Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed -5 dBm e.i.r.p in any 1-megahertz band and the maximum e.i.r.p must not exceed 14 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

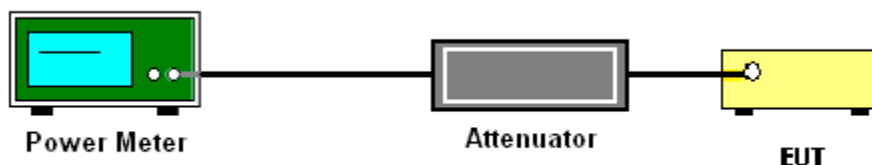

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(9) For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed -5 dBm e.i.r.p in any 1-megahertz band.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

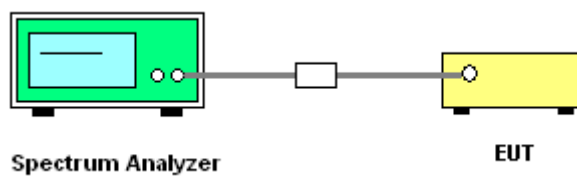

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(a)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v02r01.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

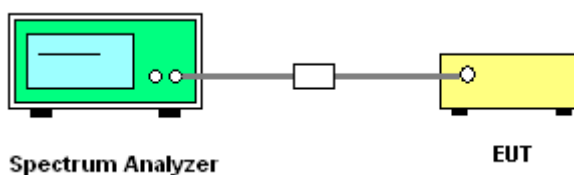

3.4.5 Test Result of In-Band Emissions (Channel Mask)

Please refer to Appendix A.

3.5 Transmit Power Control (TPC)

3.5.1 Limit of Transmit Power Control (TPC)

<FCC 14-30 CFR 15.407>

(d)(10) Very low power devices operating in the 5.925-6.425 and 6.525-6.875 GHz bands shall employ a transmit power control (TPC) mechanism. A very low power device is required to have the capability to operate at least 6 dB below the maximum EIRP power spectral density (PSD) value of -5 dBm/MHz.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedure:

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

Measure the PPSD and record it.

3.5.4 Test Setup


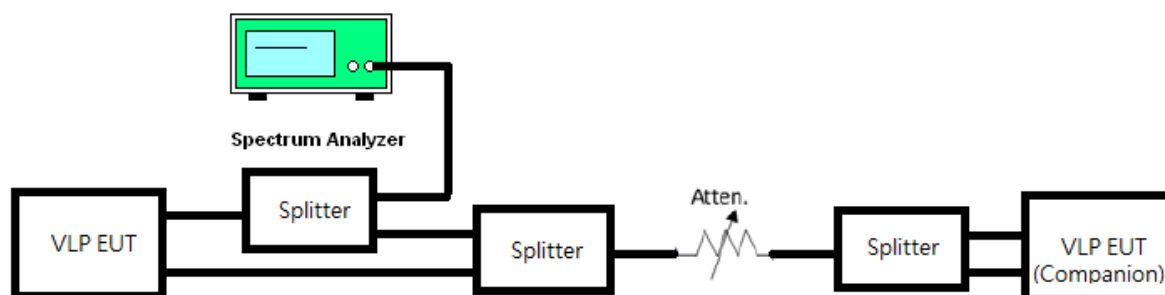


3.5.5 Test Result

The purpose of this test is to verify the relative power drop as the RSSI is increased.

If the conducted PSD delta is greater than 6dB then it ensures the EIRP PSD is at least 6 dB below the maximum EIRP power spectral density (PSD) value of -5 dBm/MHz .

UNII-5 MIMO 2TX	HE20 6135MHz	Conducted PSD Ant 3 (3+4) (dBm/MHz)	Conducted PSD Ant 4 (3+4) (dBm/MHz)	Conducted PSD Ant 3+4 (dBm/MHz)	Antenna Gain Ant 3+4 (dBi)	EIRP PSD Ant 3+4 (dBm/MHz)	
		Low RSSI	-10.94	-9.58			-7.20
		High RSSI	-15.92	-14.62			-12.21
		Verdict [EIRP PSD < -11dBm/MHz]					Pass

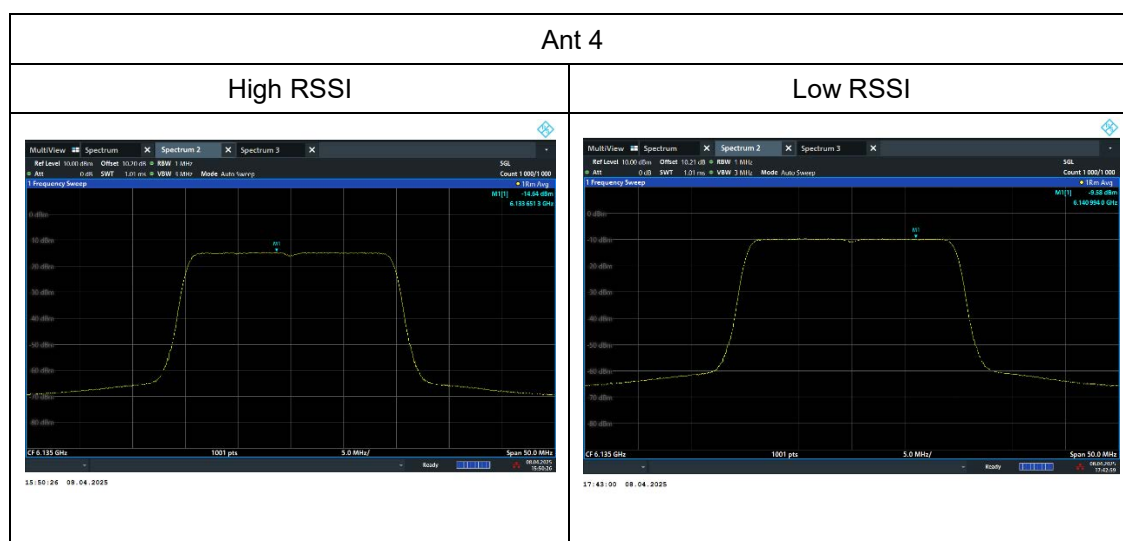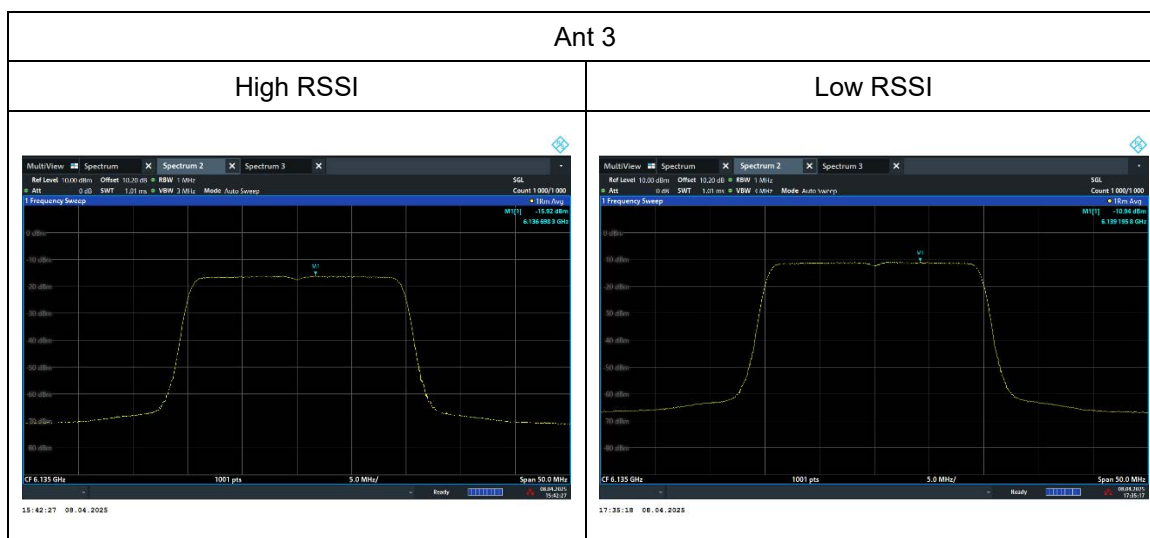

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

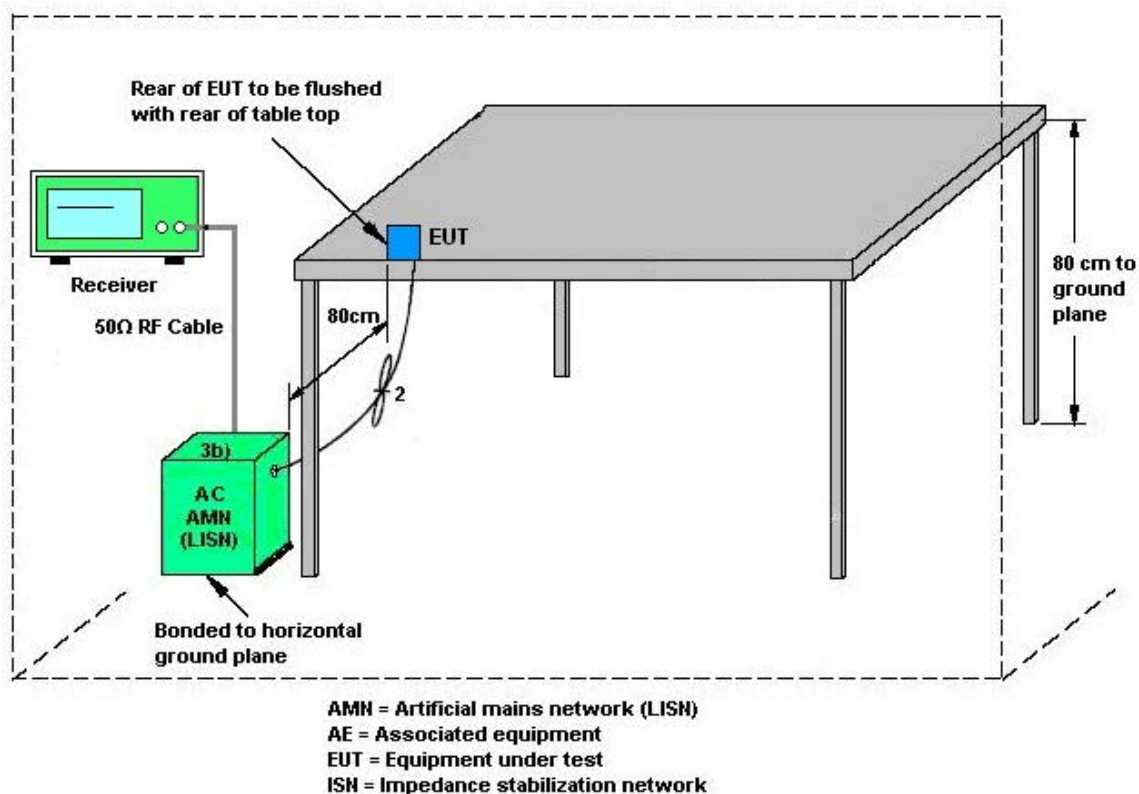

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 19, 2025~ Mar. 21, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 19, 2025~ Mar. 21, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	Mar. 19, 2025~ Mar. 21, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Mar. 19, 2025~ Mar. 21, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Lisn	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 12, 2024	Mar. 19, 2025~ Mar. 21, 2025	Dec. 11, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Mar. 19, 2025~ Mar. 21, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Feb. 10, 2025~ Apr. 17, 2025	Oct. 31, 2025	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W- 23010013 (NO:100)	10MHz~8GHz	Jul. 26, 2024	Feb. 10, 2025~ Apr. 17, 2025	Jul. 25, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10Hz~44GHz	Jan. 14, 2025	Feb. 10, 2025~ Apr. 17, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Feb. 10, 2025~ Apr. 17, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Feb. 10, 2025~ Apr. 17, 2025	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101550	10Hz~13.6GHz	Jan. 13, 2025	Apr. 08, 2025	Jan. 12, 2026	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10003	0.5GHz-6GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10007	0.5GHz-6GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10011	0.5GHz-6GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
Power Divider	MTJ	SMA 2Way Power Divider	MD10016	0.5GHz-6GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
Software 1	Sporton	DFS & Adaptivity Tools	N/A	Ver 1.0	NCR	Apr. 08, 2025	NCR	TPC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-01	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-09	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-01	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-03	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-05	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-10	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	100cm-11	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	150cm-#11	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)
RF Cable	EC	SS405	150cm-#15	30kHz~18GHz	Calibration from System	Apr. 08, 2025	Calibration from System	TPC (DF02-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------



Appendix A. Test Result of Conducted Test Items

Test Engineer:	Howard Tsai and Mina Liu	Temperature:	21~25	°C
Test Date:	2025/02/10~2025/04/17	Relative Humidity:	51~54	%

Test Result

Average Output Power

U-NII-5 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	1	5955	6.63	7.83	10.28	-7.9		2.38		14	Pass
11a	6M	2Tx	49	6195	7.39	7.98	10.71	-7.9		2.81		14	Pass
11a	6M	2Tx	93	6415	7.22	7.7	10.48	-7.9		2.58		14	Pass

**EIRP Power Spectral Density**

U-NII-5 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	1	5955	0.02	0.02	-		-0.24	-5.72		-5.96	-5	Pass
11a	6M	2	49	6195	0.02	0.02	-		0.33	-5.72		-5.39	-5	Pass
11a	6M	2	93	6415	0.02	0.02	-		-0.02	-5.72		-5.74	-5	Pass

**Average Output Power**

U-NII-6 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	97	6435	7.03	7.77	10.43	-8.31		2.12		14	Pass
11a	6M	2Tx	105	6475	7.21	7.71	10.48	-8.31		2.17		14	Pass
11a	6M	2Tx	113	6515	6.6	7.74	10.22	-8.31		1.91		14	Pass

**EIRP Power Spectral Density**

U-NII-6 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	97	6435	0.02	0.02	-		-0.16	-6.17		-6.33	-5	Pass
11a	6M	2	105	6475	0.02	0.02	-		-0.12	-6.17		-6.29	-5	Pass
11a	6M	2	113	6515	0.02	0.02	-		-0.38	-6.17		-6.55	-5	Pass

**Average Output Power**

U-NII-7 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	117	6535	7.19	8.12	10.69	-8.97		1.72		14	Pass
11a	6M	2Tx	149	6695	8.06	8.37	11.23	-8.97		2.26		14	Pass
11a	6M	2Tx	181	6855	8.11	8.45	11.29	-8.97		2.32		14	Pass

U-NII-7 straddle channel MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	185	6875	6.57	7.03	9.82	-7.02		2.8		14	Pass

**EIRP Power Spectral Density**

U-NII-7 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	117	6535	0.02	0.02	-		-0.26	-5.96		-6.22	-5	Pass
11a	6M	2	149	6695	0.02	0.02	-		0.61	-5.96		-5.35	-5	Pass
11a	6M	2	181	6855	0.02	0.02	-		0.82	-5.96		-5.14	-5	Pass

U-NII-7 straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM	(dBm/MHz)	
11a	6M	2	185	6875	0.02	0.02	-		-0.94	-4.53		-5.47	-5	Pass

**Average Output Power**

U-NII-8 MIMO (CDD)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	189	6895	6.61	7.72	10.21	-7.02		3.19		14	Pass
11a	6M	2Tx	209	6995	6.61	7.16	9.9	-7.02		2.88		14	Pass
11a	6M	2Tx	229	7095	7.04	7.3	10.18	-7.02		3.16		14	Pass

**EIRP Power Spectral Density**

U-NII-8 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	189	6895	0.02	0.02	-		-0.49	-4.53		-5.02	-5	Pass
11a	6M	2	209	6995	0.02	0.02	-		-0.69	-4.53		-5.22	-5	Pass
11a	6M	2	229	7095	0.02	0.02	-		-0.48	-4.53		-5.01	-5	Pass

**Average Output Power**

U-NII-5 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	1	5955	Full/RU	7.32	8.50	10.96	-7.9		3.06		14	Pass
HE20	MCS0	2Tx	49	6195	Full/RU	7.52	8.61	11.11	-7.9		3.21		14	Pass
HE20	MCS0	2Tx	93	6415	Full/RU	7.71	8.31	11.03	-7.9		3.13		14	Pass
HE40	MCS0	2Tx	3	5965	Full/RU	10.94	11.94	14.48	-7.9		6.58		14	Pass
HE40	MCS0	2Tx	51	6205	Full/RU	11.12	11.87	14.52	-7.9		6.62		14	Pass
HE40	MCS0	2Tx	91	6405	Full/RU	10.73	10.77	13.76	-7.9		5.86		14	Pass
HE80	MCS0	2Tx	7	5985	Full/RU	13.5	14.25	16.9	-7.9		9		14	Pass
HE80	MCS0	2Tx	55	6225	Full/RU	13.06	14.19	16.67	-7.9		8.77		14	Pass
HE80	MCS0	2Tx	87	6385	Full/RU	12.72	13.70	16.25	-7.9		8.35		14	Pass
HE160	MCS0	2Tx	15	6025	Full/RU	16.34	17.54	19.99	-7.9		12.09		14	Pass
HE160	MCS0	2Tx	47	6185	Full/RU	16.46	17.53	20.04	-7.9		12.14		14	Pass
HE160	MCS0	2Tx	79	6345	Full/RU	16.75	17.31	20.05	-7.9		12.15		14	Pass

**Average Output Power**

U-NII-6 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	97	6435	Full/RU	7.43	8.56	11.04	-8.31		2.73		14	Pass
HE20	MCS0	2Tx	105	6475	Full/RU	7.13	8.23	10.73	-8.31		2.42		14	Pass
HE20	MCS0	2Tx	113	6515	Full/RU	7.39	8.53	11.01	-8.31		2.7		14	Pass
HE40	MCS0	2Tx	99	6445	Full/RU	10.52	11.43	14.01	-8.31		5.7		14	Pass
HE40	MCS0	2Tx	107	6485	Full/RU	10.51	11.67	14.14	-8.31		5.83		14	Pass
HE80	MCS0	2Tx	103	6465	Full/RU	14.27	14.87	17.59	-8.31		9.28		14	Pass

U-NII-6 straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE40	MCS0	2Tx	115	6525	Full/RU	11.07	12.27	14.72	-8.31		6.41		14	Pass
HE80	MCS0	2Tx	119	6545	Full/RU	12.59	13.58	16.12	-8.31		7.81		14	Pass
HE160	MCS0	2Tx	111	6505	Full/RU	14.62	15.59	18.14	-8.31		9.83		14	Pass

**Average Output Power**

U-NII-7 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	117	6535	Full/RU	7.53	8.50	11.05	-8.97		2.08		14	Pass
HE20	MCS0	2Tx	149	6695	Full/RU	8.01	8.77	11.42	-8.97		2.45		14	Pass
HE20	MCS0	2Tx	181	6855	Full/RU	7.98	9.03	11.55	-8.97		2.58		14	Pass
HE40	MCS0	2Tx	123	6565	Full/RU	10.35	11.37	13.9	-8.97		4.93		14	Pass
HE40	MCS0	2Tx	147	6685	Full/RU	11.93	11.42	14.69	-8.97		5.72		14	Pass
HE40	MCS0	2Tx	179	6845	Full/RU	11.04	10.38	13.73	-8.97		4.76		14	Pass
HE80	MCS0	2Tx	135	6625	Full/RU	13.96	13.85	16.92	-8.97		7.95		14	Pass
HE80	MCS0	2Tx	151	6705	Full/RU	14.65	13.6	17.17	-8.97		8.2		14	Pass
HE80	MCS0	2Tx	167	6785	Full/RU	13.6	14.08	16.86	-8.97		7.89		14	Pass
HE160	MCS0	2Tx	143	6665	Full/RU	17.58	16.33	20.01	-8.97		11.04		14	Pass

U-NII-7 straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	185	6875	Full/RU	7.57	7.65	10.62	-7.02		3.6		14	Pass
HE40	MCS0	2Tx	187	6885	Full/RU	10.31	10.77	13.56	-7.02		6.54		14	Pass
HE80	MCS0	2Tx	183	6865	Full/RU	13.05	13.19	16.13	-7.02		9.11		14	Pass
HE160	MCS0	2Tx	175	6825	Full/RU	16.01	16.48	19.26	-7.02		12.24		14	Pass

**Average Output Power**

U-NII-8 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	189	6895	Full/RU	7.17	8.05	10.64	-7.02		3.62		14	Pass
HE20	MCS0	2Tx	209	6995	Full/RU	7.13	7.6	10.38	-7.02		3.36		14	Pass
HE20	MCS0	2Tx	229	7095	Full/RU	7.11	6.75	9.94	-7.02		2.92		14	Pass
HE40	MCS0	2Tx	195	6925	Full/RU	9.9	10.71	13.33	-7.02		6.31		14	Pass
HE40	MCS0	2Tx	211	7005	Full/RU	9.06	10.28	12.72	-7.02		5.7		14	Pass
HE40	MCS0	2Tx	227	7085	Full/RU	9.81	10.42	13.14	-7.02		6.12		14	Pass
HE80	MCS0	2Tx	199	6945	Full/RU	11.58	11.67	14.64	-7.02		7.62		14	Pass
HE80	MCS0	2Tx	215	7025	Full/RU	10.85	11.98	14.46	-7.02		7.44		14	Pass
HE160	MCS0	2Tx	207	6985	Full/RU	15.25	15.31	18.29	-7.02		11.27		14	Pass



Average Output Power

U-NII-5 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	1	5955	Full/RU	7.60	8.78	11.24	-7.9		3.34		14	Pass
EHT20	MCS0	2Tx	1	5955	26RU/0	-1.07	0.45	2.77	-7.9		-5.13		14	Pass
EHT20	MCS0	2Tx	1	5955	52RU/37	1.61	3.45	5.64	-7.9		-2.26		14	Pass
EHT20	MCS0	2Tx	1	5955	106RU/53	4.84	6.34	8.66	-7.9		0.76		14	Pass
EHT20	MCS0	2Tx	1	5955	52T+26T/70	3.04	5.46	7.43	-7.9		-0.47		14	Pass
EHT20	MCS0	2Tx	1	5955	106T+26T/82	5.38	7.6	9.64	-7.9		1.74		14	Pass
EHT20	MCS0	2Tx	49	6195	Full/RU	7.89	8.99	11.49	-7.9		3.59		14	Pass
EHT20	MCS0	2Tx	49	6195	26RU/4	-0.13	1.53	3.79	-7.9		-4.11		14	Pass
EHT20	MCS0	2Tx	49	6195	52RU/38	1.78	3.81	5.92	-7.9		-1.98		14	Pass
EHT20	MCS0	2Tx	49	6195	106RU/53	5	6.84	9.03	-7.9		1.13		14	Pass
EHT20	MCS0	2Tx	49	6195	52T+26T/71	3.51	5.47	7.61	-7.9		-0.29		14	Pass
EHT20	MCS0	2Tx	49	6195	106T+26T/83	5.58	7.36	9.57	-7.9		1.67		14	Pass
EHT20	MCS0	2Tx	93	6415	Full/RU	7.97	8.58	11.30	-7.9		3.4		14	Pass
EHT20	MCS0	2Tx	93	6415	26RU/8	-0.96	-0.2	2.45	-7.9		-5.45		14	Pass
EHT20	MCS0	2Tx	93	6415	52RU/40	2.16	2.36	5.27	-7.9		-2.63		14	Pass
EHT20	MCS0	2Tx	93	6415	106RU/54	5.4	5.6	8.51	-7.9		0.61		14	Pass
EHT20	MCS0	2Tx	93	6415	52T+26T/72	3.92	4.56	7.26	-7.9		-0.64		14	Pass
EHT20	MCS0	2Tx	93	6415	106T+26T/83	5.97	6.63	9.32	-7.9		1.42		14	Pass
EHT40	MCS0	2Tx	3	5965	Full/RU	11.41	11.96	14.70	-7.9		6.8		14	Pass
EHT40	MCS0	2Tx	51	6205	Full/RU	11.62	11.7	14.67	-7.9		6.77		14	Pass
EHT40	MCS0	2Tx	91	6405	Full/RU	10.95	11.57	14.28	-7.9		6.38		14	Pass
EHT80	MCS0	2Tx	7	5985	Full/RU	13.37	14.49	16.98	-7.9		9.08		14	Pass
EHT80	MCS0	2Tx	7	5985	Puncture20 /8	11.37	12.96	15.25	-7.9		7.35		14	Pass
EHT80	MCS0	2Tx	55	6225	Full/RU	13.34	14.43	16.93	-7.9		9.03		14	Pass
EHT80	MCS0	2Tx	55	6225	Puncture20 /2	11.04	12.6	14.9	-7.9		7		14	Pass
EHT80	MCS0	2Tx	55	6225	Puncture20 /4	11.36	12.86	15.18	-7.9		7.28		14	Pass
EHT80	MCS0	2Tx	87	6385	Full/RU	13.17	14.12	16.68	-7.9		8.78		14	Pass
EHT80	MCS0	2Tx	87	6385	Puncture20 /1	12.18	12.46	15.33	-7.9		7.43		14	Pass
U-NII-5 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT160	MCS0	2Tx	15	6025	Full/RU	16.85	17.94	20.44	-7.9		12.54		14	Pass
EHT160	MCS0	2Tx	15	6025	Puncture20 /128	16.34	17.86	20.18	-7.9		12.28		14	Pass
EHT160	MCS0	2Tx	15	6025	Puncture40 /192	15.75	17.24	19.57	-7.9		11.67		14	Pass
EHT160	MCS0	2Tx	47	6185	Full/RU	16.92	17.97	20.49	-7.9		12.59		14	Pass
EHT160	MCS0	2Tx	47	6185	Puncture20 /16	16.17	17.5	19.9	-7.9		12		14	Pass
EHT160	MCS0	2Tx	47	6185	Puncture40 /48	14.72	16.05	18.45	-7.9		10.55		14	Pass
EHT160	MCS0	2Tx	79	6345	Full/RU	17.03	17.49	20.28	-7.9		12.38		14	Pass
EHT160	MCS0	2Tx	79	6345	Puncture20 /1	16.2	16.66	19.45	-7.9		11.55		14	Pass
EHT160	MCS0	2Tx	79	6345	Puncture40 /3	16.01	16.47	19.26	-7.9		11.36		14	Pass

EIRP Power Spectral Density

U-NII-5 MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	1	5955	Full	0.03	0.03	-	-0.04	-5.72	-5.76	-5	Pass		
EHT20	MCS0	2	1	5955	26/0	0.03	0.03	-	-0.16	-5.72	-5.88	-5	Pass		
EHT20	MCS0	2	1	5955	52/37	0.02	0.03	-	-0.05	-5.72	-5.77	-5	Pass		
EHT20	MCS0	2	1	5955	106/53	0.04	0.04	-	-0.14	-5.72	-5.86	-5	Pass		
EHT20	MCS0	2	1	5955	52T+26T/70	0.05	0.05	-	-0.08	-5.72	-5.8	-5	Pass		
EHT20	MCS0	2	1	5955	106T+26T/82	0.08	0.08	-	-0.15	-5.72	-5.87	-5	Pass		
EHT20	MCS0	2	49	6195	Full	0.03	0.03	-	0.29	-5.72	-5.43	-5	Pass		
EHT20	MCS0	2	49	6195	26/4	0.03	0.03	-	-0.15	-5.72	-5.87	-5	Pass		
EHT20	MCS0	2	49	6195	52/38	0.02	0.03	-	0.2	-5.72	-5.52	-5	Pass		
EHT20	MCS0	2	49	6195	106/53	0.04	0.04	-	0.18	-5.72	-5.54	-5	Pass		
EHT20	MCS0	2	49	6195	52T+26T/71	0.05	0.05	-	0.08	-5.72	-5.64	-5	Pass		
EHT20	MCS0	2	49	6195	106T+26T/83	0.08	0.08	-	-0.14	-5.72	-5.86	-5	Pass		
EHT20	MCS0	2	93	6415	Full	0.03	0.03	-	-0.04	-5.72	-5.76	-5	Pass		
EHT20	MCS0	2	93	6415	26/8	0.03	0.03	-	-0.26	-5.72	-5.98	-5	Pass		
EHT20	MCS0	2	93	6415	52/40	0.02	0.03	-	-0.35	-5.72	-6.07	-5	Pass		
EHT20	MCS0	2	93	6415	106/54	0.04	0.04	-	-0.17	-5.72	-5.89	-5	Pass		
EHT20	MCS0	2	93	6415	52T+26T/72	0.05	0.05	-	-0.11	-5.72	-5.83	-5	Pass		
EHT20	MCS0	2	93	6415	106T+26T/83	0.08	0.08	-	-0.34	-5.72	-6.06	-5	Pass		
EHT40	MCS0	2	3	5965	Full	0.05	0.06	-	0.63	-5.72	-5.09	-5	Pass		
EHT40	MCS0	2	51	6205	Full	0.06	0.06	-	0.37	-5.72	-5.35	-5	Pass		
EHT40	MCS0	2	91	6405	Full	0.06	0.06	-	-0.15	-5.72	-5.87	-5	Pass		
EHT80	MCS0	2	7	5985	Full	0.12	0.12	-	-0.05	-5.72	-5.77	-5	Pass		
EHT80	MCS0	2	7	5985	Puncture20 /8	0.09	0.09	-	-1.29	-5.72	-7.01	-5	Pass		
EHT80	MCS0	2	55	6225	Full	0.11	0.11	-	-0.16	-5.72	-5.88	-5	Pass		
EHT80	MCS0	2	55	6225	Puncture20 /2	0.09	0.09	-	-0.87	-5.72	-6.59	-5	Pass		
EHT80	MCS0	2	55	6225	Puncture20 /4	0.09	0.09	-	-0.6	-5.72	-6.32	-5	Pass		



U-NII-5 MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT80	MCS0	2	87	6385	Full	0.11	0.13	-	-	-0.79	-5.72	-	-6.51	-5	Pass
EHT80	MCS0	2	87	6385	Puncture20 /1	0.09	0.09	-	-	-0.89	-5.72	-	-6.61	-5	Pass
EHT160	MCS0	2	15	6025	Full	0.21	0.22	-	-	0.54	-5.72	-	-5.18	-5	Pass
EHT160	MCS0	2	15	6025	Puncture20 /128	0.19	0.19	-	-	0.48	-5.72	-	-5.24	-5	Pass
EHT160	MCS0	2	15	6025	Puncture40 /192	0.18	0.18	-	-	0.15	-5.72	-	-5.57	-5	Pass
EHT160	MCS0	2	47	6185	Full	0.22	0.21	-	-	0.65	-5.72	-	-5.07	-5	Pass
EHT160	MCS0	2	47	6185	Puncture20 /16	0.19	0.19	-	-	0.32	-5.72	-	-5.4	-5	Pass
EHT160	MCS0	2	47	6185	Puncture40 /48	0.18	0.18	-	-	-0.29	-5.72	-	-6.01	-5	Pass
EHT160	MCS0	2	79	6345	Full	0.21	0.21	-	-	0.49	-5.72	-	-5.23	-5	Pass
EHT160	MCS0	2	79	6345	Puncture20 /1	0.19	0.19	-	-	-0.55	-5.72	-	-6.27	-5	Pass
EHT160	MCS0	2	79	6345	Puncture40 /3	0.18	0.18	-	-	0.17	-5.72	-	-5.55	-5	Pass

**Average Output Power**

U-NII-6 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	97	6435	Full/RU	7.60	8.73	11.21	-8.31		2.9		14	Pass
EHT20	MCS0	2Tx	97	6435	26RU/0	-1.09	0.16	2.59	-8.31		-5.72		14	Pass
EHT20	MCS0	2Tx	97	6435	52RU/37	1.92	3.13	5.58	-8.31		-2.73		14	Pass
EHT20	MCS0	2Tx	97	6435	106RU/53	4.87	6.24	8.62	-8.31		0.31		14	Pass
EHT20	MCS0	2Tx	97	6435	52T+26T/70	3.34	4.88	7.19	-8.31		-1.12		14	Pass
EHT20	MCS0	2Tx	97	6435	106T+26T/82	5.89	7.13	9.56	-8.31		1.25		14	Pass
EHT20	MCS0	2Tx	105	6475	Full/RU	7.48	8.57	11.07	-8.31		2.76		14	Pass
EHT20	MCS0	2Tx	105	6475	26RU/4	0.4	0.98	3.71	-8.31		-4.6		14	Pass
EHT20	MCS0	2Tx	105	6475	52RU/38	1.45	2.99	5.3	-8.31		-3.01		14	Pass
EHT20	MCS0	2Tx	105	6475	106RU/53	5.27	6.04	8.68	-8.31		0.37		14	Pass
EHT20	MCS0	2Tx	105	6475	52T+26T/71	3.59	4.55	7.11	-8.31		-1.2		14	Pass
EHT20	MCS0	2Tx	105	6475	106T+26T/83	5.87	6.45	9.18	-8.31		0.87		14	Pass
EHT20	MCS0	2Tx	113	6515	Full/RU	7.44	8.71	11.13	-8.31		2.82		14	Pass
EHT20	MCS0	2Tx	113	6515	26RU/8	-0.65	-0.25	2.56	-8.31		-5.75		14	Pass
EHT20	MCS0	2Tx	113	6515	52RU/40	1.84	2.82	5.37	-8.31		-2.94		14	Pass
EHT20	MCS0	2Tx	113	6515	106RU/54	5.23	5.7	8.48	-8.31		0.17		14	Pass
EHT20	MCS0	2Tx	113	6515	52T+26T/72	3.05	4.52	6.86	-8.31		-1.45		14	Pass
EHT20	MCS0	2Tx	113	6515	106T+26T/83	5.84	6.58	9.24	-8.31		0.93		14	Pass
EHT40	MCS0	2Tx	99	6445	Full/RU	10.69	12.22	14.53	-8.31		6.22		14	Pass
EHT40	MCS0	2Tx	107	6485	Full/RU	10.58	12.06	14.39	-8.31		6.08		14	Pass
EHT80	MCS0	2Tx	103	6465	Full/RU	14.88	14.91	17.91	-8.31		9.6		14	Pass
EHT80	MCS0	2Tx	103	6465	Puncture20 /8	12.85	13.51	16.2	-8.31		7.89		14	Pass

U-NII-6 straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT40	MCS0	2Tx	115	6525	Full/RU	11.57	12.48	15.06	-8.31		6.75		14	Pass
EHT80	MCS0	2Tx	119	6545	Full/RU	12.95	14.12	16.58	-8.31		8.27		14	Pass
EHT80	MCS0	2Tx	119	6545	Puncture20 /8	11.67	12.81	15.29	-8.31		6.98		14	Pass
EHT160	MCS0	2Tx	111	6505	Full/RU	15.21	16.18	18.73	-8.31		10.42		14	Pass
EHT160	MCS0	2Tx	111	6505	Puncture20 /1	15	15.81	18.43	-8.31		10.12		14	Pass
EHT160	MCS0	2Tx	111	6505	Puncture40 /3	14.16	15.13	17.68	-8.31		9.37		14	Pass

**EIRP Power Spectral Density**

U-NII-6 MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	97	6435	Full	0.03	0.03	-	-0.02	-6.17	-6.19	-5	Pass		
EHT20	MCS0	2	97	6435	26/0	0.03	0.03	-	-0.27	-6.17	-6.44	-5	Pass		
EHT20	MCS0	2	97	6435	52/37	0.02	0.03	-	-0.17	-6.17	-6.34	-5	Pass		
EHT20	MCS0	2	97	6435	106/53	0.04	0.04	-	-0.28	-6.17	-6.45	-5	Pass		
EHT20	MCS0	2	97	6435	52T+26T/70	0.05	0.05	-	-0.34	-6.17	-6.51	-5	Pass		
EHT20	MCS0	2	97	6435	106T+26T/82	0.08	0.08	-	-0.35	-6.17	-6.52	-5	Pass		
EHT20	MCS0	2	105	6475	Full	0.02	0.03	-	-0.16	-6.17	-6.33	-5	Pass		
EHT20	MCS0	2	105	6475	26/4	0.03	0.03	-	-0.26	-6.17	-6.43	-5	Pass		
EHT20	MCS0	2	105	6475	52/38	0.02	0.03	-	-0.47	-6.17	-6.64	-5	Pass		
EHT20	MCS0	2	105	6475	106/53	0.04	0.04	-	-0.23	-6.17	-6.4	-5	Pass		
EHT20	MCS0	2	105	6475	52T+26T/71	0.05	0.05	-	-0.44	-6.17	-6.61	-5	Pass		
EHT20	MCS0	2	105	6475	106T+26T/83	0.08	0.08	-	-0.54	-6.17	-6.71	-5	Pass		
EHT20	MCS0	2	113	6515	Full	0.03	0.03	-	-0.19	-6.17	-6.36	-5	Pass		
EHT20	MCS0	2	113	6515	26/8	0.03	0.03	-	-0.23	-6.17	-6.4	-5	Pass		
EHT20	MCS0	2	113	6515	52/40	0.02	0.03	-	-0.31	-6.17	-6.48	-5	Pass		
EHT20	MCS0	2	113	6515	106/54	0.04	0.04	-	-0.25	-6.17	-6.42	-5	Pass		
EHT20	MCS0	2	113	6515	52T+26T/72	0.05	0.05	-	-0.59	-6.17	-6.76	-5	Pass		
EHT20	MCS0	2	113	6515	106T+26T/83	0.08	0.08	-	-0.47	-6.17	-6.64	-5	Pass		
EHT40	MCS0	2	99	6445	Full	0.06	0.06	-	0.13	-6.17	-6.04	-5	Pass		
EHT40	MCS0	2	107	6485	Full	0.06	0.06	-	-0.73	-6.17	-6.9	-5	Pass		
EHT80	MCS0	2	103	6465	Full	0.12	0.11	-	0.94	-6.17	-5.23	-5	Pass		
EHT80	MCS0	2	103	6465	Puncture20 /8	0.09	0.09	-	-0.27	-6.17	-6.44	-5	Pass		



U-NII-6 straddle channel MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT40	MCS0	2	115	6525	Full	0.06	0.06	-	0.7	-5.96		-5.26	-5	Pass	
EHT80	MCS0	2	119	6545	Full	0.12	0.12	-	-1.27	-5.96		-7.23	-5	Pass	
EHT80	MCS0	2	119	6545	Puncture20 /8	0.09	0.09	-	-1.29	-5.96		-7.25	-5	Pass	
EHT160	MCS0	2	111	6505	Full	0.21	0.21	-	-1.13	-5.96		-7.09	-5	Pass	
EHT160	MCS0	2	111	6505	Puncture20 /1	0.19	0.19	-	-1.62	-5.96		-7.58	-5	Pass	
EHT160	MCS0	2	111	6505	Puncture40 /3	0.18	0.18	-	-1.45	-5.96		-7.41	-5	Pass	

**Average Output Power**

U-NII-7 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	117	6535	Full/RU	7.54	9.07	11.38	-8.97		2.41		14	Pass
EHT20	MCS0	2Tx	117	6535	26RU/0	-0.98	0.11	2.61	-8.97		-6.36		14	Pass
EHT20	MCS0	2Tx	117	6535	52RU/37	2.05	3.19	5.67	-8.97		-3.3		14	Pass
EHT20	MCS0	2Tx	117	6535	106RU/53	5.17	5.84	8.53	-8.97		-0.44		14	Pass
EHT20	MCS0	2Tx	117	6535	52T+26T/70	3.15	4.7	7	-8.97		-1.97		14	Pass
EHT20	MCS0	2Tx	117	6535	106T+26T/82	5.74	6.76	9.29	-8.97		0.32		14	Pass
EHT20	MCS0	2Tx	149	6695	Full/RU	7.94	9.12	11.58	-8.97		2.61		14	Pass
EHT20	MCS0	2Tx	149	6695	26RU/4	0.84	1.57	4.23	-8.97		-4.74		14	Pass
EHT20	MCS0	2Tx	149	6695	52RU/38	2.84	3.32	6.1	-8.97		-2.87		14	Pass
EHT20	MCS0	2Tx	149	6695	106RU/53	5.91	6.58	9.27	-8.97		0.3		14	Pass
EHT20	MCS0	2Tx	149	6695	52T+26T/71	4.34	4.78	7.58	-8.97		-1.39		14	Pass
EHT20	MCS0	2Tx	149	6695	106T+26T/83	6.37	7.09	9.76	-8.97		0.79		14	Pass
EHT20	MCS0	2Tx	181	6855	Full/RU	8.44	9.46	11.99	-8.97		3.02		14	Pass
EHT20	MCS0	2Tx	181	6855	26RU/8	-0.06	0.99	3.51	-8.97		-5.46		14	Pass
EHT20	MCS0	2Tx	181	6855	52RU/40	2.51	3.68	6.14	-8.97		-2.83		14	Pass
EHT20	MCS0	2Tx	181	6855	106RU/54	5.89	6.62	9.28	-8.97		0.31		14	Pass
EHT20	MCS0	2Tx	181	6855	52T+26T/72	4.59	5.41	8.03	-8.97		-0.94		14	Pass
EHT20	MCS0	2Tx	181	6855	106T+26T/83	6.53	7.42	10.01	-8.97		1.04		14	Pass
EHT40	MCS0	2Tx	123	6565	Full/RU	10.87	11.72	14.33	-8.97		5.36		14	Pass
EHT40	MCS0	2Tx	147	6685	Full/RU	11.99	11.90	14.96	-8.97		5.99		14	Pass
EHT40	MCS0	2Tx	179	6845	Full/RU	11.52	10.75	14.16	-8.97		5.19		14	Pass
EHT80	MCS0	2Tx	135	6625	Full/RU	14.49	14.59	17.55	-8.97		8.58		14	Pass
EHT80	MCS0	2Tx	135	6625	Puncture20 /8	13.46	13.16	16.32	-8.97		7.35		14	Pass
EHT80	MCS0	2Tx	151	6705	Full/RU	14.54	14.12	17.35	-8.97		8.38		14	Pass
EHT80	MCS0	2Tx	151	6705	Puncture20 /2	7.93	9.98	12.09	-8.97		3.12		14	Pass
EHT80	MCS0	2Tx	151	6705	Puncture20 /4	12.16	12.07	15.13	-8.97		6.16		14	Pass
EHT80	MCS0	2Tx	167	6785	Full/RU	14.58	14.36	17.48	-8.97		8.51		14	Pass
EHT80	MCS0	2Tx	167	6785	Puncture20 /1	11.32	11.67	14.51	-8.97		5.54		14	Pass
U-NII-7 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT160	MCS0	2Tx	143	6665	Full/RU	16.54	17.70	20.17	-8.97		11.2		14	Pass
EHT160	MCS0	2Tx	143	6665	Puncture20 /128	16.47	16.15	19.32	-8.97		10.35		14	Pass
EHT160	MCS0	2Tx	143	6665	Puncture40 /192	15.75	15.28	18.53	-8.97		9.56		14	Pass



U-NII-7 straddle channel MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	185	6875	Full/RU	7.62	8.17	10.91	-7.02		3.89		14	Pass
EHT20	MCS0	2Tx	185	6875	26RU/8	-1.53	-0.26	2.16	-7.02		-4.86		14	Pass
EHT20	MCS0	2Tx	185	6875	52RU/40	1.56	2.32	4.97	-7.02		-2.05		14	Pass
EHT20	MCS0	2Tx	185	6875	106RU/54	4.56	4.92	7.75	-7.02		0.73		14	Pass
EHT20	MCS0	2Tx	185	6875	52T+26T/72	2.93	4.49	6.79	-7.02		-0.23		14	Pass
EHT20	MCS0	2Tx	185	6875	106T+26T/83	5.45	6.13	8.81	-7.02		1.79		14	Pass
EHT40	MCS0	2Tx	187	6885	Full/RU	10.46	11.19	13.85	-7.02		6.83		14	Pass
EHT80	MCS0	2Tx	183	6865	Full/RU	13.25	13.73	16.51	-7.02		9.49		14	Pass
EHT80	MCS0	2Tx	183	6865	Puncture20 /1	13.01	13.08	16.06	-7.02		9.04		14	Pass
EHT160	MCS0	2Tx	175	6825	Full/RU	16.42	16.79	19.62	-7.02		12.6		14	Pass
EHT160	MCS0	2Tx	175	6825	Puncture20 /128	16.03	16.51	19.29	-7.02		12.27		14	Pass
EHT160	MCS0	2Tx	175	6825	Puncture40 /192	15.92	16.22	19.08	-7.02		12.06		14	Pass

**EIRP Power Spectral Density**

U-NII-7 MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	117	6535	Full	0.03	0.03	-	-0.1	-5.96	-6.06	-5	Pass		
EHT20	MCS0	2	117	6535	26/0	0.03	0.03	-	-0.24	-5.96	-6.2	-5	Pass		
EHT20	MCS0	2	117	6535	52/37	0.02	0.03	-	-0.12	-5.96	-6.08	-5	Pass		
EHT20	MCS0	2	117	6535	106/53	0.04	0.04	-	-0.32	-5.96	-6.28	-5	Pass		
EHT20	MCS0	2	117	6535	52T+26T/70	0.05	0.05	-	-0.54	-5.96	-6.5	-5	Pass		
EHT20	MCS0	2	117	6535	106T+26T/82	0.08	0.08	-	-0.52	-5.96	-6.48	-5	Pass		
EHT20	MCS0	2	149	6695	Full	0.03	0.03	-	0.47	-5.96	-5.49	-5	Pass		
EHT20	MCS0	2	149	6695	26/4	0.03	0.03	-	0.31	-5.96	-5.65	-5	Pass		
EHT20	MCS0	2	149	6695	52/38	0.02	0.03	-	0.44	-5.96	-5.52	-5	Pass		
EHT20	MCS0	2	149	6695	106/53	0.04	0.04	-	0.44	-5.96	-5.52	-5	Pass		
EHT20	MCS0	2	149	6695	52T+26T/71	0.05	0.05	-	0.13	-5.96	-5.83	-5	Pass		
EHT20	MCS0	2	149	6695	106T+26T/83	0.08	0.08	-	0.09	-5.96	-5.87	-5	Pass		
EHT20	MCS0	2	181	6855	Full	0.03	0.03	-	0.69	-5.96	-5.27	-5	Pass		
EHT20	MCS0	2	181	6855	26/8	0.03	0.03	-	0.67	-5.96	-5.29	-5	Pass		
EHT20	MCS0	2	181	6855	52/40	0.02	0.03	-	0.41	-5.96	-5.55	-5	Pass		
EHT20	MCS0	2	181	6855	106/54	0.04	0.04	-	0.49	-5.96	-5.47	-5	Pass		
EHT20	MCS0	2	181	6855	52T+26T/72	0.05	0.05	-	0.52	-5.96	-5.44	-5	Pass		
EHT20	MCS0	2	181	6855	106T+26T/83	0.08	0.08	-	0.24	-5.96	-5.72	-5	Pass		
EHT40	MCS0	2	123	6565	Full	0.06	0.06	-	0.01	-5.96	-5.95	-5	Pass		
EHT40	MCS0	2	147	6685	Full	0.06	0.06	-	0.84	-5.96	-5.12	-5	Pass		
EHT40	MCS0	2	179	6845	Full	0.06	0.06	-	-0.3	-5.96	-6.26	-5	Pass		
EHT80	MCS0	2	135	6625	Full	0.12	0.11	-	0.56	-5.96	-5.4	-5	Pass		
EHT80	MCS0	2	135	6625	Puncture20 /8	0.09	0.09	-	-0.27	-5.96	-6.23	-5	Pass		
EHT80	MCS0	2	151	6705	Full	0.12	0.12	-	0.18	-5.96	-5.78	-5	Pass		
EHT80	MCS0	2	151	6705	Puncture20 /2	0.09	0.09	-	-3.27	-5.96	-9.23	-5	Pass		
EHT80	MCS0	2	151	6705	Puncture20 /4	0.09	0.09	-	-0.72	-5.96	-6.68	-5	Pass		



U-NII-7 MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT80	MCS0	2	167	6785	Full	0.12	0.12	-		0.45	-5.96		-5.51	-5	Pass
EHT80	MCS0	2	167	6785	Puncture20 /1	0.09	0.09	-		-1.85	-5.96		-7.81	-5	Pass
EHT160	MCS0	2	143	6665	Full	0.21	0.21	-		0.47	-5.96		-5.49	-5	Pass
EHT160	MCS0	2	143	6665	Puncture20 /128	0.19	0.19	-		0.3	-5.96		-5.66	-5	Pass
EHT160	MCS0	2	143	6665	Puncture40 /192	0.18	0.18	-		-0.95	-5.96		-6.91	-5	Pass

U-NII-7 straddle channel MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	185	6875	Full	0.03	0.03	-	-0.71	-4.53	-5.24	-5	Pass		
EHT20	MCS0	2	185	6875	26/8	0.03	0.03	-	-0.9	-4.53	-5.43	-5	Pass		
EHT20	MCS0	2	185	6875	52/40	0.02	0.03	-	-0.94	-4.53	-5.47	-5	Pass		
EHT20	MCS0	2	185	6875	106/54	0.04	0.04	-	-1.19	-4.53	-5.72	-5	Pass		
EHT20	MCS0	2	185	6875	52T+26T/72	0.05	0.05	-	-1	-4.53	-5.53	-5	Pass		
EHT20	MCS0	2	185	6875	106T+26T/83	0.08	0.08	-	-1.08	-4.53	-5.61	-5	Pass		
EHT40	MCS0	2	187	6885	Full	0.05	0.06	-	-0.69	-4.53	-5.22	-5	Pass		
EHT80	MCS0	2	183	6865	Full	0.12	0.12	-	-0.54	-4.53	-5.07	-5	Pass		
EHT80	MCS0	2	183	6865	Puncture20 /1	0.09	0.09	-	-0.55	-4.53	-5.08	-5	Pass		
EHT160	MCS0	2	175	6825	Full	0.21	0.22	-	-0.54	-4.53	-5.07	-5	Pass		
EHT160	MCS0	2	175	6825	Puncture20 /128	0.19	0.19	-	-0.65	-4.53	-5.18	-5	Pass		
EHT160	MCS0	2	175	6825	Puncture40 /192	0.18	0.18	-	-0.67	-4.53	-5.2	-5	Pass		

**Average Output Power**

U-NII-8 MIMO (CDD)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	189	6895	Full/RU	7.11	8.20	10.70	-7.02		3.68		14	Pass
EHT20	MCS0	2Tx	189	6895	26RU/0	-2.17	-0.23	1.92	-7.02		-5.1		14	Pass
EHT20	MCS0	2Tx	189	6895	52RU/37	1.44	2.91	5.25	-7.02		-1.77		14	Pass
EHT20	MCS0	2Tx	189	6895	106RU/53	4.24	5.56	7.96	-7.02		0.94		14	Pass
EHT20	MCS0	2Tx	189	6895	52T+26T/70	2.96	4.54	6.83	-7.02		-0.19		14	Pass
EHT20	MCS0	2Tx	189	6895	106T+26T/82	5.21	6.23	8.76	-7.02		1.74		14	Pass
EHT20	MCS0	2Tx	209	6995	Full/RU	7.36	7.85	10.62	-7.02		3.6		14	Pass
EHT20	MCS0	2Tx	209	6995	26RU/4	-0.03	0.3	3.15	-7.02		-3.87		14	Pass
EHT20	MCS0	2Tx	209	6995	52RU/38	1.47	2.37	4.95	-7.02		-2.07		14	Pass
EHT20	MCS0	2Tx	209	6995	106RU/53	4.44	5.31	7.91	-7.02		0.89		14	Pass
EHT20	MCS0	2Tx	209	6995	52T+26T/71	3.56	4.11	6.85	-7.02		-0.17		14	Pass
EHT20	MCS0	2Tx	209	6995	106T+26T/83	5.31	6.3	8.84	-7.02		1.82		14	Pass
EHT20	MCS0	2Tx	229	7095	Full/RU	7.68	7.21	10.46	-7.02		3.44		14	Pass
EHT20	MCS0	2Tx	229	7095	26RU/8	-1.34	-1.39	1.65	-7.02		-5.37		14	Pass
EHT20	MCS0	2Tx	229	7095	52RU/40	1.56	1.8	4.69	-7.02		-2.33		14	Pass
EHT20	MCS0	2Tx	229	7095	106RU/54	4.42	4.7	7.57	-7.02		0.55		14	Pass
EHT20	MCS0	2Tx	229	7095	52T+26T/72	3.4	3.28	6.35	-7.02		-0.67		14	Pass
EHT20	MCS0	2Tx	229	7095	106T+26T/83	5.36	5.34	8.36	-7.02		1.34		14	Pass
EHT40	MCS0	2Tx	195	6925	Full/RU	10.03	10.75	13.42	-7.02		6.4		14	Pass
EHT40	MCS0	2Tx	211	7005	Full/RU	9.48	10.53	13.05	-7.02		6.03		14	Pass
EHT40	MCS0	2Tx	227	7085	Full/RU	10.05	10.85	13.48	-7.02		6.46		14	Pass
EHT80	MCS0	2Tx	199	6945	Full/RU	12.01	12.15	15.09	-7.02		8.07		14	Pass
EHT80	MCS0	2Tx	199	6945	Puncture20 /8	8.29	8.35	11.33	-7.02		4.31		14	Pass
EHT80	MCS0	2Tx	215	7025	Full/RU	11.42	12.06	14.76	-7.02		7.74		14	Pass
EHT80	MCS0	2Tx	215	7025	Puncture20 /1	8.47	9.09	11.8	-7.02		4.78		14	Pass
EHT160	MCS0	2Tx	207	6985	Full/RU	15.02	15.62	18.34	-7.02		11.32		14	Pass
EHT160	MCS0	2Tx	207	6985	Puncture20 /1	12.81	13.67	16.27	-7.02		9.25		14	Pass
EHT160	MCS0	2Tx	207	6985	Puncture40 /3	14.36	14.86	17.63	-7.02		10.61		14	Pass

EIRP Power Spectral Density

U-NII-8 MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	189	6895	Full	0.03	0.03	-	-0.63	-4.53	-5.16	-5	Pass		
EHT20	MCS0	2	189	6895	26/0	0.03	0.03	-	-1.12	-4.53	-5.65	-5	Pass		
EHT20	MCS0	2	189	6895	52/37	0.02	0.03	-	-0.69	-4.53	-5.22	-5	Pass		
EHT20	MCS0	2	189	6895	106/53	0.04	0.04	-	-0.88	-4.53	-5.41	-5	Pass		
EHT20	MCS0	2	189	6895	52T+26T/70	0.05	0.05	-	-0.66	-4.53	-5.19	-5	Pass		
EHT20	MCS0	2	189	6895	106T+26T/82	0.08	0.08	-	-1.02	-4.53	-5.55	-5	Pass		
EHT20	MCS0	2	209	6995	Full	0.03	0.03	-	-0.51	-4.53	-5.04	-5	Pass		
EHT20	MCS0	2	209	6995	26/4	0.03	0.03	-	-0.76	-4.53	-5.29	-5	Pass		
EHT20	MCS0	2	209	6995	52/38	0.02	0.03	-	-0.67	-4.53	-5.2	-5	Pass		
EHT20	MCS0	2	209	6995	106/53	0.04	0.04	-	-0.77	-4.53	-5.3	-5	Pass		
EHT20	MCS0	2	209	6995	52T+26T/71	0.05	0.05	-	-0.55	-4.53	-5.08	-5	Pass		
EHT20	MCS0	2	209	6995	106T+26T/83	0.08	0.08	-	-0.8	-4.53	-5.33	-5	Pass		
EHT20	MCS0	2	229	7095	Full	0.03	0.03	-	-0.86	-4.53	-5.39	-5	Pass		
EHT20	MCS0	2	229	7095	26/8	0.03	0.03	-	-1.05	-4.53	-5.58	-5	Pass		
EHT20	MCS0	2	229	7095	52/40	0.02	0.03	-	-0.86	-4.53	-5.39	-5	Pass		
EHT20	MCS0	2	229	7095	106/54	0.04	0.04	-	-1.08	-4.53	-5.61	-5	Pass		
EHT20	MCS0	2	229	7095	52T+26T/72	0.05	0.05	-	-0.97	-4.53	-5.5	-5	Pass		
EHT20	MCS0	2	229	7095	106T+26T/83	0.08	0.08	-	-1.25	-4.53	-5.78	-5	Pass		
EHT40	MCS0	2	195	6925	Full	0.06	0.06	-	-0.69	-4.53	-5.22	-5	Pass		
EHT40	MCS0	2	211	7005	Full	0.06	0.05	-	-2.68	-4.53	-7.21	-5	Pass		
EHT40	MCS0	2	227	7085	Full	0.06	0.06	-	-0.66	-4.53	-5.19	-5	Pass		
EHT80	MCS0	2	199	6945	Full	0.13	0.12	-	-1.96	-4.53	-6.49	-5	Pass		
EHT80	MCS0	2	199	6945	Puncture20 /8	0.09	0.09	-	-4.75	-4.53	-9.28	-5	Pass		
EHT80	MCS0	2	215	7025	Full	0.13	0.12	-	-2.15	-4.53	-6.68	-5	Pass		
EHT80	MCS0	2	215	7025	Puncture20 /1	0.09	0.09	-	-4.04	-4.53	-8.57	-5	Pass		

U-NII-8 MIMO (CDD)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT160	MCS0	2	207	6985	Full	0.22	0.21	-		-1.34	-4.53		-5.87	-5	Pass
EHT160	MCS0	2	207	6985	Puncture20 /1	0.19	0.19	-		-3.63	-4.53		-8.16	-5	Pass
EHT160	MCS0	2	207	6985	Puncture40 /3	0.18	0.18	-		-1.53	-4.53		-6.06	-5	Pass

**Test Result****Average Output Power**

U-NII-5 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	1	5955	10.02	10.76	13.42	-7.9		5.52		14	Pass
11a	6M	2Tx	49	6195	10.55	10.69	13.63	-7.9		5.73		14	Pass
11a	6M	2Tx	93	6415	10.75	10.16	13.48	-7.9		5.58		14	Pass

EIRP Power Spectral Density

U-NII-5 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	1	5955	0.02	0.01	-		2.65	-7.9		-5.25	-5	Pass
11a	6M	2	49	6195	0.02	0.02	-		2.87	-7.9		-5.03	-5	Pass
11a	6M	2	93	6415	0.02	0.02	-		2.66	-7.9		-5.24	-5	Pass

**Average Output Power**

U-NII-6 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	97	6435	10.75	10.72	13.75	-8.31		5.44		14	Pass
11a	6M	2Tx	105	6475	10.87	10.96	13.93	-8.31		5.62		14	Pass
11a	6M	2Tx	113	6515	10.64	10.84	13.75	-8.31		5.44		14	Pass

EIRP Power Spectral Density

U-NII-6 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	97	6435	0.02	0.02	-		3.08	-8.31		-5.23	-5	Pass
11a	6M	2	105	6475	0.02	0.02	-		3.27	-8.31		-5.04	-5	Pass
11a	6M	2	113	6515	0.02	0.02	-		3.0	-8.31		-5.31	-5	Pass

**Average Output Power**

U-NII-7 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	117	6535	11.61	11.67	14.65	-8.97		5.68		14	Pass
11a	6M	2Tx	149	6695	11.95	11.05	14.53	-8.97		5.56		14	Pass
11a	6M	2Tx	181	6855	11.6	11.54	14.58	-8.97		5.61		14	Pass

U-NII-7 straddle channel MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	185	6875	10.02	10.13	13.09	-7.02		6.07		14	Pass

**EIRP Power Spectral Density**

U-NII-7 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	117	6535	0.02	0.02	-		3.9	-8.97		-5.07	-5	Pass
11a	6M	2	149	6695	0.02	0.02	-		3.73	-8.97		-5.24	-5	Pass
11a	6M	2	181	6855	0.02	0.02	-		3.81	-8.97		-5.16	-5	Pass

U-NII-7 straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	185	6875	0.02	0.02	-		0.6	-7.02		-6.42	-5	Pass

Average Output Power

U-NII-8 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	189	6895	8.9	9.31	12.12	-7.02		5.1		14	Pass
11a	6M	2Tx	209	6995	8.41	8.32	11.38	-7.02		4.36		14	Pass
11a	6M	2Tx	229	7095	7.85	7.39	10.64	-7.02		3.62		14	Pass

EIRP Power Spectral Density

U-NII-8 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	SUM		
11a	6M	2	189	6895	0.02	0.01	-	1.52	-7.02		-5.5	-5	Pass
11a	6M	2	209	6995	0.02	0.02	-	0.86	-7.02		-6.16	-5	Pass
11a	6M	2	229	7095	0.02	0.02	-	0.09	-7.02		-6.93	-5	Pass

**Average Output Power**

U-NII-5 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	1	5955	Full/RU	10.37	11.05	13.73	-7.9		5.83		14	Pass
HE20	MCS0	2Tx	49	6195	Full/RU	10.73	10.77	13.76	-7.9		5.86		14	Pass
HE20	MCS0	2Tx	93	6415	Full/RU	11.08	10.49	13.81	-7.9		5.91		14	Pass
HE40	MCS0	2Tx	3	5965	Full/RU	13.09	13.78	16.46	-7.9		8.56		14	Pass
HE40	MCS0	2Tx	51	6205	Full/RU	13.33	13.88	16.62	-7.9		8.72		14	Pass
HE40	MCS0	2Tx	91	6405	Full/RU	13.88	12.91	16.43	-7.9		8.53		14	Pass
HE80	MCS0	2Tx	7	5985	Full/RU	15.50	16.17	18.86	-7.9		10.96		14	Pass
HE80	MCS0	2Tx	55	6225	Full/RU	15.86	16.35	19.12	-7.9		11.22		14	Pass
HE80	MCS0	2Tx	87	6385	Full/RU	16.14	16.25	19.21	-7.9		11.31		14	Pass
HE160	MCS0	2Tx	15	6025	Full/RU	18.00	18.75	21.40	-7.9		13.5		14	Pass
HE160	MCS0	2Tx	47	6185	Full/RU	18.76	18.55	21.67	-7.9		13.77		14	Pass
HE160	MCS0	2Tx	79	6345	Full/RU	17.98	17.06	20.55	-7.9		12.65		14	Pass

**Average Output Power**

U-NII-6 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	97	6435	Full/RU	10.82	11.18	14.01	-8.31		5.7		14	Pass
HE20	MCS0	2Tx	105	6475	Full/RU	10.96	11.2	14.09	-8.31		5.78		14	Pass
HE20	MCS0	2Tx	113	6515	Full/RU	11.07	11.39	14.24	-8.31		5.93		14	Pass
HE40	MCS0	2Tx	99	6445	Full/RU	13.13	13.58	16.37	-8.31		8.06		14	Pass
HE40	MCS0	2Tx	107	6485	Full/RU	13.29	13.87	16.6	-8.31		8.29		14	Pass
HE80	MCS0	2Tx	103	6465	Full/RU	16.4	16.8	19.61	-8.31		11.3		14	Pass

U-NII-6 straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE40	MCS0	2Tx	115	6525	Full/RU	13.77	14.25	19.03	-8.31		8.72		14	Pass
HE80	MCS0	2Tx	119	6545	Full/RU	16.22	16.59	19.42	-8.31		11.11		14	Pass
HE160	MCS0	2Tx	111	6505	Full/RU	18.76	19.10	21.94	-8.31		13.63		14	Pass

**Average Output Power**

U-NII-7 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	117	6535	Full/RU	11.14	12.18	14.7	-8.97		5.73		14	Pass
HE20	MCS0	2Tx	149	6695	Full/RU	12.21	11.3	14.79	-8.97		5.82		14	Pass
HE20	MCS0	2Tx	181	6855	Full/RU	11.8	12.01	14.92	-8.97		5.95		14	Pass
HE40	MCS0	2Tx	123	6565	Full/RU	15.15	14.69	17.94	-8.97		8.97		14	Pass
HE40	MCS0	2Tx	147	6685	Full/RU	14.87	14.02	17.48	-8.97		8.51		14	Pass
HE40	MCS0	2Tx	179	6845	Full/RU	14.61	14.74	17.69	-8.97		8.72		14	Pass
HE80	MCS0	2Tx	135	6625	Full/RU	17.65	17.12	20.40	-8.97		11.43		14	Pass
HE80	MCS0	2Tx	151	6705	Full/RU	18.19	17.28	20.77	-8.97		11.8		14	Pass
HE80	MCS0	2Tx	167	6785	Full/RU	17.22	16.96	20.1	-8.97		11.13		14	Pass
HE160	MCS0	2Tx	143	6665	Full/RU	19.48	18.67	22.10	-8.97		13.13		14	Pass

U-NII-7 straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	185	6875	Full/RU	10.56	10.71	13.65	-7.02		6.63		14	Pass
HE40	MCS0	2Tx	187	6885	Full/RU	13.52	13.15	16.35	-7.02		9.33		14	Pass
HE80	MCS0	2Tx	183	6865	Full/RU	16.51	16.65	19.59	-7.02		12.57		14	Pass
HE160	MCS0	2Tx	175	6825	Full/RU	18.00	18.00	21.01	-7.02		13.99		14	Pass

**Average Output Power**

U-NII-8 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	189	6895	Full/RU	9	9.6	12.32	-7.02		5.3		14	Pass
HE20	MCS0	2Tx	209	6995	Full/RU	8.66	8.59	11.64	-7.02		4.62		14	Pass
HE20	MCS0	2Tx	229	7095	Full/RU	8.26	7.65	10.98	-7.02		3.96		14	Pass
HE40	MCS0	2Tx	195	6925	Full/RU	12.28	12.35	15.33	-7.02		8.31		14	Pass
HE40	MCS0	2Tx	211	7005	Full/RU	12.30	12.72	15.53	-7.02		8.51		14	Pass
HE40	MCS0	2Tx	227	7085	Full/RU	12.17	12.28	15.24	-7.02		8.22		14	Pass
HE80	MCS0	2Tx	199	6945	Full/RU	15.56	15.72	18.65	-7.02		11.63		14	Pass
HE80	MCS0	2Tx	215	7025	Full/RU	15.18	15.55	18.38	-7.02		11.36		14	Pass
HE160	MCS0	2Tx	207	6985	Full/RU	16.64	17.76	20.25	-7.02		13.23		14	Pass



Average Output Power

U-NII-5 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	1	5955	Full/RU	10.52	11.50	14.05	-7.9		6.15		14	Pass
EHT20	MCS0	2Tx	1	5955	26RU/0	1.51	3.04	5.35	-7.9		-2.55		14	Pass
EHT20	MCS0	2Tx	1	5955	52RU/37	4.11	5.4	7.81	-7.9		-0.09		14	Pass
EHT20	MCS0	2Tx	1	5955	106RU/53	7.21	8.96	11.18	-7.9		3.28		14	Pass
EHT20	MCS0	2Tx	1	5955	52T+26T/70	6.19	7.93	10.16	-7.9		2.26		14	Pass
EHT20	MCS0	2Tx	1	5955	106T+26T/82	7.49	9.08	11.37	-7.9		3.47		14	Pass
EHT20	MCS0	2Tx	49	6195	Full/RU	10.92	11.07	14.01	-7.9		6.11		14	Pass
EHT20	MCS0	2Tx	49	6195	26RU/4	2.1	3.99	6.16	-7.9		-1.74		14	Pass
EHT20	MCS0	2Tx	49	6195	52RU/38	4.35	5.81	8.15	-7.9		0.25		14	Pass
EHT20	MCS0	2Tx	49	6195	106RU/53	7.26	9.09	11.28	-7.9		3.38		14	Pass
EHT20	MCS0	2Tx	49	6195	52T+26T/71	5.75	7.66	9.82	-7.9		1.92		14	Pass
EHT20	MCS0	2Tx	49	6195	106T+26T/83	7.98	9.37	11.74	-7.9		3.84		14	Pass
EHT20	MCS0	2Tx	93	6415	Full/RU	11.43	11.02	14.24	-7.9		6.34		14	Pass
EHT20	MCS0	2Tx	93	6415	26RU/8	1.82	2.45	5.16	-7.9		-2.74		14	Pass
EHT20	MCS0	2Tx	93	6415	52RU/40	4.96	5.14	8.06	-7.9		0.16		14	Pass
EHT20	MCS0	2Tx	93	6415	106RU/54	7.6	8.33	10.99	-7.9		3.09		14	Pass
EHT20	MCS0	2Tx	93	6415	52T+26T/72	6.68	6.84	9.77	-7.9		1.87		14	Pass
EHT20	MCS0	2Tx	93	6415	106T+26T/83	8.26	9.78	12.1	-7.9		4.2		14	Pass
EHT40	MCS0	2Tx	3	5965	Full/RU	13.46	14.34	16.93	-7.9		9.03		14	Pass
EHT40	MCS0	2Tx	51	6205	Full/RU	14.07	13.68	16.89	-7.9		8.99		14	Pass
EHT40	MCS0	2Tx	91	6405	Full/RU	14.1	13.25	16.71	-7.9		8.81		14	Pass
EHT80	MCS0	2Tx	7	5985	Full/RU	16.19	16.8	19.52	-7.9		11.62		14	Pass
EHT80	MCS0	2Tx	7	5985	Puncture20 /8	13.75	14.9	17.37	-7.9		9.47		14	Pass
EHT80	MCS0	2Tx	55	6225	Full/RU	16.1	16.81	19.48	-7.9		11.58		14	Pass
EHT80	MCS0	2Tx	55	6225	Puncture20 /2	12.95	14.52	16.82	-7.9		8.92		14	Pass
EHT80	MCS0	2Tx	55	6225	Puncture20 /4	14.52	15.86	18.25	-7.9		10.35		14	Pass
EHT80	MCS0	2Tx	87	6385	Full/RU	16.66	16.48	19.58	-7.9		11.68		14	Pass
EHT80	MCS0	2Tx	87	6385	Puncture20 /1	16.01	15.42	18.74	-7.9		10.84		14	Pass



U-NII-5 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT160	MCS0	2Tx	15	6025	Full/RU	18.03	18.88	21.49	-7.9		13.59		14	Pass
EHT160	MCS0	2Tx	15	6025	Puncture20 /128	17.86	18.79	21.36	-7.9		13.46		14	Pass
EHT160	MCS0	2Tx	15	6025	Puncture40 /192	17.61	18.68	21.19	-7.9		13.29		14	Pass
EHT160	MCS0	2Tx	47	6185	Full/RU	18.48	19.24	21.89	-7.9		13.99		14	Pass
EHT160	MCS0	2Tx	47	6185	Puncture20 /16	18.25	19.01	21.66	-7.9		13.76		14	Pass
EHT160	MCS0	2Tx	47	6185	Puncture40 /48	17.96	18.79	21.41	-7.9		13.51		14	Pass
EHT160	MCS0	2Tx	79	6345	Full/RU	18.28	17.38	20.86	-7.9		12.96		14	Pass
EHT160	MCS0	2Tx	79	6345	Puncture20 /1	15.28	16.14	18.74	-7.9		10.84		14	Pass
EHT160	MCS0	2Tx	79	6345	Puncture40 /3	16.95	16.49	19.74	-7.9		11.84		14	Pass

EIRP Power Spectral Density

U-NII-5 MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	1	5955	Full	0.03	0.03	-		2.9	-7.9		-5.0		Pass
EHT20	MCS0	2	1	5955	26/0	0.03	0.03	-		2.74	-7.9		-5.16		Pass
EHT20	MCS0	2	1	5955	52/37	0.03	0.03	-		2.28	-7.9		-5.62		Pass
EHT20	MCS0	2	1	5955	106/53	0.04	0.04	-		2.48	-7.9		-5.42		Pass
EHT20	MCS0	2	1	5955	52T+26T/70	0.04	0.04	-		2.78	-7.9		-5.12		Pass
EHT20	MCS0	2	1	5955	106T+26T/82	0.08	0.08	-		1.71	-7.9		-6.19		Pass
EHT20	MCS0	2	49	6195	Full	0.03	0.03	-		2.68	-7.9		-5.22		Pass
EHT20	MCS0	2	49	6195	26/4	0.03	0.03	-		2.51	-7.9		-5.39		Pass
EHT20	MCS0	2	49	6195	52/38	0.03	0.03	-		2.56	-7.9		-5.34		Pass
EHT20	MCS0	2	49	6195	106/53	0.04	0.04	-		2.55	-7.9		-5.35		Pass
EHT20	MCS0	2	49	6195	52T+26T/71	0.04	0.04	-		2.45	-7.9		-5.45		Pass
EHT20	MCS0	2	49	6195	106T+26T/83	0.08	0.08	-		2.15	-7.9		-5.75		Pass
EHT20	MCS0	2	93	6415	Full	0.03	0.03	-		2.87	-7.9		-5.03		Pass
EHT20	MCS0	2	93	6415	26/8	0.03	0.03	-		2.7	-7.9		-5.2		Pass
EHT20	MCS0	2	93	6415	52/40	0.03	0.03	-		2.58	-7.9		-5.32		Pass
EHT20	MCS0	2	93	6415	106/54	0.04	0.04	-		2.38	-7.9		-5.52		Pass
EHT20	MCS0	2	93	6415	52T+26T/72	0.04	0.04	-		2.47	-7.9		-5.43		Pass
EHT20	MCS0	2	93	6415	106T+26T/83	0.08	0.08	-		2.47	-7.9		-5.43		Pass
EHT40	MCS0	2	3	5965	Full	0.06	0.06	-		2.88	-7.9		-5.02		Pass
EHT40	MCS0	2	51	6205	Full	0.05	0.06	-		2.61	-7.9		-5.29		Pass
EHT40	MCS0	2	91	6405	Full	0.06	0.06	-		2.75	-7.9		-5.15		Pass
EHT80	MCS0	2	7	5985	Full	0.12	0.11	-		2.64	-7.9		-5.26		Pass
EHT80	MCS0	2	7	5985	Puncture20 /8	0.09	0.09	-		0.78	-7.9		-7.12		Pass
EHT80	MCS0	2	55	6225	Full	0.11	0.12	-		2.59	-7.9		-5.31		Pass
EHT80	MCS0	2	55	6225	Puncture20 /2	0.09	0.09	-		0.95	-7.9		-6.95		Pass
EHT80	MCS0	2	55	6225	Puncture20 /4	0.09	0.09	-		2.36	-7.9		-5.54		Pass



U-NII-5 MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT80	MCS0	2	87	6385	Full	0.13	0.12	-	2.62	-7.9		-5.28	-5	Pass	
EHT80	MCS0	2	87	6385	Puncture20 /1	0.09	0.09	-	2.37	-7.9		-5.53	-5	Pass	
EHT160	MCS0	2	15	6025	Full	0.21	0.21	-	2.6	-7.9		-5.3	-5	Pass	
EHT160	MCS0	2	15	6025	Puncture20 /128	0.19	0.19	-	0.98	-7.9		-6.92	-5	Pass	
EHT160	MCS0	2	15	6025	Puncture40 /192	0.16	0.16	-	1.73	-7.9		-6.17	-5	Pass	
EHT160	MCS0	2	47	6185	Full	0.21	0.21	-	2.78	-7.9		-5.12	-5	Pass	
EHT160	MCS0	2	47	6185	Puncture20 /16	0.19	0.19	-	2.41	-7.9		-5.49	-5	Pass	
EHT160	MCS0	2	47	6185	Puncture40 /48	0.16	0.16	-	2.78	-7.9		-5.12	-5	Pass	
EHT160	MCS0	2	79	6345	Full	0.21	0.22	-	1.19	-7.9		-6.71	-5	Pass	
EHT160	MCS0	2	79	6345	Puncture20 /1	0.19	0.19	-	-1.35	-7.9		-9.25	-5	Pass	
EHT160	MCS0	2	79	6345	Puncture40 /3	0.16	0.16	-	0.49	-7.9		-7.41	-5	Pass	

**Average Output Power**

U-NII-6 MIMO (SDM)													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2Tx	97	6435	Full/RU	11.11	11.46	14.3	-8.31		5.99		Pass
EHT20	MCS0	2Tx	97	6435	26RU/0	2.09	2.97	5.56	-8.31		-2.75		Pass
EHT20	MCS0	2Tx	97	6435	52RU/37	5.04	5.76	8.43	-8.31		0.12		Pass
EHT20	MCS0	2Tx	97	6435	106RU/53	7.4	9.13	11.36	-8.31		3.05		Pass
EHT20	MCS0	2Tx	97	6435	52T+26T/70	6.71	7.34	10.05	-8.31		1.74		Pass
EHT20	MCS0	2Tx	97	6435	106T+26T/82	9.49	10.67	13.13	-8.31		4.82		Pass
EHT20	MCS0	2Tx	105	6475	Full/RU	11.44	11.49	14.48	-8.31		6.17		Pass
EHT20	MCS0	2Tx	105	6475	26RU/4	3.24	4.28	6.8	-8.31		-1.51		Pass
EHT20	MCS0	2Tx	105	6475	52RU/38	5.19	6.36	8.82	-8.31		0.51		Pass
EHT20	MCS0	2Tx	105	6475	106RU/53	7.45	10.2	12.05	-8.31		3.74		Pass
EHT20	MCS0	2Tx	105	6475	52T+26T/71	6.85	7.87	10.4	-8.31		2.09		Pass
EHT20	MCS0	2Tx	105	6475	106T+26T/83	7.12	8.71	11	-8.31		2.69		Pass
EHT20	MCS0	2Tx	113	6515	Full/RU	11.18	11.34	14.27	-8.31		5.96		Pass
EHT20	MCS0	2Tx	113	6515	26RU/8	1.99	2.8	5.42	-8.31		-2.89		Pass
EHT20	MCS0	2Tx	113	6515	52RU/40	4.59	5.56	8.11	-8.31		-0.2		Pass
EHT20	MCS0	2Tx	113	6515	106RU/54	7.41	8.99	11.28	-8.31		2.97		Pass
EHT20	MCS0	2Tx	113	6515	52T+26T/72	6.98	7.53	10.27	-8.31		1.96		Pass
EHT20	MCS0	2Tx	113	6515	106T+26T/83	9.27	10.5	12.94	-8.31		4.63		Pass
EHT40	MCS0	2Tx	99	6445	Full/RU	13.76	14.28	17.04	-8.31		8.73		Pass
EHT40	MCS0	2Tx	107	6485	Full/RU	13.59	14.12	16.87	-8.31		8.56		Pass
EHT80	MCS0	2Tx	103	6465	Full/RU	17.24	16.87	20.07	-8.31		11.76		Pass
EHT80	MCS0	2Tx	103	6465	Puncture20 /8	13.72	14.67	17.23	-8.31		8.92		Pass



U-NII-6 straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT40	MCS0	2Tx	115	6525	Full/RU	13.93	14.36	17.16	-8.31		8.85		14	Pass
EHT80	MCS0	2Tx	119	6545	Full/RU	16.7	17.02	19.87	-8.31		11.56		14	Pass
EHT80	MCS0	2Tx	119	6545	Puncture20 /8	15.75	16.3	19.04	-8.31		10.73		14	Pass
EHT160	MCS0	2Tx	111	6505	Full/RU	19.05	19.23	22.15	-8.31		13.84		14	Pass
EHT160	MCS0	2Tx	111	6505	Puncture20 /1	18.27	19.16	21.75	-8.31		13.44		14	Pass
EHT160	MCS0	2Tx	111	6505	Puncture40 /3	16.99	17.2	20.11	-8.31		11.8		14	Pass

**EIRP Power Spectral Density**

U-NII-6 MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	97	6435	Full	0.03	0.03	-		3.03	-8.31	-5.28		-5	Pass
EHT20	MCS0	2	97	6435	26/0	0.03	0.03	-		2.94	-8.31	-5.37		-5	Pass
EHT20	MCS0	2	97	6435	52/37	0.03	0.03	-		2.8	-8.31	-5.51		-5	Pass
EHT20	MCS0	2	97	6435	106/53	0.04	0.04	-		2.58	-8.31	-5.73		-5	Pass
EHT20	MCS0	2	97	6435	52T+26T/70	0.04	0.04	-		2.61	-8.31	-5.7		-5	Pass
EHT20	MCS0	2	97	6435	106T+26T/82	0.08	0.08	-		3.01	-8.31	-5.3		-5	Pass
EHT20	MCS0	2	105	6475	Full	0.03	0.03	-		3.26	-8.31	-5.05		-5	Pass
EHT20	MCS0	2	105	6475	26/4	0.03	0.03	-		3.07	-8.31	-5.24		-5	Pass
EHT20	MCS0	2	105	6475	52/38	0.03	0.03	-		3.25	-8.31	-5.06		-5	Pass
EHT20	MCS0	2	105	6475	106/53	0.04	0.04	-		3.16	-8.31	-5.15		-5	Pass
EHT20	MCS0	2	105	6475	52T+26T/71	0.04	0.04	-		2.98	-8.31	-5.33		-5	Pass
EHT20	MCS0	2	105	6475	106T+26T/83	0.08	0.08	-		1.35	-8.31	-6.96		-5	Pass
EHT20	MCS0	2	113	6515	Full	0.02	0.03	-		3.04	-8.31	-5.27		-5	Pass
EHT20	MCS0	2	113	6515	26/8	0.03	0.03	-		2.87	-8.31	-5.44		-5	Pass
EHT20	MCS0	2	113	6515	52/40	0.03	0.03	-		2.55	-8.31	-5.76		-5	Pass
EHT20	MCS0	2	113	6515	106/54	0.04	0.04	-		2.56	-8.31	-5.75		-5	Pass
EHT20	MCS0	2	113	6515	52T+26T/72	0.04	0.04	-		2.9	-8.31	-5.41		-5	Pass
EHT20	MCS0	2	113	6515	106T+26T/83	0.08	0.08	-		2.94	-8.31	-5.37		-5	Pass
EHT40	MCS0	2	99	6445	Full	0.05	0.06	-		3.05	-8.31	-5.26		-5	Pass
EHT40	MCS0	2	107	6485	Full	0.06	0.06	-		2.87	-8.31	-5.44		-5	Pass
EHT80	MCS0	2	103	6465	Full	0.12	0.12	-		3.12	-8.31	-5.19		-5	Pass
EHT80	MCS0	2	103	6465	Puncture20 /8	0.09	0.09	-		0.51	-8.31	-7.8		-5	Pass



U-NII-6 straddle channel MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT40	MCS0	2	115	6525	Full	0.06	0.06	-	2.98	-8.31	-5.33	-5	Pass		
EHT80	MCS0	2	119	6545	Full	0.12	0.12	-	2.96	-8.31	-5.35	-5	Pass		
EHT80	MCS0	2	119	6545	Puncture20 /8	0.09	0.09	-	2.36	-8.31	-5.95	-5	Pass		
EHT160	MCS0	2	111	6505	Full	0.21	0.21	-	2.83	-8.31	-5.48	-5	Pass		
EHT160	MCS0	2	111	6505	Puncture20 /1	0.19	0.19	-	1.62	-8.31	-6.69	-5	Pass		
EHT160	MCS0	2	111	6505	Puncture40 /3	0.16	0.16	-	0.74	-8.31	-7.57	-5	Pass		

**Average Output Power**

U-NII-7 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	117	6535	Full/RU	11.12	12.49	14.87	-8.97		5.9		14	Pass
EHT20	MCS0	2Tx	117	6535	26RU/0	2.64	3.23	5.96	-8.97		-3.01		14	Pass
EHT20	MCS0	2Tx	117	6535	52RU/37	5.65	6.17	8.93	-8.97		-0.04		14	Pass
EHT20	MCS0	2Tx	117	6535	106RU/53	7.25	9.02	11.23	-8.97		2.26		14	Pass
EHT20	MCS0	2Tx	117	6535	52T+26T/70	6.76	8.26	10.58	-8.97		1.61		14	Pass
EHT20	MCS0	2Tx	117	6535	106T+26T/82	9.77	10.95	13.41	-8.97		4.44		14	Pass
EHT20	MCS0	2Tx	149	6695	Full/RU	12.49	11.56	15.06	-8.97		6.09		14	Pass
EHT20	MCS0	2Tx	149	6695	26RU/4	3.99	4.46	7.24	-8.97		-1.73		14	Pass
EHT20	MCS0	2Tx	149	6695	52RU/38	5.96	6.68	9.35	-8.97		0.38		14	Pass
EHT20	MCS0	2Tx	149	6695	106RU/53	8.93	9.92	12.46	-8.97		3.49		14	Pass
EHT20	MCS0	2Tx	149	6695	52T+26T/71	7.96	8.5	11.25	-8.97		2.28		14	Pass
EHT20	MCS0	2Tx	149	6695	106T+26T/83	10.8	10.39	13.61	-8.97		4.64		14	Pass
EHT20	MCS0	2Tx	181	6855	Full/RU	12.06	12.09	15.09	-8.97		6.12		14	Pass
EHT20	MCS0	2Tx	181	6855	26RU/8	2.57	3.63	6.14	-8.97		-2.83		14	Pass
EHT20	MCS0	2Tx	181	6855	52RU/40	5.53	6.58	9.1	-8.97		0.13		14	Pass
EHT20	MCS0	2Tx	181	6855	106RU/54	8.45	9.47	12	-8.97		3.03		14	Pass
EHT20	MCS0	2Tx	181	6855	52T+26T/72	7.55	8.42	11.02	-8.97		2.05		14	Pass
EHT20	MCS0	2Tx	181	6855	106T+26T/83	8.64	11.19	13.11	-8.97		4.14		14	Pass
EHT40	MCS0	2Tx	123	6565	Full/RU	14.74	15.27	18.02	-8.97		9.05		14	Pass
EHT40	MCS0	2Tx	147	6685	Full/RU	15.3	14.21	17.8	-8.97		8.83		14	Pass
EHT40	MCS0	2Tx	179	6845	Full/RU	14.98	14.95	17.98	-8.97		9.01		14	Pass
EHT80	MCS0	2Tx	135	6625	Full/RU	18.31	17.05	20.74	-8.97		11.77		14	Pass
EHT80	MCS0	2Tx	135	6625	Puncture20 /8	17.27	16.17	19.77	-8.97		10.8		14	Pass
EHT80	MCS0	2Tx	151	6705	Full/RU	18.46	17.03	20.81	-8.97		11.84		14	Pass
EHT80	MCS0	2Tx	151	6705	Puncture20 /2	16.19	15.85	19.03	-8.97		10.06		14	Pass
EHT80	MCS0	2Tx	151	6705	Puncture20 /4	16.78	16.46	19.63	-8.97		10.66		14	Pass
EHT80	MCS0	2Tx	167	6785	Full/RU	18.09	17.33	20.74	-8.97		11.77		14	Pass
EHT80	MCS0	2Tx	167	6785	Puncture20 /1	16.87	16.45	19.68	-8.97		10.71		14	Pass



U-NII-7 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT160	MCS0	2Tx	143	6665	Full/RU	19.97	19.06	22.55	-8.97		13.58		14	Pass
EHT160	MCS0	2Tx	143	6665	Puncture20 /128	19.86	18.37	22.19	-8.97		13.22		14	Pass
EHT160	MCS0	2Tx	143	6665	Puncture40 /192	19.49	18.23	21.92	-8.97		12.95		14	Pass

U-NII-7 straddle channel MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	185	6875	Full/RU	10.63	10.86	13.76	-7.02		6.74		14	Pass
EHT20	MCS0	2Tx	185	6875	26RU/8	1.63	2.59	5.15	-7.02		-1.87		14	Pass
EHT20	MCS0	2Tx	185	6875	52RU/40	4.01	5.38	7.76	-7.02		0.74		14	Pass
EHT20	MCS0	2Tx	185	6875	106RU/54	7.58	8.39	11.01	-7.02		3.99		14	Pass
EHT20	MCS0	2Tx	185	6875	52T+26T/72	6.29	7.49	9.94	-7.02		2.92		14	Pass
EHT20	MCS0	2Tx	185	6875	106T+26T/83	9.19	9.73	12.48	-7.02		5.46		14	Pass
EHT40	MCS0	2Tx	187	6885	Full/RU	13.52	13.61	16.58	-7.02		9.56		14	Pass
EHT80	MCS0	2Tx	183	6865	Full/RU	16.68	17.21	19.96	-7.02		12.94		14	Pass
EHT80	MCS0	2Tx	183	6865	Puncture20 /1	16.53	17.09	19.83	-7.02		12.81		14	Pass
EHT160	MCS0	2Tx	175	6825	Full/RU	18	18.01	21.02	-7.02		14		14	Pass
EHT160	MCS0	2Tx	175	6825	Puncture20 /128	17.76	17.63	20.71	-7.02		13.69		14	Pass
EHT160	MCS0	2Tx	175	6825	Puncture40 /192	17.85	17.89	20.88	-7.02		13.86		14	Pass

EIRP Power Spectral Density

U-NII-7 MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	117	6535	Full	0.03	0.03	-		3.39	-8.97		-5.58		Pass
EHT20	MCS0	2	117	6535	26/0	0.03	0.03	-		3.21	-8.97		-5.76		Pass
EHT20	MCS0	2	117	6535	52/37	0.03	0.03	-		3.19	-8.97		-5.78		Pass
EHT20	MCS0	2	117	6535	106/53	0.04	0.04	-		2.35	-8.97		-6.62		Pass
EHT20	MCS0	2	117	6535	52T+26T/70	0.04	0.04	-		3.1	-8.97		-5.87		Pass
EHT20	MCS0	2	117	6535	106T+26T/82	0.08	0.08	-		3.2	-8.97		-5.77		Pass
EHT20	MCS0	2	149	6695	Full	0.03	0.03	-		3.95	-8.97		-5.02		Pass
EHT20	MCS0	2	149	6695	26/4	0.03	0.03	-		3.58	-8.97		-5.39		Pass
EHT20	MCS0	2	149	6695	52/38	0.03	0.03	-		3.71	-8.97		-5.26		Pass
EHT20	MCS0	2	149	6695	106/53	0.04	0.04	-		3.67	-8.97		-5.3		Pass
EHT20	MCS0	2	149	6695	52T+26T/71	0.04	0.04	-		3.81	-8.97		-5.16		Pass
EHT20	MCS0	2	149	6695	106T+26T/83	0.08	0.08	-		3.54	-8.97		-5.43		Pass
EHT20	MCS0	2	181	6855	Full	0.02	0.03	-		3.62	-8.97		-5.35		Pass
EHT20	MCS0	2	181	6855	26/8	0.03	0.03	-		3.52	-8.97		-5.45		Pass
EHT20	MCS0	2	181	6855	52/40	0.03	0.03	-		3.42	-8.97		-5.55		Pass
EHT20	MCS0	2	181	6855	106/54	0.04	0.04	-		3.21	-8.97		-5.76		Pass
EHT20	MCS0	2	181	6855	52T+26T/72	0.04	0.04	-		3.57	-8.97		-5.4		Pass
EHT20	MCS0	2	181	6855	106T+26T/83	0.08	0.08	-		3.32	-8.97		-5.65		Pass
EHT40	MCS0	2	123	6565	Full	0.06	0.06	-		3.91	-8.97		-5.06		Pass
EHT40	MCS0	2	147	6685	Full	0.06	0.06	-		3.65	-8.97		-5.32		Pass
EHT40	MCS0	2	179	6845	Full	0.06	0.06	-		3.8	-8.97		-5.17		Pass
EHT80	MCS0	2	135	6625	Full	0.12	0.13	-		3.88	-8.97		-5.09		Pass
EHT80	MCS0	2	135	6625	Puncture20 /8	0.09	0.09	-		2.9	-8.97		-6.07		Pass
EHT80	MCS0	2	151	6705	Full	0.12	0.11	-		3.97	-8.97		-5.0		Pass
EHT80	MCS0	2	151	6705	Puncture20 /2	0.09	0.09	-		3.11	-8.97		-5.86		Pass
EHT80	MCS0	2	151	6705	Puncture20 /4	0.09	0.09	-		3.6	-8.97		-5.37		Pass

U-NII-7 MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT80	MCS0	2	167	6785	Full	0.12	0.11	-		3.48	-8.97		-5.49	-5	Pass
EHT80	MCS0	2	167	6785	Puncture20 /1	0.09	0.09	-		3.05	-8.97		-5.92	-5	Pass
EHT160	MCS0	2	143	6665	Full	0.22	0.21	-		2.66	-8.97		-6.31	-5	Pass
EHT160	MCS0	2	143	6665	Puncture20 /128	0.19	0.19	-		2.34	-8.97		-6.63	-5	Pass
EHT160	MCS0	2	143	6665	Puncture40 /192	0.16	0.16	-		2.57	-8.97		-6.4	-5	Pass

U-NII-7 straddle channel MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	185	6875	Full	0.03	0.03	-	1.83	-7.02	-	-5.19	-5	Pass	
EHT20	MCS0	2	185	6875	26/8	0.03	0.03	-	1.74	-7.02	-	-5.28	-5	Pass	
EHT20	MCS0	2	185	6875	52/40	0.03	0.03	-	1.24	-7.02	-	-5.78	-5	Pass	
EHT20	MCS0	2	185	6875	106/54	0.04	0.04	-	1.54	-7.02	-	-5.48	-5	Pass	
EHT20	MCS0	2	185	6875	52T+26T/72	0.04	0.04	-	1.72	-7.02	-	-5.3	-5	Pass	
EHT20	MCS0	2	185	6875	106T+26T/83	0.08	0.08	-	1.33	-7.02	-	-5.69	-5	Pass	
EHT40	MCS0	2	187	6885	Full	0.06	0.06	-	2	-7.02	-	-5.02	-5	Pass	
EHT80	MCS0	2	183	6865	Full	0.12	0.11	-	1.84	-7.02	-	-5.18	-5	Pass	
EHT80	MCS0	2	183	6865	Puncture20 /1	0.09	0.09	-	1.76	-7.02	-	-5.26	-5	Pass	
EHT160	MCS0	2	175	6825	Full	0.21	0.21	-	0.74	-7.02	-	-6.28	-5	Pass	
EHT160	MCS0	2	175	6825	Puncture20 /128	0.19	0.19	-	0.26	-7.02	-	-6.76	-5	Pass	
EHT160	MCS0	2	175	6825	Puncture40 /192	0.16	0.16	-	0.61	-7.02	-	-6.41	-5	Pass	

**Average Output Power**

U-NII-8 MIMO (SDM)														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power (dBm)			DG (dBi)		E.I.R.P Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	189	6895	Full/RU	9.45	9.74	12.61	-7.02		5.59		14	Pass
EHT20	MCS0	2Tx	189	6895	26RU/0	0.47	2.37	4.53	-7.02		-2.49		14	Pass
EHT20	MCS0	2Tx	189	6895	52RU/37	3.43	4.94	7.26	-7.02		0.24		14	Pass
EHT20	MCS0	2Tx	189	6895	106RU/53	6.35	8.11	10.33	-7.02		3.31		14	Pass
EHT20	MCS0	2Tx	189	6895	52T+26T/70	5.05	6.75	8.99	-7.02		1.97		14	Pass
EHT20	MCS0	2Tx	189	6895	106T+26T/82	7.44	9.02	11.31	-7.02		4.29		14	Pass
EHT20	MCS0	2Tx	209	6995	Full/RU	8.91	8.99	11.96	-7.02		4.94		14	Pass
EHT20	MCS0	2Tx	209	6995	26RU/4	0.98	1.48	4.25	-7.02		-2.77		14	Pass
EHT20	MCS0	2Tx	209	6995	52RU/38	2.81	3.38	6.11	-7.02		-0.91		14	Pass
EHT20	MCS0	2Tx	209	6995	106RU/53	5.87	6.6	9.26	-7.02		2.24		14	Pass
EHT20	MCS0	2Tx	209	6995	52T+26T/71	4.83	5.17	8.01	-7.02		0.99		14	Pass
EHT20	MCS0	2Tx	209	6995	106T+26T/83	7.23	7.79	10.53	-7.02		3.51		14	Pass
EHT20	MCS0	2Tx	229	7095	Full/RU	8.41	8.4	11.42	-7.02		4.4		14	Pass
EHT20	MCS0	2Tx	229	7095	26RU/8	0.13	-0.03	3.06	-7.02		-3.96		14	Pass
EHT20	MCS0	2Tx	229	7095	52RU/40	2.5	3.02	5.78	-7.02		-1.24		14	Pass
EHT20	MCS0	2Tx	229	7095	106RU/54	5.8	5.6	8.71	-7.02		1.69		14	Pass
EHT20	MCS0	2Tx	229	7095	52T+26T/72	4.37	4.21	7.3	-7.02		0.28		14	Pass
EHT20	MCS0	2Tx	229	7095	106T+26T/83	6.81	7.13	9.98	-7.02		2.96		14	Pass
EHT40	MCS0	2Tx	195	6925	Full/RU	12.74	12.59	15.68	-7.02		8.66		14	Pass
EHT40	MCS0	2Tx	211	7005	Full/RU	12.53	12.99	15.78	-7.02		8.76		14	Pass
EHT40	MCS0	2Tx	227	7085	Full/RU	12.55	12.87	15.72	-7.02		8.7		14	Pass
EHT80	MCS0	2Tx	199	6945	Full/RU	15.75	15.99	18.88	-7.02		11.86		14	Pass
EHT80	MCS0	2Tx	199	6945	Puncture20 /8	14.88	14.67	17.79	-7.02		10.77		14	Pass
EHT80	MCS0	2Tx	215	7025	Full/RU	15.43	15.68	18.57	-7.02		11.55		14	Pass
EHT80	MCS0	2Tx	215	7025	Puncture20 /1	12.98	13.96	16.51	-7.02		9.49		14	Pass
EHT160	MCS0	2Tx	207	6985	Full/RU	16.87	17.72	20.33	-7.02		13.31		14	Pass
EHT160	MCS0	2Tx	207	6985	Puncture20 /1	16.22	17.61	19.98	-7.02		12.96		14	Pass
EHT160	MCS0	2Tx	207	6985	Puncture40 /3	15.66	17.6	19.75	-7.02		12.73		14	Pass

EIRP Power Spectral Density

U-NII-8 MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT20	MCS0	2	189	6895	Full	0.03	0.03	-		1.5	-7.02		-5.52	-5	Pass
EHT20	MCS0	2	189	6895	26/0	0.03	0.03	-		1.47	-7.02		-5.55	-5	Pass
EHT20	MCS0	2	189	6895	52/37	0.03	0.03	-		1.41	-7.02		-5.61	-5	Pass
EHT20	MCS0	2	189	6895	106/53	0.04	0.04	-		1.39	-7.02		-5.63	-5	Pass
EHT20	MCS0	2	189	6895	52T+26T/70	0.04	0.04	-		1.4	-7.02		-5.62	-5	Pass
EHT20	MCS0	2	189	6895	106T+26T/82	0.08	0.08	-		1.39	-7.02		-5.63	-5	Pass
EHT20	MCS0	2	209	6995	Full	0.03	0.03	-		0.86	-7.02		-6.16	-5	Pass
EHT20	MCS0	2	209	6995	26/4	0.03	0.03	-		0.43	-7.02		-6.59	-5	Pass
EHT20	MCS0	2	209	6995	52/38	0.03	0.03	-		0.44	-7.02		-6.58	-5	Pass
EHT20	MCS0	2	209	6995	106/53	0.04	0.04	-		0.44	-7.02		-6.58	-5	Pass
EHT20	MCS0	2	209	6995	52T+26T/71	0.04	0.04	-		0.51	-7.02		-6.51	-5	Pass
EHT20	MCS0	2	209	6995	106T+26T/83	0.08	0.08	-		0.81	-7.02		-6.21	-5	Pass
EHT20	MCS0	2	229	7095	Full	0.03	0.03	-		0.28	-7.02		-6.74	-5	Pass
EHT20	MCS0	2	229	7095	26/8	0.03	0.03	-		0.21	-7.02		-6.81	-5	Pass
EHT20	MCS0	2	229	7095	52/40	0.03	0.03	-		0.15	-7.02		-6.87	-5	Pass
EHT20	MCS0	2	229	7095	106/54	0.04	0.04	-		-0.03	-7.02		-7.05	-5	Pass
EHT20	MCS0	2	229	7095	52T+26T/72	0.04	0.04	-		-0.14	-7.02		-7.16	-5	Pass
EHT20	MCS0	2	229	7095	106T+26T/83	0.08	0.08	-		0.19	-7.02		-6.83	-5	Pass
EHT40	MCS0	2	195	6925	Full	0.06	0.06	-		1.61	-7.02		-5.41	-5	Pass
EHT40	MCS0	2	211	7005	Full	0.06	0.06	-		1.73	-7.02		-5.29	-5	Pass
EHT40	MCS0	2	227	7085	Full	0.06	0.05	-		1.6	-7.02		-5.42	-5	Pass
EHT80	MCS0	2	199	6945	Full	0.12	0.13	-		1.97	-7.02		-5.05	-5	Pass
EHT80	MCS0	2	199	6945	Puncture20 /8	0.09	0.09	-		1.18	-7.02		-5.84	-5	Pass
EHT80	MCS0	2	215	7025	Full	0.12	0.11	-		1.66	-7.02		-5.36	-5	Pass
EHT80	MCS0	2	215	7025	Puncture20 /1	0.09	0.09	-		0.27	-7.02		-6.75	-5	Pass

U-NII-8 MIMO (SDM)															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm/MHz)	Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	SUM		
EHT160	MCS0	2	207	6985	Full	0.21	0.22	-		0.69	-7.02		-6.33	-5	Pass
EHT160	MCS0	2	207	6985	Puncture20 /1	0.19	0.19	-		0.22	-7.02		-6.8	-5	Pass
EHT160	MCS0	2	207	6985	Puncture40 /3	0.16	0.16	-		0.38	-7.02		-6.64	-5	Pass

**CDD Mode****26dB and 99% OBW**

U-NII-5 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass /Fail
					Ant3	Ant4	Ant3	Ant4		
11a	6M	2	1	5955	17.53	17.17	20.93	20.82	320	Pass
11a	6M	2	49	6195	17.47	17.18	20.94	20.98	320	Pass
11a	6M	2	93	6415	17.49	17.13	20.98	21.07	320	Pass

U-NII-6 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
					Ant3	Ant4	Ant3	Ant4		
11a	6M	2	97	6435	17.5	17.19	20.95	21.17	320	Pass
11a	6M	2	105	6475	17.51	17.14	21.13	20.86	320	Pass
11a	6M	2	113	6515	17.48	17.18	21.0	21.02	320	Pass

U-NII-7 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
					Ant3	Ant4	Ant3	Ant4		
11a	6M	2	117	6535	17.46	17.43	20.95	21.1	320	Pass
11a	6M	2	149	6695	17.48	17.19	21.0	21.17	320	Pass
11a	6M	2	181	6855	17.46	17.14	20.98	20.75	320	Pass

U-NII-7 straddle channel MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
					Ant3	Ant4	Ant3	Ant4		
11a	6M	2	185	6875	17.49	17.14	20.98	20.73	320	Pass

U-NII-8 MIMO (CDD)										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
					Ant3	Ant4	Ant3	Ant4		
11a	6M	2	189	6895	17.54	17.17	21.1	21.14	320	Pass
11a	6M	2	209	6995	17.58	17.18	21.08	21.12	320	Pass
11a	6M	2	229	7095	17.58	17.23	20.91	20.87	320	Pass

**26dB and 99% OBW**

U-NII-5 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
						Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2	1	5955	Full	19.08	19.07	21.3	21.16	320	Pass
EHT20	MCS0	2	49	6195	Full	19.08	19.07	21.23	21.1	320	Pass
EHT20	MCS0	2	93	6415	Full	19.08	19.06	21.23	21.02	320	Pass
EHT40	MCS0	2	3	5965	Full	37.82	37.79	41.01	41.02	320	Pass
EHT40	MCS0	2	51	6205	Full	37.81	37.84	40.88	41.18	320	Pass
EHT40	MCS0	2	91	6405	Full	37.85	37.81	41.28	40.96	320	Pass
EHT80	MCS0	2	7	5985	Full	77.09	77.02	82.05	81.95	320	Pass
EHT80	MCS0	2	55	6225	Full	77.17	78.67	82.85	94.02	320	Pass
EHT80	MCS0	2	87	6385	Full	77.1	77.03	83.36	81.89	320	Pass
EHT160	MCS0	2	15	6025	Full	157.97	157.95	315.07	317.09	320	Pass
EHT160	MCS0	2	47	6185	Full	158.5	198.43	317.28	315.6	320	Pass
EHT160	MCS0	2	79	6345	Full	158.02	184.91	317.28	300.67	320	Pass

**26dB and 99% OBW**

U-NII-6 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
						Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2	97	6435	Full	19.08	19.08	21.16	21.09	320	Pass
EHT20	MCS0	2	105	6475	Full	19.08	19.07	21.36	20.98	320	Pass
EHT20	MCS0	2	113	6515	Full	19.08	19.15	21.33	20.94	320	Pass
EHT40	MCS0	2	99	6445	Full	37.83	37.81	40.93	41.04	320	Pass
EHT40	MCS0	2	107	6485	Full	37.83	37.78	41.09	40.96	320	Pass
EHT80	MCS0	2	103	6465	Full	77.11	77.06	85.6	81.31	320	Pass

U-NII-6 straddle channel MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
						Ant3	Ant4	Ant3	Ant4		
EHT40	MCS0	2	115	6525	Full	37.83	37.83	41.3	41.15	320	Pass
EHT80	MCS0	2	119	6545	Full	77.11	81.25	82.69	81.73	320	Pass
EHT160	MCS0	2	111	6505	Full	158.96	158.5	317.28	316.03	320	Pass

**26dB and 99% OBW**

U-NII-7 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
						Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2	117	6535	Full	19.07	19.19	21.27	21.0	320	Pass
EHT20	MCS0	2	149	6695	Full	19.09	19.07	21.41	20.74	320	Pass
EHT20	MCS0	2	181	6855	Full	19.07	19.25	21.1	21.04	320	Pass
EHT40	MCS0	2	123	6565	Full	37.86	37.85	41.23	41.18	320	Pass
EHT40	MCS0	2	147	6685	Full	37.82	37.86	41.33	41.17	320	Pass
EHT40	MCS0	2	179	6845	Full	37.86	37.88	41.41	41.14	320	Pass
EHT80	MCS0	2	135	6625	Full	77.19	82.84	95.74	83.17	320	Pass
EHT80	MCS0	2	151	6705	Full	77.18	86.27	110.91	81.41	320	Pass
EHT80	MCS0	2	167	6785	Full	77.19	77.12	98.98	81.54	320	Pass
EHT160	MCS0	2	143	6665	Full	160.02	157.85	317.95	315.84	320	Pass

U-NII-7 straddle channel MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
						Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2	185	6875	Full	19.07	19.28	21.26	21.0	320	Pass
EHT40	MCS0	2	187	6885	Full	37.89	37.88	41.04	41.2	320	Pass
EHT80	MCS0	2	183	6865	Full	77.23	77.17	94.5	90.37	320	Pass
EHT160	MCS0	2	175	6825	Full	159.15	200.73	318.38	317.38	320	Pass

**26dB and 99% OBW**

U-NII-8 MIMO (CDD)											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		Emission Bandwidth Limit (MHz)	Pass Fail
						Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2	189	6895	Full	19.11	19.08	21.28	21.02	320	Pass
EHT20	MCS0	2	209	6995	Full	19.09	19.07	21.37	21.03	320	Pass
EHT20	MCS0	2	229	7095	Full	19.09	19.09	21.15	20.99	320	Pass
EHT40	MCS0	2	195	6925	Full	37.83	37.81	41.52	41.01	320	Pass
EHT40	MCS0	2	211	7005	Full	37.8	37.81	40.91	41.17	320	Pass
EHT40	MCS0	2	227	7085	Full	37.87	37.85	41.23	41.02	320	Pass
EHT80	MCS0	2	199	6945	Full	77.09	77.05	82.34	81.86	320	Pass
EHT80	MCS0	2	215	7025	Full	77.14	77.14	82.69	81.41	320	Pass
EHT160	MCS0	2	207	6985	Full	157.64	157.59	299.9	316.08	320	Pass




CDD Mode

Test Result of Power Spectral Density

<802.11a>


Maximum Power Density Plot (dBm/MHz)

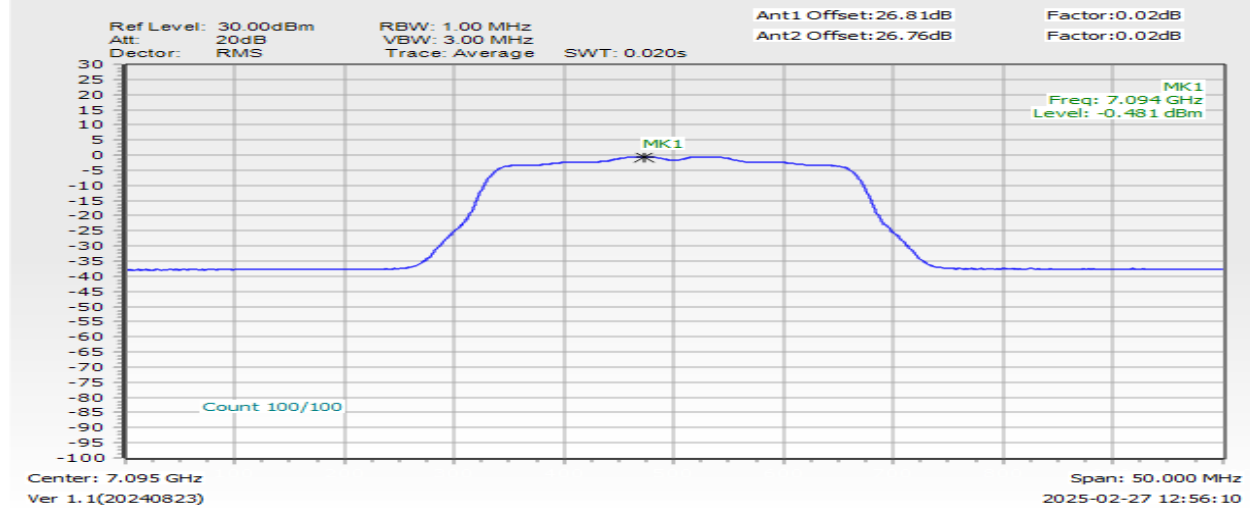


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

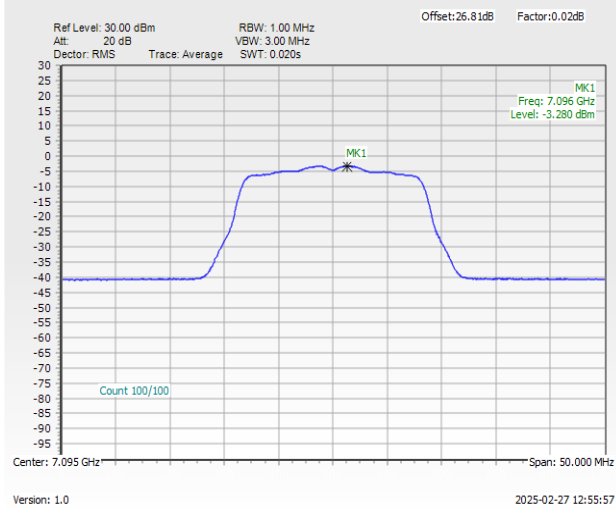


Power Density Plot Trace 2 (Ant 4)

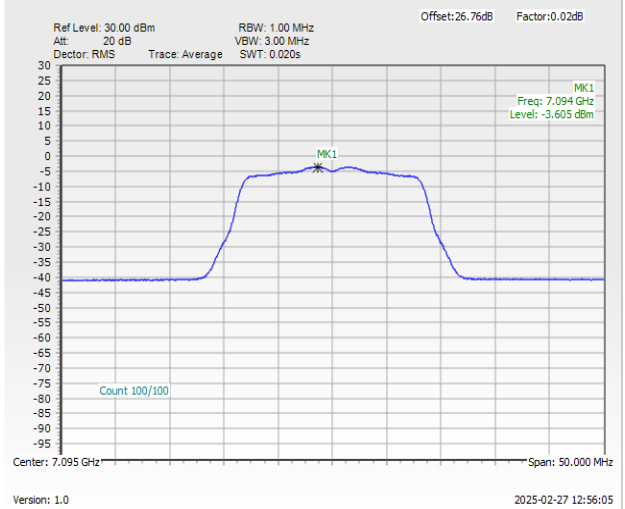



<802.11be EHT20>


Maximum Power Density Plot (dBm/MHz)

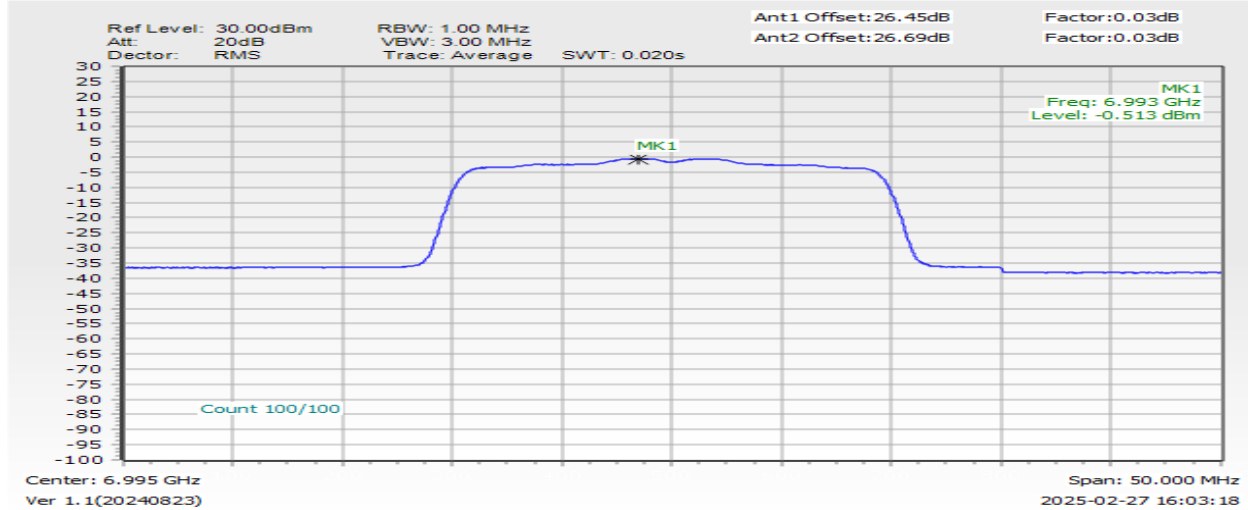


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

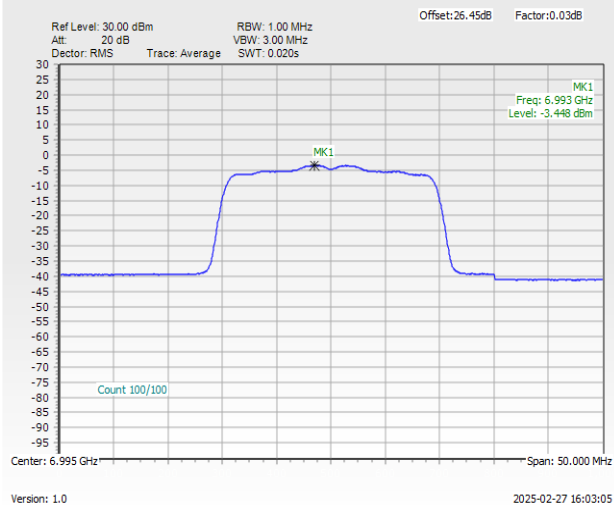


Power Density Plot Trace 2 (Ant 4)

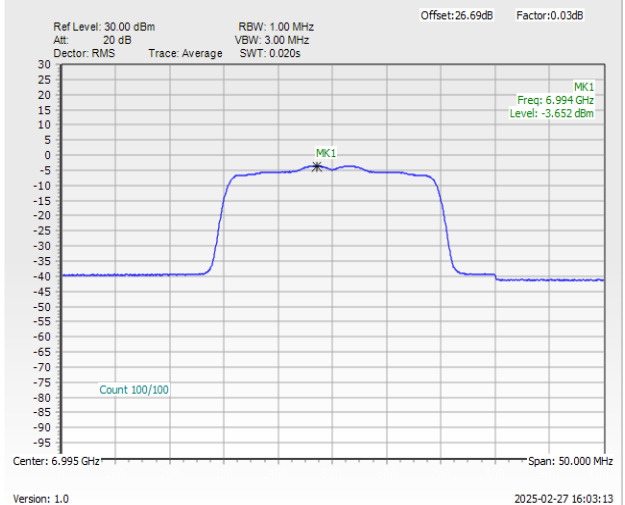



<802.11be EHT40>


Maximum Power Density Plot (dBm/MHz)

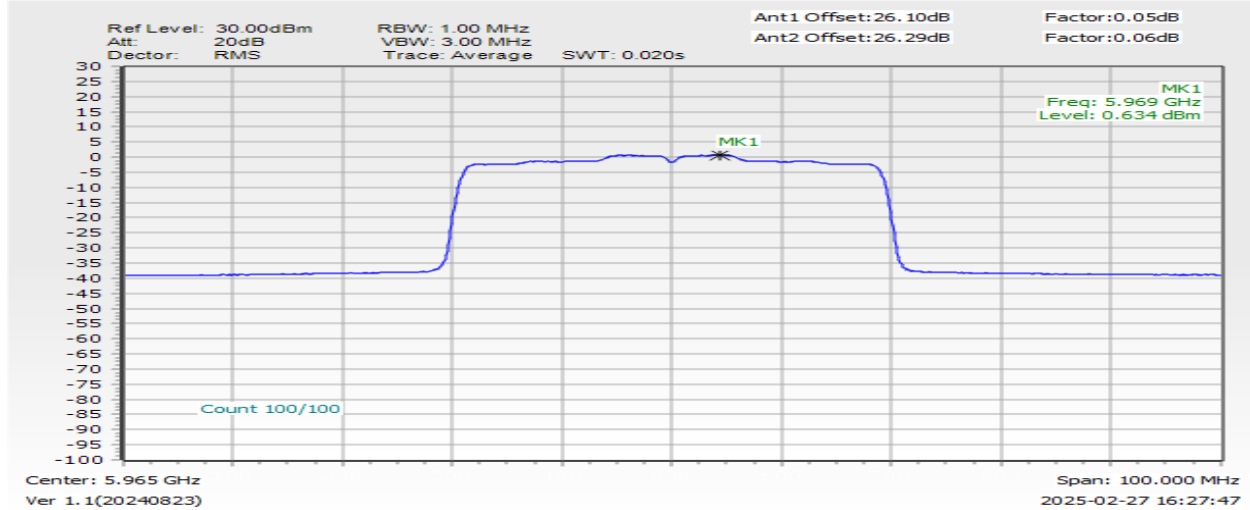


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

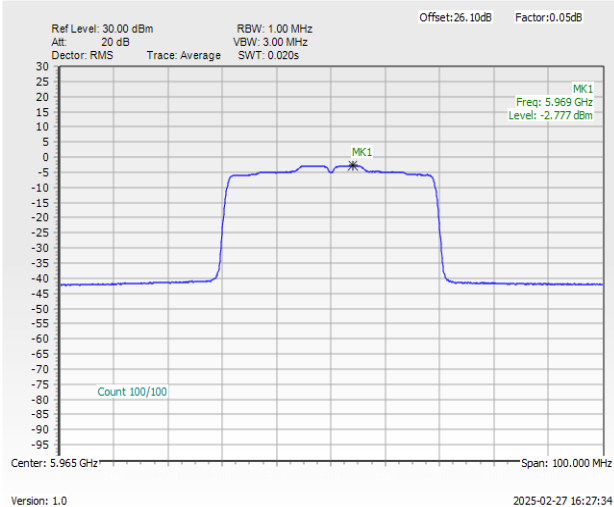


Power Density Plot Trace 2 (Ant 4)

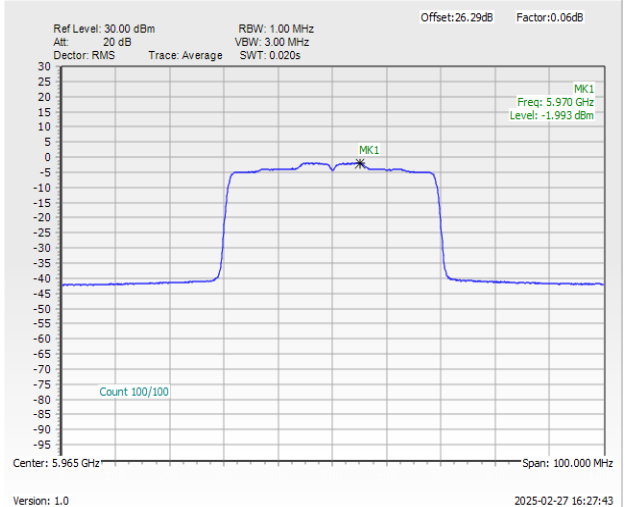



<802.11be EHT80>


Maximum Power Density Plot (dBm/MHz)

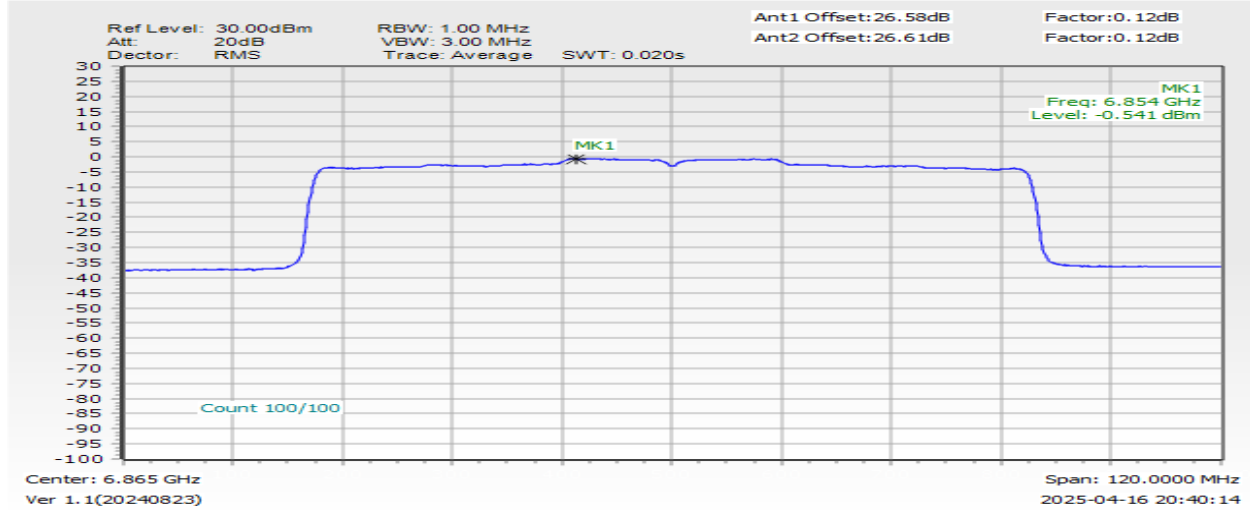


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

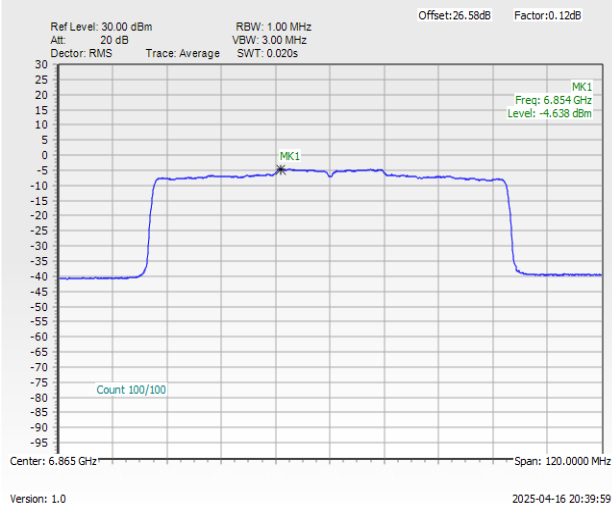


Power Density Plot Trace 2 (Ant 4)

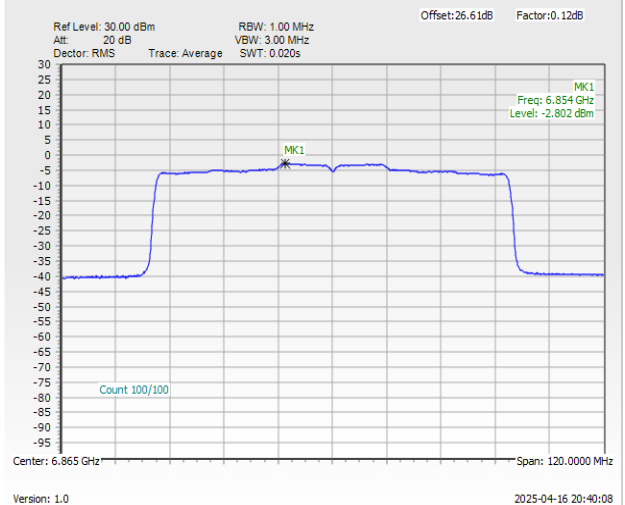



<802.11be EHT160>


Maximum Power Density Plot (dBm/MHz)

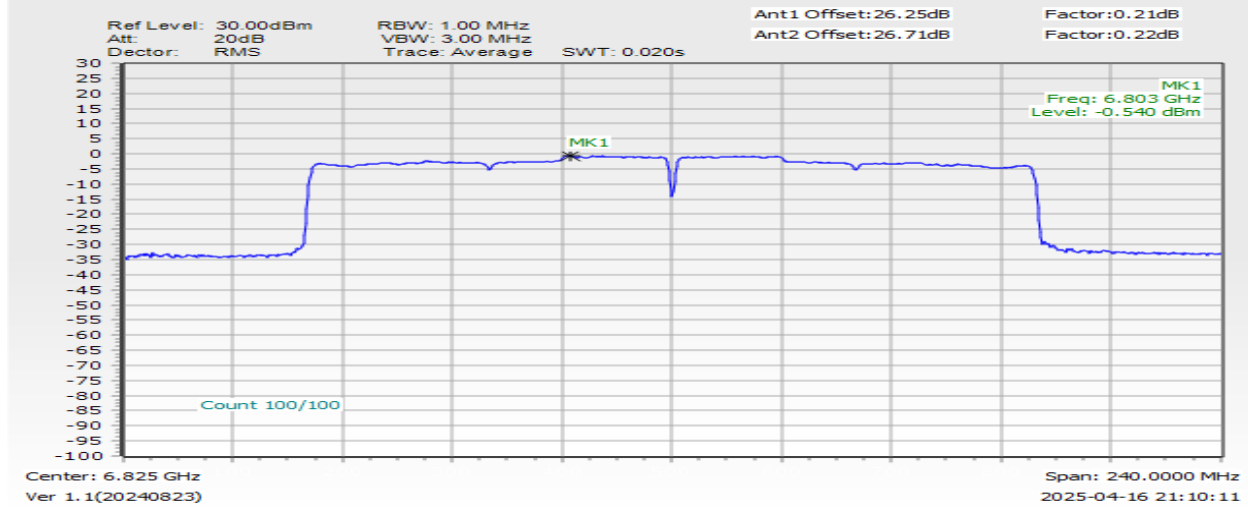


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

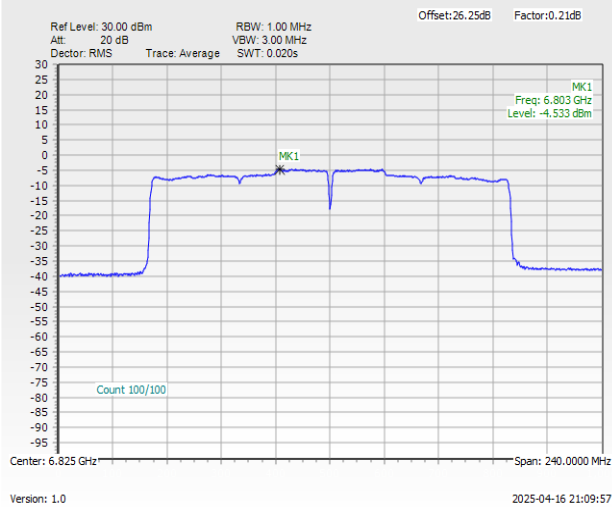

Power Density Plot Trace 2 (Ant 4)

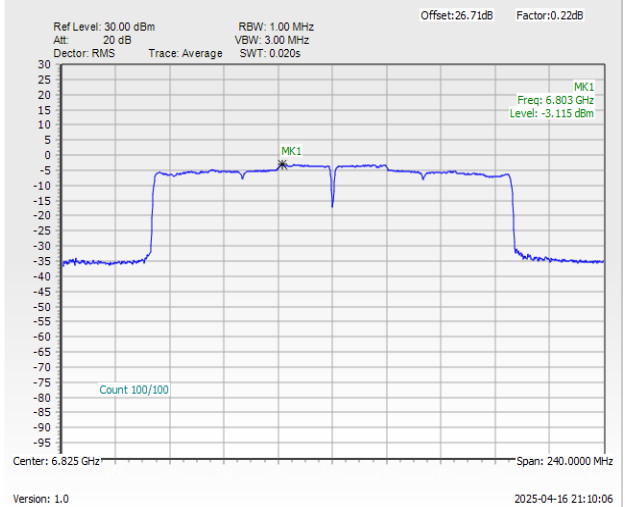




SDM Mode

Test Result of Power Spectral Density

<802.11a>


Maximum Power Density Plot (dBm/MHz)

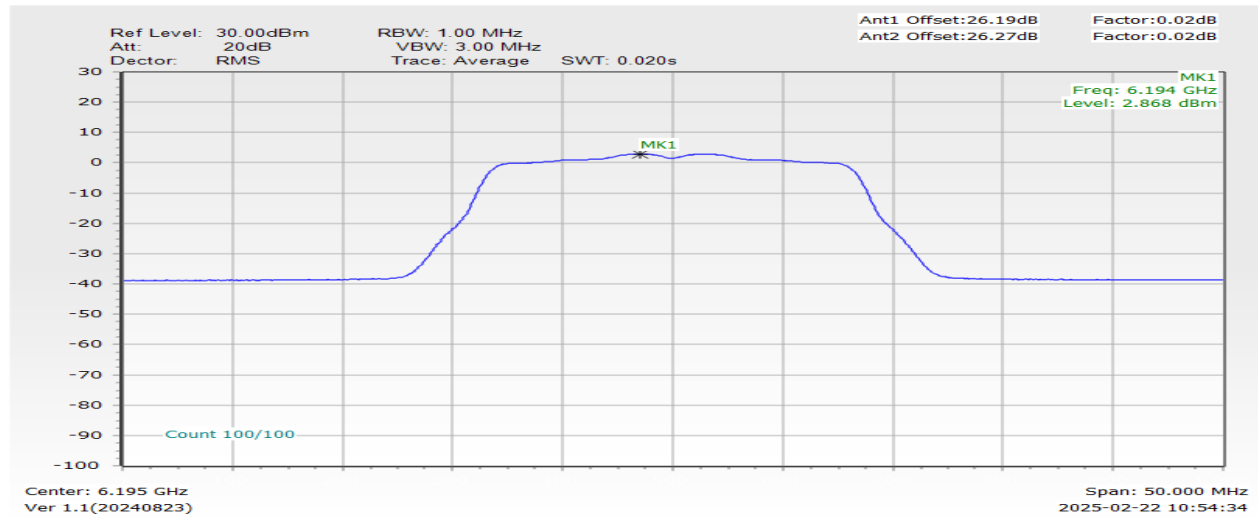


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

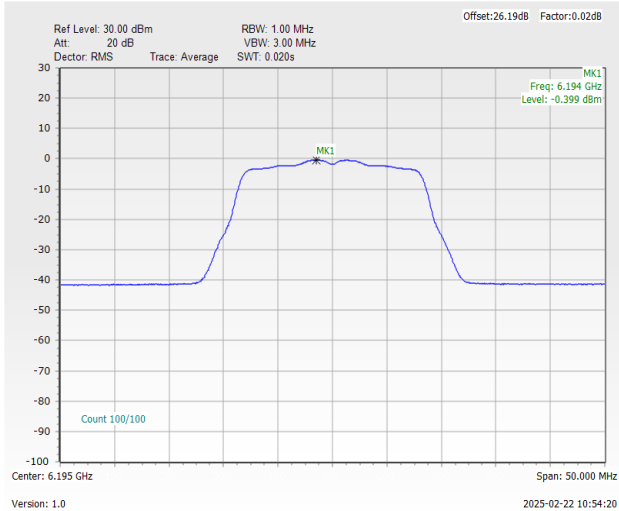


Power Density Plot Trace 2 (Ant 4)

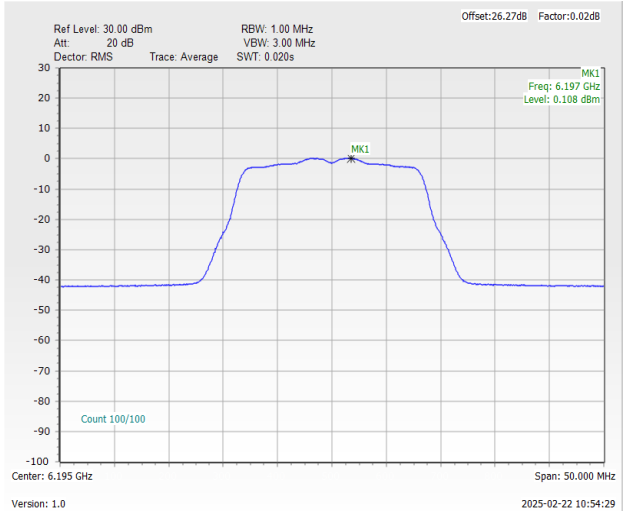



<802.11be EHT20>


Maximum Power Density Plot (dBm/MHz)

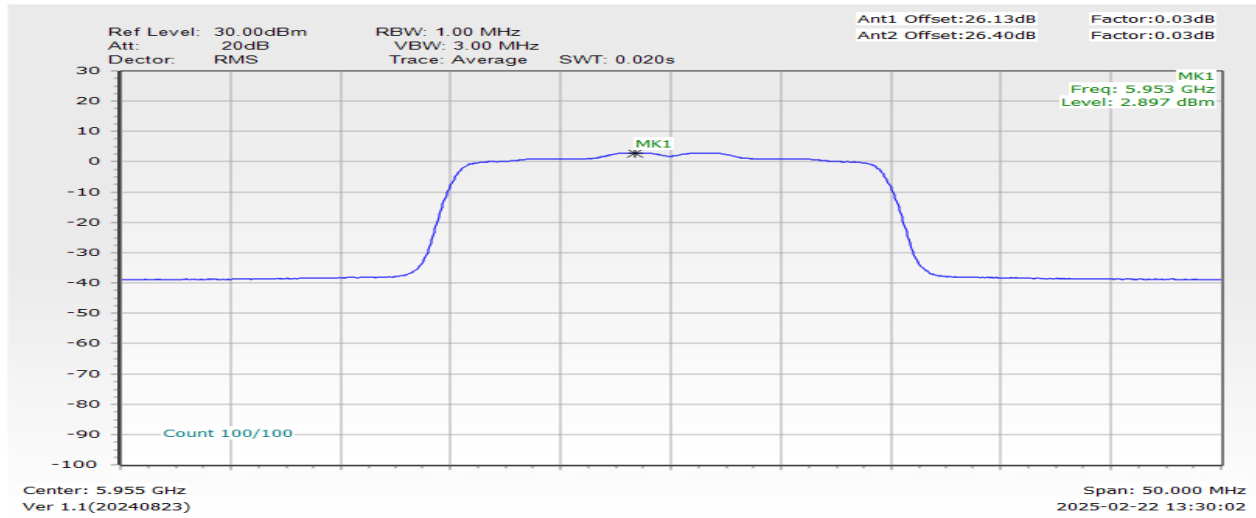


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

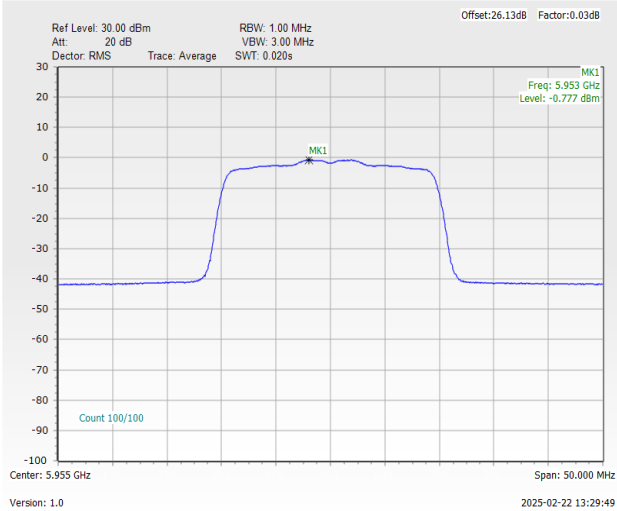


Power Density Plot Trace 2 (Ant 4)

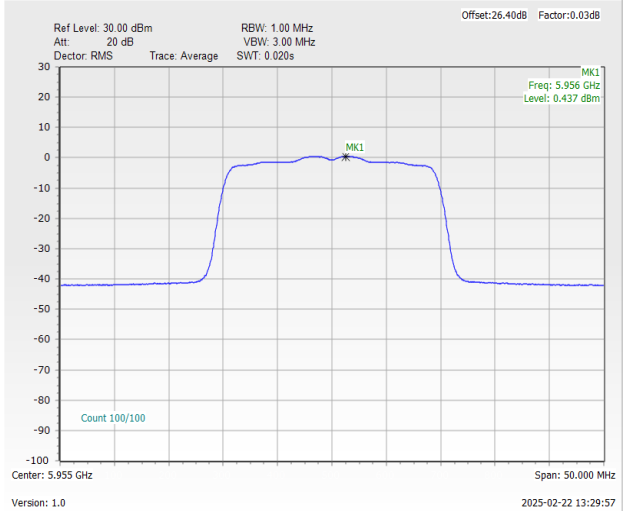



<802.11be EHT40>


Maximum Power Density Plot (dBm/MHz)

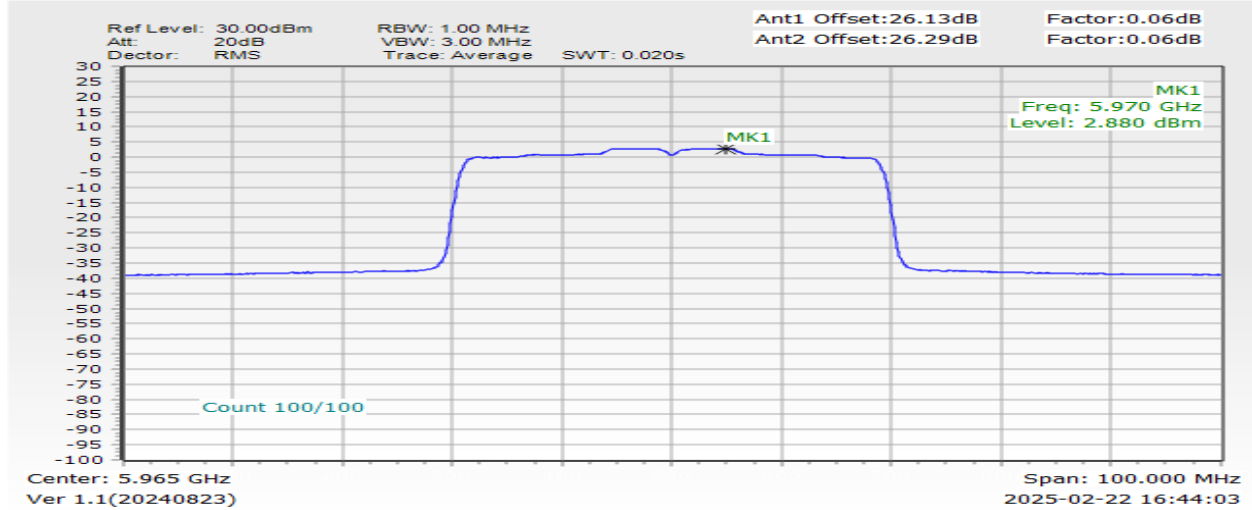


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

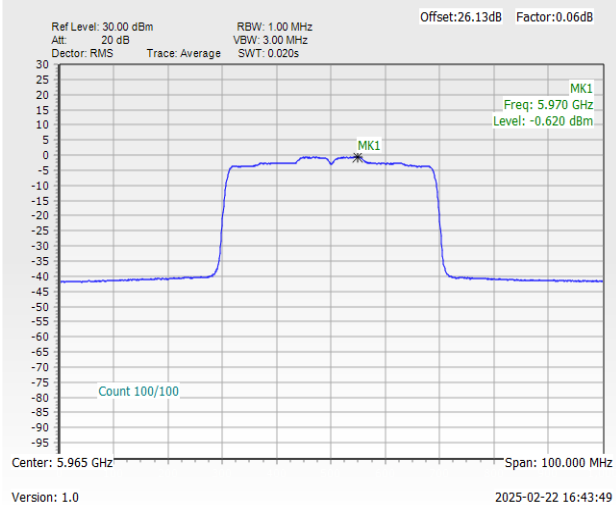


Power Density Plot Trace 2 (Ant 4)

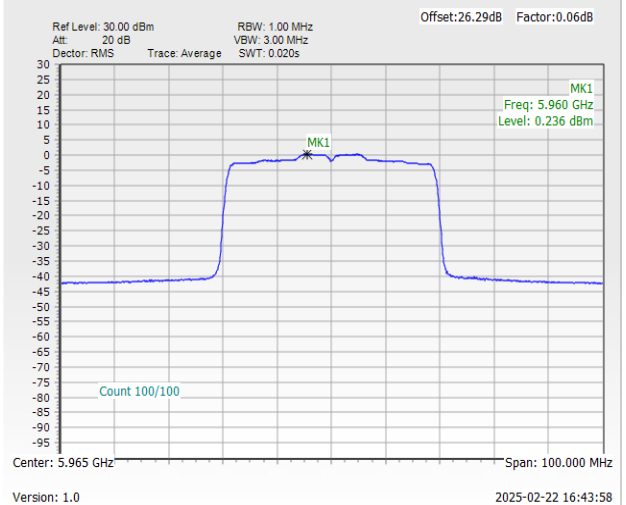



<802.11be EHT80>


Maximum Power Density Plot (dBm/MHz)

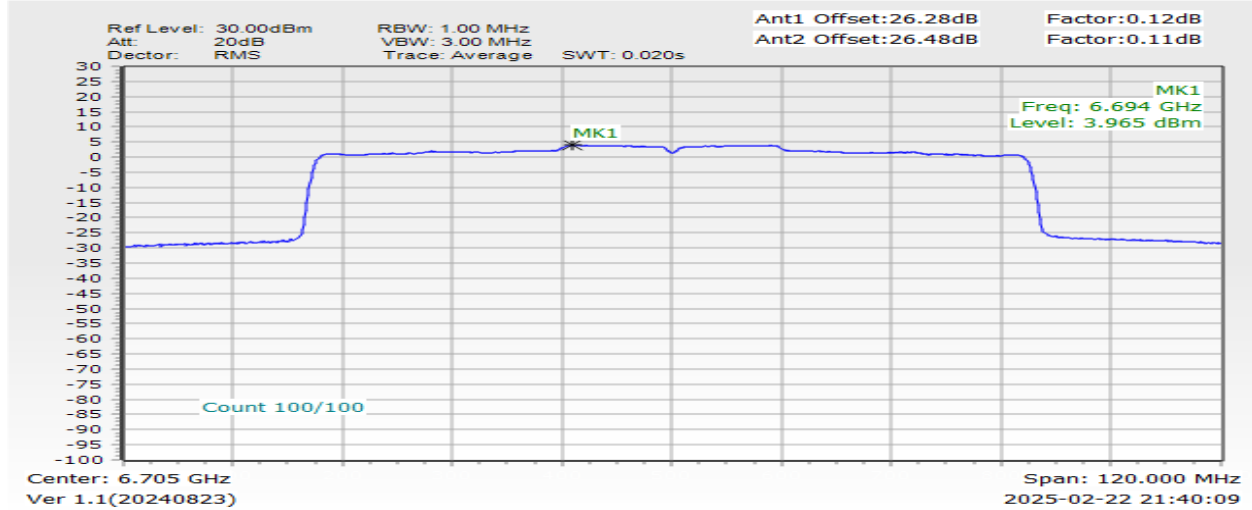


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

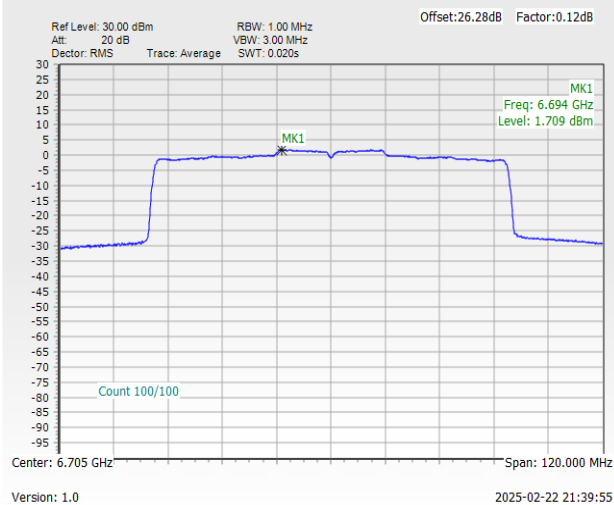


Power Density Plot Trace 2 (Ant 4)

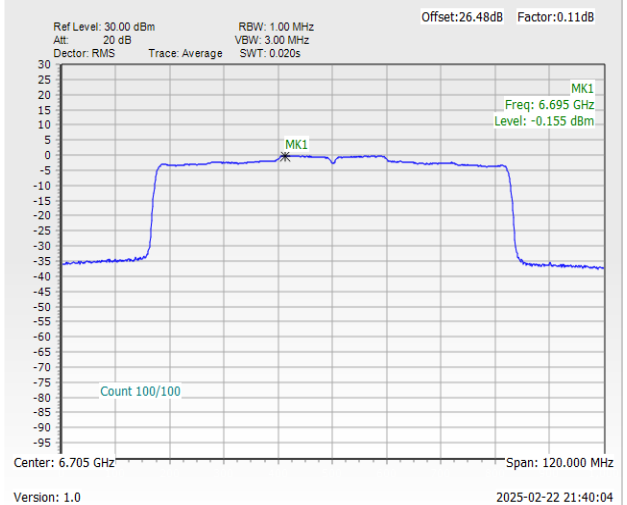



<802.11be EHT160>


Maximum Power Density Plot (dBm/MHz)

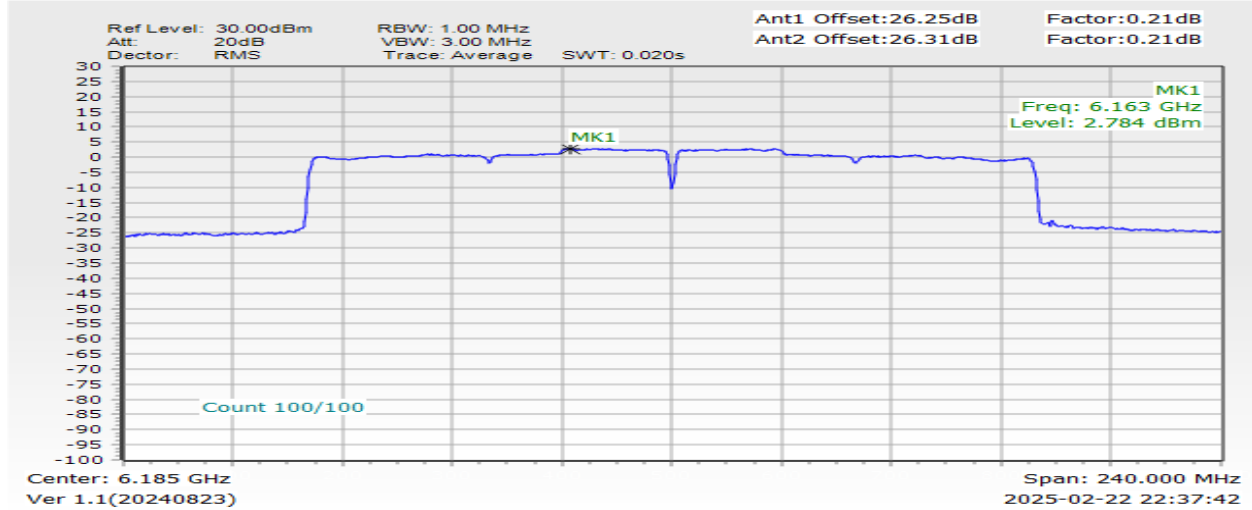


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.

Power Density Plot Trace 1 (Ant 3)

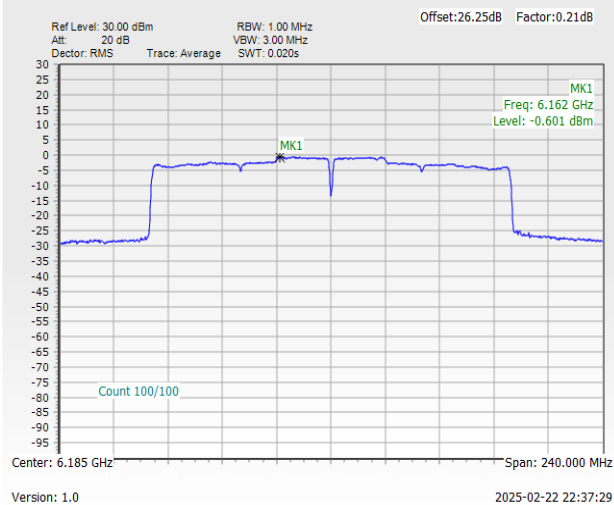

Power Density Plot Trace 2 (Ant 4)

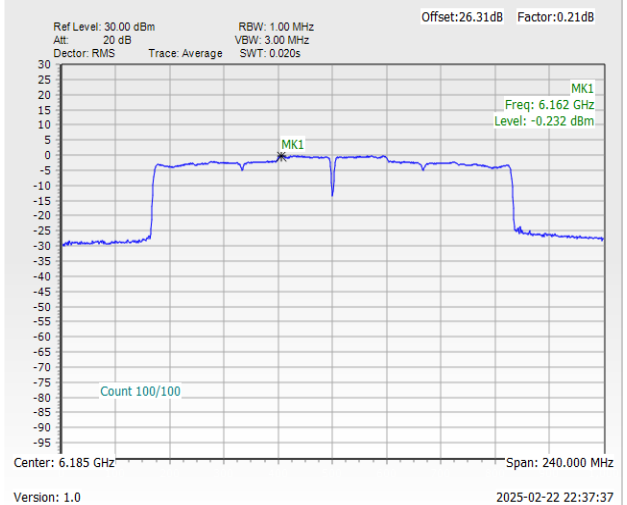




CDD Mode

Test Result of 26dB & 99% Occupied Bandwidth


MIMO <Ant. 3+4>

<802.11a>

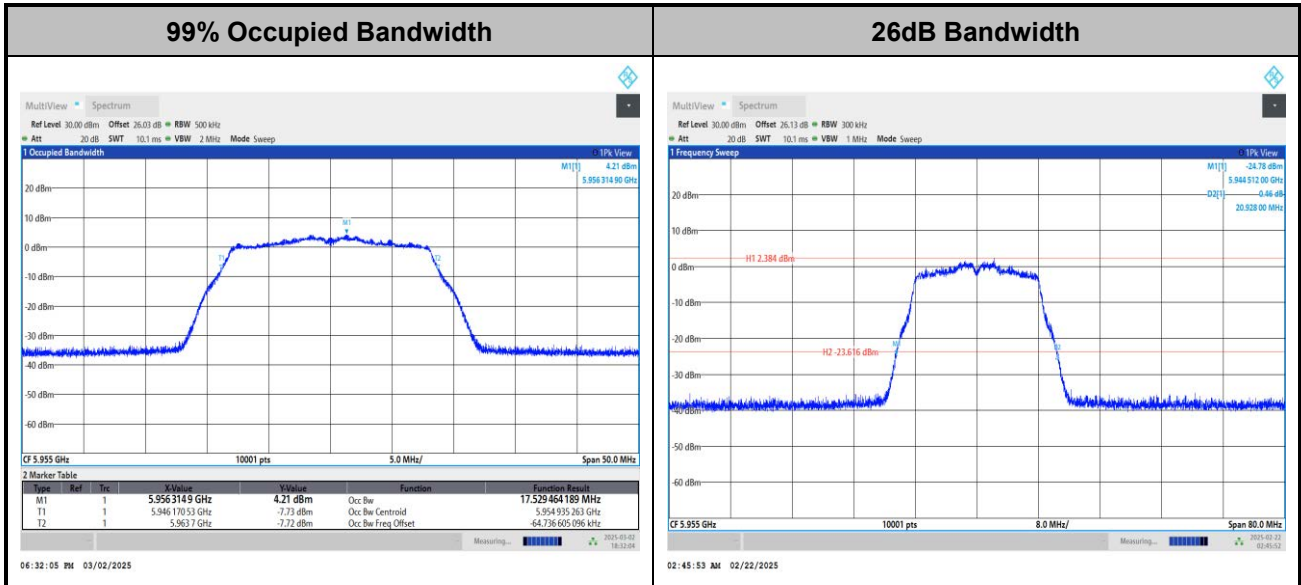

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT20>

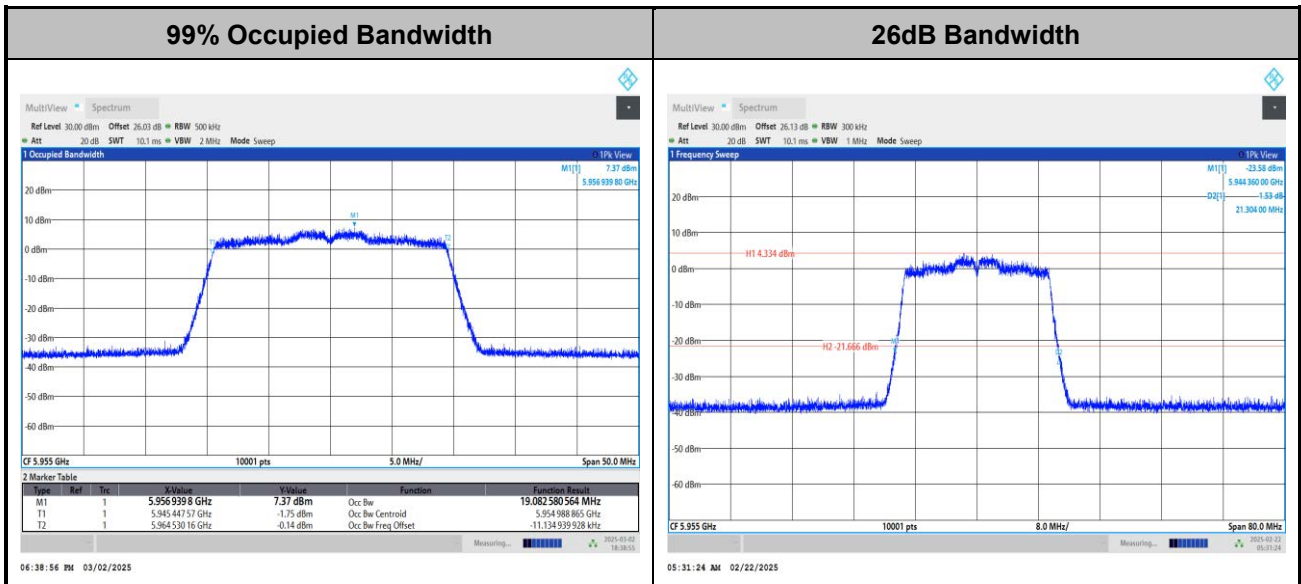

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

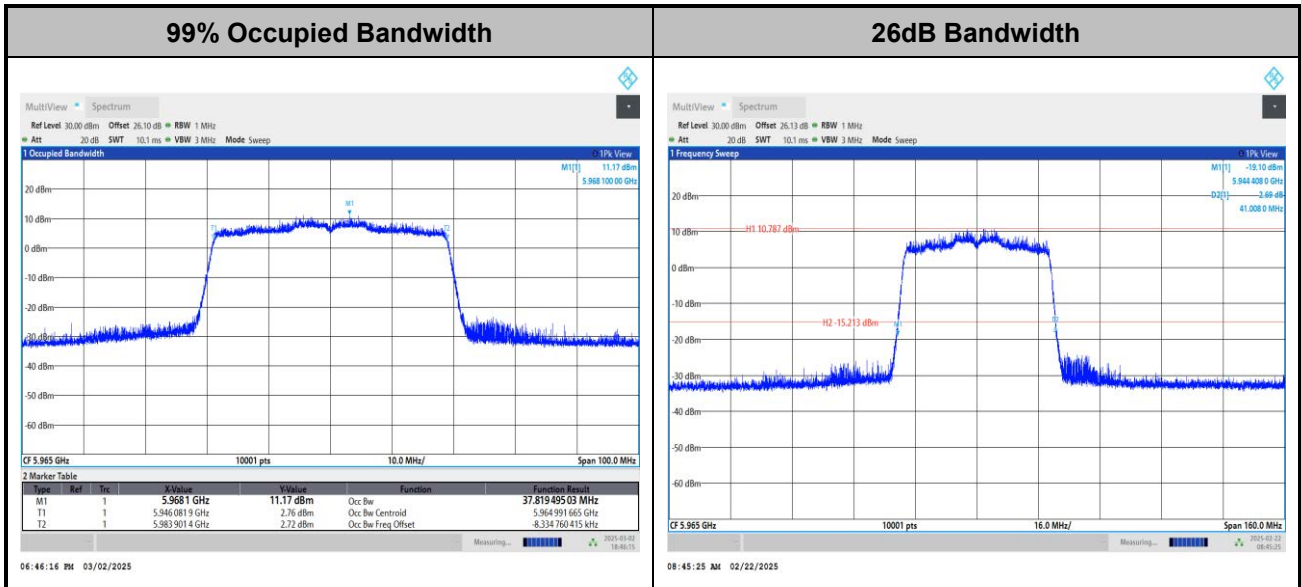

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT80>

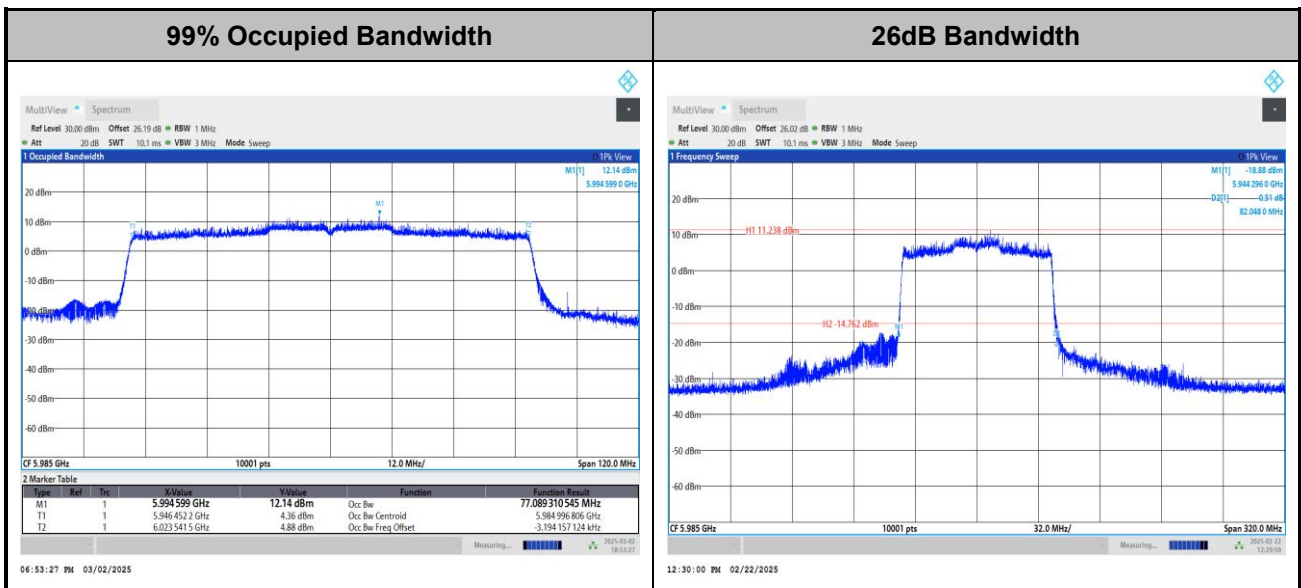

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11be EHT160>

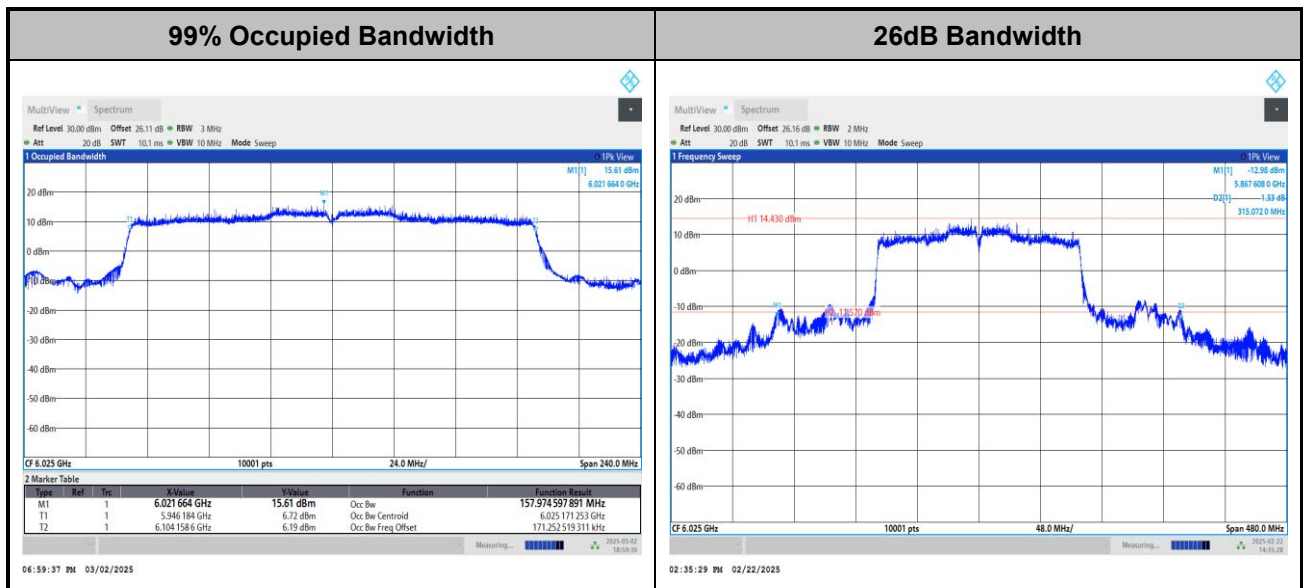

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.