



FCC RADIO TEST REPORT

FCC ID : A4RG4QUR
Equipment : Phone
Model Name : G4QUR
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jan. 15, 2025 and testing was performed from Jan. 15, 2025 to Mar. 21, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example.....	14
3 Test Result	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement.....	22
3.5 AC Conducted Emission Measurement.....	27
3.6 Antenna Requirements.....	29
4 List of Measuring Equipment.....	30
5 Measurement Uncertainty	32
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4N0917E	01	Initial issue of report	Apr. 09, 2025
FR4N0917E	02	Revise Test Configuration of Equipment Under Test and Appendix A This report is an updated version, replacing the report issued on Apr. 09, 2025.	Apr. 17, 2025
FR4N0917E	03	Revise Appendix A This report is an updated version, replacing the report issued on Apr. 17, 2025.	Apr. 18, 2025
FR4N0917E	04	Revise Appendix A This report is an updated version, replacing the report issued on Apr. 18, 2025.	May 16, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN , Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.
Antenna Type WLAN: <Ant. 3>: IFA Antenna <Ant. 4>: ILA Antenna

EUT Information List	
S/N	Performed Test Item
4C251FDCH00002	RF Conducted Measurement
4C311FDCH000JD	Radiated Spurious Emission
51091FDCH0006V	Conducted Emission

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	<5G_Ant3 + 5G_Ant4> Correlated: -3.49 Uncorrelated: -5.53
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	Ant. 3: 0 Ant. 4: -0.9
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	Ant. 3: 0.4 Ant. 4: -3.3
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 3: -1.6 Ant. 4: -4.8

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The correlated antenna gain is provided by the MIMO antenna report using KDB 662911 D01 from manufacturer.

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant 3 (dBi)	Ant 4 (dBi)	(dBi)	(dBi)	(dB)	(dB)
Band II	0.00	-0.90	0.00	2.57	0.00	0.00
Band III	0.40	-3.30	0.40	1.76	0.00	0.00
Band IV	-1.60	-4.80	-1.60	-0.04	0.00	0.00

Calculation example:

If a device has two antenna, $G_{ANT3} = 0.0$ dBi; $G_{ANT4} = -0.9$ dBi

Directional gain of power measurement = $\max(0.0, -0.9) + 0 = 0.0$ dBi

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(0.0 \text{ dBi} / 20)} + 10^{(-0.9 \text{ dBi} / 20)} \right]^2 / 2 \right\} \\ = 2.57 \text{ dBi}$$

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane with Adapter for Band 1-3 and X plane with Adapter for Band 4 as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)
5150-5350 MHz	50 [@]	5250
5470-5725 MHz	114 [@]	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151 [*]	5755	159 [*]	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118 [*]	5590	124	5620
	120	5600	126 [*]	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142 [*]	5710		

Note:

1. The above Frequency and Channel with "^{*}" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40 and 802.11be EHT40.
2. The above Frequency and Channel with "[#]" are 802.11ac VHT80 and 802.11ax HE80 and 802.11be EHT80.
3. The above Frequency and Channel with "[@]" are 802.11ac VHT160 and 802.11ax HE160 and 802.11be EHT160.



2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11be mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The power for 802.11n and 802.11ac and 802.11ax mode is smaller than 802.11be mode, so all other conducted and radiated test is covered by 802.11be mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by EHT20)	MCS0
802.11n HT40 (Covered by EHT40)	MCS0
802.11ac VHT20 (Covered by EHT20)	MCS0
802.11ac VHT40 (Covered by EHT40)	MCS0
802.11ac VHT80 (Covered by EHT80)	MCS0
802.11ac VHT160 (Covered by EHT160)	MCS0
802.11ax HE20 (Covered by EHT20)	MCS0
802.11ax HE40 (Covered by EHT40)	MCS0
802.11ax HE80 (Covered by EHT80)	MCS0
802.11ax HE160 (Covered by EHT160)	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0

Index of MRU and puncture mode mapping
Small MRU

MRU	26T	52T	106T
52T+26T	70	71	72
106T+26T	82		83

Large MRU

484+242-tone MRU			
2	1	4	3
80MHz puncture 20			
8	4	2	1

484+242-tone MRU							
2	1	4	3	6	5	8	7
160MHz puncture 20							
128	64	32	16	8	4	2	1


996+484-tone MRU			
2	1	4	3
160MHz puncture 40			
192	48	12	3

Note: The RF waveform is identical for large MRU and puncture modes.


Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz) Link + USB Cable 2 (Charging from AC Adapter)
Remark: 1. For Radiated Test Cases, the tests were performed with USB Cable 2. 2. The detailed Radiated test modes are shown in Appendix C. 3. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test. 4. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

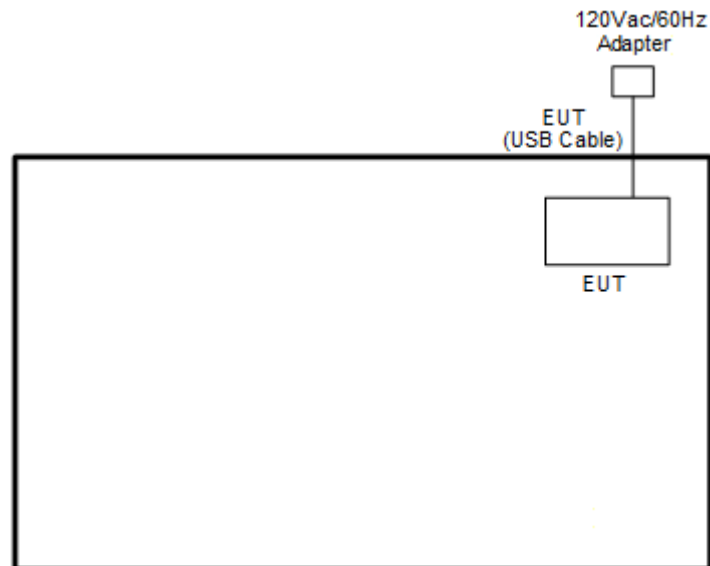

<WLAN Tx Mode>

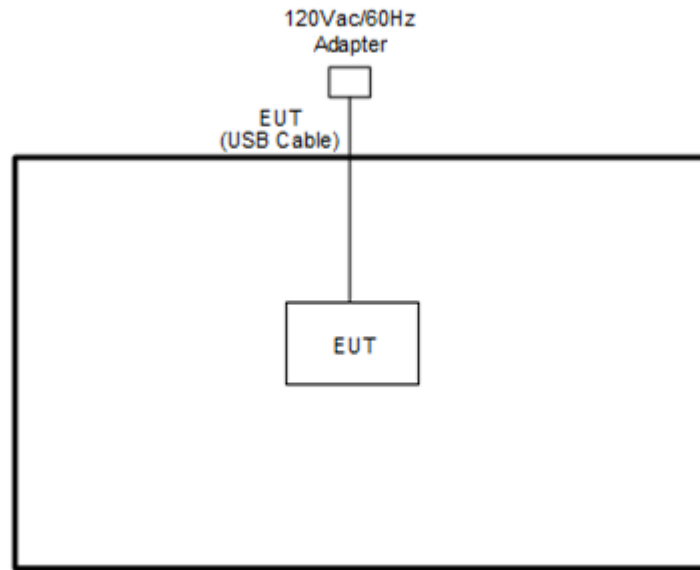

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	GW8L7	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “BTWIFI_Final_version_240823” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The 6 dB bandwidth shall be at least 500kHz for 5725-5850MHz.

There is no restriction limits for 26dB and 99% Occupied bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.
9. For 6dB Bandwidth Measurement
 - (1) The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 - (2) Section C) Emission bandwidth for the band 5.725-5.85 GHz
 - (3) Set RBW = 100 kHz.
 - (4) Set the VBW $\geq 3 \times RBW$.
 - (5) Detector = Peak.
 - (6) Trace mode = max hold
 - (7) Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
 - (8) Measure and record the results in the test report.

3.1.4 Test Setup

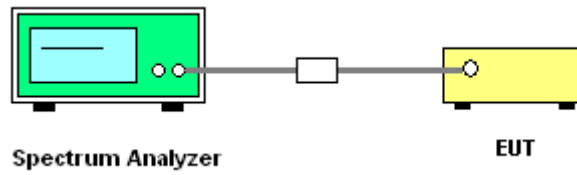

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

For the band 5.725–5.85 GHz bands:

■ The maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

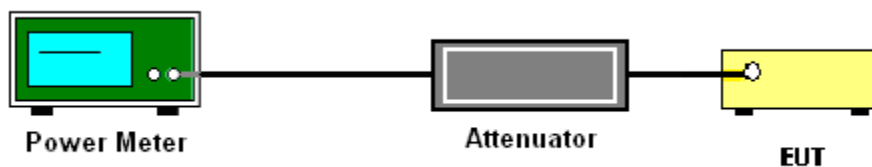

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For the 5.725–5.85 GHz bands:

The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

For the band 5.15-5.725 GHz

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

For the band 5.725–5.85 GHz

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300kHz.
 - Set VBW ≥ 1 MHz.
 - Add $10 \log(500 \text{ kHz/RBW})$ to the measured result, whereas RBW ($< 500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement
 - Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.

3.3.4 Test Setup

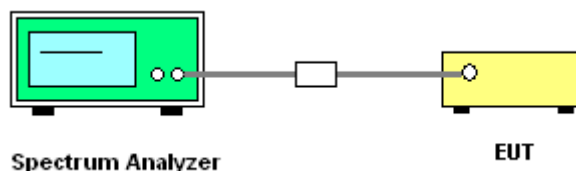

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

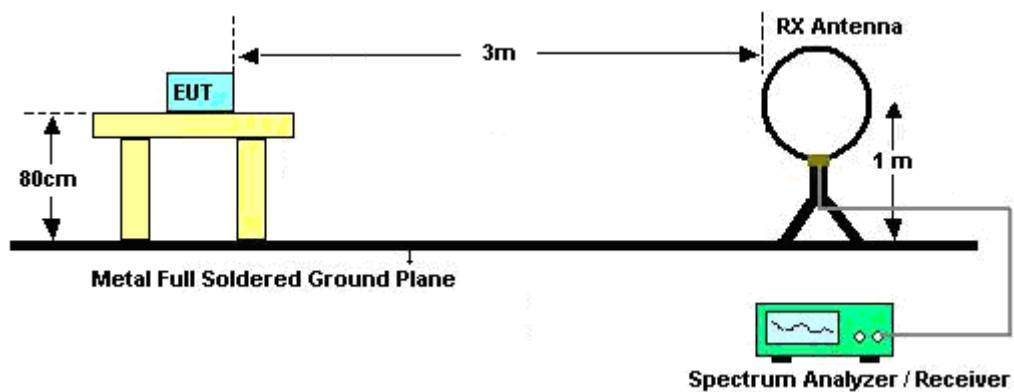


For radiated emissions from 30MHz to 1GHz

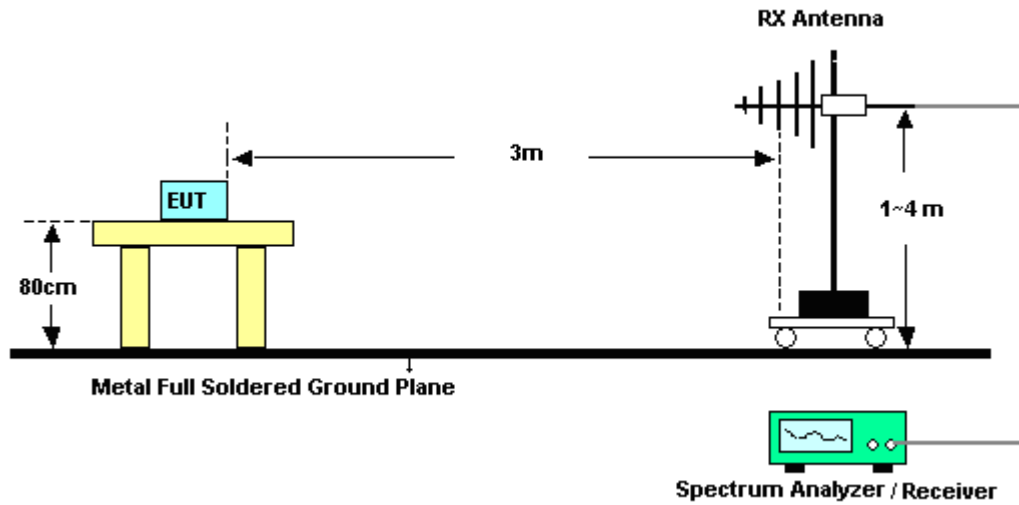

For radiated test from 1GHz to 18GHz

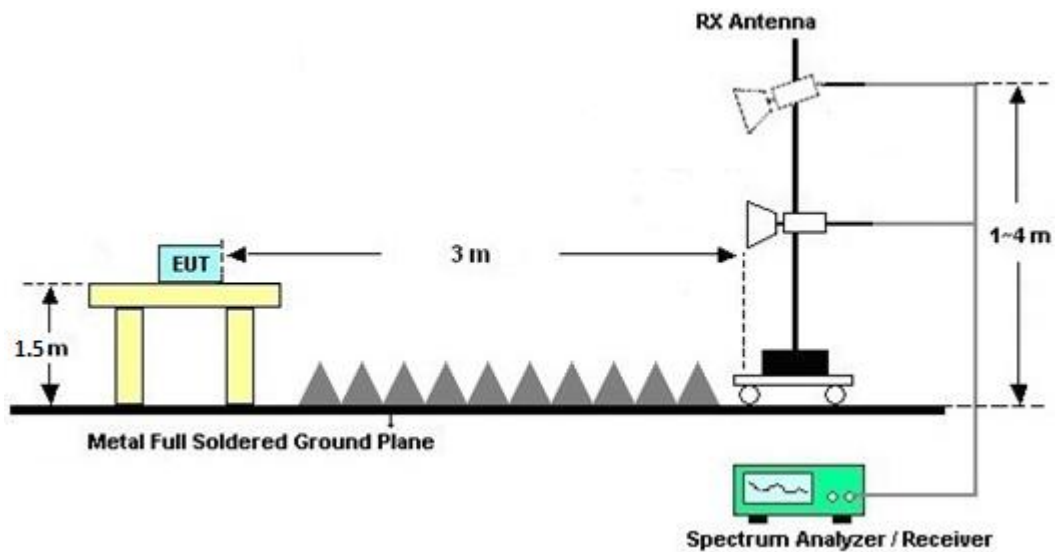

For radiated test above 18GHz

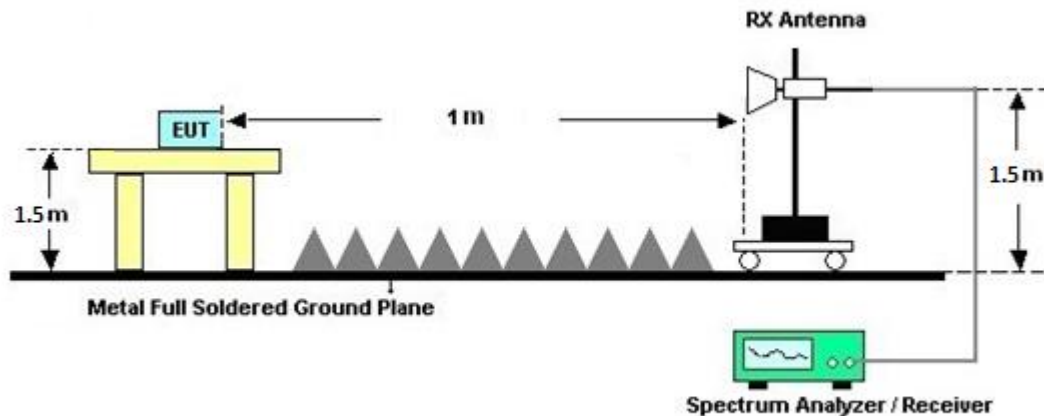

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

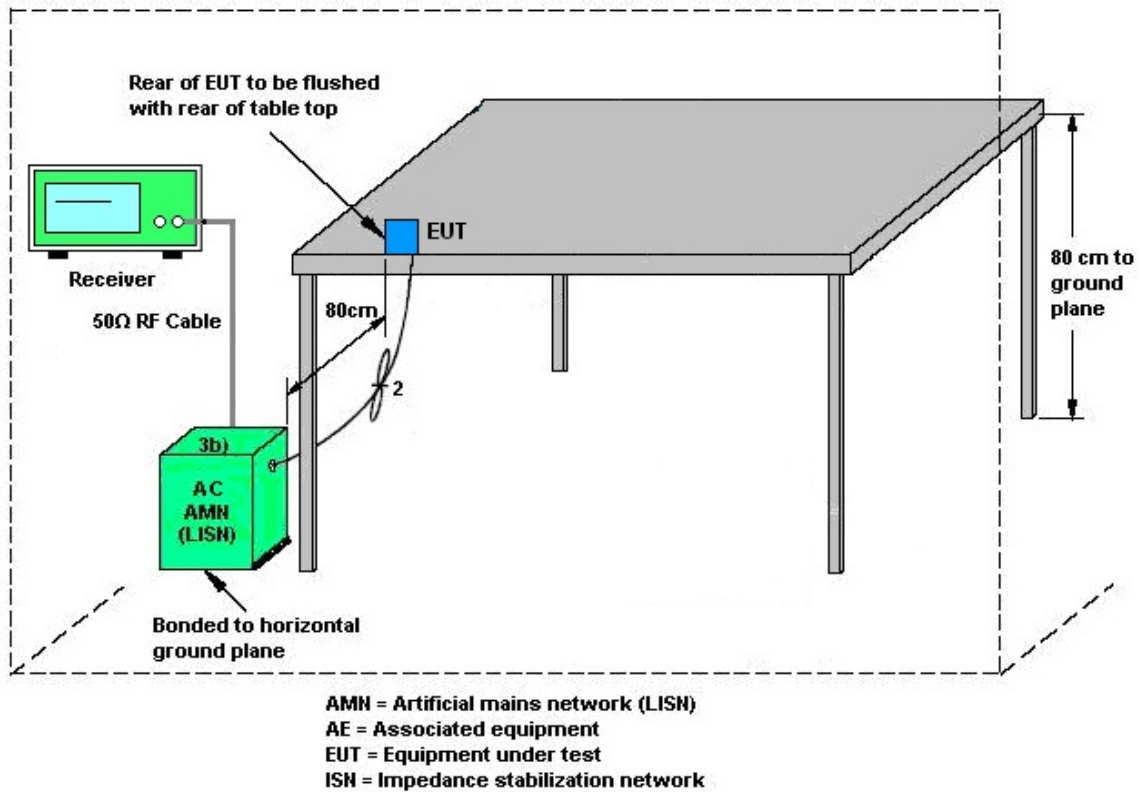

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

b) Unique (non-standard) antenna connector.

Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Jan. 15, 2025~ Mar. 07, 2025	Aug. 28, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9k~30M	Apr. 22, 2024	Jan. 15, 2025~ Mar. 07, 2025	Apr. 21, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WHKX6-7268- 9200-26500-40 CD	SN2	9GHz High Pass Filter	May 22, 2024	Jan. 15, 2025~ Mar. 07, 2025	May 21, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN5	6.75GHz High Pass Filter	Mar. 08, 2024	Jan. 15, 2025~ Mar. 06, 2025	Mar. 07, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN5	6.75GHz High Pass Filter	Mar. 07, 2025	Mar. 07, 2025	Mar. 06, 2026	Radiation (03CH13-HY)
Notch Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 11, 2024	Jan. 15, 2025~ Mar. 07, 2025	Sep. 10, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN3	3GHz High Pass Filter	Jul. 09, 2024	Jan. 15, 2025~ Mar. 07, 2025	Jul. 08, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WRCQV14-60 25-6425-7125- 7525-60SS	SN2	N/A	Jan. 03, 2025	Jan. 15, 2025~ Mar. 07, 2025	Jan. 02, 2026	Radiation (03CH13-HY)
Notch Filter	Wainwright	WRCQV14-54 25-5825-6525- 6925-60SS	SN1	N/A	Jan. 03, 2025	Jan. 15, 2025~ Mar. 07, 2025	Jan. 02, 2026	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 12, 2024	Jan. 15, 2025~ Mar. 07, 2025	Dec. 11, 2025	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 12, 2024	Jan. 15, 2025~ Mar. 07, 2025	Apr. 11, 2025	Radiation (03CH13-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Sep. 09, 2024	Jan. 15, 2025~ Mar. 07, 2025	Sep. 08, 2025	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Aug. 15, 2024	Jan. 15, 2025~ Mar. 07, 2025	Aug. 14, 2025	Radiation (03CH13-HY)
Hygrometer	TECEPEL	DTM-303A	TP215159	N/A	Sep. 10, 2024	Jan. 15, 2025~ Mar. 07, 2025	Sep. 09, 2025	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 15, 2024	Jan. 15, 2025~ Mar. 07, 2025	May 14, 2025	Radiation (03CH13-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz~18GHz	Jan. 08, 2025	Jan. 15, 2025~ Mar. 07, 2025	Jan. 07, 2026	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Jan. 11, 2025	Jan. 15, 2025~ Mar. 07, 2025	Jan. 10, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 07, 2024	Jan. 15, 2025~ Feb. 05, 2025	Feb. 06, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 06, 2025	Feb. 06, 2025~ Mar. 07, 2025	Feb. 05, 2026	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804616/2	30MHz~40GHz	Jul. 18, 2024	Jan. 15, 2025~ Feb. 05, 2025	Jul. 17, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804616/2	30MHz~40GHz	Feb. 06, 2025	Feb. 06, 2025~ Mar. 07, 2025	Feb. 05, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 07, 2024	Jan. 15, 2025~ Feb. 05, 2025	Feb. 06, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 06, 2025	Feb. 06, 2025~ Mar. 07, 2025	Feb. 05, 2026	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 15, 2025~ Mar. 07, 2025	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jan. 15, 2025~ Mar. 07, 2025	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jan. 15, 2025~ Mar. 07, 2025	N/A	Radiation (03CH13-HY)
Software	Audix	N/A	RK-001124	N/A	N/A	Jan. 15, 2025~ Mar. 07, 2025	N/A	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Jan. 15, 2025~ Mar. 07, 2025	May 26, 2025	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Jan. 15, 2025~ Mar. 07, 2025	Jun. 23, 2025	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Feb. 17, 2025~ Mar. 19, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Feb. 17, 2025~ Mar. 19, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10Hz~44GHz	Jan. 14, 2025	Feb. 17, 2025~ Mar. 19, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Feb. 17, 2025~ Mar. 19, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Feb. 17, 2025~ Mar. 19, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 19, 2025~ Mar. 21, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 19, 2025~ Mar. 21, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	Mar. 19, 2025~ Mar. 21, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Mar. 19, 2025~ Mar. 21, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Lisn	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 12, 2024	Mar. 19, 2025~ Mar. 21, 2025	Dec. 11, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Mar. 19, 2025~ Mar. 21, 2025	Sep. 22, 2025	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------



Appendix A. Test Result of Conducted Test Items

Test Engineer:	Howard Tsai and Mina Liu	Temperature:	21~25	°C
Test Date:	2025/02/17~2025/03/19	Relative Humidity:	51~54	%

MIMO <Ant. 3+4>

<For Band 1-3>

26dB and 99% OBW

U-NII-1 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	
11a	6M	2	36	5180	17.84	17.47	24.6	24.52	-		22.42		
11a	6M	2	44	5220	18.02	17.67	28.22	28.38	-		22.47		
11a	6M	2	48	5240	19.56	19.65	31.26	30.84	-		22.91		

**Average Output Power**

U-NII-1 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
11a	6M	2Tx	36	5180	17.69	18.19	20.96	24		-5.53		Pass
11a	6M	2Tx	44	5220	17.94	18.49	21.23	24		-5.53		Pass
11a	6M	2Tx	48	5240	18.08	18.50	21.31	24		-5.53		Pass
HT20	MCS0	2Tx	36	5180	18.14	18.81	21.50	24		-5.53		Pass
HT20	MCS0	2Tx	44	5220	18.40	19.34	21.91	24		-5.53		Pass
HT20	MCS0	2Tx	48	5240	17.83	18.95	21.44	24		-5.53		Pass
HT40	MCS0	2Tx	38	5190	15.65	15.46	18.57	24		-5.53		Pass
HT40	MCS0	2Tx	46	5230	19.32	19.92	22.64	24		-5.53		Pass
VHT20	MCS0	2Tx	36	5180	18.15	18.82	21.51	24		-5.53		Pass
VHT20	MCS0	2Tx	44	5220	18.47	19.37	21.95	24		-5.53		Pass
VHT20	MCS0	2Tx	48	5240	18.03	18.96	21.53	24		-5.53		Pass
VHT40	MCS0	2Tx	38	5190	15.70	15.50	18.61	24		-5.53		Pass
VHT40	MCS0	2Tx	46	5230	19.34	19.95	22.67	24		-5.53		Pass
VHT80	MCS0	2Tx	42	5210	14.03	13.84	16.95	24		-5.53		Pass
VHT160	MCS0	2Tx	50	5250	8.64	8.18	11.43	24		-5.53		Pass

**Power Spectral Density**

U-NII-1 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
11a	6M	2	36	5180	0.01	0.02			10.28	11.0		-3.49		Pass
11a	6M	2	44	5220	0.01	0.02			10.7	11.0		-3.49		Pass
11a	6M	2	48	5240	0.01	0.02			10.92	11.0		-3.49		Pass

**26dB and 99% OBW**

FCC U-NII-2A MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	
11a	6M	2	52	5260	18.1	17.61	27.41	27.9	23.46		29.46		23.98		
11a	6M	2	60	5300	18.45	25.73	29.87	30.7	23.66		29.66		23.98		
11a	6M	2	64	5320	17.68	25.81	21.96	21.79	23.48		29.48		23.98		

**Average Output Power**

FCC U-NII-2A MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	52	5260	18.16	18.42	21.3	23.98		0.0		30	Pass
11a	6M	2Tx	60	5300	18.39	18.5	21.46	23.98		0.0		30	Pass
11a	6M	2Tx	64	5320	17.07	17.27	20.18	23.98		0.0		30	Pass
HT20	MCS0	2Tx	52	5260	18.73	18.8	21.78	23.98		0.0		30	Pass
HT20	MCS0	2Tx	60	5300	18.75	19.15	21.96	23.98		0.0		30	Pass
HT20	MCS0	2Tx	64	5320	16.95	17.48	20.23	23.98		0.0		30	Pass
HT40	MCS0	2Tx	54	5270	18.31	17.81	21.08	23.98		0.0		30	Pass
HT40	MCS0	2Tx	62	5310	14.72	14.55	17.65	23.98		0.0		30	Pass
VHT20	MCS0	2Tx	52	5260	18.79	18.87	21.84	23.98		0.0		30	Pass
VHT20	MCS0	2Tx	60	5300	18.84	19.16	22.01	23.98		0.0		30	Pass
VHT20	MCS0	2Tx	64	5320	17.1	17.58	20.36	23.98		0.0		30	Pass
VHT40	MCS0	2Tx	54	5270	18.32	18.06	21.20	23.98		0.0		30	Pass
VHT40	MCS0	2Tx	62	5310	14.76	14.60	17.69	23.98		0.0		30	Pass
VHT80	MCS0	2Tx	58	5290	14.69	13.06	16.96	23.98		0.0		30	Pass

**Power Spectral Density**

FCC U-NII-2A MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
11a	6M	2	52	5260	0.02	0.02			10.84	11.0		2.57		Pass
11a	6M	2	60	5300	0.02	0.02			10.91	11.0		2.57		Pass
11a	6M	2	64	5320	0.02	0.02			9.65	11.0		2.57		Pass

**26dB and 99% OBW**

U-NII-2C MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4
11a	6M	2	100	5500	17.93	17.48	27.68	27.3	23.42		29.42		23.98		-	-
11a	6M	2	116	5580	17.98	17.36	27.78	27.52	23.39		29.39		23.98		-	-
11a	6M	2	140	5700	18.33	17.61	27.44	21.71	23.63		29.63		23.98		-	-

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4
11a	6M	2	144	5720	14.15	18.75	19.49	17.14	23.64		22.64		23.98		3.16	3.17
6dB Bandwidth Limit ≥ 500kHz															Pass	

**Average Output Power**

U-NII-2C MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	100	5500	18.2	18.84	21.54	23.98		0.4		30	Pass
11a	6M	2Tx	116	5580	18.1	18.74	21.44	23.98		0.4		30	Pass
11a	6M	2Tx	140	5700	18.06	18.52	21.31	23.98		0.4		30	Pass
HT20	MCS0	2Tx	100	5500	17.89	18.46	21.19	23.98		0.4		30	Pass
HT20	MCS0	2Tx	116	5580	19.03	19.42	22.24	23.98		0.4		30	Pass
HT20	MCS0	2Tx	140	5700	16.71	16.08	19.42	23.98		0.4		30	Pass
HT40	MCS0	2Tx	102	5510	14.69	14.46	17.59	23.98		0.4		30	Pass
HT40	MCS0	2Tx	110	5550	19.61	19.73	22.68	23.98		0.4		30	Pass
HT40	MCS0	2Tx	134	5670	17.48	17.25	20.38	23.98		0.4		30	Pass
VHT20	MCS0	2Tx	100	5500	17.98	18.50	21.26	23.98		0.4		30	Pass
VHT20	MCS0	2Tx	116	5580	19.09	19.48	22.30	23.98		0.4		30	Pass
VHT20	MCS0	2Tx	140	5700	16.73	16.15	19.46	23.98		0.4		30	Pass
VHT40	MCS0	2Tx	102	5510	14.76	14.49	17.64	23.98		0.4		30	Pass
VHT40	MCS0	2Tx	110	5550	19.67	19.78	22.74	23.98		0.4		30	Pass
VHT40	MCS0	2Tx	134	5670	17.50	17.28	20.40	23.98		0.4		30	Pass
VHT80	MCS0	2Tx	106	5530	13.32	13.43	16.39	23.98		0.4		30	Pass
VHT80	MCS0	2Tx	122	5610	17.98	18.09	21.05	23.98		0.4		30	Pass
VHT160	MCS0	2Tx	114	5570	11.06	10.76	13.92	23.98		0.4		30	Pass



U-NII-2C straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
11a	6M	2Tx	144	5720	18.35	18.53	21.45	23.98		0.4		30	Pass
HT20	MCS0	2Tx	144	5720	18.83	19.29	22.08	23.98		0.4		30	Pass
HT40	MCS0	2Tx	142	5710	19.89	19.86	22.89	23.98		0.4		30	Pass
VHT20	MCS0	2Tx	144	5720	18.87	19.54	22.23	23.98		0.4		30	Pass
VHT40	MCS0	2Tx	142	5710	19.90	19.88	22.90	23.98		0.4		30	Pass
VHT80	MCS0	2Tx	138	5690	19.58	20.00	22.81	23.98		0.4		30	Pass

**Power Spectral Density**

U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
11a	6M	2	100	5500	0.02	0.02			10.87	11.0		1.76		Pass
11a	6M	2	116	5580	0.02	0.02			10.73	11.0		1.76		Pass
11a	6M	2	140	5700	0.02	0.02			10.67	11.0		1.76		Pass

U-NII-2C straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
11a	6M	2	144	5720	0.02	0.02			10.6	11.0		1.76		Pass

**Average Output Power**

U-NII-1 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
HE20	MCS0	2Tx	36	5180	Full/RU	18.04	18.75	21.42	24		-5.53		Pass
HE20	MCS0	2Tx	44	5220	Full/RU	18.62	19.30	21.98	24		-5.53		Pass
HE20	MCS0	2Tx	48	5240	Full/RU	17.93	18.73	21.36	24		-5.53		Pass
HE40	MCS0	2Tx	38	5190	Full/RU	15.90	15.91	18.92	24		-5.53		Pass
HE40	MCS0	2Tx	46	5230	Full/RU	19.33	19.99	22.68	24		-5.53		Pass
HE80	MCS0	2Tx	42	5210	Full/RU	13.79	13.59	16.70	24		-5.53		Pass
HE160	MCS0	2Tx	50	5250	Full/RU	8.74	8.28	11.53	24		-5.53		Pass

**Average Output Power**

FCC U-NII-2A MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	52	5260	Full/RU	18.74	18.83	21.8	23.98		0.0		30	Pass
HE20	MCS0	2Tx	60	5300	Full/RU	18.88	19.23	22.07	23.98		0.0		30	Pass
HE20	MCS0	2Tx	64	5320	Full/RU	17.06	17.52	20.31	23.98		0.0		30	Pass
HE40	MCS0	2Tx	54	5270	Full/RU	18.43	18.05	21.25	23.98		0.0		30	Pass
HE40	MCS0	2Tx	62	5310	Full/RU	15.38	14.97	18.19	23.98		0.0		30	Pass
HE80	MCS0	2Tx	58	5290	Full/RU	14.41	13.10	16.81	23.98		0.0		30	Pass

**Average Output Power**

U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	100	5500	Full/RU	18.03	18.55	21.31	23.98		0.4		30	Pass
HE20	MCS0	2Tx	116	5580	Full/RU	18.89	19.65	22.3	23.98		0.4		30	Pass
HE20	MCS0	2Tx	140	5700	Full/RU	16.89	16.21	19.57	23.98		0.4		30	Pass
HE40	MCS0	2Tx	102	5510	Full/RU	14.92	14.73	17.84	23.98		0.4		30	Pass
HE40	MCS0	2Tx	110	5550	Full/RU	19.55	19.73	22.65	23.98		0.4		30	Pass
HE40	MCS0	2Tx	134	5670	Full/RU	17.46	17.00	20.25	23.98		0.4		30	Pass
HE80	MCS0	2Tx	106	5530	Full/RU	13.10	13.29	16.21	23.98		0.4		30	Pass
HE80	MCS0	2Tx	122	5610	Full/RU	18.27	18.35	21.32	23.98		0.4		30	Pass
HE160	MCS0	2Tx	114	5570	Full/RU	11.22	10.63	13.95	23.98		0.4		30	Pass

U-NII-2C straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
HE20	MCS0	2Tx	144	5720	Full/RU	19.01	19.36	22.2	23.98		0.4		30	Pass
HE40	MCS0	2Tx	142	5710	Full/RU	19.96	19.90	22.94	23.98		0.4		30	Pass
HE80	MCS0	2Tx	138	5690	Full/RU	19.67	19.97	22.83	23.98		0.4		30	Pass

**26dB and 99% OBW**

U-NII-1 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
						Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2	36	5180	Full	19.74	23.37	35.9	33.55	-		22.95		-
EHT20	MCS0	2	44	5220	Full	23.16	23.96	38.52	39.45	-		23.01		-
EHT20	MCS0	2	48	5240	Full	19.74	19.88	36.16	36.02	-		22.95		-
EHT40	MCS0	2	38	5190	Full	37.96	37.92	41.39	41.01	-		23.01		-
EHT40	MCS0	2	46	5230	Full	39.01	39.38	66.3	93.89	-		23.01		-
EHT80	MCS0	2	42	5210	Full	77.08	77.38	82.21	82.18	-		23.01		-
EHT160	MCS0	2	50	5250	Full	156.63	156.57	166.85	165.07	-		23.01		-

**Average Output Power**

U-NII-1 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2Tx	36	5180	Full/RU	18.18	19.13	21.69	24		-5.53		Pass
EHT20	MCS0	2Tx	36	5180	26RU/0	9.93	10.34	13.15	24		-5.53		Pass
EHT20	MCS0	2Tx	36	5180	52RU/37	12.8	13.32	16.08	24		-5.53		Pass
EHT20	MCS0	2Tx	36	5180	106RU/53	16.15	16.69	19.44	24		-5.53		Pass
EHT20	MCS0	2Tx	36	5180	52T+26T/70	14.24	15.28	17.8	24		-5.53		Pass
EHT20	MCS0	2Tx	36	5180	106T+26T/82	17.1	17.8	20.47	24		-5.53		Pass
EHT20	MCS0	2Tx	44	5220	Full/RU	19.02	19.50	22.28	24		-5.53		Pass
EHT20	MCS0	2Tx	44	5220	26RU/4	11.51	12.12	14.84	24		-5.53		Pass
EHT20	MCS0	2Tx	44	5220	52RU/38	13.48	14.12	16.82	24		-5.53		Pass
EHT20	MCS0	2Tx	44	5220	106RU/53	16.43	17.52	20.02	24		-5.53		Pass
EHT20	MCS0	2Tx	44	5220	52T+26T/71	15.26	16.25	18.79	24		-5.53		Pass
EHT20	MCS0	2Tx	44	5220	106T+26T/83	17.2	18.25	20.77	24		-5.53		Pass
EHT20	MCS0	2Tx	48	5240	Full/RU	18.88	19.4	22.16	24		-5.53		Pass
EHT20	MCS0	2Tx	48	5240	26RU/8	9.78	10.65	13.25	24		-5.53		Pass
EHT20	MCS0	2Tx	48	5240	52RU/40	13.18	14.04	16.64	24		-5.53		Pass
EHT20	MCS0	2Tx	48	5240	106RU/54	16.1	17.23	19.71	24		-5.53		Pass
EHT20	MCS0	2Tx	48	5240	52T+26T/72	14.37	15.59	18.03	24		-5.53		Pass
EHT20	MCS0	2Tx	48	5240	106T+26T/83	17.36	18.14	20.78	24		-5.53		Pass
EHT40	MCS0	2Tx	38	5190	Full/RU	16.26	16.04	19.16	24		-5.53		Pass
EHT40	MCS0	2Tx	46	5230	Full/RU	19.50	19.97	22.75	24		-5.53		Pass
EHT80	MCS0	2Tx	42	5210	Full/RU	14.26	14.2	17.24	24		-5.53		Pass
EHT80	MCS0	2Tx	42	5210	Puncture20 /8	14.1	13.84	16.98	24		-5.53		Pass
EHT160	MCS0	2Tx	50	5250	Full/RU	8.90	8.39	11.66	24		-5.53		Pass
EHT160	MCS0	2Tx	50	5250	Puncture20 /128	7.44	8.07	10.78	24		-5.53		Pass
EHT160	MCS0	2Tx	50	5250	Puncture40 /192	8.55	8.12	11.35	24		-5.53		Pass

**Power Spectral Density**

U-NII-1 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2	36	5180	Full	0.02	0.03			10.75	11.0		-3.49		Pass
EHT20	MCS0	2	36	5180	26/0	0.02	0.03			10.03	11.0		-3.49		Pass
EHT20	MCS0	2	36	5180	52/37	0.02	0.03			9.9	11.0		-3.49		Pass
EHT20	MCS0	2	36	5180	106/53	0.02	0.03			10.13	11.0		-3.49		Pass
EHT20	MCS0	2	36	5180	52T+26T/70	0.02	0.03			9.75	11.0		-3.49		Pass
EHT20	MCS0	2	36	5180	106T+26T/82	0.02	0.03			10.16	11.0		-3.49		Pass
EHT20	MCS0	2	44	5220	Full	0.02	0.03			10.85	11.0		-3.49		Pass
EHT20	MCS0	2	44	5220	26/4	0.02	0.03			10.67	11.0		-3.49		Pass
EHT20	MCS0	2	44	5220	52/38	0.02	0.03			10.65	11.0		-3.49		Pass
EHT20	MCS0	2	44	5220	106/53	0.02	0.03			10.7	11.0		-3.49		Pass
EHT20	MCS0	2	44	5220	52T+26T/71	0.02	0.03			10.7	11.0		-3.49		Pass
EHT20	MCS0	2	44	5220	106T+26T/83	0.02	0.03			10.59	11.0		-3.49		Pass
EHT20	MCS0	2	48	5240	Full	0.02	0.03			10.75	11.0		-3.49		Pass
EHT20	MCS0	2	48	5240	26/8	0.02	0.03			10.25	11.0		-3.49		Pass
EHT20	MCS0	2	48	5240	52/40	0.02	0.03			10.58	11.0		-3.49		Pass
EHT20	MCS0	2	48	5240	106/54	0.02	0.03			10.48	11.0		-3.49		Pass
EHT20	MCS0	2	48	5240	52T+26T/72	0.02	0.03			9.9	11.0		-3.49		Pass
EHT20	MCS0	2	48	5240	106T+26T/83	0.02	0.03			10.2	11.0		-3.49		Pass
EHT40	MCS0	2	38	5190	Full	0.05	0.06			5.07	11.0		-3.49		Pass
EHT40	MCS0	2	46	5230	Full	0.05	0.06			9.87	11.0		-3.49		Pass
EHT80	MCS0	2	42	5210	Full	0.12	0.12			4.37	11.0		-3.49		Pass
EHT80	MCS0	2	42	5210	Puncture20 /8	0.12	0.12			3.57	11.0		-3.49		Pass
EHT160	MCS0	2	50	5250	Full	0.22	0.21			-8.53	11.0		-3.49		Pass
EHT160	MCS0	2	50	5250	Puncture20 /128	0.22	0.21			-9.1	11.0		-3.49		Pass
EHT160	MCS0	2	50	5250	Puncture40 /192	0.22	0.21			-8.87	11.0		-3.49		Pass

**26dB and 99% OBW**

FCC U-NII-2A MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2	52	5260	Full	19.39	19.38	32.7	33.35	23.87		29.87		23.98		
EHT20	MCS0	2	60	5300	Full	19.72	26.51	33.24	34.82	23.95		29.95		23.98		
EHT20	MCS0	2	64	5320	Full	19.21	19.18	24.42	21.82	23.83		29.83		23.98		
EHT40	MCS0	2	54	5270	Full	38.28	38.25	56.99	62.61	23.98		30		23.98		
EHT40	MCS0	2	62	5310	Full	37.94	37.88	41.3	40.98	23.98		30		23.98		
EHT80	MCS0	2	58	5290	Full	77.06	77.02	82.3	81.98	23.98		30		23.98		

**Average Output Power**

FCC U-NII-2A MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	52	5260	Full/RU	18.72	19.16	21.96	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	52	5260	26RU/0	8.49	8.36	11.44	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	52	5260	52RU/37	13.3	13.27	16.3	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	52	5260	106RU/53	16.52	16.49	19.52	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	52	5260	52T+26T/70	14.89	15.01	17.96	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	52	5260	106T+26T/82	17.59	17.66	20.64	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	60	5300	Full/RU	19.08	19.34	22.22	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	60	5300	26RU/4	11.83	11.93	14.89	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	60	5300	52RU/38	12.73	12.7	15.73	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	60	5300	106RU/53	16.91	17.11	20.02	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	60	5300	52T+26T/71	15.57	15.4	18.5	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	60	5300	106T+26T/83	16.15	16.08	19.13	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	64	5320	Full/RU	17.37	17.67	20.53	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	64	5320	26RU/8	8.49	8.67	11.59	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	64	5320	52RU/40	11.88	11.94	14.92	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	64	5320	106RU/54	13.92	14.18	17.06	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	64	5320	52T+26T/72	10.6	10.8	13.71	23.98		0.0		30	Pass
EHT20	MCS0	2Tx	64	5320	106T+26T/83	17.31	17.7	20.52	23.98		0.0		30	Pass
EHT40	MCS0	2Tx	54	5270	Full/RU	18.46	18.22	21.35	23.98		0.0		30	Pass
EHT40	MCS0	2Tx	62	5310	Full/RU	15.27	15.13	18.21	23.98		0.0		30	Pass
EHT80	MCS0	2Tx	58	5290	Full/RU	14.76	13.27	17.09	23.98		0.0		30	Pass
EHT80	MCS0	2Tx	58	5290	Puncture20 /1	14.06	12.96	16.56	23.98		0.0		30	Pass

**Power Spectral Density**

FCC U-NII-2A MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2	52	5260	Full	0.03	0.03			10.64	11.0		2.57		Pass
EHT20	MCS0	2	52	5260	26/0	0.03	0.03			8.89	11.0		2.57		Pass
EHT20	MCS0	2	52	5260	52/37	0.03	0.03			10.31	11.0		2.57		Pass
EHT20	MCS0	2	52	5260	106/53	0.03	0.03			10.35	11.0		2.57		Pass
EHT20	MCS0	2	52	5260	52T+26T/70	0.03	0.03			10.17	11.0		2.57		Pass
EHT20	MCS0	2	52	5260	106T+26T/82	0.03	0.03			10.47	11.0		2.57		Pass
EHT20	MCS0	2	60	5300	Full	0.03	0.03			10.81	11.0		2.57		Pass
EHT20	MCS0	2	60	5300	26/4	0.03	0.03			10.68	11.0		2.57		Pass
EHT20	MCS0	2	60	5300	52/38	0.03	0.03			9.46	11.0		2.57		Pass
EHT20	MCS0	2	60	5300	106/53	0.03	0.03			10.77	11.0		2.57		Pass
EHT20	MCS0	2	60	5300	52T+26T/71	0.03	0.03			10.52	11.0		2.57		Pass
EHT20	MCS0	2	60	5300	106T+26T/83	0.03	0.03			8.93	11.0		2.57		Pass
EHT20	MCS0	2	64	5320	Full	0.03	0.03			9.01	11.0		2.57		Pass
EHT20	MCS0	2	64	5320	26/8	0.03	0.03			8.92	11.0		2.57		Pass
EHT20	MCS0	2	64	5320	52/40	0.03	0.03			8.89	11.0		2.57		Pass
EHT20	MCS0	2	64	5320	106/54	0.03	0.03			7.78	11.0		2.57		Pass
EHT20	MCS0	2	64	5320	52T+26T/72	0.03	0.03			6.06	11.0		2.57		Pass
EHT20	MCS0	2	64	5320	106T+26T/83	0.03	0.03			10.35	11.0		2.57		Pass
EHT40	MCS0	2	54	5270	Full	0.06	0.06			9.37	11.0		2.57		Pass
EHT40	MCS0	2	62	5310	Full	0.06	0.06			4.26	11.0		2.57		Pass
EHT80	MCS0	2	58	5290	Full	0.11	0.12			0.21	11.0		2.57		Pass
EHT80	MCS0	2	58	5290	Puncture20 /1	0.11	0.12			-1.05	11.0		2.57		Pass

**26dB and 99% OBW**

U-NII-2C MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4
EHT20	MCS0	2	100	5500	Full	19.3	19.23	26.15	24.55	23.84		29.84		23.98		-	-
EHT20	MCS0	2	116	5580	Full	19.49	19.26	29.85	26.47	23.85		29.85		23.98		-	-
EHT20	MCS0	2	140	5700	Full	19.2	19.13	22.48	21.1	23.82		29.82		23.98		-	-
EHT40	MCS0	2	102	5510	Full	37.86	38.87	41.01	41.09	23.98		30		23.98		-	-
EHT40	MCS0	2	110	5550	Full	38.65	38.49	68.27	63.54	23.98		30		23.98		-	-
EHT40	MCS0	2	134	5670	Full	38.17	55.71	45.82	41.09	23.98		30		23.98		-	-
EHT80	MCS0	2	106	5530	Full	77.02	77.29	82.08	82.08	23.98		30		23.98		-	-
EHT80	MCS0	2	122	5610	Full	77.25	84.05	97.95	85.95	23.98		30		23.98		-	-
EHT160	MCS0	2	114	5570	Full	156.85	156.51	166.61	164.98	23.98		30		23.98		-	-

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	Ant3	Ant4
EHT20	MCS0	2	144	5720	Full	14.79	19.29	21.28	20.74	23.93		22.93		23.98		4.39	4.41
EHT40	MCS0	2	142	5710	Full	34.74	34.54	52.86	51.42	23.98		23.01		23.98		3.9	3.74
EHT80	MCS0	2	138	5690	Full	73.76	77.06	84.92	80.66	23.98		23.01		23.98		3.5	3.37
6dB Bandwidth Limit ≥ 500kHz																Pass	

**Average Output Power**

U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	100	5500	Full/RU	17.99	18.74	21.39	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	100	5500	26RU/0	8.96	9.51	12.25	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	100	5500	52RU/37	12.87	12.77	15.83	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	100	5500	106RU/53	16.00	16.22	19.12	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	100	5500	52T+26T/70	14.09	15.2	17.69	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	100	5500	106T+26T/82	16.43	17.61	20.07	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	116	5580	Full/RU	18.95	19.68	22.34	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	116	5580	26RU/4	11.68	11.72	14.71	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	116	5580	52RU/38	13.7	13.58	16.65	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	116	5580	106RU/53	16.59	16.9	19.76	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	116	5580	52T+26T/71	13.28	13.49	16.4	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	116	5580	106T+26T/83	17.63	17.85	20.75	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	140	5700	Full/RU	17.43	16.79	20.13	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	140	5700	26RU/8	7.88	8.96	11.46	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	140	5700	52RU/40	11.94	11.26	14.62	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	140	5700	106RU/54	15.09	14.29	17.72	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	140	5700	52T+26T/72	13.58	13.16	16.39	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	140	5700	106T+26T/83	15.84	15.29	18.58	23.98		0.4		30	Pass
EHT40	MCS0	2Tx	102	5510	Full/RU	15.00	14.75	17.89	23.98		0.4		30	Pass
EHT40	MCS0	2Tx	110	5550	Full/RU	19.65	19.87	22.77	23.98		0.4		30	Pass
EHT40	MCS0	2Tx	134	5670	Full/RU	17.71	17.24	20.49	23.98		0.4		30	Pass
EHT80	MCS0	2Tx	106	5530	Full/RU	13.68	13.43	16.57	23.98		0.4		30	Pass
EHT80	MCS0	2Tx	106	5530	Puncture20 /8	12.67	12.81	15.75	23.98		0.4		30	Pass
EHT80	MCS0	2Tx	122	5610	Full/RU	18.32	18.62	21.48	23.98		0.4		30	Pass
EHT80	MCS0	2Tx	122	5610	Puncture20 /2	16.96	15.51	19.31	23.98		0.4		30	Pass
EHT80	MCS0	2Tx	122	5610	Puncture20 /4	16.65	18.26	20.54	23.98		0.4		30	Pass



U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT160	MCS0	2Tx	114	5570	Full/RU	11.18	11.87	14.55	23.98		0.4		30	Pass
EHT160	MCS0	2Tx	114	5570	Puncture20 /1	11.06	11.59	14.34	23.98		0.4		30	Pass
EHT160	MCS0	2Tx	114	5570	Puncture40 /3	10.82	11.66	14.27	23.98		0.4		30	Pass

U-NII-2C straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2Tx	144	5720	Full/RU	18.91	19.62	22.29	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	144	5720	26RU/8	9.94	10.08	13.02	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	144	5720	52RU/40	11.8	11.72	14.77	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	144	5720	106RU/54	15.24	15.25	18.26	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	144	5720	52T+26T/72	13.33	12.92	16.14	23.98		0.4		30	Pass
EHT20	MCS0	2Tx	144	5720	106T+26T/83	17.55	17.77	20.67	23.98		0.4		30	Pass
EHT40	MCS0	2Tx	142	5710	Full/RU	19.98	19.99	23.00	23.98		0.4		30	Pass
EHT80	MCS0	2Tx	138	5690	Full/RU	19.83	19.98	22.92	23.98		0.4		30	Pass
EHT80	MCS0	2Tx	138	5690	Puncture20 /1	18.81	19.59	22.23	23.98		0.4		30	Pass

**Power Spectral Density**

U-NII-2C MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2	100	5500	Full	0.03	0.03			9.87	11.0		1.76		Pass
EHT20	MCS0	2	100	5500	26/0	0.03	0.03			9.4	11.0		1.76		Pass
EHT20	MCS0	2	100	5500	52/37	0.03	0.03			9.75	11.0		1.76		Pass
EHT20	MCS0	2	100	5500	106/53	0.03	0.03			9.82	11.0		1.76		Pass
EHT20	MCS0	2	100	5500	52T+26T/70	0.03	0.03			9.57	11.0		1.76		Pass
EHT20	MCS0	2	100	5500	106T+26T/82	0.03	0.03			9.71	11.0		1.76		Pass
EHT20	MCS0	2	116	5580	Full	0.03	0.03			10.79	11.0		1.76		Pass
EHT20	MCS0	2	116	5580	26/4	0.03	0.03			10.4	11.0		1.76		Pass
EHT20	MCS0	2	116	5580	52/38	0.03	0.03			10.41	11.0		1.76		Pass
EHT20	MCS0	2	116	5580	106/53	0.03	0.03			10.33	11.0		1.76		Pass
EHT20	MCS0	2	116	5580	52T+26T/71	0.03	0.03			8.35	11.0		1.76		Pass
EHT20	MCS0	2	116	5580	106T+26T/83	0.03	0.03			10.41	11.0		1.76		Pass
EHT20	MCS0	2	140	5700	Full	0.03	0.03			8.62	11.0		1.76		Pass
EHT20	MCS0	2	140	5700	26/8	0.03	0.03			8.22	11.0		1.76		Pass
EHT20	MCS0	2	140	5700	52/40	0.03	0.03			8.57	11.0		1.76		Pass
EHT20	MCS0	2	140	5700	106/54	0.03	0.03			8.45	11.0		1.76		Pass
EHT20	MCS0	2	140	5700	52T+26T/72	0.03	0.03			8.55	11.0		1.76		Pass
EHT20	MCS0	2	140	5700	106T+26T/83	0.03	0.03			8.42	11.0		1.76		Pass
EHT40	MCS0	2	102	5510	Full	0.05	0.06			3.91	11.0		1.76		Pass
EHT40	MCS0	2	110	5550	Full	0.05	0.06			8.95	11.0		1.76		Pass
EHT40	MCS0	2	134	5670	Full	0.05	0.06			6.53	11.0		1.76		Pass
EHT80	MCS0	2	106	5530	Full	0.12	0.12			-0.15	11.0		1.76		Pass
EHT80	MCS0	2	106	5530	Puncture20 /8	0.12	0.12			-0.29	11.0		1.76		Pass
EHT80	MCS0	2	122	5610	Full	0.12	0.12			4.26	11.0		1.76		Pass
EHT80	MCS0	2	122	5610	Puncture20 /2	0.12	0.12			1.63	11.0		1.76		Pass
EHT80	MCS0	2	122	5610	Puncture20 /4	0.12	0.12			3.62	11.0		1.76		Pass



U-NII-2C MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT160	MCS0	2	114	5570	Full	0.21	0.21			-5.54	11.0		1.76		Pass
EHT160	MCS0	2	114	5570	Puncture20 /1	0.21	0.21			-5.86	11.0		1.76		Pass
EHT160	MCS0	2	114	5570	Puncture40 /3	0.21	0.21			-6.1	11.0		1.76		Pass

U-NII-2C straddle channel MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2	144	5720	Full	0.03	0.03			10.75	11.0		1.76		Pass
EHT20	MCS0	2	144	5720	26/8	0.03	0.03			10.11	11.0		1.76		Pass
EHT20	MCS0	2	144	5720	52/40	0.03	0.03			8.71	11.0		1.76		Pass
EHT20	MCS0	2	144	5720	106/54	0.03	0.03			9.04	11.0		1.76		Pass
EHT20	MCS0	2	144	5720	52T+26T/72	0.03	0.03			7.99	11.0		1.76		Pass
EHT20	MCS0	2	144	5720	106T+26T/83	0.03	0.03			10.48	11.0		1.76		Pass
EHT40	MCS0	2	142	5710	Full	0.06	0.05			9.86	11.0		1.76		Pass
EHT80	MCS0	2	138	5690	Full	0.12	0.12			5.48	11.0		1.76		Pass
EHT80	MCS0	2	138	5690	Puncture20 /1	0.12	0.12			4.94	11.0		1.76		Pass

**<For Band 4>****6dB and 26dB EBW and 99% OBW**

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass Fail
					Ant3	Ant4	Ant3	Ant4	Ant3	Ant4		
11a	6M	2	149	5745	21.01	19.44	34.36	33.03	16.07	16.31	0.5	Pass
11a	6M	2	157	5785	21.59	27.86	34.38	40.35	16.03	16.29	0.5	Pass
11a	6M	2	165	5825	21.72	22.75	34.54	37.25	16.31	16.32	0.5	Pass

**Average Output Power**

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass /Fail
					Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
11a	6M	2Tx	149	5745	20.15	20.79	23.49	30		-1.6		Pass
11a	6M	2Tx	157	5785	20.15	20.60	23.39	30		-1.6		Pass
11a	6M	2Tx	165	5825	20.30	20.80	23.57	30		-1.6		Pass
HT20	MCS0	2Tx	149	5745	20.00	20.54	23.29	30		-1.6		Pass
HT20	MCS0	2Tx	157	5785	19.73	20.37	23.07	30		-1.6		Pass
HT20	MCS0	2Tx	165	5825	20.17	20.76	23.49	30		-1.6		Pass
HT40	MCS0	2Tx	151	5755	19.83	19.90	22.88	30		-1.6		Pass
HT40	MCS0	2Tx	159	5795	19.94	19.93	22.95	30		-1.6		Pass
VHT20	MCS0	2Tx	149	5745	20.02	20.58	23.32	30		-1.6		Pass
VHT20	MCS0	2Tx	157	5785	19.77	20.40	23.11	30		-1.6		Pass
VHT20	MCS0	2Tx	165	5825	20.22	20.80	23.53	30		-1.6		Pass
VHT40	MCS0	2Tx	151	5755	19.86	19.92	22.90	30		-1.6		Pass
VHT40	MCS0	2Tx	159	5795	19.96	19.94	22.96	30		-1.6		Pass
VHT80	MCS0	2Tx	155	5775	18.53	19.29	21.94	30		-1.6		Pass

**Power Spectral Density**

U-NII-3 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor(dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
11a	6M	2	149	5745	0.02	0.02	2.22		8.94	9.6	12.61	30.0		-0.04		Pass
11a	6M	2	157	5785	0.02	0.02	2.22		8.9	10.79	13.8	30.0		-0.04		Pass
11a	6M	2	165	5825	0.02	0.02	2.22		8.93	9.77	12.78	30.0		-0.04		Pass

**Average Output Power**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
HE20	MCS0	2Tx	149	5745	Full/RU	19.93	20.84	23.42	30		-1.6		Pass
HE20	MCS0	2Tx	157	5785	Full/RU	20.03	20.38	23.22	30		-1.6		Pass
HE20	MCS0	2Tx	165	5825	Full/RU	20.06	20.59	23.34	30		-1.6		Pass
HE40	MCS0	2Tx	151	5755	Full/RU	19.90	19.96	22.94	30		-1.6		Pass
HE40	MCS0	2Tx	159	5795	Full/RU	19.98	19.96	22.98	30		-1.6		Pass
HE80	MCS0	2Tx	155	5775	Full/RU	18.54	19.47	22.04	30		-1.6		Pass

**6dB and 26dB EBW and 99% OBW**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass Fail
						Ant3	Ant4	Ant3	Ant4	Ant3	Ant4		
EHT20	MCS0	2	149	5745	Full	20.3	19.98	38.66	46.8	18.75	18.63	0.5	Pass
EHT20	MCS0	2	157	5785	Full	20.67	20.74	38.04	37.79	18.77	18.72	0.5	Pass
EHT20	MCS0	2	165	5825	Full	20.73	22.34	39.69	48.81	18.9	17.61	0.5	Pass
EHT40	MCS0	2	151	5755	Full	39.01	38.83	77.54	78.42	37.58	36.9	0.5	Pass
EHT40	MCS0	2	159	5795	Full	40.99	61.06	66.86	85.82	37.65	36.91	0.5	Pass
EHT80	MCS0	2	155	5775	Full	77.25	77.34	109.18	115.33	77.28	76.48	0.5	Pass

**Average Output Power**

U-NII-3 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass /Fail
						Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2Tx	149	5745	Full/RU	20.27	20.89	23.60	30		-1.6		Pass
EHT20	MCS0	2Tx	149	5745	26RU/0	11.06	11.76	14.43	30		-1.6		Pass
EHT20	MCS0	2Tx	149	5745	52RU/37	13.42	14.08	16.77	30		-1.6		Pass
EHT20	MCS0	2Tx	149	5745	106RU/53	17.64	18.48	21.09	30		-1.6		Pass
EHT20	MCS0	2Tx	149	5745	52T+26T/70	16.25	16.68	19.48	30		-1.6		Pass
EHT20	MCS0	2Tx	149	5745	106T+26T/82	18.75	19.5	22.15	30		-1.6		Pass
EHT20	MCS0	2Tx	157	5785	Full/RU	20.29	20.44	23.38	30		-1.6		Pass
EHT20	MCS0	2Tx	157	5785	26RU/4	11.12	11.28	14.21	30		-1.6		Pass
EHT20	MCS0	2Tx	157	5785	52RU/38	14.83	15.22	18.04	30		-1.6		Pass
EHT20	MCS0	2Tx	157	5785	106RU/53	17.66	18.19	20.94	30		-1.6		Pass
EHT20	MCS0	2Tx	157	5785	52T+26T/71	15.79	16.22	19.02	30		-1.6		Pass
EHT20	MCS0	2Tx	157	5785	106T+26T/83	18.58	19.3	21.97	30		-1.6		Pass
EHT20	MCS0	2Tx	165	5825	Full/RU	20.37	20.69	23.54	30		-1.6		Pass
EHT20	MCS0	2Tx	165	5825	26RU/8	10.96	11.16	14.07	30		-1.6		Pass
EHT20	MCS0	2Tx	165	5825	52RU/40	13.64	14.64	17.18	30		-1.6		Pass
EHT20	MCS0	2Tx	165	5825	106RU/54	17.96	18.75	21.38	30		-1.6		Pass
EHT20	MCS0	2Tx	165	5825	52T+26T/72	16.97	17.86	20.45	30		-1.6		Pass
EHT20	MCS0	2Tx	165	5825	106T+26T/83	19.41	20.32	22.9	30		-1.6		Pass
EHT40	MCS0	2Tx	151	5755	Full/RU	19.96	19.99	22.99	30		-1.6		Pass
EHT40	MCS0	2Tx	159	5795	Full/RU	19.99	19.98	23.00	30		-1.6		Pass
EHT80	MCS0	2Tx	155	5775	Full/RU	19.08	19.15	22.13	30		-1.6		Pass
EHT80	MCS0	2Tx	155	5775	Puncture20 /1	18.12	18.97	21.58	30		-1.6		Pass

**Power Spectral Density**

U-NII-3 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		10log (500kHz /RBW) Factor(dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant3	Ant4	Ant3	Ant4	Ant3	Ant4	SUM	Ant3	Ant4	Ant3	Ant4	
EHT20	MCS0	2	149	5745	Full	0.03	0.03	2.22		8.08	10.82	13.83	30.0		-0.04		Pass
EHT20	MCS0	2	149	5745	26/0	0.03	0.03	2.22		7.52	7.95	10.96	30.0		-0.04		Pass
EHT20	MCS0	2	149	5745	52/37	0.03	0.03	2.22		6.91	7.1	10.11	30.0		-0.04		Pass
EHT20	MCS0	2	149	5745	106/53	0.03	0.03	2.22		7.73	8.17	11.18	30.0		-0.04		Pass
EHT20	MCS0	2	149	5745	52T+26T/70	0.03	0.03	2.22		7.58	7.89	10.9	30.0		-0.04		Pass
EHT20	MCS0	2	149	5745	106T+26T/82	0.03	0.03	2.22		7.84	8.21	11.22	30.0		-0.04		Pass
EHT20	MCS0	2	157	5785	Full	0.03	0.03	2.22		8.02	8.79	11.8	30.0		-0.04		Pass
EHT20	MCS0	2	157	5785	26/4	0.03	0.03	2.22		7.14	7.25	10.26	30.0		-0.04		Pass
EHT20	MCS0	2	157	5785	52/38	0.03	0.03	2.22		7.93	8.35	11.36	30.0		-0.04		Pass
EHT20	MCS0	2	157	5785	106/53	0.03	0.03	2.22		7.58	7.93	10.94	30.0		-0.04		Pass
EHT20	MCS0	2	157	5785	52T+26T/71	0.03	0.03	2.22		7.04	7.22	10.23	30.0		-0.04		Pass
EHT20	MCS0	2	157	5785	106T+26T/83	0.03	0.03	2.22		7.52	7.96	10.97	30.0		-0.04		Pass
EHT20	MCS0	2	165	5825	Full	0.03	0.03	2.22		8.46	10.4	13.41	30.0		-0.04		Pass
EHT20	MCS0	2	165	5825	26/8	0.03	0.03	2.22		7.36	7.28	10.37	30.0		-0.04		Pass
EHT20	MCS0	2	165	5825	52/40	0.03	0.03	2.22		6.93	7.59	10.6	30.0		-0.04		Pass
EHT20	MCS0	2	165	5825	106/54	0.03	0.03	2.22		7.95	8.56	11.57	30.0		-0.04		Pass
EHT20	MCS0	2	165	5825	52T+26T/72	0.03	0.03	2.22		8.24	8.84	11.85	30.0		-0.04		Pass
EHT20	MCS0	2	165	5825	106T+26T/83	0.03	0.03	2.22		8.42	8.98	11.99	30.0		-0.04		Pass
EHT40	MCS0	2	151	5755	Full	0.06	0.06	2.22		5.55	6.14	9.15	30.0		-0.04		Pass
EHT40	MCS0	2	159	5795	Full	0.06	0.06	2.22		5.74	6.19	9.2	30.0		-0.04		Pass
EHT80	MCS0	2	155	5775	Full	0.12	0.12	2.22		1.22	2.14	5.15	30.0		-0.04		Pass
EHT80	MCS0	2	155	5775	Puncture20 /1	0.12	0.12	2.22		0.79	1.78	4.79	30.0		-0.04		Pass




<For Band 1-3>

Test Result of 26dB & 99% Occupied Bandwidth


MIMO <Ant. 3+4>

<802.11a>

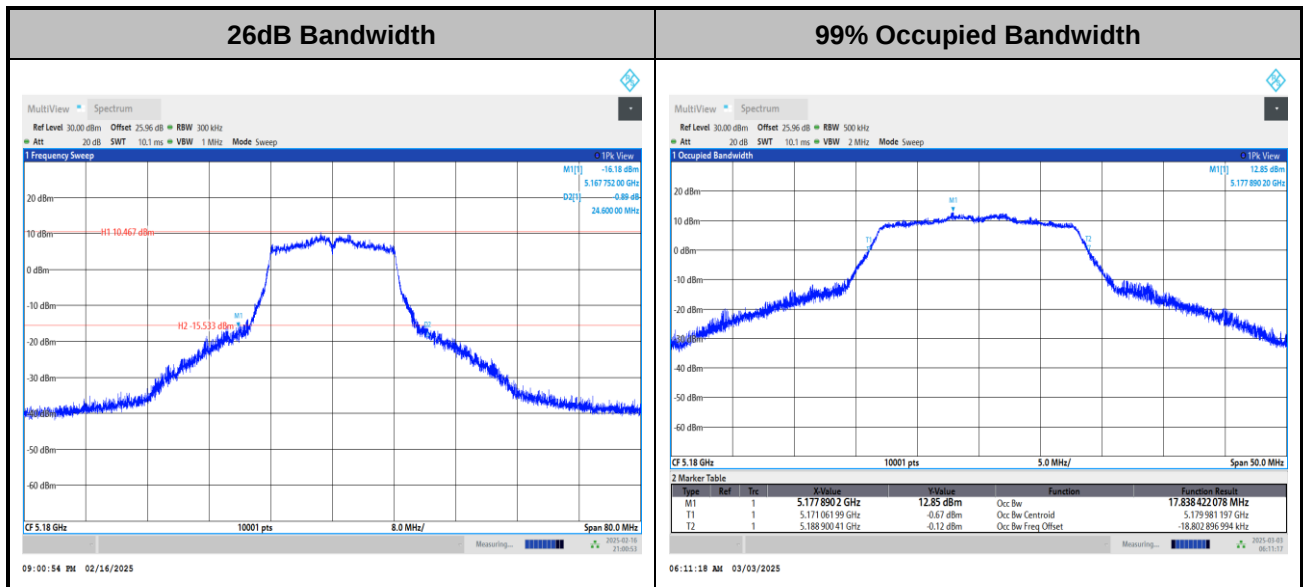

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT20>

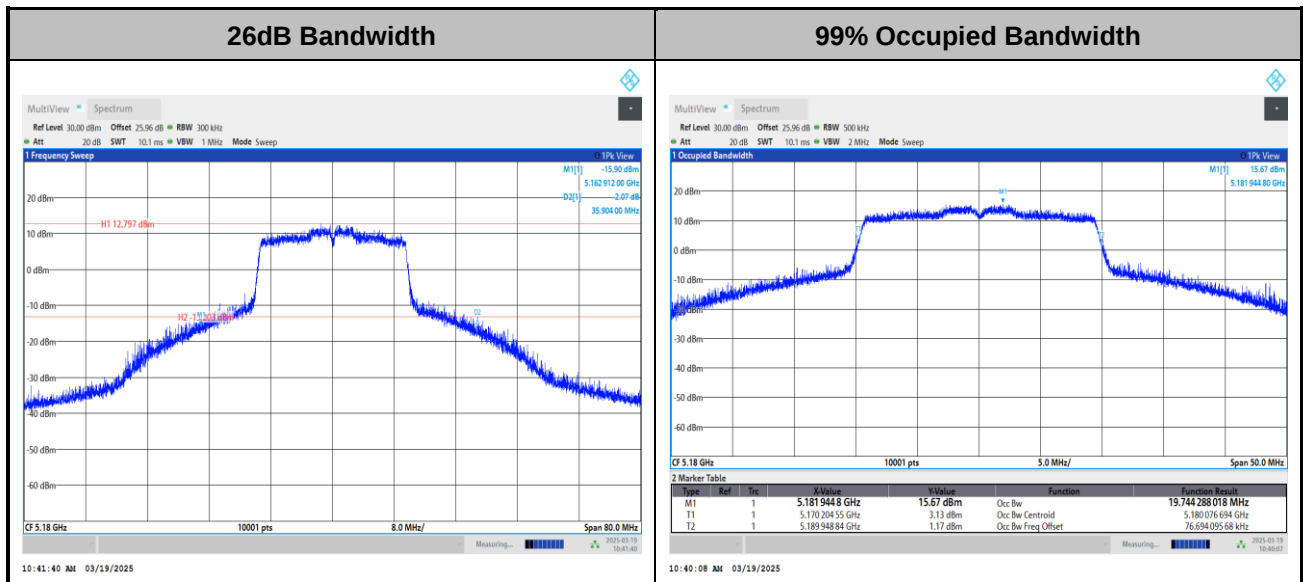

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT40>

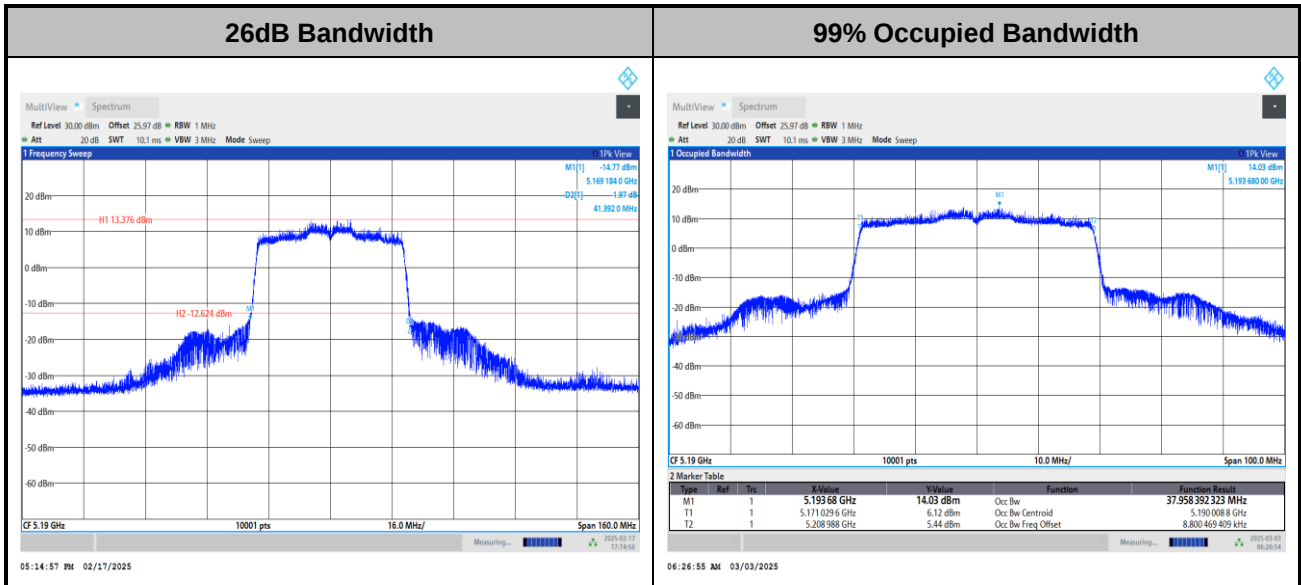

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11be EHT80>

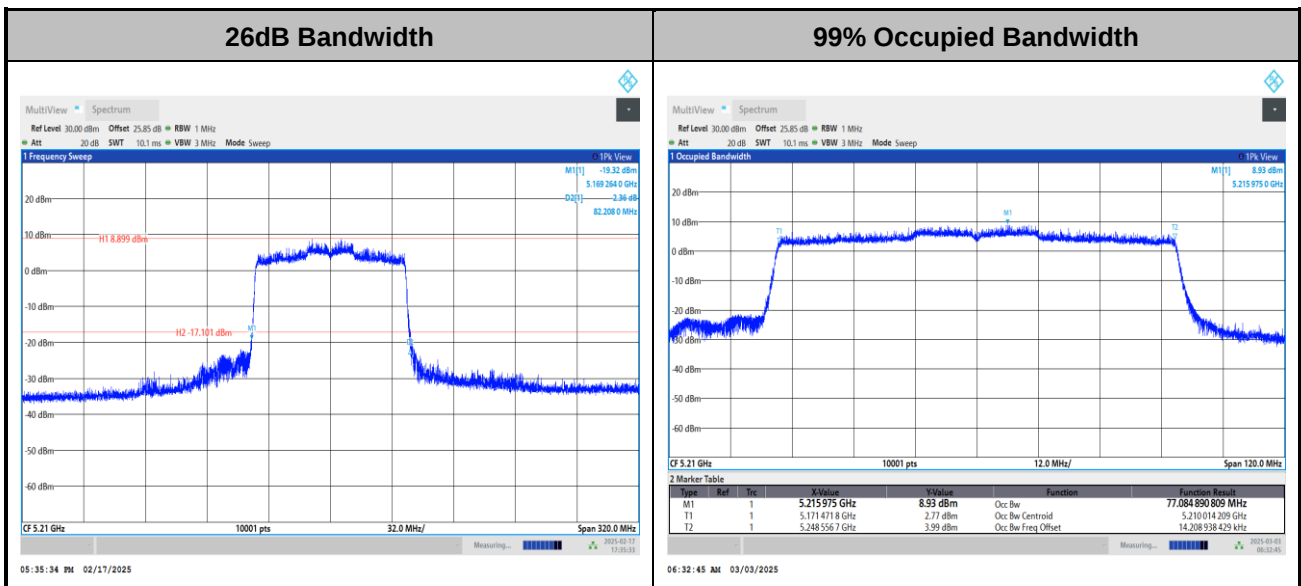

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11be EHT160>

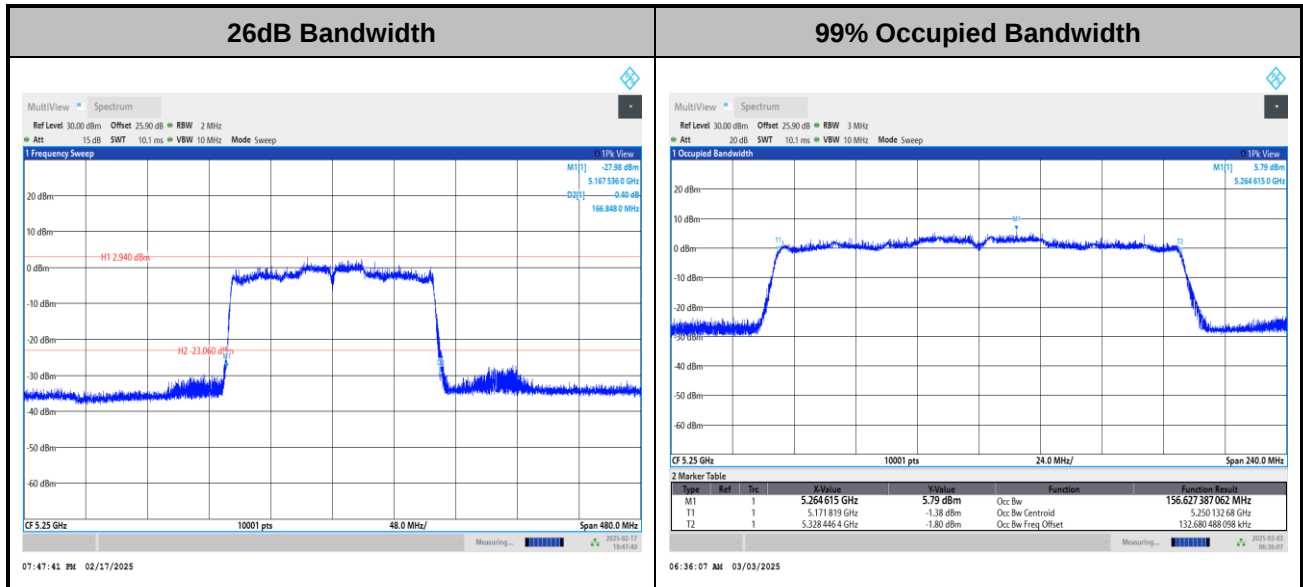


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

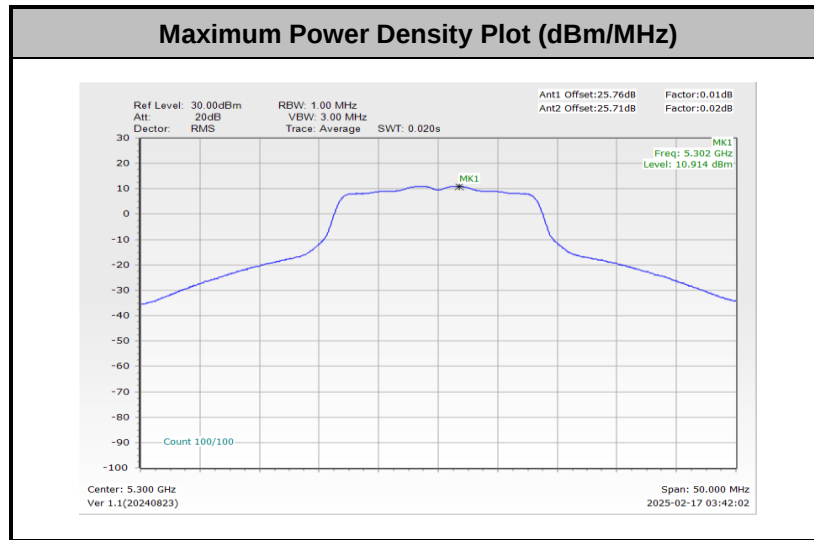


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

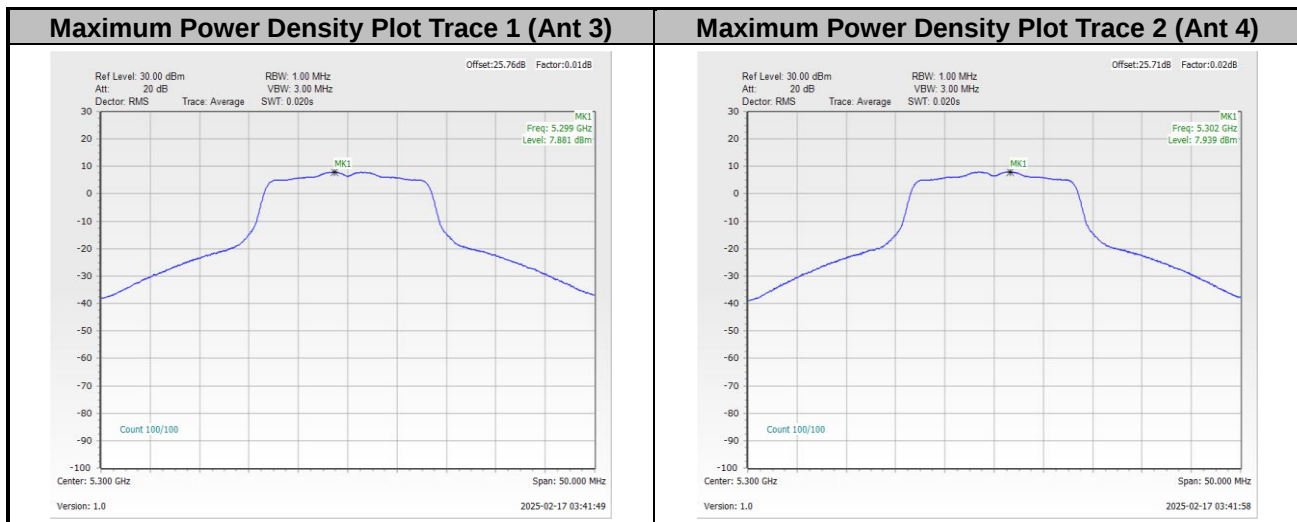




<802.11be EHT20>

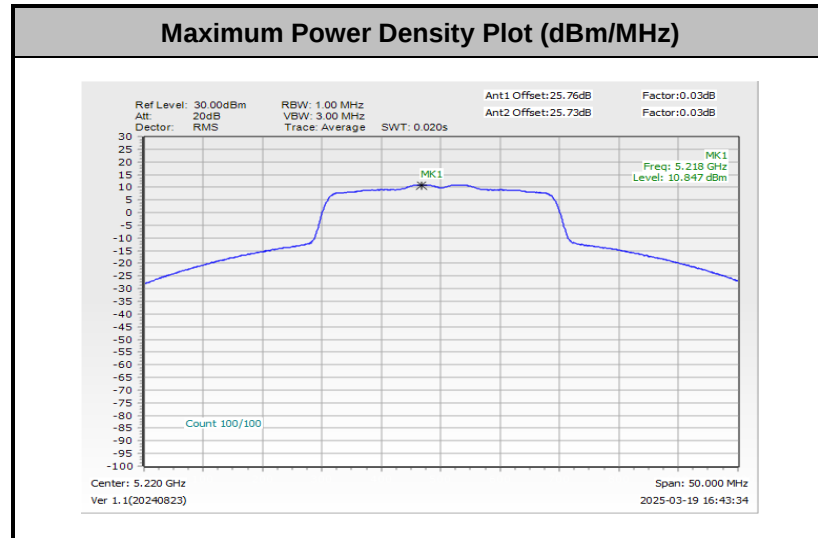


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

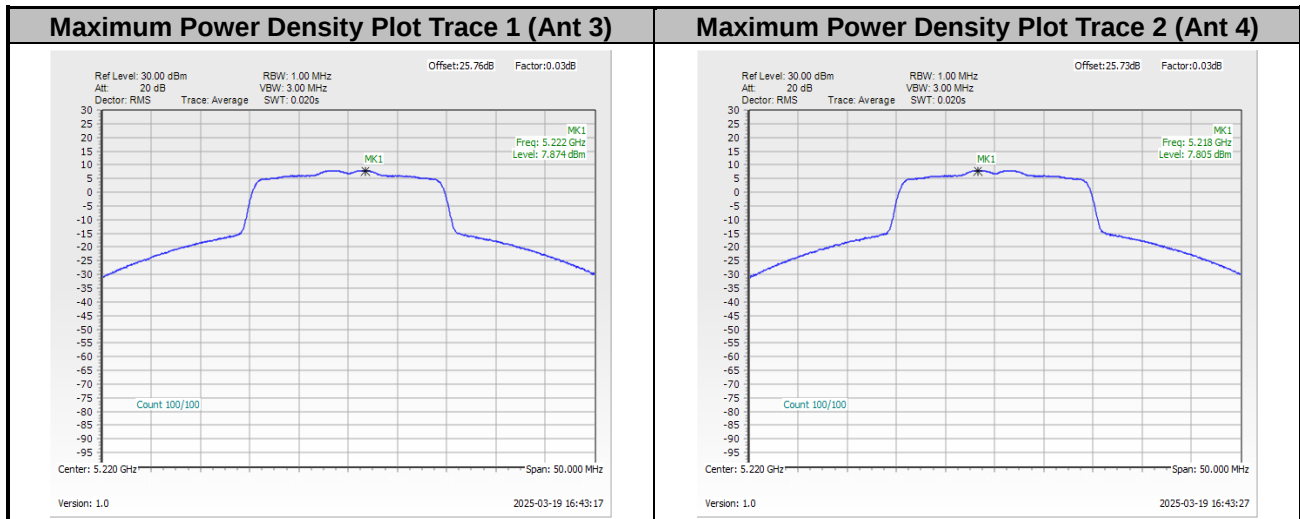




<802.11be EHT40>

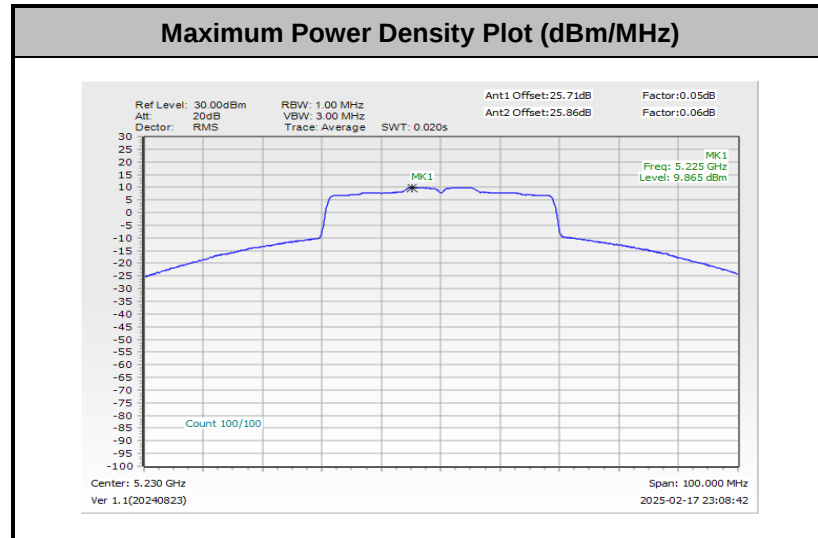


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

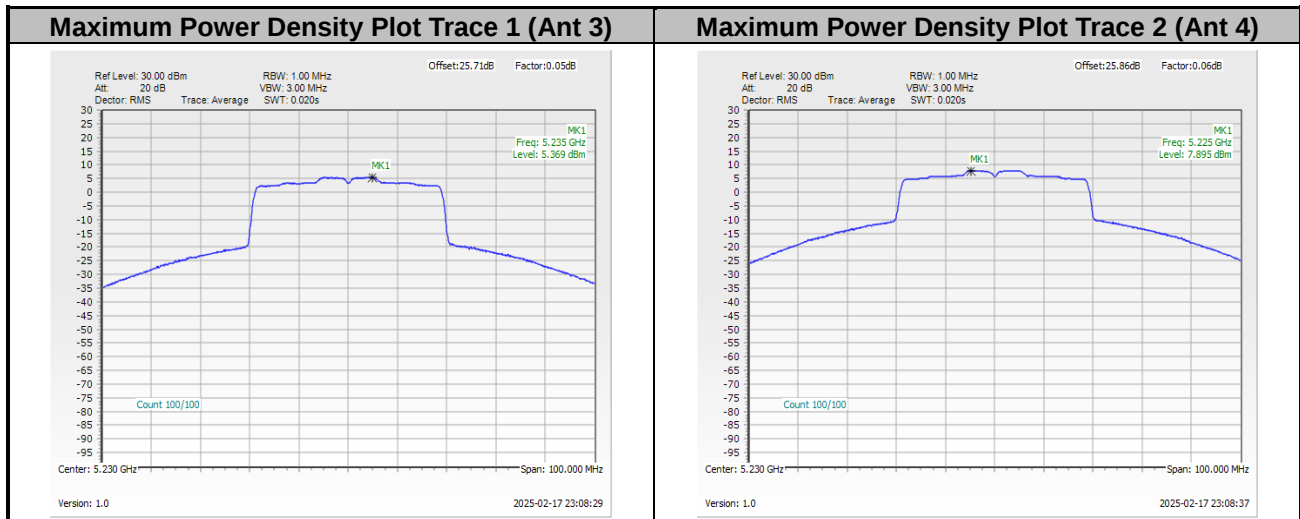




<802.11be EHT80>

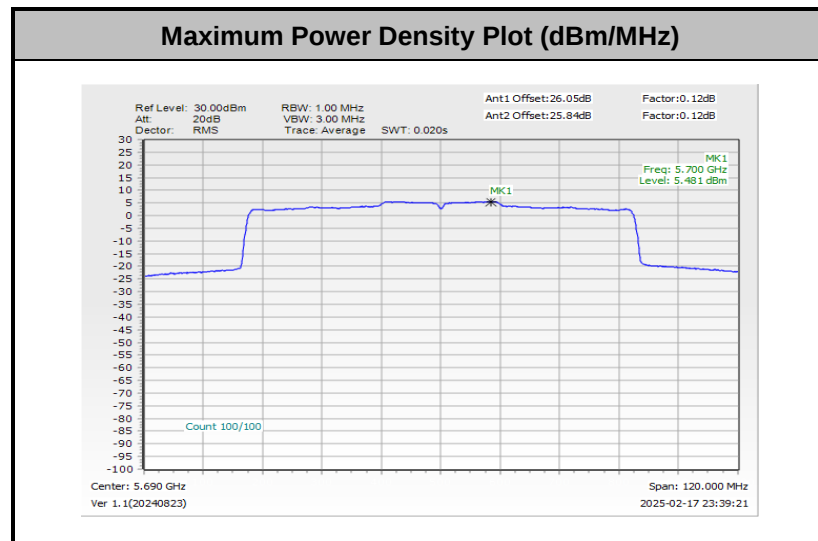


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

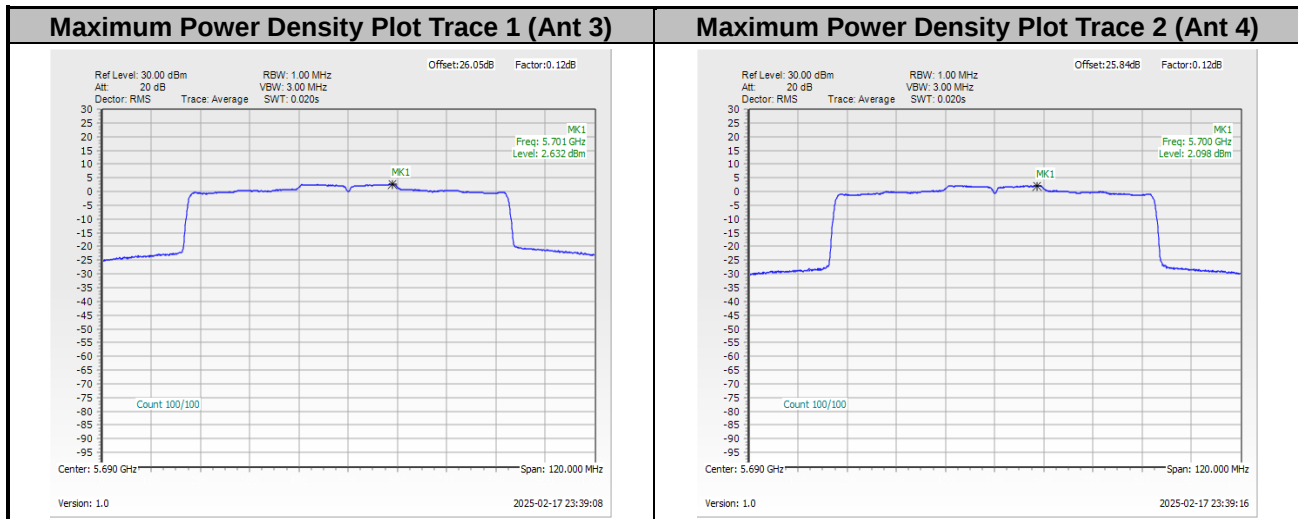




<802.11be EHT160>

Maximum Power Density Plot (dBm/MHz)

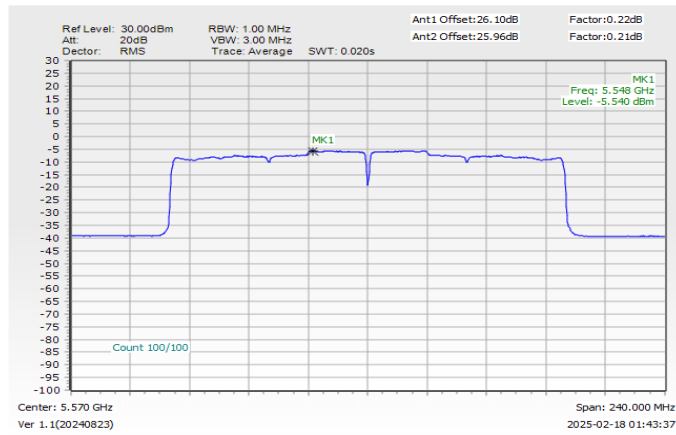


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

Maximum Power Density Plot Trace 1 (Ant 3)

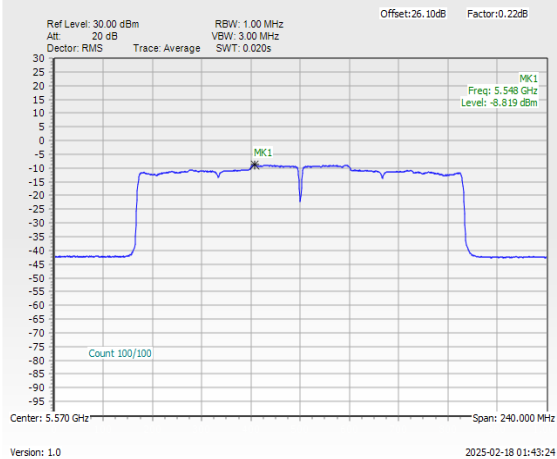

Maximum Power Density Plot Trace 2 (Ant 4)

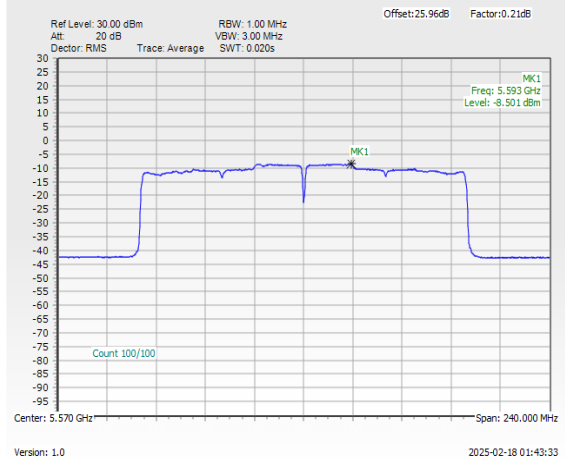





<For Band 4>

Test Result of 6dB and 26dB and 99% Occupied Bandwidth

MIMO <Ant. 3+4>

<802.11a>

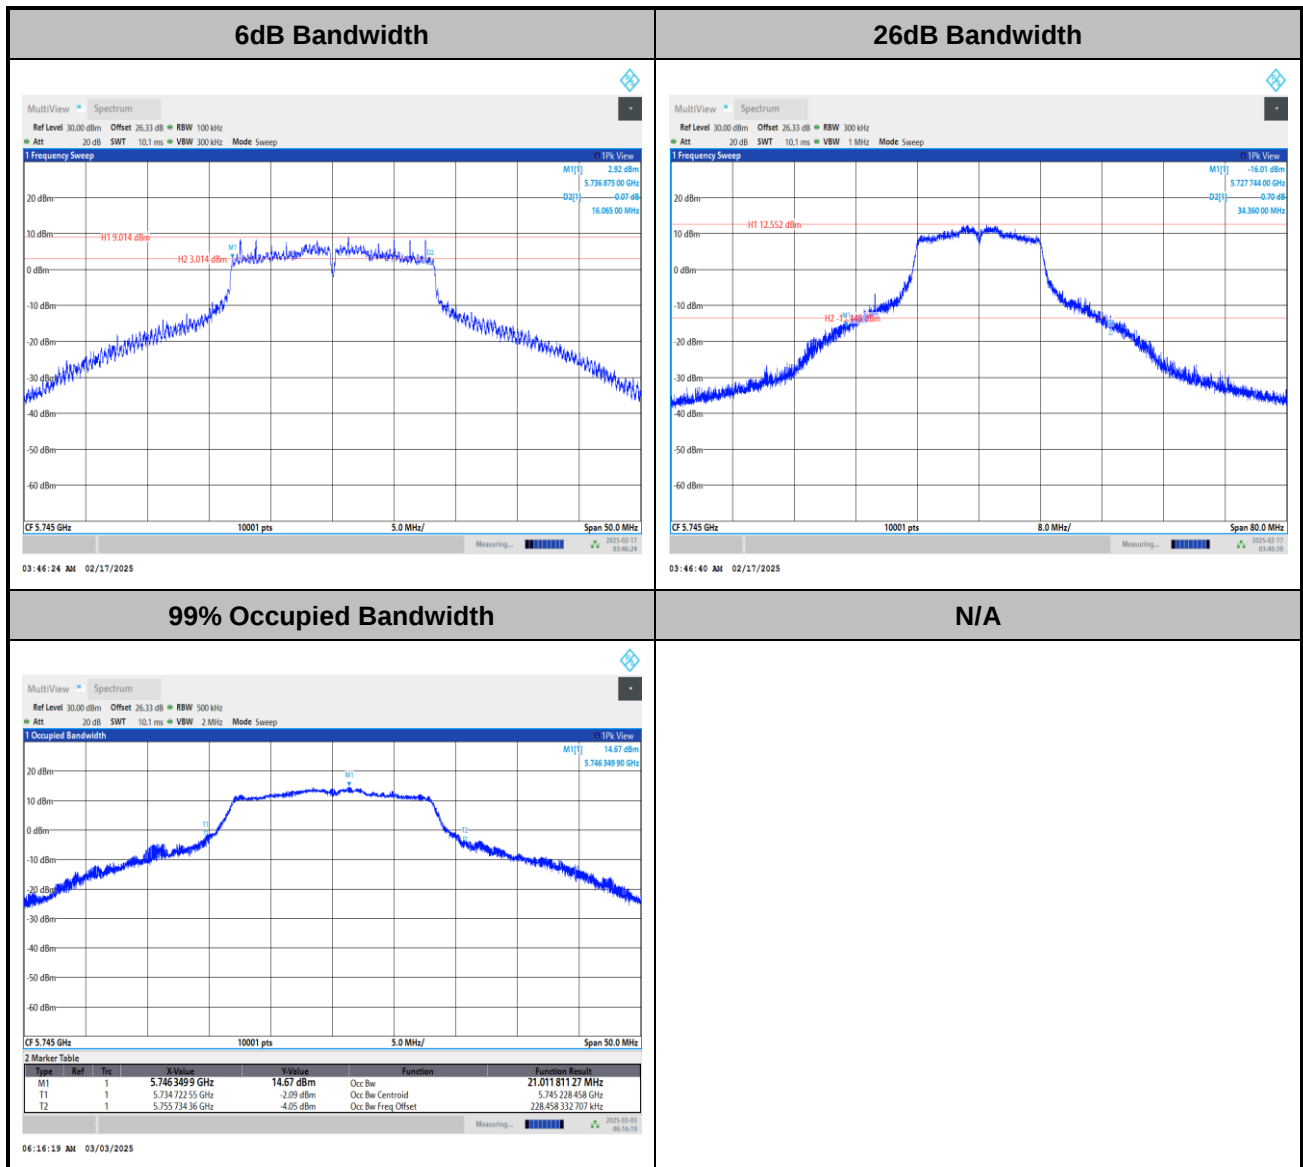







<802.11be EHT40>


6dB Bandwidth

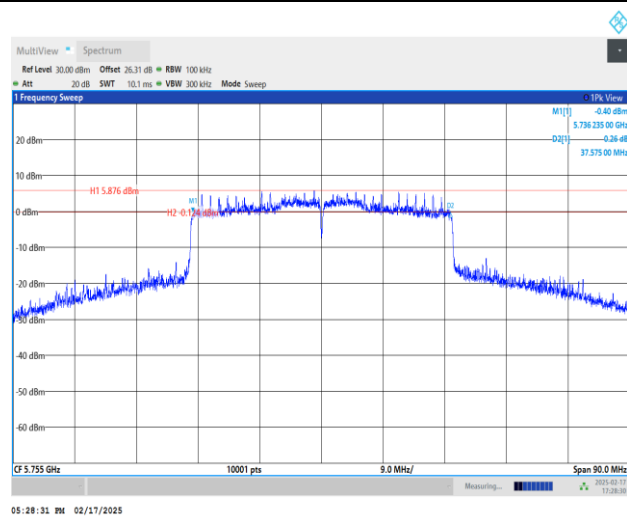

26dB Bandwidth

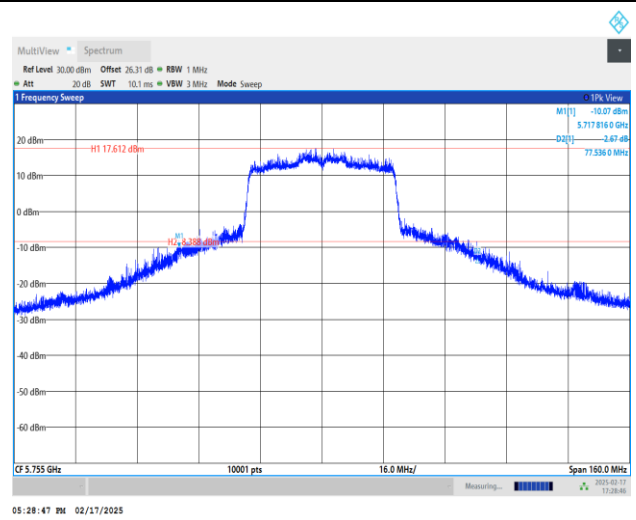

99% Occupied Bandwidth

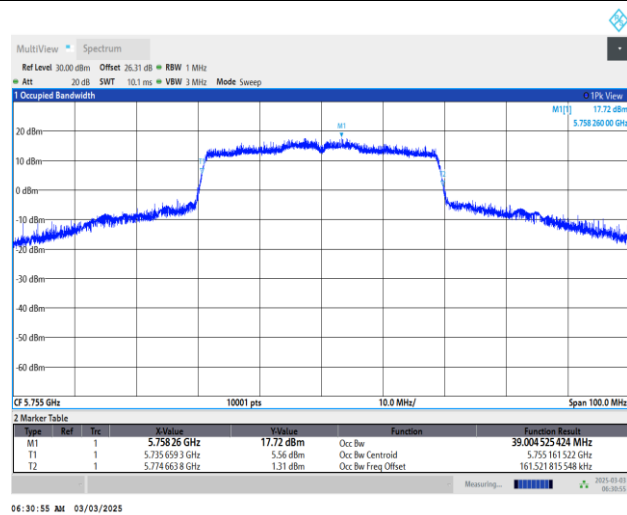


N/A




<802.11be EHT80>


6dB Bandwidth

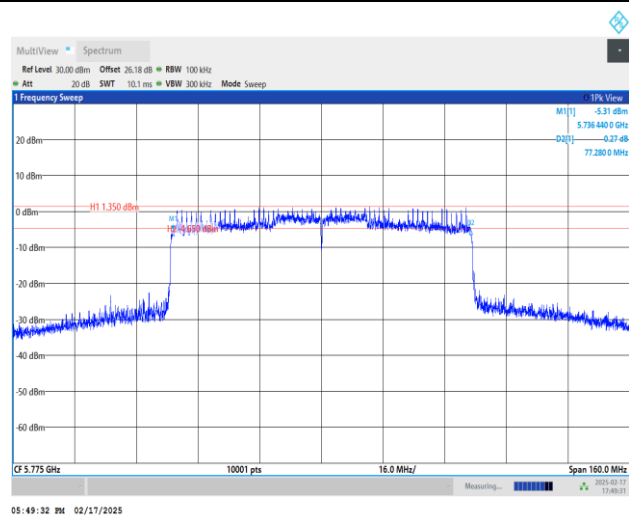

26dB Bandwidth

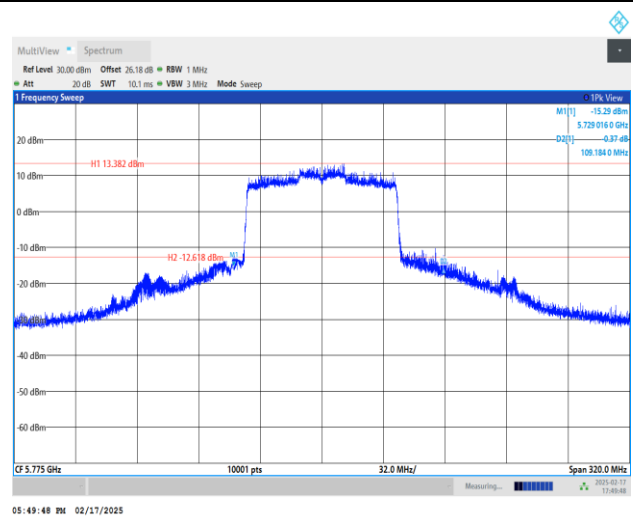

99% Occupied Bandwidth

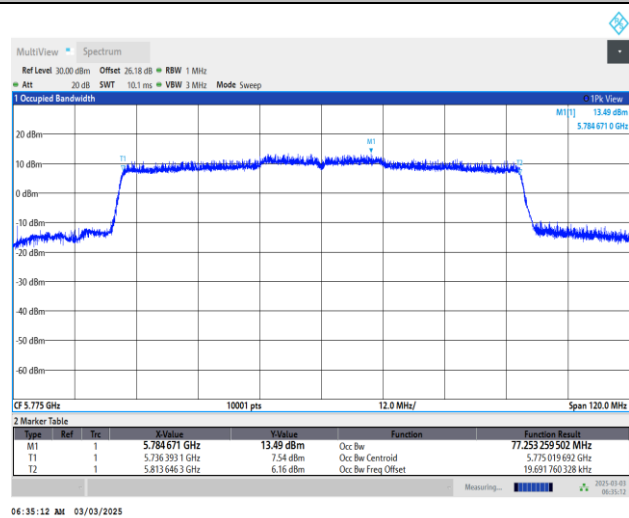


N/A




Test Result of Power Spectral Density

<802.11a>

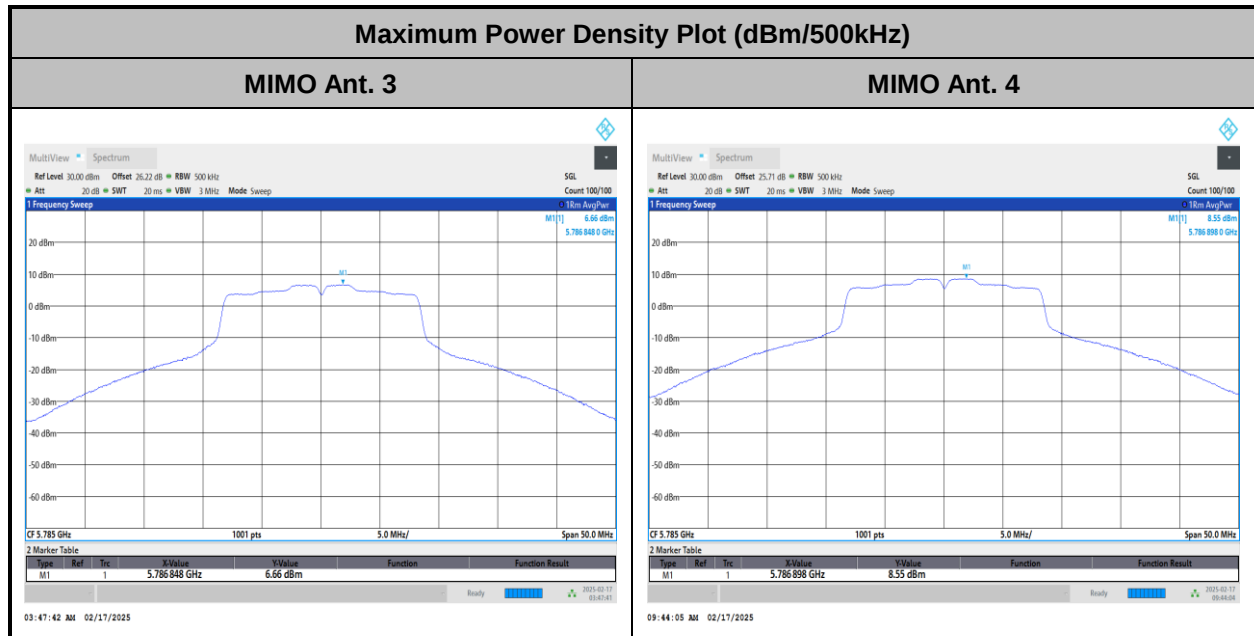


<802.11be EHT20>

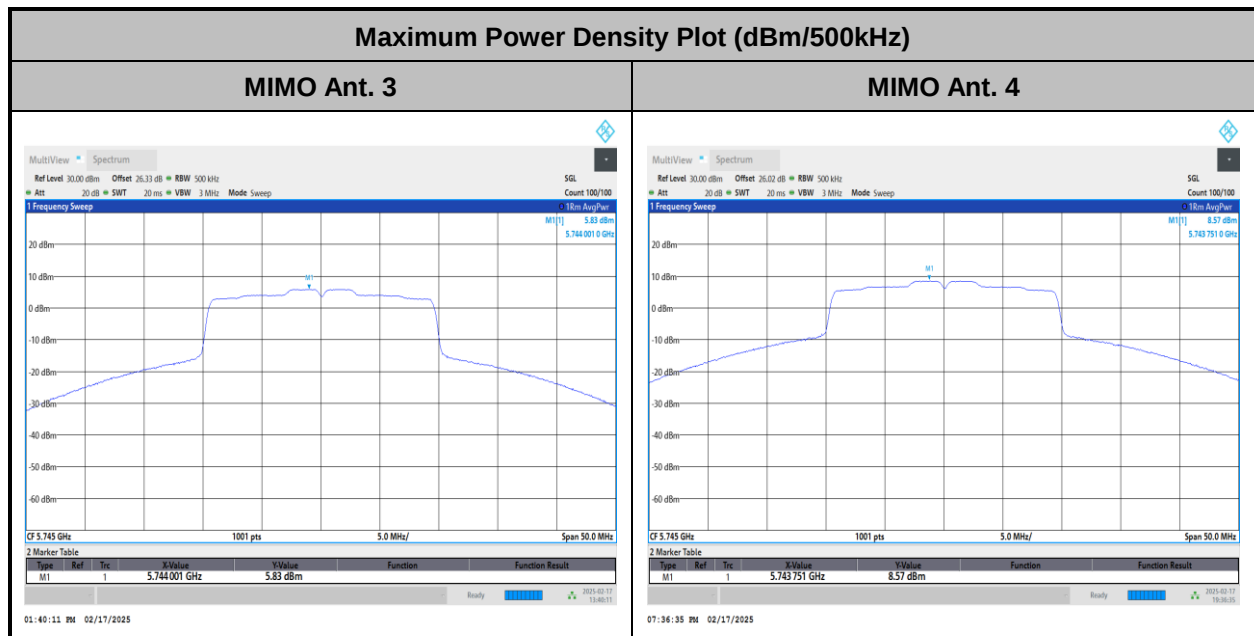




<802.11be EHT40>

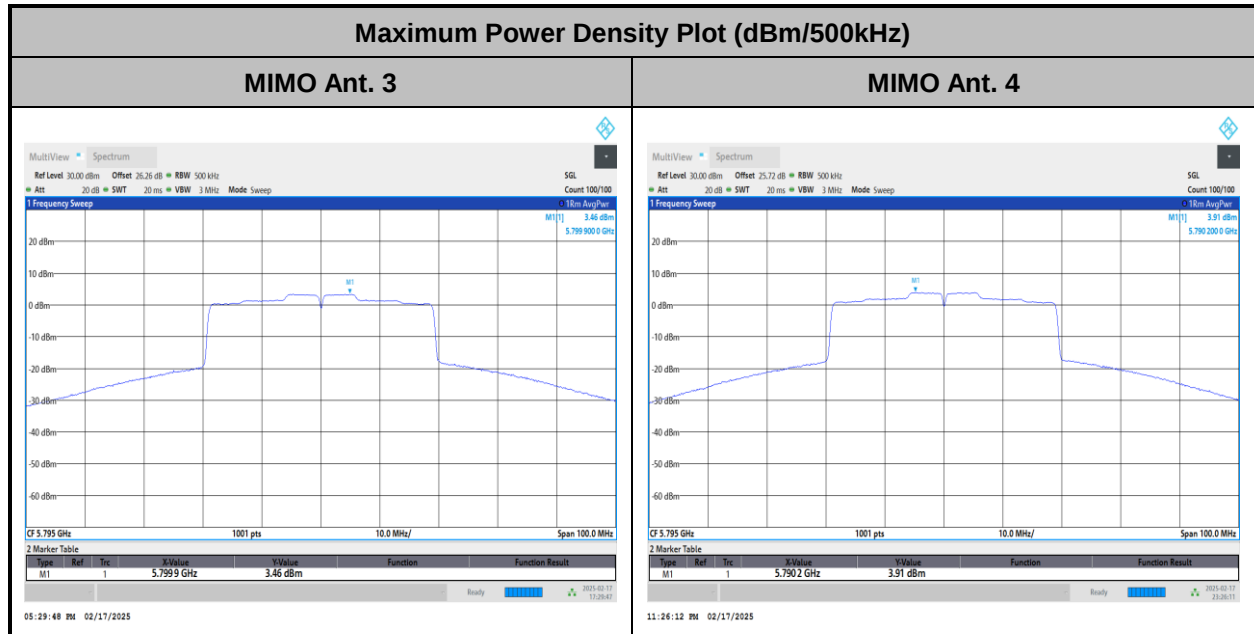

<802.11be EHT80>

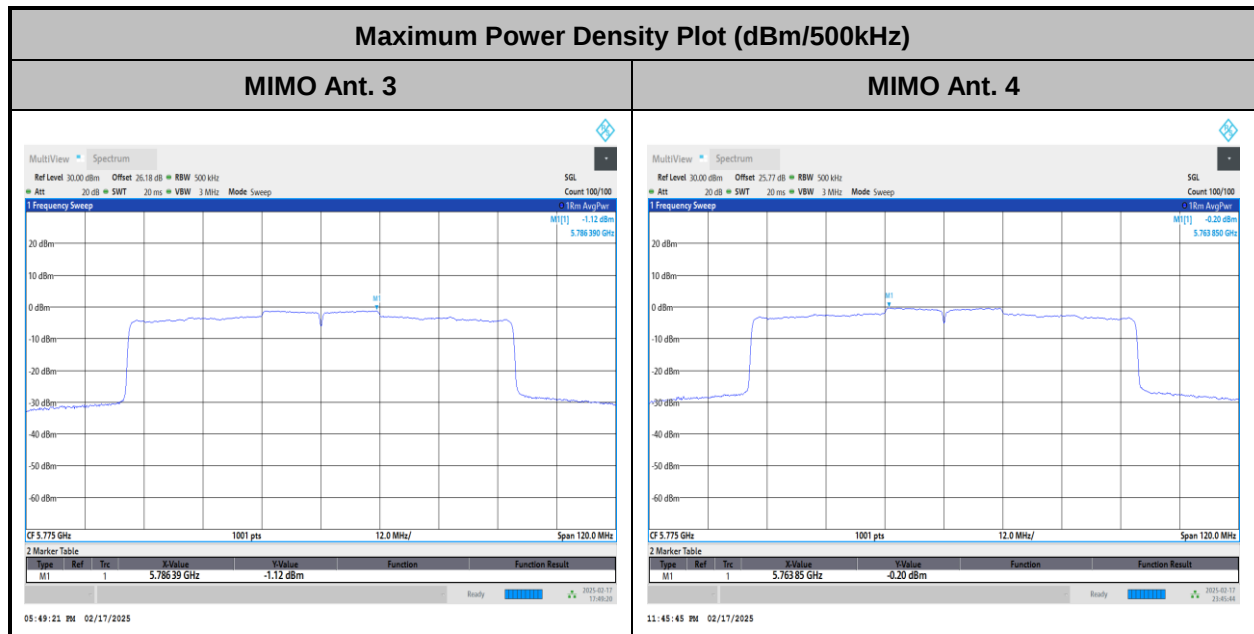



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	16.1~22.7℃
		Relative Humidity :	45.9~48.9%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4N0917
Mode 1
120Vac/60Hz
Line

Full Spectrum

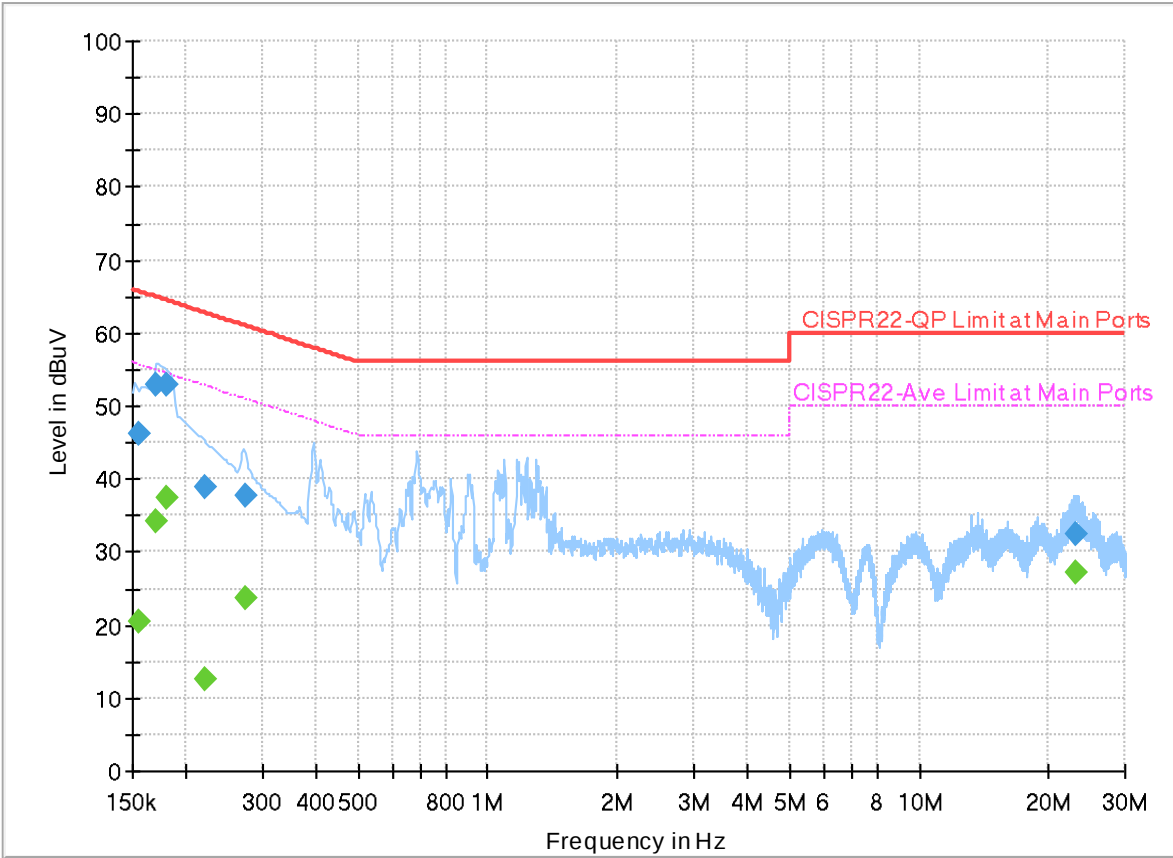

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	20.45	55.75	35.30	L1	OFF	19.8
0.154500	46.32	---	65.75	19.43	L1	OFF	19.8
0.170250	---	34.23	54.95	20.72	L1	OFF	19.8
0.170250	52.95	---	64.95	12.00	L1	OFF	19.8
0.179250	---	37.48	54.52	17.04	L1	OFF	19.8
0.179250	52.86	---	64.52	11.66	L1	OFF	19.8
0.219750	---	12.44	52.83	40.39	L1	OFF	19.8
0.219750	38.98	---	62.83	23.85	L1	OFF	19.8
0.273750	---	23.73	51.00	27.27	L1	OFF	19.8
0.273750	37.81	---	61.00	23.19	L1	OFF	19.8
23.082000	---	27.07	50.00	22.93	L1	OFF	20.7
23.082000	32.52	---	60.00	27.48	L1	OFF	20.7

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4N0917
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

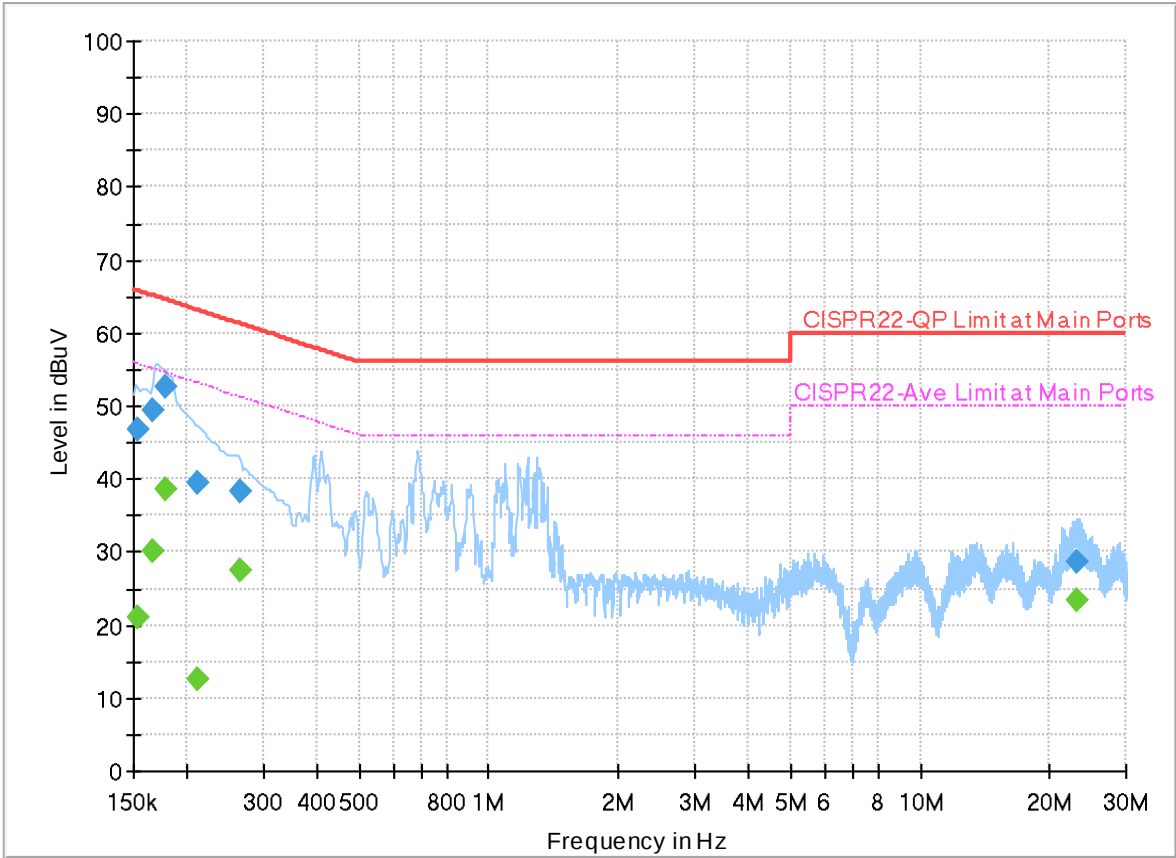

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.153004	---	21.04	55.84	34.80	N	OFF	19.8
0.153004	46.76	---	65.84	19.08	N	OFF	19.8
0.165750	---	30.10	55.17	25.07	N	OFF	19.8
0.165750	49.55	---	65.17	15.62	N	OFF	19.8
0.177810	---	38.48	54.59	16.11	N	OFF	19.8
0.177810	52.63	---	64.59	11.96	N	OFF	19.8
0.210750	---	12.48	53.18	40.70	N	OFF	19.8
0.210750	39.53	---	63.18	23.65	N	OFF	19.8
0.264750	---	27.43	51.28	23.85	N	OFF	19.8
0.264750	38.35	---	61.28	22.93	N	OFF	19.8
22.980750	---	23.42	50.00	26.58	N	OFF	20.8
22.980750	28.76	---	60.00	31.24	N	OFF	20.8



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Ken Kuo, Tim Lee and Wilson Wu	Temperature :	21.7~23.5°C
		Relative Humidity :	55.2~62.4%

Note symbol

-L	Low channel location
-R	High channel location



<For B1~3>

C1-1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	3+4	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	3+4	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	3+4	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	3+4	802.11be EHT20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	3+4	802.11be EHT20	36	5180	MCS0	Partial 26/0 RU	-
Mode 6	U-NII-1	5.15-5.25	3+4	802.11be EHT20	36	5180	MCS0	Partial 52/37 RU	-
Mode 7	U-NII-1	5.15-5.25	3+4	802.11be EHT20	36	5180	MCS0	Partial 106/53 RU	-
Mode 8	U-NII-1	5.15-5.25	3+4	802.11be EHT20	44	5220	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	3+4	802.11be EHT20	48	5240	MCS0	Full RU	-
Mode 10	U-NII-1	5.15-5.25	3+4	802.11be EHT40	38	5190	MCS0	Full RU	-
Mode 11	U-NII-1	5.15-5.25	3+4	802.11be EHT40	46	5230	MCS0	Full RU	-
Mode 12	U-NII-1	5.15-5.25	3+4	802.11be EHT80	42	5210	MCS0	Full RU	-
Mode 13	U-NII-2A	5.25-5.35	3+4	802.11a	52	5260	6Mbps	-	-
Mode 14	U-NII-2A	5.25-5.35	3+4	802.11a	60	5300	6Mbps	-	-
Mode 15	U-NII-2A	5.25-5.35	3+4	802.11a	64	5320	6Mbps	-	-
Mode 16	U-NII-2A	5.25-5.35	3+4	802.11be EHT20	52	5260	MCS0	Full RU	-
Mode 17	U-NII-2A	5.25-5.35	3+4	802.11be EHT20	60	5300	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	3+4	802.11be EHT20	64	5320	MCS0	Full RU	-
Mode 19	U-NII-2A	5.25-5.35	3+4	802.11be EHT20	64	5320	MCS0	Partial 26/8 RU	-
Mode 20	U-NII-2A	5.25-5.35	3+4	802.11be EHT20	64	5320	MCS0	Partial 52/40 RU	-
Mode 21	U-NII-2A	5.25-5.35	3+4	802.11be EHT20	64	5320	MCS0	Partial 106/54 RU	-
Mode 22	U-NII-2A	5.25-5.35	3+4	802.11be EHT40	54	5270	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2A	5.25-5.35	3+4	802.11be EHT40	62	5310	MCS0	Full RU	-
Mode 24	U-NII-2A	5.25-5.35	3+4	802.11be EHT80	58	5290	MCS0	Full RU	-
Mode 25	U-NII-2A	5.25-5.35	3+4	802.11be EHT160	50	5250	MCS0	Full RU	-
Mode 26	U-NII-2C	5.47-5.725	3+4	802.11a	100	5500	6Mbps	-	-
Mode 27	U-NII-2C	5.47-5.725	3+4	802.11a	116	5580	6Mbps	-	-
Mode 28	U-NII-2C	5.47-5.725	3+4	802.11a	140	5700	6Mbps	-	-
Mode 29	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	100	5500	MCS0	Full RU	-
Mode 30	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	100	5500	MCS0	Partial 26/0 RU	-
Mode 31	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	100	5500	MCS0	Partial 52/37 RU	-
Mode 32	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	100	5500	MCS0	Partial 106/53 RU	-
Mode 33	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	116	5580	MCS0	Full RU	-
Mode 34	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	140	5700	MCS0	Full RU	-
Mode 35	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	140	5700	MCS0	Partial 26/8 RU	-
Mode 36	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	140	5700	MCS0	Partial 52/40 RU	-
Mode 37	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	140	5700	MCS0	Partial 106/54 RU	-
Mode 38	U-NII-2C	5.47-5.725	3+4	802.11be EHT40	102	5510	MCS0	Full RU	-
Mode 39	U-NII-2C	5.47-5.725	3+4	802.11be EHT40	110	5550	MCS0	Full RU	-
Mode 40	U-NII-2C	5.47-5.725	3+4	802.11be EHT40	134	5670	MCS0	Full RU	-
Mode 41	U-NII-2C	5.47-5.725	3+4	802.11be EHT80	106	5530	MCS0	Full RU	-
Mode 42	U-NII-2C	5.47-5.725	3+4	802.11be EHT80	122	5610	MCS0	Full RU	-
Mode 43	U-NII-2C	5.47-5.725	3+4	802.11be EHT160	114	5570	MCS0	Full RU	-
Mode 44	U-NII-2C	5.47-5.725	3+4	802.11a	144	5720	6Mbps	-	-
Mode 45	U-NII-2C	5.47-5.725	3+4	802.11be EHT20	144	5720	MCS0	Full RU	-
Mode 46	U-NII-2C	5.47-5.725	3+4	802.11be EHT40	142	5710	MCS0	Full RU	-
Mode 47	U-NII-2C	5.47-5.725	3+4	802.11be EHT80	138	5690	MCS0	Full RU	-
Mode 79	U-NII-2C	5.47-5.725	3+4	802.11be EHT40	110	5550	MCS0	Full RU	LF
Mode 80	U-NII-2C	5.47-5.725	3+4	802.11be EHT40	110	5550	MCS0	Full RU	SHF



C1-2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5149.76	51.59	54.00	-2.41	V	Avg.	Pass	-	Band Edge
1	802.11a	36	10360.00	48.21	68.20	-19.99	V	Peak	Pass	-	Harmonic
2	802.11a	44	5149.16	40.84	54.00	-13.16	H	Avg.	Pass	-	Band Edge
2	802.11a	44	15660.00	40.21	54.00	-13.79	V	Avg.	Pass	-	Harmonic
3	802.11a	48	5149.52	40.05	54.00	-13.95	H	Avg.	Pass	-	Band Edge
3	802.11a	48	15720.00	40.83	54.00	-13.17	V	Avg.	Pass	-	Harmonic
4	802.11be EHT20	36	5149.58	52.34	54.00	-1.66	V	Avg.	Pass	Full RU	Band Edge
4	802.11be EHT20	36	10360.00	48.18	68.20	-20.02	H	Peak	Pass	Full RU	Harmonic
5	802.11be EHT20	36	5138.42	51.03	54.00	-2.97	H	Avg.	Pass	Partial 26/0 RU	Band Edge
5	802.11be EHT20	36	-	-	-	-	-	-	-	Partial 26/0 RU	Harmonic
6	802.11be EHT20	36	5144.18	48.45	54.00	-5.55	H	Avg.	Pass	Partial 52/37 RU	Band Edge
6	802.11be EHT20	36	-	-	-	-	-	-	-	Partial 52/37 RU	Harmonic
7	802.11be EHT20	36	5147.78	49.86	54.00	-4.14	V	Avg.	Pass	Partial 106/53 RU	Band Edge
7	802.11be EHT20	36	-	-	-	-	-	-	-	Partial 106/53 RU	Harmonic
8	802.11be EHT20	44	5149.82	44.88	54.00	-9.12	H	Avg.	Pass	Full RU	Band Edge
8	802.11be EHT20	44	15660.00	38.46	54.00	-15.54	V	Avg.	Pass	Full RU	Harmonic
9	802.11be EHT20	48	5150.00	40.50	54.00	-13.50	H	Avg.	Pass	Full RU	Band Edge
9	802.11be EHT20	48	15720.00	41.51	54.00	-12.49	V	Avg.	Pass	Full RU	Harmonic
10	802.11be EHT40	38	5149.91	51.44	54.00	-2.56	V	Avg.	Pass	Full RU	Band Edge
10	802.11be EHT40	38	10380.00	47.86	68.20	-20.34	V	Peak	Pass	Full RU	Harmonic
11	802.11be EHT40	46	5149.50	52.46	54.00	-1.54	H	Avg.	Pass	Full RU	Band Edge
11	802.11be EHT40	46	10460.00	47.50	68.20	-20.70	H	Peak	Pass	Full RU	Harmonic

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11be EHT80	42	5145.74	51.23	54.00	-2.77	H	Avg.	Pass	Full RU	Band Edge
12	802.11be EHT80	42	10420.00	47.33	68.20	-20.87	V	Peak	Pass	Full RU	Harmonic
13	802.11a	52	5350.20	40.19	54.00	-13.81	H	Avg.	Pass	-	Band Edge
13	802.11a	52	15780.00	40.75	54.00	-13.25	V	Avg.	Pass	-	Harmonic
14	802.11a	60	5351.20	48.35	54.00	-5.65	H	Avg.	Pass	-	Band Edge
14	802.11a	60	15900.00	39.69	54.00	-14.31	V	Avg.	Pass	-	Harmonic
15	802.11a	64	5350.10	52.22	54.00	-1.78	H	Avg.	Pass	-	Band Edge
15	802.11a	64	10640.00	46.77	74.00	-27.23	V	Peak	Pass	-	Harmonic
16	802.11be EHT20	52	5352.00	41.24	54.00	-12.76	H	Avg.	Pass	Full RU	Band Edge
16	802.11be EHT20	52	15780.00	44.34	54.00	-9.66	V	Avg.	Pass	Full RU	Harmonic
17	802.11be EHT20	60	5350.88	50.85	54.00	-3.15	H	Avg.	Pass	Full RU	Band Edge
17	802.11be EHT20	60	15900.00	42.55	54.00	-11.45	V	Avg.	Pass	Full RU	Harmonic
18	802.11be EHT20	64	5350.10	51.32	54.00	-2.68	H	Avg.	Pass	Full RU	Band Edge
18	802.11be EHT20	64	10640.00	47.10	74.00	-26.90	H	Peak	Pass	Full RU	Harmonic
19	802.11be EHT20	64	5362.14	49.95	54.00	-4.05	H	Avg.	Pass	Partial 26/8 RU	Band Edge
19	802.11be EHT20	64	-	-	-	-	-	-	-	Partial 26/8 RU	Harmonic
20	802.11be EHT20	64	5350.10	51.45	54.00	-2.55	H	Avg.	Pass	Partial 52/40 RU	Band Edge
20	802.11be EHT20	64	-	-	-	-	-	-	-	Partial 52/40 RU	Harmonic
21	802.11be EHT20	64	5350.38	52.46	54.00	-1.54	H	Avg.	Pass	Partial 106/54 RU	Band Edge
21	802.11be EHT20	64	-	-	-	-	-	-	-	Partial 106/54 RU	Harmonic
22	802.11be EHT40	54	5351.89	51.89	54.00	-2.11	H	Avg.	Pass	Full RU	Band Edge
22	802.11be EHT40	54	10540.00	47.42	68.20	-20.78	V	Peak	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11be EHT40	62	5350.05	52.47	54.00	-1.53	H	Avg.	Pass	Full RU	Band Edge
23	802.11be EHT40	62	10620.00	46.79	74.00	-27.21	V	Peak	Pass	Full RU	Harmonic
24	802.11be EHT80	58	5352.05	50.50	54.00	-3.50	H	Avg.	Pass	Full RU	Band Edge
24	802.11be EHT80	58	10580.00	47.45	68.20	-20.75	V	Peak	Pass	Full RU	Harmonic
25	802.11be EHT160	50	5373.69	46.15	54.00	-7.85	H	Avg.	Pass	Full RU	Band Edge
25	802.11be EHT160	50	10500.00	47.98	68.20	-20.22	V	Peak	Pass	Full RU	Harmonic
26	802.11a	100	5469.85	66.38	68.20	-1.82	H	Peak	Pass	-	Band Edge
26	802.11a	100	16500.00	47.97	68.20	-20.23	H	Peak	Pass	-	Harmonic
27	802.11a	116	5459.94	40.53	54.00	-13.47	H	Avg.	Pass	-	Band Edge
27	802.11a	116	16740.00	53.96	68.20	-14.24	H	Peak	Pass	-	Harmonic
28	802.11a	140	5725.61	65.84	68.20	-2.36	V	Peak	Pass	-	Band Edge
28	802.11a	140	17100.00	47.35	68.20	-20.85	V	Peak	Pass	-	Harmonic
29	802.11be EHT20	100	5468.80	66.16	68.20	-2.04	H	Peak	Pass	Full RU	Band Edge
29	802.11be EHT20	100	16500.00	47.14	68.20	-21.06	V	Peak	Pass	Full RU	Harmonic
30	802.11be EHT20	100	5465.80	65.74	68.20	-2.46	H	Peak	Pass	Partial 26/0 RU	Band Edge
30	802.11be EHT20	100	-	-	-	-	-	-	-	Partial 26/0 RU	Harmonic
31	802.11be EHT20	100	5464.30	64.50	68.20	-3.70	V	Peak	Pass	Partial 52/37 RU	Band Edge
31	802.11be EHT20	100	-	-	-	-	-	-	-	Partial 52/37 RU	Harmonic
32	802.11be EHT20	100	5467.75	65.89	68.20	-2.31	H	Peak	Pass	Partial 106/53 RU	Band Edge
32	802.11be EHT20	100	-	-	-	-	-	-	-	Partial 106/53 RU	Harmonic
33	802.11be EHT20	116	5459.94	40.69	54.00	-13.31	H	Avg.	Pass	Full RU	Band Edge
33	802.11be EHT20	116	16740.00	49.91	68.20	-18.29	H	Peak	Pass	Full RU	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
34	802.11be EHT20	140	5725.55	65.78	68.20	-2.42	V	Peak	Pass	Full RU	Band Edge
34	802.11be EHT20	140	17100.00	47.33	68.20	-20.87	H	Peak	Pass	Full RU	Harmonic
35	802.11be EHT20	140	5726.33	63.83	68.20	-4.37	V	Peak	Pass	Partial 26/8 RU	Band Edge
35	802.11be EHT20	140	-	-	-	-	-	-	-	Partial 26/8 RU	Harmonic
36	802.11be EHT20	140	5725.22	65.62	68.20	-2.58	H	Peak	Pass	Partial 52/40 RU	Band Edge
36	802.11be EHT20	140	-	-	-	-	-	-	-	Partial 52/40 RU	Harmonic
37	802.11be EHT20	140	5726.13	65.55	68.20	-2.65	H	Peak	Pass	Partial 106/54 RU	Band Edge
37	802.11be EHT20	140	-	-	-	-	-	-	-	Partial 106/54 RU	Harmonic
38	802.11be EHT40	102	5466.00	63.66	68.20	-4.54	H	Peak	Pass	Full RU	Band Edge
38	802.11be EHT40	102	16530.00	47.80	68.20	-20.40	H	Peak	Pass	Full RU	Harmonic
39	802.11be EHT40	110	5460.00	52.49	54.00	-1.51	H	Avg.	Pass	Full RU	Band Edge
39	802.11be EHT40	110	16650.00	46.85	68.20	-21.35	V	Peak	Pass	Full RU	Harmonic
40	802.11be EHT40	134	5731.09	66.25	68.20	-1.95	V	Peak	Pass	Full RU	Band Edge
40	802.11be EHT40	134	17010.00	47.17	68.20	-21.03	H	Peak	Pass	Full RU	Harmonic
41	802.11be EHT80	106	5463.94	65.77	68.20	-2.43	H	Peak	Pass	Full RU	Band Edge
41	802.11be EHT80	106	16590.00	46.55	68.20	-21.65	H	Peak	Pass	Full RU	Harmonic
42	802.11be EHT80	122	5458.68	52.37	54.00	-1.63	H	Avg.	Pass	Full RU	Band Edge
42	802.11be EHT80	122	16830.00	45.78	68.20	-22.42	V	Peak	Pass	Full RU	Harmonic
43	802.11be EHT160	114	5469.46	65.18	68.20	-3.02	H	Peak	Pass	Full RU	Band Edge
43	802.11be EHT160	114	16710.00	46.77	68.20	-21.43	V	Peak	Pass	Full RU	Harmonic
44	802.11a	144	5364.82	38.76	54.00	-15.24	V	Avg.	Pass	-	Band Edge
44	802.11a	144	17160.00	55.68	68.20	-12.52	H	Peak	Pass	-	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
45	802.11be EHT20	144	5364.43	38.77	54.00	-15.23	H	Avg.	Pass	Full RU	Band Edge
45	802.11be EHT20	144	17160.00	48.42	68.20	-19.78	H	Peak	Pass	Full RU	Harmonic
46	802.11be EHT40	142	5854.00	59.94	68.20	-8.26	V	Peak	Pass	Full RU	Band Edge
46	802.11be EHT40	142	17130.00	47.58	68.20	-20.62	H	Peak	Pass	Full RU	Harmonic
47	802.11be EHT80	138	5458.42	50.08	54.00	-3.92	H	Avg.	Pass	Full RU	Band Edge
47	802.11be EHT80	138	17070.00	46.86	68.20	-21.34	H	Peak	Pass	Full RU	Harmonic
79	LF	110	62.01	31.25	40.00	-8.75	H	Peak	Pass	-	LF
80	SHF	110	34120.00	47.50	74.00	-26.50	V	Peak	Pass	-	SHF

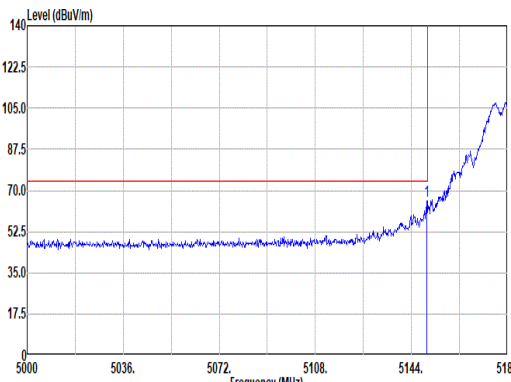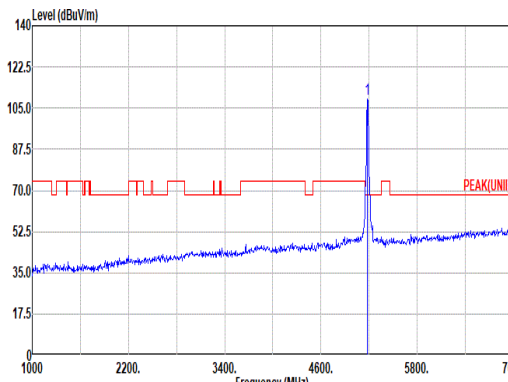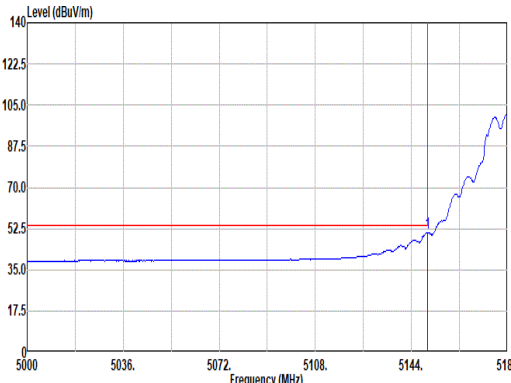
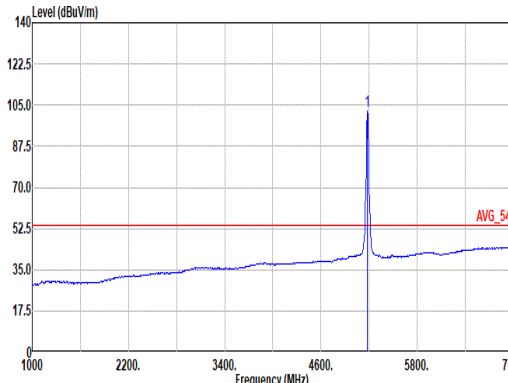


Mode	1																																																																																																
	Band Edge																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																
ANT	3+4																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>65.65</td><td>74.00</td><td>-8.35</td><td>59.17</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>200</td><td>21 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	65.65	74.00	-8.35	59.17	33.20	10.13	36.85	0.00	200	21 PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>109.04</td><td>-----</td><td>-----</td><td>102.43</td><td>33.26</td><td>10.19</td><td>36.84</td><td>0.00</td><td>200</td><td>21 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	109.04	-----	-----	102.43	33.26	10.19	36.84	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5149.76	65.65	74.00	-8.35	59.17	33.20	10.13	36.85	0.00	200	21 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5180.00	109.04	-----	-----	102.43	33.26	10.19	36.84	0.00	200	21 PEAK																																																																																						
Avg																																																																																																	
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>50.77</td><td>54.00</td><td>-3.23</td><td>44.29</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>200</td><td>21 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	50.77	54.00	-3.23	44.29	33.20	10.13	36.85	0.00	200	21 AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>102.37</td><td>-----</td><td>-----</td><td>95.76</td><td>33.26</td><td>10.19</td><td>36.84</td><td>0.00</td><td>200</td><td>21 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.37	-----	-----	95.76	33.26	10.19	36.84	0.00	200
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5149.94	50.77	54.00	-3.23	44.29	33.20	10.13	36.85	0.00	200	21 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5180.00	102.37	-----	-----	95.76	33.26	10.19	36.84	0.00	200	21 AVERAGE																																																																																						

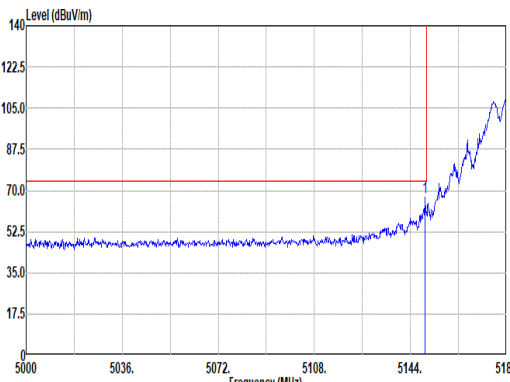
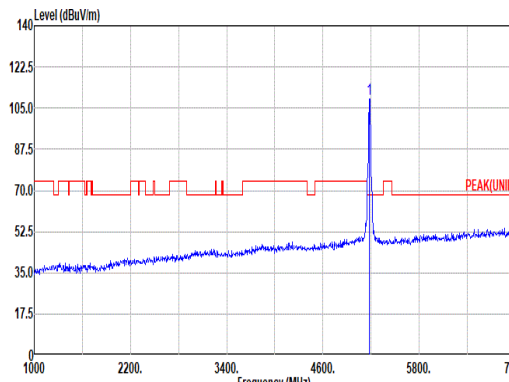
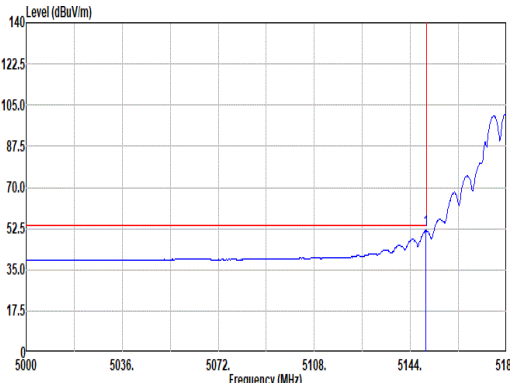
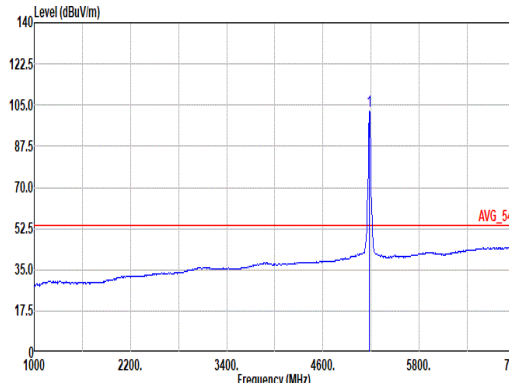


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.58</td><td>67.15</td><td>74.00</td><td>-6.85</td><td>60.67</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>148</td><td>71</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.58	67.15	74.00	-6.85	60.67	33.20	10.13	36.85	0.00	148	71	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>100.89</td><td>-----</td><td>-----</td><td>102.24</td><td>33.28</td><td>10.21</td><td>36.84</td><td>0.00</td><td>148</td><td>71</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	100.89	-----	-----	102.24	33.28	10.21	36.84	0.00	148	71
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.58	67.15	74.00	-6.85	60.67	33.20	10.13	36.85	0.00	148	71	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	100.89	-----	-----	102.24	33.28	10.21	36.84	0.00	148	71	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>51.59</td><td>54.00</td><td>-2.41</td><td>45.11</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>148</td><td>71</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	51.59	54.00	-2.41	45.11	33.20	10.13	36.85	0.00	148	71	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>102.64</td><td>-----</td><td>-----</td><td>96.03</td><td>33.26</td><td>10.19</td><td>36.84</td><td>0.00</td><td>148</td><td>71</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.64	-----	-----	96.03	33.26	10.19	36.84	0.00	148	71
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.76	51.59	54.00	-2.41	45.11	33.20	10.13	36.85	0.00	148	71	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	102.64	-----	-----	96.03	33.26	10.19	36.84	0.00	148	71	AVERAGE																																																																																							



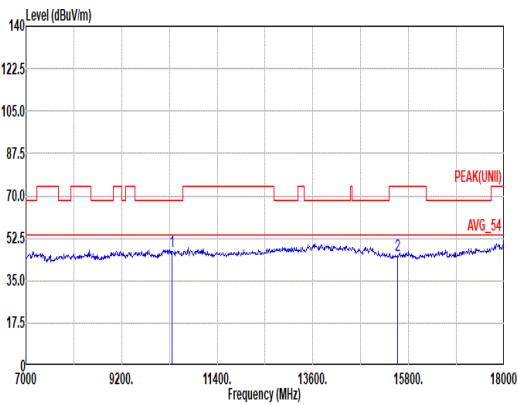
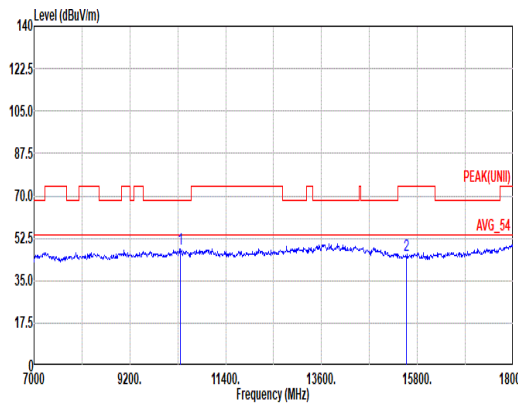


Mode	1																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHZ																																																																																																																								
ANT	3+4																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg																																																																																																																									
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.98</td><td>68.20</td><td>-21.22</td><td>48.80</td><td>38.98</td><td>15.35</td><td>56.69</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>45.35</td><td>74.00</td><td>-28.65</td><td>43.70</td><td>38.42</td><td>18.78</td><td>56.36</td><td>0.81</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.98	68.20	-21.22	48.80	38.98	15.35	56.69	0.54	--	PEAK	2	15540.00	45.35	74.00	-28.65	43.70	38.42	18.78	56.36	0.81	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>48.21</td><td>68.20</td><td>-19.99</td><td>50.03</td><td>38.98</td><td>15.35</td><td>56.69</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>45.50</td><td>74.00</td><td>-28.50</td><td>43.85</td><td>38.42</td><td>18.78</td><td>56.36</td><td>0.81</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.21	68.20	-19.99	50.03	38.98	15.35	56.69	0.54	--	PEAK	2	15540.00	45.50	74.00	-28.50	43.85	38.42	18.78	56.36	0.81	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10360.00	46.98	68.20	-21.22	48.80	38.98	15.35	56.69	0.54	--	PEAK																																																																																																														
2	15540.00	45.35	74.00	-28.65	43.70	38.42	18.78	56.36	0.81	--	PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10360.00	48.21	68.20	-19.99	50.03	38.98	15.35	56.69	0.54	--	PEAK																																																																																																														
2	15540.00	45.50	74.00	-28.50	43.85	38.42	18.78	56.36	0.81	--	PEAK																																																																																																														

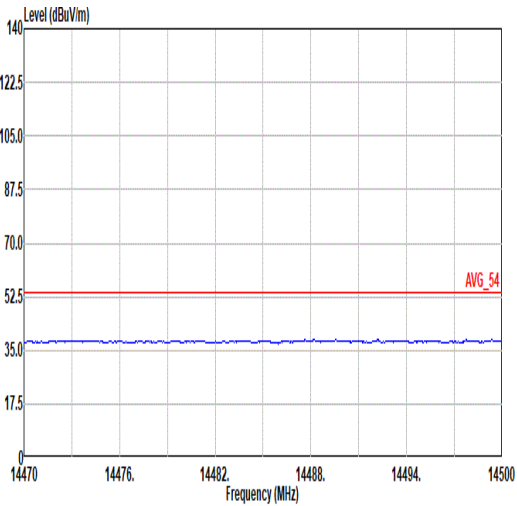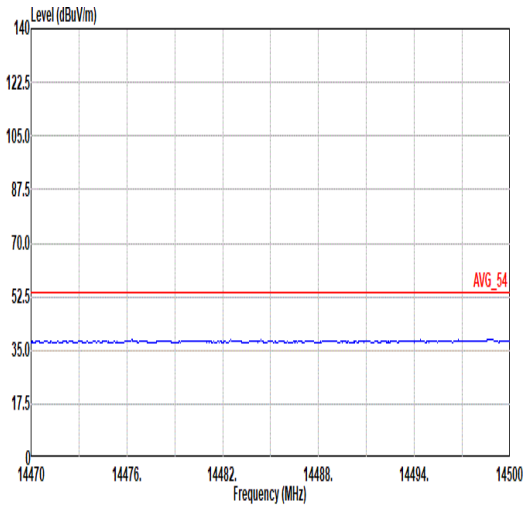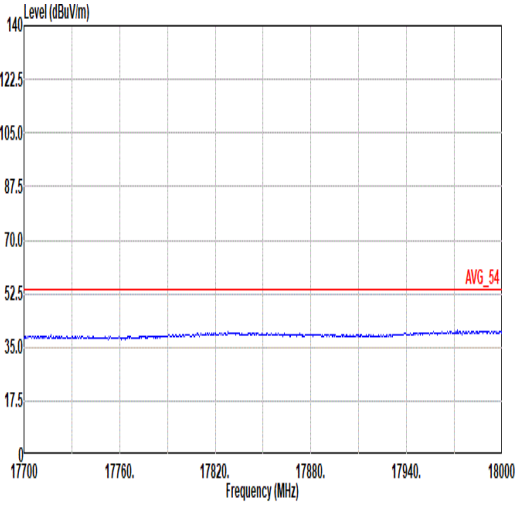
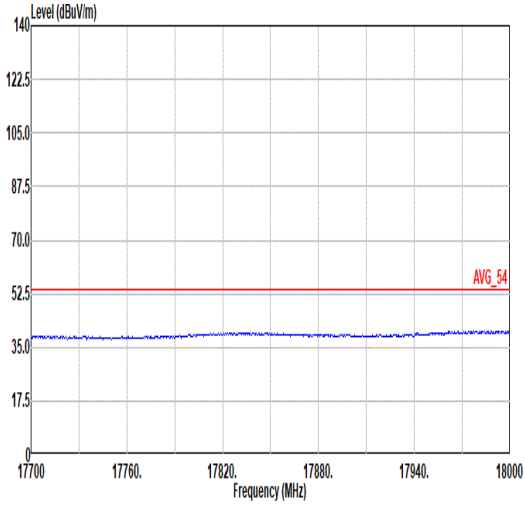


Mode	1	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

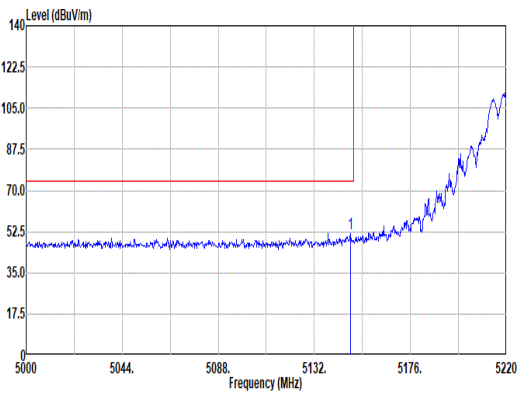
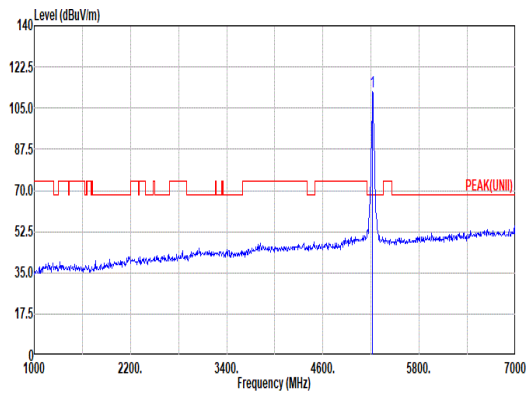
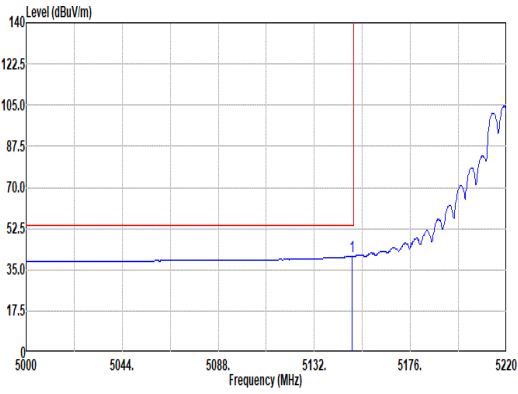
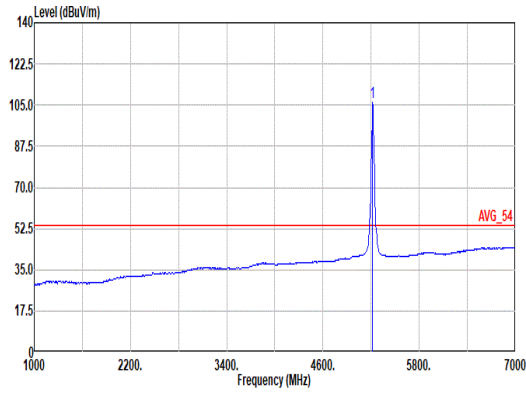


Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.72</td><td>51.86</td><td>74.00</td><td>-22.14</td><td>45.38</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>102</td><td>66</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.72	51.86	74.00	-22.14	45.38	33.20	10.13	36.85	0.00	102	66	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>111.77</td><td>-----</td><td>-----</td><td>105.11</td><td>33.26</td><td>10.24</td><td>36.84</td><td>0.00</td><td>102</td><td>66</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	111.77	-----	-----	105.11	33.26	10.24	36.84	0.00	102	66
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.72	51.86	74.00	-22.14	45.38	33.20	10.13	36.85	0.00	102	66	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	111.77	-----	-----	105.11	33.26	10.24	36.84	0.00	102	66	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.16</td><td>40.84</td><td>54.00</td><td>-13.16</td><td>34.36</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>102</td><td>66</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.16	40.84	54.00	-13.16	34.36	33.20	10.13	36.85	0.00	102	66	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>106.14</td><td>-----</td><td>-----</td><td>99.48</td><td>33.26</td><td>10.24</td><td>36.84</td><td>0.00</td><td>102</td><td>66</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	106.14	-----	-----	99.48	33.26	10.24	36.84	0.00	102	66
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.16	40.84	54.00	-13.16	34.36	33.20	10.13	36.85	0.00	102	66	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	106.14	-----	-----	99.48	33.26	10.24	36.84	0.00	102	66	AVERAGE																																																																																							

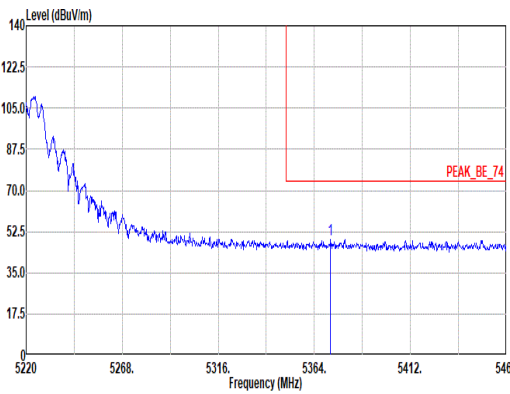
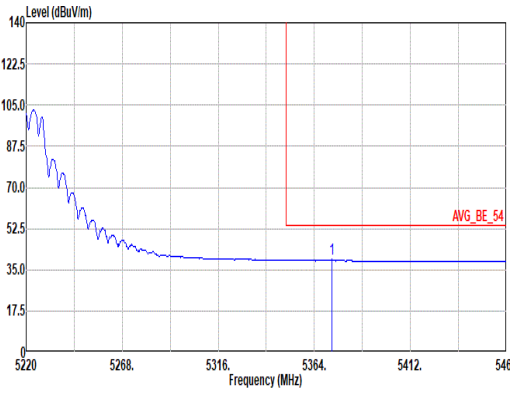


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																							
ANT	3+4																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5372.16</td><td>49.29</td><td>74.00</td><td>-24.71</td><td>42.70</td><td>33.10</td><td>10.30</td><td>36.81</td><td>0.00</td><td>102</td><td>66</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5372.16	49.29	74.00	-24.71	42.70	33.10	10.30	36.81	0.00	102	66	PEAK	Blank					
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5372.16	49.29	74.00	-24.71	42.70	33.10	10.30	36.81	0.00	102	66	PEAK																																												
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5372.64</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>32.77</td><td>33.10</td><td>10.30</td><td>36.81</td><td>0.00</td><td>102</td><td>66</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5372.64	39.36	54.00	-14.64	32.77	33.10	10.30	36.81	0.00	102	66	AVERAGE	Blank					
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5372.64	39.36	54.00	-14.64	32.77	33.10	10.30	36.81	0.00	102	66	AVERAGE																																												

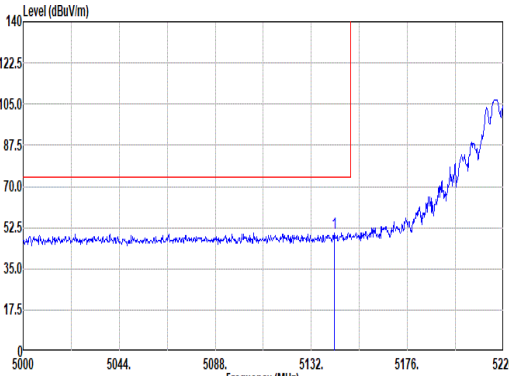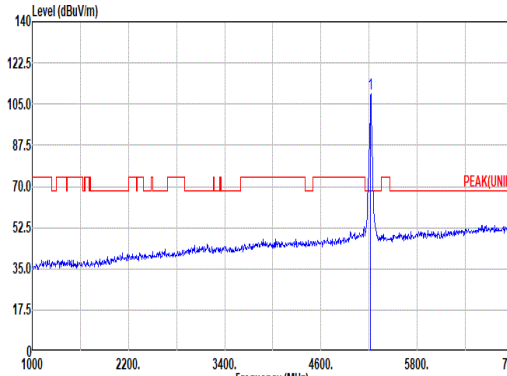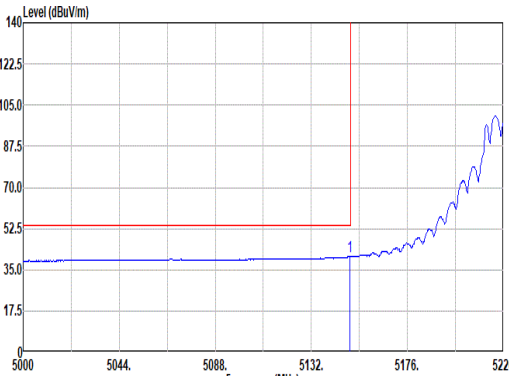
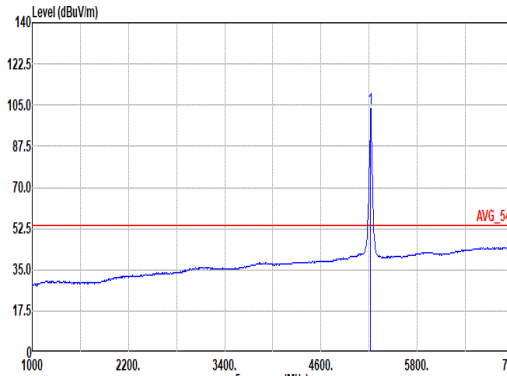


Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.56</td><td>50.45</td><td>74.00</td><td>-23.55</td><td>43.99</td><td>33.19</td><td>10.12</td><td>36.85</td><td>0.00</td><td>227</td><td>143</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.56	50.45	74.00	-23.55	43.99	33.19	10.12	36.85	0.00	227	143	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>109.54</td><td>-----</td><td>-----</td><td>102.88</td><td>33.25</td><td>10.24</td><td>36.83</td><td>0.00</td><td>227</td><td>143</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	109.54	-----	-----	102.88	33.25	10.24	36.83	0.00	227	143
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5142.56	50.45	74.00	-23.55	43.99	33.19	10.12	36.85	0.00	227	143	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	109.54	-----	-----	102.88	33.25	10.24	36.83	0.00	227	143	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.60</td><td>40.75</td><td>54.00</td><td>-13.25</td><td>34.27</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>227</td><td>143</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.60	40.75	54.00	-13.25	34.27	33.20	10.13	36.85	0.00	227	143	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>103.74</td><td>-----</td><td>-----</td><td>97.08</td><td>33.25</td><td>10.24</td><td>36.83</td><td>0.00</td><td>227</td><td>143</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	103.74	-----	-----	97.08	33.25	10.24	36.83	0.00	227	143
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.60	40.75	54.00	-13.25	34.27	33.20	10.13	36.85	0.00	227	143	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	103.74	-----	-----	97.08	33.25	10.24	36.83	0.00	227	143	AVERAGE																																																																																							



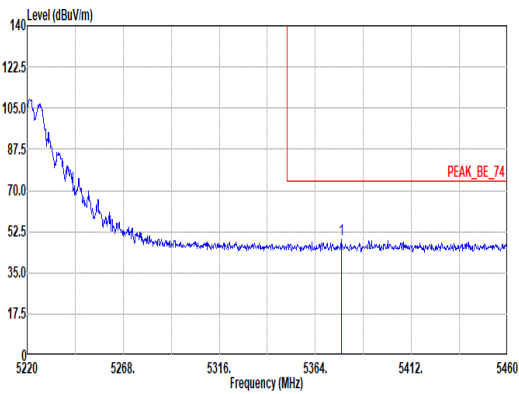
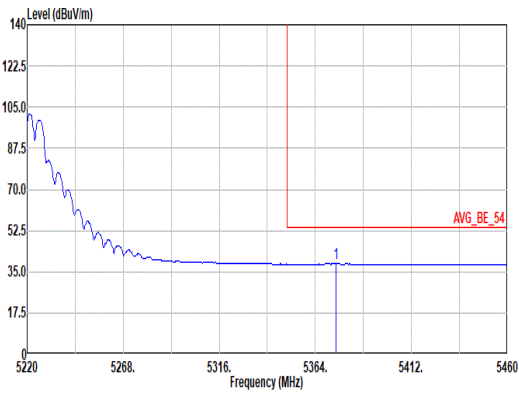


Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																							
ANT	3+4																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5377.20</td><td>49.26</td><td>74.00</td><td>-24.74</td><td>42.67</td><td>33.10</td><td>10.30</td><td>36.81</td><td>0.00</td><td>227</td><td>143</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5377.20	49.26	74.00	-24.74	42.67	33.10	10.30	36.81	0.00	227	143	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5377.20	49.26	74.00	-24.74	42.67	33.10	10.30	36.81	0.00	227	143	PEAK																																												
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5374.32</td><td>38.41</td><td>54.00</td><td>-15.59</td><td>31.82</td><td>33.10</td><td>10.30</td><td>36.81</td><td>0.00</td><td>227</td><td>143</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5374.32	38.41	54.00	-15.59	31.82	33.10	10.30	36.81	0.00	227	143	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5374.32	38.41	54.00	-15.59	31.82	33.10	10.30	36.81	0.00	227	143	AVERAGE																																												



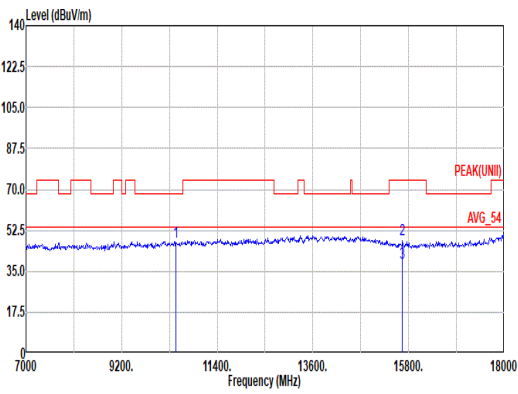
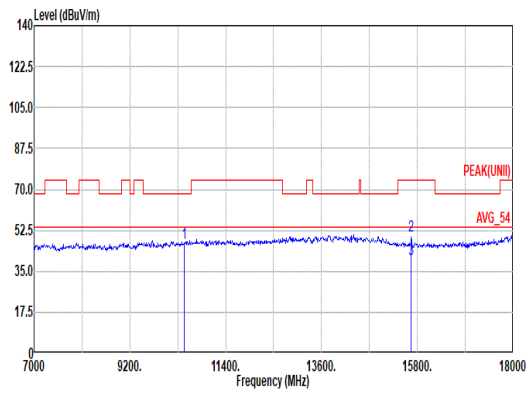


Mode	2										
	Harmonic										
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz										
ANT	3+4										
Pol.	Horizontal						Vertical				
Peak Avg											
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL				
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	10440.00	47.58	68.20	-20.62	49.33	38.90	15.39	56.58	0.54	--	-- PEAK
2	15660.00	48.84	74.00	-25.16	47.48	37.94	18.86	56.26	0.82	300	0 PEAK
3	15660.00	38.36	54.00	-15.64	37.00	37.94	18.86	56.26	0.82	300	0 Average
	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	10440.00	47.10	68.20	-21.10	48.85	38.90	15.39	56.58	0.54	--	-- PEAK
2	15660.00	50.42	74.00	-23.58	49.06	37.94	18.86	56.26	0.82	100	8 PEAK
3	15660.00	40.21	54.00	-13.79	38.85	37.94	18.86	56.26	0.82	100	8 Average

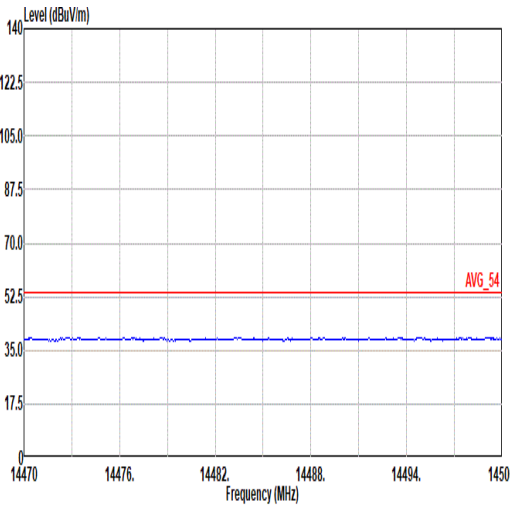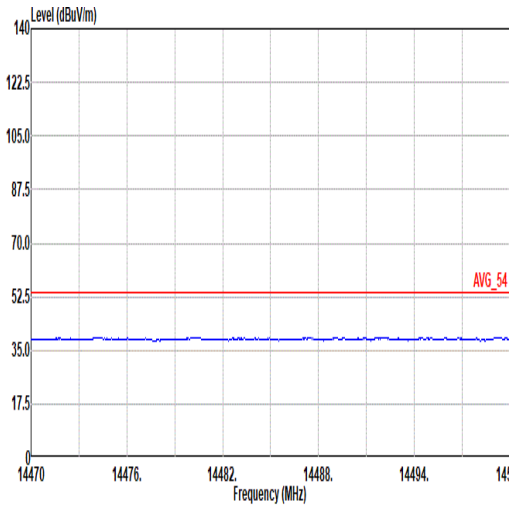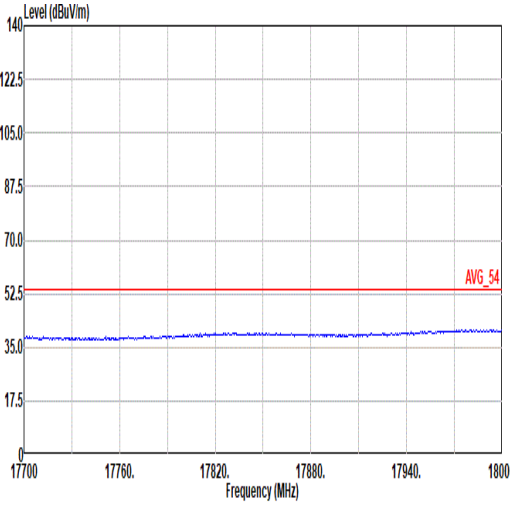
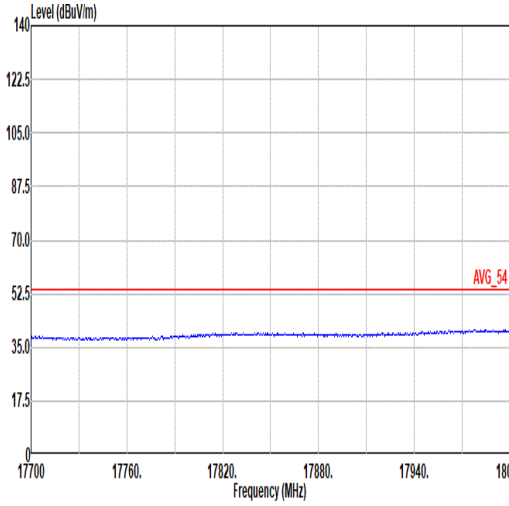


Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL

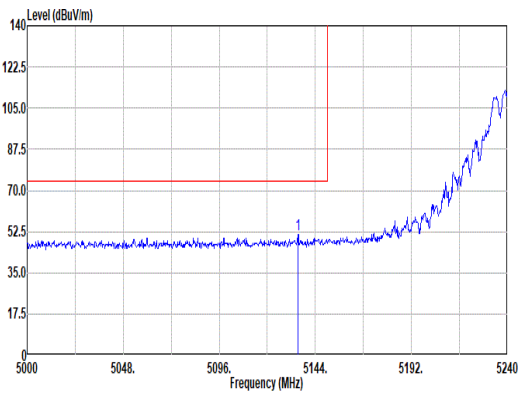
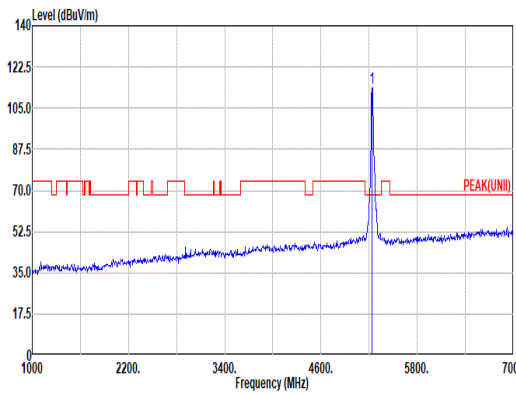
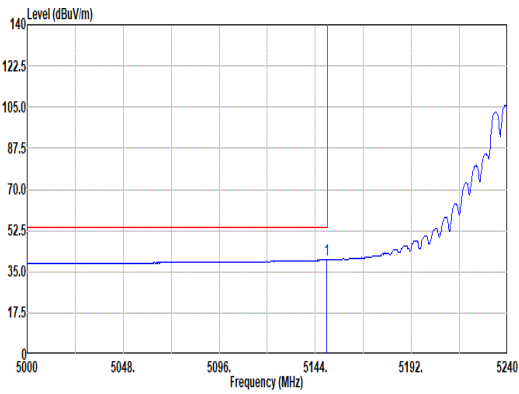
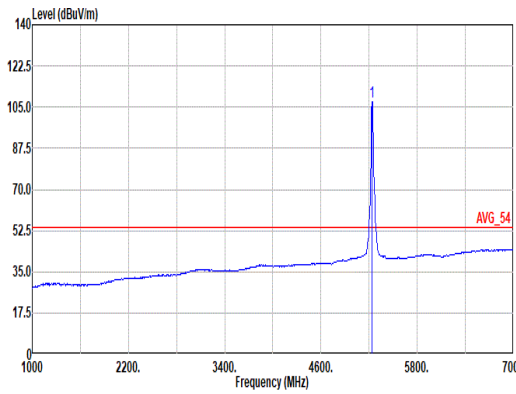


Mode	3																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5135.36</td><td>51.38</td><td>74.00</td><td>-22.62</td><td>44.96</td><td>33.17</td><td>10.10</td><td>36.85</td><td>0.00</td><td>100</td><td>64</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5135.36	51.38	74.00	-22.62	44.96	33.17	10.10	36.85	0.00	100	64	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>113.68</td><td>-----</td><td>-----</td><td>107.04</td><td>33.22</td><td>10.25</td><td>36.83</td><td>0.00</td><td>100</td><td>64</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	113.68	-----	-----	107.04	33.22	10.25	36.83	0.00	100	64
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5135.36	51.38	74.00	-22.62	44.96	33.17	10.10	36.85	0.00	100	64	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	113.68	-----	-----	107.04	33.22	10.25	36.83	0.00	100	64	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.52</td><td>40.05</td><td>54.00</td><td>-13.95</td><td>33.57</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>64</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.52	40.05	54.00	-13.95	33.57	33.20	10.13	36.85	0.00	100	64	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>107.17</td><td>-----</td><td>-----</td><td>100.53</td><td>33.23</td><td>10.24</td><td>36.83</td><td>0.00</td><td>100</td><td>64</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	107.17	-----	-----	100.53	33.23	10.24	36.83	0.00	100	64
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.52	40.05	54.00	-13.95	33.57	33.20	10.13	36.85	0.00	100	64	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	107.17	-----	-----	100.53	33.23	10.24	36.83	0.00	100	64	AVERAGE																																																																																							

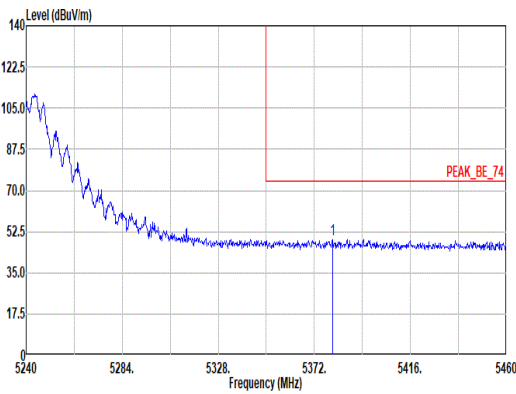
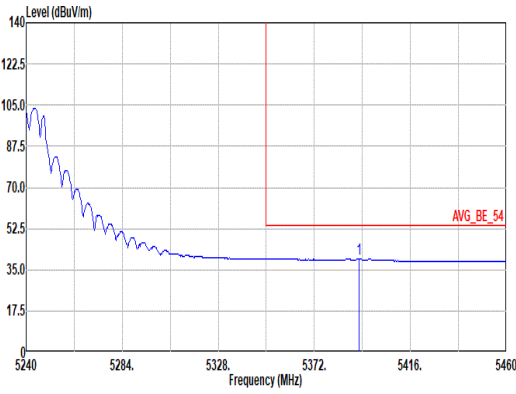


Mode	3																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																					
ANT	3+4																																																					
Pol.	Horizontal						Fundamental																																															
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5300.36</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>42.59</td><td>33.10</td><td>10.30</td><td>36.81</td><td>0.00</td><td>100</td><td>64 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.36	49.18	74.00	-24.82	42.59	33.10	10.30	36.81	0.00	100	64 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5300.36	49.18	74.00	-24.82	42.59	33.10	10.30	36.81	0.00	100	64 PEAK																																											
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5392.46</td><td>39.71</td><td>54.00</td><td>-14.29</td><td>33.11</td><td>33.10</td><td>10.31</td><td>36.81</td><td>0.00</td><td>100</td><td>64 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5392.46	39.71	54.00	-14.29	33.11	33.10	10.31	36.81	0.00	100	64 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5392.46	39.71	54.00	-14.29	33.11	33.10	10.31	36.81	0.00	100	64 AVERAGE																																											

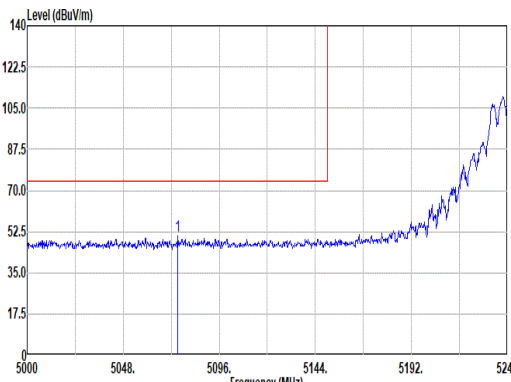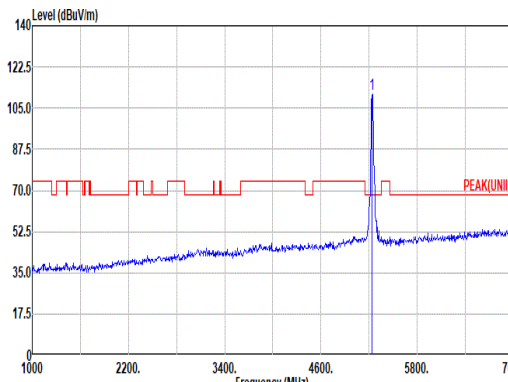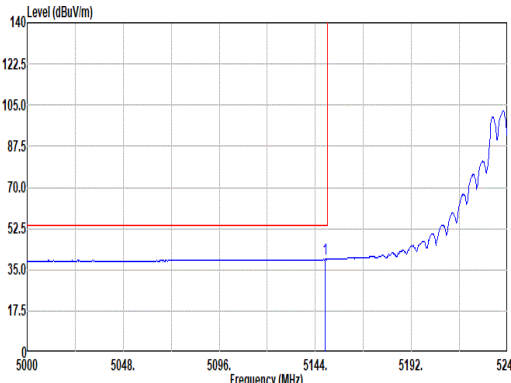
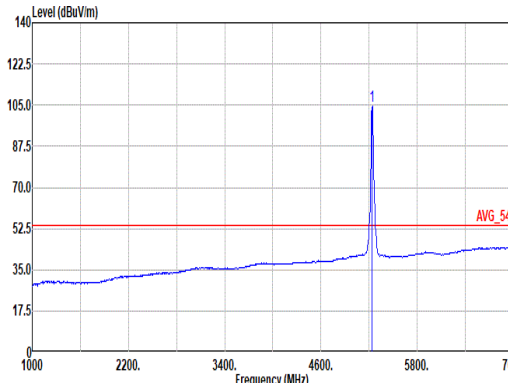


Mode	3																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																	
ANT	3+4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Level (dBuV/m) Frequency (MHz) Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5075.12</td><td>50.80</td><td>74.00</td><td>-23.20</td><td>44.53</td><td>33.15</td><td>9.98</td><td>36.86</td><td>0.00</td><td>300 286 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5075.12	50.80	74.00	-23.20	44.53	33.15	9.98	36.86	0.00	300 286 PEAK	 Level (dBuV/m) Frequency (MHz) Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5240.00</td><td>111.01</td><td>-----</td><td>-----</td><td>104.37</td><td>33.22</td><td>10.25</td><td>36.83</td><td>0.00</td><td>300 286 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5240.00	111.01	-----	-----	104.37	33.22	10.25	36.83	0.00	300 286 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5075.12	50.80	74.00	-23.20	44.53	33.15	9.98	36.86	0.00	300 286 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5240.00	111.01	-----	-----	104.37	33.22	10.25	36.83	0.00	300 286 PEAK																																																																									
Avg	 Level (dBuV/m) Frequency (MHz) Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5149.04</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>32.94</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>300 286 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5149.04	39.42	54.00	-14.58	32.94	33.20	10.13	36.85	0.00	300 286 AVERAGE	 Level (dBuV/m) Frequency (MHz) Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5240.00</td><td>104.55</td><td>-----</td><td>-----</td><td>97.91</td><td>33.22</td><td>10.25</td><td>36.83</td><td>0.00</td><td>300 286 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5240.00	104.55	-----	-----	97.91	33.22	10.25	36.83	0.00	300 286 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5149.04	39.42	54.00	-14.58	32.94	33.20	10.13	36.85	0.00	300 286 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5240.00	104.55	-----	-----	97.91	33.22	10.25	36.83	0.00	300 286 AVERAGE																																																																									



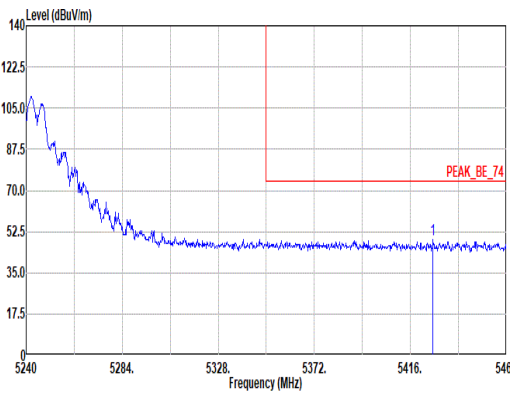
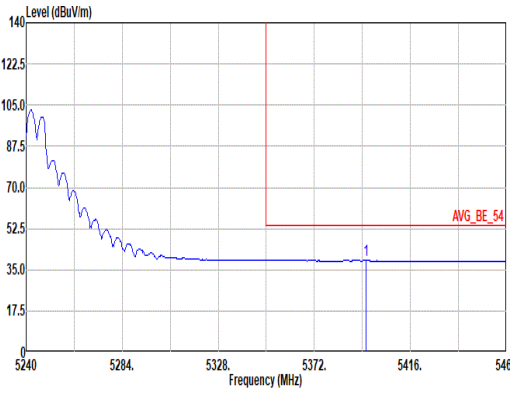


Mode	3																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																						
ANT	3+4																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5426.34</td><td>48.88</td><td>74.00</td><td>-25.12</td><td>42.27</td><td>33.10</td><td>10.31</td><td>36.80</td><td>0.00</td><td>300</td><td>286</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5426.34	48.88	74.00	-25.12	42.27	33.10	10.31	36.80	0.00	300	286	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5426.34	48.88	74.00	-25.12	42.27	33.10	10.31	36.80	0.00	300	286	PEAK																																											
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5395.76</td><td>39.18</td><td>54.00</td><td>-14.82</td><td>32.58</td><td>33.10</td><td>10.31</td><td>36.81</td><td>0.00</td><td>300</td><td>286</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5395.76	39.18	54.00	-14.82	32.58	33.10	10.31	36.81	0.00	300	286	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5395.76	39.18	54.00	-14.82	32.58	33.10	10.31	36.81	0.00	300	286	AVERAGE																																											

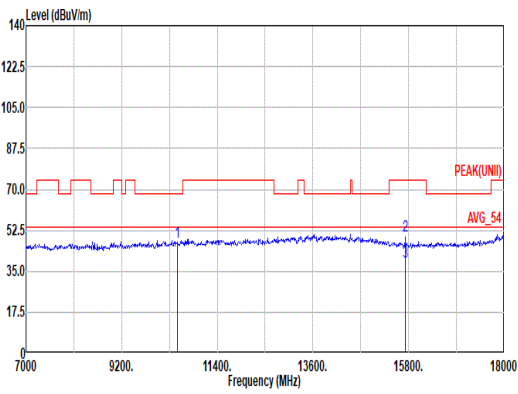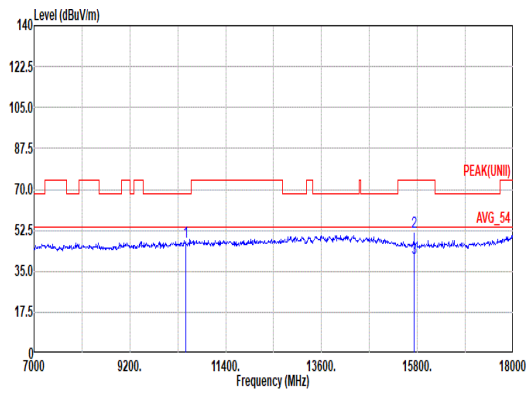

Mode	3																																																																																																																																																					
	Harmonic																																																																																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																																					
ANT	3+4																																																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																																																															
Peak Avg																																																																																																																																																						
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL						Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL																																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.39</td><td>68.20</td><td>-20.81</td><td>49.06</td><td>38.90</td><td>15.41</td><td>56.52</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>48.68</td><td>38.14</td><td>18.89</td><td>56.20</td><td>0.82</td><td>300</td><td>2 PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>38.97</td><td>54.00</td><td>-15.03</td><td>37.32</td><td>38.14</td><td>18.89</td><td>56.20</td><td>0.82</td><td>300</td><td>2 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.39	68.20	-20.81	49.06	38.90	15.41	56.52	0.54	--	PEAK	2	15720.00	50.33	74.00	-23.67	48.68	38.14	18.89	56.20	0.82	300	2 PEAK	3	15720.00	38.97	54.00	-15.03	37.32	38.14	18.89	56.20	0.82	300	2 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.69</td><td>68.20</td><td>-20.51</td><td>49.36</td><td>38.90</td><td>15.41</td><td>56.52</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>51.79</td><td>74.00</td><td>-22.21</td><td>50.14</td><td>38.14</td><td>18.89</td><td>56.20</td><td>0.82</td><td>100</td><td>9 PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>40.83</td><td>54.00</td><td>-13.17</td><td>39.18</td><td>38.14</td><td>18.89</td><td>56.20</td><td>0.82</td><td>100</td><td>9 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.69	68.20	-20.51	49.36	38.90	15.41	56.52	0.54	--	PEAK	2	15720.00	51.79	74.00	-22.21	50.14	38.14	18.89	56.20	0.82	100	9 PEAK	3	15720.00	40.83	54.00	-13.17	39.18	38.14	18.89	56.20	0.82	100	9 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1	10480.00	47.39	68.20	-20.81	49.06	38.90	15.41	56.52	0.54	--	PEAK																																																																																																																																											
2	15720.00	50.33	74.00	-23.67	48.68	38.14	18.89	56.20	0.82	300	2 PEAK																																																																																																																																											
3	15720.00	38.97	54.00	-15.03	37.32	38.14	18.89	56.20	0.82	300	2 Average																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																												
1	10480.00	47.69	68.20	-20.51	49.36	38.90	15.41	56.52	0.54	--	PEAK																																																																																																																																											
2	15720.00	51.79	74.00	-22.21	50.14	38.14	18.89	56.20	0.82	100	9 PEAK																																																																																																																																											
3	15720.00	40.83	54.00	-13.17	39.18	38.14	18.89	56.20	0.82	100	9 Average																																																																																																																																											

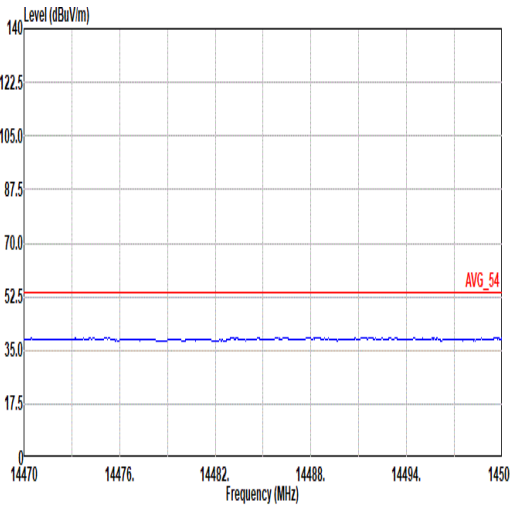
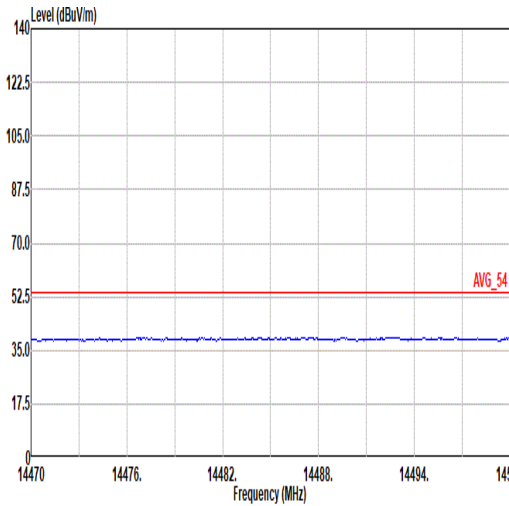
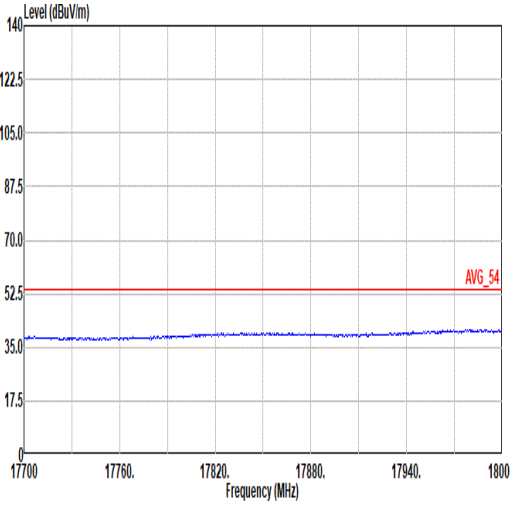
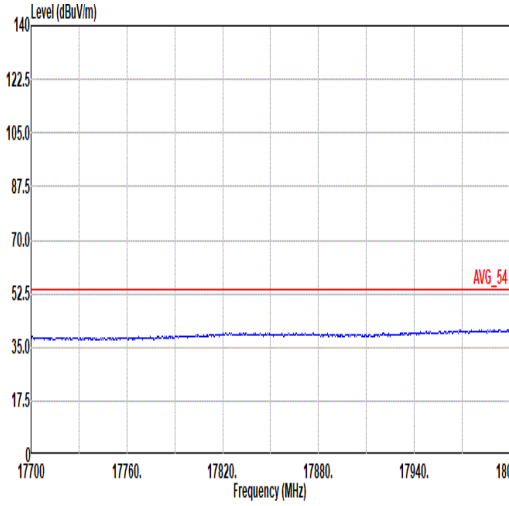


Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL





Mode	4																																																																																																			
	Band Edge																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz																																																																																																			
ANT	3+4																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.96</td><td>63.11</td><td>74.00</td><td>-10.89</td><td>56.63</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>64</td><td>PEAK</td></tr></tbody></table> Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>109.85</td><td>-----</td><td>-----</td><td>103.24</td><td>33.26</td><td>10.19</td><td>36.84</td><td>0.00</td><td>100</td><td>64</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.96	63.11	74.00	-10.89	56.63	33.20	10.13	36.85	0.00	100	64	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	109.85	-----	-----	103.24	33.26	10.19	36.84	0.00	100	64	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5147.96	63.11	74.00	-10.89	56.63	33.20	10.13	36.85	0.00	100	64	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	109.85	-----	-----	103.24	33.26	10.19	36.84	0.00	100	64	PEAK																																																																																								
Avg	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>51.89</td><td>54.00</td><td>-2.11</td><td>45.41</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>64</td><td>AVERAGE</td></tr></tbody></table> Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>103.25</td><td>-----</td><td>-----</td><td>96.64</td><td>33.26</td><td>10.19</td><td>36.84</td><td>0.00</td><td>100</td><td>64</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	51.89	54.00	-2.11	45.41	33.20	10.13	36.85	0.00	100	64	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	103.25	-----	-----	96.64	33.26	10.19	36.84	0.00	100	64	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.94	51.89	54.00	-2.11	45.41	33.20	10.13	36.85	0.00	100	64	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	103.25	-----	-----	96.64	33.26	10.19	36.84	0.00	100	64	AVERAGE																																																																																								

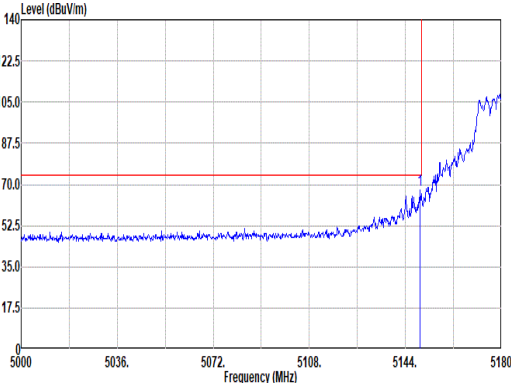
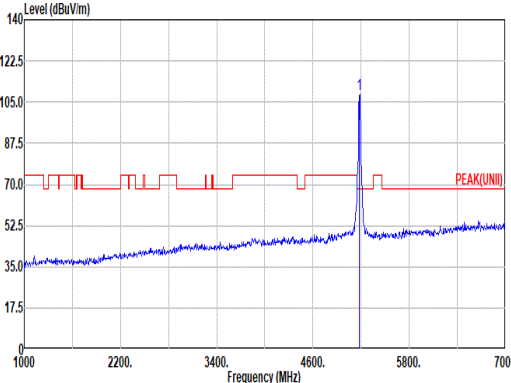
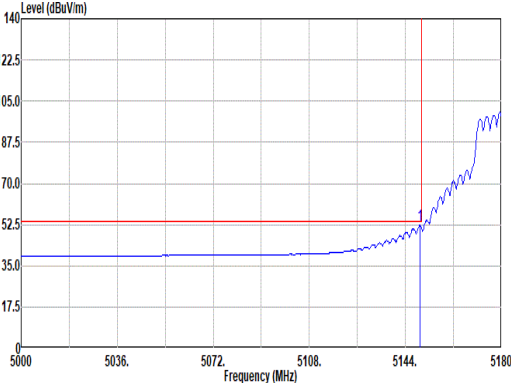
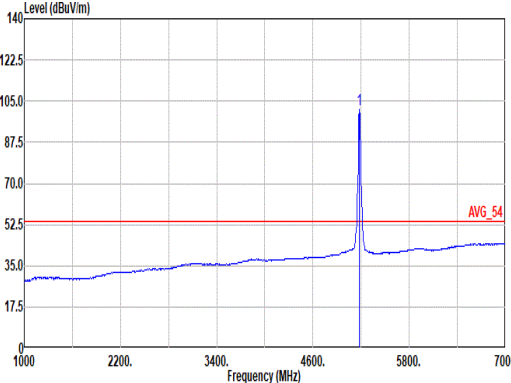


Mode	4																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.58</td><td>67.51</td><td>74.00</td><td>-6.49</td><td>61.03</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>63</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.58	67.51	74.00	-6.49	61.03	33.20	10.13	36.85	0.00	100	63	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>100.22</td><td>-----</td><td>-----</td><td>101.57</td><td>33.28</td><td>10.21</td><td>36.84</td><td>0.00</td><td>100</td><td>63</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	100.22	-----	-----	101.57	33.28	10.21	36.84	0.00	100	63
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.58	67.51	74.00	-6.49	61.03	33.20	10.13	36.85	0.00	100	63	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	100.22	-----	-----	101.57	33.28	10.21	36.84	0.00	100	63	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.58</td><td>52.34</td><td>54.00</td><td>-1.66</td><td>45.86</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>63</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.58	52.34	54.00	-1.66	45.86	33.20	10.13	36.85	0.00	100	63	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.64</td><td>-----</td><td>-----</td><td>95.03</td><td>33.26</td><td>10.19</td><td>36.84</td><td>0.00</td><td>100</td><td>63</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.64	-----	-----	95.03	33.26	10.19	36.84	0.00	100	63
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.58	52.34	54.00	-1.66	45.86	33.20	10.13	36.85	0.00	100	63	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	101.64	-----	-----	95.03	33.26	10.19	36.84	0.00	100	63	AVERAGE																																																																																							



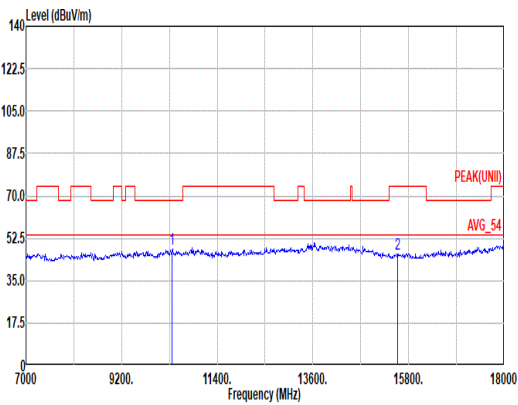
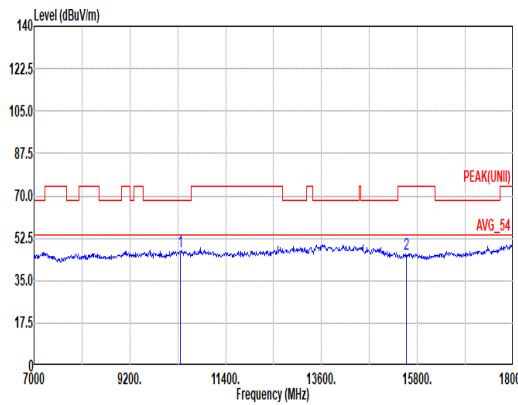


Mode	4																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz																																																																																																															
ANT	3+4																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL Mode : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>48.18</td><td>68.20</td><td>-20.02</td><td>50.00</td><td>38.98</td><td>15.35</td><td>56.69</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>45.93</td><td>74.00</td><td>-28.07</td><td>44.28</td><td>38.42</td><td>18.78</td><td>56.36</td><td>0.81</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.18	68.20	-20.02	50.00	38.98	15.35	56.69	0.54	--	PEAK	2	15540.00	45.93	74.00	-28.07	44.28	38.42	18.78	56.36	0.81	--	PEAK	 Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL Mode : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.04</td><td>68.20</td><td>-21.16</td><td>48.86</td><td>38.98</td><td>15.35</td><td>56.69</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>45.81</td><td>74.00</td><td>-28.19</td><td>44.16</td><td>38.42</td><td>18.78</td><td>56.36</td><td>0.81</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.04	68.20	-21.16	48.86	38.98	15.35	56.69	0.54	--	PEAK	2	15540.00	45.81	74.00	-28.19	44.16	38.42	18.78	56.36	0.81	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10360.00	48.18	68.20	-20.02	50.00	38.98	15.35	56.69	0.54	--	PEAK																																																																																																					
2	15540.00	45.93	74.00	-28.07	44.28	38.42	18.78	56.36	0.81	--	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10360.00	47.04	68.20	-21.16	48.86	38.98	15.35	56.69	0.54	--	PEAK																																																																																																					
2	15540.00	45.81	74.00	-28.19	44.16	38.42	18.78	56.36	0.81	--	PEAK																																																																																																					

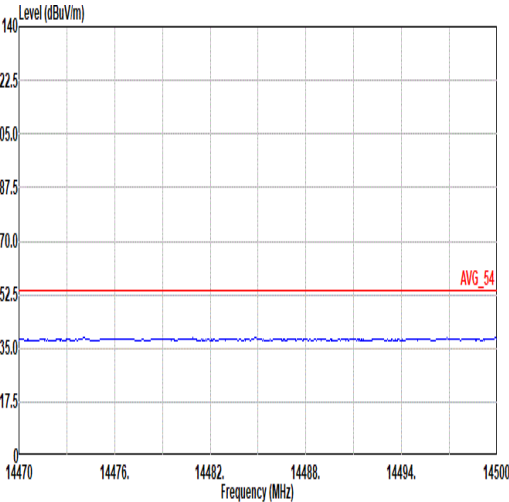
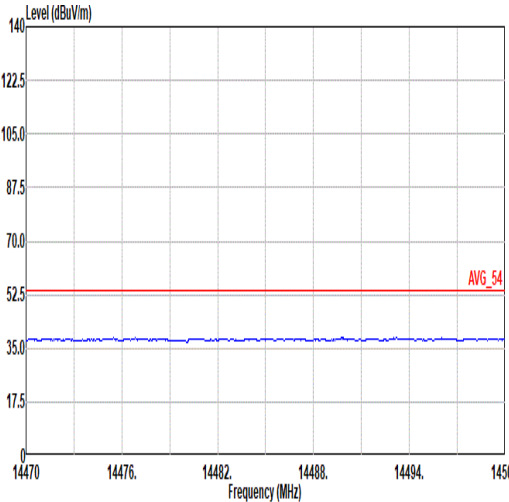
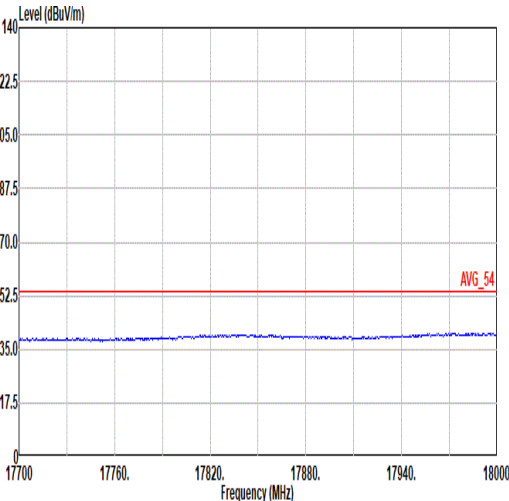
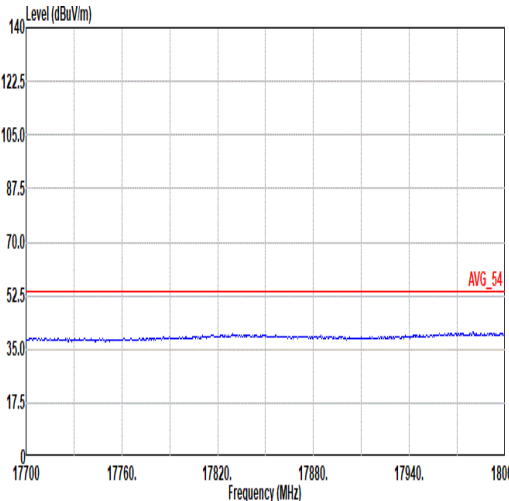


Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 4	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 4
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 4	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 4

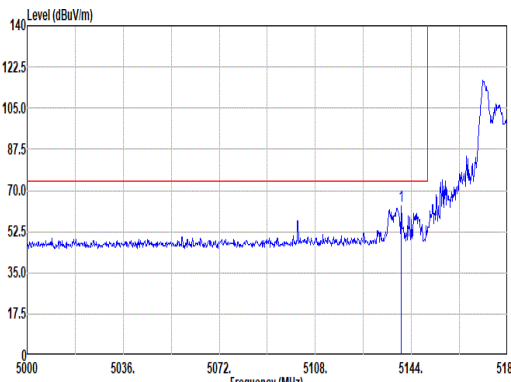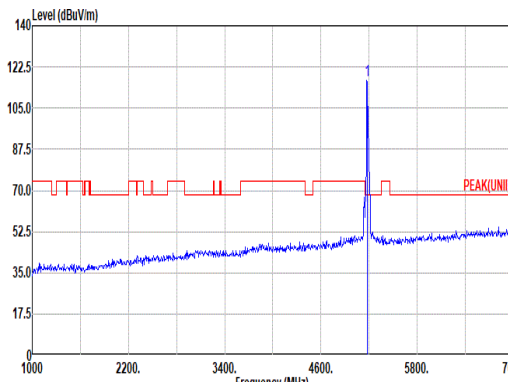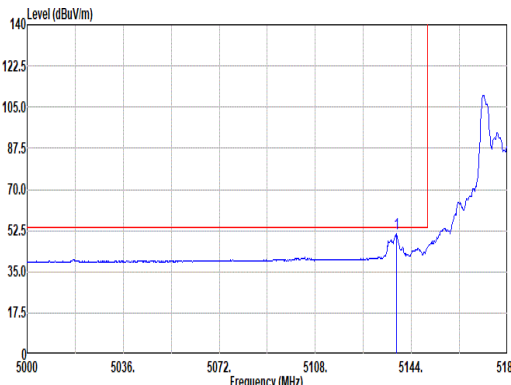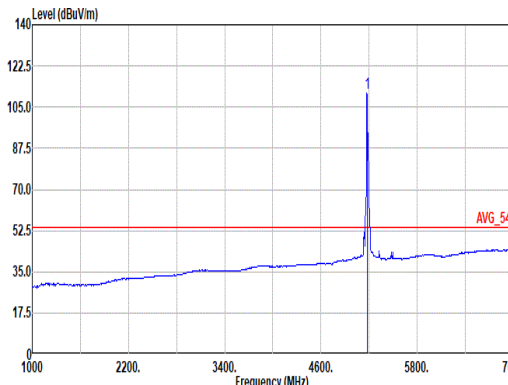

Mode	5																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial 26/0 RU_5180MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5140.22</td><td>63.61</td><td>74.00</td><td>-10.39</td><td>57.17</td><td>33.18</td><td>10.11</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.22	63.61	74.00	-10.39	57.17	33.18	10.11	36.85	0.00	100	123	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>116.79</td><td>-----</td><td>-----</td><td>110.22</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>100</td><td>123</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	116.79	-----	-----	110.22	33.24	10.17	36.84	0.00	100	123
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5140.22	63.61	74.00	-10.39	57.17	33.18	10.11	36.85	0.00	100	123	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	116.79	-----	-----	110.22	33.24	10.17	36.84	0.00	100	123	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5138.42</td><td>51.03</td><td>54.00</td><td>-2.97</td><td>44.59</td><td>33.18</td><td>10.11</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5138.42	51.03	54.00	-2.97	44.59	33.18	10.11	36.85	0.00	100	123	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>110.70</td><td>-----</td><td>-----</td><td>104.13</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>100</td><td>123</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	110.70	-----	-----	104.13	33.24	10.17	36.84	0.00	100	123
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5138.42	51.03	54.00	-2.97	44.59	33.18	10.11	36.85	0.00	100	123	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	110.70	-----	-----	104.13	33.24	10.17	36.84	0.00	100	123	AVERAGE																																																																																							

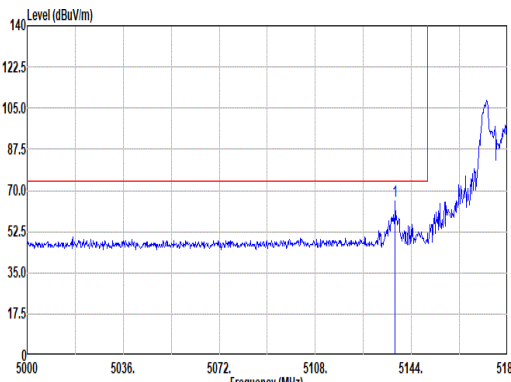
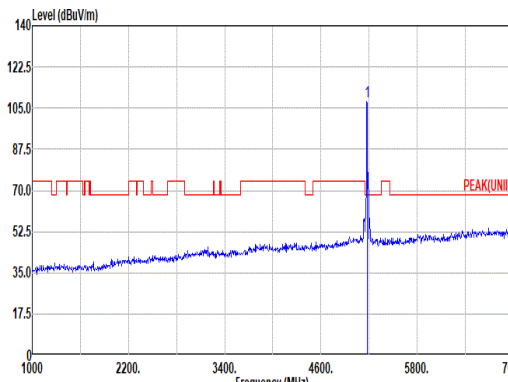
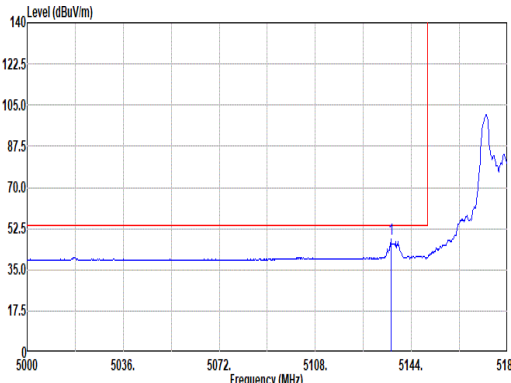
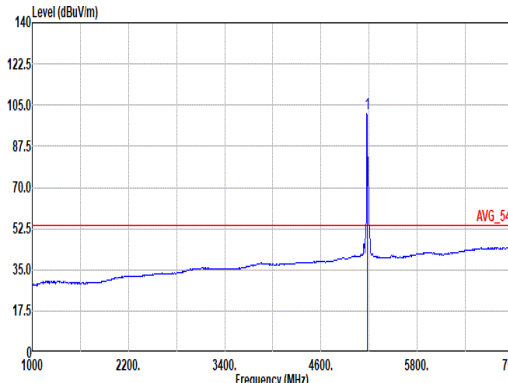


Mode	5																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial 26/0 RU_5180MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5137.88</td><td>65.58</td><td>74.00</td><td>-8.42</td><td>59.14</td><td>33.18</td><td>10.11</td><td>36.85</td><td>0.00</td><td>400</td><td>11</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5137.88	65.58	74.00	-8.42	59.14	33.18	10.11	36.85	0.00	400	11	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>107.79</td><td>-----</td><td>-----</td><td>101.22</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>400</td><td>11</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	107.79	-----	-----	101.22	33.24	10.17	36.84	0.00	400	11
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5137.88	65.58	74.00	-8.42	59.14	33.18	10.11	36.85	0.00	400	11	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	107.79	-----	-----	101.22	33.24	10.17	36.84	0.00	400	11	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5136.26</td><td>48.14</td><td>54.00</td><td>-5.86</td><td>41.72</td><td>33.17</td><td>10.10</td><td>36.85</td><td>0.00</td><td>400</td><td>11</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5136.26	48.14	54.00	-5.86	41.72	33.17	10.10	36.85	0.00	400	11	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.64</td><td>-----</td><td>-----</td><td>95.07</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>400</td><td>11</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.64	-----	-----	95.07	33.24	10.17	36.84	0.00	400	11
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5136.26	48.14	54.00	-5.86	41.72	33.17	10.10	36.85	0.00	400	11	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	101.64	-----	-----	95.07	33.24	10.17	36.84	0.00	400	11	AVERAGE																																																																																							







Mode	6																																																																																																						
	Band Edge																																																																																																						
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial 52/37 RU_5180MHz																																																																																																						
ANT	3+4																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.20</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>48.55</td><td>33.18</td><td>10.11</td><td>36.85</td><td>0.00</td><td>101</td><td>4</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.20	54.99	74.00	-19.01	48.55	33.18	10.11	36.85	0.00	101	4	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>109.47</td><td>-----</td><td>-----</td><td>102.90</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>101</td><td>4</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	109.47	-----	-----	102.90	33.24	10.17	36.84	0.00	101	4	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5142.20	54.99	74.00	-19.01	48.55	33.18	10.11	36.85	0.00	101	4	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5180.00	109.47	-----	-----	102.90	33.24	10.17	36.84	0.00	101	4	PEAK																																																																																											
Avg	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.18</td><td>48.45</td><td>54.00</td><td>-5.55</td><td>41.99</td><td>33.19</td><td>10.12</td><td>36.85</td><td>0.00</td><td>101</td><td>4</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.18	48.45	54.00	-5.55	41.99	33.19	10.12	36.85	0.00	101	4	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>102.84</td><td>-----</td><td>-----</td><td>96.27</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>101</td><td>4</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.84	-----	-----	96.27	33.24	10.17	36.84	0.00	101	4	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5144.18	48.45	54.00	-5.55	41.99	33.19	10.12	36.85	0.00	101	4	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5180.00	102.84	-----	-----	96.27	33.24	10.17	36.84	0.00	101	4	AVERAGE																																																																																											

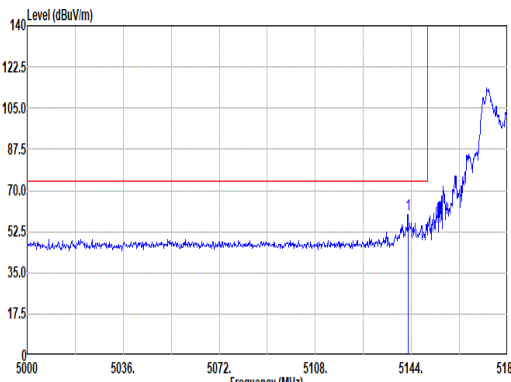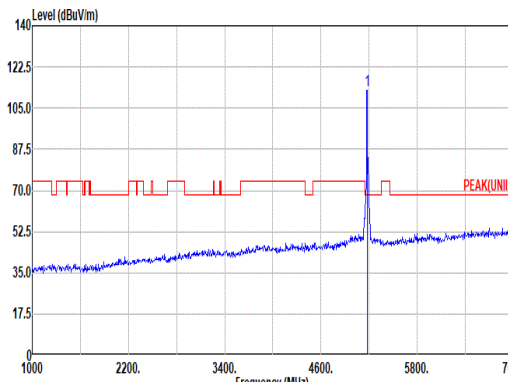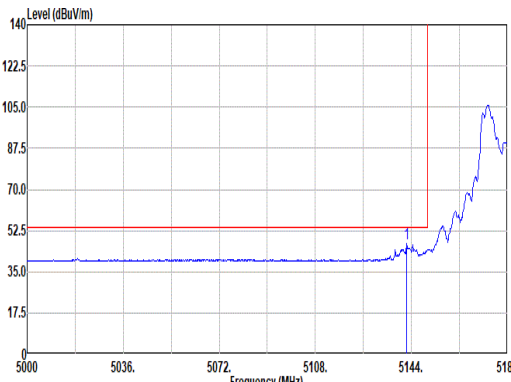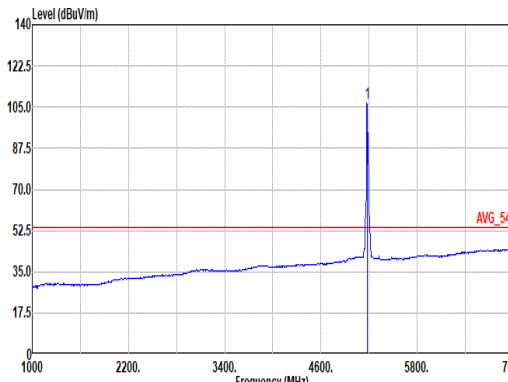

Mode	6																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial 52/37 RU_5180MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.74</td><td>59.69</td><td>74.00</td><td>-14.31</td><td>53.23</td><td>33.19</td><td>10.12</td><td>36.85</td><td>0.00</td><td>400</td><td>293</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5142.74	59.69	74.00	-14.31	53.23	33.19	10.12	36.85	0.00	400	293	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>112.49</td><td>-----</td><td>-----</td><td>105.92</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>400</td><td>293</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	112.49	-----	-----	105.92	33.24	10.17	36.84	0.00	400	293
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5142.74	59.69	74.00	-14.31	53.23	33.19	10.12	36.85	0.00	400	293	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	112.49	-----	-----	105.92	33.24	10.17	36.84	0.00	400	293	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5142.20</td><td>46.95</td><td>54.00</td><td>-7.05</td><td>40.51</td><td>33.18</td><td>10.11</td><td>36.85</td><td>0.00</td><td>400</td><td>293</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5142.20	46.95	54.00	-7.05	40.51	33.18	10.11	36.85	0.00	400	293	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>106.60</td><td>-----</td><td>-----</td><td>100.83</td><td>33.24</td><td>10.17</td><td>36.84</td><td>0.00</td><td>400</td><td>293</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	106.60	-----	-----	100.83	33.24	10.17	36.84	0.00	400	293
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5142.20	46.95	54.00	-7.05	40.51	33.18	10.11	36.85	0.00	400	293	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	106.60	-----	-----	100.83	33.24	10.17	36.84	0.00	400	293	AVERAGE																																																																																							

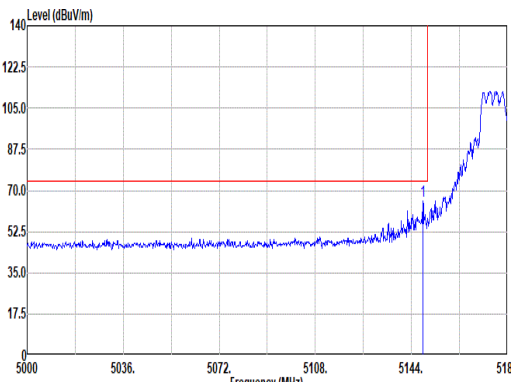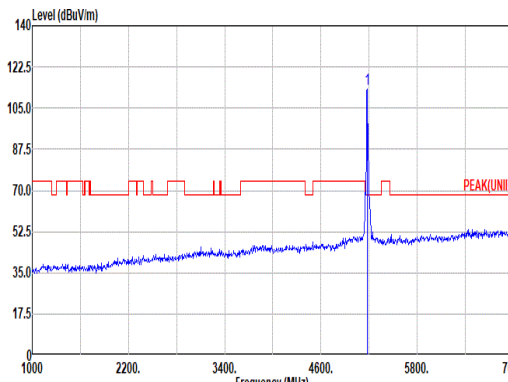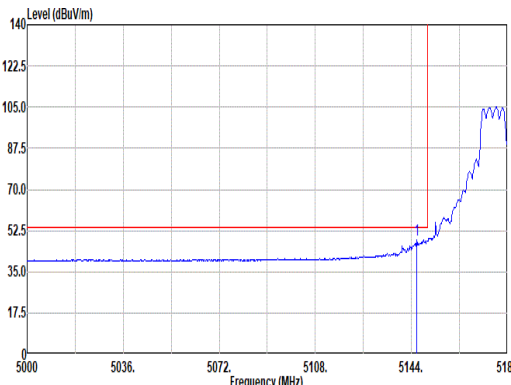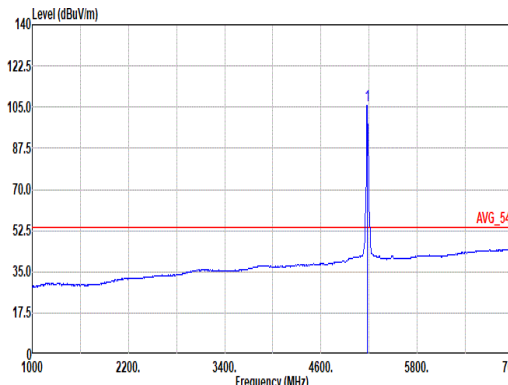

Mode	7																																																																																																															
	Band Edge																																																																																																															
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial 106/53 RU_5180MHz																																																																																																															
ANT	3+4																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.32</td><td>65.49</td><td>74.00</td><td>-8.51</td><td>59.01</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.32	65.49	74.00	-8.51	59.01	33.20	10.13	36.85	0.00	100	123	PEAK	 Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>113.00</td><td>-----</td><td>-----</td><td>106.41</td><td>33.25</td><td>10.18</td><td>36.84</td><td>0.00</td><td>100</td><td>123</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	113.00	-----	-----	106.41	33.25	10.18	36.84	0.00	100	123	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5148.32	65.49	74.00	-8.51	59.01	33.20	10.13	36.85	0.00	100	123	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5180.00	113.00	-----	-----	106.41	33.25	10.18	36.84	0.00	100	123	PEAK																																																																																																				
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.98</td><td>48.76</td><td>54.00</td><td>-5.24</td><td>42.30</td><td>33.19</td><td>10.12</td><td>36.85</td><td>0.00</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.98	48.76	54.00	-5.24	42.30	33.19	10.12	36.85	0.00	100	123	AVERAGE	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>105.74</td><td>-----</td><td>-----</td><td>99.15</td><td>33.25</td><td>10.18</td><td>36.84</td><td>0.00</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.74	-----	-----	99.15	33.25	10.18	36.84	0.00	100	123	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5145.98	48.76	54.00	-5.24	42.30	33.19	10.12	36.85	0.00	100	123	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5180.00	105.74	-----	-----	99.15	33.25	10.18	36.84	0.00	100	123	AVERAGE																																																																																																				





		7									
Mode	Band Edge										
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Partial 106/53 RU_5180MHz										
ANT	3+4										
Pol.	Vertical										
Peak	Fundamental										
	Fundamental										
Peak	Fundamental										
	Fundamental										
Avg	Fundamental										
	Fundamental										







Mode	8																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz																																																																																																			
ANT	3+4																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.16</td><td>54.83</td><td>74.00</td><td>-19.17</td><td>48.35</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>303</td><td>PEAK</td></tr></tbody></table> Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>113.15</td><td>-----</td><td>-----</td><td>106.49</td><td>33.26</td><td>10.24</td><td>36.84</td><td>0.00</td><td>100</td><td>303</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.16	54.83	74.00	-19.17	48.35	33.20	10.13	36.85	0.00	100	303	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	113.15	-----	-----	106.49	33.26	10.24	36.84	0.00	100	303	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.16	54.83	74.00	-19.17	48.35	33.20	10.13	36.85	0.00	100	303	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5220.00	113.15	-----	-----	106.49	33.26	10.24	36.84	0.00	100	303	PEAK																																																																																								
Avg	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.82</td><td>44.88</td><td>54.00</td><td>-9.12</td><td>38.40</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100</td><td>303</td><td>AVERAGE</td></tr></tbody></table> Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>107.48</td><td>-----</td><td>-----</td><td>100.82</td><td>33.26</td><td>10.24</td><td>36.84</td><td>0.00</td><td>100</td><td>303</td><td>AVERAGE</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.82	44.88	54.00	-9.12	38.40	33.20	10.13	36.85	0.00	100	303	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	107.48	-----	-----	100.82	33.26	10.24	36.84	0.00	100	303	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.82	44.88	54.00	-9.12	38.40	33.20	10.13	36.85	0.00	100	303	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5220.00	107.48	-----	-----	100.82	33.26	10.24	36.84	0.00	100	303	AVERAGE																																																																																								

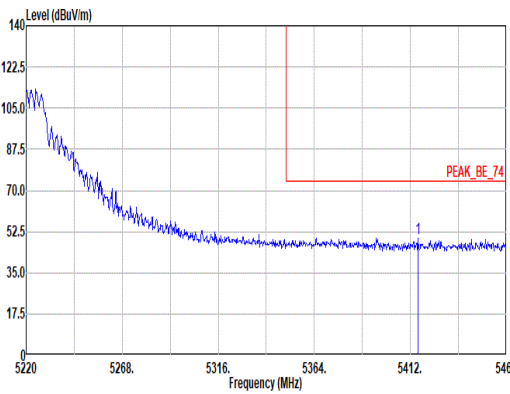
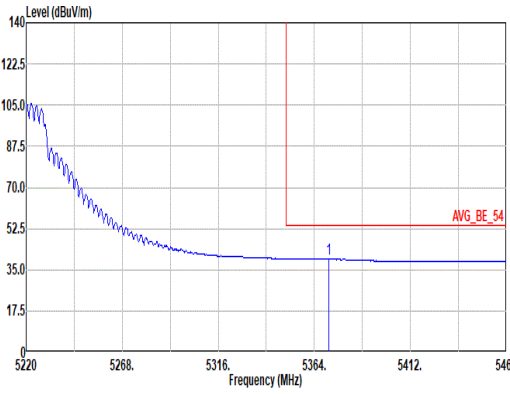


Mode	8																																																								
	Band Edge - R																																																								
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz																																																								
ANT	3+4																																																								
Pol.	Horizontal						Fundamental																																																		
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5415.84</td><td>49.81</td><td>74.00</td><td>-24.19</td><td>43.20</td><td>33.10</td><td>10.31</td><td>36.80</td><td>0.00</td><td>100</td><td>303</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5415.84	49.81	74.00	-24.19	43.20	33.10	10.31	36.80	0.00	100	303	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																	
1	5415.84	49.81	74.00	-24.19	43.20	33.10	10.31	36.80	0.00	100	303	PEAK																																													
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5371.20</td><td>39.84</td><td>54.00</td><td>-14.16</td><td>33.25</td><td>33.10</td><td>10.30</td><td>36.81</td><td>0.00</td><td>100</td><td>303</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5371.20	39.84	54.00	-14.16	33.25	33.10	10.30	36.81	0.00	100	303	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																	
1	5371.20	39.84	54.00	-14.16	33.25	33.10	10.30	36.81	0.00	100	303	AVERAGE																																													

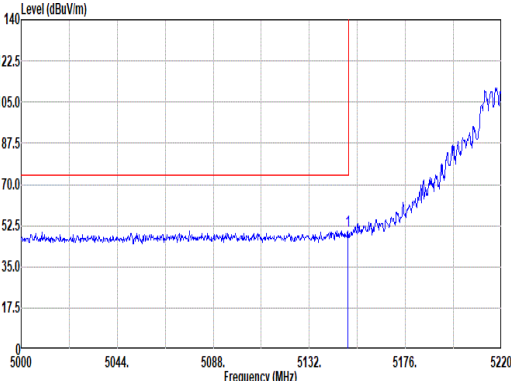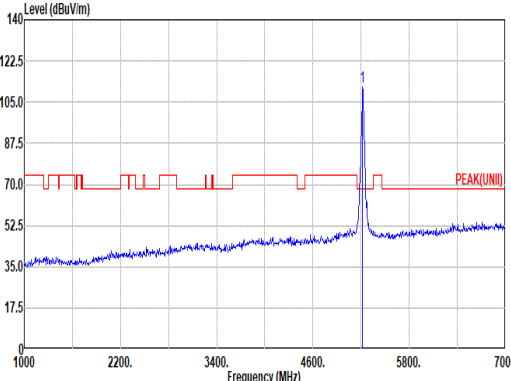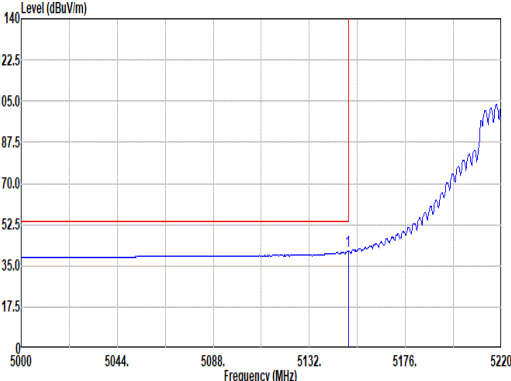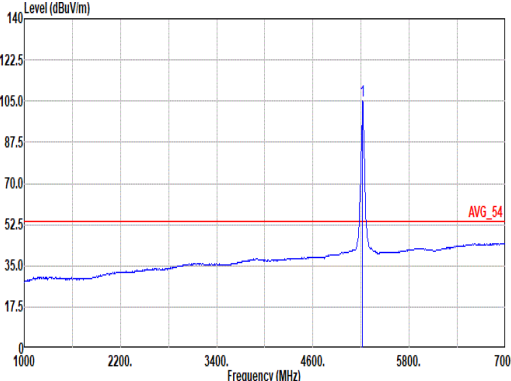

Mode	8																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.60</td><td>50.44</td><td>74.00</td><td>-23.56</td><td>43.96</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>376</td><td>111</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.60	50.44	74.00	-23.56	43.96	33.20	10.13	36.85	0.00	376	111	PEAK	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>111.60</td><td>-----</td><td>-----</td><td>104.94</td><td>33.26</td><td>10.24</td><td>36.84</td><td>0.00</td><td>376</td><td>111</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	111.60	-----	-----	104.94	33.26	10.24	36.84	0.00	376	111
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.60	50.44	74.00	-23.56	43.96	33.20	10.13	36.85	0.00	376	111	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	111.60	-----	-----	104.94	33.26	10.24	36.84	0.00	376	111	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.82</td><td>41.30</td><td>54.00</td><td>-12.70</td><td>34.82</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>376</td><td>111</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.82	41.30	54.00	-12.70	34.82	33.20	10.13	36.85	0.00	376	111	AVERAGE	Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>104.94</td><td>-----</td><td>-----</td><td>98.28</td><td>33.26</td><td>10.24</td><td>36.84</td><td>0.00</td><td>376</td><td>111</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	104.94	-----	-----	98.28	33.26	10.24	36.84	0.00	376	111
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.82	41.30	54.00	-12.70	34.82	33.20	10.13	36.85	0.00	376	111	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	104.94	-----	-----	98.28	33.26	10.24	36.84	0.00	376	111	AVERAGE																																																																																							



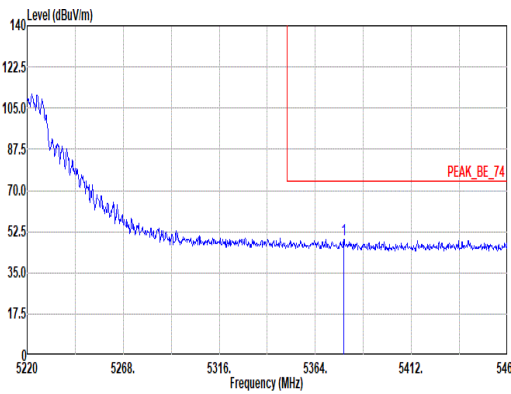
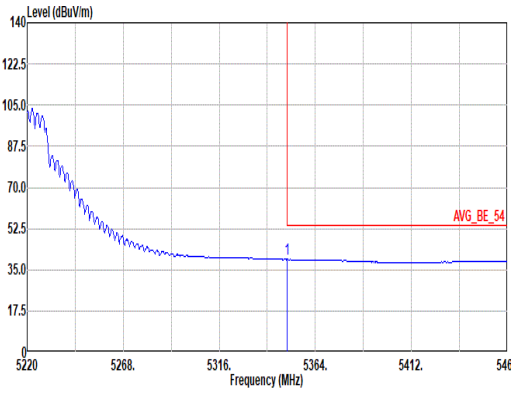


Mode	8																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz																																																							
ANT	3+4																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5378.16</td><td>49.11</td><td>74.00</td><td>-24.89</td><td>42.52</td><td>33.10</td><td>10.30</td><td>36.81</td><td>0.00</td><td>376</td><td>111</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5378.16	49.11	74.00	-24.89	42.52	33.10	10.30	36.81	0.00	376	111	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5378.16	49.11	74.00	-24.89	42.52	33.10	10.30	36.81	0.00	376	111	PEAK																																												
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>39.40</td><td>54.00</td><td>-14.60</td><td>32.82</td><td>33.10</td><td>10.29</td><td>36.81</td><td>0.00</td><td>376</td><td>111</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.00	39.40	54.00	-14.60	32.82	33.10	10.29	36.81	0.00	376	111	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5350.00	39.40	54.00	-14.60	32.82	33.10	10.29	36.81	0.00	376	111	AVERAGE																																												







Mode	8																																																																																																																																															
	Harmonic																																																																																																																																															
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz																																																																																																																																															
ANT	3+4																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																									
Peak Avg																																																																																																																																																
	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL Mode : 5 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>47.51</td><td>68.20</td><td>-20.69</td><td>49.26</td><td>38.90</td><td>15.39</td><td>56.58</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>48.98</td><td>74.00</td><td>-25.02</td><td>47.62</td><td>37.94</td><td>18.86</td><td>56.26</td><td>0.82</td><td>200</td><td>14 PEAK</td></tr><tr><td>3</td><td>15660.00</td><td>37.72</td><td>54.00</td><td>-16.28</td><td>36.36</td><td>37.94</td><td>18.86</td><td>56.26</td><td>0.82</td><td>200</td><td>14 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.51	68.20	-20.69	49.26	38.90	15.39	56.58	0.54	--	PEAK	2	15660.00	48.98	74.00	-25.02	47.62	37.94	18.86	56.26	0.82	200	14 PEAK	3	15660.00	37.72	54.00	-16.28	36.36	37.94	18.86	56.26	0.82	200	14 Average	Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 VERTICAL Mode : 5 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>48.25</td><td>68.20</td><td>-19.95</td><td>50.00</td><td>38.90</td><td>15.39</td><td>56.58</td><td>0.54</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>48.48</td><td>74.00</td><td>-25.52</td><td>47.12</td><td>37.94</td><td>18.86</td><td>56.26</td><td>0.82</td><td>100</td><td>13 PEAK</td></tr><tr><td>3</td><td>15660.00</td><td>38.46</td><td>54.00</td><td>-15.54</td><td>37.10</td><td>37.94</td><td>18.86</td><td>56.26</td><td>0.82</td><td>100</td><td>13 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	48.25	68.20	-19.95	50.00	38.90	15.39	56.58	0.54	--	PEAK	2	15660.00	48.48	74.00	-25.52	47.12	37.94	18.86	56.26	0.82	100	13 PEAK	3	15660.00	38.46	54.00	-15.54	37.10	37.94	18.86	56.26	0.82	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	10440.00	47.51	68.20	-20.69	49.26	38.90	15.39	56.58	0.54	--	PEAK																																																																																																																																					
2	15660.00	48.98	74.00	-25.02	47.62	37.94	18.86	56.26	0.82	200	14 PEAK																																																																																																																																					
3	15660.00	37.72	54.00	-16.28	36.36	37.94	18.86	56.26	0.82	200	14 Average																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																						
1	10440.00	48.25	68.20	-19.95	50.00	38.90	15.39	56.58	0.54	--	PEAK																																																																																																																																					
2	15660.00	48.48	74.00	-25.52	47.12	37.94	18.86	56.26	0.82	100	13 PEAK																																																																																																																																					
3	15660.00	38.46	54.00	-15.54	37.10	37.94	18.86	56.26	0.82	100	13 Average																																																																																																																																					

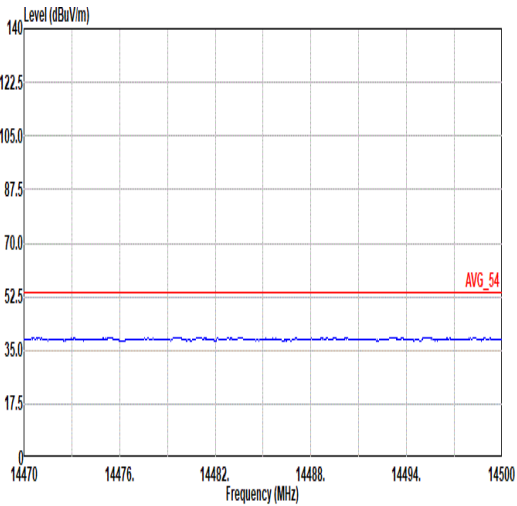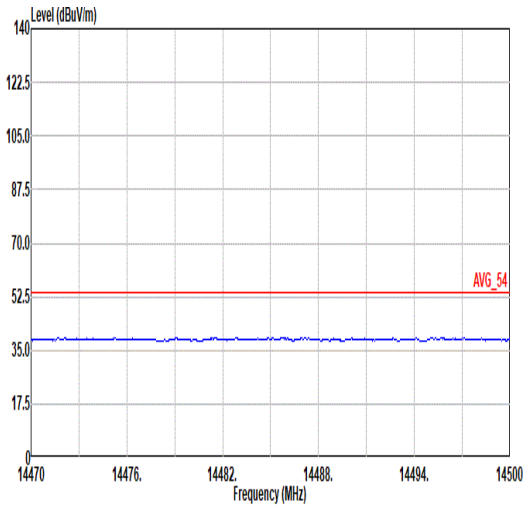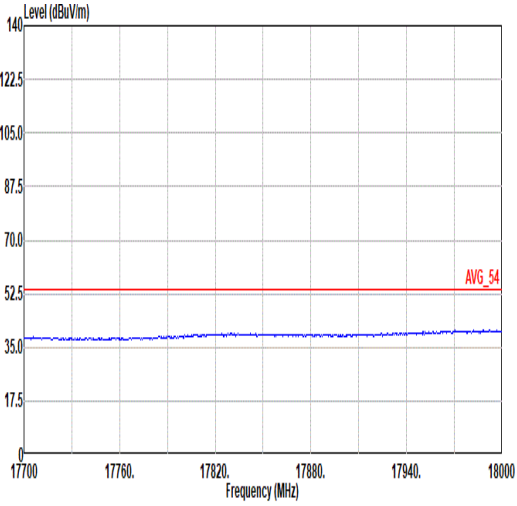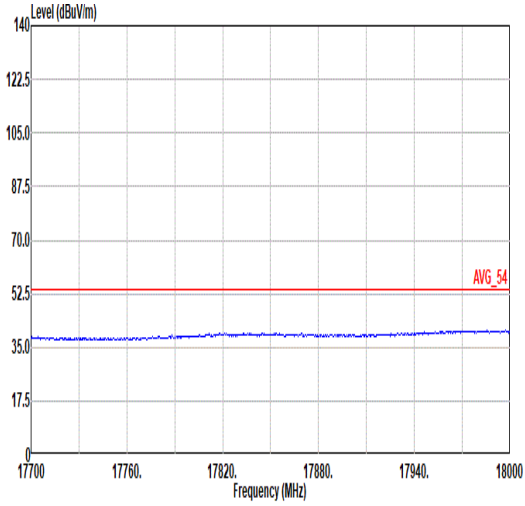

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 5	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 5
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL Mode : 5	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL Mode : 5

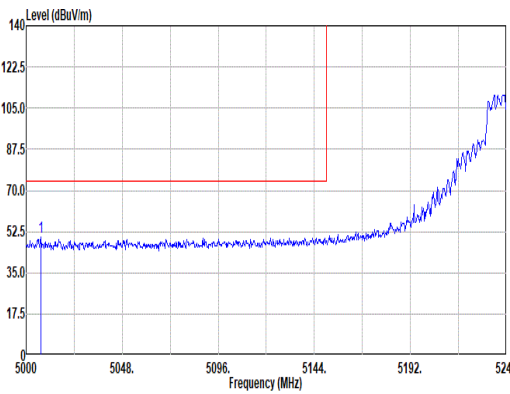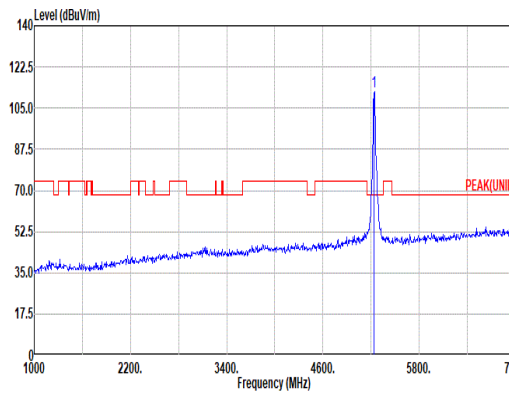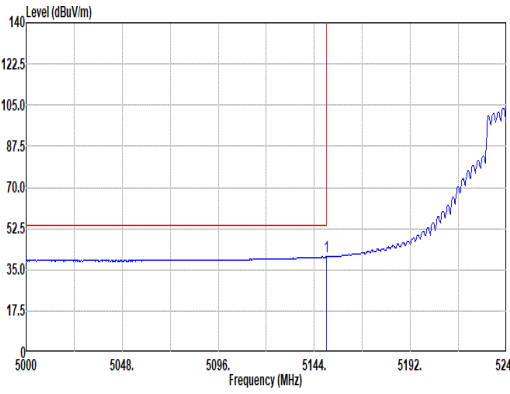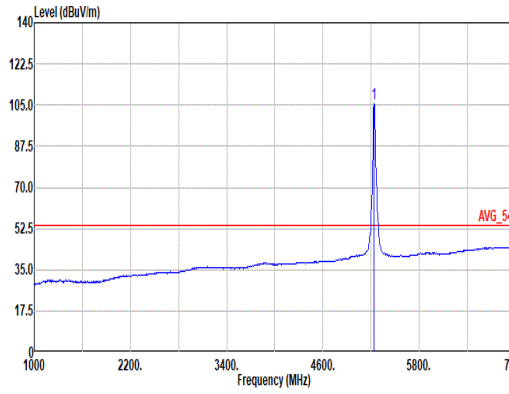

Mode	9																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz																																																																																	
ANT	3+4																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5007.20</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>43.73</td><td>33.29</td><td>9.84</td><td>36.87</td><td>0.00</td><td>100 123 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5007.20	49.99	74.00	-24.01	43.73	33.29	9.84	36.87	0.00	100 123 PEAK	 Site : 03CH13-HY Condition: PEAK(UNII) 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>112.03</td><td>-----</td><td>-----</td><td>105.39</td><td>33.22</td><td>10.25</td><td>36.83</td><td>0.00</td><td>100 123 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5240.00	112.03	-----	-----	105.39	33.22	10.25	36.83	0.00	100 123 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5007.20	49.99	74.00	-24.01	43.73	33.29	9.84	36.87	0.00	100 123 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5240.00	112.03	-----	-----	105.39	33.22	10.25	36.83	0.00	100 123 PEAK																																																																									
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5150.00</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>34.02</td><td>33.20</td><td>10.13</td><td>36.85</td><td>0.00</td><td>100 123 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5150.00	40.50	54.00	-13.50	34.02	33.20	10.13	36.85	0.00	100 123 AVERAGE	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>105.44</td><td>-----</td><td>-----</td><td>98.00</td><td>33.23</td><td>10.24</td><td>36.83</td><td>0.00</td><td>100 123 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5240.00	105.44	-----	-----	98.00	33.23	10.24	36.83	0.00	100 123 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5150.00	40.50	54.00	-13.50	34.02	33.20	10.13	36.85	0.00	100 123 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																									
1 5240.00	105.44	-----	-----	98.00	33.23	10.24	36.83	0.00	100 123 AVERAGE																																																																									