



Power Density Evaluation Report

FCC ID : A4RG6QU3
Equipment : Phone
Model Name : G6QU3
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Mar. 15, 2020 and testing was started from Apr. 17, 2020 and completed on Jun. 02, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR part2.1093 and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Cona Huang / Deputy Manager

Sporton International Inc.
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan



Table of Contents

1. Summary.....	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
4. RF Exposure Limits.....	6
4.1 Uncontrolled Environment.....	6
4.2 Controlled Environment.....	6
5. System Description and Setup	7
5.1 EUmmWave Probe / E-Field 5G Probe	8
5.2 Data Acquisition Electronics (DAE)	9
5.3 Scan configuration	9
6. Test Equipment List	9
7. System Verification Source.....	10
8. Power Density System Verification	11
9. System Verification Results	11
9.1 Computation of the Electric Field Polarization Ellipse	12
9.2 Total Field and Power Flux Density Reconstruction	12
9.3 Test Positions	13
10. RF Exposure Evaluation Results	13
11. 5G NR + LTE + WLAN + BT Sim-Tx analysis.....	15
12. Simultaneous-Tx analysis	17
12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR.....	18
13. Uncertainty Assessment	23
14. References.....	24

Appendix A. Plots of System Performance Check

Appendix B. Plots of Power Density Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Setup Photo



History of this test report



1. Summary

The maximum measured average power density found during testing for Google LLC, Phone, are as follows.

Standalone transmission			Simultaneous transmission with other transmitters
RF Transmitter	Measured PD (mW/cm ²)	Reported PD (mW/cm ²)	Summation of Exposure Ratio
5G FR2	n260	0.563	0.75
	n261	0.612	0.75
Result		PASS	

Reviewed by: Jason Wang

Report Producer: Daisy Peng

2. Guidance Applied

The Power Density testing specification, method, and procedure for this device is in accordance with the following standards, if the KDB standards were not list within TAF approval, because it is included in the KDB 447498.

- FCC 47 CFR Part 2.1091
- FCC 47 CFR Part 2.1093
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- TCBC workshop notes
- IEC Draft TR 63170



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Phone
FCC ID	A4RG6QU3
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n260: 37GHz ~ 40GHz 5G NR n261: 27.5GHz ~ 28.35GHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM, 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK



4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure above 6GHz to radio frequency (RF) radiation as specified in §1.1310.

General Population Basic restriction for power density for frequencies between 1.5GHz and 100 GHz is $1.0 \text{ mW/cm}^2 = 10 \text{ W/m}^2$


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Table 1

5. System Description and Setup

The system to be used for the near field power density measurement


- SPEAG DASY6 system
- SPEAG cDASY6 5G module software
- EUmmWVx probe
- 5G Phantom cover

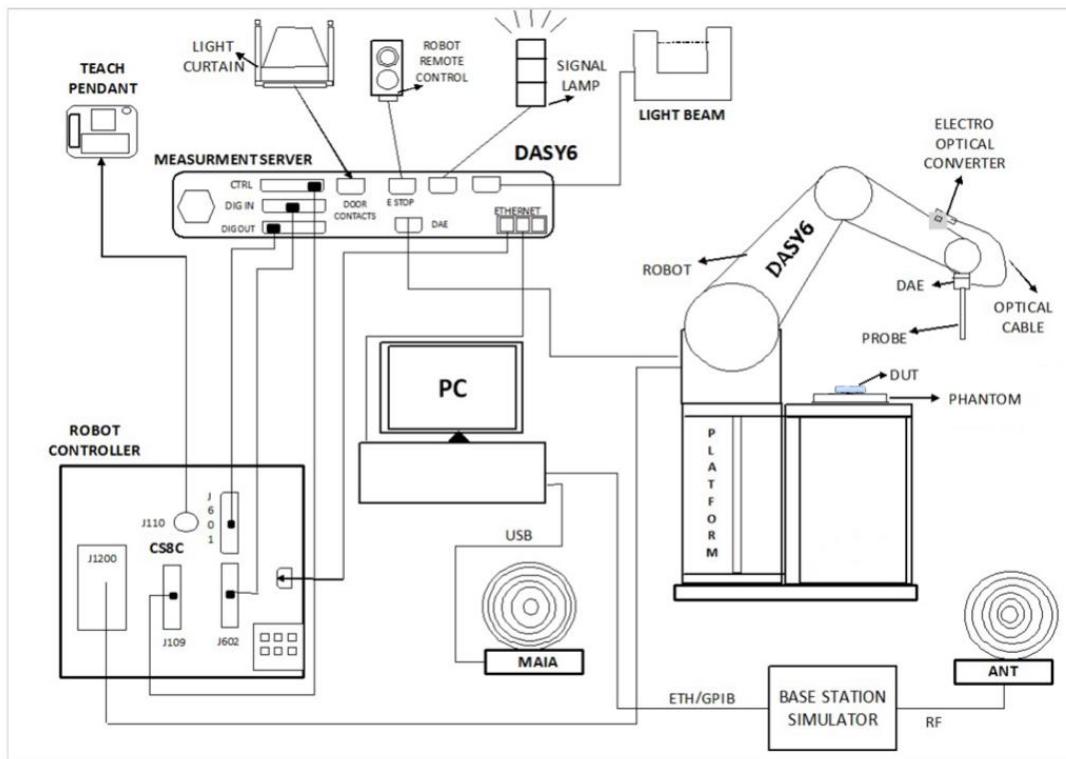

5.1 EUmmWave Probe / E-Field 5G Probe

The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm.

Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

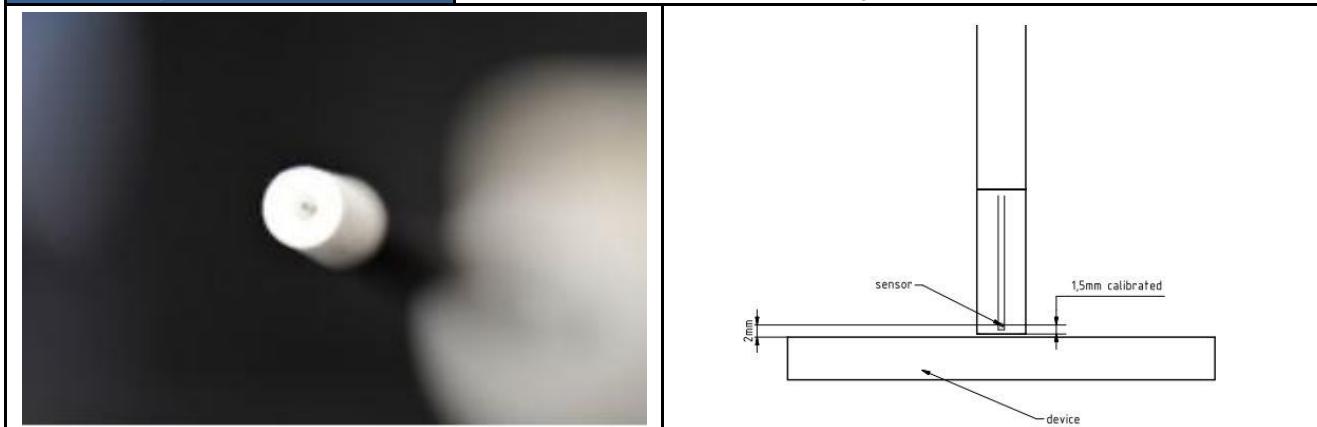

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MΩ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



5.3 Scan configuration

Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to $\lambda/4$.

The (x, y) grid step is also set $\lambda/4$, the grid extent is set to sufficiently large to identify the field pattern and the peak.

6. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	5G Verification Source	30 GHz	1007	Nov. 19, 2019	Nov. 18, 2020
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9461	Nov. 05, 2019	Nov. 04, 2020
SPEAG	Data Acquisition Electronics	DAE4	854	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 24, 2020	Jan. 23, 2021
Testo	Hygro meter	608-H1	45196600	Nov. 18, 2019	Nov. 17, 2020
Agilent	Spectrum Analyzer	N9010A	MY54200486	Oct. 28, 2019	Oct. 27, 2020
Custom Microwave	Standard Horn antenna	M15RH	V91113-A	NCR	NCR

7. System Verification Source

The System Verification sources at 30 GHz and above comprise horn-antennas and very stable signal generators.

Model	Ka-band horn antenna
Calibrated frequency:	30 GHz at 10mm from the case surface
Frequency accuracy	\pm 100 MHz
E-field polarization	linear
Harmonics	-20 dBc
Total radiated power	14 dBm
Power stability	0.05 dB
Power consumption	5 W
Size	00 x 100 x 100 mm
Weight	1 kg







8. Power Density System Verification

The system performance check verifies that the system operates within its specifications.

The EUT is replaced by a calibrated source, the same spatial resolution, measurement region and the test separation used in the calibration was applied to system check. Through visual inspection into the measured power density distribution, both spatially (shape) and numerically (level) have no noticeable difference. The measured results should be within 0.66dB of the calibrated targets.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	0.25 ($\frac{\lambda}{4}$)	120/120	16 × 16
30	0.25 ($\frac{\lambda}{4}$)	60/60	24 × 24
60	0.25 ($\frac{\lambda}{4}$)	32.5/32.5	26 × 26
90	0.25 ($\frac{\lambda}{4}$)	30/30	36 × 36

Settings for measurement of verification sources

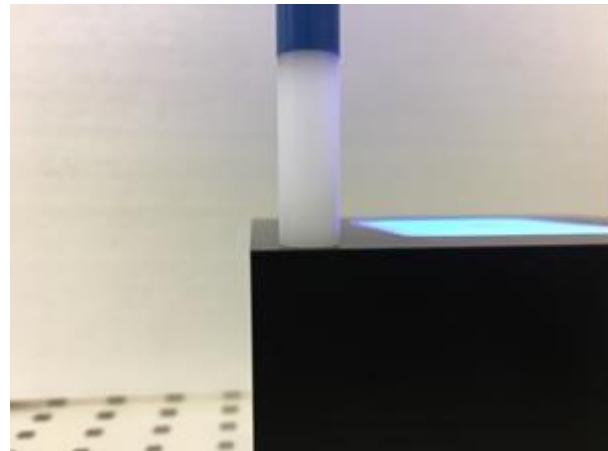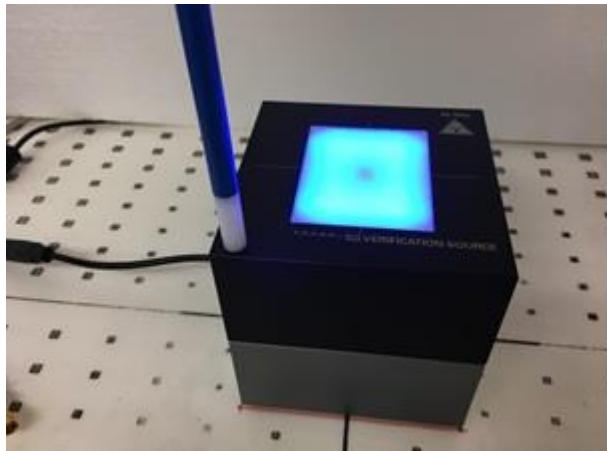

Verification Setup photo

9. System Verification Results

Date	Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Measured 4 cm ² (W/m ²)	Targeted 4 cm ² (W/m ²)	Deviation (dB)
2020/4/17	30GHz	30GHz_1007	9461	854	5.55	31.2	34.1	-8.50%
2020/5/22	30GHz	30GHz_1007	9461	1424	5.55	33.7	34.1	-1.17%
2020/6/1	30GHz	30GHz_1007	9461	1424	5.55	38.2	34.1	12.02%

9.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (ϕ, θ), and one angle describing the tilt of the semi-major axis (ψ). For the two extreme cases, i.e., circular and linear polarizations, three parameters only (a, ϕ and θ) are sufficient for the description of the incident field.

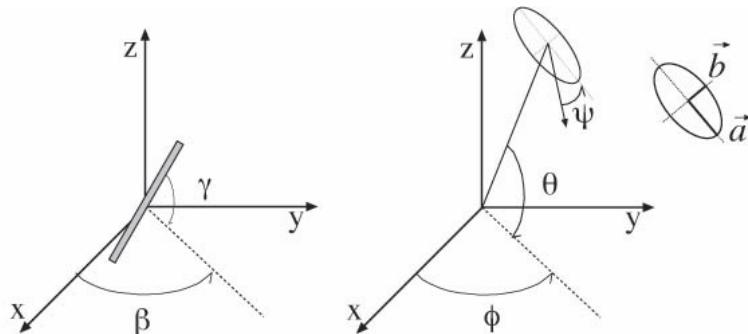


Illustration of the angles used for the numerical description of the sensor and the orientation of an ellipse in 3-D space.

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles (ϕ, θ and ψ). The parameters can be uniquely determined towards minimizing the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable that the system of equations be over determined. The solution to use a probe consisting of two sensors angled by r_1 and r_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at β_1, β_2 and β_3 , results in over-determinations by a factor of two. If there is a need for more information or increased accuracy, more rotation angles can be added. The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the Givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of 90 degree ($r_2 = r_1 + 90$ degree), and to simplify, the first rotation angle of the probe (β_1) can be set to 0 degree.

9.2 Total Field and Power Flux Density Reconstruction

Computation of the power density in general requires knowledge of the electric and magnetic field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations. SPEAG have developed a reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmmWV2 probe.

The average of the reconstructed power density is evaluated over a circular area in each measurement plane. Two average power density values can be computed, the average total power density and the average incident power density, and the average total power density is used to determine compliance.

- $|Re\{S\}|$ is the total Poynting vector
- $n \cdot Re\{S\}$ is the normal Poynting vector

The software post-processing reports to values, "S avg tot" and "S avg inc". "S avg tot" represents average total power density (all three xyz components included), and "S avg inc" represents average normal power density. The average total power density "S avg tot" is reported to determine the device compliance.



9.3 Test Positions

Band	Antenna Module	Measurement Plane					
		Front 2mm	Back 2mm	Left Side 2mm	Right Side 2mm	Top Side 2mm	Bottom Side 2mm
5G NR Band 260	1	No	No	Yes	No	No	No
	2	No	No	No	Yes	No	No
5G NR Band 261	1	No	No	Yes	No	No	No
	2	No	No	No	Yes	No	No

From the Part 0 and simulation report, beam IDs with highest PD and corresponding input power limit were selected to be tested for each antenna module and for each frequency band.

10. RF Exposure Evaluation Results

1. The PD test was performed of a 2mm separation between sensor and EUT surface (the probe tip is 0.5mm to the EUT surface).
2. According to TCBC Workshop in October 2018, 4 cm² averaging area are used.
3. This device is enabled with Qualcomm® Smart Transmit feature, smart transmit will manage and ensure LTE and 5G simultaneous transmission is compliant. The validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report.
4. Input power limit parameter for 5G mmW NR radio was calculated in RF Exposure Part 0 test report.
5. The device was configured to transmit CW wave signal for testing, due to Qualcomm® Smart Transmit feature, additional testing was not required for different modulations (CP-OFDM QPSK, CP-OFDM 16QAM, CP-OFDM 64QAM), RB configurations, component carriers, channel configurations (low channel, mid channel, high channel).
6. Power density measurements were performed with DUT transmitting at input.power.limit for one single beam for each polarization (H & V) and one beam-pair, for each antenna type and for each antenna module (0,1) on the worst-surfaces.
7. The Beam ID with one of the highest initial simulated power density for that surface and distance was selected for Part 1 Power Density measurements.
8. Some Power Density Evaluations were performed at a more conservative power level.
9. It's illustrated in Part 0 report that, for 5G mmW NR since there is total design-related uncertainty arising from TxAGC and device-to-device variation, the worst-case RF exposure should be determined by accounting for this device uncertainty of 2.1 dB, as well as PD design target of 6.17 W/m². Smart Transmit algorithm limits PD exposure to 75% of maximum to provide at least 25% margin allocated for 4G LTE anchor. Therefore, 5G mmW NR RF exposure for this DUT is evaluated by reported PD calculated as: Reported PD=75% x PD design target +2.1 dB =7.5 W/cm² = 0.75 mW/cm²

**FCC RF Exposure Report****Report No. : FA050515B**

Test number	5G FR2	Antenna module	Beam ID 1	Beam ID 2	Frequency (GHz)	Exposure Surface	Test separation	input power lim.	modulation	Epeak [V/m]	Hpeak [A/m]	Measured results Savg inc 4cm^2 (W/m2)	Measured results Savg tot 4cm^2 (W/m2)
	n260	1	28	-	38.5	Left Side	2mm	3.23	CW	80	0.159	2.48	3.22
	n260	1	154	-	39.95	Left Side	2mm	3.73	CW	89.2	0.215	4.07	4.93
	n260	1	28	154	39.95	Left Side	2mm	0.41	CW	85.8	0.206	3.4	4.13
01	n260	2	150	-	38.5	Right Side	2mm	4.24	CW	95.4	0.239	4.67	5.63
	n260	2	16	140	38.5	Right Side	2mm	0.5	CW	72.1	0.206	2.39	3.13
	n260	2	16	-	39.95	Right Side	2mm	3.9	CW	96.1	0.254	3.84	4.72
	n260	2	0	-	38.5	Right Side	2mm	8.54	CW	114	0.346	3.5	4.68
	n261	1	28	-	27.55	Left Side	2mm	3.15	CW	71.3	0.172	3.55	4.3
	n261	1	155	-	27.55	Left Side	2mm	3.276	CW	73.9	0.181	3.88	4.21
	n261	1	26	154	27.55	Left Side	2mm	-0.326	CW	94.3	0.178	4.59	5.68
	n261	2	22	-	27.55	Right Side	2mm	4.118	CW	72.2	0.195	4.33	5.63
	n261	2	151	-	27.55	Right Side	2mm	3.986	CW	79.1	0.216	4.65	5.46
02	n261	2	13	141	27.55	Right Side	2mm	0.797	CW	81.2	0.212	4.89	6.12
	n261	2	0	-	27.925	Right Side	2mm	10.576	CW	112	0.224	4.16	5.12



11. 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE uses $x\%$, then the exposure margin left for 5G NR is capped to $(100-x)\%$. Thus, the compliance equation for LTE + 5G NR is

$$x\% * A + (100-x)\% * B \leq 1.0,$$

Where, A is normalized reported time-averaged SAR exposure ratio from LTE, and $A \leq 1.0$; B is normalized reported time-averaged exposure ratio from 5G NR (i.e., PD exposure for mmW NR or SAR exposure for sub6 NR), and $B \leq 1.0$.

Let C = normalized reported SAR exposure ratio from WLAN+BT, then for compliance,

$$x\% * A + (100-x)\% * B + C \leq 1.0 \quad (1)$$

$$x\% * A + (100-x)\% * B \leq x\% * \max(A, B) + (100-x)\% * \max(A, B) \leq \max(A, B)$$

$$x\% * A + (100-x)\% * B + C \leq \max(A, B) + C \leq 1.0 \quad (2)$$

if $A + C \leq 1.0$ and $B + C \leq 1.0$ can be proven, then " $x\% * A + (100-x)\% * B + C \leq 1.0$ ". Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

Step 1: Prove total exposure ratio (TER) of LTE + WLAN + BT < 1

Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN + BT < 1

Else, if $A + C > 1.0$ and/or $B + C > 1.0$, then the followings need to hold true for compliance:

- i. A and C are decoupled based on the SPLSR criteria , and
- ii. $(100-x)\% * B + C \leq 1.0$, and
- iii. $x\% * A + (100-x)\% * B \leq 1.0$

Note iii. is covered in Part 2 report; i. and ii. should be addressed in Part 2 report.

Step 1: it's justified in Part 1 SAR report (Sporton report number FA050515A)

Step 2: it's justified in section 12.1



During TER analysis, the **reported time-averaged PD** (assuming *input.power.limit* for at least one beam < NV setting *Pmax*) applies only to the worst-surface of the device. For other surfaces, worst-case PD needs to be calculated to assess TER for the corresponding surface. To determine worst-case PD for other surfaces, using simulation results

1. Calculate ratio of simulated PD for desired surface to simulated PD of worstsurface for a given beam
2. Repeat 1 to obtain ratios for all supported beams, and determine maximum ratio
3. Repeat 1~2 to obtain the corresponding worst-case PD for rest of surfaces (non worst-case surfaces) needed for TER analysis.

For example, if the back surface of device has highest PD and is determined as worst-surface, then,

- *Back_surface_worst-case_PD = reported time-averaged PD*
where, **reported time-averaged PD** = $PD_{design_target} + \text{mmW device design related uncertainty}$
- *For other surfaces*
 - $front_surface_worst-case_PD = PD_{ratio_front_to_back} * \text{reported timeaveraged PD}$
where, $PD_{ratio_front_to_back} = \max \left\{ \frac{\text{simulated } PD_{front(i)}}{\text{simulated } P_{back(i)}}, beam \ i = 1, 2 \dots N \right\}, N = \text{total } N \text{ beams (all beams) supported by the mmW module being evaluated being evaluated.}$
 - *Follow similar approach to determine worst-case PD for bottom/top/left/right (if applicable).*
- *For body-worn and hotspot scenario, if SAR was measured at 15mm and 10mm, respectively, then the worst-case PD at 15mm and 10mm separation distance should be determined per surface as*
 - $15mm_worst-case_PD = PD_{ratio_15mm_to_0mm} * \text{reported timeaveraged PD}$
Here, $PD_{ratio_15 \text{ mm } to_0mm} = \max \left\{ \frac{\text{simulated } Pd \text{ at } 15 \text{ mm } (i)}{\text{simulated } PD \text{ at } 0 \text{ mm } (i)}, beam \ i = 1, 2 \dots N \right\}, N = \text{total number of beams (all beams) supported by the mmW module being evaluated.}$
 - $10mm_worst-case_PD = PD_{ratio_10mm_to_0mm} * \text{reported timeaveraged PD}$
Here, $PD_{ratio_15 \text{ mm } to_0mm} = \max \left\{ \frac{\text{simulated } Pd \text{ at } 10 \text{ mm } (i)}{\text{simulated } PD \text{ at } 0 \text{ mm } (i)}, beam \ i = 1, 2 \dots N \right\}, N = \text{total number of beams (all beams) supported by the mmW module being evaluated.}$
 - Note the validated model/simulation should be used in worst-case PD determination.



12. Simultaneous-Tx analysis

NO.	Simultaneous Transmission Configurations	Exposure Positions		
		Head	Hotspot	Body-worn
1.	WiFi 5G SISO (Ant 3) + Bluetooth (Ant 4) + n260/n261	Yes	Yes	Yes
2.	WiFi 5G SISO (Ant 4) + Bluetooth (Ant 4) + n260/n261	Yes	Yes	Yes
3.	WiFi 5G MIMO (Ant 3+4) + Bluetooth (Ant 4) + n260/n261	Yes	Yes	Yes
4.	WiFi 5G SISO (Ant 3) + n260/n261	Yes	Yes	Yes
5.	WiFi 5G SISO (Ant 4) + n260/n261	Yes	Yes	Yes
6.	WiFi 5G MIMO (Ant 3+4) + n260/n261	Yes	Yes	Yes
7.	WiFi 2.4G SISO (Ant 3) + n260/n261	Yes	Yes	Yes
8.	WiFi 2.4G SISO (Ant 4) + n260/n261	Yes	Yes	Yes
9.	WiFi 2.4G MIMO (Ant 3+4) + n260/n261	Yes	Yes	Yes
10.	Bluetooth (Ant 4) + n260/n261	Yes	Yes	Yes
11.	WiFi 2.4G SISO (Ant 4) + WiFi 5G SISO (Ant 3) + n260/n261	Yes	Yes	Yes

General Note:

1. The WLAN and Bluetooth SAR test results were referring the report of FCC ID: A4RG6QU3 (Sporton SAR Report No. FA050515A).
2. Considering n260/n261 transmitter with WLAN and Bluetooth can transmit simultaneously, the basic restrictions are on SAR and power density, and summation of these quantities should follow below formula and the simultaneous transmission analysis was following below step.
 - i) Use the standalone SAR according original report to collocate with n260/n261 transmitter power density at each exposure positions, if the result < 1, additional analysis is not necessary.

The $[\sum \text{ of (the highest measured or estimated SAR for each standalone antenna configuration, adjusted for maximum tune-up tolerance) / 1.6 W/kg} + [\sum \text{ of MPE ratios}]] \leq 1.0$.

3. This device is enabled with Qualcomm® Smart Transmit feature to control and manage transmitting power in real time and to ensure that the time-averaged RF exposure from WWAN is in compliance with FCC requirements. Since the device enabled with Qualcomm® Smart Transmit feature, 4G LTE and 5G mmW NR simultaneous transmission scenario does not need to be evaluated under Total Exposure Ratio (TER). The validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report.
4. For 5G mmW NR, compute reported time-averaged PD = $75\% * \text{PD_design_target} * 10(\text{mmW device design uncertainty in dB})/10$ and use this computed reported time-averaged PD in total exposure ratio (TER) analysis.



12.1 Simultaneous transmission analysis for WiFi/BT + 5G NR

NR Band	Antenna Module	Surface	Evaluation Distance (mm)	Ratio*	75%PD_Design Target +Total uncertainty (W/m^2)	75%PD_Design Target +Total uncertainty (W/m^2)*Ratio	Remark
n260	1	Left worst-surface	2mm	1	7.5	7.5	Extremity
		Front	2mm	0.6	7.5	4.3	Head/Extremity
		Back	2mm	0.7	7.5	5.25	Extremity
		Right	2mm	0	7.5	0.07	Extremity
		Top	2mm	0.1	7.5	0.5	Extremity
		Bottom	2mm		Excluded		
		worst-surface	10mm	0.7	7.5	4.88	Body worn/Hotspot
n260	2	Right worst-surface	2mm	1	7.5	7.5	Extremity
		Front	2mm	0.6	7.5	4.77	Head/Extremity
		Back	2mm	0.7	7.5	5.08	Extremity
		Left	2mm	0	7.5	0.04	Extremity
		Top	2mm	0	7.5	0.06	Extremity
		Bottom	2mm		Excluded		
		worst-surface	10mm	0.7	7.5	5.13	Body worn/Hotspot
n261	1	Left worst-surface	2mm	1	7.5	7.5	Extremity
		Front	2mm	0.7	7.5	5.02	Head/Extremity
		Back	2mm	0.6	7.5	4.67	Extremity
		Right	2mm	0	7.5	0.08	Extremity
		Top	2mm	0.1	7.5	0.69	Extremity
		Bottom	2mm		Excluded		
		worst-surface	10mm	0.6	7.5	4.49	Body worn/Hotspot
n261	2	Right worst-surface	2mm	1	7.5	7.5	Extremity
		Front	2mm	0.6	7.5	4.61	Head/Extremity
		Back	2mm	0.6	7.5	4.38	Extremity
		Left	2mm	0	7.5	0.04	Extremity
		Top	2mm	0	7.5	0.13	Extremity
		Bottom	2mm		Excluded		
		worst-surface	10mm	0.6	7.5	4.6	Body worn/Hotspot

*Ratio is highest ratio of (PD on desired exposure plane) / (PD on worst-surface) out of all beams and out of all channels include in Power Density Simulation Report.

**<Head Exposure Condition>**

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD							
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n260 Module 1	Right Cheek	0.102	0.249	0.335	0.209	0.028	0.338	0.263	4.300	0.494	0.586	0.594	0.657	0.578	0.659	0.624
		Right Tilted	0.093	0.066	0.432	0.160	0.061	0.431	0.072	4.300	0.488	0.471	0.475	0.738	0.568	0.738	0.588
		Left Cheek	0.553	0.512	0.411	0.225	0.244	0.409	0.516	4.300	0.776	0.750	0.753	0.839	0.723	0.838	0.916
		Left Tilted	0.392	0.048	0.573	0.083	0.152	0.578	0.216	4.300	0.675	0.460	0.565	0.883	0.577	0.886	0.727

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD							
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n260 Module 2	Right Cheek	0.102	0.249	0.335	0.209	0.028	0.338	0.263	4.770	0.541	0.633	0.641	0.704	0.625	0.706	0.671
		Right Tilted	0.093	0.066	0.432	0.160	0.061	0.431	0.072	4.770	0.535	0.518	0.522	0.785	0.615	0.785	0.635
		Left Cheek	0.553	0.512	0.411	0.225	0.244	0.409	0.516	4.770	0.823	0.797	0.800	0.886	0.770	0.885	0.963
		Left Tilted	0.392	0.048	0.573	0.083	0.152	0.578	0.216	4.770	0.722	0.507	0.612	0.930	0.624	0.933	0.774

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD							
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n261 Module 1	Right Cheek	0.102	0.249	0.335	0.209	0.028	0.338	0.263	5.020	0.566	0.658	0.666	0.729	0.650	0.731	0.696
		Right Tilted	0.093	0.066	0.432	0.160	0.061	0.431	0.072	5.020	0.560	0.543	0.547	0.810	0.640	0.810	0.660
		Left Cheek	0.553	0.512	0.411	0.225	0.244	0.409	0.516	5.020	0.848	0.822	0.825	0.911	0.795	0.910	0.988
		Left Tilted	0.392	0.048	0.573	0.083	0.152	0.578	0.216	5.020	0.747	0.532	0.637	0.955	0.649	0.958	0.799

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD							
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n261 Module 2	Right Cheek	0.102	0.249	0.335	0.209	0.028	0.338	0.263	4.610	0.525	0.617	0.625	0.688	0.609	0.690	0.655
		Right Tilted	0.093	0.066	0.432	0.160	0.061	0.431	0.072	4.610	0.519	0.502	0.506	0.769	0.599	0.769	0.619
		Left Cheek	0.553	0.512	0.411	0.225	0.244	0.409	0.516	4.610	0.807	0.781	0.784	0.870	0.754	0.869	0.947
		Left Tilted	0.392	0.048	0.573	0.083	0.152	0.578	0.216	4.610	0.706	0.491	0.596	0.914	0.608	0.917	0.758

**<Hotspot Exposure Condition>**

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n260 Module 1	Front	0.137	0.176	0.112	0.060	0.109	0.082	0.288	4.880	0.574	0.598	0.668	0.626	0.594	0.607	0.611	
		Back	0.274	0.271	0.278	0.317	0.246	0.276	0.591	4.880	0.659	0.657	0.857	0.816	0.840	0.814	0.857	
		Left side	0.218		0.311			0.290	0.135	4.880	0.488	0.624	0.572	0.488	0.682	0.669	0.682	
		Right side	0.213		0.396		0.188	0.378	0.494	4.880	0.621	0.488	0.797	0.853	0.606	0.842	0.621	
		Top side	0.112		0.446		0.089	0.425	0.197	4.880	0.558	0.488	0.611	0.822	0.544	0.809	0.558	

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n260 Module 2	Front	0.137	0.176	0.112	0.060	0.109	0.082	0.288	5.130	0.599	0.623	0.693	0.651	0.619	0.632	0.636	
		Back	0.274	0.271	0.278	0.317	0.246	0.276	0.591	5.130	0.684	0.682	0.882	0.841	0.865	0.839	0.882	
		Left side	0.218		0.311			0.290	0.135	5.130	0.513	0.649	0.597	0.513	0.707	0.694	0.707	
		Right side	0.213		0.396		0.188	0.378	0.494	5.130	0.646	0.513	0.822	0.878	0.631	0.867	0.646	
		Top side	0.112		0.446		0.089	0.425	0.197	5.130	0.583	0.513	0.636	0.847	0.569	0.834	0.583	

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n261 Module 1	Front	0.137	0.176	0.112	0.060	0.109	0.082	0.288	4.490	0.535	0.559	0.629	0.587	0.555	0.568	0.572	
		Back	0.274	0.271	0.278	0.317	0.246	0.276	0.591	4.490	0.620	0.618	0.818	0.777	0.801	0.775	0.818	
		Left side	0.218		0.311			0.290	0.135	4.490	0.449	0.585	0.533	0.449	0.643	0.630	0.643	
		Right side	0.213		0.396		0.188	0.378	0.494	4.490	0.582	0.449	0.758	0.814	0.567	0.803	0.582	
		Top side	0.112		0.446		0.089	0.425	0.197	4.490	0.519	0.449	0.572	0.783	0.505	0.770	0.519	

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n261 Module 2	Front	0.137	0.176	0.112	0.060	0.109	0.082	0.288	4.600	0.546	0.570	0.640	0.598	0.566	0.579	0.583	
		Back	0.274	0.271	0.278	0.317	0.246	0.276	0.591	4.600	0.631	0.629	0.829	0.788	0.812	0.786	0.829	
		Left side	0.218		0.311			0.290	0.135	4.600	0.460	0.596	0.544	0.460	0.654	0.641	0.654	
		Right side	0.213		0.396		0.188	0.378	0.494	4.600	0.593	0.460	0.769	0.825	0.578	0.814	0.593	
		Top side	0.112		0.446		0.089	0.425	0.197	4.600	0.530	0.460	0.583	0.794	0.516	0.781	0.530	

**<Body-Worn Exposure Condition>**

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n260	Front	0.137	0.176	0.112	0.060	0.109	0.091	0.288	4.880	0.574	0.598	0.668	0.626	0.594	0.613	0.611	
	Module 1	Back	0.274	0.271	0.278	0.296	0.246	0.268	0.591	4.880	0.659	0.657	0.857	0.816	0.827	0.809	0.844	

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n260	Front	0.137	0.176	0.112	0.060	0.109	0.091	0.288	5.130	0.599	0.623	0.693	0.651	0.619	0.638	0.636	
	Module 2	Back	0.274	0.271	0.278	0.296	0.246	0.268	0.591	5.130	0.684	0.682	0.882	0.841	0.852	0.834	0.869	

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n261	Front	0.137	0.176	0.112	0.060	0.109	0.091	0.288	4.490	0.535	0.559	0.629	0.587	0.555	0.574	0.572	
	Module 1	Back	0.274	0.271	0.278	0.296	0.246	0.268	0.591	4.490	0.620	0.618	0.818	0.777	0.788	0.770	0.805	

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/1.6 + PD/10 Summation							
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	4cm^2(W/m^2)	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
FR2	FR2 n261	Front	0.137	0.176	0.112	0.060	0.109	0.091	0.288	4.600	0.546	0.570	0.640	0.598	0.566	0.585	0.583	
	Module 2	Back	0.274	0.271	0.278	0.296	0.246	0.268	0.591	4.600	0.631	0.629	0.829	0.788	0.799	0.781	0.816	

**<Product Specific Exposure Condition>**

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/4.0 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	4cm^2(W/m^2)								
FR2	FR2 n260 Module 1	Front			0.861	0.229		0.709		4.300	0.430	0.430	0.430	0.645	0.487	0.607	0.487
		Back			0.799	0.677		0.709		5.250	0.525	0.525	0.525	0.725	0.694	0.702	0.694
		Left side			0.505			0.396		7.500	0.750	0.750	0.750	0.750	0.876	0.849	0.876
		Right side			0.927			0.669		0.070	0.007	0.007	0.007	0.239	0.007	0.174	0.007
		Top side			1.433			1.356		0.500	0.050	0.050	0.050	0.408	0.050	0.389	0.050

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/4.0 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	4cm^2(W/m^2)								
FR2	FR2 n260 Module 2	Front			0.861	0.229		0.709		4.770	0.477	0.477	0.477	0.692	0.534	0.654	0.534
		Back			0.799	0.677		0.709		5.080	0.508	0.508	0.508	0.708	0.677	0.685	0.677
		Left side			0.505			0.396		0.040	0.004	0.004	0.004	0.004	0.130	0.103	0.130
		Right side			0.927			0.669		7.500	0.750	0.750	0.750	0.982	0.750	0.917	0.750
		Top side			1.433			1.356		0.060	0.006	0.006	0.006	0.364	0.006	0.345	0.006

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/4.0 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	4cm^2(W/m^2)								
FR2	FR2 n261 Module 1	Front			0.861	0.229		0.709		5.020	0.502	0.502	0.502	0.717	0.559	0.679	0.559
		Back			0.799	0.677		0.709		4.670	0.467	0.467	0.467	0.667	0.636	0.644	0.636
		Left side			0.505			0.396		7.500	0.750	0.750	0.750	0.750	0.876	0.849	0.876
		Right side			0.927			0.669		0.080	0.008	0.008	0.008	0.240	0.008	0.175	0.008
		Top side			1.433			1.356		0.690	0.069	0.069	0.069	0.427	0.069	0.408	0.069

FR2 Band		Exposure Position	2	3	4	5	6	7	8	9	Reported SAR/4.0 + PD/10 Summation						
			2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	Bluetooth Ant 4	5GHz WLAN Ant 4+3	2.4GHz WLAN Ant 4+3	PD	9+2 Summed Ratio	9+3 Summed Ratio	9+8 Summed Ratio	9+4+6 Summed Ratio	9+5+6 Summed Ratio	9+6+7 Summed Ratio	9+2+5 Summed Ratio
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	4cm^2(W/m^2)								
FR2	FR2 n261 Module 2	Front			0.861	0.229		0.709		4.610	0.461	0.461	0.461	0.676	0.518	0.638	0.518
		Back			0.799	0.677		0.709		4.380	0.438	0.438	0.438	0.638	0.607	0.615	0.607
		Left side			0.505			0.396		0.040	0.004	0.004	0.004	0.130	0.103	0.130	0.103
		Right side			0.927			0.669		7.500	0.750	0.750	0.750	0.982	0.750	0.917	0.750
		Top side			1.433			1.356		0.130	0.013	0.013	0.013	0.371	0.013	0.352	0.013

Test Engineer : Steven Chang and Tom Jiang



13. Uncertainty Assessment

The budget is valid for evaluation distances $> \lambda/2\pi$. For specific tests and configurations, the Uncertainty could be considerably smaller.

Preliminary Module mmWave Uncertainty Budget Evaluation Distances to the Antennas $> \lambda / 2\pi$							
Error Description	Uncertainty Value (\pm dB)	Probability	Divisor	(Ci)	Standard Uncertainty (\pm dB)	(Vi) Veff	
Measurement System							
Probe Calibration	0.49	N	1	1	0.49	∞	
Hemispherical Isotropy	0.50	R	1.732	1	0.29	∞	
Linearity	0.20	R	1.732	0	0.12	∞	
System Detection Limits	0.04	R	1.732	1	0.02	∞	
Modulation Response	0.40	R	1.732	1	0.23	∞	
Readout Electronics	0.03	N	1	1	0.03	∞	
Response Time	0.00	R	1.732	1	0.00	∞	
Integration Time	0.00	R	1.732	1	0.00	∞	
RF Ambient Noise	0.2	R	1.732	1	0.12	∞	
RF Ambient Reflections	0.21	R	1.732	1	0.12	∞	
Probe Positioner	0.04	R	1.732	1	0.02	∞	
Probe Positioning	0.30	R	1.732	1	0.17	∞	
S _{avg} Reconstruction	0.60	R	1.732	1	0.35	∞	
Test Sample Related							
Power Drift	0.2	R	1.732	1	0.12	∞	
Input Power	0	N	1	0	0.00	∞	
Combined Std. Uncertainty					0.76 dB	∞	
Coverage Factor for 95 %					K=2		
Expanded STD Uncertainty					1.52 dB		
Declaration of Conformity: The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.							
Comments and Explanations: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.							



14. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [3] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [4] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.