



FCC RADIO TEST REPORT

FCC ID : A4RG8AK3
Equipment : Wireless Device
Model Name : G8AK3
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 18, 2025 and testing was performed from Mar. 31, 2025 to Apr. 08, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment.....	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Spot Check Evaluation on G8AK3	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR511002C	01	Initial issue of report	Apr. 28, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- ECR inquiry for data referencing from A4RG1KAW has been approved by FCC. The ECR inquiry and the associated document are submitted in the confidential exhibit.
- A4RG8AK3 is different from FCC ID: A4RG1KAW (Reference model), in the following:
 - The only difference between A4RG1KAW and A4RG8AK3 are the LTE and NTN function, which is depopulated by hardware.
- All the test results are referenced from A4RG1KAW (Sporton Test Report FR4D1914C), and spot check results to justify data referencing is presented in the Appendix E.
- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Dara Chiu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth, BLE, BLE ASK, BLE GFSK, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, UWB, 60GHz, and GNSS.
Antenna Type WLAN: PIFA Antenna

EUT Information List	
S/N	Performed Test Item
51161WRBNL320R	RF Conducted Measurement
51161WRBNL31SK	Radiated Spurious Emission
51161WRBNL31TB	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-5.4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		

2.2 Test Mode

This device support 26/52/106/242-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel.

The power of 802.11ac modes are less than 802.11n mode, so all conducted and radiated tests are covered by 802.11n mode.


The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ax HE20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) 802.11b Channel 06 Tx + USB Cable (Charging from AC Adapter)
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

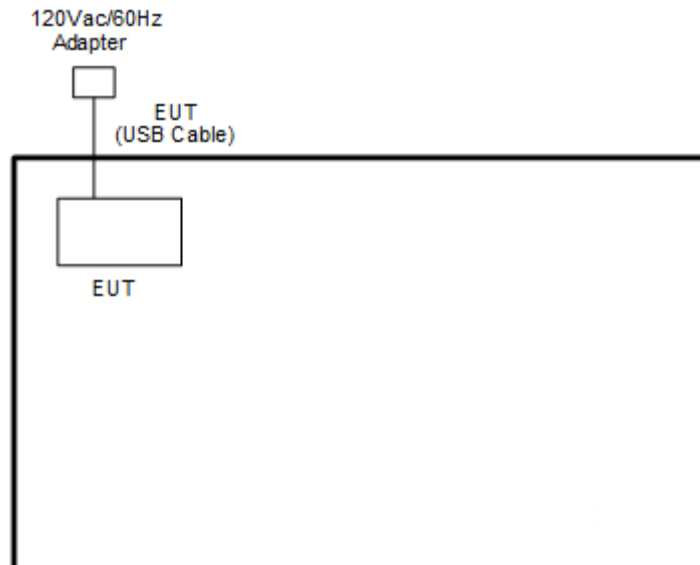

<WLAN Tx Mode>

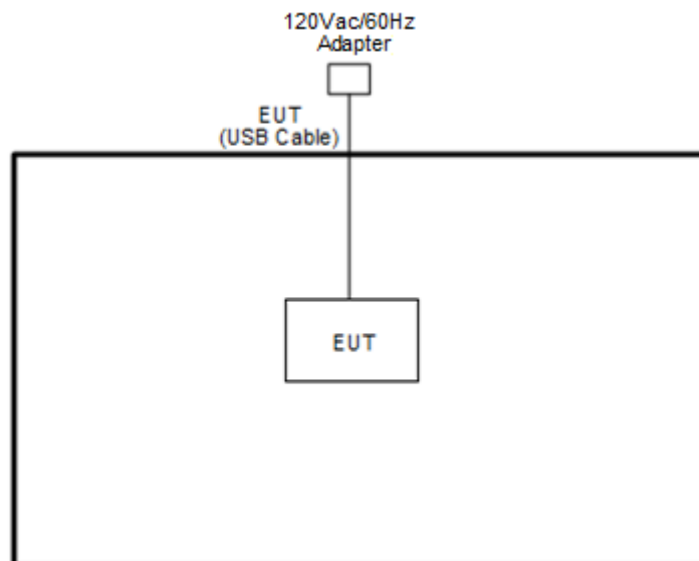

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.41” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

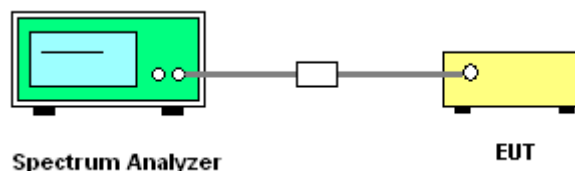

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

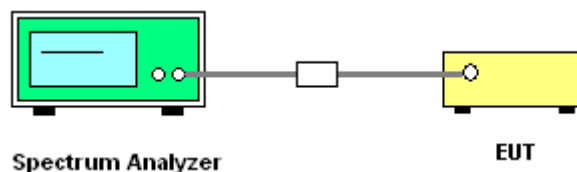

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

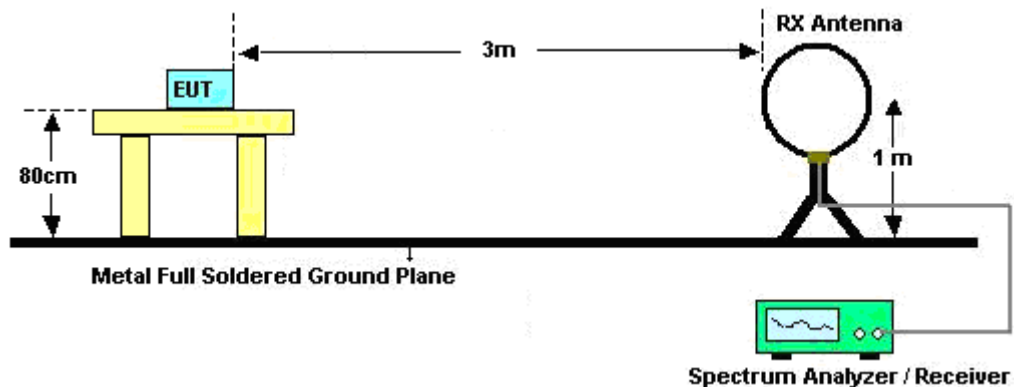


For radiated emissions from 30MHz to 1GHz

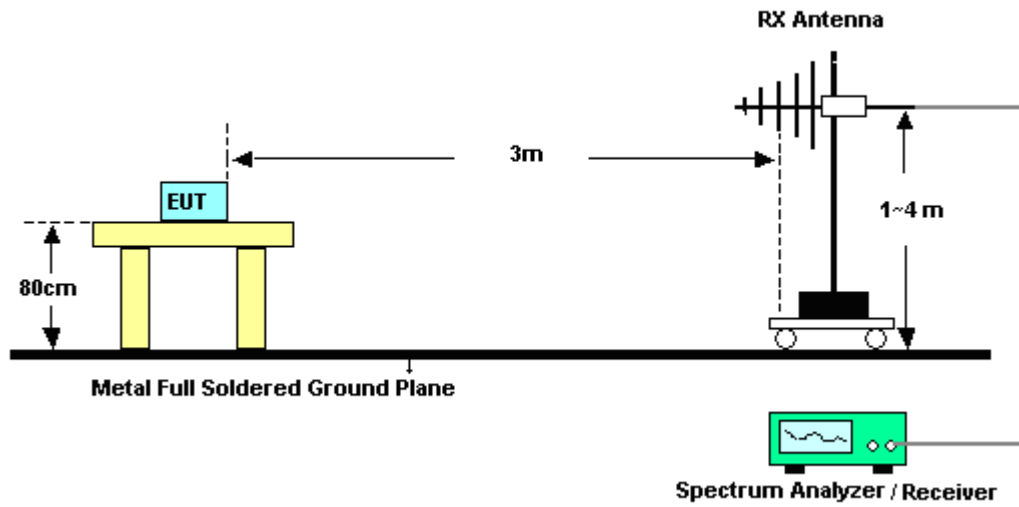

For radiated test from 1GHz to 18GHz

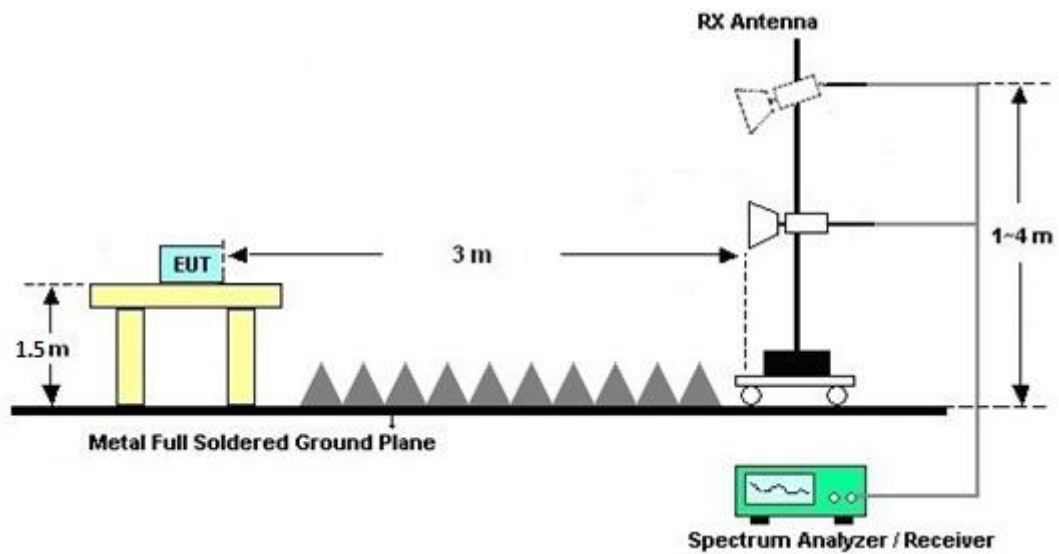

For radiated test above 18GHz

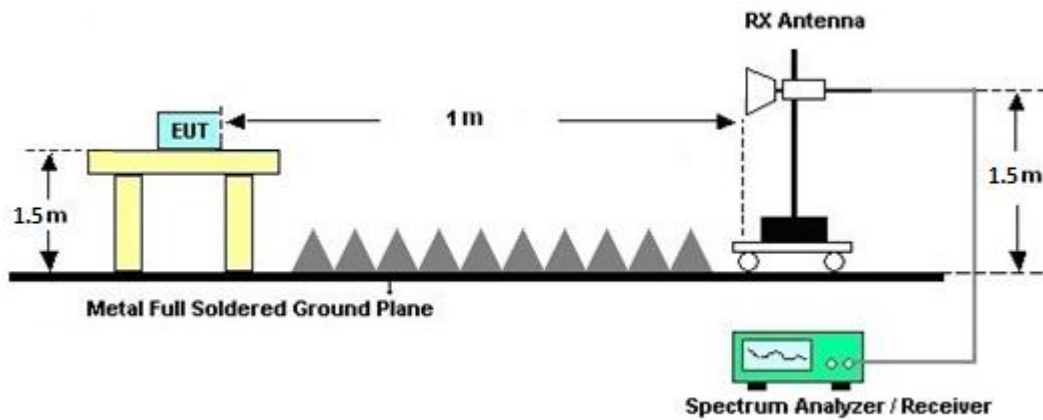

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

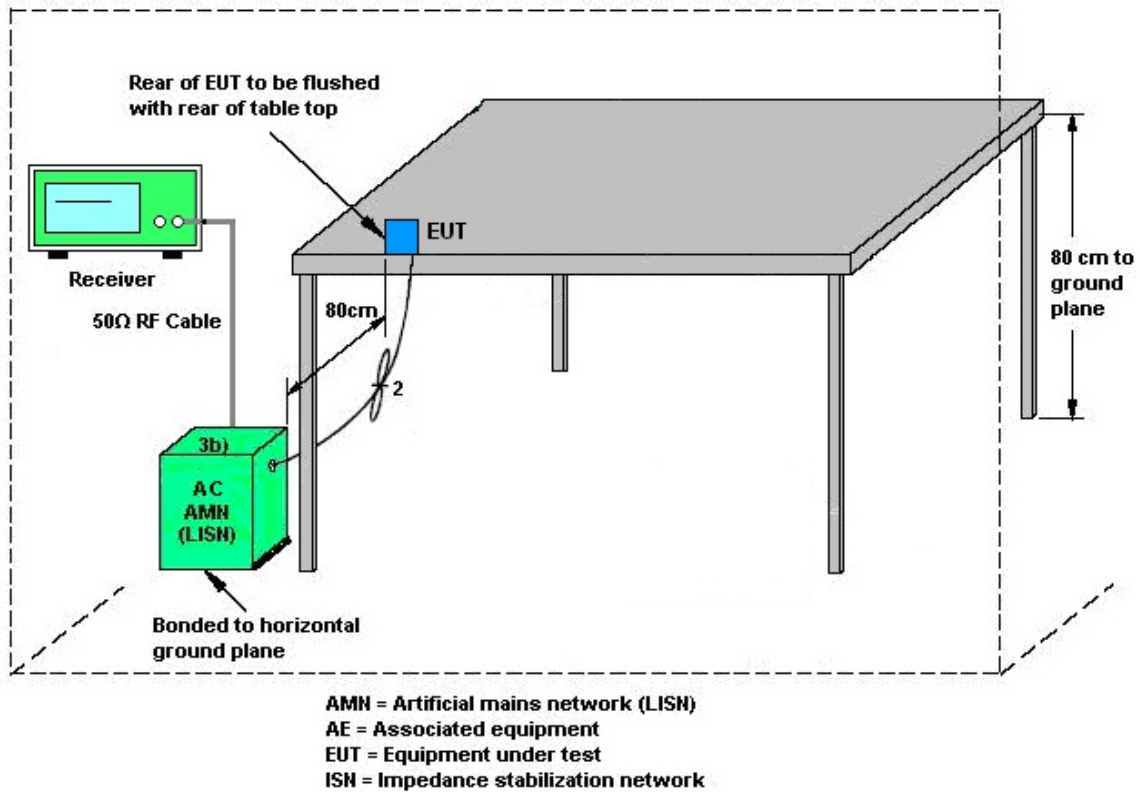

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

b) Unique (non-standard) antenna connector.

Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Aug. 28, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Mar. 11, 2025 ~ Mar. 23, 2024	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 24, 2025	Mar. 24, 2025 ~ Mar. 28, 2024	Mar. 23, 2026	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 21, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Jan. 20, 2026	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 01, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Mar. 11, 2025 ~ Mar. 28, 2024	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 05, 2025	Mar. 11, 2025 ~ Mar. 28, 2024	Mar. 04, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Mar. 11, 2025 ~ Mar. 28, 2024	Sep. 09, 2025	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Feb. 24, 2025 ~ Mar. 31, 2025	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Feb. 24, 2025 ~ Mar. 31, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Feb. 24, 2025 ~ Mar. 31, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Feb. 24, 2025 ~ Mar. 31, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Feb. 24, 2025 ~ Mar. 31, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 01, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 01, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Apr. 01, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Apr. 01, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Apr. 01, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Apr. 01, 2025	Sep. 22, 2025	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/2/24~03/31	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant0	Ant1	Ant0	Ant1		
11b	1Mbps	1	1	2412	13.34	-	9.02	-	0.50	Pass
11b	1Mbps	1	6	2437	13.26	-	8.52	-	0.50	Pass
11b	1Mbps	1	11	2462	13.31	-	9.02	-	0.50	Pass
11g	6Mbps	1	1	2412	17.68	-	16.34	-	0.50	Pass
11g	6Mbps	1	6	2437	24.84	-	16.32	-	0.50	Pass
11g	6Mbps	1	11	2462	17.29	-	16.34	-	0.50	Pass
HT20	MCS0	1	1	2412	18.62	-	17.58	-	0.50	Pass
HT20	MCS0	1	6	2437	27.55	-	17.57	-	0.50	Pass
HT20	MCS0	1	11	2462	18.39	-	17.57	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	20.80	-		30.00	-	-5.40	-	15.40	-	36.00	-	Pass
11b	1Mbps	1	6	2437	20.90	-		30.00	-	-5.40	-	15.50	-	36.00	-	Pass
11b	1Mbps	1	11	2462	20.90	-		30.00	-	-5.40	-	15.50	-	36.00	-	Pass
11g	6Mbps	1	1	2412	18.60	-		30.00	-	-5.40	-	13.20	-	36.00	-	Pass
11g	6Mbps	1	6	2437	20.86	-		30.00	-	-5.40	-	15.46	-	36.00	-	Pass
11g	6Mbps	1	10	2457	18.80	-		30.00	-	-5.40	-	13.40	-	36.00	-	Pass
11g	6Mbps	1	11	2462	17.80	-		30.00	-	-5.40	-	12.40	-	36.00	-	Pass
HT20	MCS0	1	1	2412	18.60	-		30.00	-	-5.40	-	13.20	-	36.00	-	Pass
HT20	MCS0	1	6	2437	20.64	-		30.00	-	-5.40	-	15.24	-	36.00	-	Pass
HT20	MCS0	1	10	2457	18.50	-		30.00	-	-5.40	-	13.10	-	36.00	-	Pass
HT20	MCS0	1	11	2462	17.50	-		30.00	-	-5.40	-	12.10	-	36.00	-	Pass
VHT20	MCS0	1	1	2412	18.50	-		30.00	-	-5.40	-	13.10	-	36.00	-	Pass
VHT20	MCS0	1	6	2437	20.54	-		30.00	-	-5.40	-	15.14	-	36.00	-	Pass
VHT20	MCS0	1	10	2457	18.40	-		30.00	-	-5.40	-	13.00	-	36.00	-	Pass
VHT20	MCS0	1	11	2462	17.40	-		30.00	-	-5.40	-	12.00	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	-0.98	-		-5.40	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-0.68	-		-5.40	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-0.57	-		-5.40	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-7.05	-		-5.40	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-4.06	-		-5.40	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-7.53	-		-5.40	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-7.55	-		-5.40	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-3.52	-		-5.40	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-8.47	-		-5.40	-	8.00	-	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna											
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant0	Ant1	Ant0	Ant1		
HE20	MCS0	1	1	2412	Full	19.20	-	18.99	-	0.50	Pass
HE20	MCS0	1	6	2437	Full	26.48	-	18.90	-	0.50	Pass
HE20	MCS0	1	11	2462	Full	19.15	-	19.04	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
HE20	MCS0	1	1	2412	Full	17.50	-		30.00	-	-5.40	-	12.10	-	36.00	-	Pass
HE20	MCS0	1	1	2412	26/0	7.60	-		30.00	-	-5.40	-	2.20	-	36.00	-	Pass
HE20	MCS0	1	1	2412	52/37	10.60	-		30.00	-	-5.40	-	5.20	-	36.00	-	Pass
HE20	MCS0	1	1	2412	106/53	13.20	-		30.00	-	-5.40	-	7.80	-	36.00	-	Pass
HE20	MCS0	1	2	2417	Full	19.20	-		30.00	-	-5.40	-	13.80	-	36.00	-	Pass
HE20	MCS0	1	2	2417	26/0	9.20	-		30.00	-	-5.40	-	3.80	-	36.00	-	Pass
HE20	MCS0	1	2	2417	52/37	11.50	-		30.00	-	-5.40	-	6.10	-	36.00	-	Pass
HE20	MCS0	1	2	2417	106/53	15.00	-		30.00	-	-5.40	-	9.60	-	36.00	-	Pass
HE20	MCS0	1	6	2437	Full	20.74	-		30.00	-	-5.40	-	15.34	-	36.00	-	Pass
HE20	MCS0	1	6	2437	26/4	12.10	-		30.00	-	-5.40	-	6.70	-	36.00	-	Pass
HE20	MCS0	1	6	2437	52/38	14.00	-		30.00	-	-5.40	-	8.60	-	36.00	-	Pass
HE20	MCS0	1	6	2437	106/53	17.40	-		30.00	-	-5.40	-	12.00	-	36.00	-	Pass
HE20	MCS0	1	10	2457	Full	17.80	-		30.00	-	-5.40	-	12.40	-	36.00	-	Pass
HE20	MCS0	1	10	2457	26/8	8.10	-		30.00	-	-5.40	-	2.70	-	36.00	-	Pass
HE20	MCS0	1	10	2457	52/40	10.60	-		30.00	-	-5.40	-	5.20	-	36.00	-	Pass
HE20	MCS0	1	10	2457	106/54	13.70	-		30.00	-	-5.40	-	8.30	-	36.00	-	Pass
HE20	MCS0	1	11	2462	Full	16.40	-		30.00	-	-5.40	-	11.00	-	36.00	-	Pass
HE20	MCS0	1	11	2462	26/8	7.60	-		30.00	-	-5.40	-	2.20	-	36.00	-	Pass
HE20	MCS0	1	11	2462	52/40	10.50	-		30.00	-	-5.40	-	5.10	-	36.00	-	Pass
HE20	MCS0	1	11	2462	106/54	13.10	-		30.00	-	-5.40	-	7.70	-	36.00	-	Pass


Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
HE20	MCS0	1	1	2412	Full	-9.22	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	26/0	-9.43	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	52/37	-9.46	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	106/53	-9.34	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	2	2417	Full	-7.50	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	2	2417	26/0	-7.77	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	2	2417	52/37	-7.75	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	2	2417	106/53	-7.86	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	Full	-5.66	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	26/4	-5.69	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	52/38	-5.72	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	106/53	-5.81	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	10	2457	Full	-9.25	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	10	2457	26/8	-9.57	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	10	2457	52/40	-9.58	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	10	2457	106/54	-9.29	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	Full	-9.81	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	26/8	-9.91	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	52/40	-10.04	-		-5.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	106/54	-10.01	-		-5.40	-	8.00	-	Pass


**6dB and 99% Occupied Bandwidth**

<802.11b>

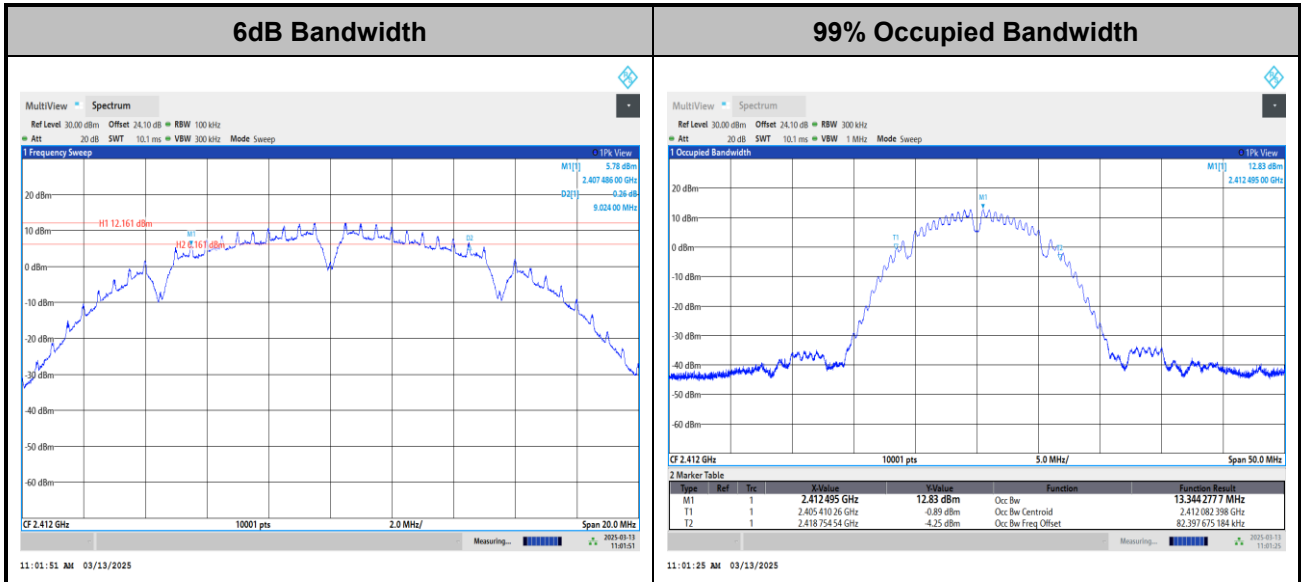

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

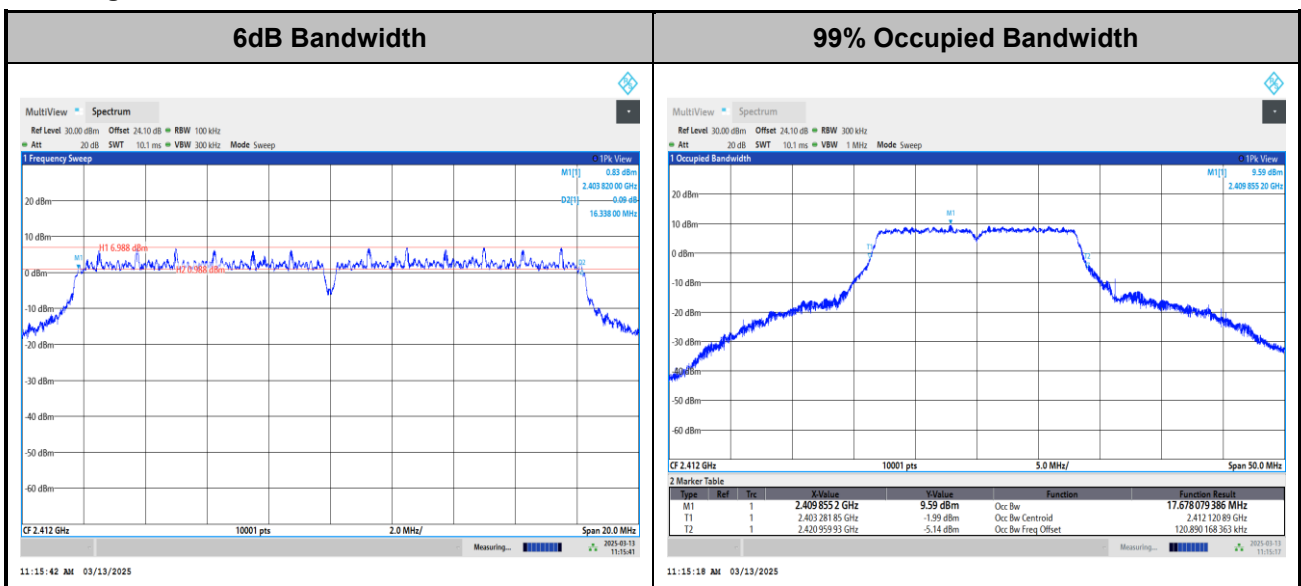

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11n HT20>


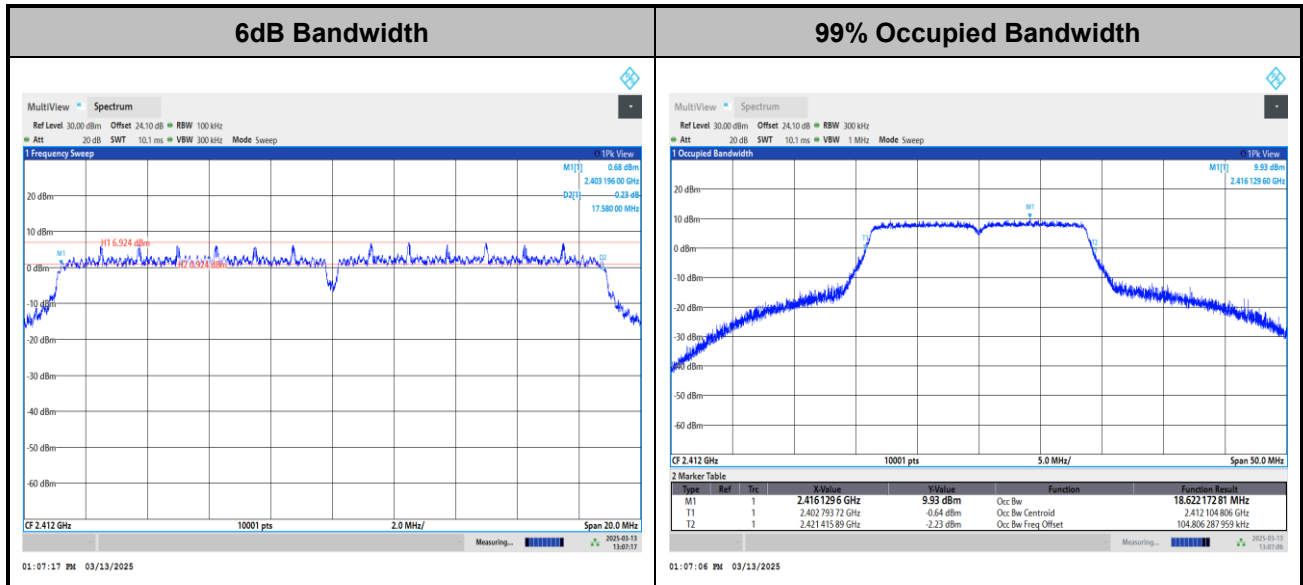


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<802.11ax HE20>

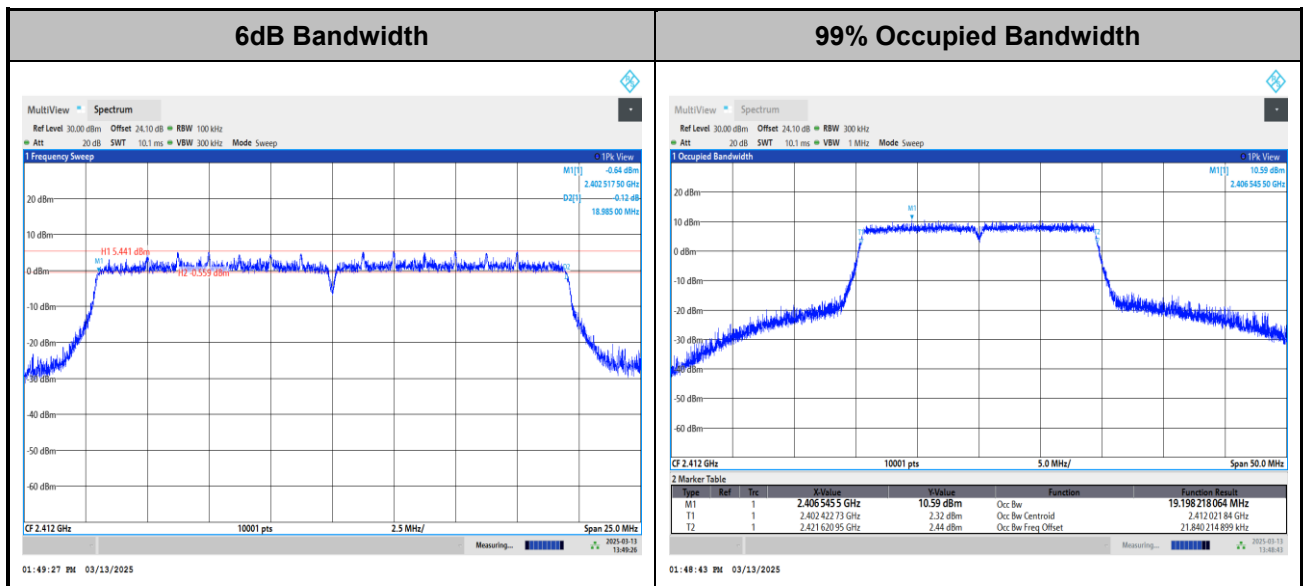


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

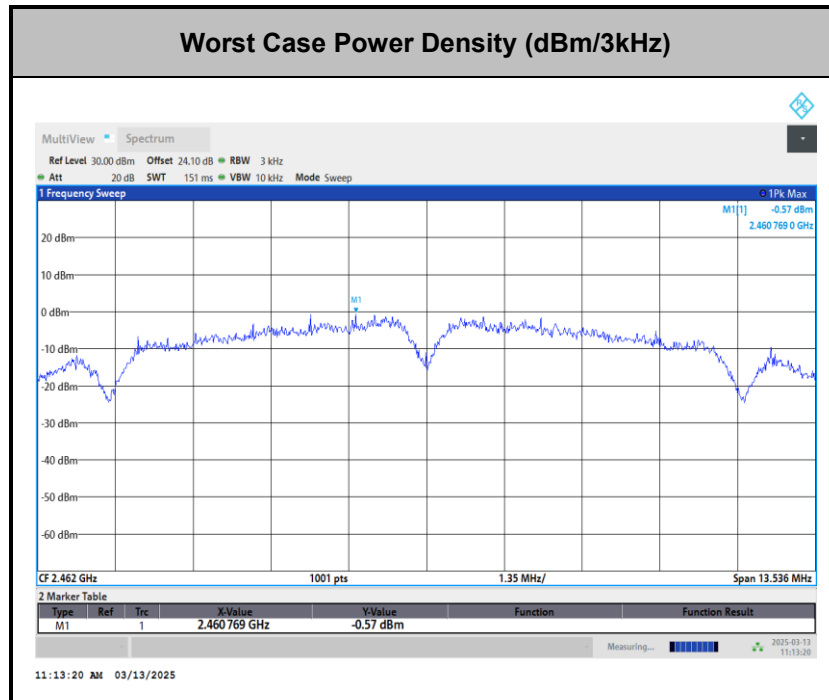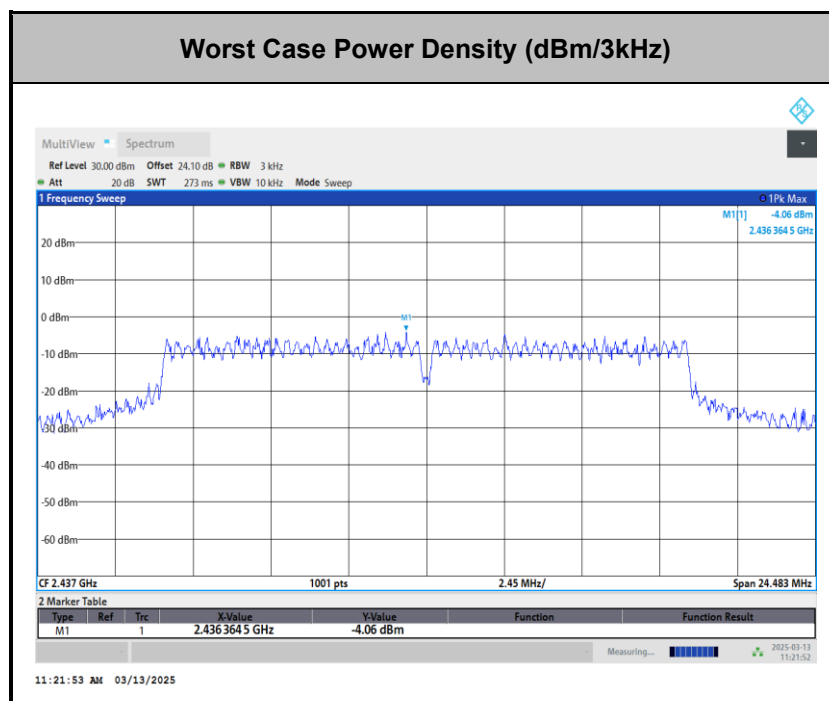
Power Spectral Density(dBm/3kHz)
<802.11b>

<802.11g>

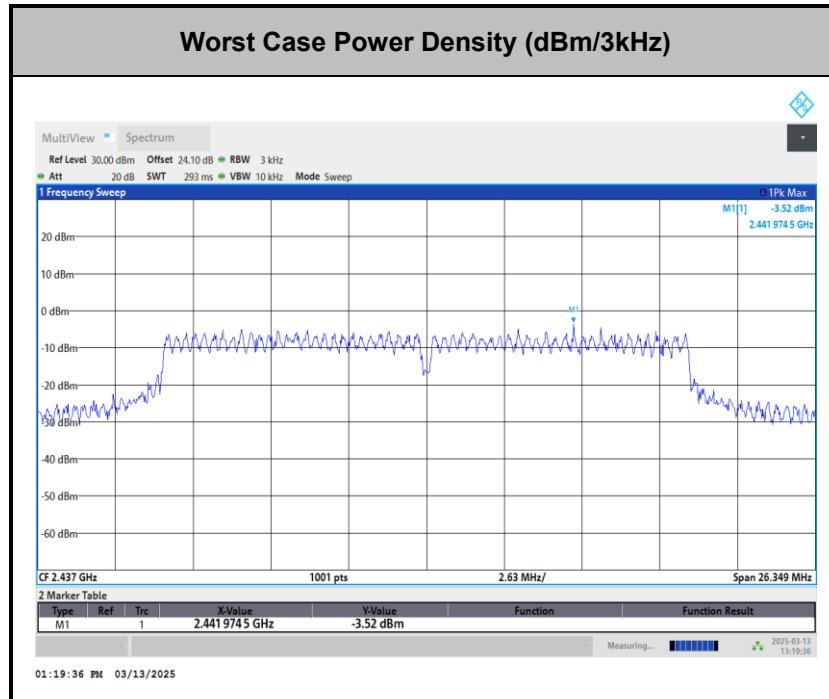


<802.11n HT20>

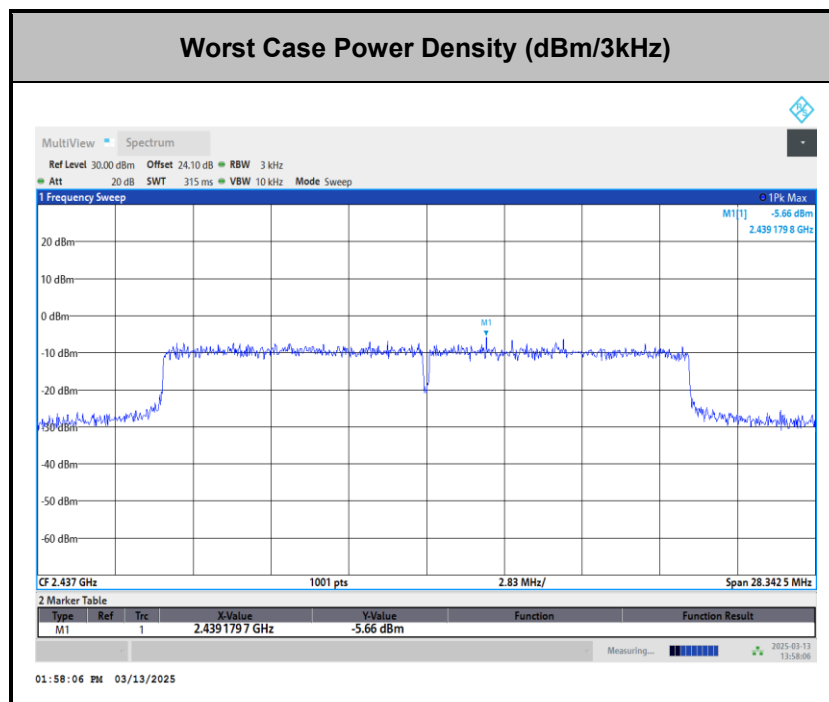





<802.11ax HE20>



**Band Edges and Spurious Emission**

Test Mode : 802.11b

Test Channel : 01

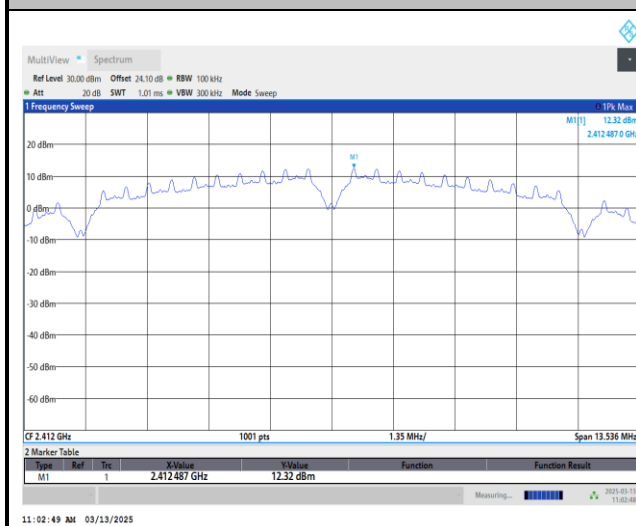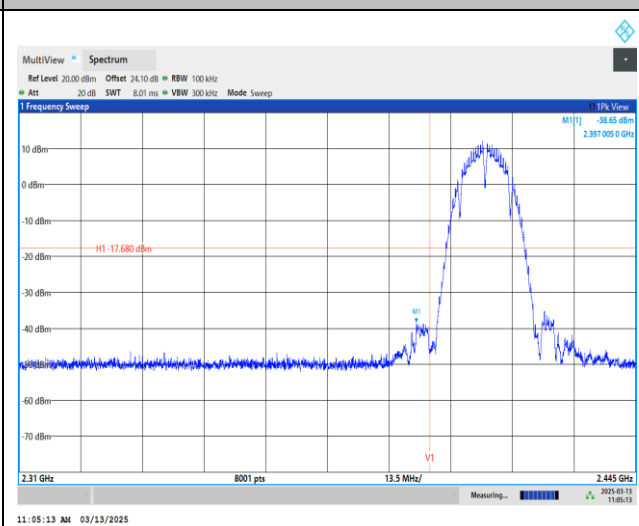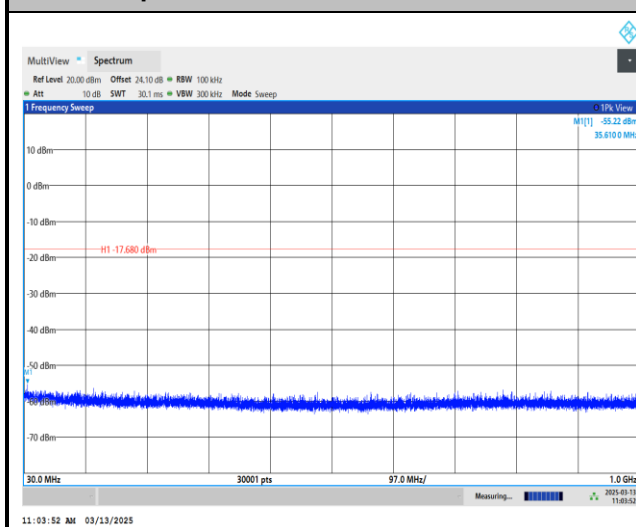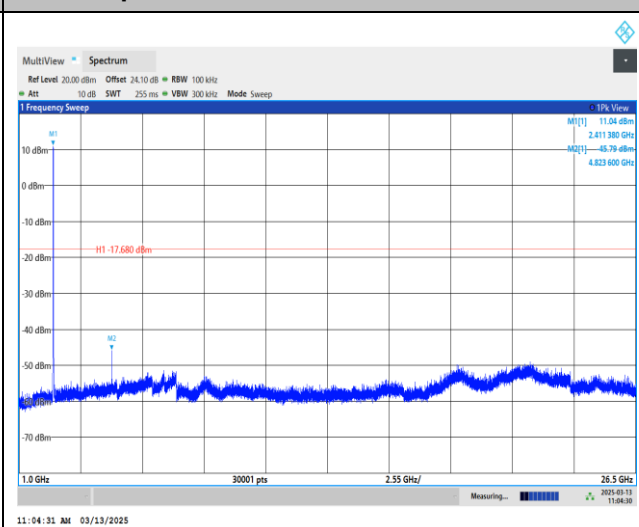
100kHz PSD reference Level**Channel 01 Plot****Spurious Emission 30MHz~1GHz****Spurious Emission 1GHz~26.5GHz**



Test Mode : 802.11b


Test Channel : 06

100kHz PSD reference Level

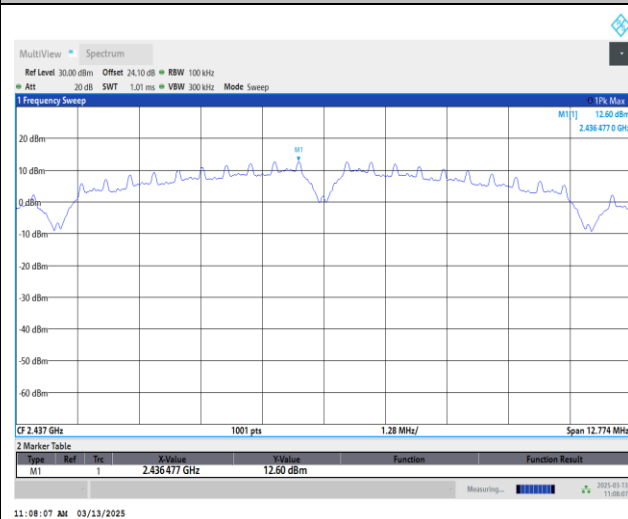


Channel 06 Plot

Spurious Emission 30MHz~1GHz

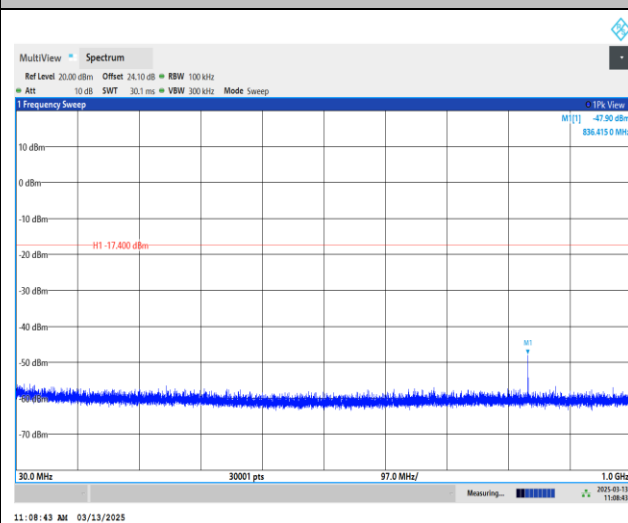

Spurious Emission 1GHz~26.5GHz

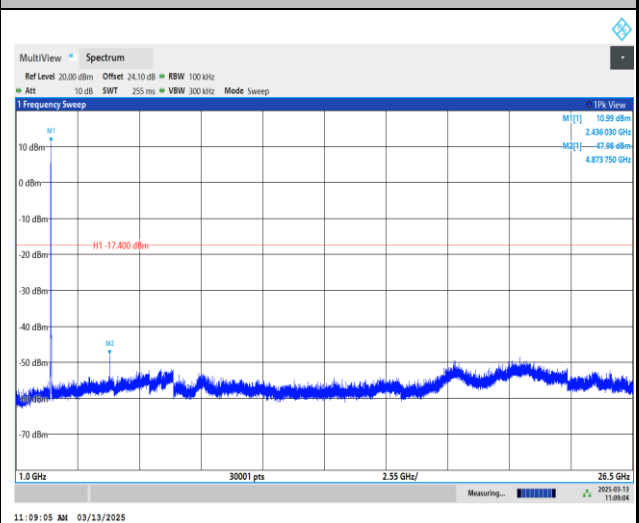





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

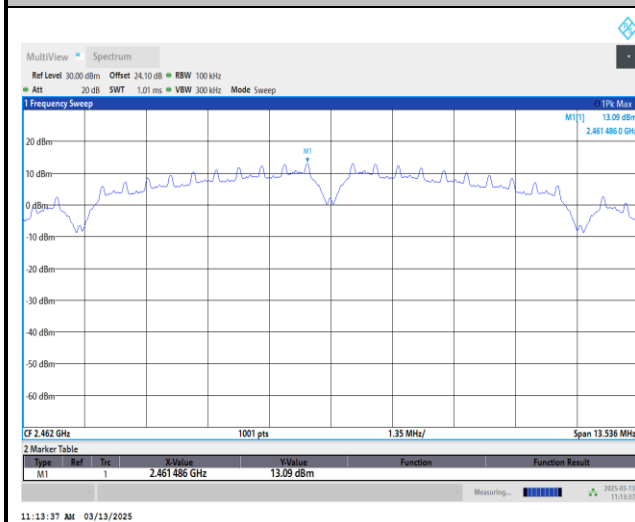


Channel 11 Plot

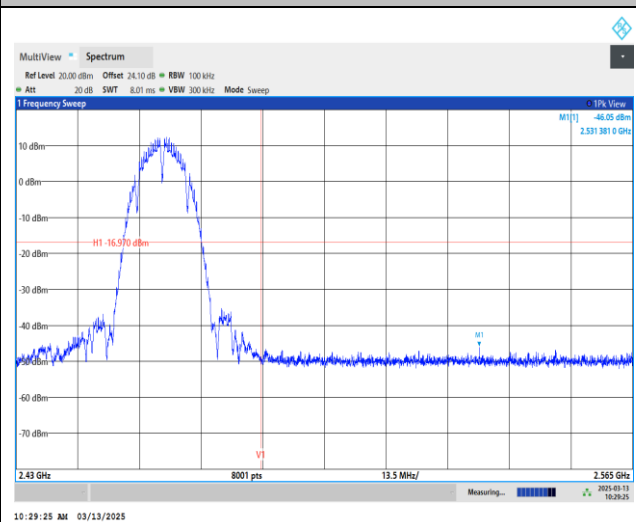

Spurious Emission 30MHz~1GHz

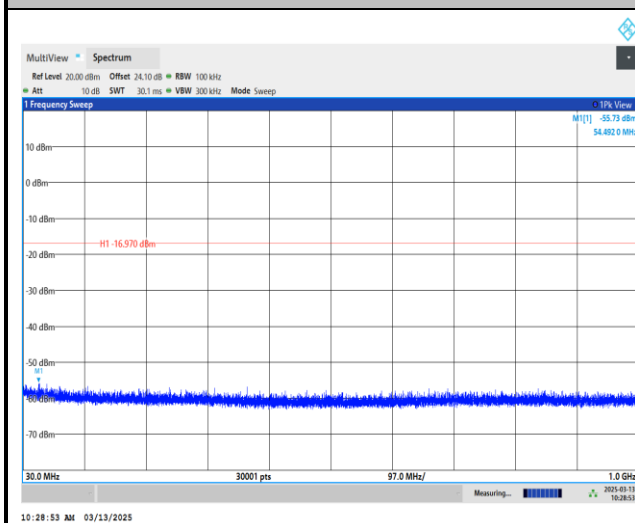

Spurious Emission 1GHz~26.5GHz

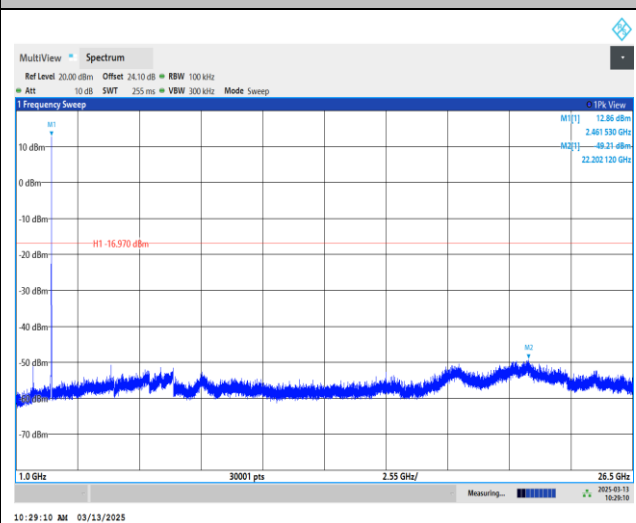





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

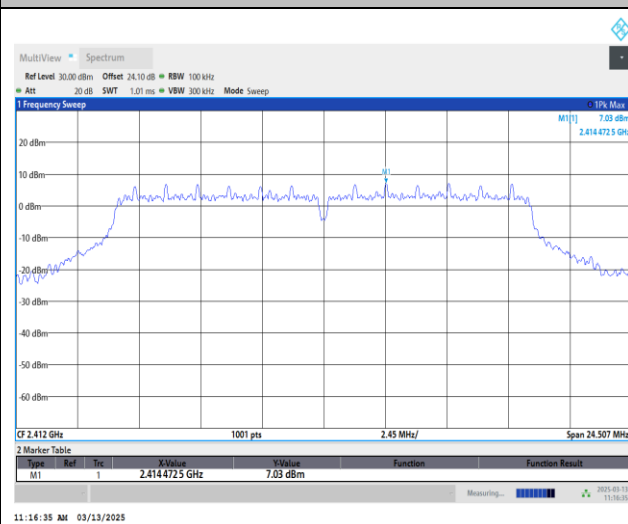


Channel 01 Plot

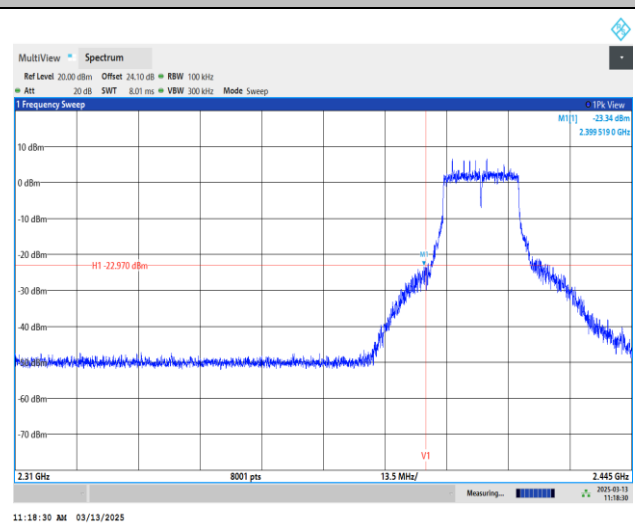

Spurious Emission 30MHz~1GHz

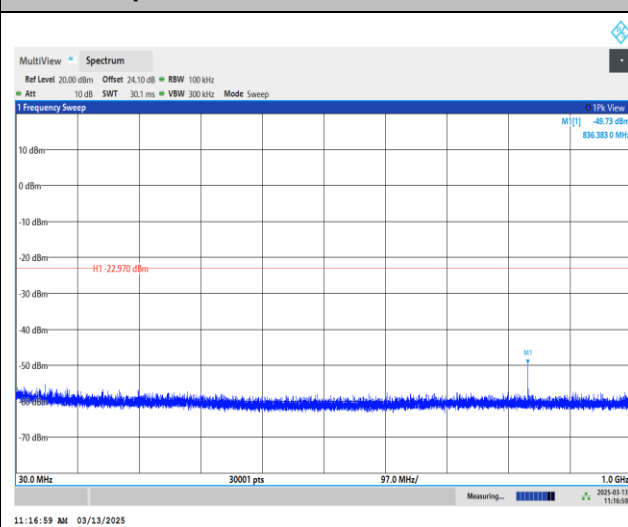

Spurious Emission 1GHz~26.5GHz

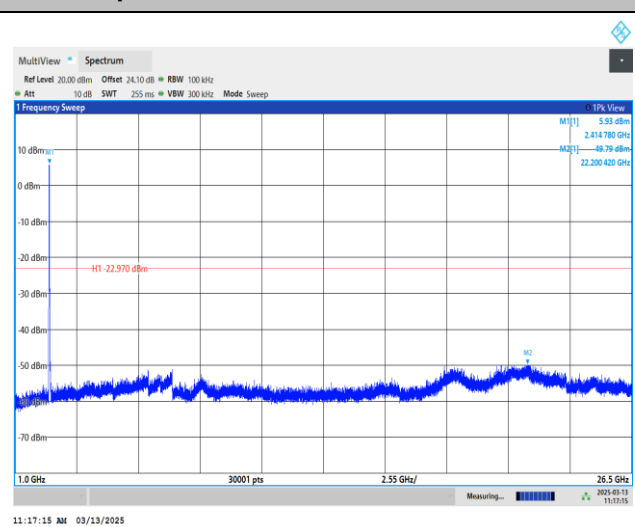




Test Mode : 802.11g


Test Channel : 06

100kHz PSD reference Level

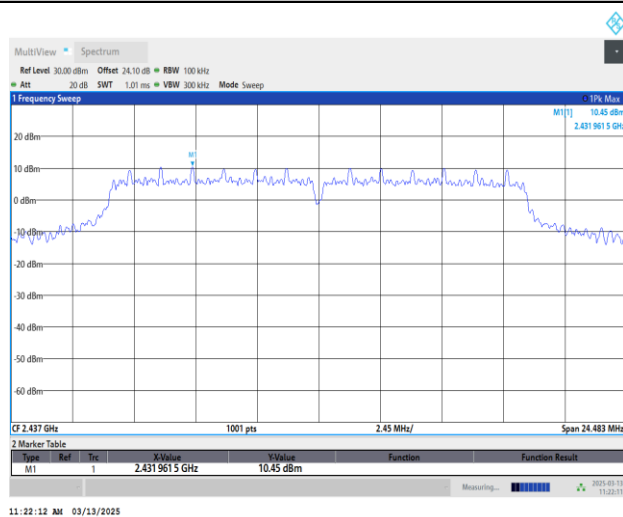


Channel 06 Plot

Spurious Emission 30MHz~1GHz

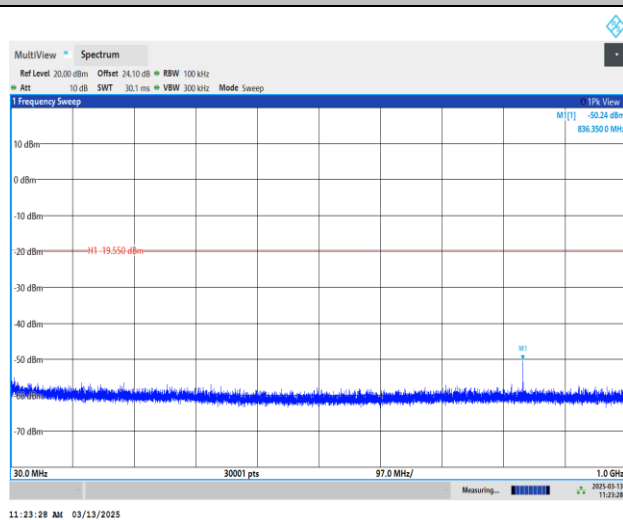

Spurious Emission 1GHz~26.5GHz

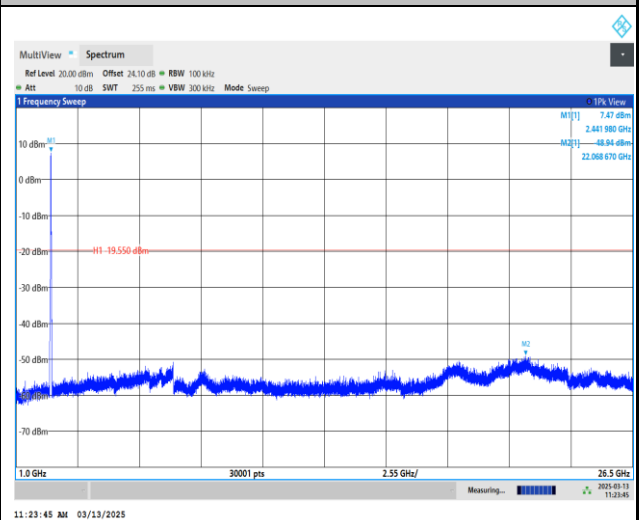





Test Mode : 802.11g

Test Channel : 10


100kHz PSD reference Level

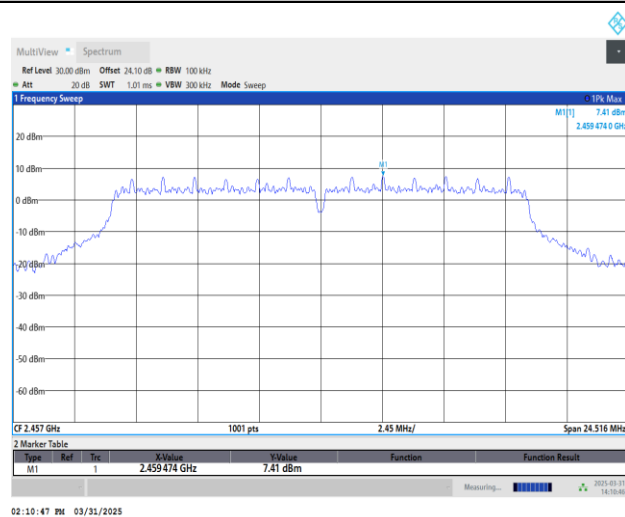


Channel 10 Plot

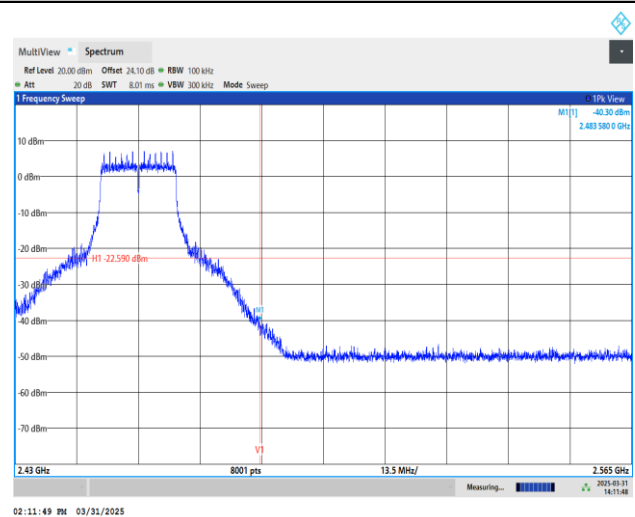

Spurious Emission 30MHz~1GHz

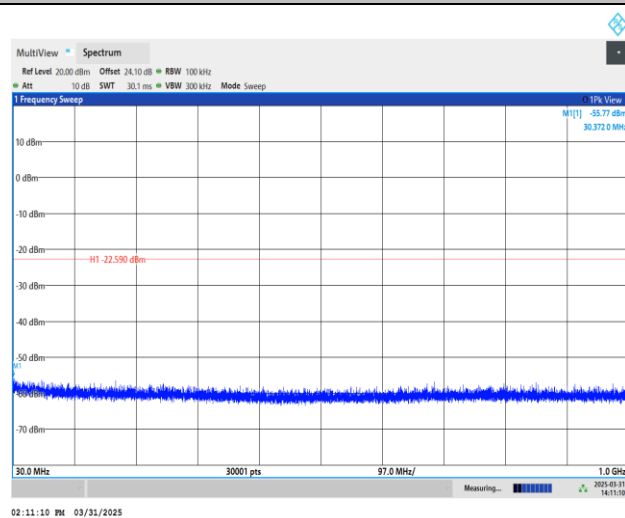

Spurious Emission 1GHz~26.5GHz

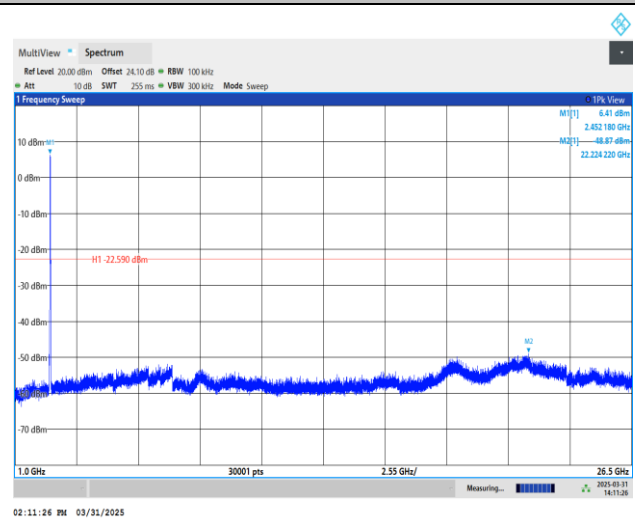





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

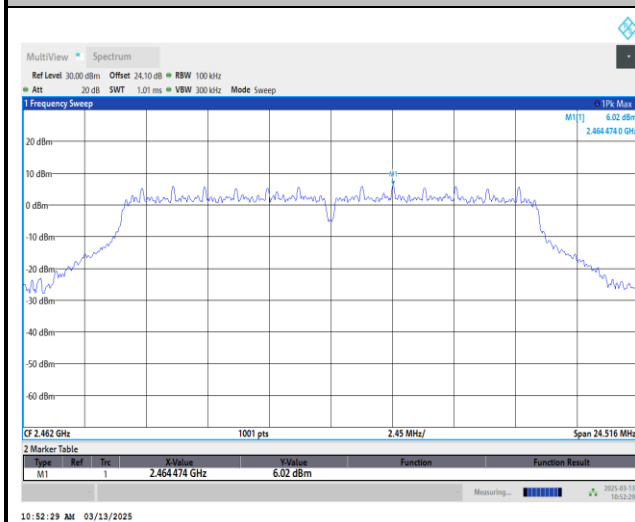


Channel 11 Plot

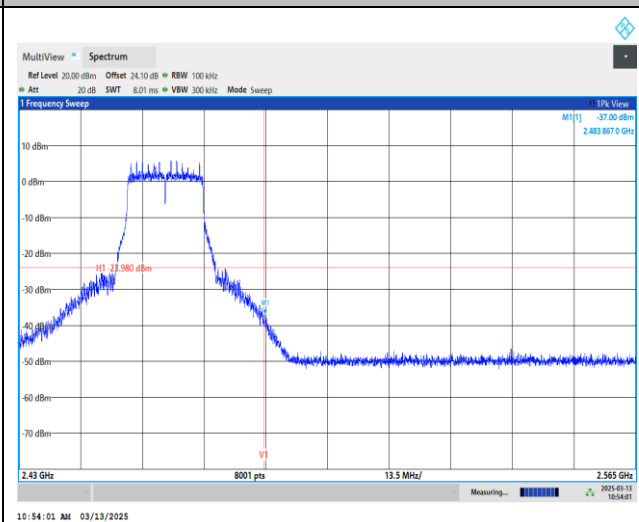

Spurious Emission 30MHz~1GHz

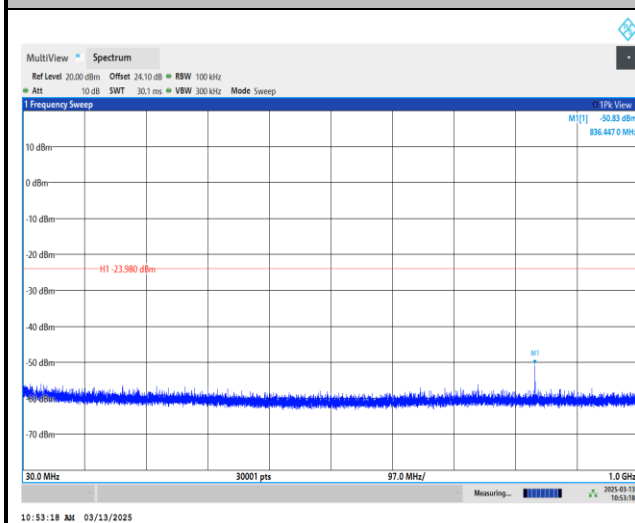

Spurious Emission 1GHz~26.5GHz

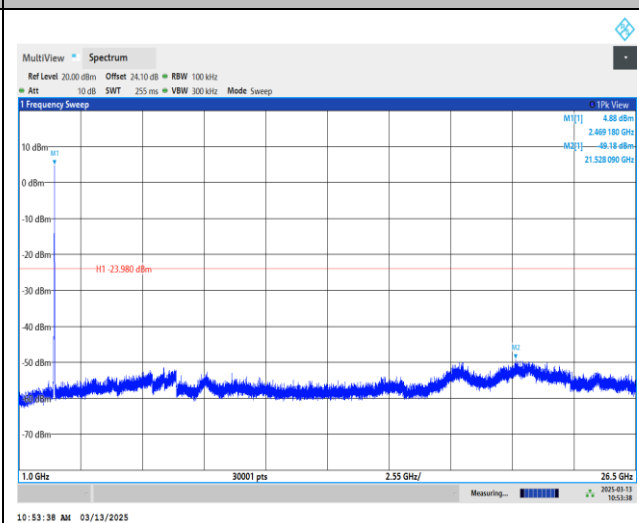





Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

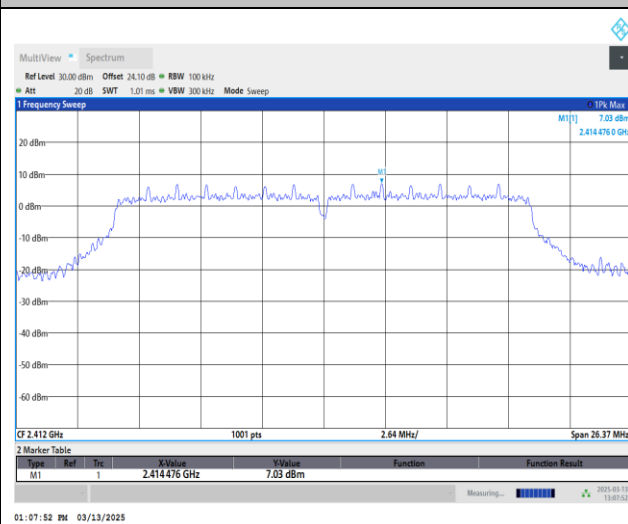


Channel 01 Plot

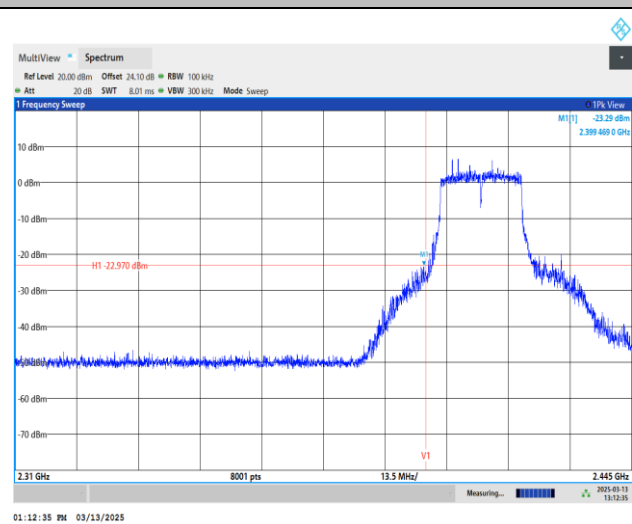

Spurious Emission 30MHz~1GHz

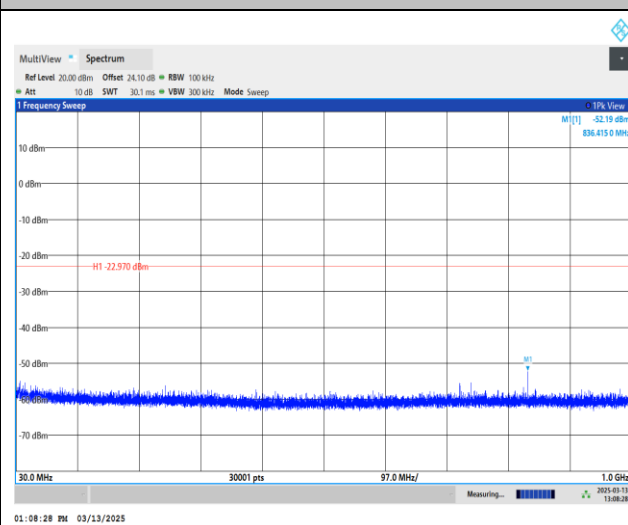

Spurious Emission 1GHz~26.5GHz

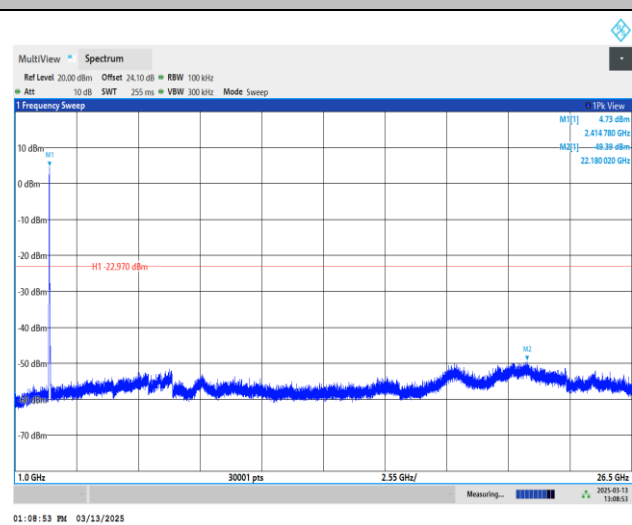




Test Mode : 802.11n HT20


Test Channel : 06

100kHz PSD reference Level

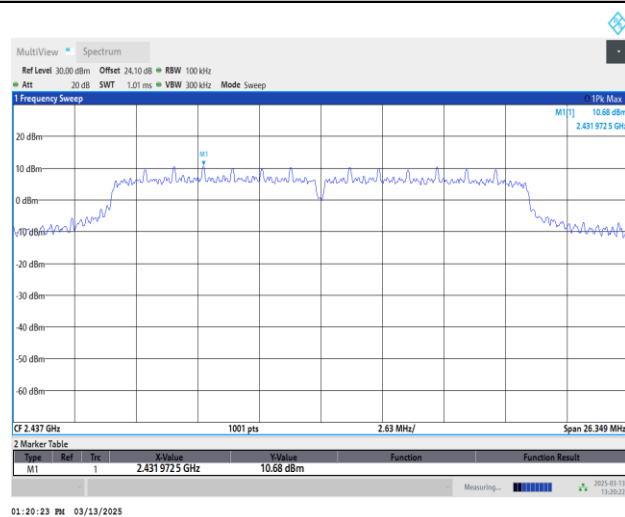


Channel 06 Plot

Spurious Emission 30MHz~1GHz

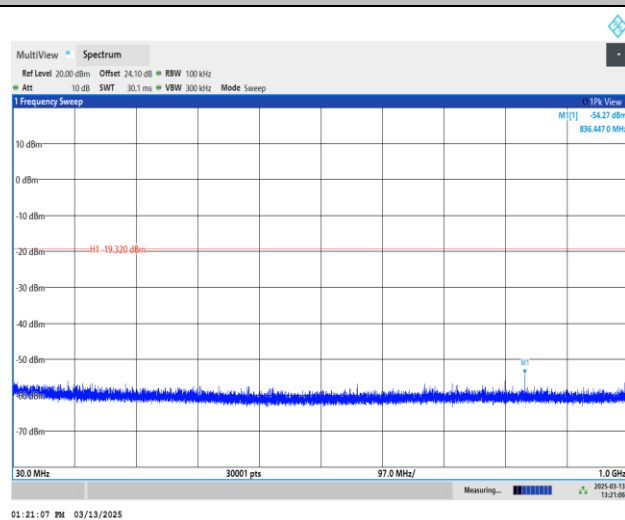

Spurious Emission 1GHz~26.5GHz

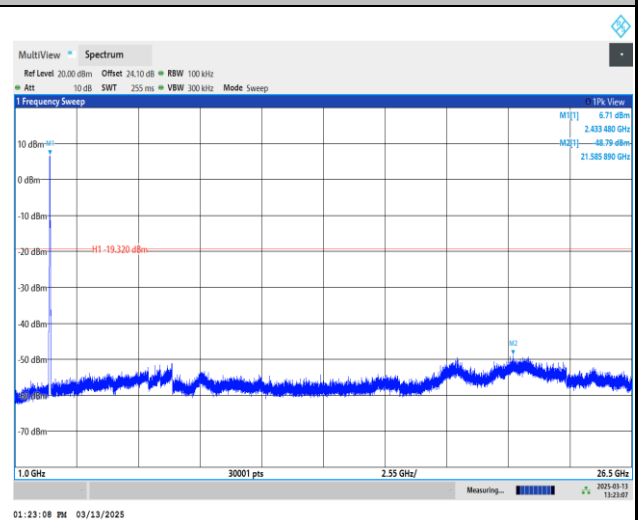





Test Mode : 802.11n HT20

Test Channel : 10


100kHz PSD reference Level

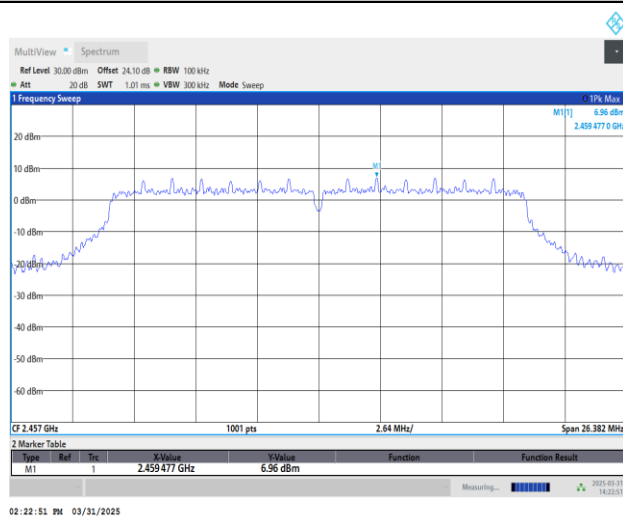


Channel 10 Plot

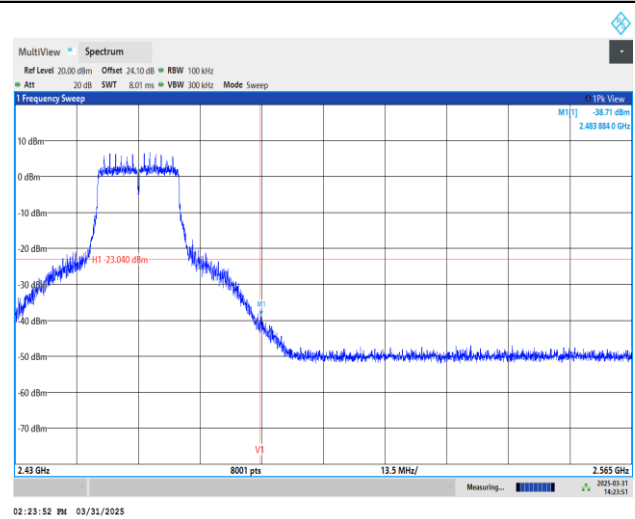

Spurious Emission 30MHz~1GHz

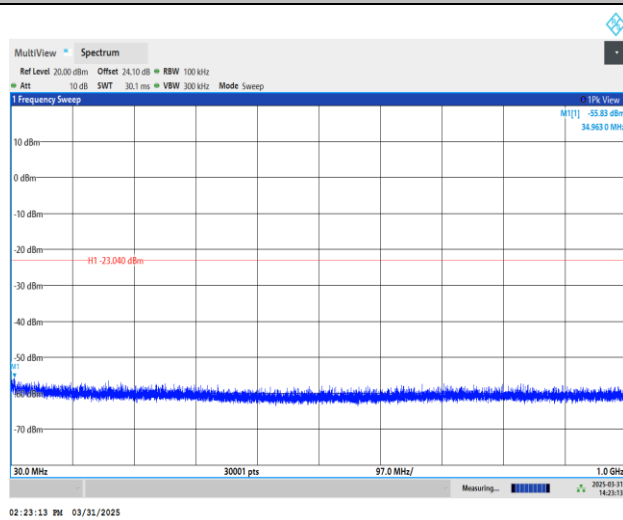

Spurious Emission 1GHz~26.5GHz

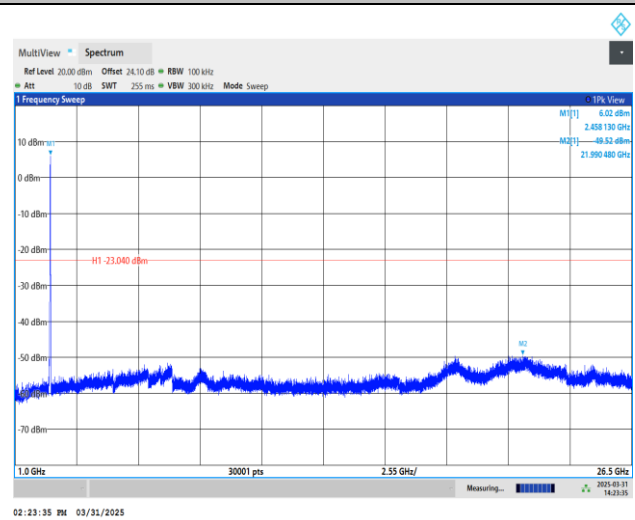





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

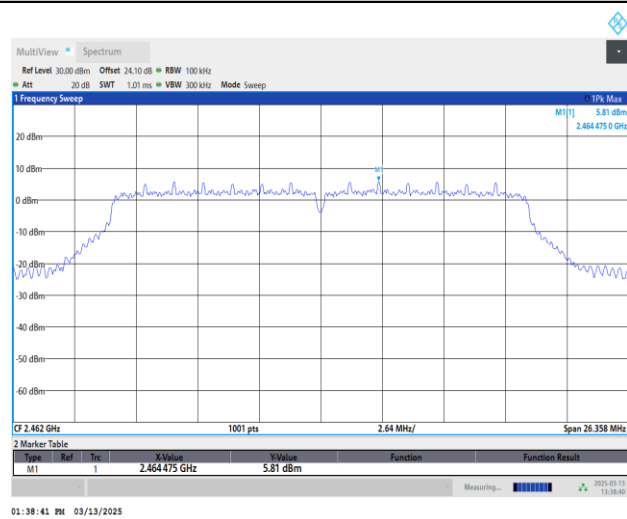


Channel 11 Plot

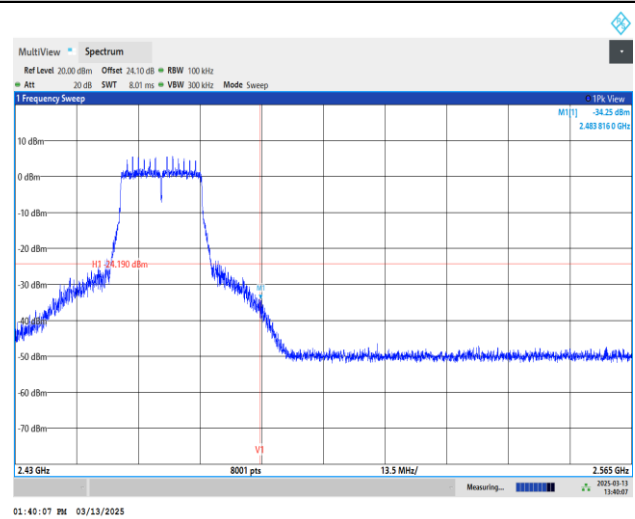

Spurious Emission 30MHz~1GHz

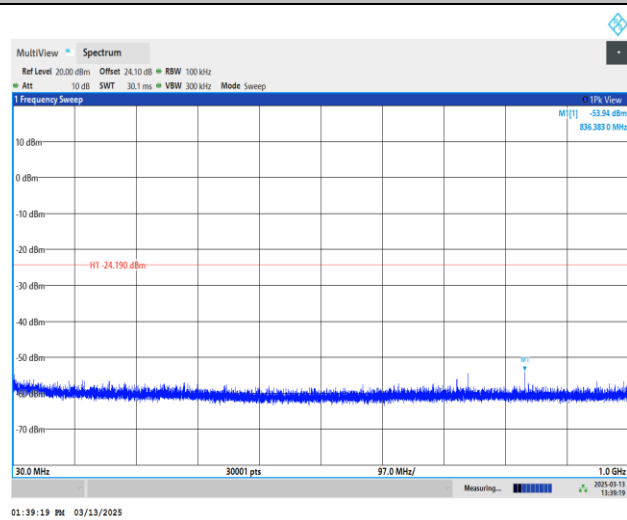

Spurious Emission 1GHz~26.5GHz

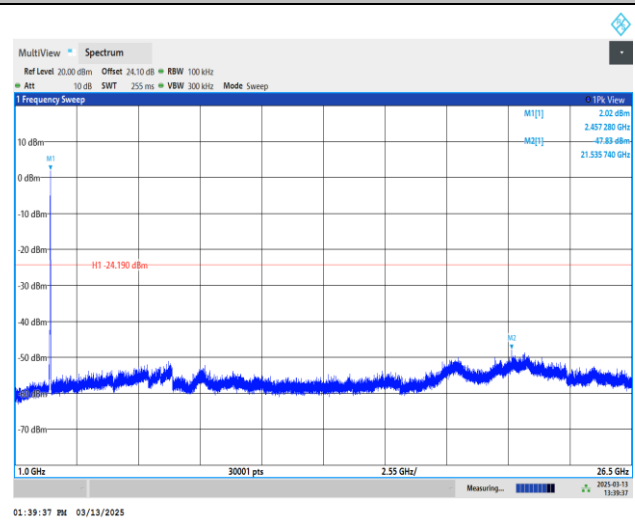





Test Mode : 802.11ax HE20_FullIRU

Test Channel : 01


100kHz PSD reference Level

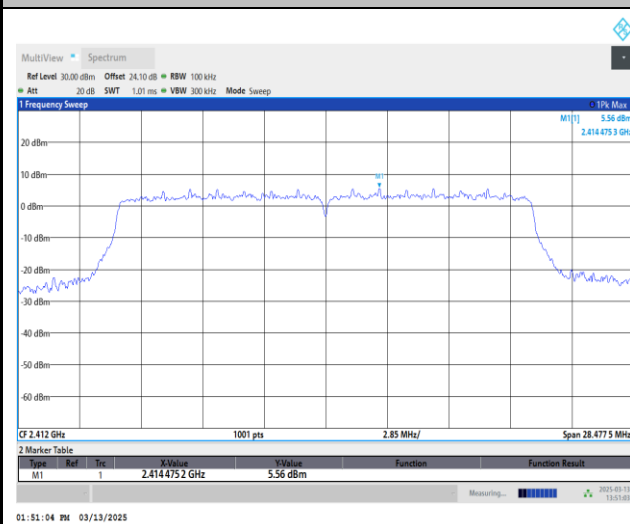


Channel 01 Plot

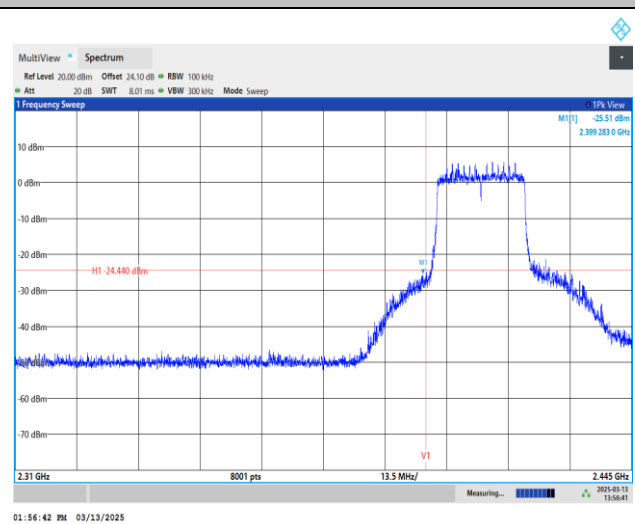

Spurious Emission 30MHz~1GHz

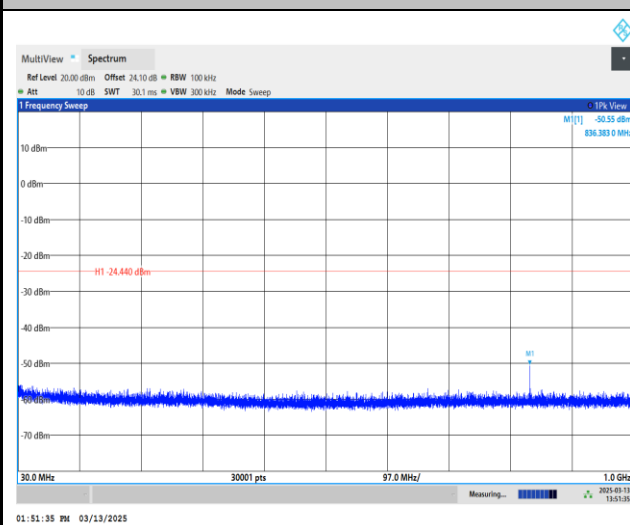

Spurious Emission 1GHz~26.5GHz

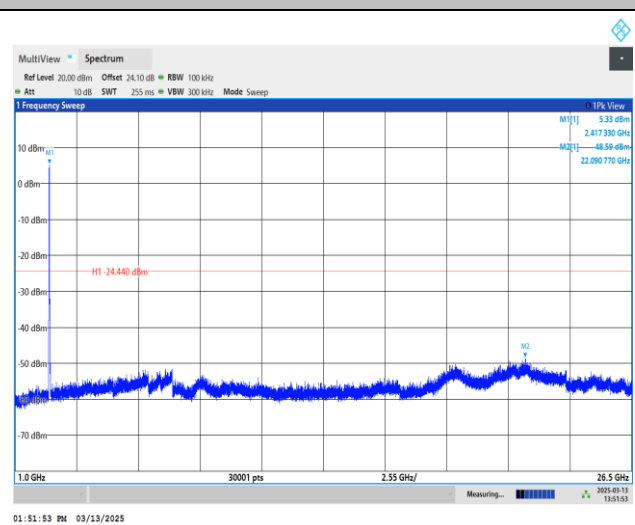





Test Mode : 802.11ax HE20_FullIRU

Test Channel : 02


100kHz PSD reference Level

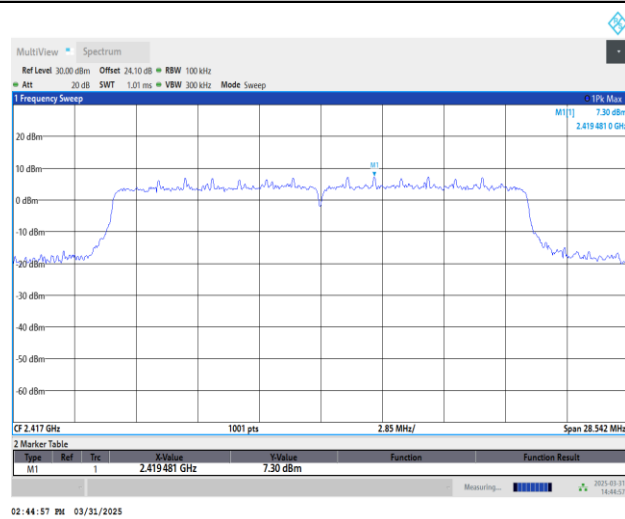


Channel 02 Plot

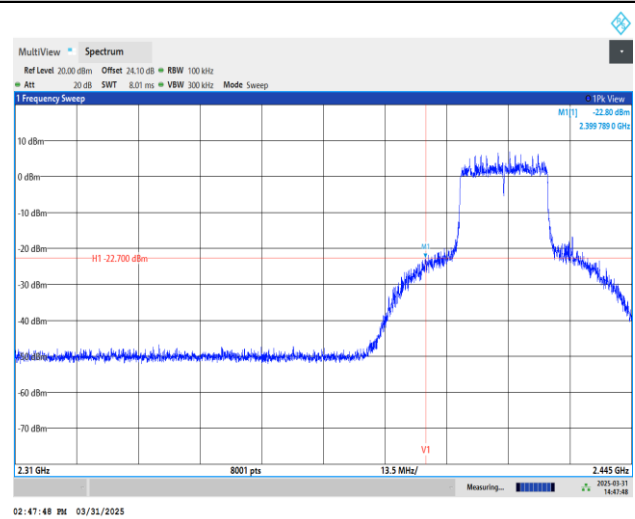

Spurious Emission 30MHz~1GHz

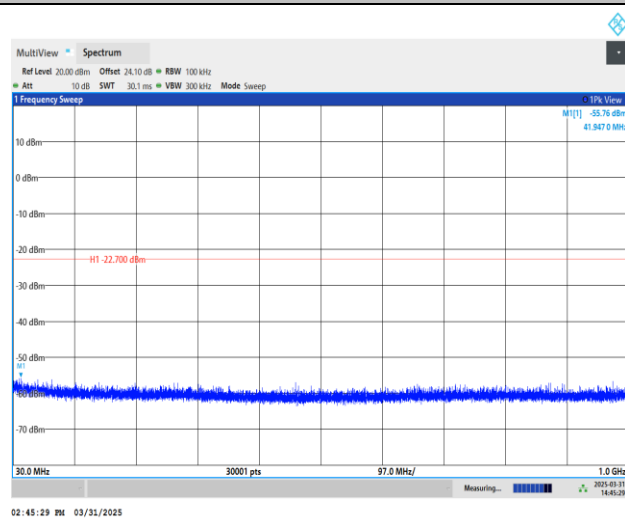

Spurious Emission 1GHz~26.5GHz

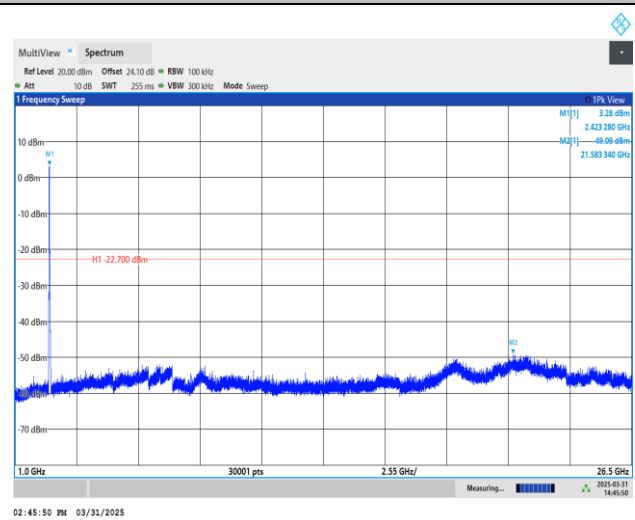




Test Mode : 802.11ax HE20_FullIRU


Test Channel : 06

100kHz PSD reference Level

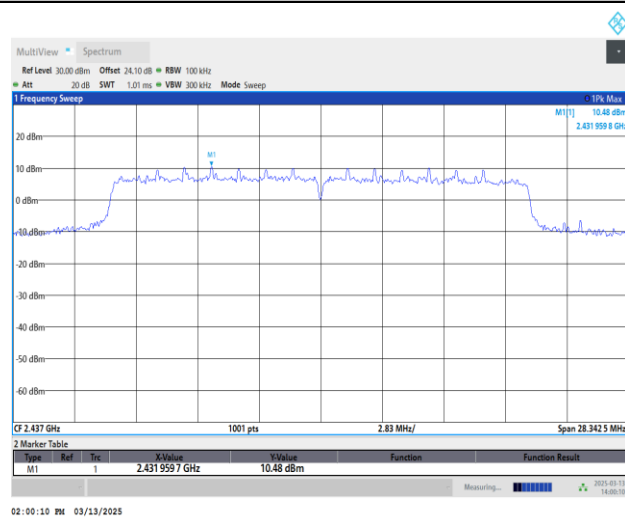


Channel 06 Plot

Spurious Emission 30MHz~1GHz

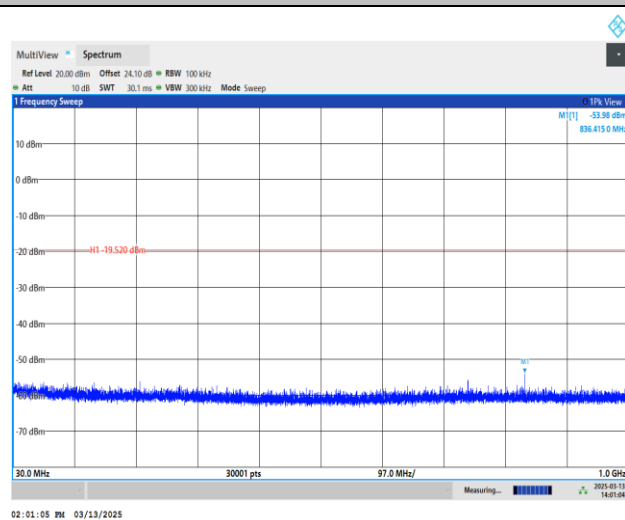

Spurious Emission 1GHz~26.5GHz

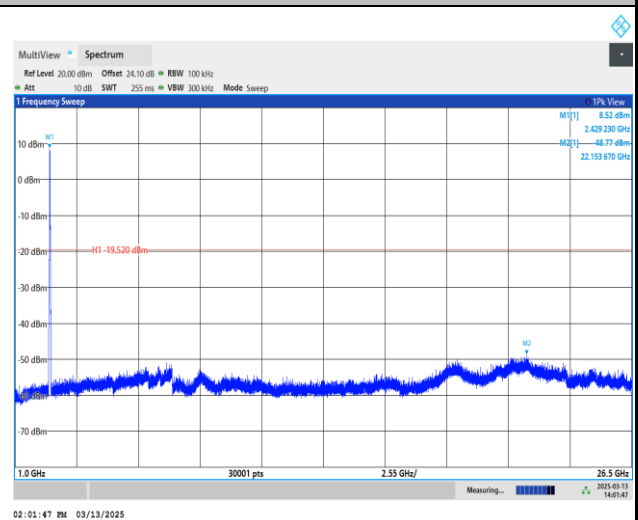





Test Mode : 802.11ax HE20_FullIRU

Test Channel : 10


100kHz PSD reference Level

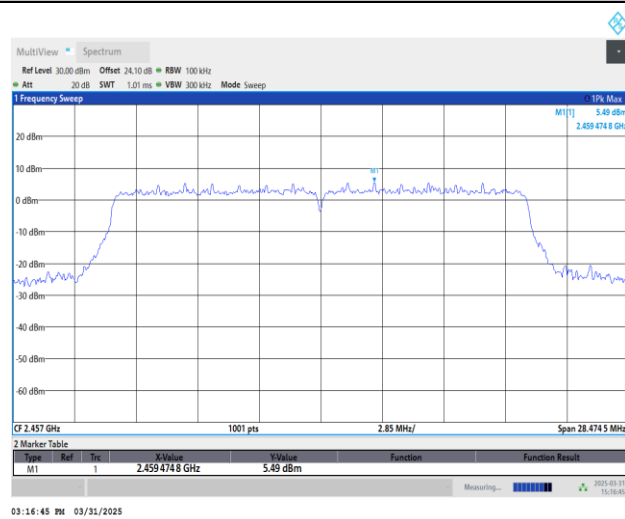


Channel 10 Plot

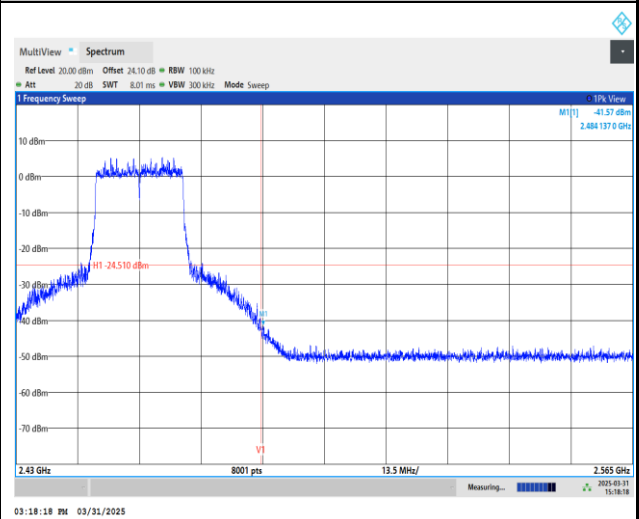

Spurious Emission 30MHz~1GHz

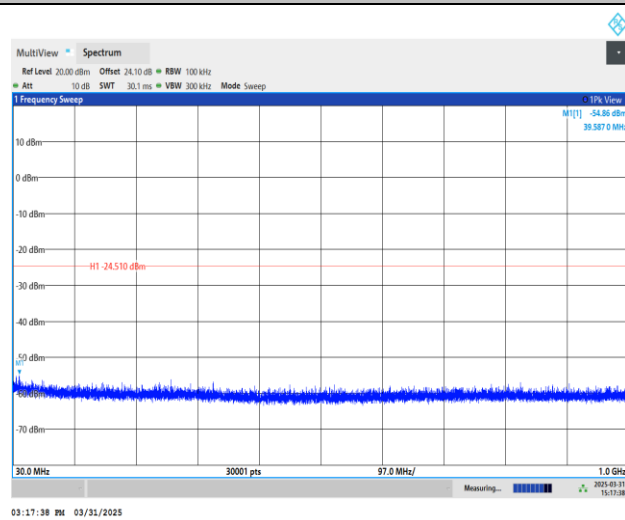

Spurious Emission 1GHz~26.5GHz

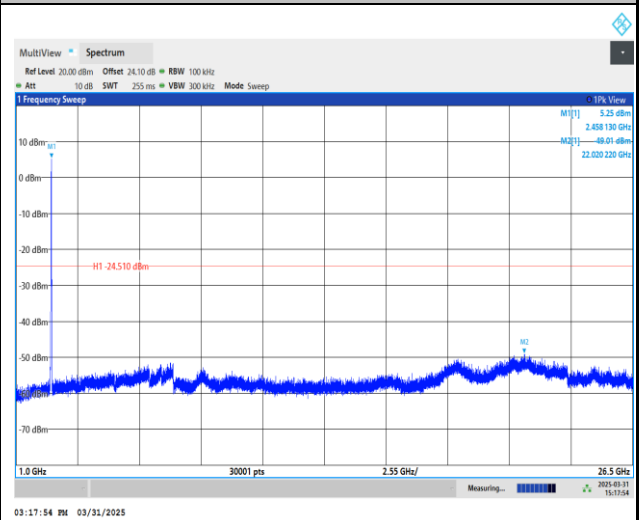





Test Mode : 802.11ax HE20_FullIRU

Test Channel : 11


100kHz PSD reference Level

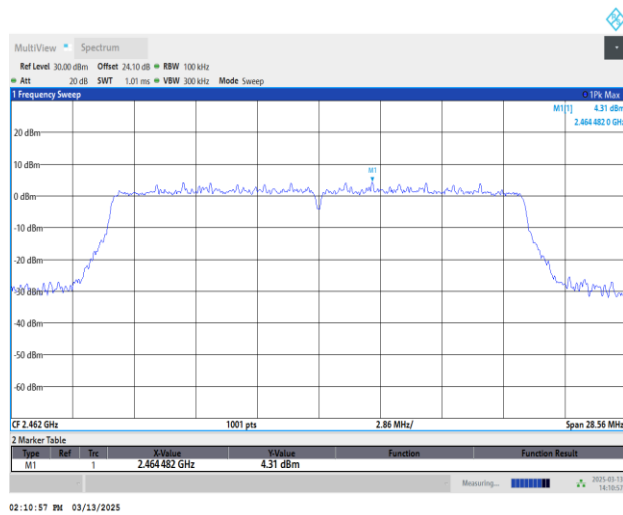


Channel 11 Plot

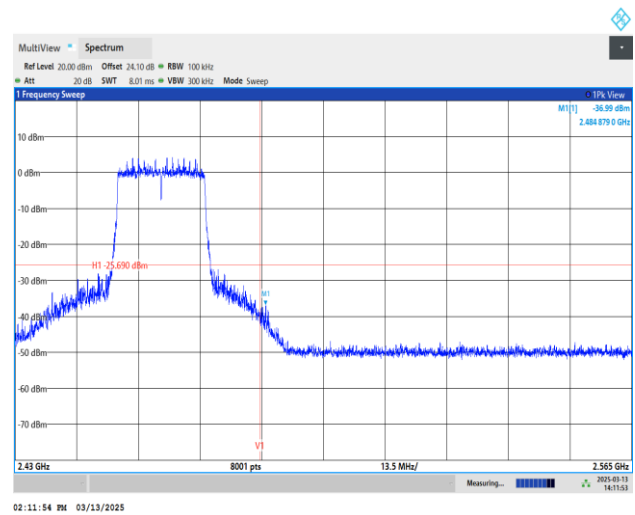

Spurious Emission 30MHz~1GHz

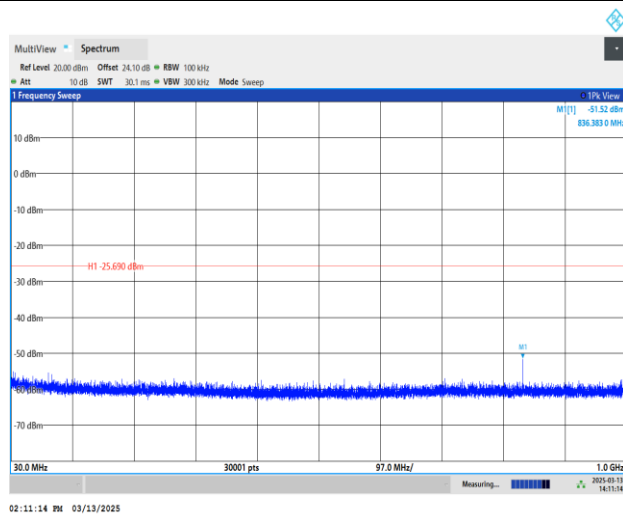

Spurious Emission 1GHz~26.5GHz

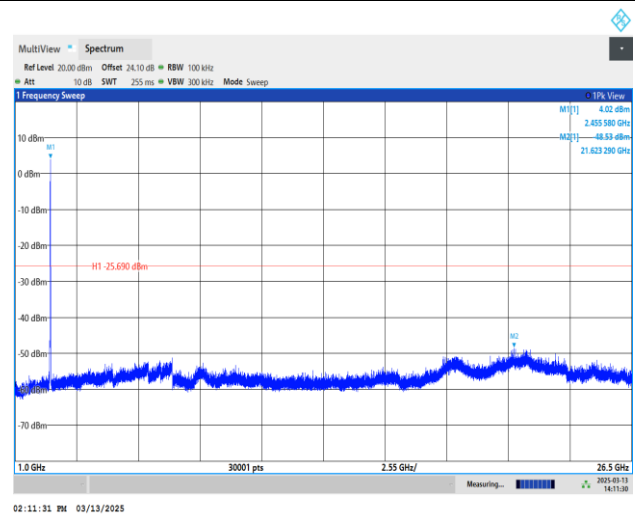



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	16.1~22.7℃
		Relative Humidity :	45.9~48.9%

EUT Information

Test Mode :
Test Voltage :
Phase :

Mode 1
120Vac/60Hz
Line

Full Spectrum

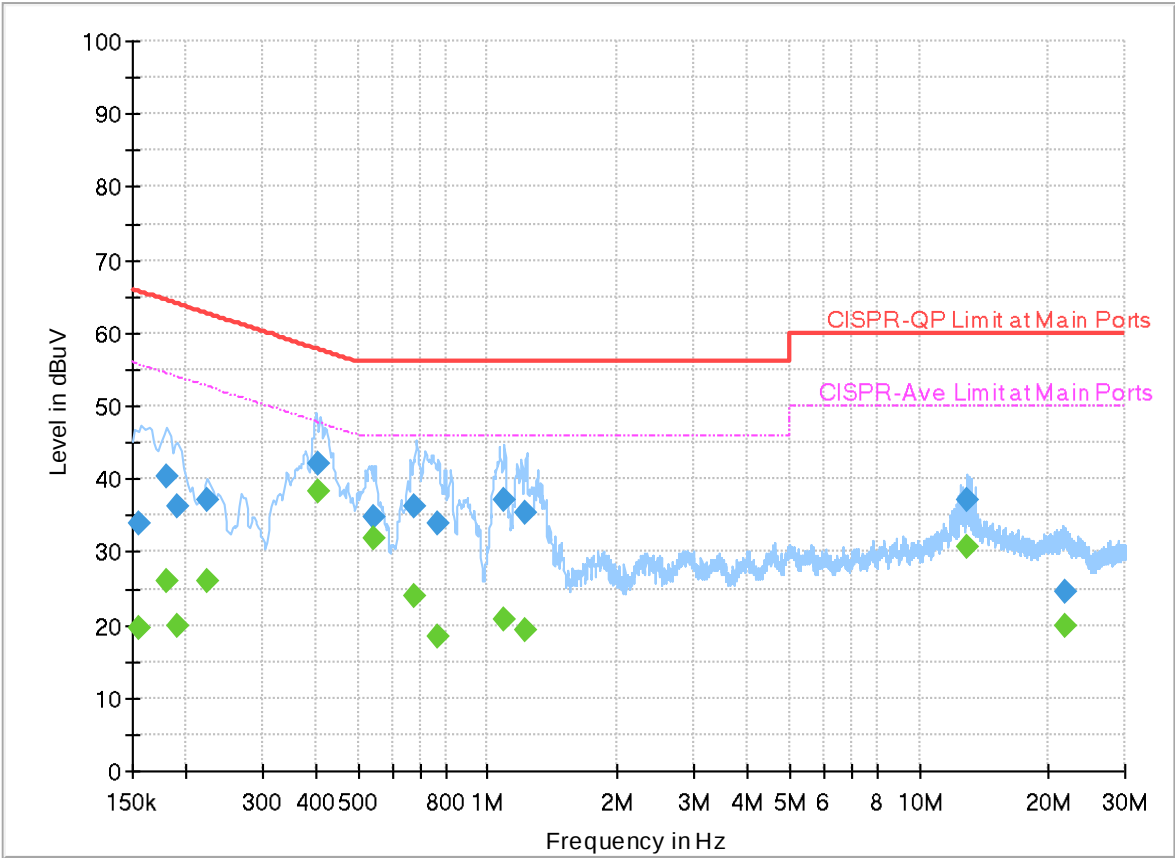

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.154500	---	19.71	55.75	36.04	L1	FLO	20.0
0.154500	33.93	---	65.75	31.82	L1	FLO	20.0
0.179970	---	25.99	54.49	28.50	L1	FLO	20.0
0.179970	40.33	---	64.49	24.16	L1	FLO	20.0
0.190680	---	19.85	54.01	34.16	L1	FLO	20.0
0.190680	36.14	---	64.01	27.87	L1	FLO	20.0
0.224520	---	26.02	52.65	26.63	L1	FLO	20.0
0.224520	37.03	---	62.65	25.62	L1	FLO	20.0
0.404250	---	38.19	47.77	9.58	L1	FLO	20.0
0.404250	42.20	---	57.77	15.57	L1	FLO	20.0
0.541500	---	31.84	46.00	14.16	L1	FLO	20.0
0.541500	34.70	---	56.00	21.30	L1	FLO	20.0
0.678750	---	23.97	46.00	22.03	L1	FLO	20.0
0.678750	36.18	---	56.00	19.82	L1	FLO	20.0
0.764250	---	18.28	46.00	27.72	L1	FLO	20.0
0.764250	33.83	---	56.00	22.17	L1	FLO	20.0
1.088250	---	20.76	46.00	25.24	L1	FLO	20.0
1.088250	36.99	---	56.00	19.01	L1	FLO	20.0
1.225500	---	19.17	46.00	26.83	L1	FLO	20.0

1.225500	35.48	---	56.00	20.52	L1	FLO	20.0
12.968250	---	30.60	50.00	19.40	L1	FLO	20.5
12.968250	37.13	---	60.00	22.87	L1	FLO	20.5
21.783750	---	19.95	50.00	30.05	L1	FLO	20.9
21.783750	24.51	---	60.00	35.49	L1	FLO	20.9

EUT Information

Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

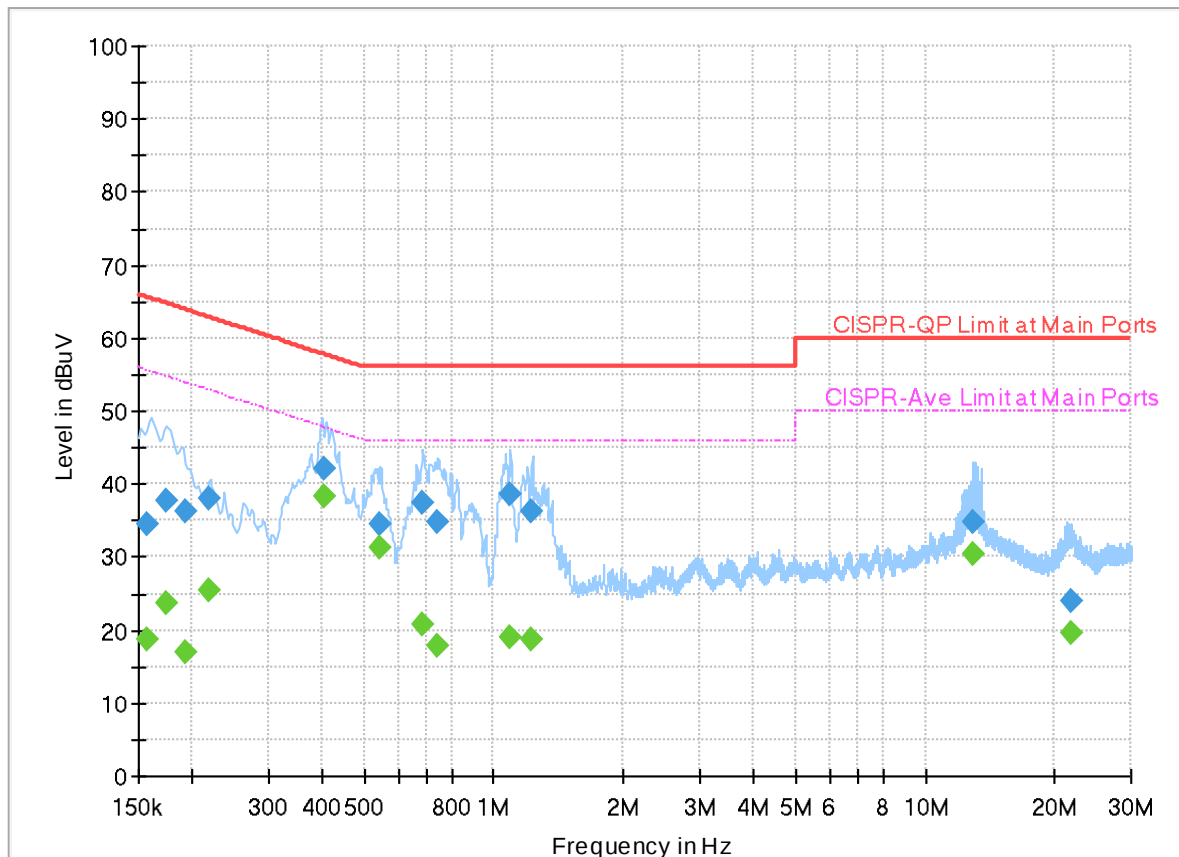

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	18.85	55.63	36.78	N	FLO	20.0
0.156750	34.63	---	65.63	31.00	N	FLO	20.0
0.174300	---	23.77	54.75	30.98	N	FLO	20.0
0.174300	37.86	---	64.75	26.89	N	FLO	20.0
0.192120	---	16.96	53.94	36.98	N	FLO	20.0
0.192120	36.20	---	63.94	27.74	N	FLO	20.0
0.218760	---	25.34	52.87	27.53	N	FLO	20.0
0.218760	37.96	---	62.87	24.91	N	FLO	20.0
0.404070	---	38.29	47.77	9.48	N	FLO	20.0
0.404070	42.22	---	57.77	15.55	N	FLO	20.0
0.541500	---	31.41	46.00	14.59	N	FLO	20.0
0.541500	34.45	---	56.00	21.55	N	FLO	20.0
0.679920	---	20.69	46.00	25.31	N	FLO	20.0
0.679920	37.43	---	56.00	18.57	N	FLO	20.0
0.743460	---	17.75	46.00	28.25	N	FLO	20.0
0.743460	34.82	---	56.00	21.18	N	FLO	20.0
1.090140	---	19.01	46.00	26.99	N	FLO	20.0
1.090140	38.50	---	56.00	17.50	N	FLO	20.0
1.225500	---	18.84	46.00	27.16	N	FLO	20.0

1.225500	36.30	---	56.00	19.70	N	FLO	20.0
12.959250	---	30.30	50.00	19.70	N	FLO	20.5
12.959250	34.91	---	60.00	25.09	N	FLO	20.5
21.807330	---	19.57	50.00	30.43	N	FLO	20.9
21.807330	23.84	---	60.00	36.16	N	FLO	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen, and Troye Hsieh	Temperature (°C):	19.1 ~ 21.9
		Relative Humidity (%):	50.2 ~ 65.2

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 11	2400-2483.5	802.11ax HE20	01	2412	MCS0	Partial RU 26/0	-



Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	2400-2483.5	802.11ax HE20	01	2412	MCS0	Partial RU 52/37	-
Mode 13	2400-2483.5	802.11ax HE20	01	2412	MCS0	Partial RU 106/53	-
Mode 14	2400-2483.5	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 15	2400-2483.5	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 16	2400-2483.5	802.11ax HE20	11	2462	MCS0	Partial RU 26/8	-
Mode 17	2400-2483.5	802.11ax HE20	11	2462	MCS0	Partial RU 52/40	-
Mode 18	2400-2483.5	802.11ax HE20	11	2462	MCS0	Partial RU 106/54	-
Mode 19	2400-2483.5	802.11g	10	2457	MCS0	-	SHF
Mode 20	2400-2483.5	802.11g	10	2457	MCS0	-	LF
Mode 21	2400-2483.5	802.11g	10	2457	6Mbps	-	-
Mode 22	2400-2483.5	802.11n HT20	10	2457	MCS0	-	-
Mode 23	2400-2483.5	802.11ax HE20	2	2417	MCS0	Full RU	-
Mode 24	2400-2483.5	802.11ax HE20	10	2457	MCS0	Full RU	-







C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2388.00	42.09	54.00	-11.91	H	Avg.	Pass	-	Band Edge
1	802.11b	01	4824.00	38.70	74.00	-35.30	H	Peak	Pass	-	Harmonic
2	802.11b	06	2498.93	42.84	54.00	-11.16	H	Avg.	Pass	-	Band Edge
2	802.11b	06	7311.00	46.33	54.00	-7.67	V	Avg.	Pass	-	Harmonic
3	802.11b	11	2483.51	46.21	54.00	-7.79	H	Avg.	Pass	-	Band Edge
3	802.11b	11	7386.00	45.16	54.00	-8.84	V	Avg.	Pass	-	Harmonic
4	802.11g	01	2389.95	50.96	54.00	-3.04	V	Avg.	Pass	-	Band Edge
4	802.11g	01	4824.00	39.82	74.00	-34.18	V	Peak	Pass	-	Harmonic
5	802.11g	06	2483.56	44.31	54.00	-9.69	H	Avg.	Pass	-	Band Edge
5	802.11g	06	7311.00	41.08	54.00	-12.92	V	Avg.	Pass	-	Harmonic
6	802.11g	11	2483.55	48.71	54.00	-5.29	H	Avg.	Pass	-	Band Edge
6	802.11g	11	7386.00	43.78	74.00	-30.22	H	Peak	Pass	-	Harmonic
7	802.11n HT20	01	2389.95	51.56	54.00	-2.44	V	Avg.	Pass	-	Band Edge
7	802.11n HT20	01	4824.00	39.70	74.00	-34.30	H	Peak	Pass	-	Harmonic
8	802.11n HT20	06	2483.56	45.58	54.00	-8.42	V	Avg.	Pass	-	Band Edge
8	802.11n HT20	06	7311.00	41.19	54.00	-12.81	V	Avg.	Pass	-	Harmonic
9	802.11n HT20	11	2483.89	49.92	54.00	-4.08	V	Avg.	Pass	-	Band Edge
9	802.11n HT20	11	7386.00	41.56	74.00	-32.44	V	Peak	Pass	-	Harmonic
10	802.11ax HE20	01	2389.82	50.45	54.00	-3.55	V	Avg.	Pass	Full RU	Band Edge
10	802.11ax HE20	01	4824.00	39.11	74.00	-34.89	V	Peak	Pass	Full RU	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
11	802.11ax HE20	01	2389.69	69.69	74.00	-4.31	V	Peak	Pass	Partial RU 26/0	Band Edge
12	802.11ax HE20	01	2389.17	42.49	54.00	-11.51	H	Avg.	Pass	Partial RU 52/37	Band Edge
13	802.11ax HE20	01	2382.28	42.45	54.00	-11.55	V	Avg.	Pass	Partial RU 106/53	Band Edge
14	802.11ax HE20	06	2483.75	45.59	54.00	-8.41	H	Avg.	Pass	Full RU	Band Edge
14	802.11ax HE20	06	7311.00	40.87	54.00	-13.13	V	Avg.	Pass	Full RU	Harmonic
15	802.11ax HE20	11	2483.51	51.71	54.00	-2.29	H	Avg.	Pass	Full RU	Band Edge
15	802.11ax HE20	11	7386.00	42.20	74.00	-31.80	H	Peak	Pass	Full RU	Harmonic
16	802.11ax HE20	11	2492.02	43.36	54.00	-10.64	V	Avg.	Pass	Partial RU 26/8	Band Edge
17	802.11ax HE20	11	2487.35	43.45	54.00	-10.55	V	Avg.	Pass	Partial RU 52/40	Band Edge
18	802.11ax HE20	11	2485.41	43.39	54.00	-10.61	H	Avg.	Pass	Partial RU 106/54	Band Edge
19	802.11g	10	19602.03	40.98	74.00	-33.02	H	Peak	Pass	-	SHF
20	802.11g	10	30.00	34.73	40.00	-5.27	H	QP	Pass	-	LF
21	802.11g	10	2483.66	52.24	54.00	-1.76	V	Avg.	Pass	-	Band Edge
22	802.11n HT20	10	2483.53	51.54	54.00	-2.46	V	Avg.	Pass	-	Band Edge
23	802.11ax HE20	2	2389.95	51.07	54.00	-2.93	V	Avg.	Pass	Full RU	Band Edge
24	802.11ax HE20	10	2483.75	51.64	54.00	-2.36	V	Avg.	Pass	Full RU	Band Edge

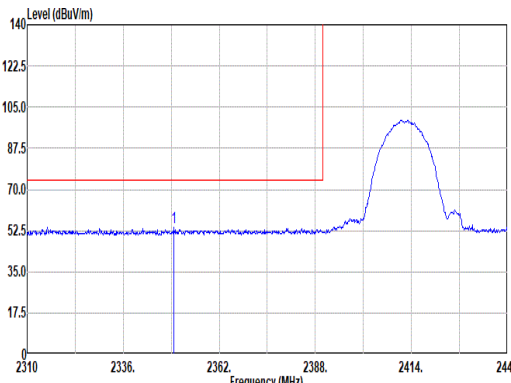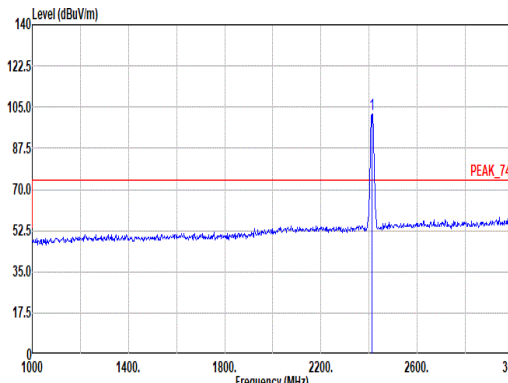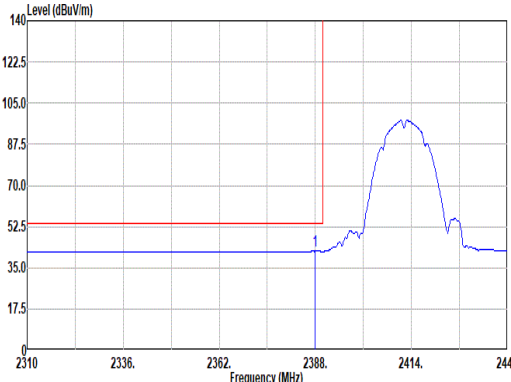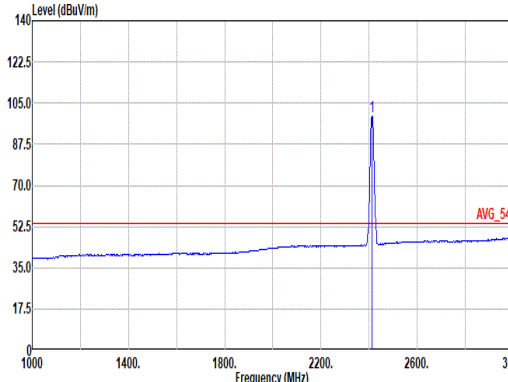

Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2349.65</td><td>53.99</td><td>74.00</td><td>-20.01</td><td>43.00</td><td>27.20</td><td>7.13</td><td>33.36</td><td>10.02</td><td>400</td><td>24</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2349.65	53.99	74.00	-20.01	43.00	27.20	7.13	33.36	10.02	400	24	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.90</td><td>-----</td><td>-----</td><td>90.53</td><td>27.44</td><td>7.22</td><td>33.32</td><td>10.03</td><td>400</td><td>24</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.90	-----	-----	90.53	27.44	7.22	33.32	10.03	400	24
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2349.65	53.99	74.00	-20.01	43.00	27.20	7.13	33.36	10.02	400	24	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	101.90	-----	-----	90.53	27.44	7.22	33.32	10.03	400	24	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>30.94</td><td>27.28</td><td>7.18</td><td>33.34</td><td>10.03</td><td>400</td><td>24</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.00	42.09	54.00	-11.91	30.94	27.28	7.18	33.34	10.03	400	24	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.18</td><td>-----</td><td>-----</td><td>87.81</td><td>27.44</td><td>7.22</td><td>33.32</td><td>10.03</td><td>400</td><td>24</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.18	-----	-----	87.81	27.44	7.22	33.32	10.03	400	24
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.00	42.09	54.00	-11.91	30.94	27.28	7.18	33.34	10.03	400	24	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	99.18	-----	-----	87.81	27.44	7.22	33.32	10.03	400	24	AVERAGE																																																																																							

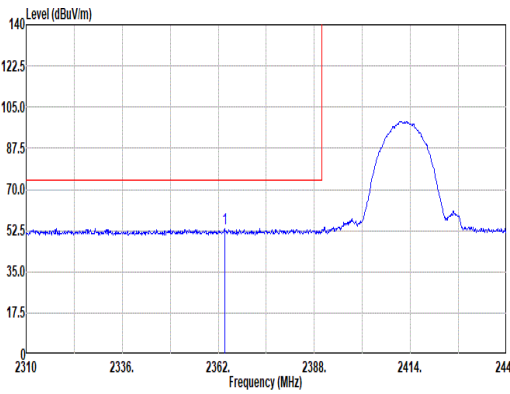
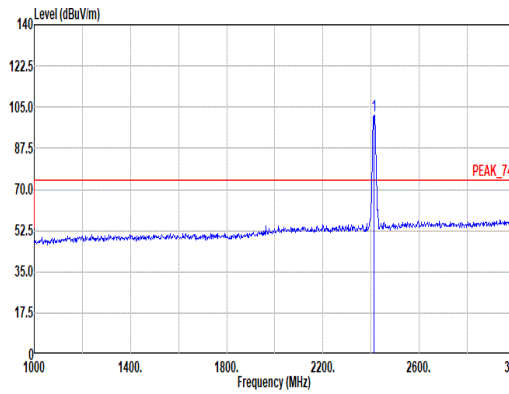
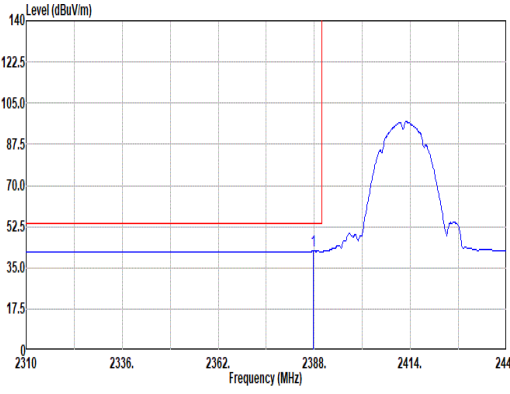
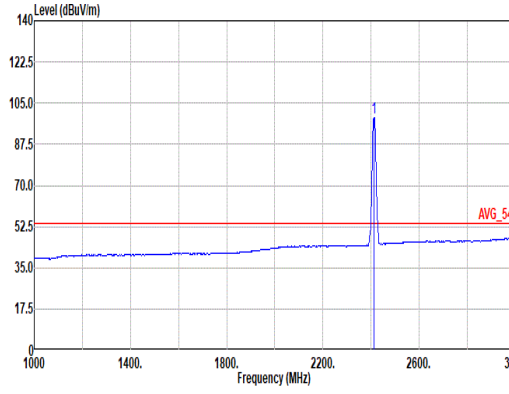


		1																																																																																																		
Mode	Band Edge																																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																			
Pol.	Vertical					Fundamental																																																																																														
Peak																																																																																																				
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2363.69</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>42.47</td><td>27.20</td><td>7.15</td><td>33.35</td><td>10.02</td><td>300</td><td>338 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2363.69	53.49	74.00	-20.51	42.47	27.20	7.15	33.35	10.02	300	338 PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2412.00</td><td>101.43</td><td>-----</td><td>-----</td><td>90.06</td><td>27.44</td><td>7.22</td><td>33.32</td><td>10.03</td><td>300</td><td>338 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2412.00	101.43	-----	-----	90.06	27.44	7.22	33.32	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	2363.69	53.49	74.00	-20.51	42.47	27.20	7.15	33.35	10.02	300	338 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	2412.00	101.43	-----	-----	90.06	27.44	7.22	33.32	10.03	300	338 PEAK																																																																																									
Avg																																																																																																				
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2387.74</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>30.91</td><td>27.28</td><td>7.18</td><td>33.34</td><td>10.03</td><td>300</td><td>338 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2387.74	42.06	54.00	-11.94	30.91	27.28	7.18	33.34	10.03	300	338 AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 79 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2412.00</td><td>90.68</td><td>-----</td><td>-----</td><td>87.31</td><td>27.44</td><td>7.22</td><td>33.32</td><td>10.03</td><td>300</td><td>338 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2412.00	90.68	-----	-----	87.31	27.44	7.22	33.32	10.03	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	2387.74	42.06	54.00	-11.94	30.91	27.28	7.18	33.34	10.03	300	338 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	2412.00	90.68	-----	-----	87.31	27.44	7.22	33.32	10.03	300	338 AVERAGE																																																																																									



Mode	1																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																
Peak Avg	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 79 Plane : X with adapter : The unwanted signal "7236MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>38.70</td><td>74.00</td><td>-35.30</td><td>62.56</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7236.00</td><td>46.49</td><td>-----</td><td>-----</td><td>62.28</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>--</td><td>--</td><td>Peak</td></tr></table>			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4824.00	38.70	74.00	-35.30	62.56	32.44	9.93	66.74	0.51	--	--	Peak	2	7236.00	46.49	-----	-----	62.28	36.80	12.75	65.68	0.34	--	--	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 79 Plane : X with adapter : The unwanted signal "7236MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>38.38</td><td>74.00</td><td>-35.62</td><td>62.24</td><td>32.44</td><td>9.93</td><td>66.74</td><td>0.51</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7236.00</td><td>49.96</td><td>-----</td><td>-----</td><td>65.75</td><td>36.80</td><td>12.75</td><td>65.68</td><td>0.34</td><td>--</td><td>--</td><td>Peak</td></tr></table>			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4824.00	38.38	74.00	-35.62	62.24	32.44	9.93	66.74	0.51	--	--	Peak	2	7236.00	49.96	-----	-----	65.75	36.80	12.75	65.68	0.34	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4824.00	38.70	74.00	-35.30	62.56	32.44	9.93	66.74	0.51	--	--	Peak																																																																																																																						
2	7236.00	46.49	-----	-----	62.28	36.80	12.75	65.68	0.34	--	--	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																								
1	4824.00	38.38	74.00	-35.62	62.24	32.44	9.93	66.74	0.51	--	--	Peak																																																																																																																						
2	7236.00	49.96	-----	-----	65.75	36.80	12.75	65.68	0.34	--	--	Peak																																																																																																																						

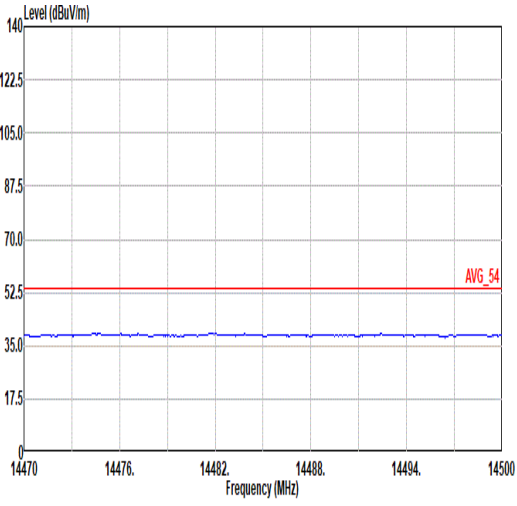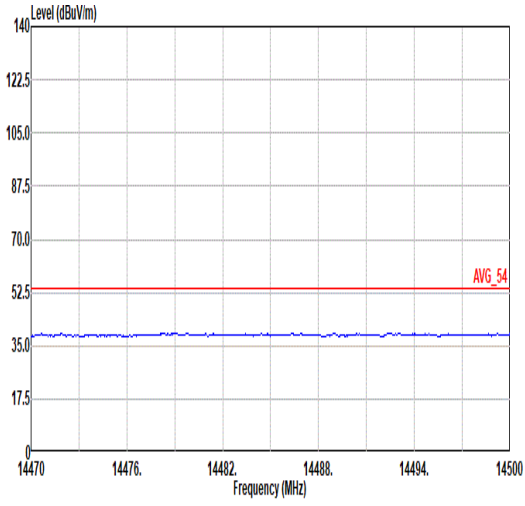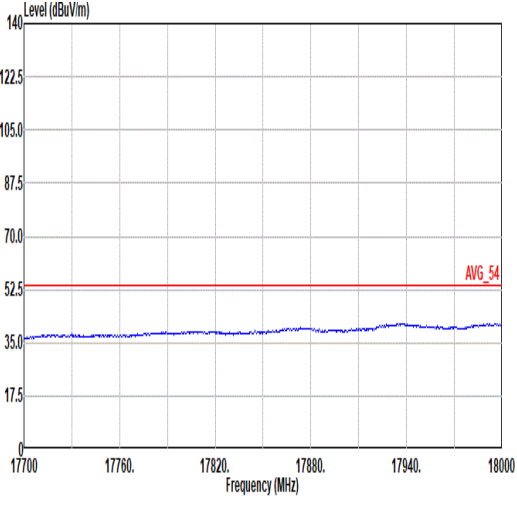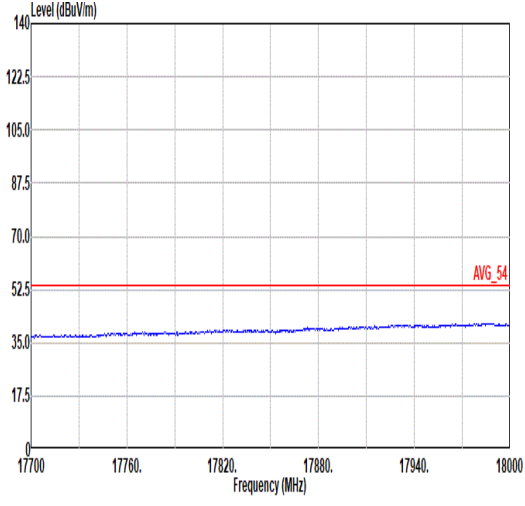

Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 79 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 79 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 79 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 79 Plane : X with adapter



2

Mode

Band Edge - L


2400-2483.5_802.11b_CH06_2437MHz

Pol.

Horizontal


Fundamental

Peak

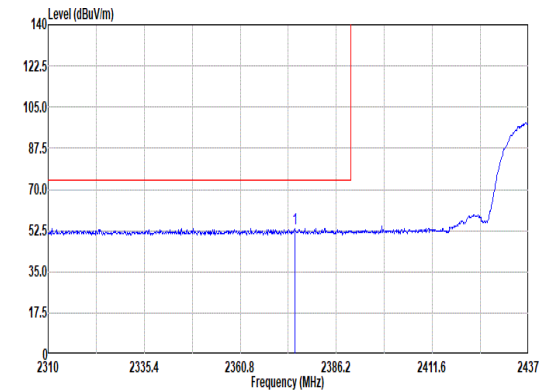

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2375.15	53.55	74.00	-20.45	42.51	27.20	7.17	33.35	10.02	300 349 PEAK

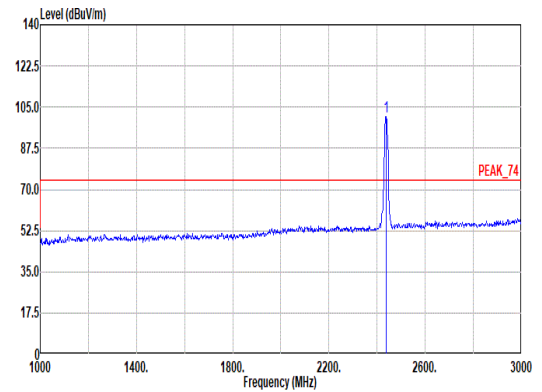

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2437.00	100.85	-----	89.28	27.60	7.25	33.31	10.03	300	349 PEAK

Avg

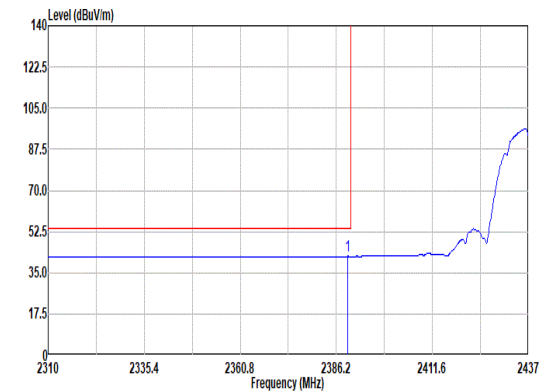

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.010kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter



1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2389.25	42.01	54.00	-11.99	30.84	27.29	7.19	33.34	10.03	300 349 AVERAGE

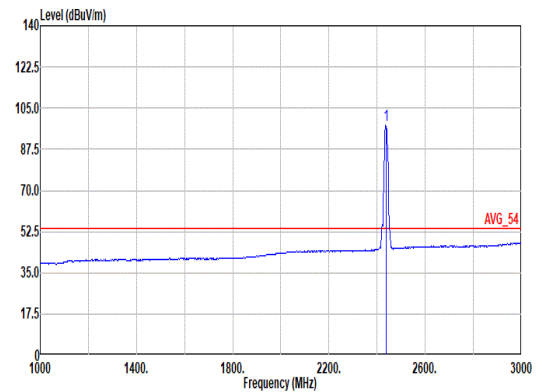

Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL
: RBW:1000.000kHz VBW:0.010kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	deg
1	2437.00	97.76	-----	86.19	27.60	7.25	33.31	10.03	300	349 AVERAGE

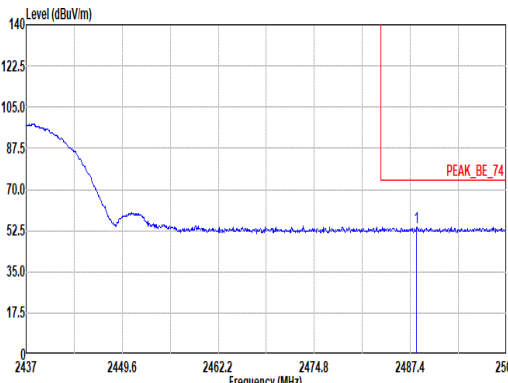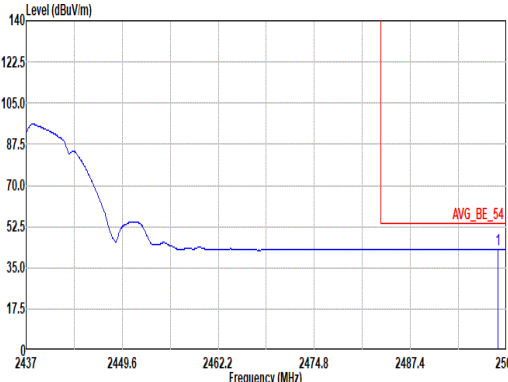

Mode	2																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.22</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>42.15</td><td>27.88</td><td>7.32</td><td>33.28</td><td>10.03</td><td>300</td><td>349</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.22	54.10	74.00	-19.90	42.15	27.88	7.32	33.28	10.03	300	349	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2488.22	54.10	74.00	-19.90	42.15	27.88	7.32	33.28	10.03	300	349	PEAK																																												
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.93</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>30.84</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>300</td><td>349</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.93	42.84	54.00	-11.16	30.84	27.90	7.34	33.27	10.03	300	349	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2498.93	42.84	54.00	-11.16	30.84	27.90	7.34	33.27	10.03	300	349	AVERAGE																																												



2

Mode

Band Edge - L


2400-2483.5_802.11b_CH06_2437MHz

Pol.

Vertical


Fundamental

Peak

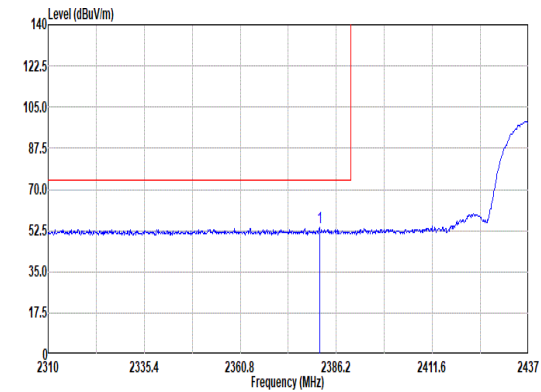

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter


	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
			Line Margin								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2381.76	53.62	74.00	-20.38	42.53	27.22	7.18	33.34	10.03	392	118 PEAK

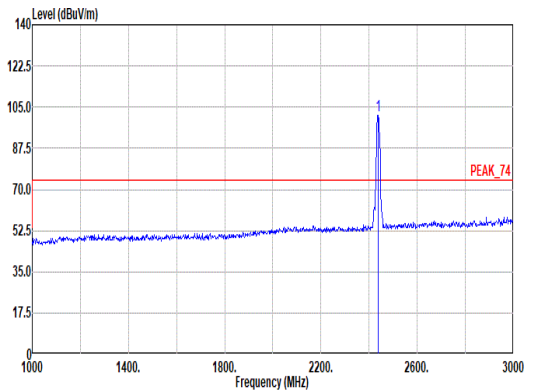

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter


	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
			Line Margin								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2437.00	101.52	-----	89.95	27.60	7.25	33.31	10.03	392	118	PEAK

Avg

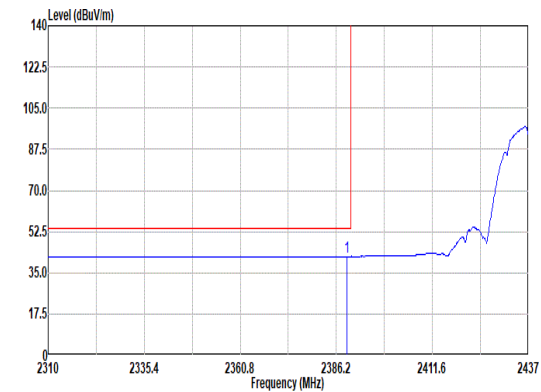

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.010kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter



	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
			Line Margin								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2388.99	42.00	54.00	-12.00	30.83	27.29	7.19	33.34	10.03	392	118 AVERAGE

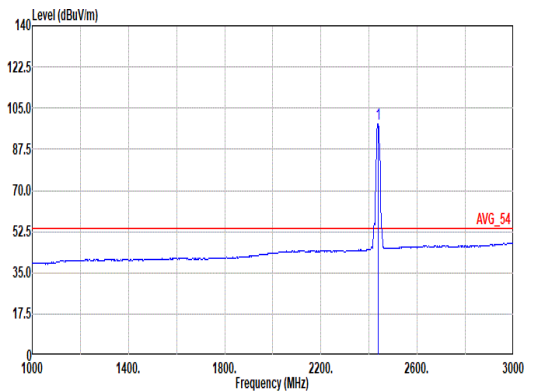



Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_240828 VERTICAL
: RBW:1000.000kHz VBW:0.010kHz SMT:Auto
Detector : PEAK
Mode : 2
Setting : 80
Plane : X with adapter

	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
			Line Margin								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2437.00	98.43	-----	86.86	27.60	7.25	33.31	10.03	392	118	AVERAGE



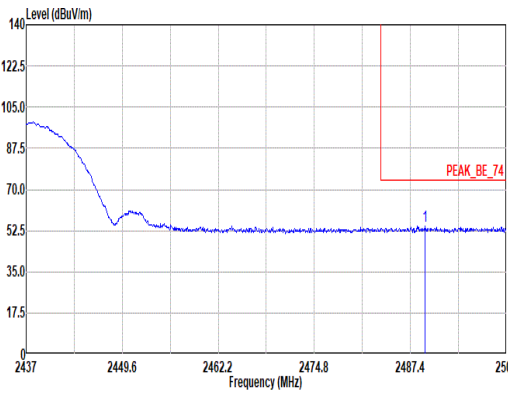
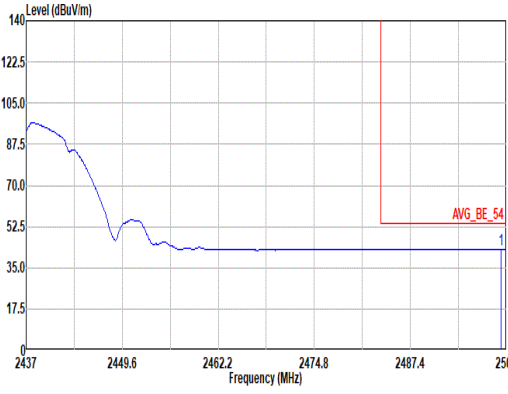


Mode	2																																													
	Band Edge - R																																													
	2400-2483.5_802.11b_CH06_2437MHz																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.35</td><td>54.28</td><td>74.00</td><td>-19.72</td><td>42.31</td><td>27.89</td><td>7.33</td><td>33.28</td><td>10.03</td><td>392</td><td>118</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.35	54.28	74.00	-19.72	42.31	27.89	7.33	33.28	10.03	392	118	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2489.35	54.28	74.00	-19.72	42.31	27.89	7.33	33.28	10.03	392	118	PEAK																																		
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.31</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>30.84</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>392</td><td>118</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.31	42.84	54.00	-11.16	30.84	27.90	7.34	33.27	10.03	392	118	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2499.31	42.84	54.00	-11.16	30.84	27.90	7.34	33.27	10.03	392	118	AVERAGE																																		



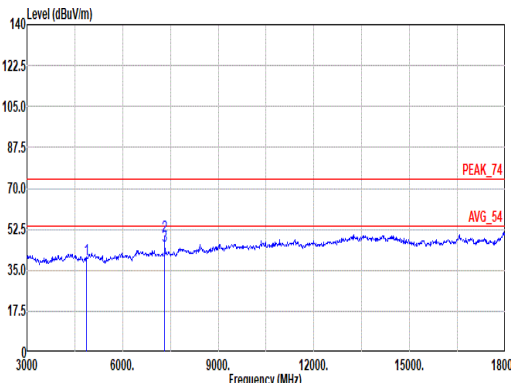
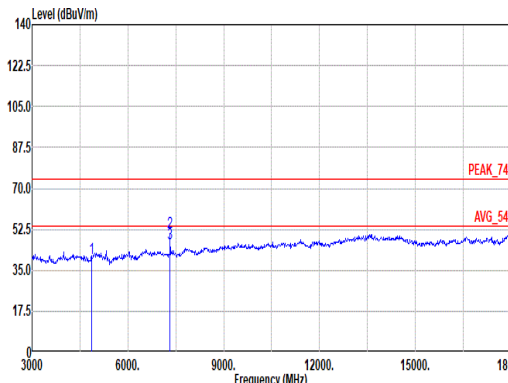


Mode	2																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>63.02</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>65.66</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>244</td><td>217</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>45.26</td><td>54.00</td><td>-8.74</td><td>61.17</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>244</td><td>217</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	39.64	74.00	-34.36	63.02	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	49.75	74.00	-24.25	65.66	36.78	12.76	65.77	0.32	244	217	Peak	3	7311.00	45.26	54.00	-8.74	61.17	36.78	12.76	65.77	0.32	244	217	Average	 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.21</td><td>74.00</td><td>-33.79</td><td>63.59</td><td>32.70</td><td>10.09</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>51.25</td><td>74.00</td><td>-22.75</td><td>67.16</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>226</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>46.33</td><td>54.00</td><td>-7.67</td><td>62.24</td><td>36.78</td><td>12.76</td><td>65.77</td><td>0.32</td><td>100</td><td>226</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.21	74.00	-33.79	63.59	32.70	10.09	66.70	0.53	--	--	Peak	2	7311.00	51.25	74.00	-22.75	67.16	36.78	12.76	65.77	0.32	100	226	Peak	3	7311.00	46.33	54.00	-7.67	62.24	36.78	12.76	65.77	0.32	100	226	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4874.00	39.64	74.00	-34.36	63.02	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																		
2	7311.00	49.75	74.00	-24.25	65.66	36.78	12.76	65.77	0.32	244	217	Peak																																																																																																																																		
3	7311.00	45.26	54.00	-8.74	61.17	36.78	12.76	65.77	0.32	244	217	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4874.00	40.21	74.00	-33.79	63.59	32.70	10.09	66.70	0.53	--	--	Peak																																																																																																																																		
2	7311.00	51.25	74.00	-22.75	67.16	36.78	12.76	65.77	0.32	100	226	Peak																																																																																																																																		
3	7311.00	46.33	54.00	-7.67	62.24	36.78	12.76	65.77	0.32	100	226	Average																																																																																																																																		

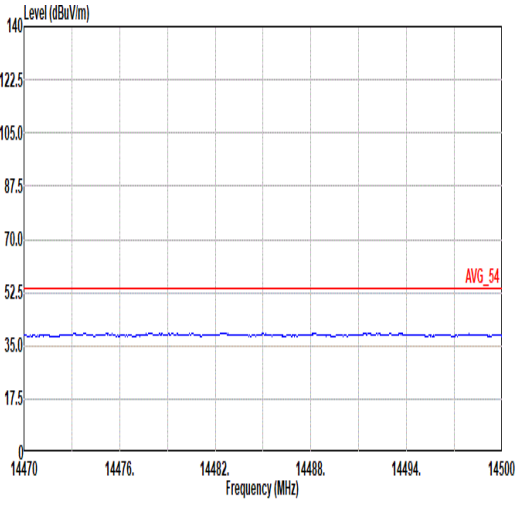
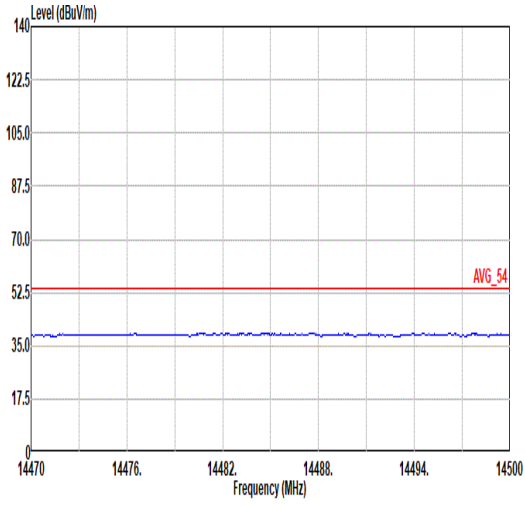
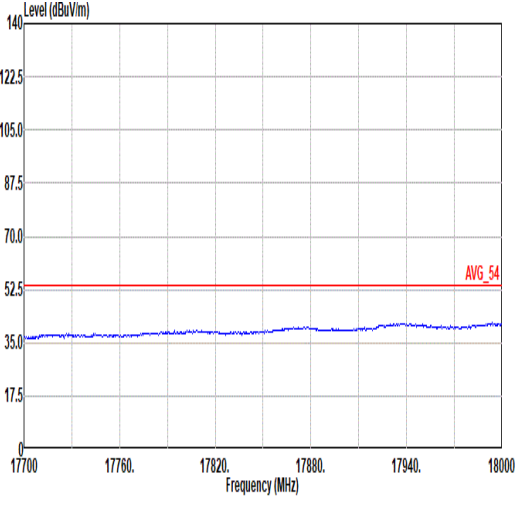
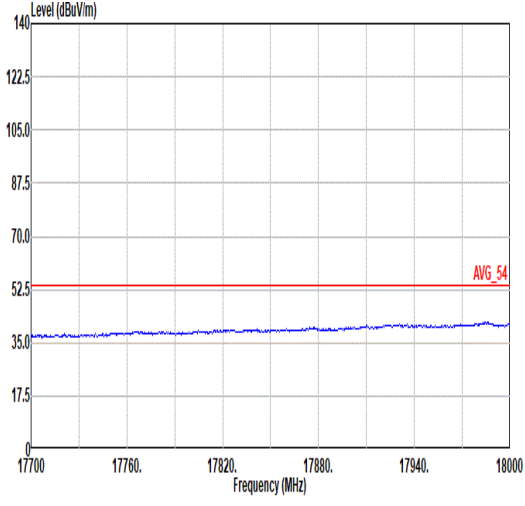


Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 80 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 80 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 80 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 80 Plane : X with adapter

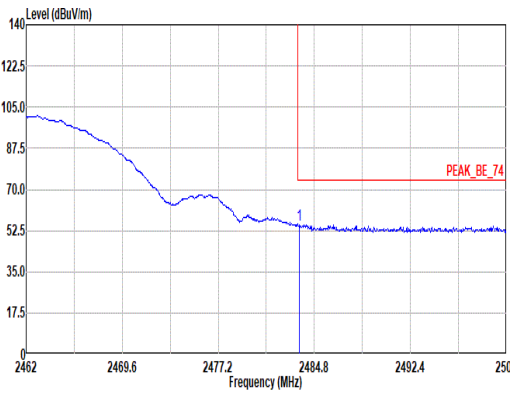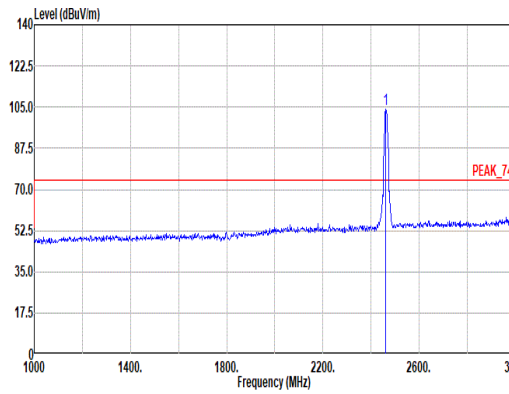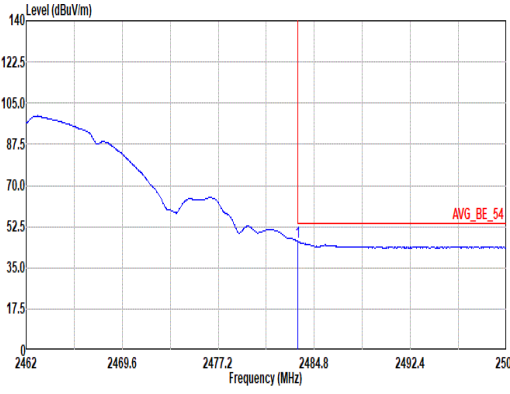
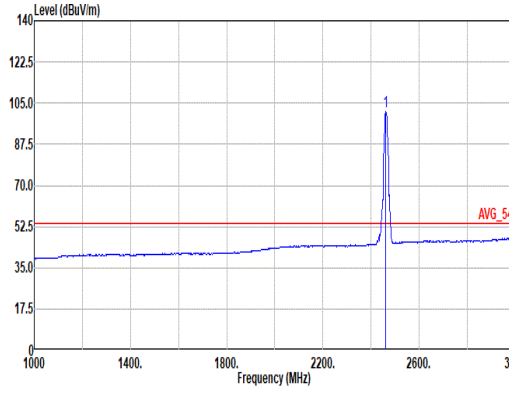


Mode	3																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.58</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>43.05</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>374</td><td>26</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	54.96	74.00	-19.04	43.05	27.84	7.32	33.28	10.03	374	26	PEAK	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.31</td><td>-----</td><td>-----</td><td>92.66</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td><td>374</td><td>26</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.31	-----	-----	92.66	27.62	7.29	33.29	10.03	374	26
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.58	54.96	74.00	-19.04	43.05	27.84	7.32	33.28	10.03	374	26	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	104.31	-----	-----	92.66	27.62	7.29	33.29	10.03	374	26	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>34.30</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>374</td><td>26</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	46.21	54.00	-7.79	34.30	27.84	7.32	33.28	10.03	374	26	AVERAGE	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.24</td><td>-----</td><td>-----</td><td>89.59</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td><td>374</td><td>26</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.24	-----	-----	89.59	27.62	7.29	33.29	10.03	374	26
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.51	46.21	54.00	-7.79	34.30	27.84	7.32	33.28	10.03	374	26	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	101.24	-----	-----	89.59	27.62	7.29	33.29	10.03	374	26	AVERAGE																																																																																							

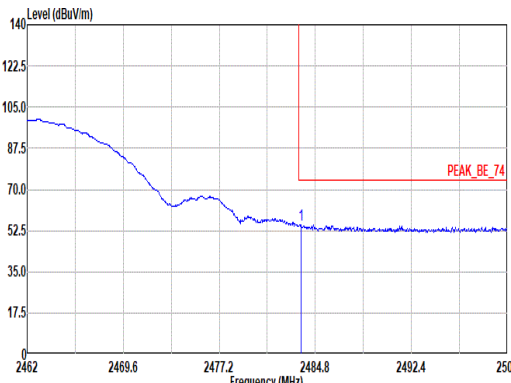
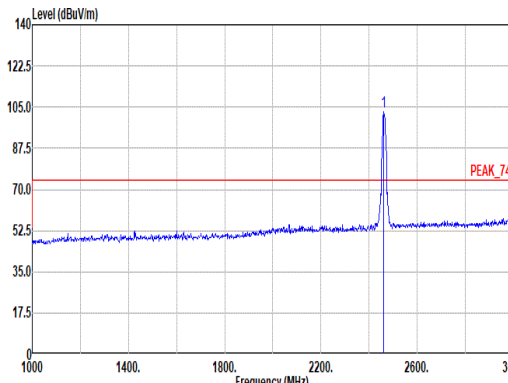
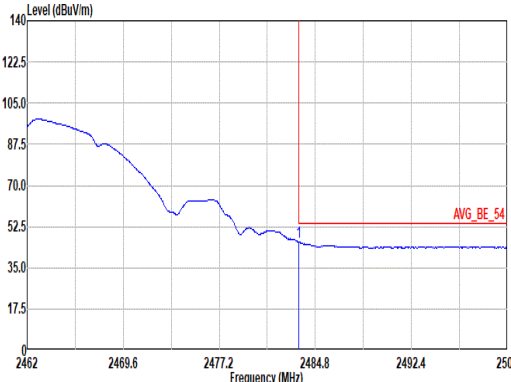
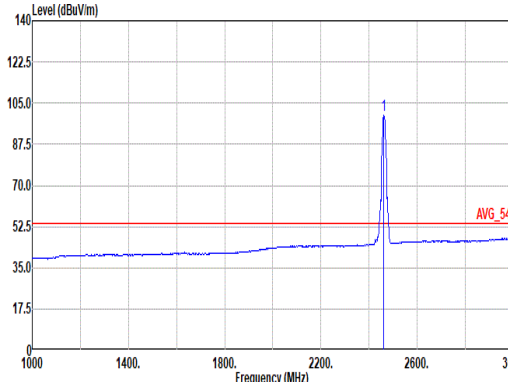


Mode	3																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
Pol.	Vertical																																																						
Peak	 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.66</td><td>54.91</td><td>74.00</td><td>-19.09</td><td>43.00</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>137 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.66	54.91	74.00	-19.09	43.00	27.84	7.32	33.28	10.03	137 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.66	54.91	74.00	-19.09	43.00	27.84	7.32	33.28	10.03	137 PEAK																																													
Fundamental	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.95</td><td>-----</td><td>-----</td><td>91.30</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td><td>137 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.95	-----	-----	91.30	27.62	7.29	33.29	10.03	137 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	102.95	-----	-----	91.30	27.62	7.29	33.29	10.03	137 PEAK																																													
Avg	 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>46.14</td><td>54.00</td><td>-7.86</td><td>34.23</td><td>27.84</td><td>7.32</td><td>33.28</td><td>10.03</td><td>137 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	46.14	54.00	-7.86	34.23	27.84	7.32	33.28	10.03	137 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.51	46.14	54.00	-7.86	34.23	27.84	7.32	33.28	10.03	137 AVERAGE																																													
Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 3 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.93</td><td>-----</td><td>-----</td><td>88.28</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td><td>137 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.93	-----	-----	88.28	27.62	7.29	33.29	10.03	137 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	99.93	-----	-----	88.28	27.62	7.29	33.29	10.03	137 AVERAGE																																													

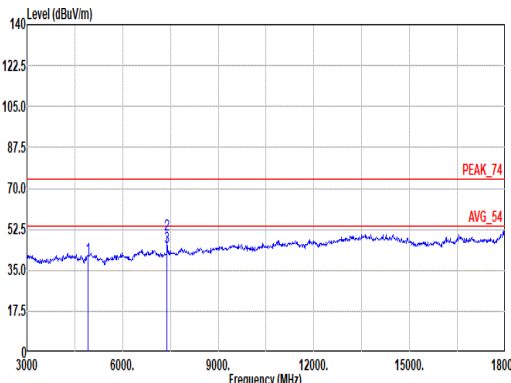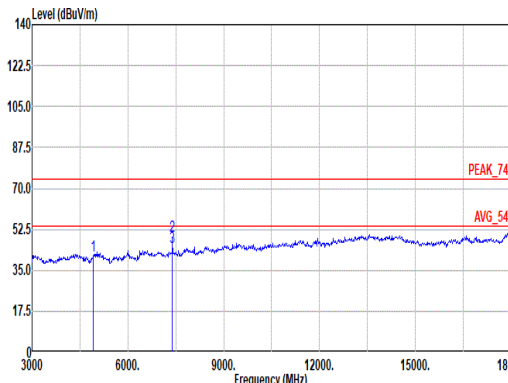

Mode	3																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL Mode : 3 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.02</td><td>74.00</td><td>-33.98</td><td>62.98</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>66.27</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>239</td><td>222</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>44.00</td><td>54.00</td><td>-9.20</td><td>61.13</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>239</td><td>222</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.02	74.00	-33.98	62.98	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	49.94	74.00	-24.06	66.27	36.48	12.76	65.86	0.29	239	222	Peak	3	7386.00	44.00	54.00	-9.20	61.13	36.48	12.76	65.86	0.29	239	222	Average	 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL Mode : 3 Setting : 80 Plane : X with adapter <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.32</td><td>74.00</td><td>-32.68</td><td>64.28</td><td>32.90</td><td>10.24</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>66.10</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>100</td><td>238</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>45.16</td><td>54.00</td><td>-8.84</td><td>61.49</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.29</td><td>100</td><td>238</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.32	74.00	-32.68	64.28	32.90	10.24	66.66	0.56	--	--	Peak	2	7386.00	49.77	74.00	-24.23	66.10	36.48	12.76	65.86	0.29	100	238	Peak	3	7386.00	45.16	54.00	-8.84	61.49	36.48	12.76	65.86	0.29	100	238	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4924.00	40.02	74.00	-33.98	62.98	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																																																		
2	7386.00	49.94	74.00	-24.06	66.27	36.48	12.76	65.86	0.29	239	222	Peak																																																																																																																																		
3	7386.00	44.00	54.00	-9.20	61.13	36.48	12.76	65.86	0.29	239	222	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	4924.00	41.32	74.00	-32.68	64.28	32.90	10.24	66.66	0.56	--	--	Peak																																																																																																																																		
2	7386.00	49.77	74.00	-24.23	66.10	36.48	12.76	65.86	0.29	100	238	Peak																																																																																																																																		
3	7386.00	45.16	54.00	-8.84	61.49	36.48	12.76	65.86	0.29	100	238	Average																																																																																																																																		

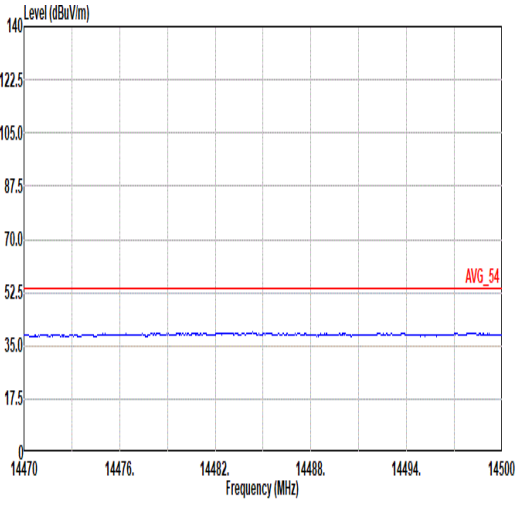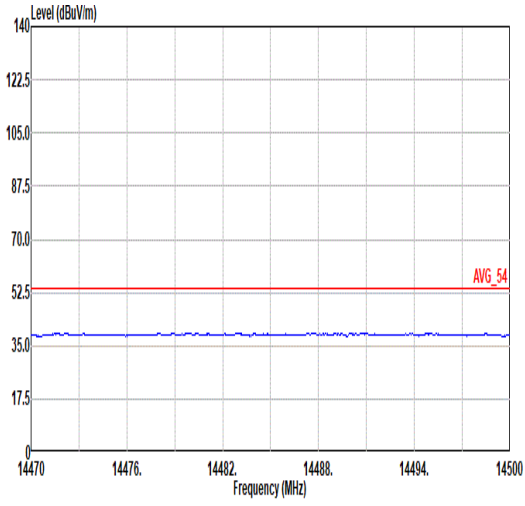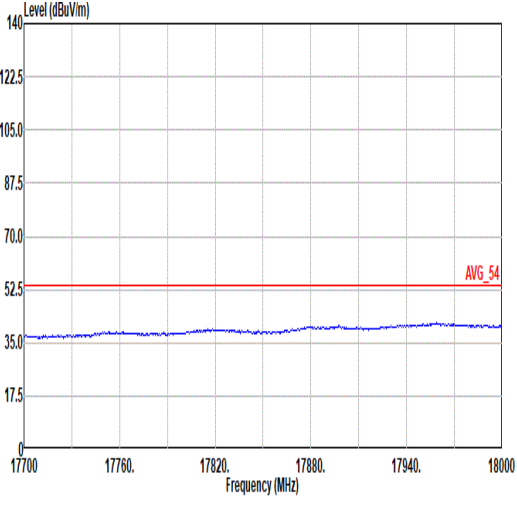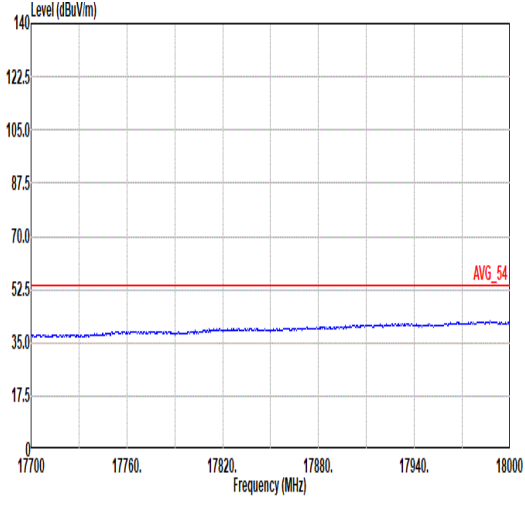

Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 80 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 80 Plane : X with adapter
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 80 Plane : X with adapter	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 80 Plane : X with adapter