



FCC RADIO TEST REPORT

FCC ID : A4RGHH4K
Equipment : Wireless Device
Model Name : GHH4K
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 18, 2025 and testing was performed from Mar. 04, 2025 to Mar. 28, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sportun International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Spot Check Evaluation on GHH4K	
Appendix F. Setup Photographs	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. ECR inquiry for data referencing from A4RGWSQ2 has been approved by FCC. The ECR inquiry and the associated document are submitted in the confidential exhibit.
2. A4RGHH4K is different from FCC ID: A4RGWSQ2 (Reference model), in the following:
 - i. The only difference between A4RGWSQ2 and A4RGHH4K are the LTE and NTN function, which is depopulated by hardware.
3. All the test results are referenced from A4RGWSQ2 (Sporton Test Report FR4D1913H), and spot check results to justify data referencing is presented in the Appendix E.
4. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
5. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Ming Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth, BLE, BLE ASK, BLE GFSK, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, UWB, 60GHz and GNSS.	
Antenna Type WLAN: PIFA Antenna	

EUT Information List	
S/N	Performed Test Item
51161WRCVL125M	RF Conducted Measurement
51151WRCVL11SA	Radiated Spurious Emission
51161WRCVL11X9	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-3.4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sportun International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No. TH02-HY, CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

<Bluetooth – LE GFSK>

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	-	-	27	2429	54	2456
	-	-	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	-	-	50	2452	-	-
	-	-	51	2453	-	-
	-	-	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth-LE GFSK / GFSK
	Mode 1: Bluetooth-LE GFSK Tx CH02_2404 MHz_1Mbps
	Mode 2: Bluetooth-LE GFSK Tx CH38_2440 MHz_1Mbps
	Mode 3: Bluetooth-LE GFSK Tx CH76_2478 MHz_1Mbps
	Mode 4: Bluetooth-LE GFSK Tx CH02_2404 MHz_2Mbps
	Mode 5: Bluetooth-LE GFSK Tx CH38_2440 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth-LE 1M (CH38) GFSK Tx + USB Cable (Charging from AC Adapter)

Remark:


1. For Radiated Test Cases, the worst mode data rate 2Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 2Mbps, and no other significantly frequencies found in conducted spurious emission.
2. The detailed Radiated test modes are shown in Appendix C.

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

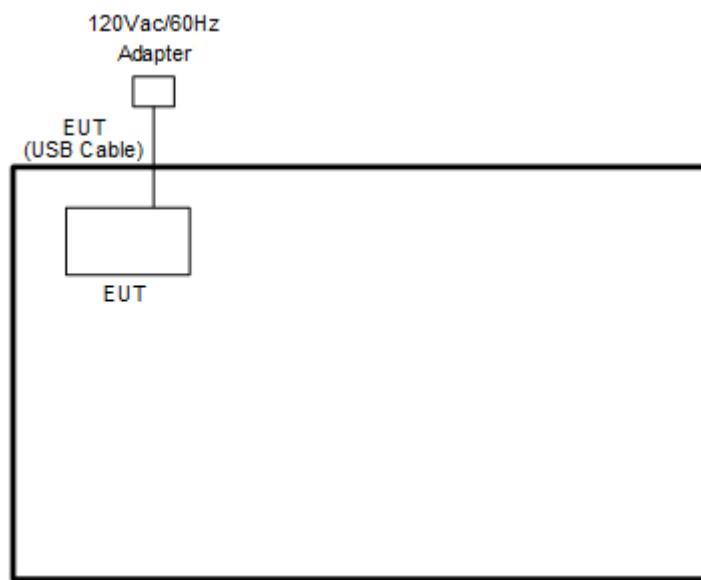

<Bluetooth-LE GFSK Tx Mode>

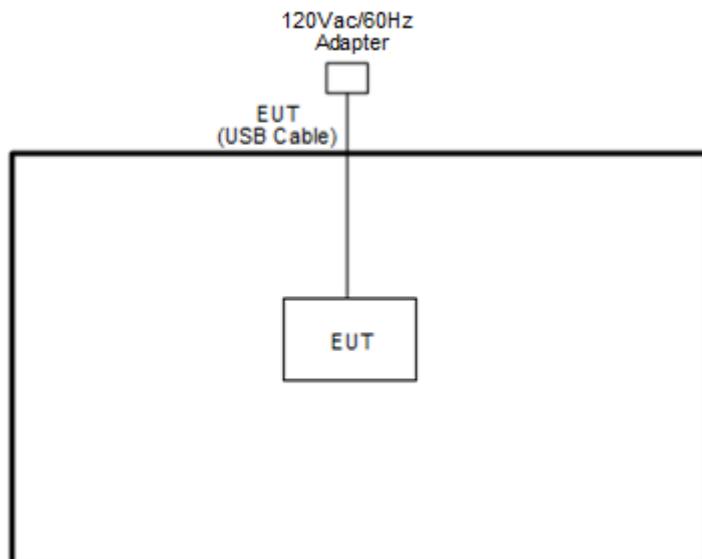



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.40” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

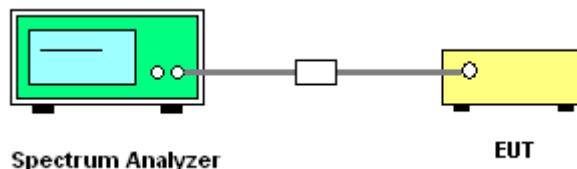

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

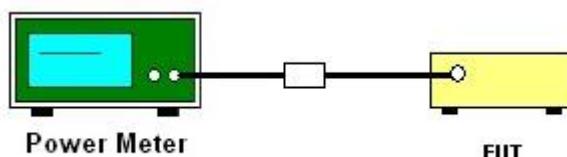

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

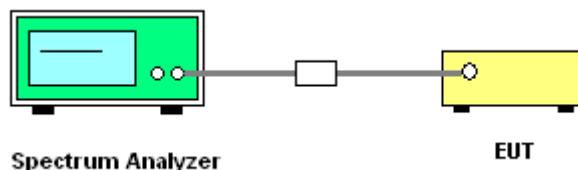

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

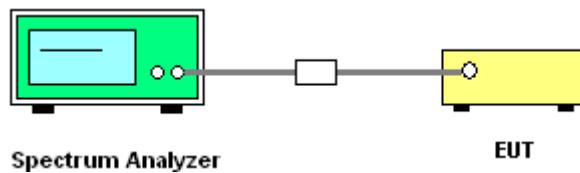

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

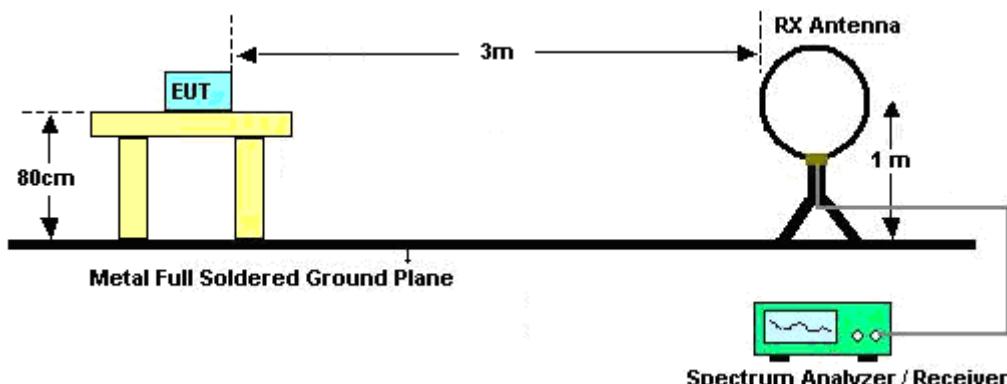


For radiated test from 30MHz to 1GHz

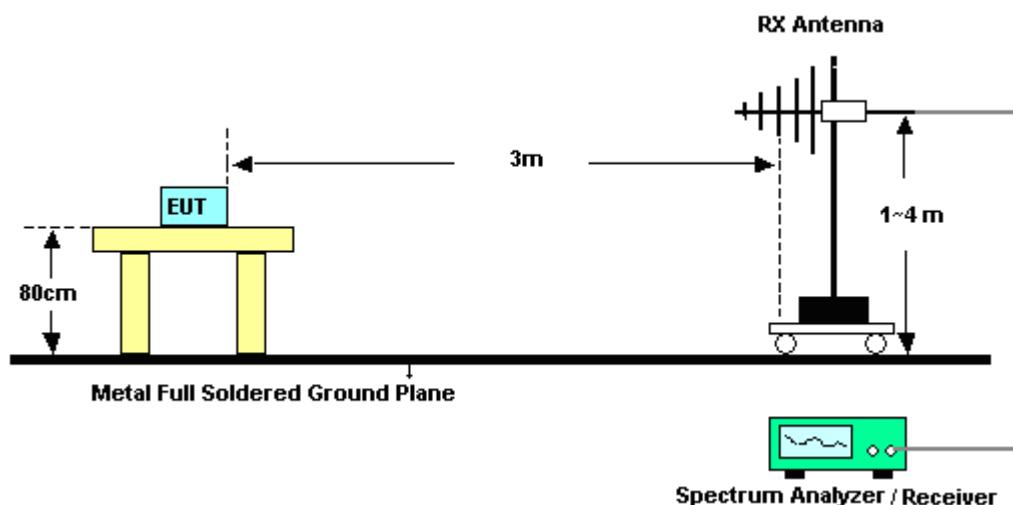

For radiated test from 1GHz to 18GHz

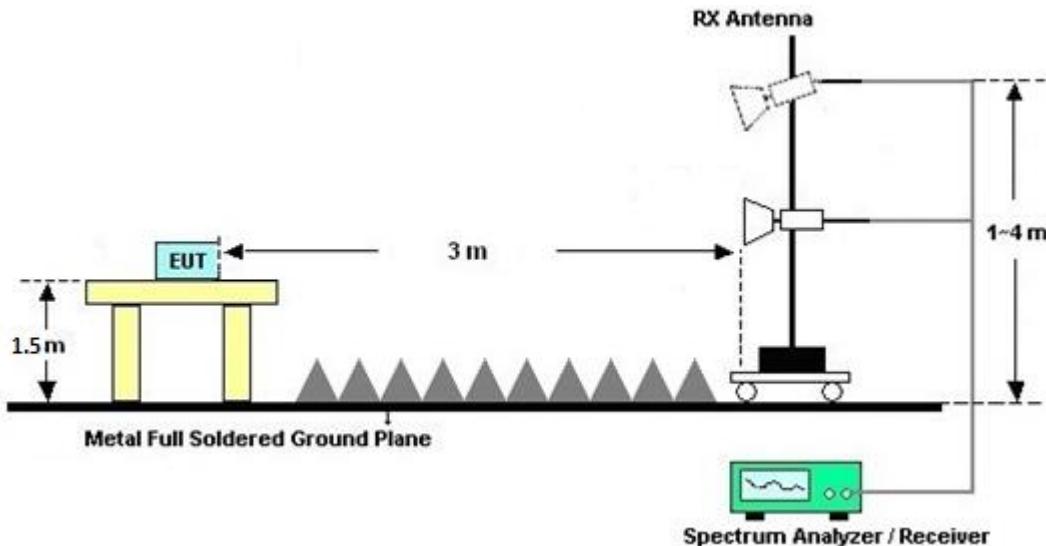

For radiated test above 18GHz

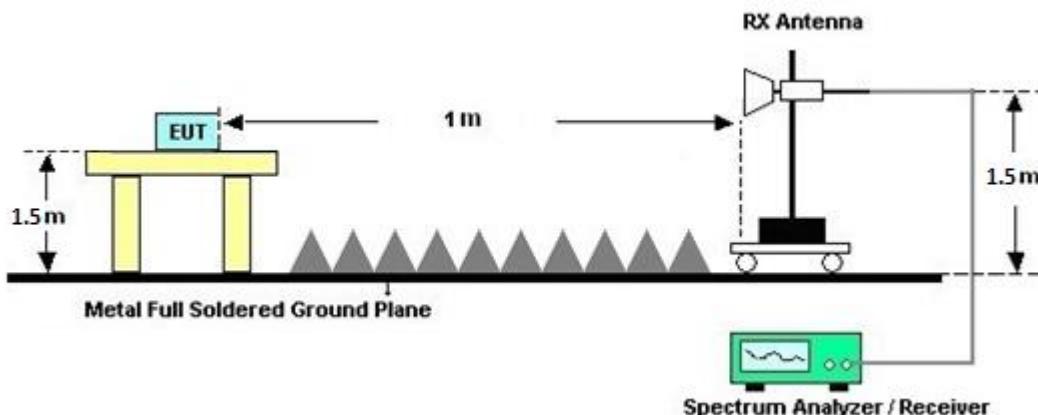

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

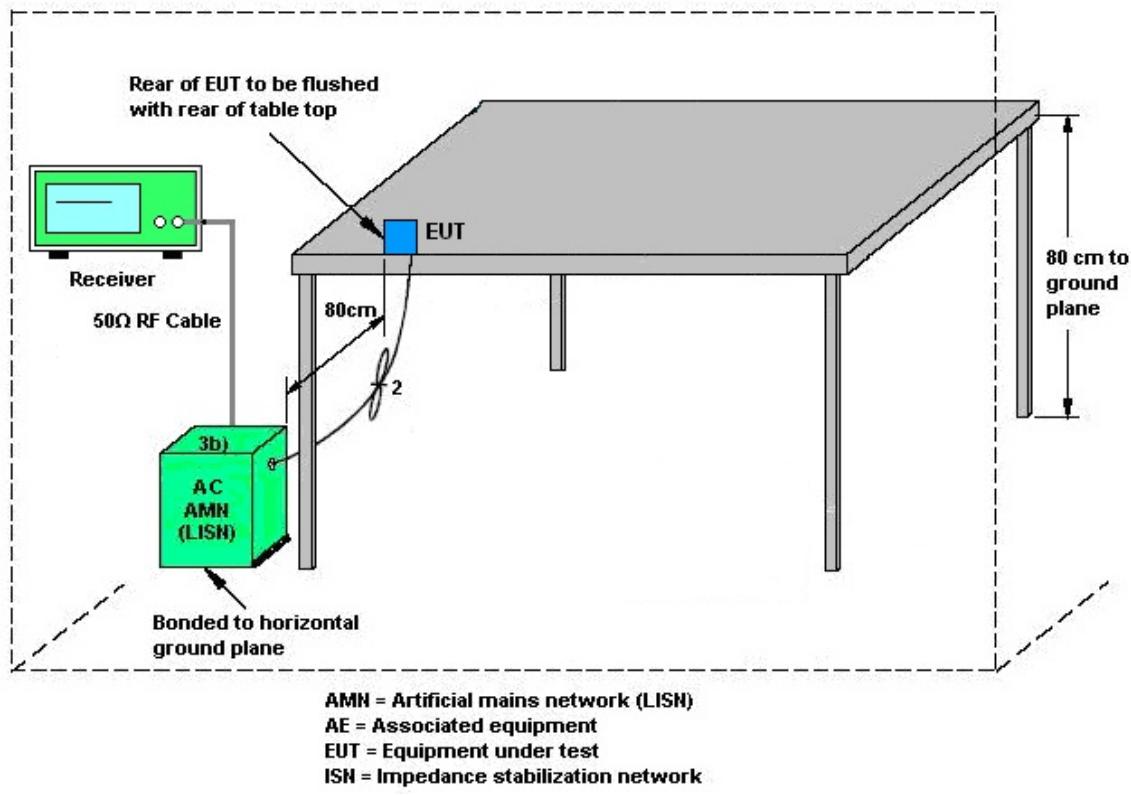

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	35419 & 03	30MHz~1GHz	Apr. 22, 2024	Mar. 14, 2025~Mar. 20, 2025	Apr. 21, 2025	Radiation (03CH07-HY)
BT Base Station	Rohde & Schwarz	CBT	100815	BT 3.0 & 4.0	Feb. 26, 2025	Mar. 14, 2025~Mar. 20, 2025	Feb. 25, 2026	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 28, 2024	Mar. 14, 2025~Mar. 20, 2025	Nov. 27, 2025	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Mar. 14, 2025~Mar. 20, 2025	Mar. 05, 2026	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 19, 2024	Mar. 14, 2025~Mar. 20, 2025	Apr. 18, 2025	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 01, 2024	Mar. 14, 2025~Mar. 20, 2025	Sep. 30, 2025	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 05, 2024	Mar. 14, 2025~Mar. 20, 2025	Aug. 04, 2025	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 23, 2024	Mar. 14, 2025~Mar. 20, 2025	Mar. 22, 2025	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 26, 2024	Mar. 14, 2025~Mar. 20, 2025	Mar. 25, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 20, 2025	Mar. 14, 2025~Mar. 20, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 20, 2025	Mar. 14, 2025~Mar. 20, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 14, 2024	Mar. 14, 2025~Mar. 20, 2025	Sep. 13, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 20, 2025	Mar. 14, 2025~Mar. 20, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22, 2024	Mar. 14, 2025~Mar. 20, 2025	Apr. 21, 2025	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Mar. 14, 2025~Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Mar. 14, 2025~Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Mar. 14, 2025~Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Mar. 14, 2025~Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Attenuator	HONOVA	5910 SMA-50-005-1 9-NE	ATT-36	N/A	Feb. 11, 2025	Mar. 14, 2025~Mar. 20, 2025	Feb. 10, 2026	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Mar. 14, 2025~Mar. 20, 2025	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPTEL	TR-32	HE17XB2495	N/A	Feb. 24, 2025	Mar. 14, 2025~Mar. 20, 2025	Feb. 23, 2026	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00991	18GHz-40GHz	Jun. 04, 2024	Mar. 14, 2025~Mar. 20, 2025	Jun. 03, 2025	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 28, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 10, 2024	Mar. 28, 2025	Dec. 09, 2025	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Mar. 28, 2025	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Mar. 28, 2025	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Mar. 28, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 30, 2024	Mar. 28, 2025	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT24082501	N/A	Oct. 15, 2024	Mar. 28, 2025	Oct. 14, 2025	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 04, 2025~Mar. 06, 2025	Oct. 30, 2025	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Mar. 04, 2025~Mar. 06, 2025	Jan. 08, 2026	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar. 04, 2025~Mar. 06, 2025	Aug. 22, 2025	Conducted (TH02-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 04, 2025~Mar. 06, 2025	May 19, 2025	Conduction (CO05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Mar. 04, 2025~Mar. 06, 2025	N/A	Conduction (CO05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	6.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	5.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	4.9 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang				Temperature:	21~25	°C
Test Date:	2025/3/4~2025/3/6				Relative Humidity:	51~54	%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE GFSK	1Mbps	1	02	2404	1.057	0.682	0.50	Pass
	1Mbps	1	38	2440	1.056	0.668	0.50	Pass
	1Mbps	1	76	2478	1.054	0.681	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE GFSK	1Mbps	1	02	2404	19.44	30.00	-3.40	16.04	36.00	Pass
	1Mbps	1	38	2440	19.41	30.00	-3.40	16.01	36.00	Pass
	1Mbps	1	76	2478	19.95	30.00	-3.40	16.55	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE GFSK	1Mbps	1	02	2404	16.86	-0.65	-3.40	8.00	Pass
	1Mbps	1	38	2440	17.26	0.93	-3.40	8.00	Pass
	1Mbps	1	76	2478	17.49	-0.25	-3.40	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang				Temperature:	21~25		°C
Test Date:	2025/3/4~2025/3/6				Relative Humidity:	51~54		%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE GFSK	2Mbps	1	02	2404	2.105	1.147	0.50	Pass
	2Mbps	1	38	2440	2.092	1.157	0.50	Pass
	2Mbps	1	76	2478	2.089	1.132	0.50	Pass




<u>TEST RESULTS DATA</u> <u>Average Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE GFSK	2Mbps	1	02	2404	19.78	30.00	-3.40	16.38	36.00	Pass
	2Mbps	1	38	2440	19.77	30.00	-3.40	16.37	36.00	Pass
	2Mbps	1	76	2478	19.99	30.00	-3.40	16.59	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail	
BLE GFSK	2Mbps	1	02	2404	16.82	-4.10	-3.40	8.00	Pass	
	2Mbps	1	38	2440	17.07	-4.38	-3.40	8.00	Pass	
	2Mbps	1	76	2478	17.65	-3.89	-3.40	8.00	Pass	

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.


**6dB Bandwidth**

<1M>

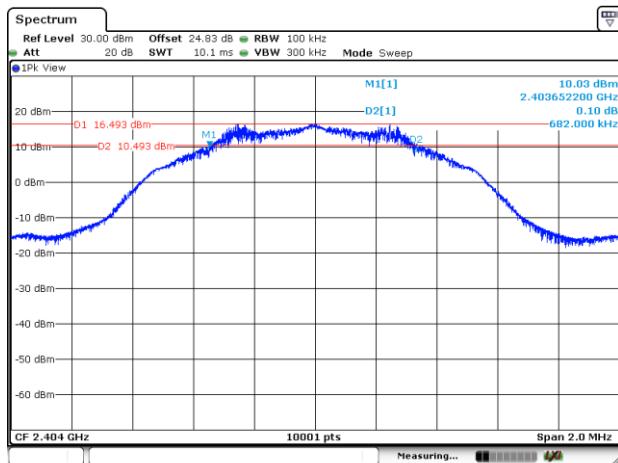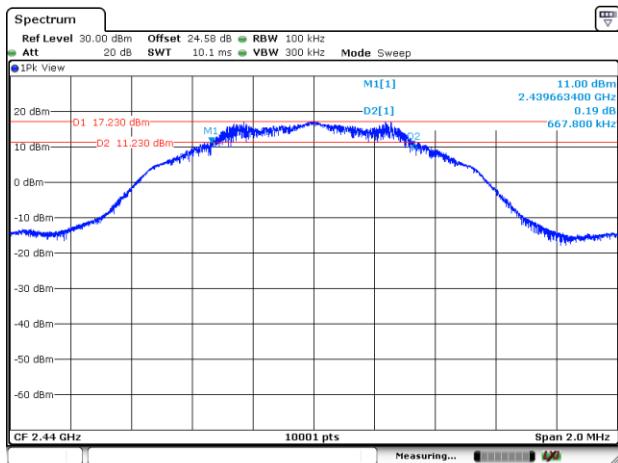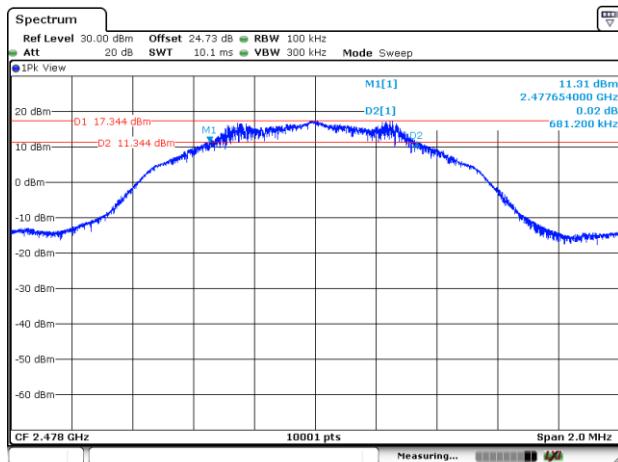6 dB Bandwidth Plot on Channel 02**6 dB Bandwidth Plot on Channel 38****6 dB Bandwidth Plot on Channel 76**




<2M>

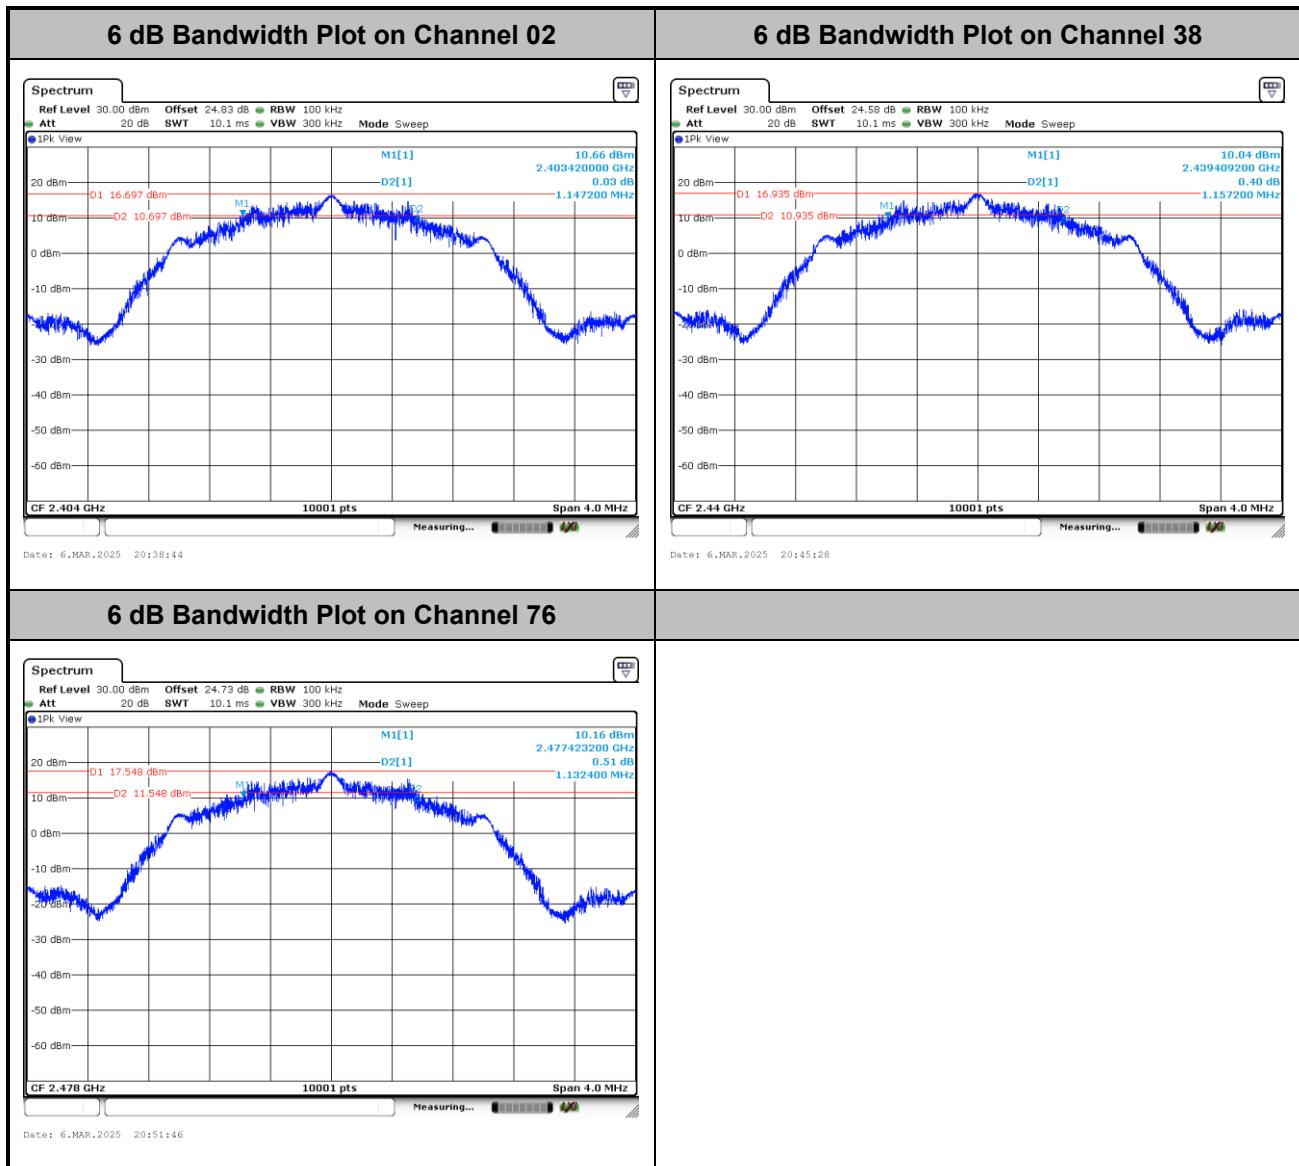


**99% Occupied Bandwidth**

<1M>

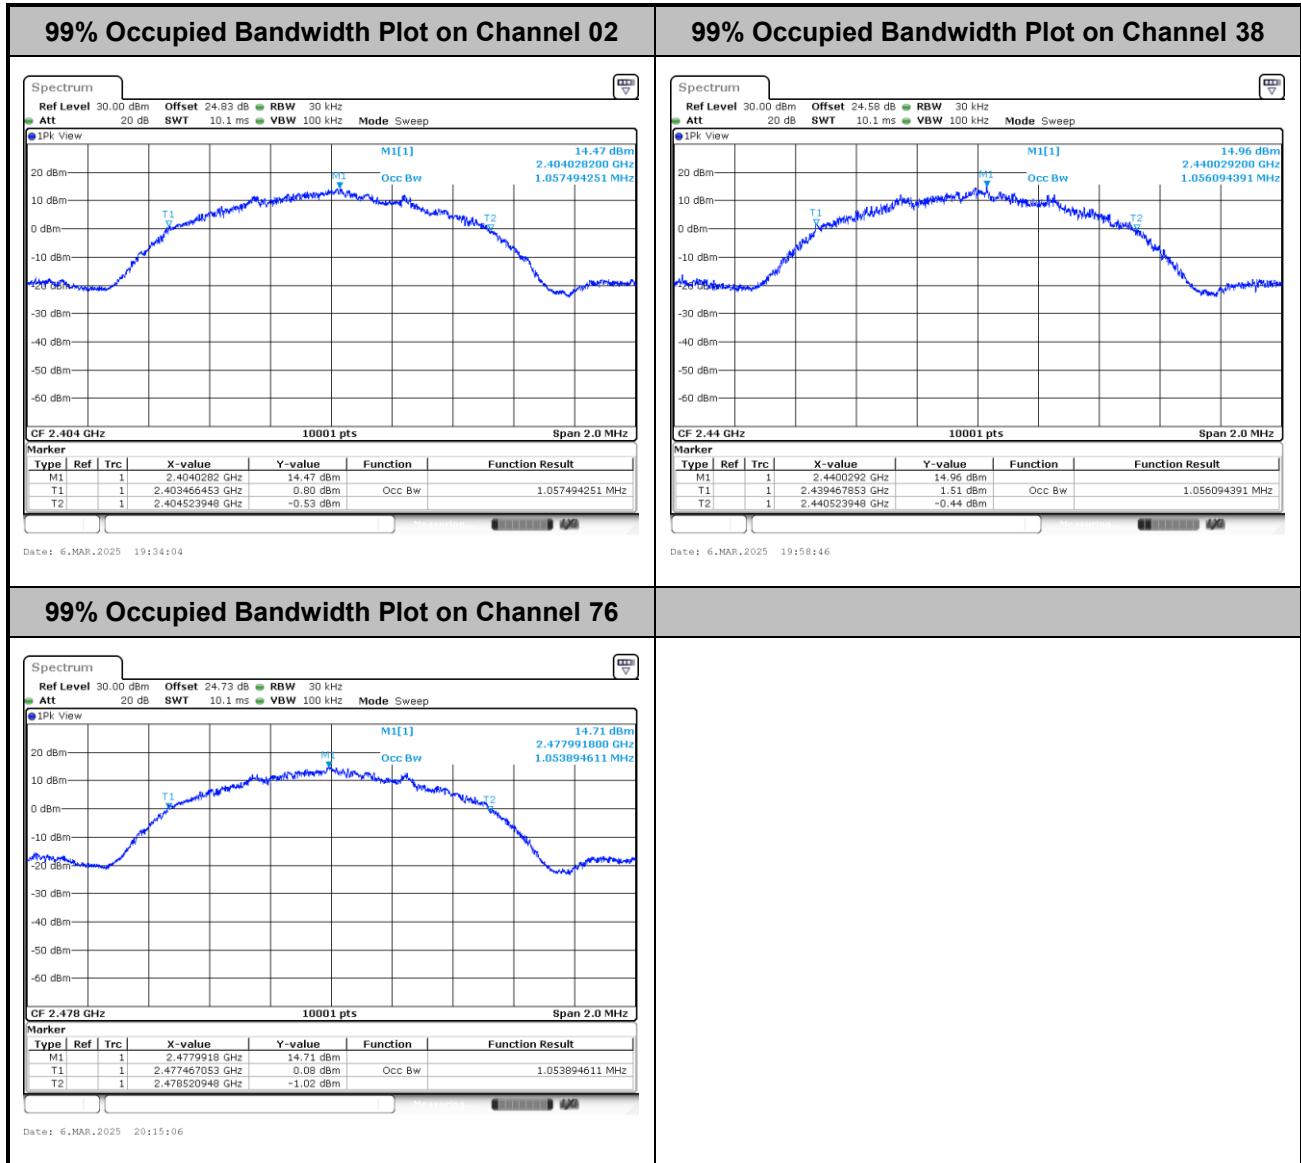




<2M>

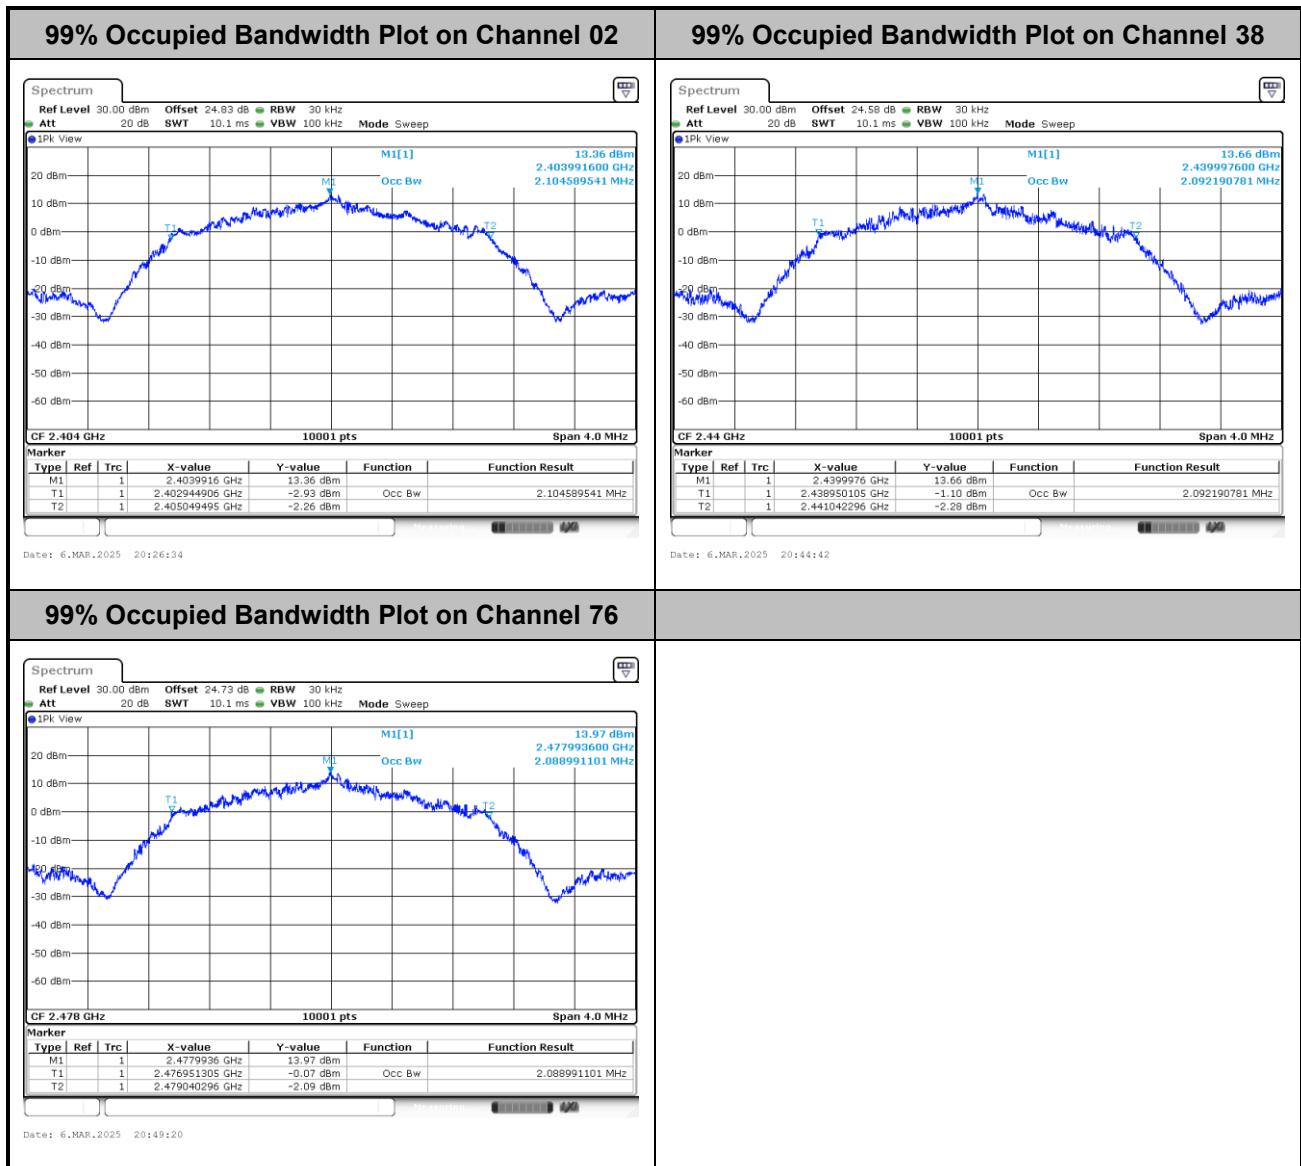




Power Spectral Density (dBm/3kHz)

<1M>

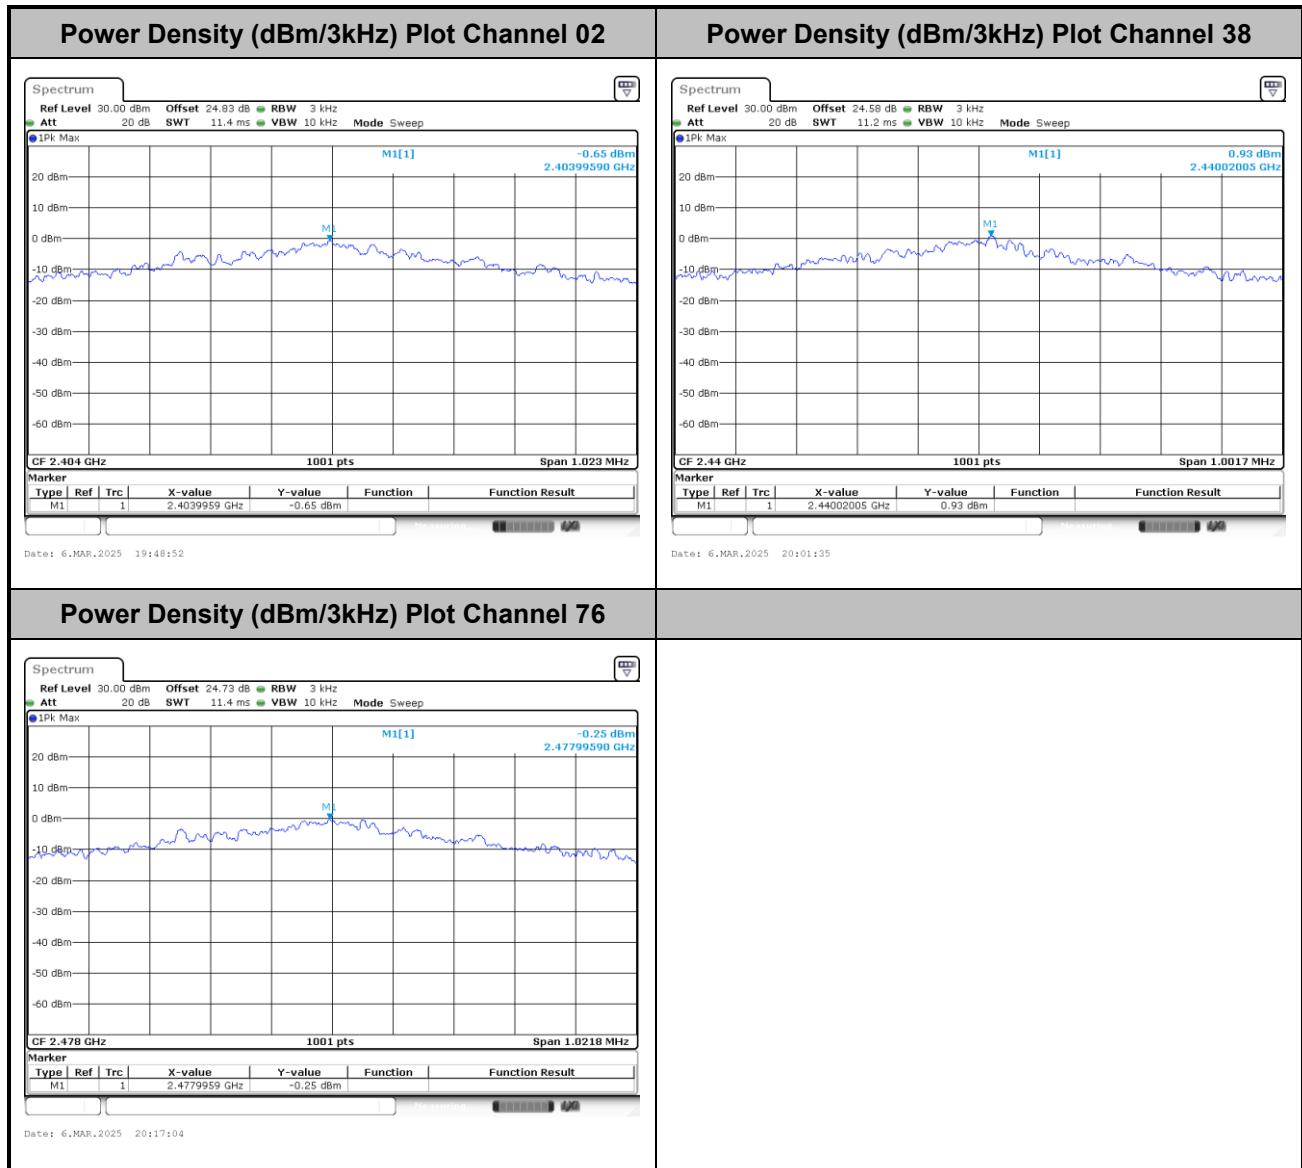





<2M>

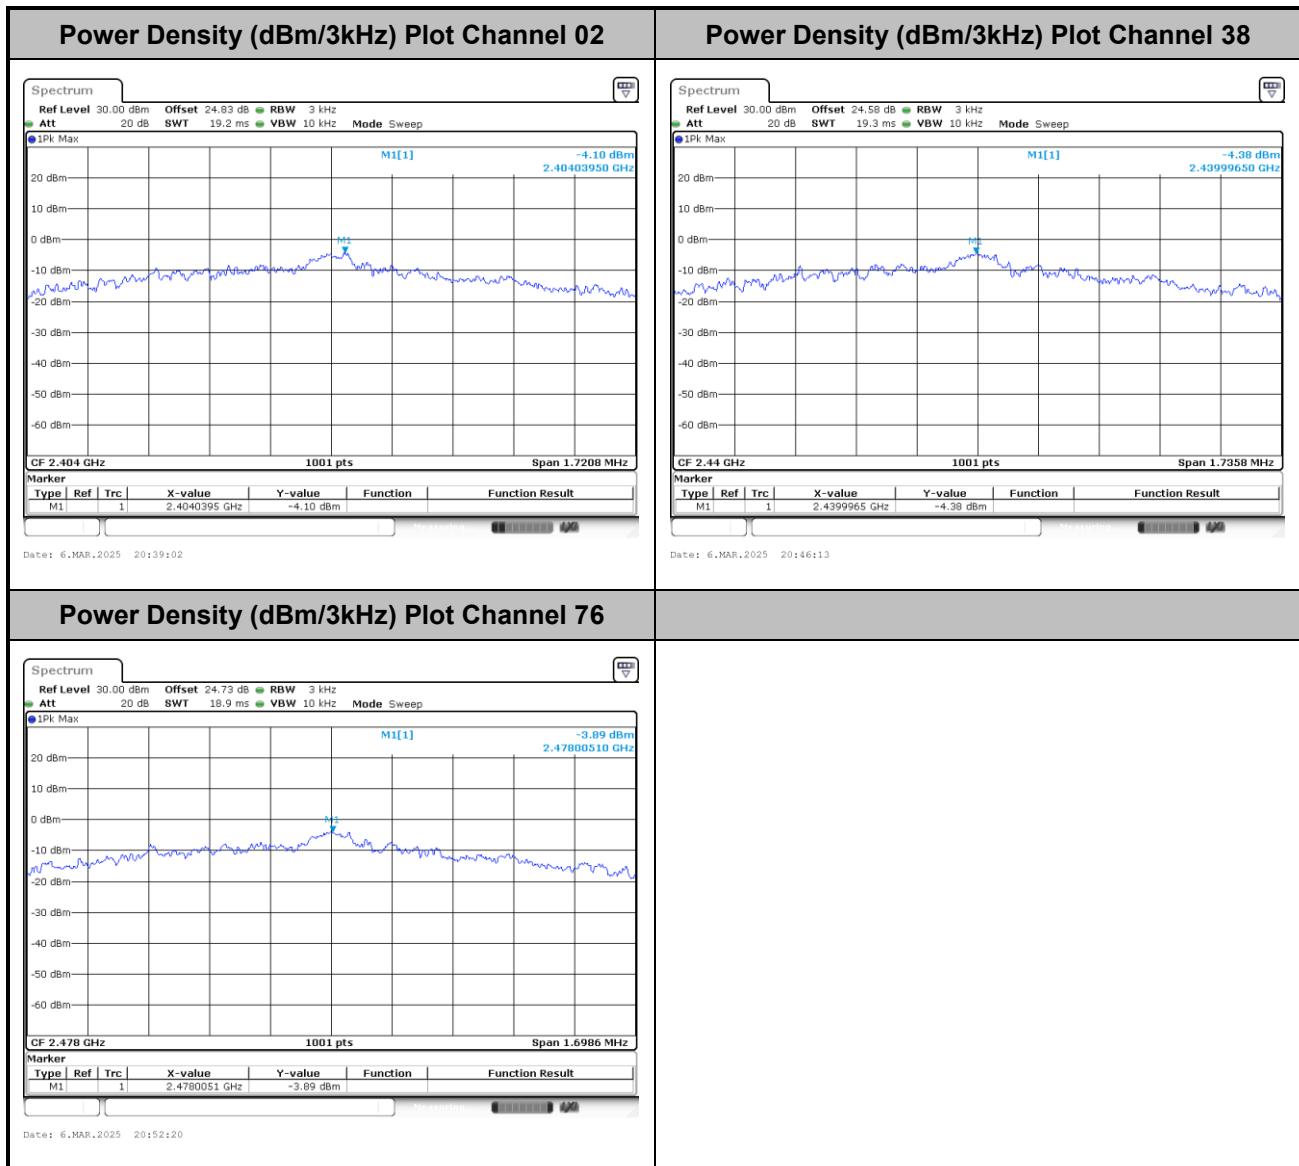


**Band Edge and Conducted Spurious Emission**

<1M>

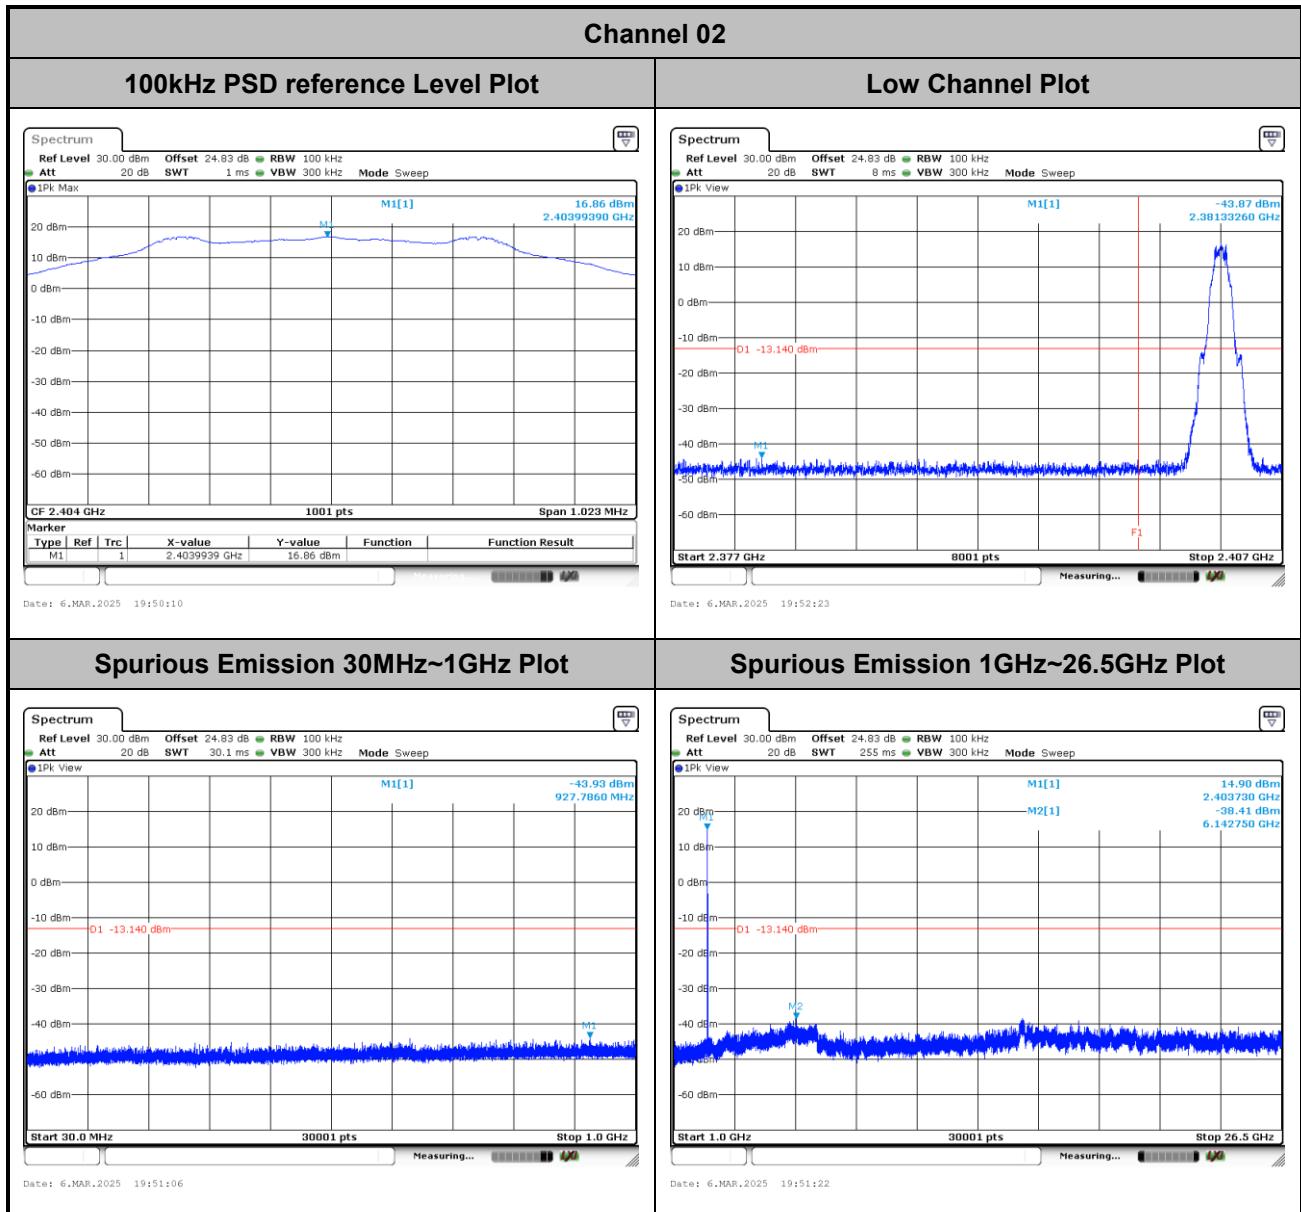


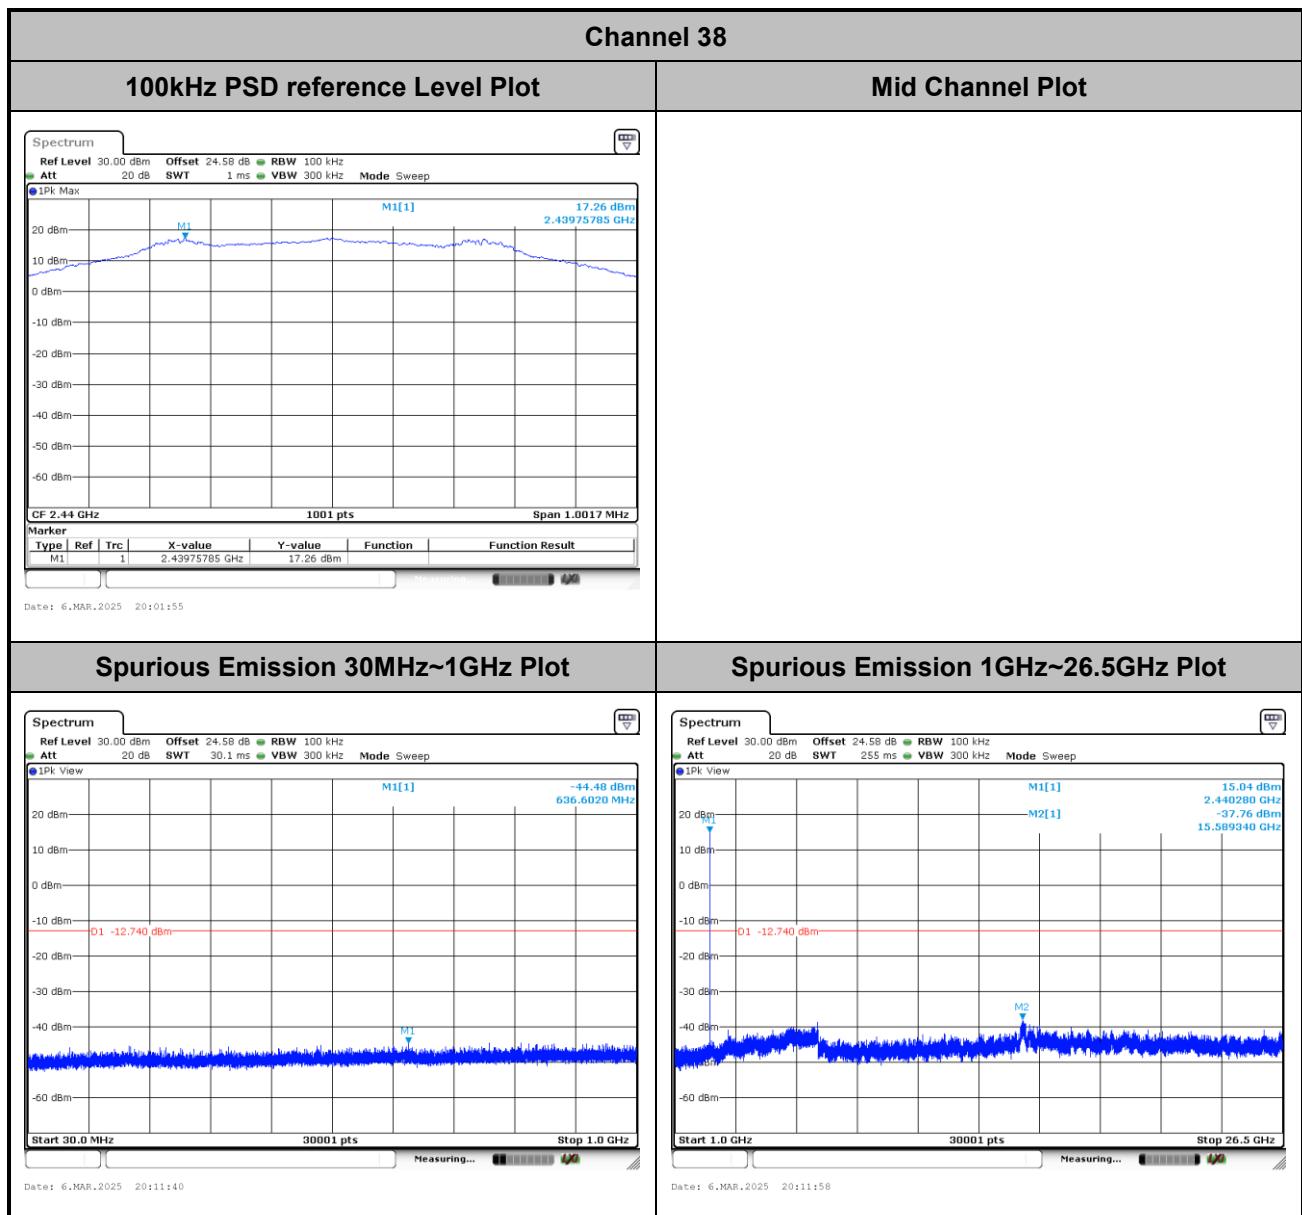


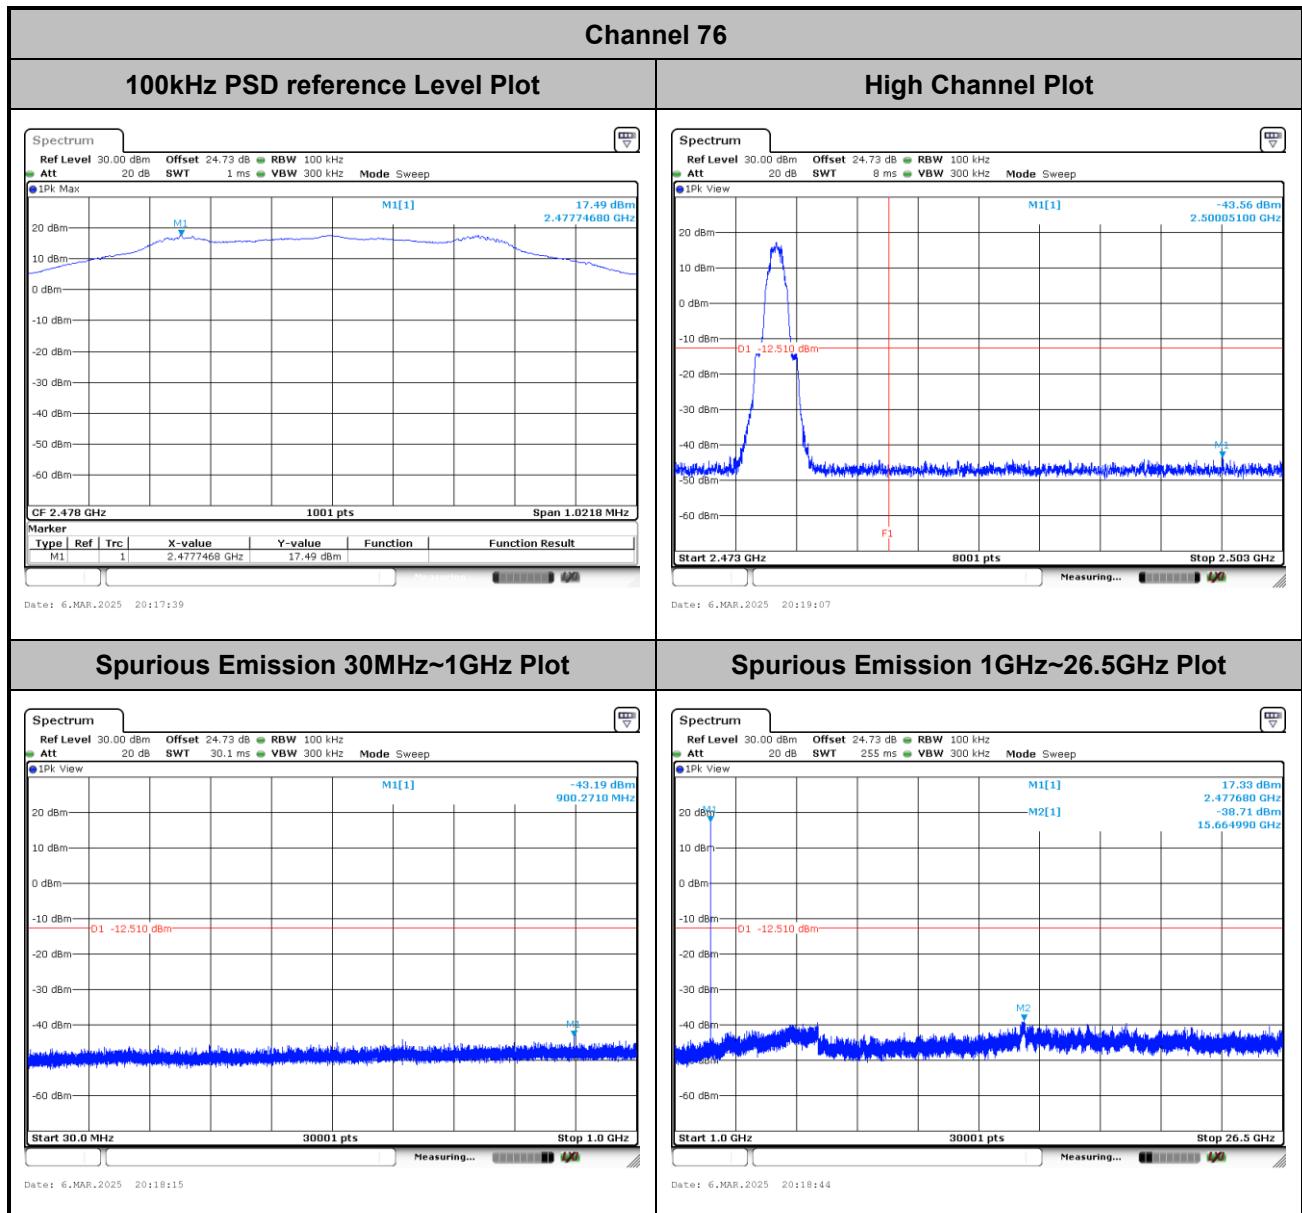




<2M>

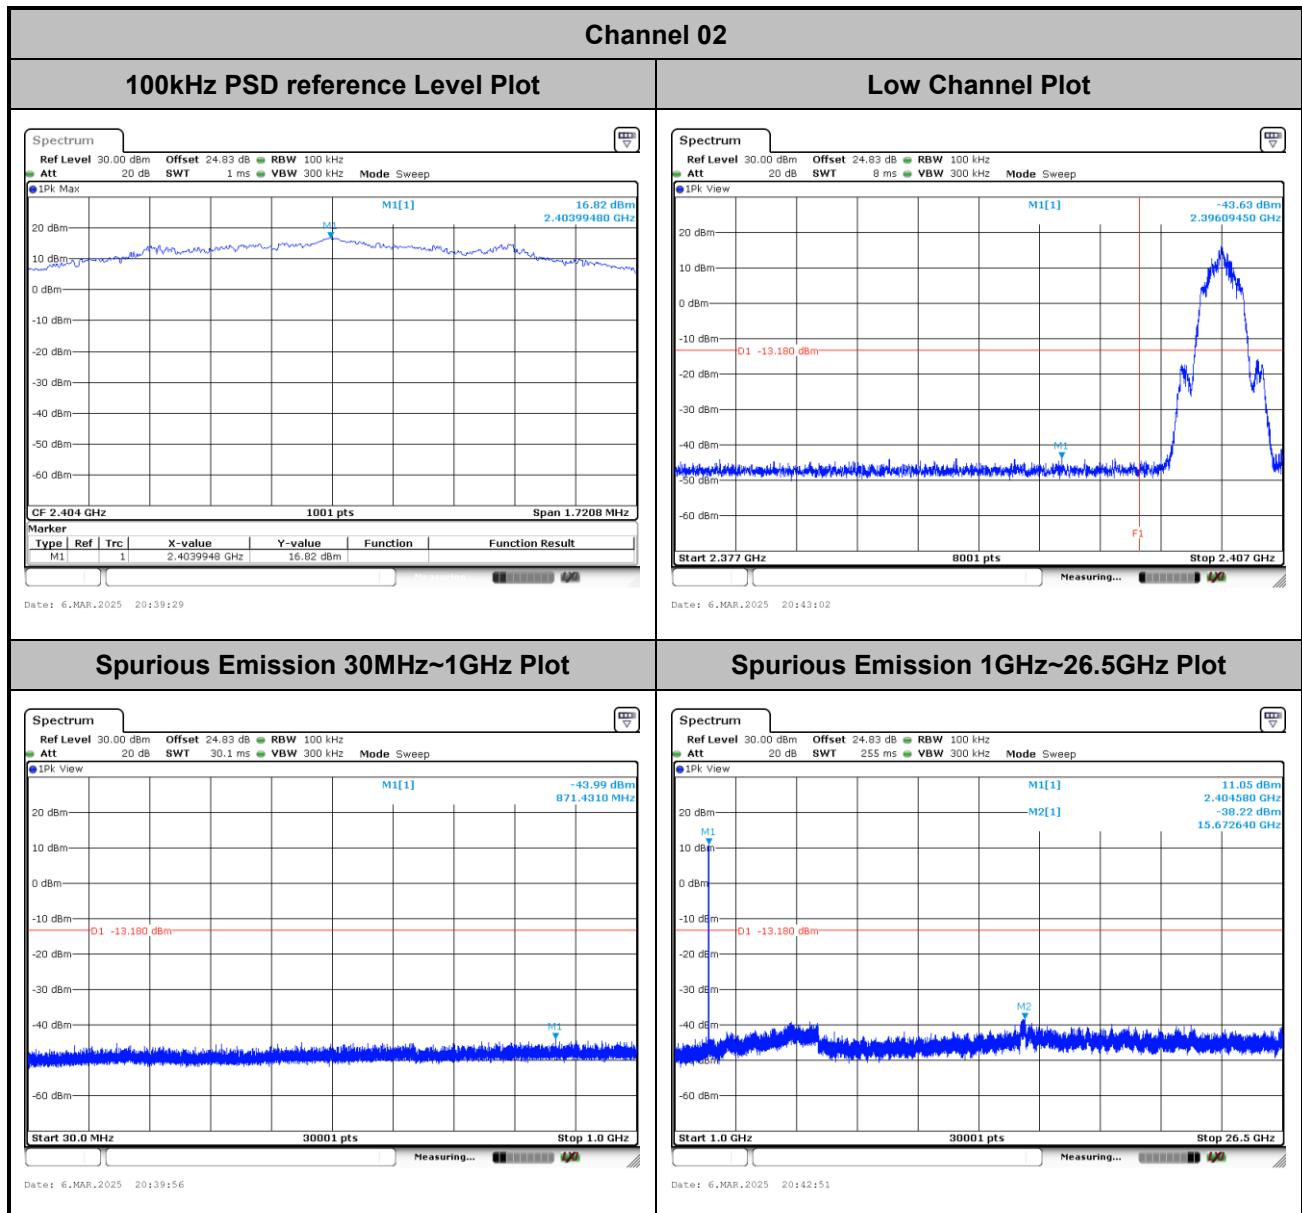

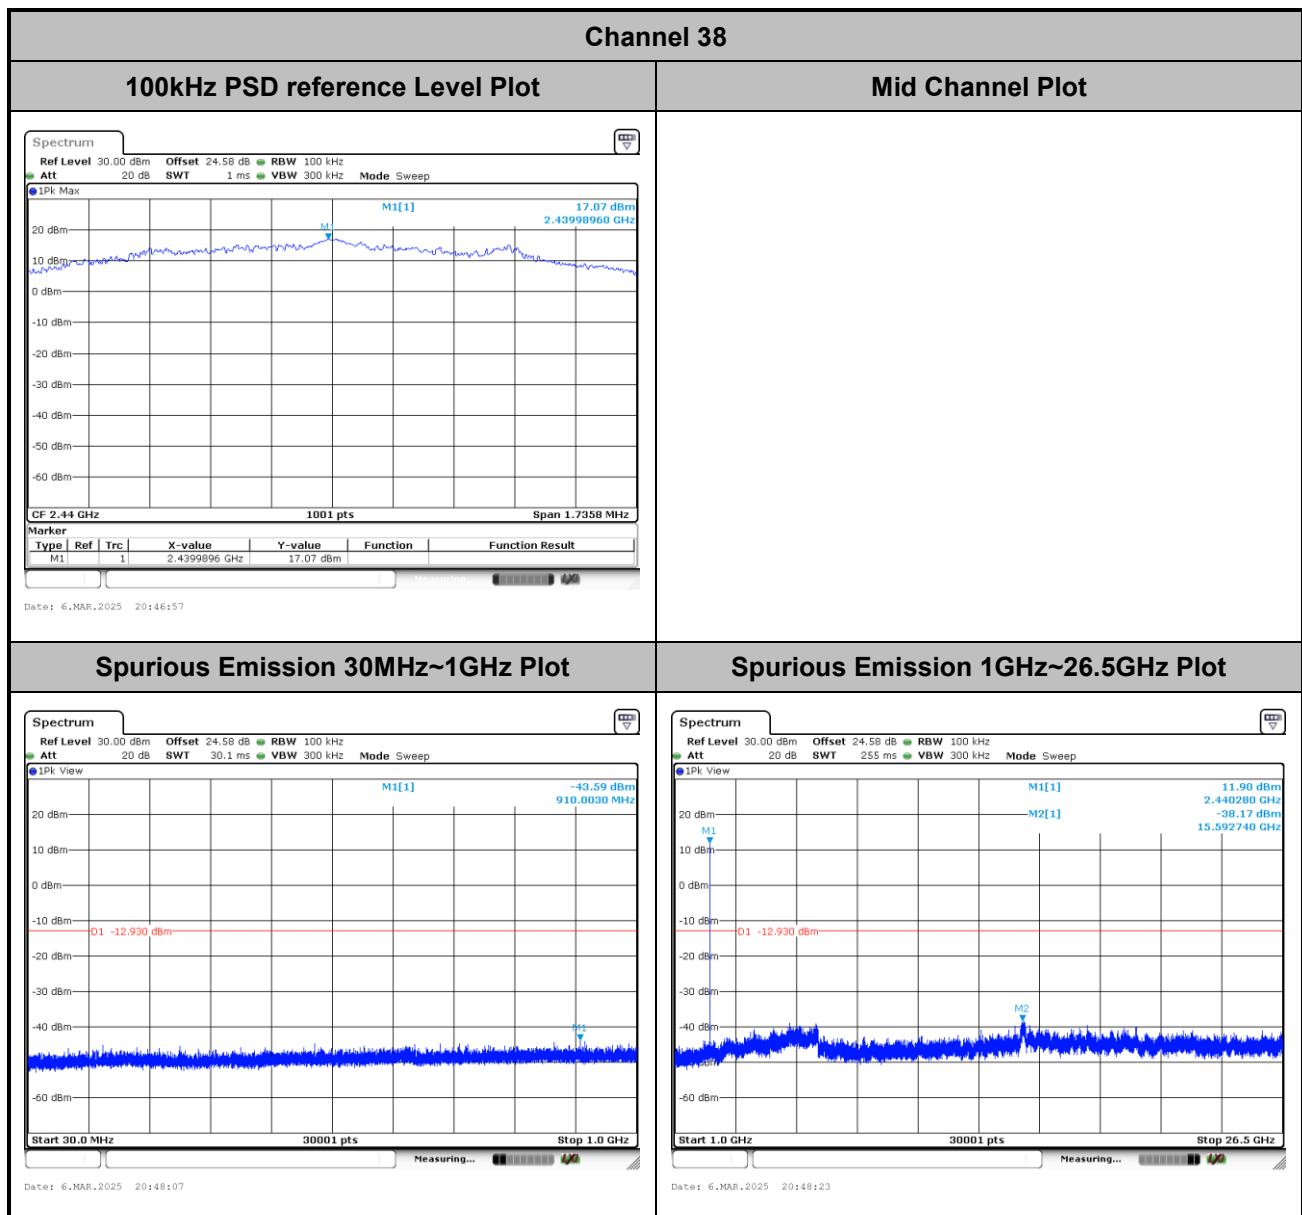

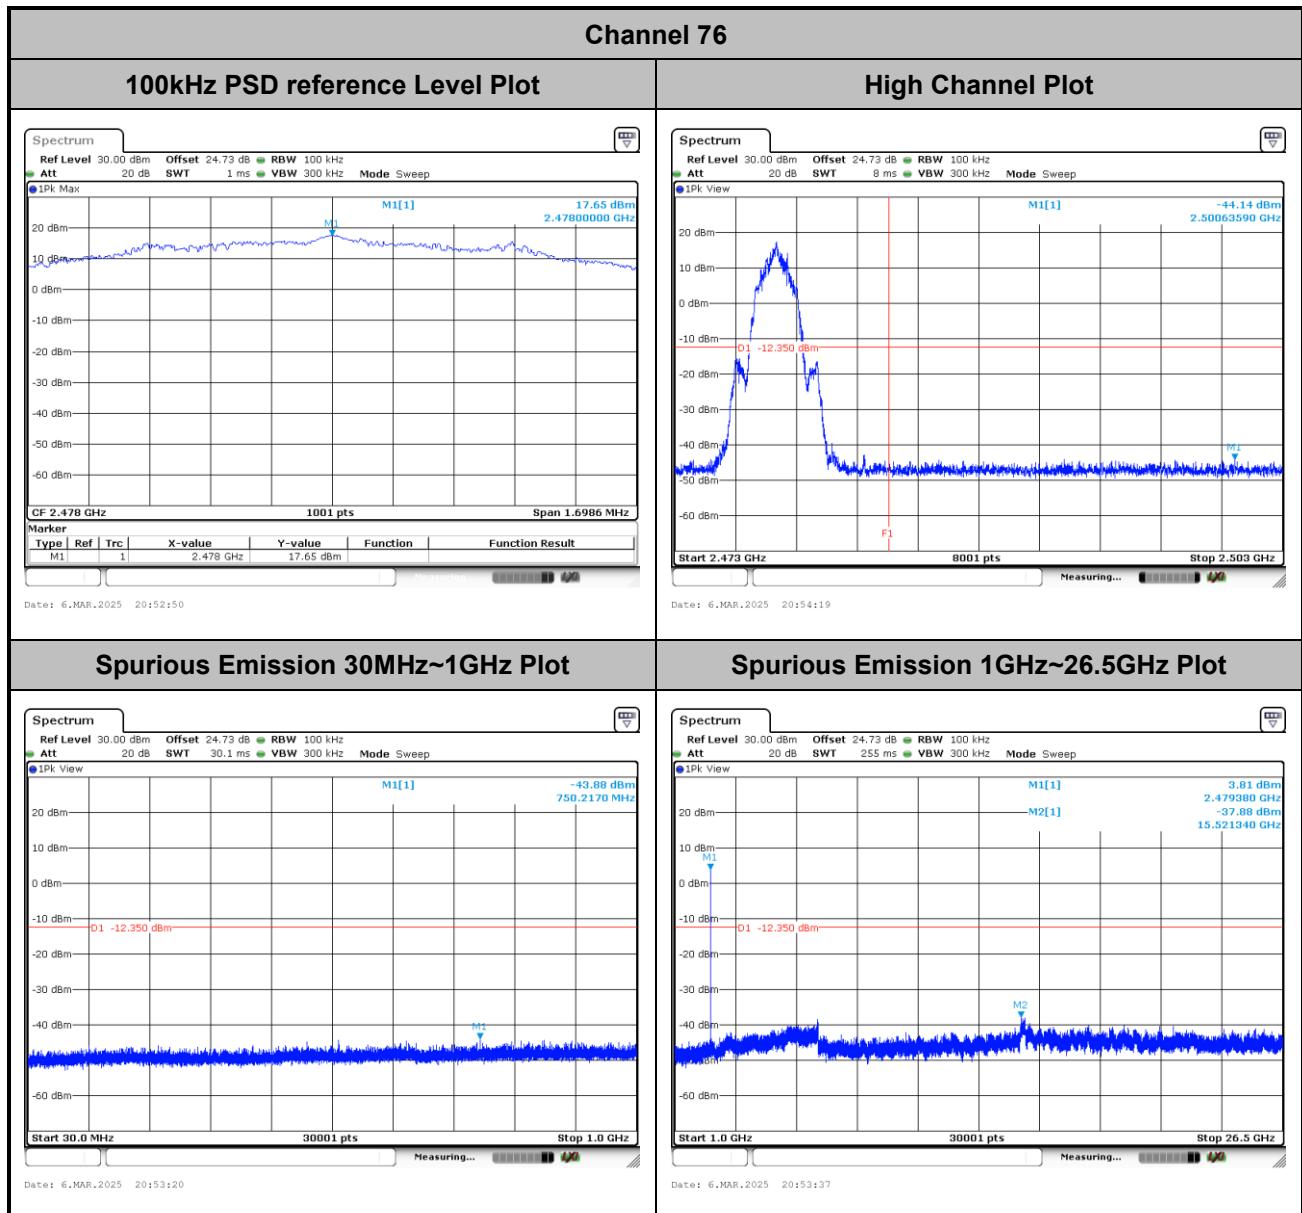




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

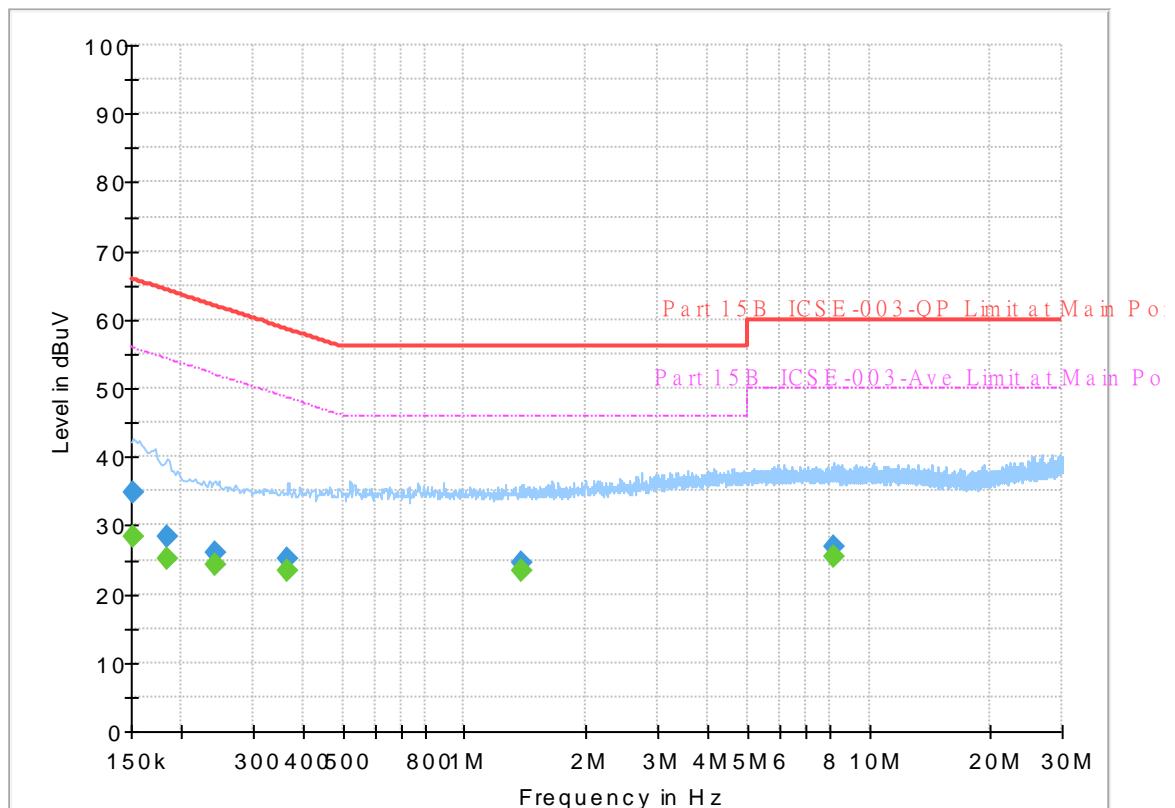


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	28.39	55.88	27.49	L1	OFF	19.8
0.152250	34.82	---	65.88	31.06	L1	OFF	19.8
0.183750	---	25.16	54.31	29.15	L1	OFF	19.8
0.183750	28.43	---	64.31	35.88	L1	OFF	19.8
0.242250	---	24.25	52.02	27.77	L1	OFF	19.8
0.242250	26.11	---	62.02	35.91	L1	OFF	19.8
0.366000	---	23.45	48.59	25.14	L1	OFF	19.8
0.366000	25.19	---	58.59	33.40	L1	OFF	19.8
1.389750	---	23.34	46.00	22.66	L1	OFF	19.8
1.389750	24.68	---	56.00	31.32	L1	OFF	19.8
8.205000	---	25.58	50.00	24.42	L1	OFF	20.2
8.205000	26.80	---	60.00	33.20	L1	OFF	20.2

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

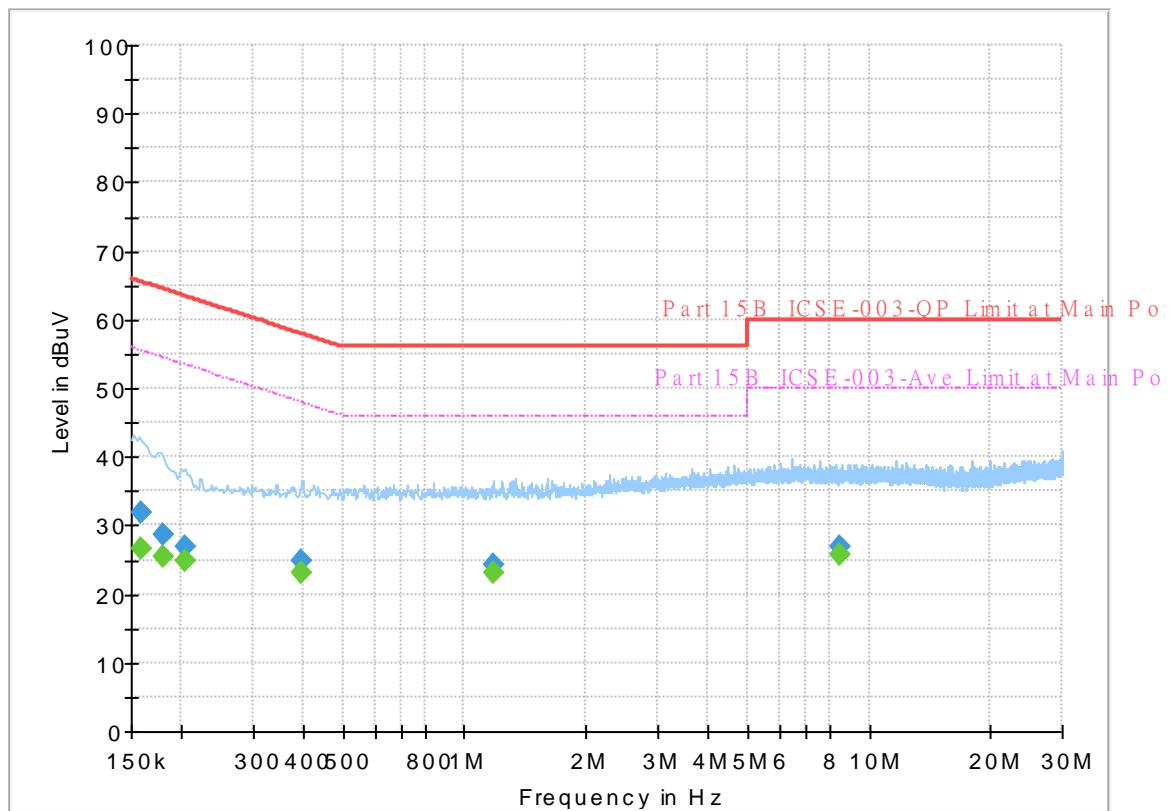

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	26.66	55.52	28.86	N	OFF	19.8
0.159000	31.77	---	65.52	33.75	N	OFF	19.8
0.179250	---	25.39	54.52	29.13	N	OFF	19.8
0.179250	28.53	---	64.52	35.99	N	OFF	19.8
0.204000	---	24.80	53.45	28.65	N	OFF	19.8
0.204000	27.01	---	63.45	36.44	N	OFF	19.8
0.395250	---	23.20	47.95	24.75	N	OFF	19.8
0.395250	24.73	---	57.95	33.22	N	OFF	19.8
1.176000	---	23.21	46.00	22.79	N	OFF	19.8
1.176000	24.38	---	56.00	31.62	N	OFF	19.8
8.508750	---	25.68	50.00	24.32	N	OFF	20.2
8.508750	26.79	---	60.00	33.21	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer:	Jesse Wang, Stan Hsieh and Ken Wu	Relative Humidity:	18.4~21.2°C
		Temperature:	47.6~57.5 %

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Bluetooth LE GFSK	02	2404	1Mbps	-	-
Mode 2	2400-2483.5	Bluetooth LE GFSK	38	2440	1Mbps	-	-
Mode 3	2400-2483.5	Bluetooth LE GFSK	76	2478	1Mbps	-	-
Mode 4	2400-2483.5	Bluetooth LE GFSK	02	2404	2Mbps	-	-
Mode 5	2400-2483.5	Bluetooth LE GFSK	38	2440	2Mbps	-	-
Mode 6	2400-2483.5	Bluetooth LE GFSK	76	2478	2Mbps	-	-
Mode 7	2400-2483.5	Bluetooth LE GFSK	38	2440	2Mbps	-	SHF
Mode 8	2400-2483.5	Bluetooth LE GFSK	38	2440	2Mbps	-	LF







C2. Summary of each worse mode


Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth LE GFSK	02	2389.81	48.34	54.00	-5.66	H	Avg.	Pass	-	Band Edge
	Bluetooth LE GFSK	02	4808.00	42.18	54.00	-11.82	V	Avg.	Pass	-	Harmonic
2	Bluetooth LE GFSK	38	2492.02	49.65	54.00	-4.35	H	Avg.	Pass	-	Band Edge
	Bluetooth LE GFSK	38	7320.00	42.13	74.00	-31.87	V	Peak	Pass	-	Harmonic
3	Bluetooth LE GFSK	76	2495.58	49.63	54.00	-4.37	H	Avg.	Pass	-	Band Edge
	Bluetooth LE GFSK	76	4956.00	42.25	74.00	-31.75	H	Peak	Pass	-	Harmonic
4	Bluetooth LE GFSK	02	2324.29	50.03	54.00	-3.97	V	Avg.	Pass	-	Band Edge
	Bluetooth LE GFSK	02	4808.00	42.61	54.00	-11.39	V	Avg.	Pass	-	Harmonic
5	Bluetooth LE GFSK	38	2487.70	50.53	54.00	-3.47	V	Avg.	Pass	-	Band Edge
	Bluetooth LE GFSK	38	7320.00	42.78	74.00	-31.22	V	Peak	Pass	-	Harmonic
6	Bluetooth LE GFSK	76	2496.55	50.02	54.00	-3.98	V	Avg.	Pass	-	Band Edge
	Bluetooth LE GFSK	76	7434.00	42.76	74.00	-31.24	V	Peak	Pass	-	Harmonic
7	Bluetooth LE GFSK	38	24972.00	38.43	74.00	-35.57	V	Peak	Pass	-	SHF
8	Bluetooth LE GFSK	38	30.00	30.78	40.00	-9.22	V	Peak	Pass	-	LF

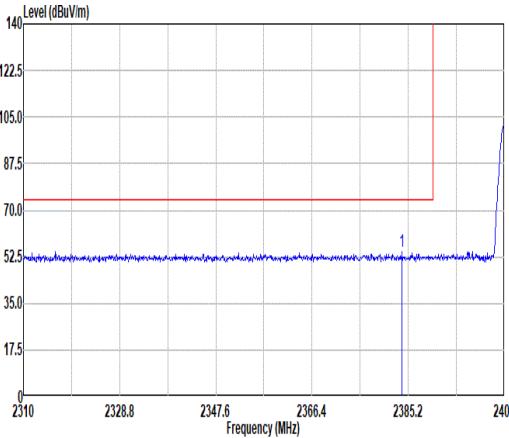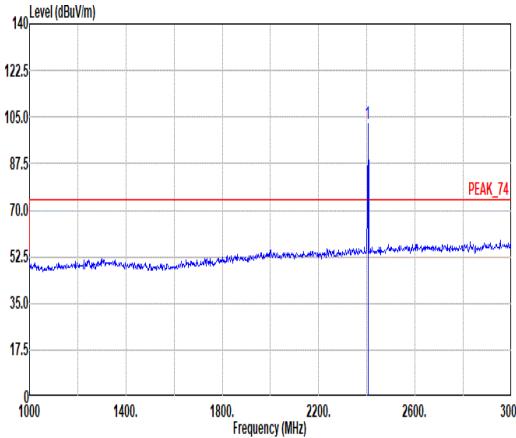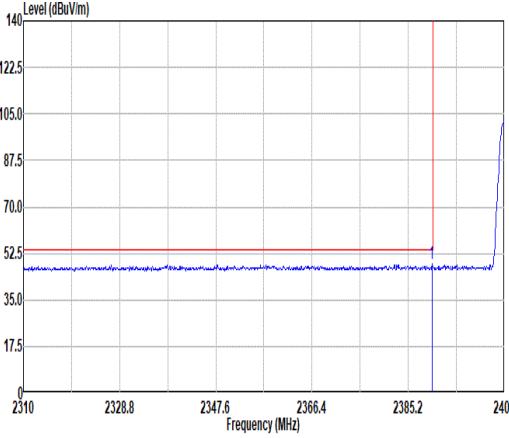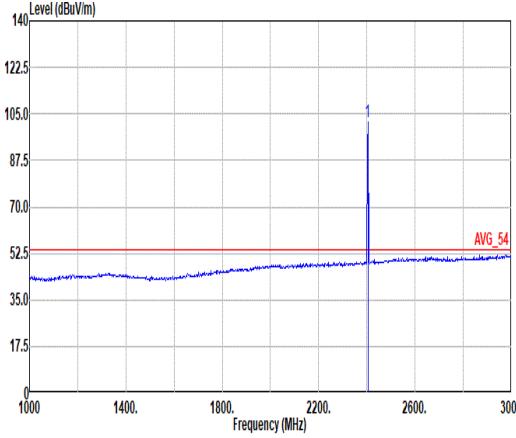





Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth LE GFSK_CH02_2404MHz																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2383.98</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>38.31</td><td>32.10</td><td>8.35</td><td>34.32</td><td>9.98 100 258 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2383.98	54.34	74.00	-19.66	38.31	32.10	8.35	34.32	9.98 100 258 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2404.00</td><td>102.67</td><td>-----</td><td>-----</td><td>86.59</td><td>32.10</td><td>8.39</td><td>34.31</td><td>9.98 100 258 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2404.00	102.67	-----	-----	86.59	32.10	8.39	34.31	9.98 100 258 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																										
1	2383.98	54.34	74.00	-19.66	38.31	32.10	8.35	34.32	9.98 100 258 PEAK																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																										
1	2404.00	102.67	-----	-----	86.59	32.10	8.39	34.31	9.98 100 258 PEAK																																																																									
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2389.81</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>32.30</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.98 100 258 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2389.81	48.34	54.00	-5.66	32.30	32.10	8.36	34.32	9.98 100 258 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2404.00</td><td>102.04</td><td>-----</td><td>-----</td><td>85.96</td><td>32.10</td><td>8.39</td><td>34.31</td><td>9.98 100 258 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2404.00	102.04	-----	-----	85.96	32.10	8.39	34.31	9.98 100 258 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																										
1	2389.81	48.34	54.00	-5.66	32.30	32.10	8.36	34.32	9.98 100 258 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																										
1	2404.00	102.04	-----	-----	85.96	32.10	8.39	34.31	9.98 100 258 AVERAGE																																																																									
Mode	1																																																																																	

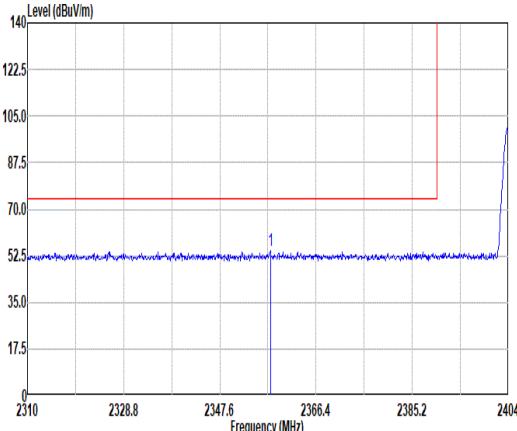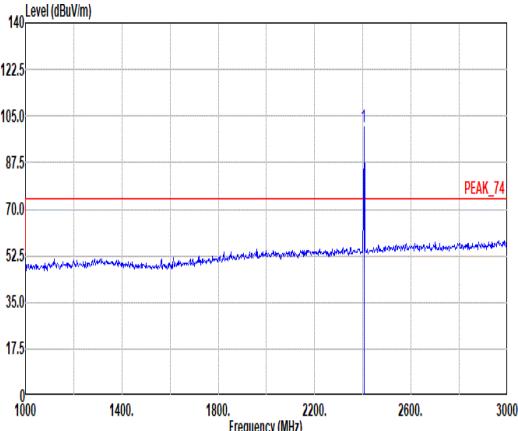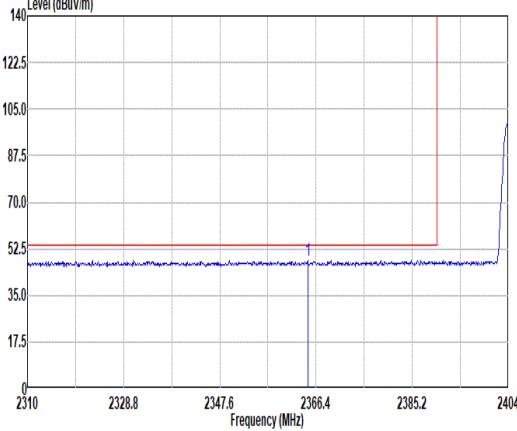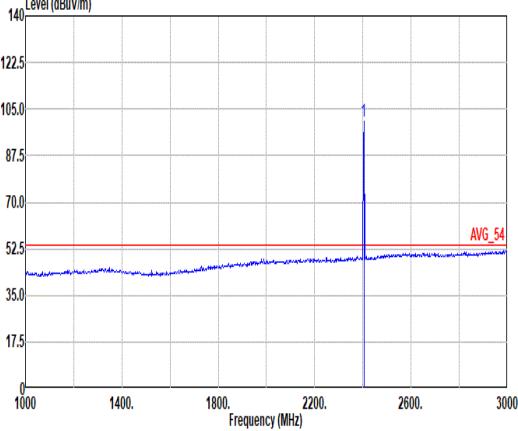





		Band Edge																																																																								
		2400-2483.5_Bluetooth LE GFSK_CH02_2404MHz																																																																								
Pol.	Vertical					Fundamental																																																																				
Peak																																																																										
Peak	<p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2357.47</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>38.80</td><td>32.00</td><td>8.30</td><td>34.33</td><td>9.90</td><td>202</td><td>235 PEAK</td></tr> </tbody> </table>					Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	2357.47	54.67	74.00	-19.33	38.80	32.00	8.30	34.33	9.90	202	235 PEAK	<p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2404.00</td><td>100.74</td><td>-----</td><td>-----</td><td>84.66</td><td>32.10</td><td>8.39</td><td>34.31</td><td>9.90</td><td>202</td><td>235 PEAK</td></tr> </tbody> </table>					Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	2404.00	100.74	-----	-----	84.66	32.10	8.39	34.31	9.90	202	235 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																		
1	2357.47	54.67	74.00	-19.33	38.80	32.00	8.30	34.33	9.90	202	235 PEAK																																																															
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																		
1	2404.00	100.74	-----	-----	84.66	32.10	8.39	34.31	9.90	202	235 PEAK																																																															
Avg																																																																										
Avg	<p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:24.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2364.88</td><td>48.88</td><td>54.00</td><td>-5.92</td><td>32.20</td><td>32.00</td><td>8.31</td><td>34.33</td><td>9.90</td><td>202</td><td>235 AVERAGE</td></tr> </tbody> </table>					Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	2364.88	48.88	54.00	-5.92	32.20	32.00	8.31	34.33	9.90	202	235 AVERAGE	<p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:24.000kHz SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2404.00</td><td>100.22</td><td>-----</td><td>-----</td><td>84.14</td><td>32.10</td><td>8.39</td><td>34.31</td><td>9.90</td><td>202</td><td>235 AVERAGE</td></tr> </tbody> </table>					Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	2404.00	100.22	-----	-----	84.14	32.10	8.39	34.31	9.90	202	235 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																		
1	2364.88	48.88	54.00	-5.92	32.20	32.00	8.31	34.33	9.90	202	235 AVERAGE																																																															
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																		
1	2404.00	100.22	-----	-----	84.14	32.10	8.39	34.31	9.90	202	235 AVERAGE																																																															

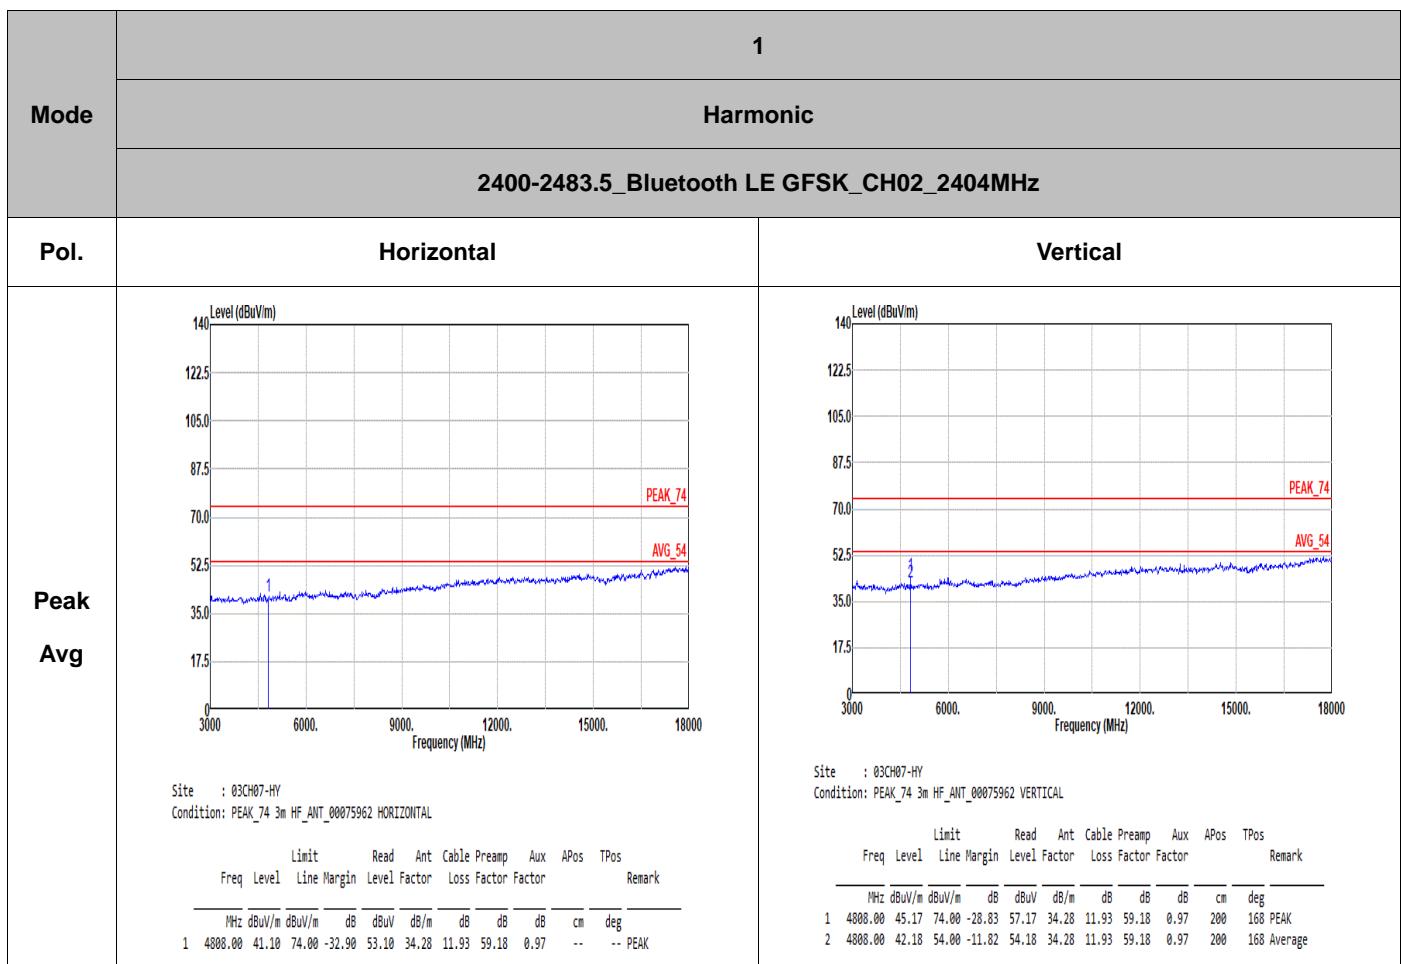

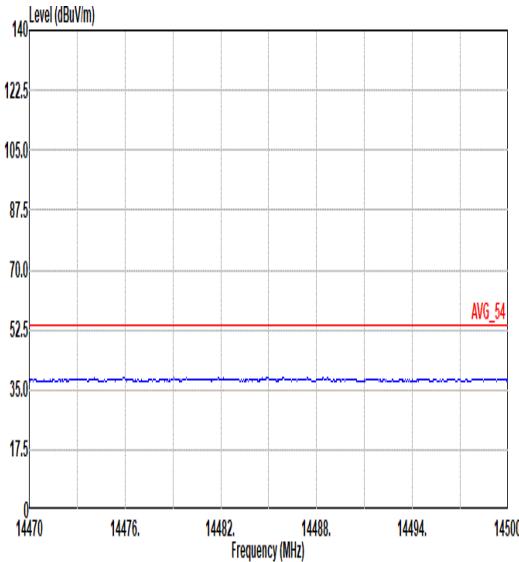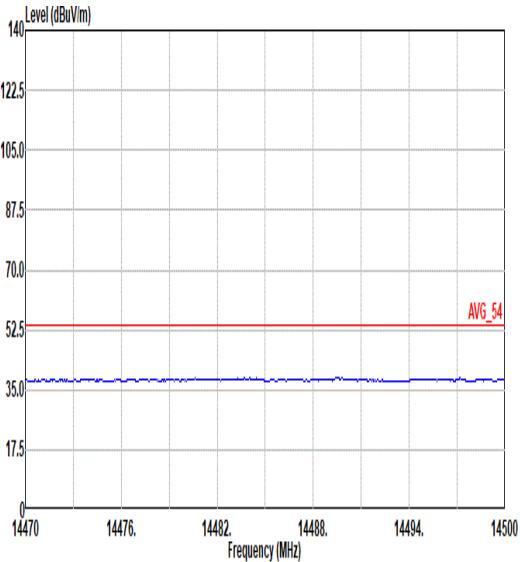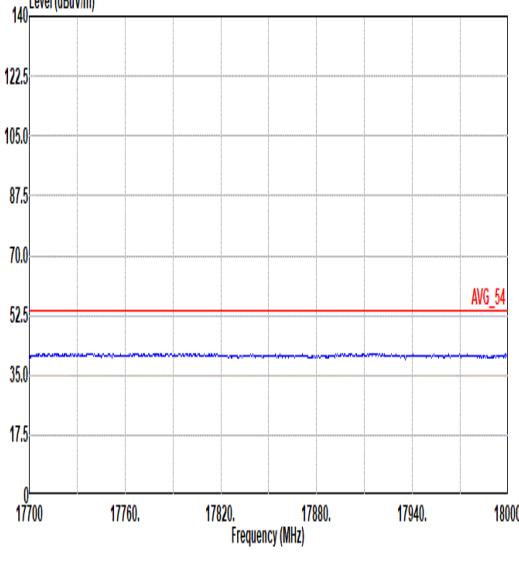
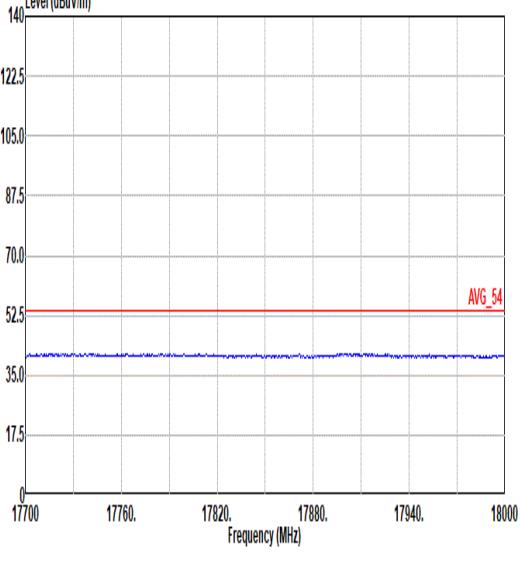


Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth LE GFSK_CH02_2404MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

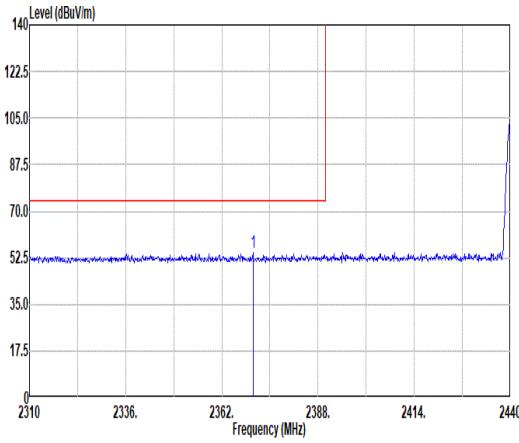
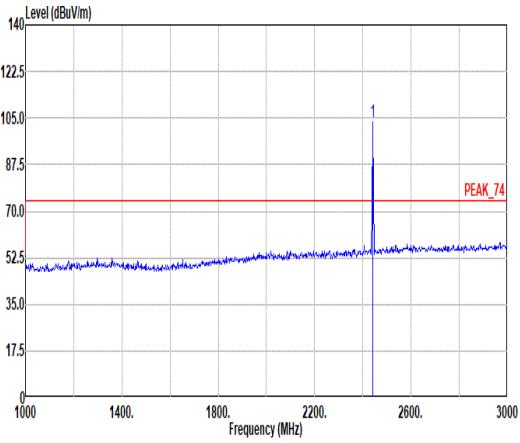
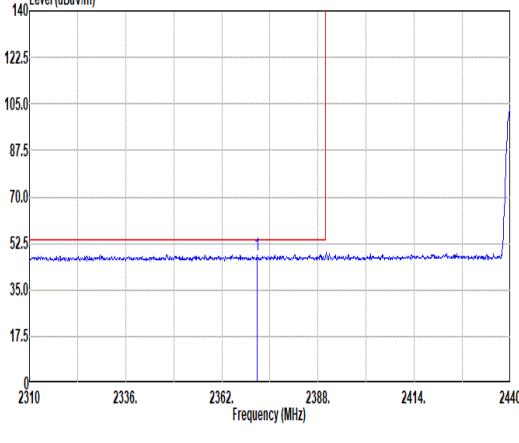
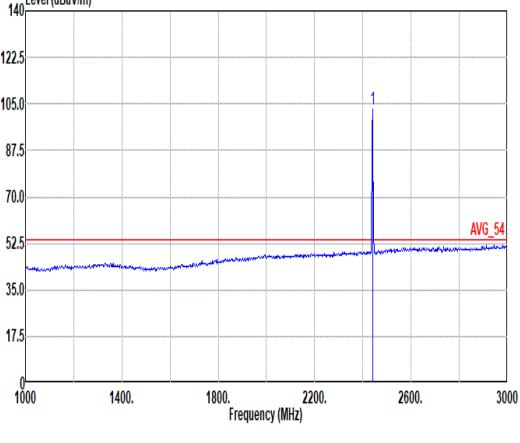


Mode	2																																																																									
	Band Edge - L																																																																									
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2370.45</td><td>54.51</td><td>74.00</td><td>-19.49</td><td>38.61</td><td>32.00</td><td>8.33</td><td>34.33</td><td>9.90 400 273 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2370.45	54.51	74.00	-19.49	38.61	32.00	8.33	34.33	9.90 400 273 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2440.00</td><td>103.47</td><td>-----</td><td>-----</td><td>87.20</td><td>32.20</td><td>8.45</td><td>34.30</td><td>9.92 400 273 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2440.00	103.47	-----	-----	87.20	32.20	8.45	34.30	9.92 400 273 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2370.45	54.51	74.00	-19.49	38.61	32.00	8.33	34.33	9.90 400 273 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2440.00	103.47	-----	-----	87.20	32.20	8.45	34.30	9.92 400 273 PEAK																																																																		
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2371.62</td><td>48.30</td><td>54.00</td><td>-5.70</td><td>32.38</td><td>32.02</td><td>8.33</td><td>34.33</td><td>9.90 400 273 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2371.62	48.30	54.00	-5.70	32.38	32.02	8.33	34.33	9.90 400 273 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2440.00</td><td>103.07</td><td>-----</td><td>-----</td><td>86.88</td><td>32.20</td><td>8.45</td><td>34.30</td><td>9.92 400 273 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2440.00	103.07	-----	-----	86.88	32.20	8.45	34.30	9.92 400 273 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2371.62	48.30	54.00	-5.70	32.38	32.02	8.33	34.33	9.90 400 273 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2440.00	103.07	-----	-----	86.88	32.20	8.45	34.30	9.92 400 273 AVERAGE																																																																		

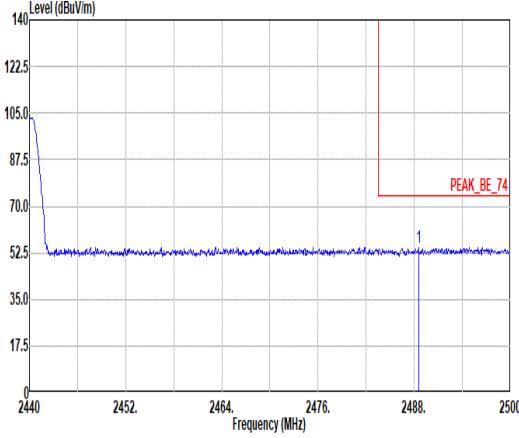
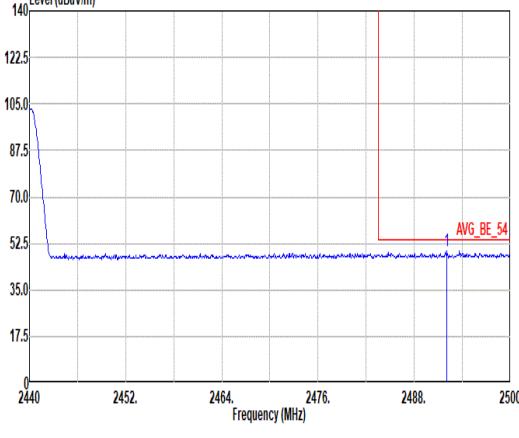



Mode	2																																																			
	Band Edge - R																																																			
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2488.54</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>37.85</td><td>32.49</td><td>8.53</td><td>34.28</td><td>9.94</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>273 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2488.54	54.53	74.00	-19.47	37.85	32.49	8.53	34.28	9.94										400										273 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																													
1	2488.54	54.53	74.00	-19.47	37.85	32.49	8.53	34.28	9.94																																											
									400																																											
									273 PEAK																																											
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2492.02</td><td>49.65</td><td>54.00</td><td>-4.35</td><td>32.93</td><td>32.52</td><td>8.53</td><td>34.27</td><td>9.94</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>273 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	2492.02	49.65	54.00	-4.35	32.93	32.52	8.53	34.27	9.94										400										273 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																													
1	2492.02	49.65	54.00	-4.35	32.93	32.52	8.53	34.27	9.94																																											
									400																																											
									273 AVERAGE																																											

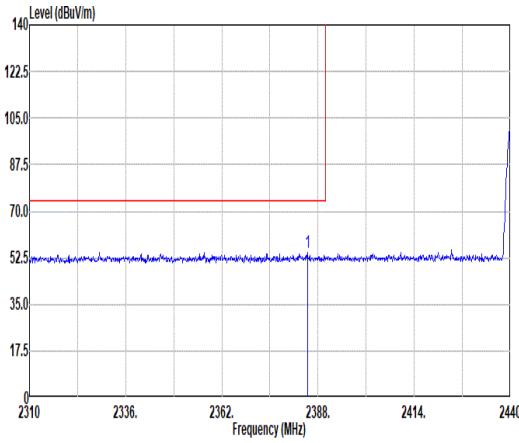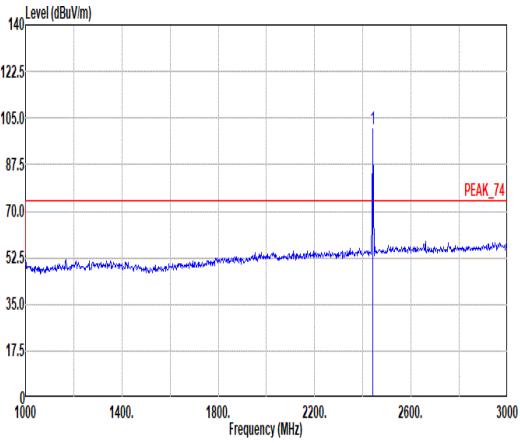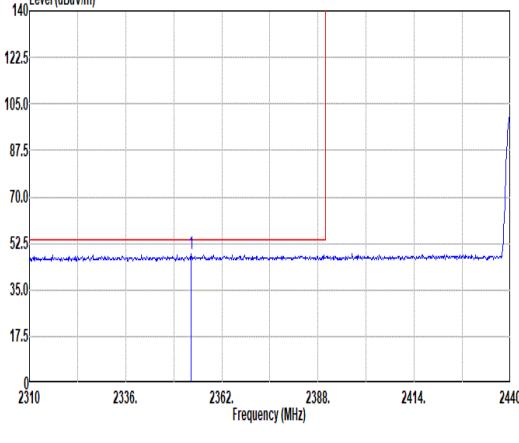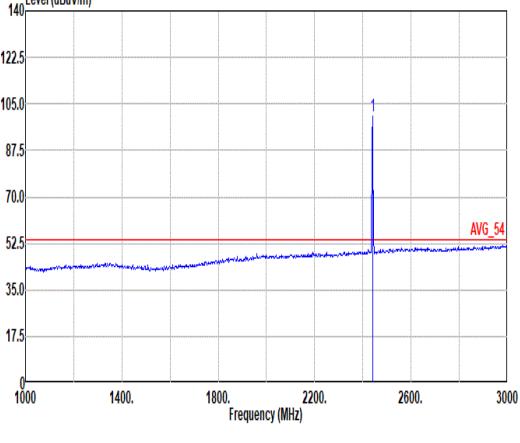





Mode	2																																																													
	Band Edge - L																																																													
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.14</td> <td>54.37</td> <td>74.00</td> <td>-19.63</td> <td>38.34</td> <td>32.10</td> <td>8.35</td> <td>34.32</td> <td>9.90 196 234 PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2385.14	54.37	74.00	-19.63	38.34	32.10	8.35	34.32	9.90 196 234 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>101.16</td> <td>-----</td> <td>-----</td> <td>84.89</td> <td>32.20</td> <td>8.45</td> <td>34.30</td> <td>9.92 196 234 PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2440.00	101.16	-----	-----	84.89	32.20	8.45	34.30	9.92 196 234 PEAK
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2385.14	54.37	74.00	-19.63	38.34	32.10	8.35	34.32	9.90 196 234 PEAK																																																					
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2440.00	101.16	-----	-----	84.89	32.20	8.45	34.30	9.92 196 234 PEAK																																																					
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2353.68</td> <td>48.47</td> <td>54.00</td> <td>-5.53</td> <td>32.61</td> <td>32.00</td> <td>8.29</td> <td>34.33</td> <td>9.90 196 234 AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2353.68	48.47	54.00	-5.53	32.61	32.00	8.29	34.33	9.90 196 234 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>100.48</td> <td>-----</td> <td>-----</td> <td>84.21</td> <td>32.20</td> <td>8.45</td> <td>34.30</td> <td>9.92 196 234 AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2440.00	100.48	-----	-----	84.21	32.20	8.45	34.30	9.92 196 234 AVERAGE
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2353.68	48.47	54.00	-5.53	32.61	32.00	8.29	34.33	9.90 196 234 AVERAGE																																																					
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																									
1	2440.00	100.48	-----	-----	84.21	32.20	8.45	34.30	9.92 196 234 AVERAGE																																																					

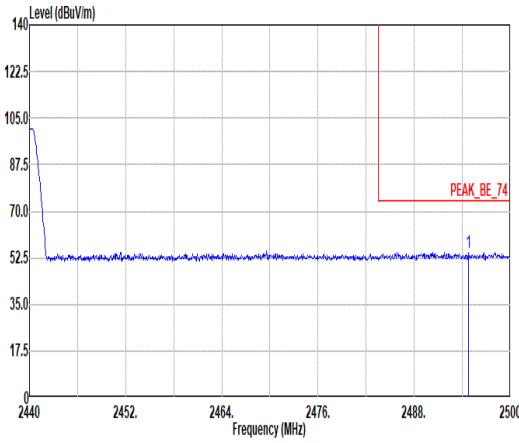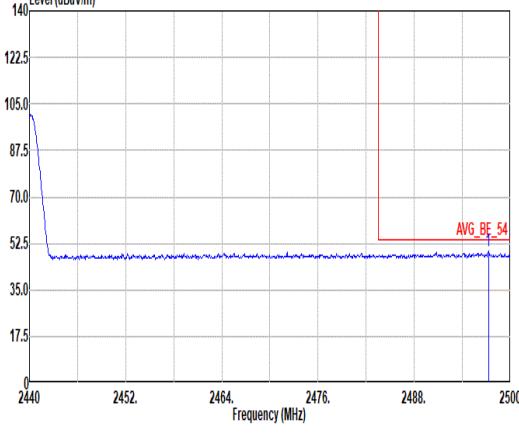





Mode	2																															
	Band Edge - R																															
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																															
Pol.	Vertical	Fundamental																														
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2494.78</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>37.90</td><td>32.55</td><td>8.54</td><td>34.27</td><td>9.94 196 234 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2494.78	54.66	74.00	-19.34	37.90	32.55	8.54	34.27	9.94 196 234 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																											
1	2494.78	54.66	74.00	-19.34	37.90	32.55	8.54	34.27	9.94 196 234 PEAK																							
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2497.24</td><td>49.40</td><td>54.00</td><td>-4.60</td><td>32.62</td><td>32.57</td><td>8.54</td><td>34.27</td><td>9.94 196 234 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2497.24	49.40	54.00	-4.60	32.62	32.57	8.54	34.27	9.94 196 234 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																											
1	2497.24	49.40	54.00	-4.60	32.62	32.57	8.54	34.27	9.94 196 234 AVERAGE																							

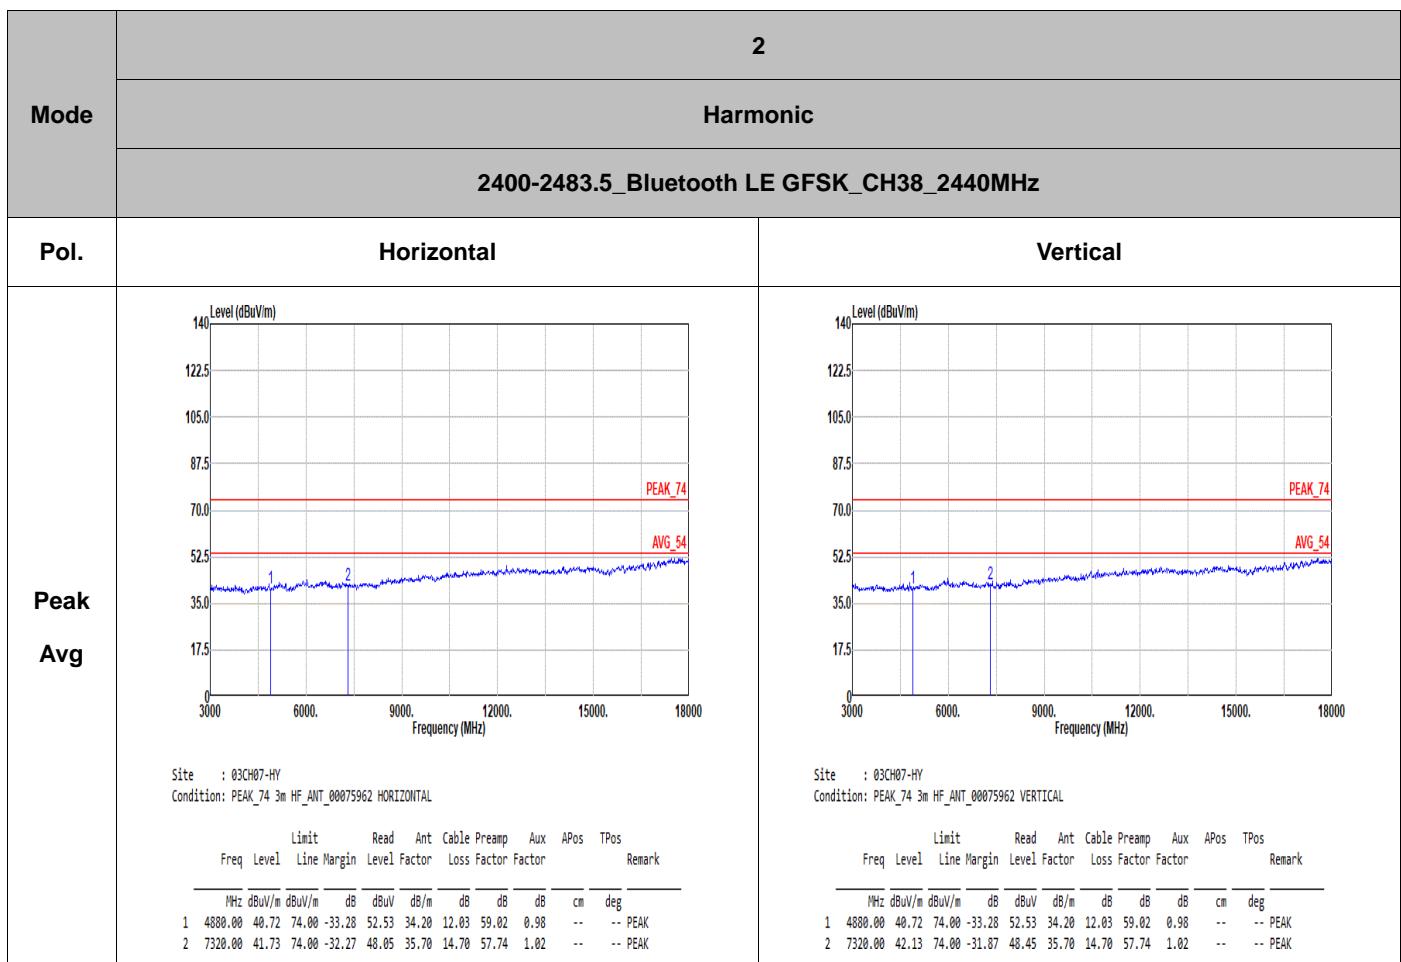

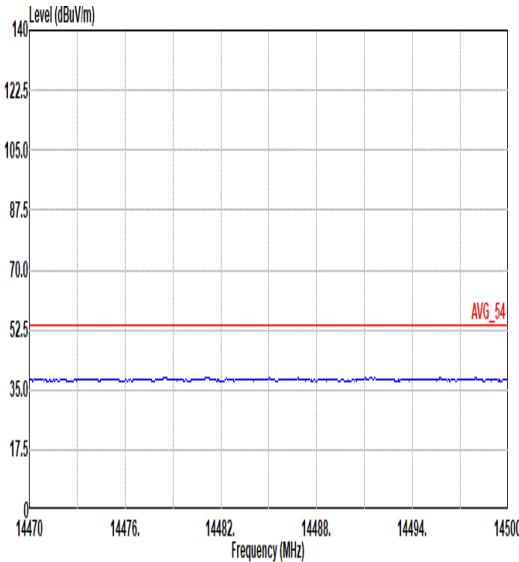
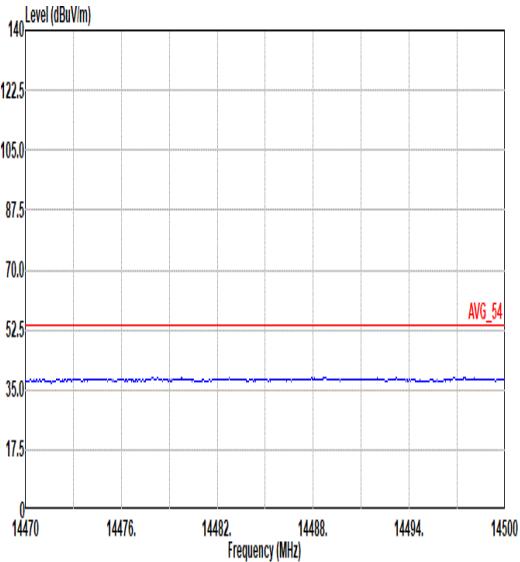
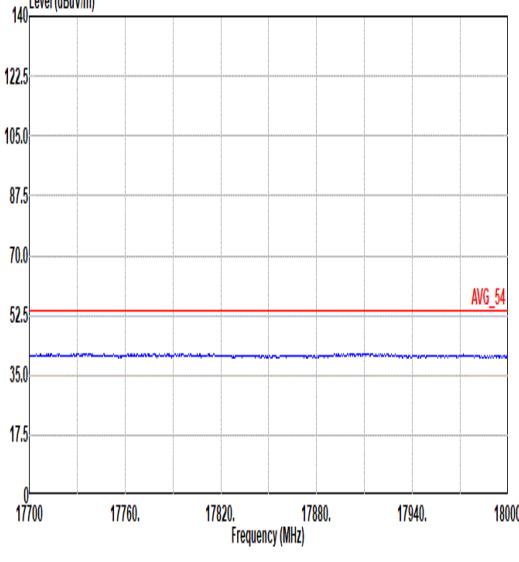
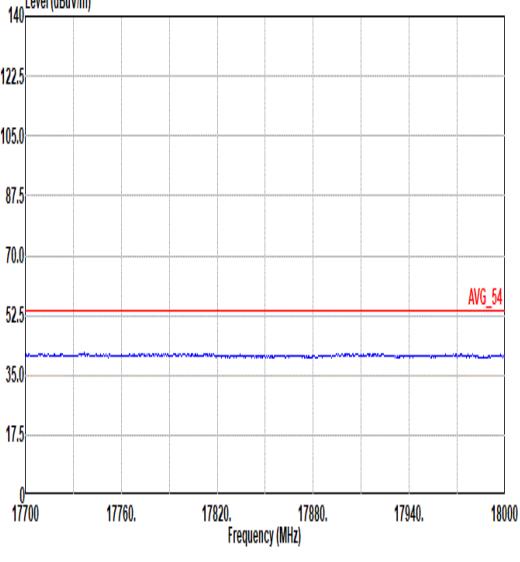


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

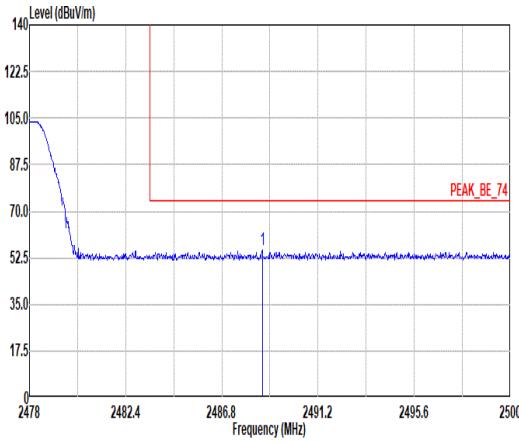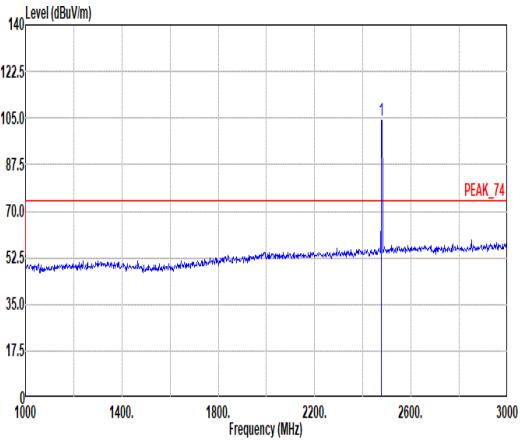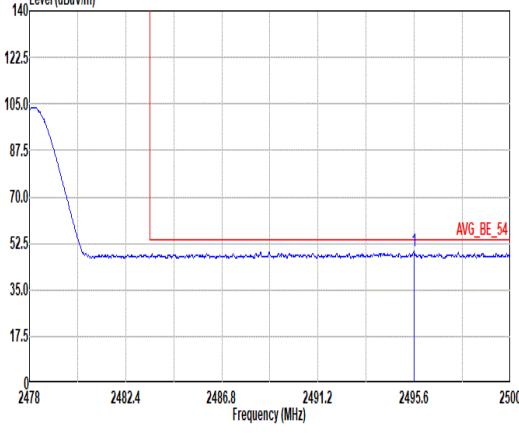
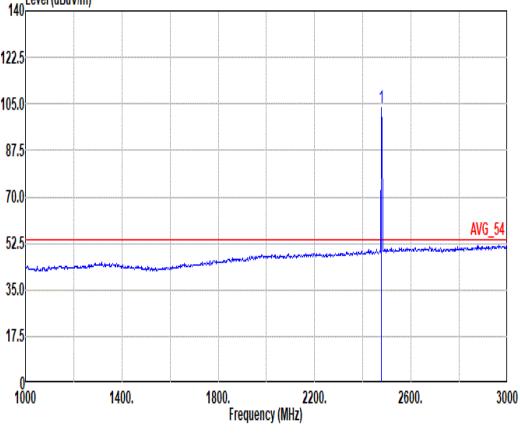


Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth LE GFSK_CH76_2478MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th> </tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td> </tr> <tr> <td>1 2488.65</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>38.55</td><td>32.49</td><td>8.53</td><td>34.27</td><td>9.94 269 160 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2488.65	55.24	74.00	-18.76	38.55	32.49	8.53	34.27	9.94 269 160 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th> </tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td> </tr> <tr> <td>1 2478.00</td><td>103.92</td><td>-----</td><td>-----</td><td>87.36</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 269 160 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	103.92	-----	-----	87.36	32.40	8.51	34.28	9.93 269 160 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2488.65	55.24	74.00	-18.76	38.55	32.49	8.53	34.27	9.94 269 160 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	103.92	-----	-----	87.36	32.40	8.51	34.28	9.93 269 160 PEAK																																																																		
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th> </tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td> </tr> <tr> <td>1 2495.58</td><td>49.63</td><td>54.00</td><td>-4.37</td><td>32.86</td><td>32.56</td><td>8.54</td><td>34.27</td><td>9.94 269 160 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2495.58	49.63	54.00	-4.37	32.86	32.56	8.54	34.27	9.94 269 160 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th> </tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td> </tr> <tr> <td>1 2478.00</td><td>103.54</td><td>-----</td><td>-----</td><td>86.98</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 269 160 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	103.54	-----	-----	86.98	32.40	8.51	34.28	9.93 269 160 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2495.58	49.63	54.00	-4.37	32.86	32.56	8.54	34.27	9.94 269 160 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	103.54	-----	-----	86.98	32.40	8.51	34.28	9.93 269 160 AVERAGE																																																																		

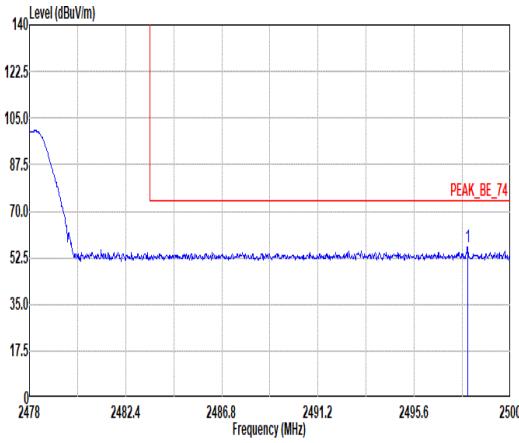
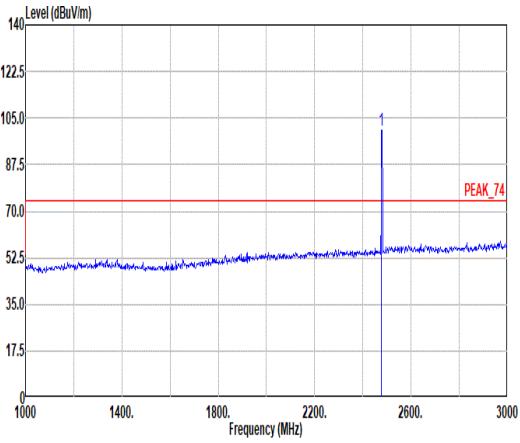
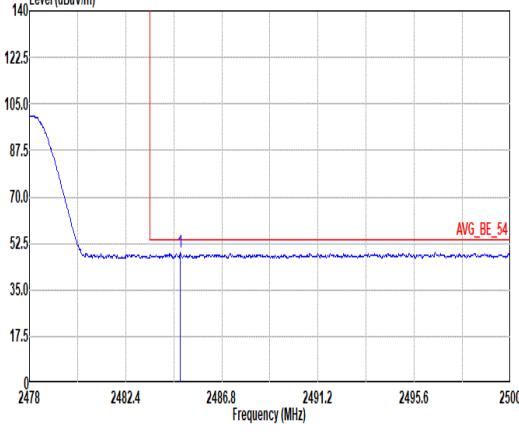
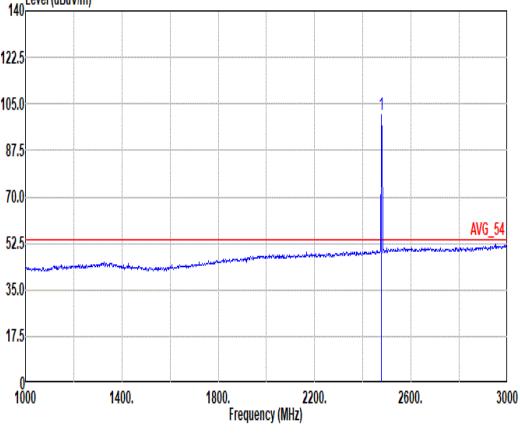


Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth LE GFSK_CH76_2478MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2498.04</td><td>56.44</td><td>74.00</td><td>-17.56</td><td>39.65</td><td>32.58</td><td>8.54</td><td>34.27</td><td>9.94 346 187 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2498.04	56.44	74.00	-17.56	39.65	32.58	8.54	34.27	9.94 346 187 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2478.00</td><td>100.45</td><td>-----</td><td>-----</td><td>83.89</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 346 187 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	100.45	-----	-----	83.89	32.40	8.51	34.28	9.93 346 187 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2498.04	56.44	74.00	-17.56	39.65	32.58	8.54	34.27	9.94 346 187 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	100.45	-----	-----	83.89	32.40	8.51	34.28	9.93 346 187 PEAK																																																																		
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2484.89</td><td>49.05</td><td>54.00</td><td>-4.95</td><td>32.43</td><td>32.45</td><td>8.52</td><td>34.28</td><td>9.93 346 187 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2484.89	49.05	54.00	-4.95	32.43	32.45	8.52	34.28	9.93 346 187 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:24.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2478.00</td><td>100.97</td><td>-----</td><td>-----</td><td>84.41</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 346 187 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	100.97	-----	-----	84.41	32.40	8.51	34.28	9.93 346 187 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2484.89	49.05	54.00	-4.95	32.43	32.45	8.52	34.28	9.93 346 187 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	100.97	-----	-----	84.41	32.40	8.51	34.28	9.93 346 187 AVERAGE																																																																		



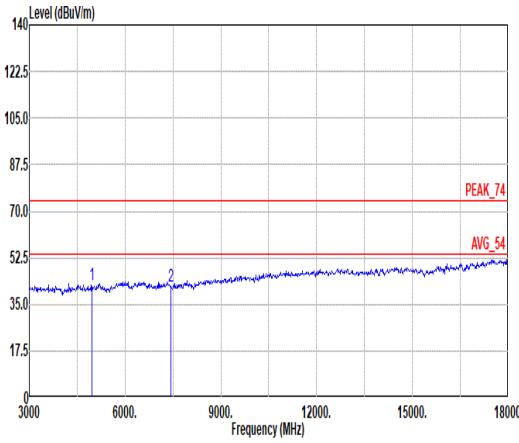
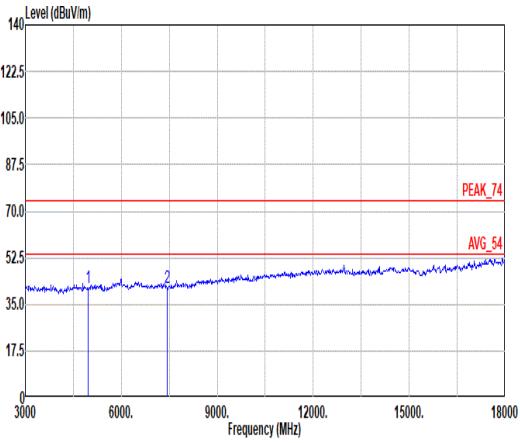


Mode	3																																																																																
	Harmonic																																																																																
	2400-2483.5_Bluetooth LE GFSK_CH76_2478MHz																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak																																																																																	
	<p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>42.25</td><td>74.00</td><td>-31.75</td><td>53.67</td><td>34.31</td><td>12.13</td><td>58.85</td><td>0.99</td></tr><tr><td>2</td><td>7434.00</td><td>41.76</td><td>74.00</td><td>-32.24</td><td>48.04</td><td>35.70</td><td>14.87</td><td>57.88</td><td>1.03</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4956.00	42.25	74.00	-31.75	53.67	34.31	12.13	58.85	0.99	2	7434.00	41.76	74.00	-32.24	48.04	35.70	14.87	57.88	1.03	<p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>41.02</td><td>74.00</td><td>-32.98</td><td>52.44</td><td>34.31</td><td>12.13</td><td>58.85</td><td>0.99</td></tr><tr><td>2</td><td>7434.00</td><td>41.38</td><td>74.00</td><td>-32.62</td><td>47.66</td><td>35.70</td><td>14.87</td><td>57.88</td><td>1.03</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4956.00	41.02	74.00	-32.98	52.44	34.31	12.13	58.85	0.99	2	7434.00	41.38	74.00	-32.62	47.66	35.70	14.87	57.88
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4956.00	42.25	74.00	-31.75	53.67	34.31	12.13	58.85	0.99																																																																								
2	7434.00	41.76	74.00	-32.24	48.04	35.70	14.87	57.88	1.03																																																																								
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4956.00	41.02	74.00	-32.98	52.44	34.31	12.13	58.85	0.99																																																																								
2	7434.00	41.38	74.00	-32.62	47.66	35.70	14.87	57.88	1.03																																																																								

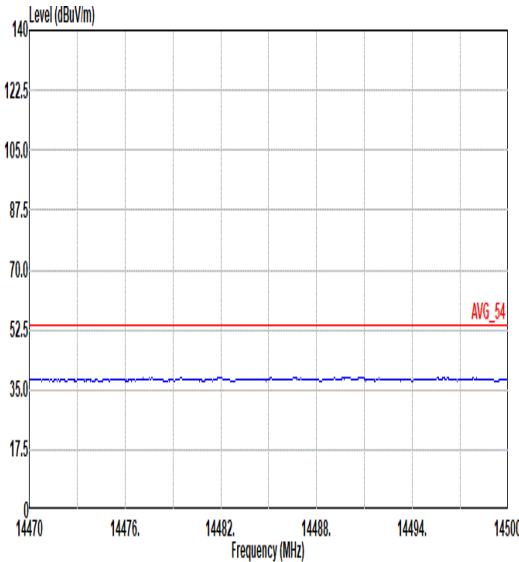
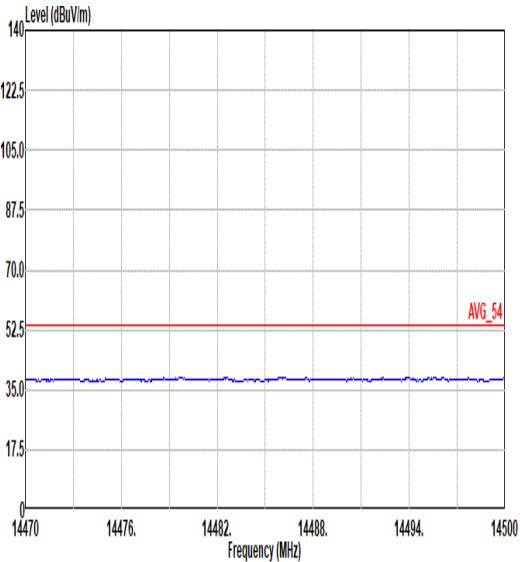
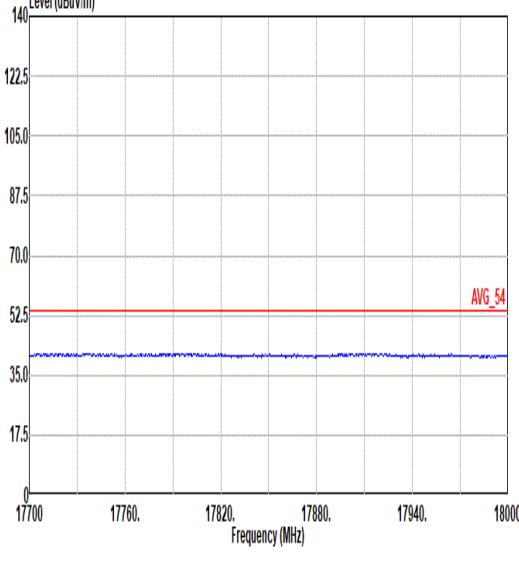
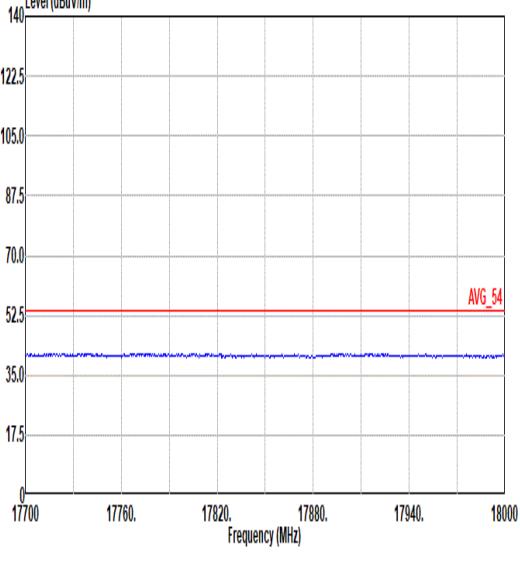


Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth LE GFSK_CH76_2478MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL</p>
17.7G ~18G Avg	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL</p>

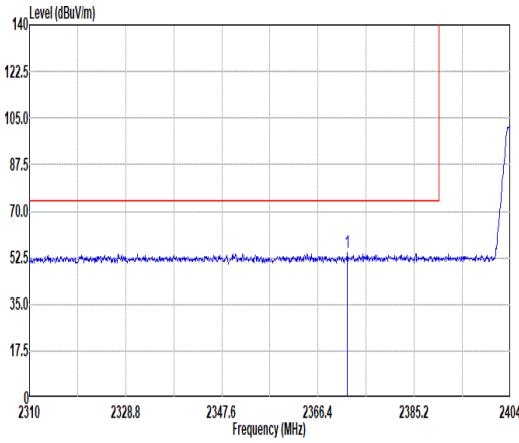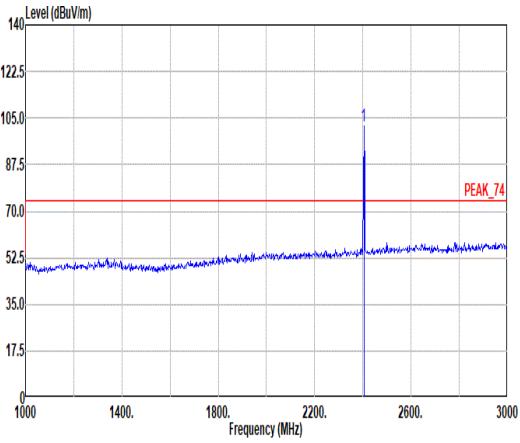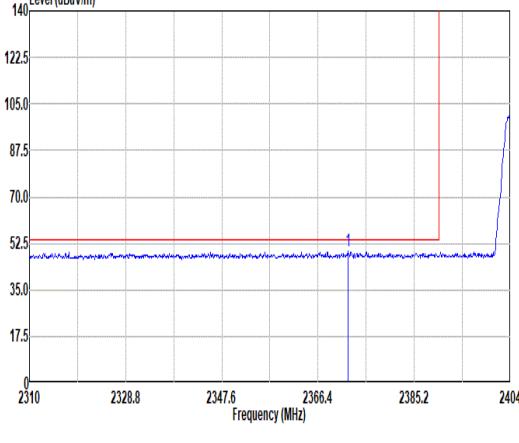
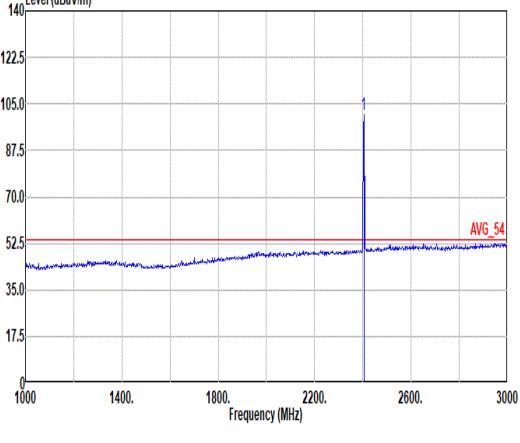


Mode	4																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Bluetooth LE GFSK_CH02_2404MHz																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBm</td> <td>dBm</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>2372.13</td> <td>54.67</td> <td>74.00</td> <td>-19.33</td> <td>38.75</td> <td>32.02</td> <td>8.33</td> <td>34.33</td> <td>9.90</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117</td> <td></td> <td>259</td> <td>PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dB	dB	cm	deg			1	2372.13	54.67	74.00	-19.33	38.75	32.02	8.33	34.33	9.90							117		259	PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBm</td> <td>dBm</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>2404.00</td> <td>101.95</td> <td>-----</td> <td>-----</td> <td>85.87</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117</td> <td></td> <td>259</td> <td>PEAK</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dB	dB	cm	deg			1	2404.00	101.95	-----	-----	85.87	32.10	8.39	34.31	9.90							117		259	PEAK
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBm	dBm	dB	dB	dB	cm	deg																																																																																															
1	2372.13	54.67	74.00	-19.33	38.75	32.02	8.33	34.33	9.90																																																																																													
						117		259	PEAK																																																																																													
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBm	dBm	dB	dB	dB	cm	deg																																																																																															
1	2404.00	101.95	-----	-----	85.87	32.10	8.39	34.31	9.90																																																																																													
						117		259	PEAK																																																																																													
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBm</td> <td>dBm</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>2372.23</td> <td>49.45</td> <td>54.00</td> <td>-4.55</td> <td>33.53</td> <td>32.02</td> <td>8.33</td> <td>34.33</td> <td>9.90</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117</td> <td></td> <td>259</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dB	dB	cm	deg			1	2372.23	49.45	54.00	-4.55	33.53	32.02	8.33	34.33	9.90							117		259	AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBm</td> <td>dBm</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>2404.00</td> <td>100.85</td> <td>-----</td> <td>-----</td> <td>84.77</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>117</td> <td></td> <td>259</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dB	dB	cm	deg			1	2404.00	100.85	-----	-----	84.77	32.10	8.39	34.31	9.90							117		259	AVERAGE
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBm	dBm	dB	dB	dB	cm	deg																																																																																															
1	2372.23	49.45	54.00	-4.55	33.53	32.02	8.33	34.33	9.90																																																																																													
						117		259	AVERAGE																																																																																													
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBm	dBm	dB	dB	dB	cm	deg																																																																																															
1	2404.00	100.85	-----	-----	84.77	32.10	8.39	34.31	9.90																																																																																													
						117		259	AVERAGE																																																																																													

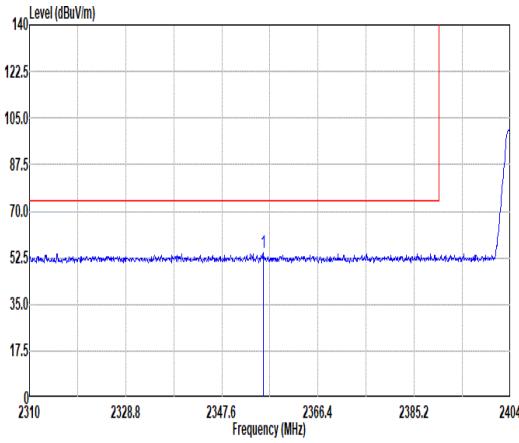
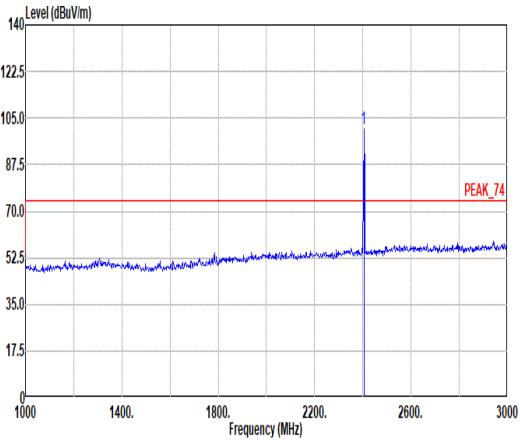
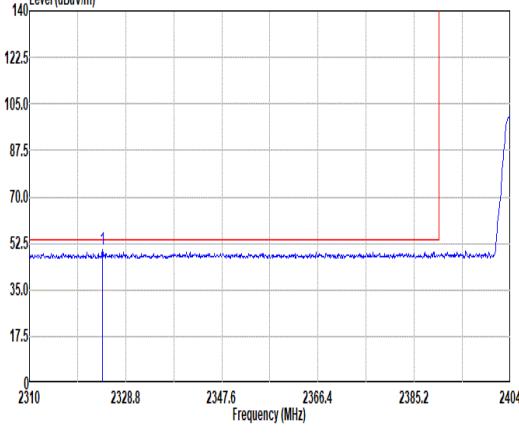
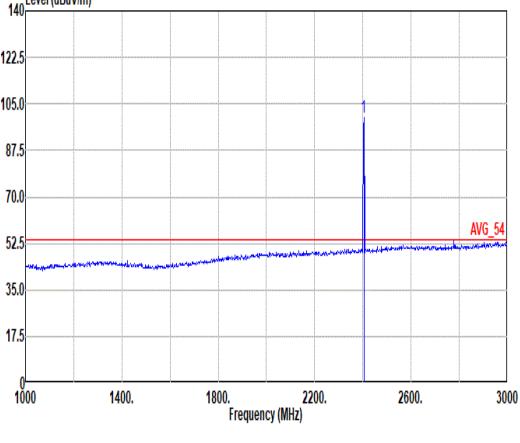


Mode	4																																																																																																																																																																					
	Band Edge																																																																																																																																																																					
	2400-2483.5_Bluetooth LE GFSK_CH02_2404MHz																																																																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																																																																				
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="10">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APOS</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2355.68</td> <td>54.33</td> <td>74.00</td> <td>-19.67</td> <td>38.46</td> <td>32.00</td> <td>8.30</td> <td>34.33</td> <td>9.90</td> <td>202</td> <td>235</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td>1</td> <td>2404.00</td> <td>100.87</td> <td>-----</td> <td>-----</td> <td>84.79</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> <td>202</td> <td>235</td> <td>PEAK</td> </tr> </tbody> </table>	Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg	1	2355.68	54.33	74.00	-19.67	38.46	32.00	8.30	34.33	9.90	202	235	PEAK					1	2404.00	100.87	-----	-----	84.79	32.10	8.39	34.31	9.90	202	235	PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="10">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APOS</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>100.87</td> <td>-----</td> <td>-----</td> <td>84.79</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> <td>202</td> <td>235</td> <td>PEAK</td> <td></td> <td></td> <td></td> <td></td> <td>1</td> <td>2404.00</td> <td>100.87</td> <td>-----</td> <td>-----</td> <td>83.99</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> <td>202</td> <td>235</td> <td>PEAK</td> </tr> </tbody> </table>	Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg	1	2404.00	100.87	-----	-----	84.79	32.10	8.39	34.31	9.90	202	235	PEAK					1	2404.00	100.87	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	PEAK
Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg																																																																																																																																													
1	2355.68	54.33	74.00	-19.67	38.46	32.00	8.30	34.33	9.90	202	235	PEAK					1	2404.00	100.87	-----	-----	84.79	32.10	8.39	34.31	9.90	202	235	PEAK																																																																																																																																									
Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg																																																																																																																																													
1	2404.00	100.87	-----	-----	84.79	32.10	8.39	34.31	9.90	202	235	PEAK					1	2404.00	100.87	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	PEAK																																																																																																																																									
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="10">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APOS</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2324.29</td> <td>50.03</td> <td>54.00</td> <td>-3.97</td> <td>34.38</td> <td>31.94</td> <td>8.24</td> <td>34.35</td> <td>9.90</td> <td>202</td> <td>235</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td>1</td> <td>2404.00</td> <td>100.07</td> <td>-----</td> <td>-----</td> <td>83.99</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> <td>202</td> <td>235</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg	1	2324.29	50.03	54.00	-3.97	34.38	31.94	8.24	34.35	9.90	202	235	AVERAGE					1	2404.00	100.07	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th colspan="10">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">Aux</th> <th colspan="2">APOS</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>100.07</td> <td>-----</td> <td>-----</td> <td>83.99</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> <td>202</td> <td>235</td> <td>AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td>1</td> <td>2404.00</td> <td>100.07</td> <td>-----</td> <td>-----</td> <td>83.99</td> <td>32.10</td> <td>8.39</td> <td>34.31</td> <td>9.90</td> <td>202</td> <td>235</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg	1	2404.00	100.07	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	AVERAGE					1	2404.00	100.07	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	AVERAGE
Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg																																																																																																																																													
1	2324.29	50.03	54.00	-3.97	34.38	31.94	8.24	34.35	9.90	202	235	AVERAGE					1	2404.00	100.07	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	AVERAGE																																																																																																																																									
Limit										Read		Ant		Cable		Preamp		Aux		APOS		TPos		Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	dB	dBuV	dBuV	m	dB	dB	cm	deg	dB	dBuV	dBuV	m	dB	dB	cm	deg																																																																																																																																													
1	2404.00	100.07	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	AVERAGE					1	2404.00	100.07	-----	-----	83.99	32.10	8.39	34.31	9.90	202	235	AVERAGE																																																																																																																																									



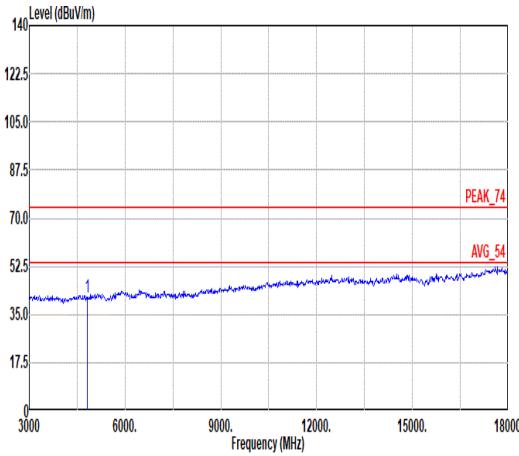
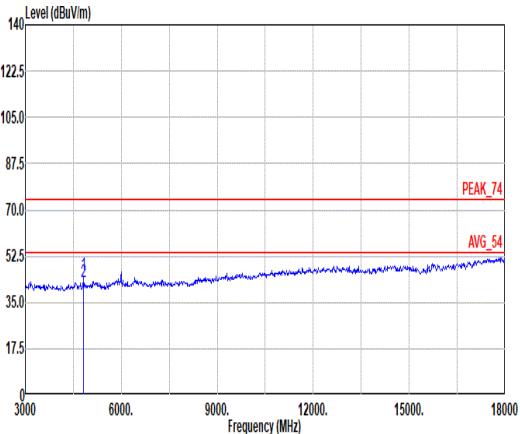


Mode	4																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth LE GFSK_CH02_2404MHz																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak																																																																																																																
Avg	<p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4808.00</td><td>41.12</td><td>74.00</td><td>-32.88</td><td>53.12</td><td>34.28</td><td>11.93</td><td>59.18</td><td>0.97</td></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>deg</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	1	4808.00	41.12	74.00	-32.88	53.12	34.28	11.93	59.18	0.97		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm										deg	<p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>4808.00</td><td>45.29</td><td>74.00</td><td>-28.71</td><td>57.29</td><td>34.28</td><td>11.93</td><td>59.18</td><td>0.97</td></tr><tr><td>2</td><td>4808.00</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>54.61</td><td>34.28</td><td>11.93</td><td>59.18</td><td>0.97</td></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark	1	4808.00	45.29	74.00	-28.71	57.29	34.28	11.93	59.18	0.97	2	4808.00	42.61	54.00	-11.39	54.61	34.28	11.93	59.18	0.97		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																																							
1	4808.00	41.12	74.00	-32.88	53.12	34.28	11.93	59.18	0.97																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																							
									deg																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																																																																																							
1	4808.00	45.29	74.00	-28.71	57.29	34.28	11.93	59.18	0.97																																																																																																							
2	4808.00	42.61	54.00	-11.39	54.61	34.28	11.93	59.18	0.97																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																							

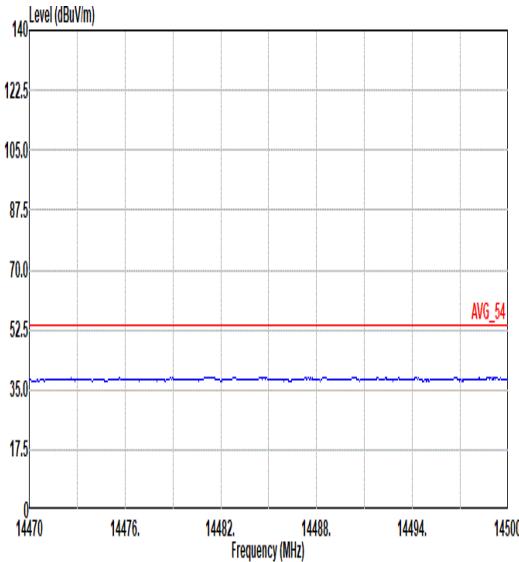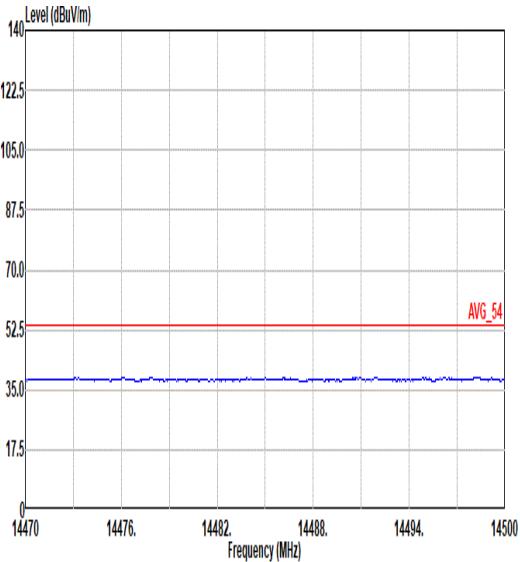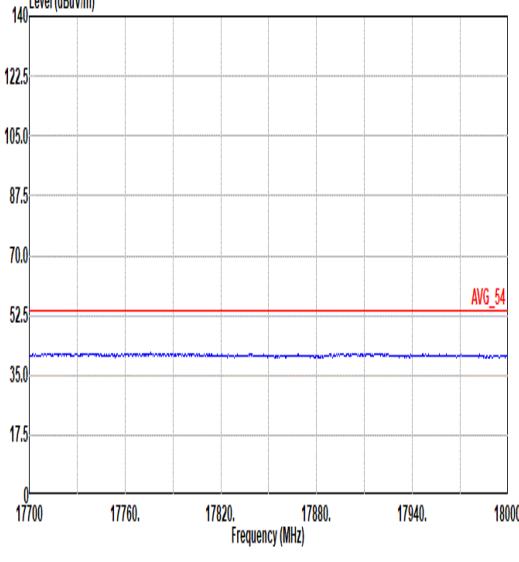
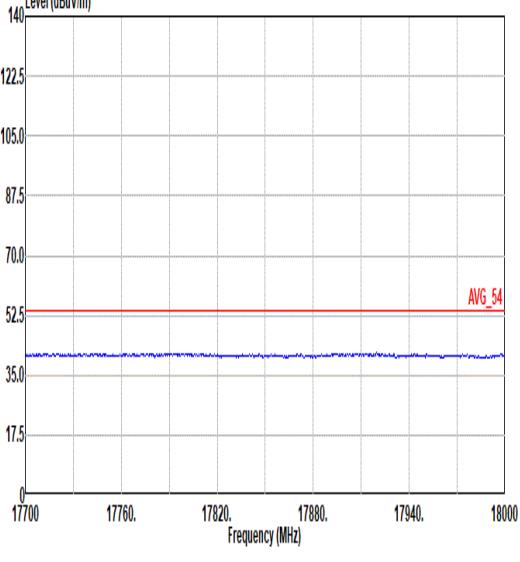


Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth LE GFSK_CH02_2404MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

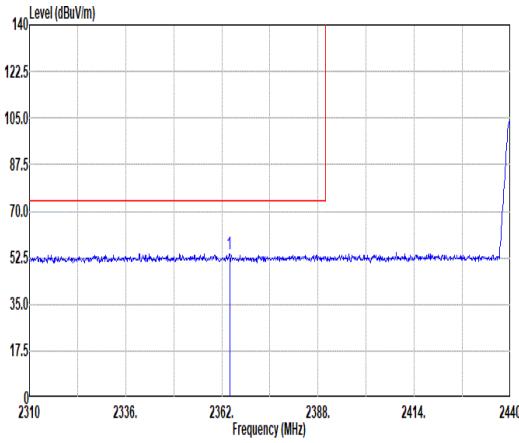
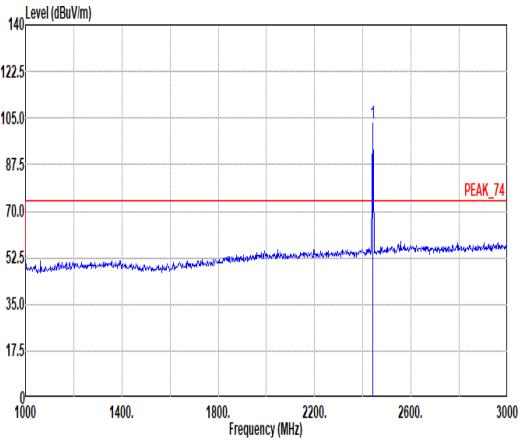
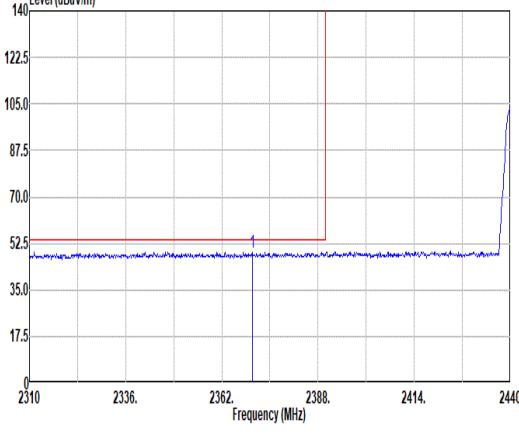
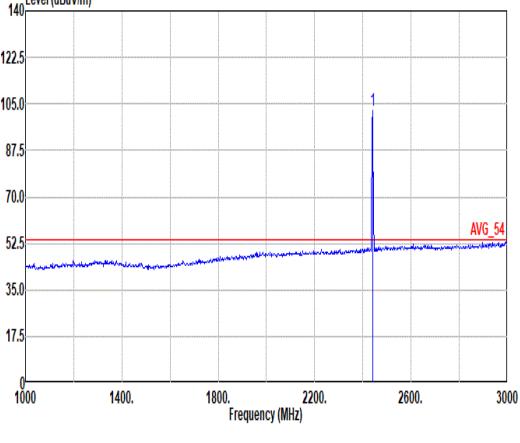


Mode	5																																																																									
	Band Edge - L																																																																									
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2364.08</td><td>54.02</td><td>74.00</td><td>-19.98</td><td>38.14</td><td>32.00</td><td>8.31</td><td>34.33</td><td>9.90 247 182 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2364.08	54.02	74.00	-19.98	38.14	32.00	8.31	34.33	9.90 247 182 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2440.00</td><td>102.88</td><td>-----</td><td>-----</td><td>86.61</td><td>32.20</td><td>8.45</td><td>34.30</td><td>9.92 247 182 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2440.00	102.88	-----	-----	86.61	32.20	8.45	34.30	9.92 247 182 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2364.08	54.02	74.00	-19.98	38.14	32.00	8.31	34.33	9.90 247 182 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2440.00	102.88	-----	-----	86.61	32.20	8.45	34.30	9.92 247 182 PEAK																																																																		
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2370.19</td><td>49.31</td><td>54.00</td><td>-4.69</td><td>33.42</td><td>32.00</td><td>8.32</td><td>34.33</td><td>9.90 247 182 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2370.19	49.31	54.00	-4.69	33.42	32.00	8.32	34.33	9.90 247 182 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2440.00</td><td>102.43</td><td>-----</td><td>-----</td><td>86.16</td><td>32.20</td><td>8.45</td><td>34.30</td><td>9.92 247 182 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2440.00	102.43	-----	-----	86.16	32.20	8.45	34.30	9.92 247 182 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2370.19	49.31	54.00	-4.69	33.42	32.00	8.32	34.33	9.90 247 182 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2440.00	102.43	-----	-----	86.16	32.20	8.45	34.30	9.92 247 182 AVERAGE																																																																		

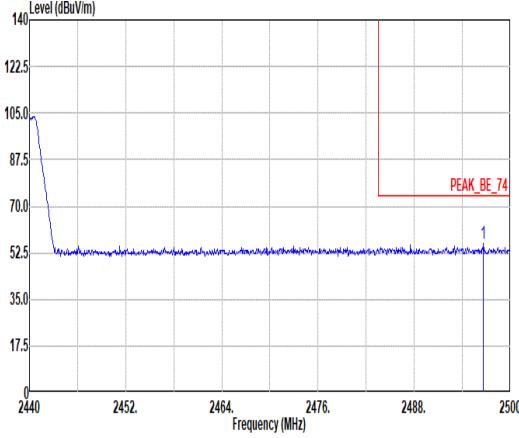
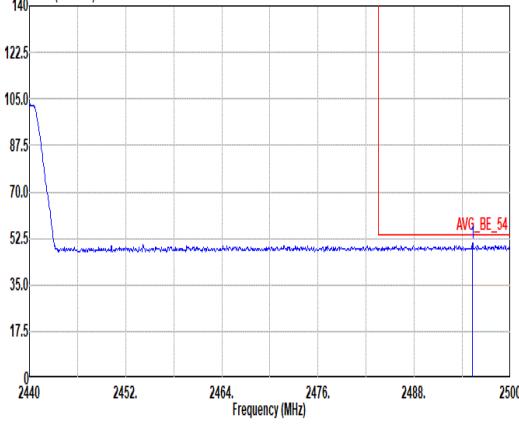


Mode	5																																																			
	Band Edge - R																																																			
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2496.64</td><td>55.78</td><td>74.00</td><td>-18.22</td><td>39.00</td><td>32.57</td><td>8.54</td><td>34.27</td><td>9.94</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>247 182 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.64	55.78	74.00	-18.22	39.00	32.57	8.54	34.27	9.94										247 182 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2496.64	55.78	74.00	-18.22	39.00	32.57	8.54	34.27	9.94																																											
									247 182 PEAK																																											
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2495.26</td><td>50.48</td><td>54.00</td><td>-3.52</td><td>33.72</td><td>32.55</td><td>8.54</td><td>34.27</td><td>9.94</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>247 182 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.26	50.48	54.00	-3.52	33.72	32.55	8.54	34.27	9.94										247 182 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2495.26	50.48	54.00	-3.52	33.72	32.55	8.54	34.27	9.94																																											
									247 182 AVERAGE																																											

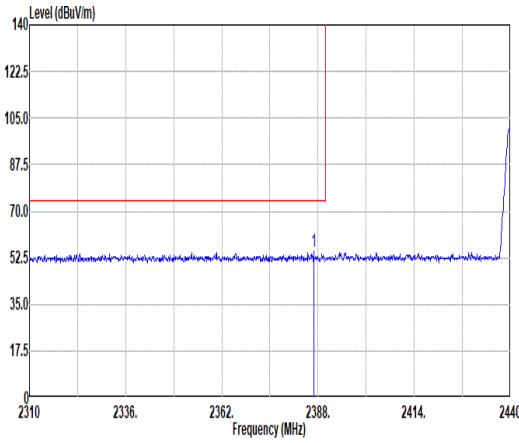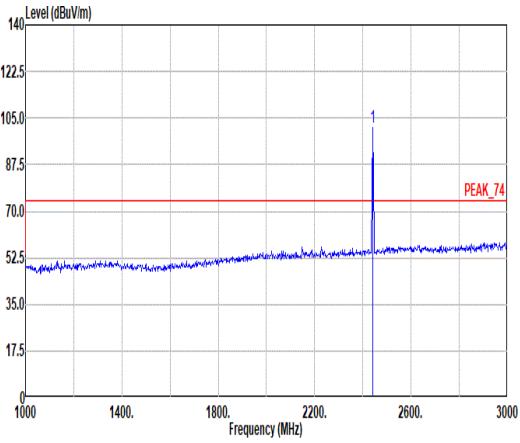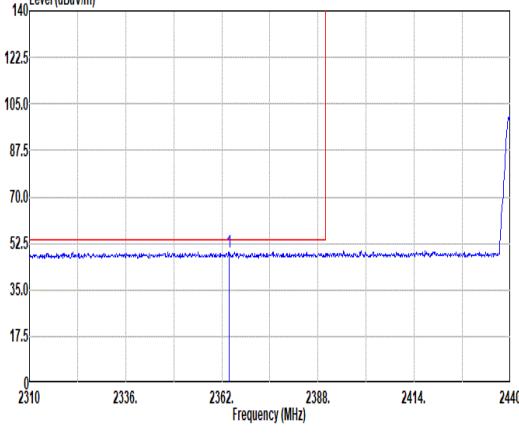
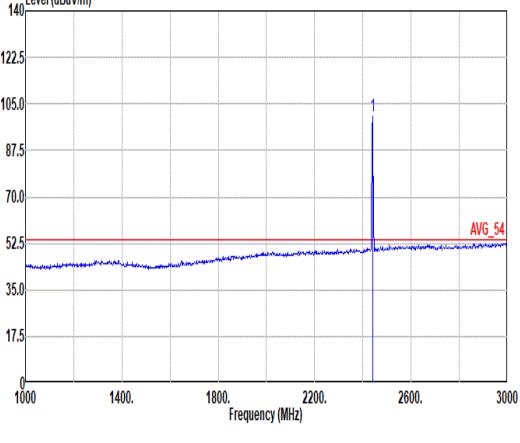


Mode	5																																																																									
	Band Edge - L																																																																									
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2386.83</td><td>55.01</td><td>74.00</td><td>-18.99</td><td>38.97</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90 197 234 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2386.83	55.01	74.00	-18.99	38.97	32.10	8.36	34.32	9.90 197 234 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2440.00</td><td>101.54</td><td>-----</td><td>-----</td><td>85.27</td><td>32.20</td><td>8.45</td><td>34.30</td><td>9.92 197 234 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2440.00	101.54	-----	-----	85.27	32.20	8.45	34.30	9.92 197 234 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2386.83	55.01	74.00	-18.99	38.97	32.10	8.36	34.32	9.90 197 234 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2440.00	101.54	-----	-----	85.27	32.20	8.45	34.30	9.92 197 234 PEAK																																																																		
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2363.95</td><td>49.32</td><td>54.00</td><td>-4.68</td><td>33.44</td><td>32.00</td><td>8.31</td><td>34.33</td><td>9.90 197 234 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2363.95	49.32	54.00	-4.68	33.44	32.00	8.31	34.33	9.90 197 234 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2440.00</td><td>100.56</td><td>-----</td><td>-----</td><td>84.29</td><td>32.20</td><td>8.45</td><td>34.30</td><td>9.92 197 234 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2440.00	100.56	-----	-----	84.29	32.20	8.45	34.30	9.92 197 234 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2363.95	49.32	54.00	-4.68	33.44	32.00	8.31	34.33	9.90 197 234 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2440.00	100.56	-----	-----	84.29	32.20	8.45	34.30	9.92 197 234 AVERAGE																																																																		



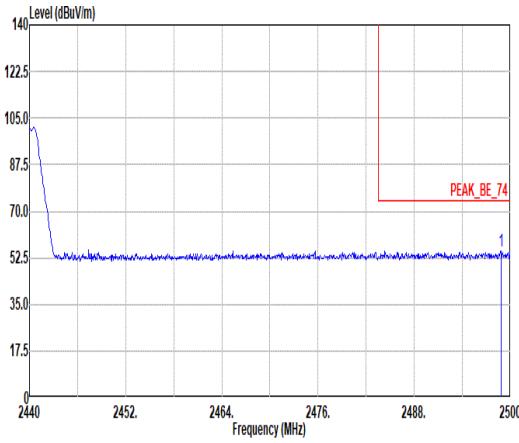
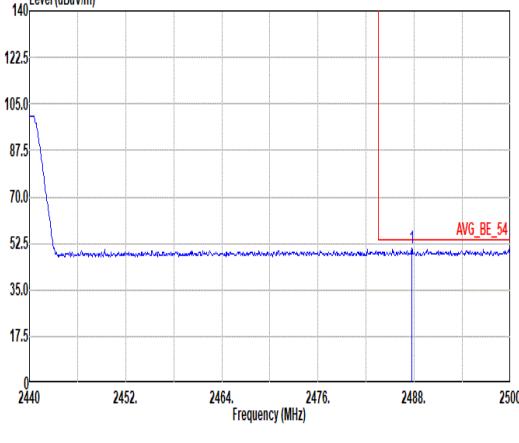


Mode	5																																																			
	Band Edge - R																																																			
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2498.80</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>38.22</td><td>32.59</td><td>8.54</td><td>34.27</td><td>9.94</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>197 234 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.80	55.02	74.00	-18.98	38.22	32.59	8.54	34.27	9.94										197 234 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2498.80	55.02	74.00	-18.98	38.22	32.59	8.54	34.27	9.94																																											
									197 234 PEAK																																											
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.70</td><td>50.53</td><td>54.00</td><td>-3.47</td><td>33.87</td><td>32.48</td><td>8.52</td><td>34.28</td><td>9.94</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>197 234 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.70	50.53	54.00	-3.47	33.87	32.48	8.52	34.28	9.94										197 234 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2487.70	50.53	54.00	-3.47	33.87	32.48	8.52	34.28	9.94																																											
									197 234 AVERAGE																																											



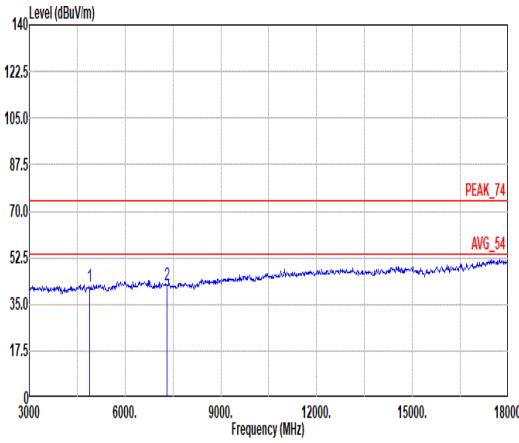
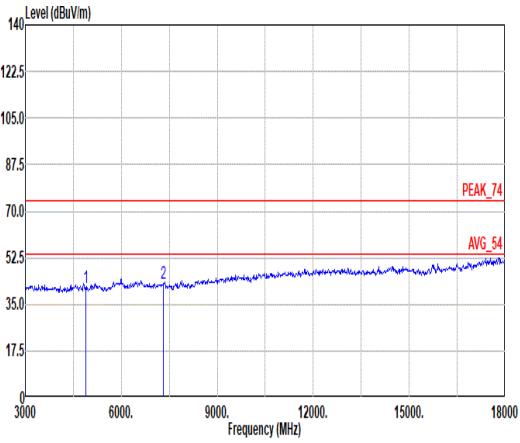


Mode	5																																																																																
	Harmonic																																																																																
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak																																																																																	
	<p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>41.73</td><td>74.00</td><td>-32.27</td><td>53.54</td><td>34.28</td><td>12.03</td><td>59.02</td><td>0.98</td></tr><tr><td>2</td><td>7320.00</td><td>42.39</td><td>74.00</td><td>-31.61</td><td>48.71</td><td>35.70</td><td>14.70</td><td>57.74</td><td>1.02</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4880.00	41.73	74.00	-32.27	53.54	34.28	12.03	59.02	0.98	2	7320.00	42.39	74.00	-31.61	48.71	35.70	14.70	57.74	1.02	<p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>41.42</td><td>74.00</td><td>-32.58</td><td>53.23</td><td>34.28</td><td>12.03</td><td>59.02</td><td>0.98</td></tr><tr><td>2</td><td>7320.00</td><td>42.78</td><td>74.00</td><td>-31.22</td><td>49.10</td><td>35.70</td><td>14.70</td><td>57.74</td><td>1.02</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4880.00	41.42	74.00	-32.58	53.23	34.28	12.03	59.02	0.98	2	7320.00	42.78	74.00	-31.22	49.10	35.70	14.70	57.74
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4880.00	41.73	74.00	-32.27	53.54	34.28	12.03	59.02	0.98																																																																								
2	7320.00	42.39	74.00	-31.61	48.71	35.70	14.70	57.74	1.02																																																																								
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4880.00	41.42	74.00	-32.58	53.23	34.28	12.03	59.02	0.98																																																																								
2	7320.00	42.78	74.00	-31.22	49.10	35.70	14.70	57.74	1.02																																																																								

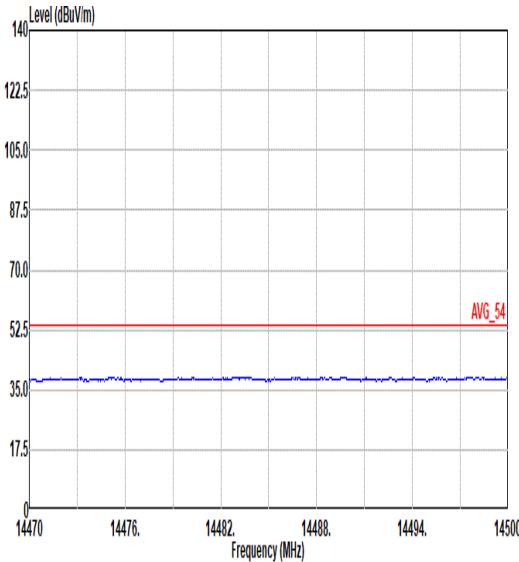
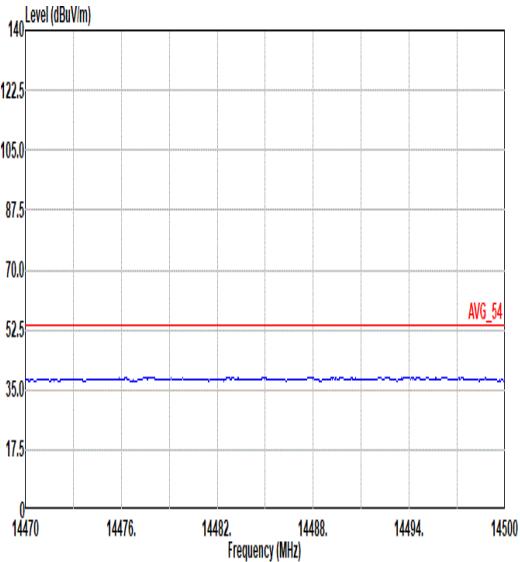
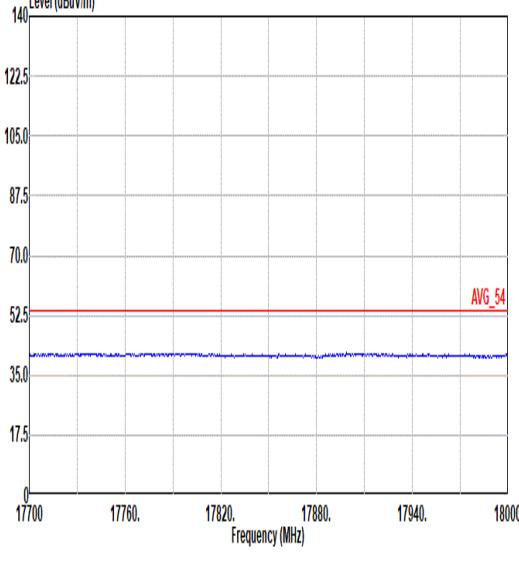
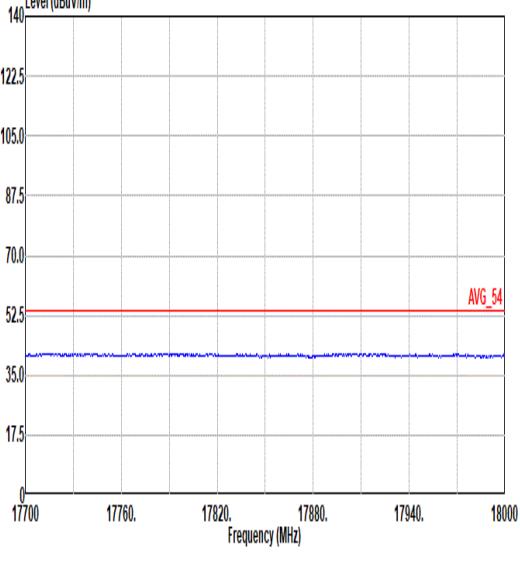



Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL</p>
17.7G ~18G Avg	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL</p>

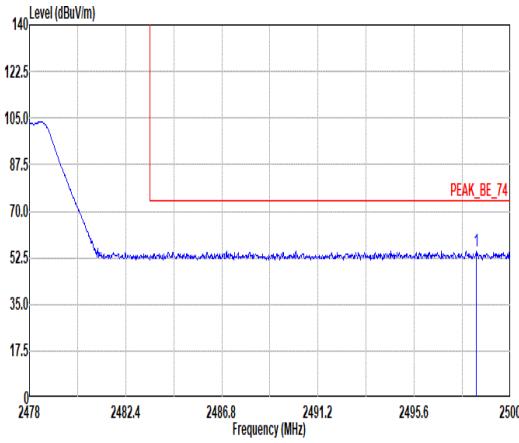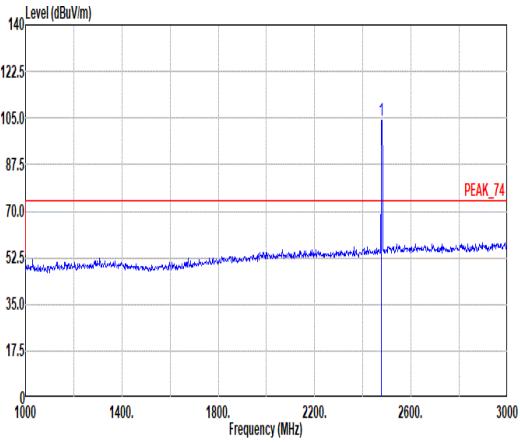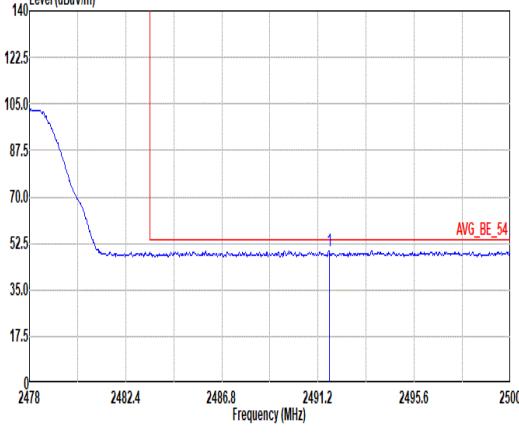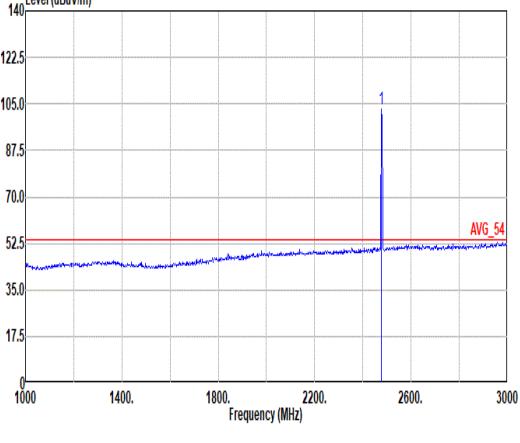





Mode	6																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth LE GFSK_CH76_2478MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1 2498.44</td><td>55.00</td><td>74.00</td><td>-19.00</td><td>38.21</td><td>32.58</td><td>8.54</td><td>34.27</td><td>9.94 303 159 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2498.44	55.00	74.00	-19.00	38.21	32.58	8.54	34.27	9.94 303 159 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1 2478.00</td><td>103.90</td><td>-----</td><td>-----</td><td>87.34</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 303 159 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	103.90	-----	-----	87.34	32.40	8.51	34.28	9.93 303 159 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2498.44	55.00	74.00	-19.00	38.21	32.58	8.54	34.27	9.94 303 159 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	103.90	-----	-----	87.34	32.40	8.51	34.28	9.93 303 159 PEAK																																																																		
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1 2491.71</td><td>49.76</td><td>54.00</td><td>-4.24</td><td>33.04</td><td>32.52</td><td>8.53</td><td>34.27</td><td>9.94 303 159 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2491.71	49.76	54.00	-4.24	33.04	32.52	8.53	34.27	9.94 303 159 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1 2478.00</td><td>103.00</td><td>-----</td><td>-----</td><td>86.44</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 303 159 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	103.00	-----	-----	86.44	32.40	8.51	34.28	9.93 303 159 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2491.71	49.76	54.00	-4.24	33.04	32.52	8.53	34.27	9.94 303 159 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	103.00	-----	-----	86.44	32.40	8.51	34.28	9.93 303 159 AVERAGE																																																																		

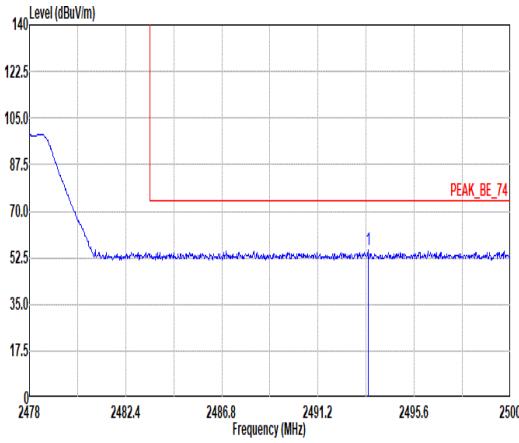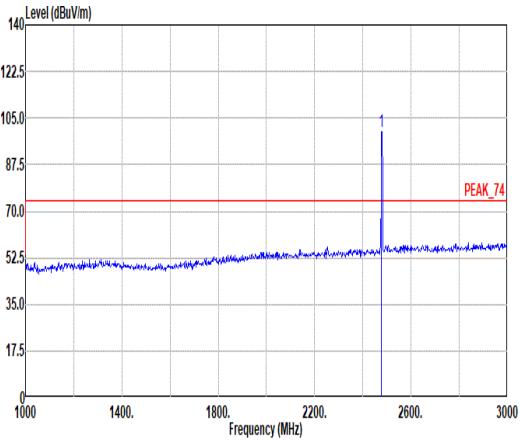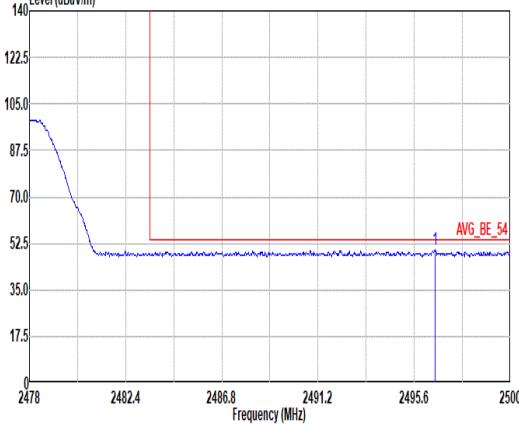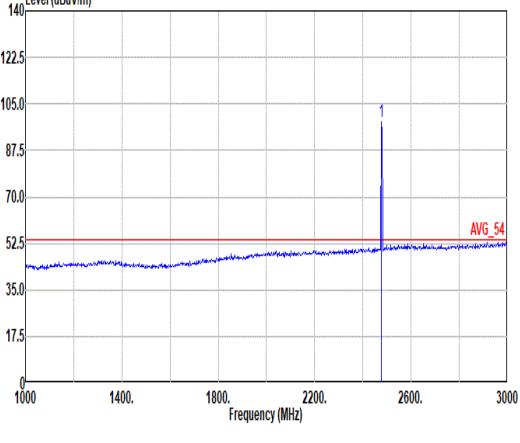


Mode	6																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth LE GFSK_CH76_2478MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2493.49</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>38.56</td><td>32.53</td><td>8.53</td><td>34.27</td><td>9.94 302 189 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2493.49	55.29	74.00	-18.71	38.56	32.53	8.53	34.27	9.94 302 189 PEAK	 <p>Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2478.00</td><td>99.79</td><td>-----</td><td>-----</td><td>83.23</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 302 189 PEAK</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	99.79	-----	-----	83.23	32.40	8.51	34.28	9.93 302 189 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2493.49	55.29	74.00	-18.71	38.56	32.53	8.53	34.27	9.94 302 189 PEAK																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	99.79	-----	-----	83.23	32.40	8.51	34.28	9.93 302 189 PEAK																																																																		
Avg	 <p>Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2496.55</td><td>50.82</td><td>54.00</td><td>-3.98</td><td>33.24</td><td>32.57</td><td>8.54</td><td>34.27</td><td>9.94 302 189 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2496.55	50.82	54.00	-3.98	33.24	32.57	8.54	34.27	9.94 302 189 AVERAGE	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr> <tr> <td>1 2478.00</td><td>98.46</td><td>-----</td><td>-----</td><td>81.90</td><td>32.40</td><td>8.51</td><td>34.28</td><td>9.93 302 189 AVERAGE</td></tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 2478.00	98.46	-----	-----	81.90	32.40	8.51	34.28	9.93 302 189 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2496.55	50.82	54.00	-3.98	33.24	32.57	8.54	34.27	9.94 302 189 AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																		
1 2478.00	98.46	-----	-----	81.90	32.40	8.51	34.28	9.93 302 189 AVERAGE																																																																		


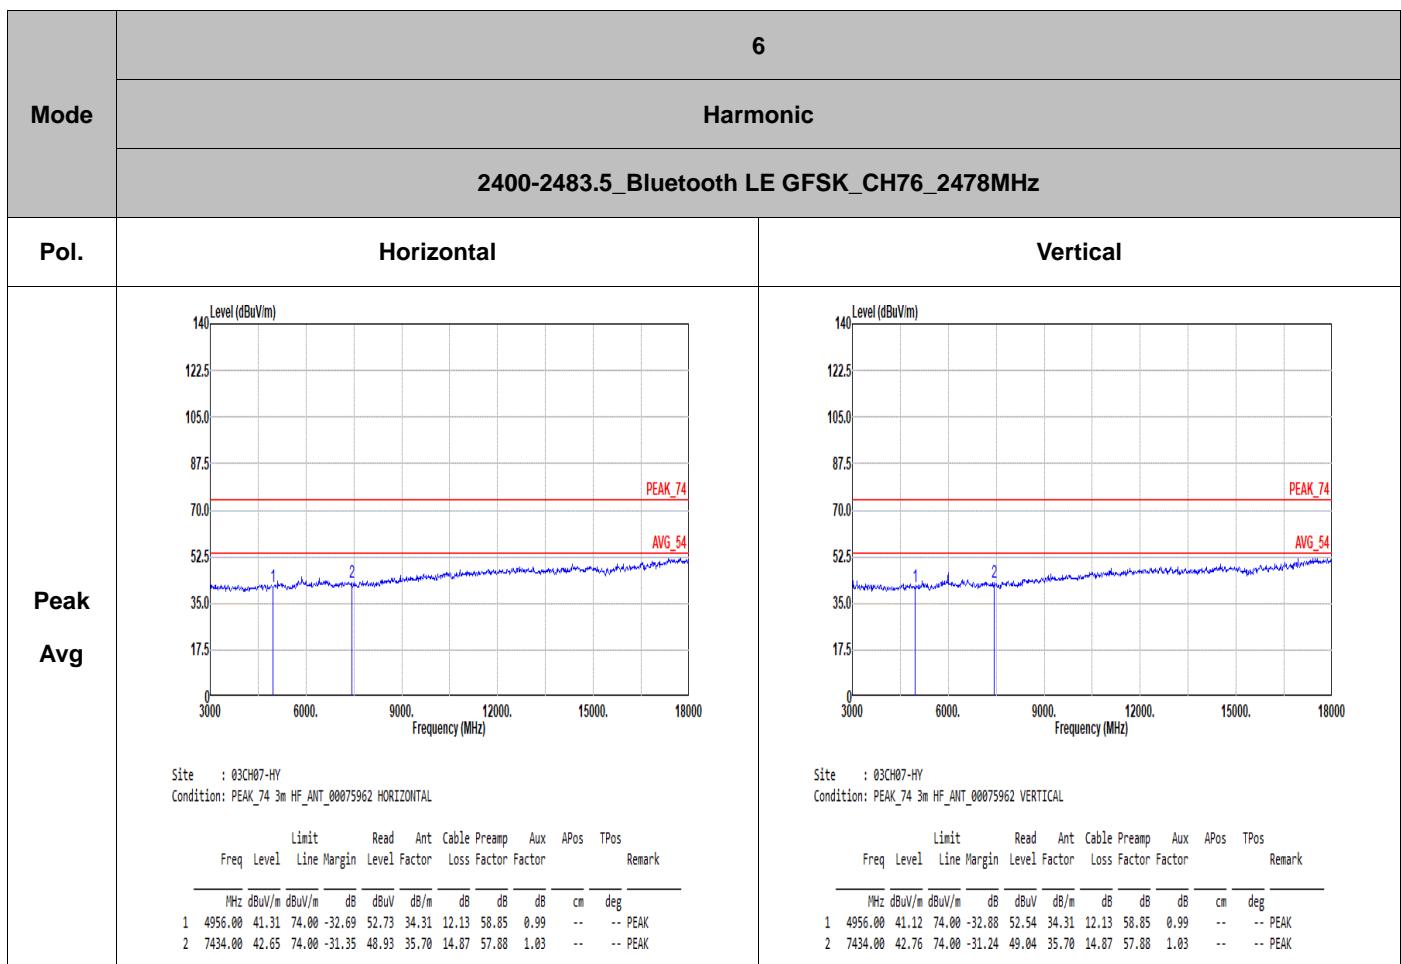


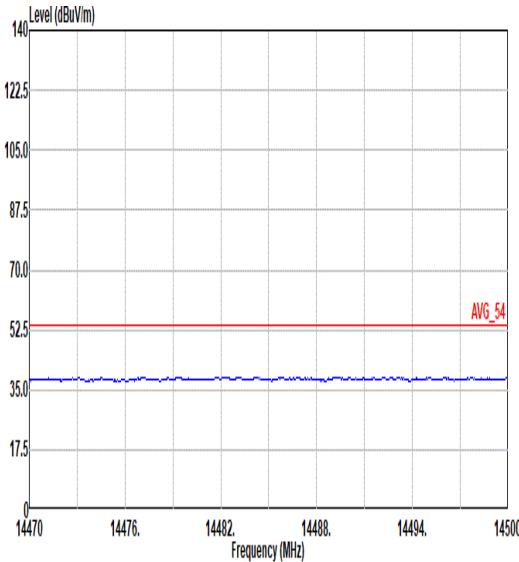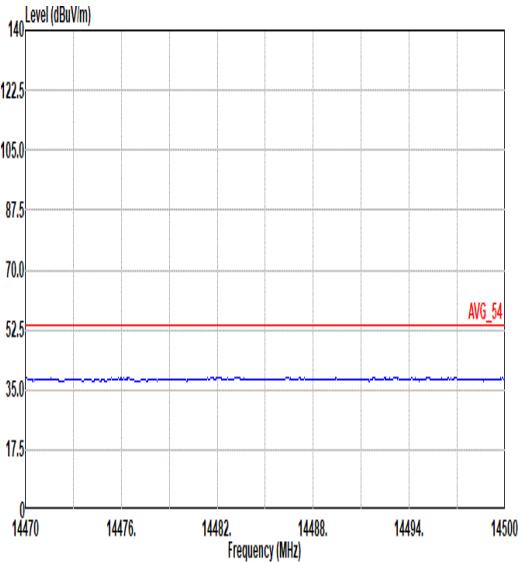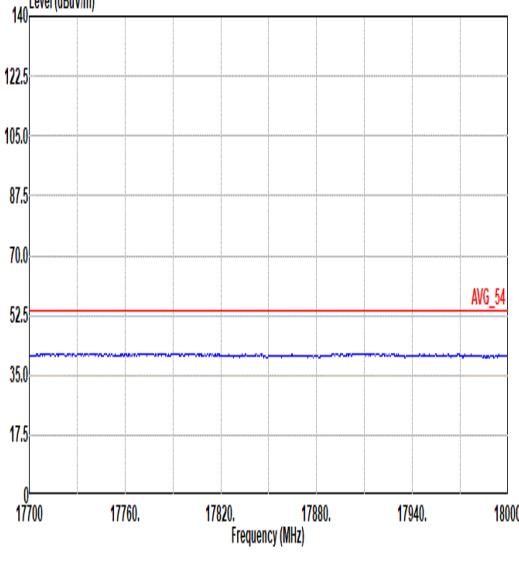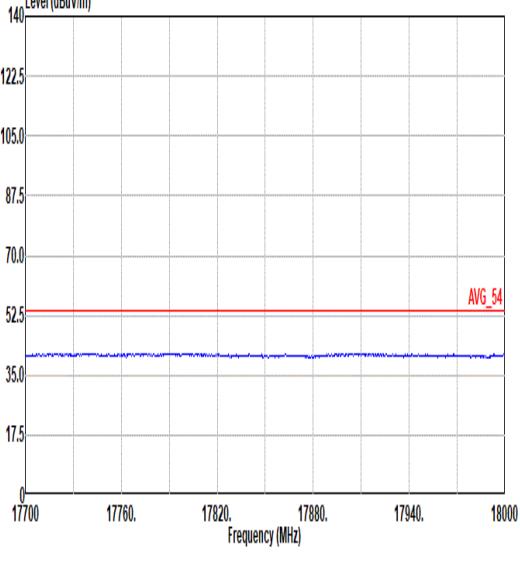

Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth LE GFSK_CH76_2478MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL</p>
17.7G ~18G Avg	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL</p>

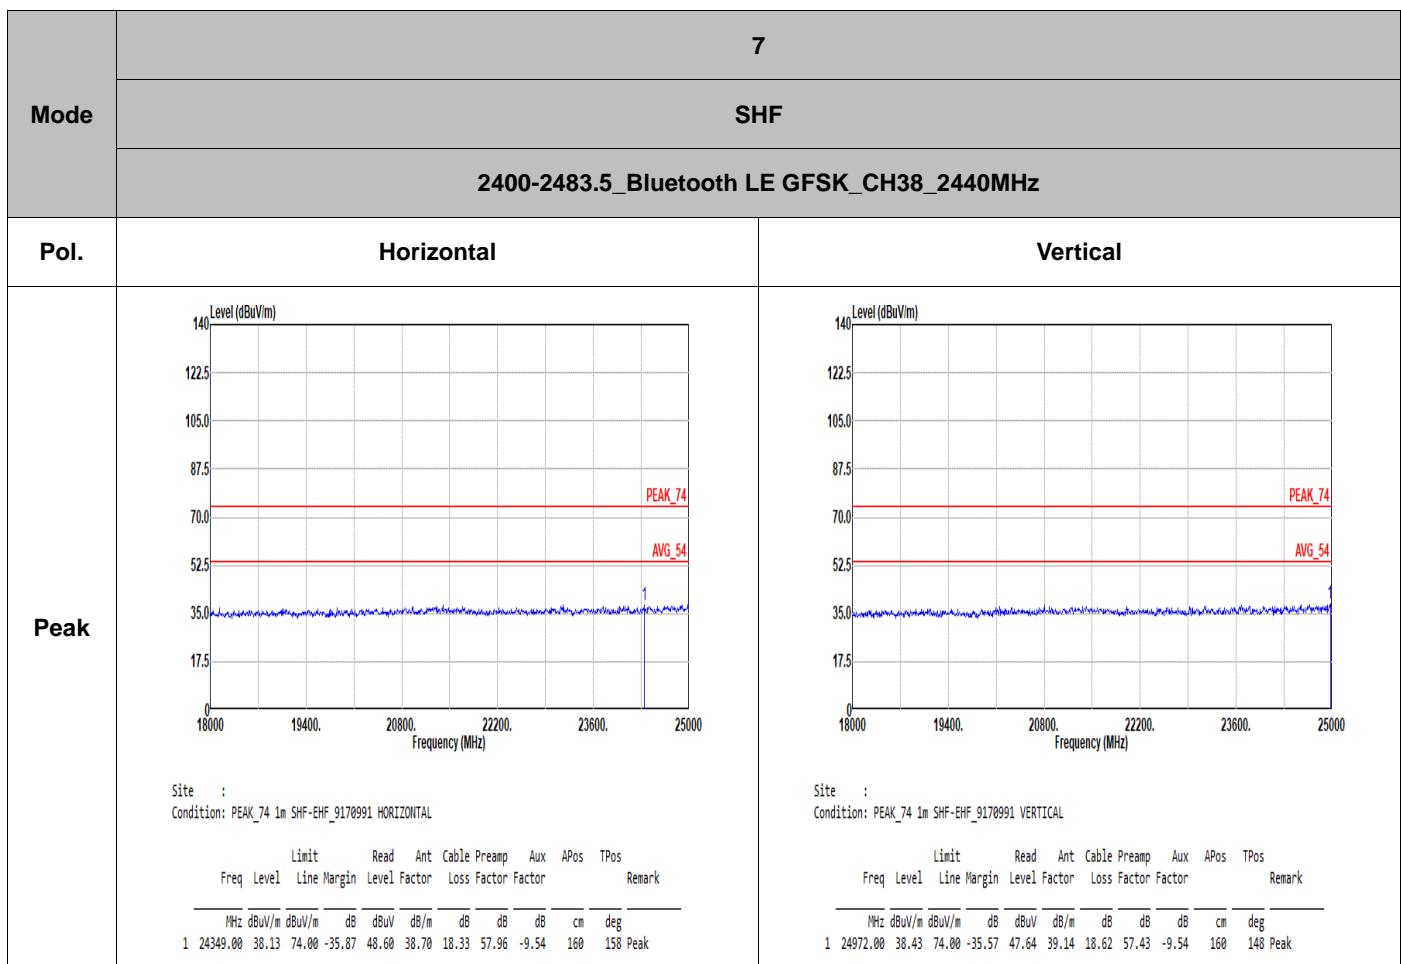

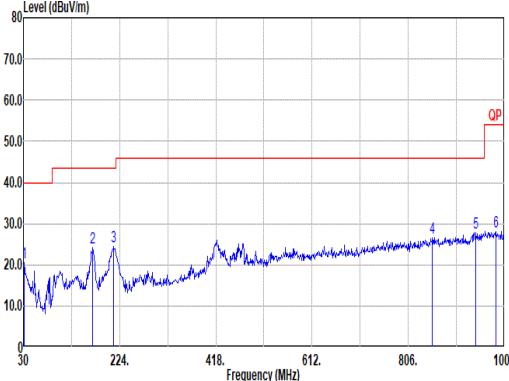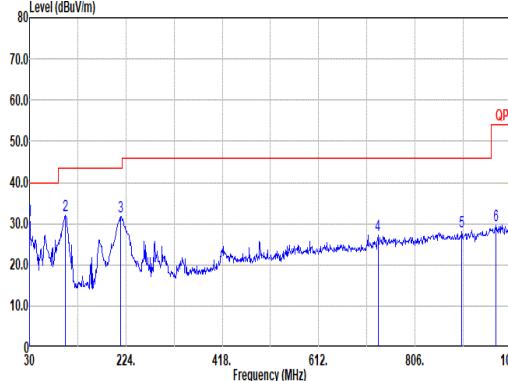


Mode	8																																																																																																																																																																	
	LF																																																																																																																																																																	
	2400-2483.5_Bluetooth LE GFSK_CH38_2440MHz																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
QP/ Peak	 <p>Site : 03CH07-HY Condition: QP 3m Bilog_35419 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>20.53</td><td>40.00</td><td>-19.47</td><td>25.46</td><td>24.01</td><td>1.04</td><td>29.98</td><td>0.00</td></tr> <tr><td>2</td><td>169.68</td><td>24.11</td><td>43.50</td><td>-19.39</td><td>36.08</td><td>15.61</td><td>2.30</td><td>29.88</td><td>0.00</td></tr> <tr><td>3</td><td>212.36</td><td>24.31</td><td>43.50</td><td>-19.19</td><td>36.67</td><td>14.90</td><td>2.57</td><td>29.83</td><td>0.00</td></tr> <tr><td>4</td><td>854.50</td><td>26.54</td><td>46.00</td><td>-19.46</td><td>22.10</td><td>28.41</td><td>5.05</td><td>29.02</td><td>0.00</td></tr> <tr><td>5</td><td>942.77</td><td>27.83</td><td>46.00</td><td>-18.17</td><td>22.05</td><td>29.13</td><td>5.29</td><td>28.64</td><td>0.00</td></tr> <tr><td>6</td><td>982.54</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>21.39</td><td>29.70</td><td>5.44</td><td>28.32</td><td>0.00</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	20.53	40.00	-19.47	25.46	24.01	1.04	29.98	0.00	2	169.68	24.11	43.50	-19.39	36.08	15.61	2.30	29.88	0.00	3	212.36	24.31	43.50	-19.19	36.67	14.90	2.57	29.83	0.00	4	854.50	26.54	46.00	-19.46	22.10	28.41	5.05	29.02	0.00	5	942.77	27.83	46.00	-18.17	22.05	29.13	5.29	28.64	0.00	6	982.54	28.21	54.00	-25.79	21.39	29.70	5.44	28.32	0.00	 <p>Site : 03CH07-HY Condition: QP 3m Bilog_35419 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>30.78</td><td>40.00</td><td>-9.22</td><td>35.45</td><td>24.29</td><td>1.02</td><td>29.98</td><td>0.00</td></tr> <tr><td>2</td><td>181.78</td><td>31.96</td><td>43.50</td><td>-11.54</td><td>44.07</td><td>15.99</td><td>1.81</td><td>29.91</td><td>0.00</td></tr> <tr><td>3</td><td>213.33</td><td>31.75</td><td>43.50</td><td>-11.75</td><td>44.09</td><td>14.91</td><td>2.58</td><td>29.83</td><td>0.00</td></tr> <tr><td>4</td><td>731.31</td><td>27.38</td><td>46.00</td><td>-18.70</td><td>25.65</td><td>26.48</td><td>4.65</td><td>29.48</td><td>0.00</td></tr> <tr><td>5</td><td>900.09</td><td>28.11</td><td>46.00</td><td>-17.89</td><td>23.33</td><td>28.44</td><td>5.13</td><td>28.79</td><td>0.00</td></tr> <tr><td>6</td><td>968.96</td><td>29.48</td><td>54.00</td><td>-24.52</td><td>22.59</td><td>29.95</td><td>5.39</td><td>28.45</td><td>0.00</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.00	30.78	40.00	-9.22	35.45	24.29	1.02	29.98	0.00	2	181.78	31.96	43.50	-11.54	44.07	15.99	1.81	29.91	0.00	3	213.33	31.75	43.50	-11.75	44.09	14.91	2.58	29.83	0.00	4	731.31	27.38	46.00	-18.70	25.65	26.48	4.65	29.48	0.00	5	900.09	28.11	46.00	-17.89	23.33	28.44	5.13	28.79	0.00	6	968.96	29.48	54.00	-24.52	22.59	29.95	5.39	28.45	0.00
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	30.97	20.53	40.00	-19.47	25.46	24.01	1.04	29.98	0.00																																																																																																																																																									
2	169.68	24.11	43.50	-19.39	36.08	15.61	2.30	29.88	0.00																																																																																																																																																									
3	212.36	24.31	43.50	-19.19	36.67	14.90	2.57	29.83	0.00																																																																																																																																																									
4	854.50	26.54	46.00	-19.46	22.10	28.41	5.05	29.02	0.00																																																																																																																																																									
5	942.77	27.83	46.00	-18.17	22.05	29.13	5.29	28.64	0.00																																																																																																																																																									
6	982.54	28.21	54.00	-25.79	21.39	29.70	5.44	28.32	0.00																																																																																																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																									
1	30.00	30.78	40.00	-9.22	35.45	24.29	1.02	29.98	0.00																																																																																																																																																									
2	181.78	31.96	43.50	-11.54	44.07	15.99	1.81	29.91	0.00																																																																																																																																																									
3	213.33	31.75	43.50	-11.75	44.09	14.91	2.58	29.83	0.00																																																																																																																																																									
4	731.31	27.38	46.00	-18.70	25.65	26.48	4.65	29.48	0.00																																																																																																																																																									
5	900.09	28.11	46.00	-17.89	23.33	28.44	5.13	28.79	0.00																																																																																																																																																									
6	968.96	29.48	54.00	-24.52	22.59	29.95	5.39	28.45	0.00																																																																																																																																																									



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE GFSK for 1Mbps	15.49	44.67	22.39	24kHz
Bluetooth - LE GFSK for 2Mbps	10.71	27	37.04	39KHz

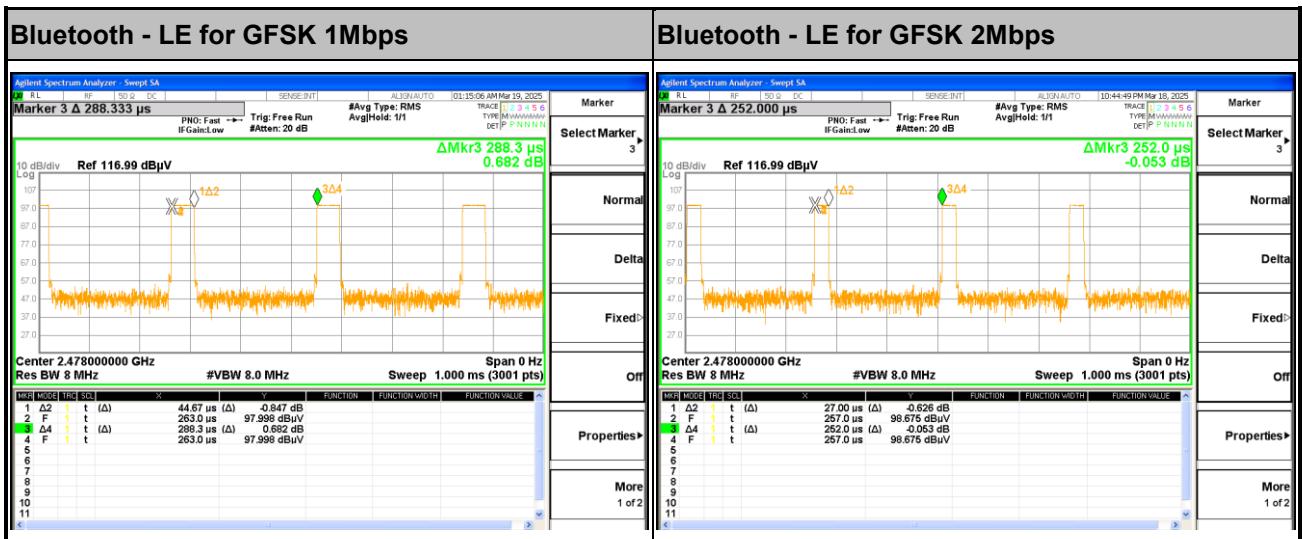

THE END



Appendix E. Spot Check Evaluation on GHH4K

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Summary for power and RSE spot check for each FCC rule part is listed as below:

Test Item	Mode	A4RGWSQ2 Reference Worst Result	A4RGHH4K Variant Check Result	Difference (dB)
Conducted Power (dBm)	BT	20.43	20.03	0.40
	BLE	19.72	19.66	0.06
	BLE ASK	19.08	18.94	0.14
	BLE GFSK	20.38	19.96	0.42
	WiFi 2.4GHz	20.91	20.88	0.03
	WiFi 5GHz	18.41	17.95	0.46
Radiated Band Edges and Spurious Emission (dBuV/m)	BT	-26.48	-25.75	0.73
	BLE	-6.95	-5.91	1.04
	BLE ASK	-27.29	-27.10	0.19
	BLE GFSK	-3.47	-3.26	0.21
	WiFi 2.4GHz	-1.55	-1.83	0.28
	WiFi 5GHz	-2.10	-3.65	1.55



Reference detail Section

Rule Part	Equipment Class	Wireless Technology	Rule Part & Frequency Band	Reference FCC ID (Parent)	Type Grant/Permissive Change	Reference Exhibit	Full report referenced	FCC ID Filing (Variant)
15C	DTS	BLE GFSK	§15.247 2.4GHz	A4RGWSQ2	Original Grant	GWSQ2_FCC Part 15C BLE GFSK	Y	A4RGHH4K



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 28, 2025~ Mar. 31, 2025	Oct. 31, 2025	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Mar. 28, 2025~ Mar. 31, 2025	Jul. 03, 2025	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Mar. 28, 2025~ Mar. 31, 2025	Jul. 03, 2025	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Mar. 28, 2025~ Mar. 31, 2025	Jul. 03, 2025	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Mar. 28, 2025~ Mar. 31, 2025	Jan. 08, 2026	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar. 28, 2025~ Mar. 31, 2025	Aug. 22, 2025	Conducted (TH02-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 28, 2025~ Mar. 31, 2025	May 19, 2025	Conducted (TH02-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Mar. 28, 2025~ Mar. 31, 2025	N/A	Conducted (TH02-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-0 6	35419 & 03	30MHz~1GHz	Apr. 22, 2024	Apr. 10, 2025~ Apr. 11, 2025	Apr. 21, 2025	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 28, 2024	Apr. 10, 2025~ Apr. 11, 2025	Nov. 27, 2025	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Apr. 10, 2025~ Apr. 11, 2025	Mar. 05, 2026	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001018 00-30-10P	1590075	1GHz~18GHz	Apr. 19, 2024	Apr. 10, 2025~ Apr. 11, 2025	Apr. 18, 2025	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 01, 2024	Apr. 10, 2025~ Apr. 11, 2025	Sep. 30, 2025	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 22, 2025	Apr. 10, 2025~ Apr. 11, 2025	Mar. 21, 2026	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 05, 2024	Apr. 10, 2025~ Apr. 11, 2025	Aug. 04, 2025	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 28, 2025	Apr. 10, 2025~ Apr. 11, 2025	Mar. 27, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 20, 2025	Apr. 10, 2025~ Apr. 11, 2025	Feb. 19, 2026	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 20, 2025	Apr. 10, 2025~ Apr. 11, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 14, 2024	Apr. 10, 2025~ Apr. 11, 2025	Sep. 13, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 20, 2025	Apr. 10, 2025~ Apr. 11, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22, 2024	Apr. 10, 2025~ Apr. 11, 2025	Apr. 21, 2025	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Apr. 10, 2025~ Apr. 11, 2025	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Apr. 10, 2025~ Apr. 11, 2025	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Apr. 10, 2025~ Apr. 11, 2025	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Apr. 10, 2025~ Apr. 11, 2025	N/A	Radiation (03CH07-HY)
Attenuator	HONOVA	5910 SMA-50-005-19- NE	ATT-36	N/A	Feb. 11, 2025	Apr. 10, 2025~ Apr. 11, 2025	Feb. 10, 2026	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Apr. 10, 2025~ Apr. 11, 2025	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPTEL	TR-32	HE17XB2495	N/A	Feb. 24, 2025	Apr. 10, 2025~ Apr. 11, 2025	Feb. 23, 2026	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00991	18GHz-40GHz	Jun. 04, 2024	Apr. 10, 2025~ Apr. 11, 2025	Jun. 03, 2025	Radiation (03CH07-HY)
Spectrum Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 05, 2024	Apr. 10, 2025~ Apr. 11, 2025	Oct. 04, 2025	Radiation (03CH07-HY)

—————THE END—————