



# FCC RADIO TEST REPORT

**FCC ID** : A4RGU0NP  
**Equipment** : Phone  
**Model Name** : GU0NP, GM66V  
**Applicant** : Google LLC  
1600 Amphitheatre Parkway,  
Mountain View, CA, 94043 USA  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Feb. 27, 2025 and testing was performed from Mar. 06, 2025 to Apr. 25, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sportun International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System .....	9
2.4 Support Unit used in test configuration and system .....	10
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement .....	13
3.4 Conducted Band Edges and Spurious Emission Measurement .....	14
3.5 Radiated Band Edges and Spurious Emission Measurement .....	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
<b>4 List of Measuring Equipment .....</b>	<b>22</b>
<b>5 Measurement Uncertainty .....</b>	<b>24</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission Test Data</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The GU0NP and GM66V are 100% identical in Hardware / Software to each other, and only have different model names for marketing segmentation. The test sample are all model GU0NP.

Reviewed by: William Chen

Report Producer: Clio Lo



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

Product Feature		
<b>General Specs</b> GSM/WCDMA/LTE/5G NR, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, UWB, NFC, WPC Rx, NTN and GNSS.		
<b>Antenna Type</b> Thread: ILA Antenna		
<b>Antenna information (Open Mode)</b>		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-2.36
<b>Antenna information (Close Mode)</b>		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-2.26

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
S/N	Performed Test Item
52171FDCG0005B	RF Conducted Measurement
52181FDCG0008Q	Radiated Spurious Emission
52181FDCG0008P	Conducted Emission

### 1.2 Modification of EUT

No modifications made to the EUT during the testing.



### 1.3 Testing Location

<b>Test Site</b>	Sportun International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sportun Site No.</b> TH05-HY, CO07-HY, 03CH11-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

### 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT (Open and Close) and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane (Open) with Adapter as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Thread / GFSK
	Mode 1: Thread Tx CH11_2405 MHz Mode 2: Thread Tx CH18_2440 MHz Mode 3: Thread Tx CH25_2475 MHz Mode 4: Thread Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: Thread TX Channel 18 + USB Cable 1 (Charging from AC Adapter)
<b>Remark:</b>	
<ol style="list-style-type: none"><li>1. For Radiated Test Cases, the tests were performed with USB Cable 1.</li><li>2. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test.</li><li>3. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.</li><li>4. The detailed Radiated test modes are shown in Appendix C.</li></ol>	

## 2.3 Connection Diagram of Test System

### <AC Conducted Emission Mode>

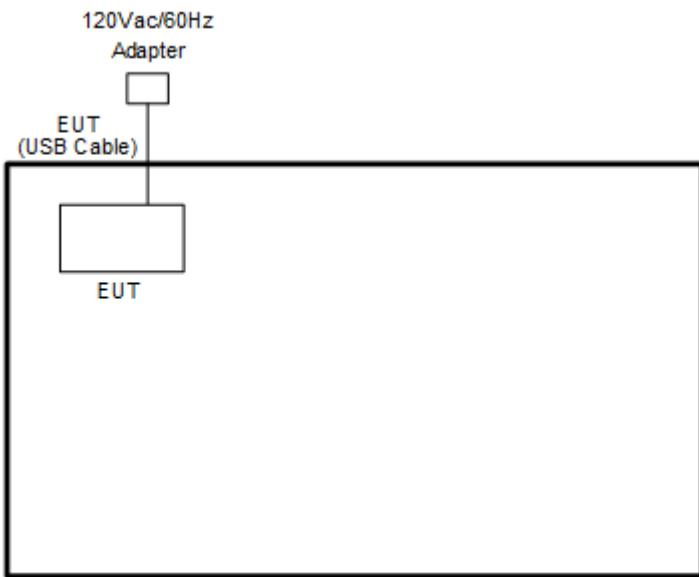

### <Radiated Emission Mode>

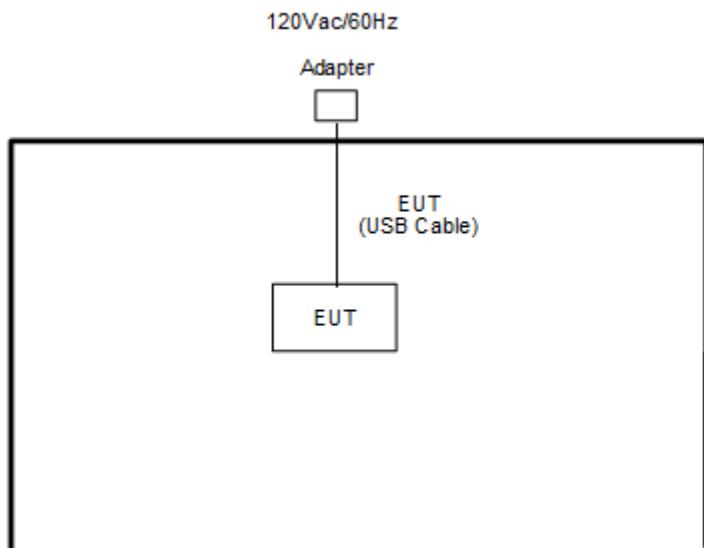



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	GW8L7	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

The RF test items, utility “BT\_DUT\_Control\_GUI\_03-11-24” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\text{Offset(dB)} = \text{RF cable loss(dB)} + \text{attenuator factor(dB)}.$$

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * \text{RBW}$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

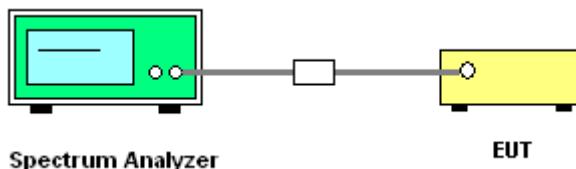

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

##### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

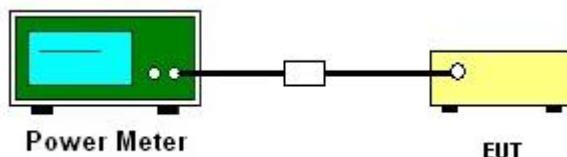

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

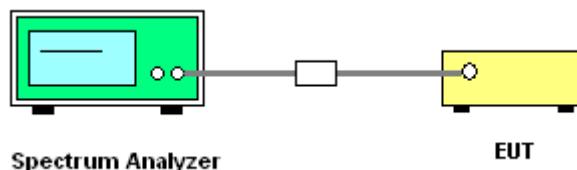

#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

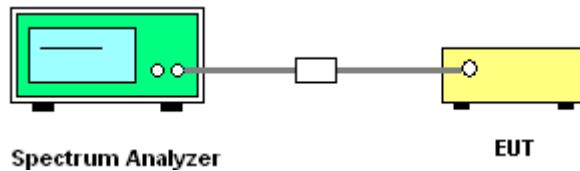

### 3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

### 3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated test below 30MHz

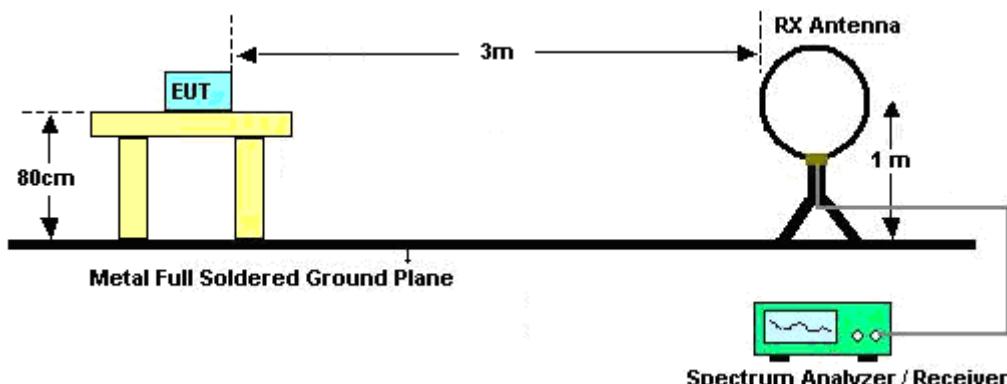


For radiated test from 30MHz to 1GHz

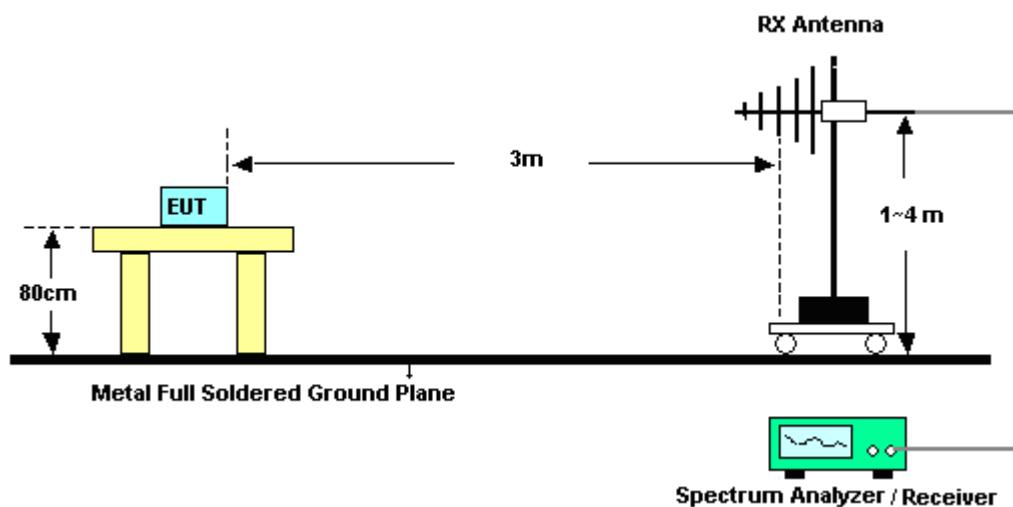

For radiated test from 1GHz to 18GHz

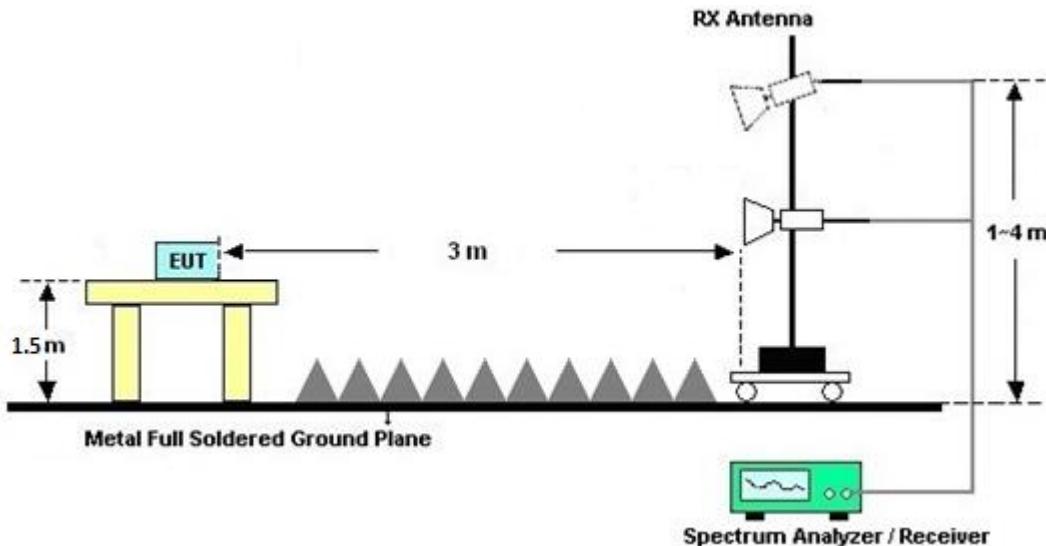

For radiated test above 18GHz

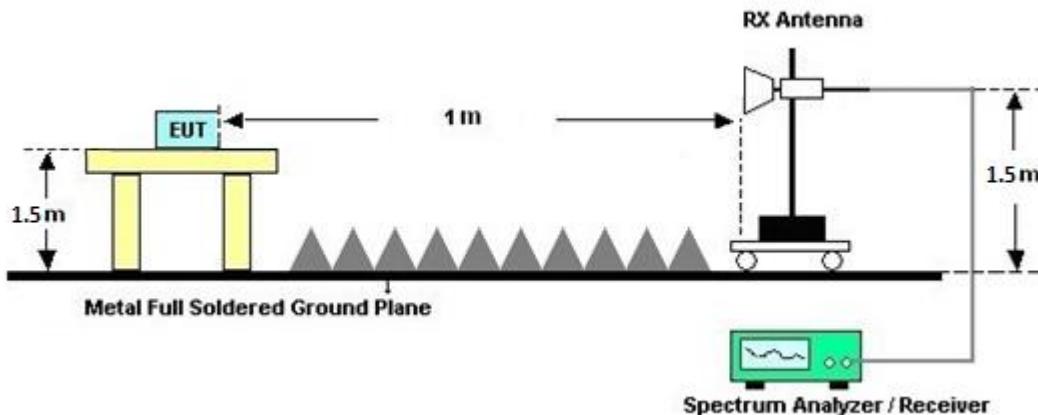

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

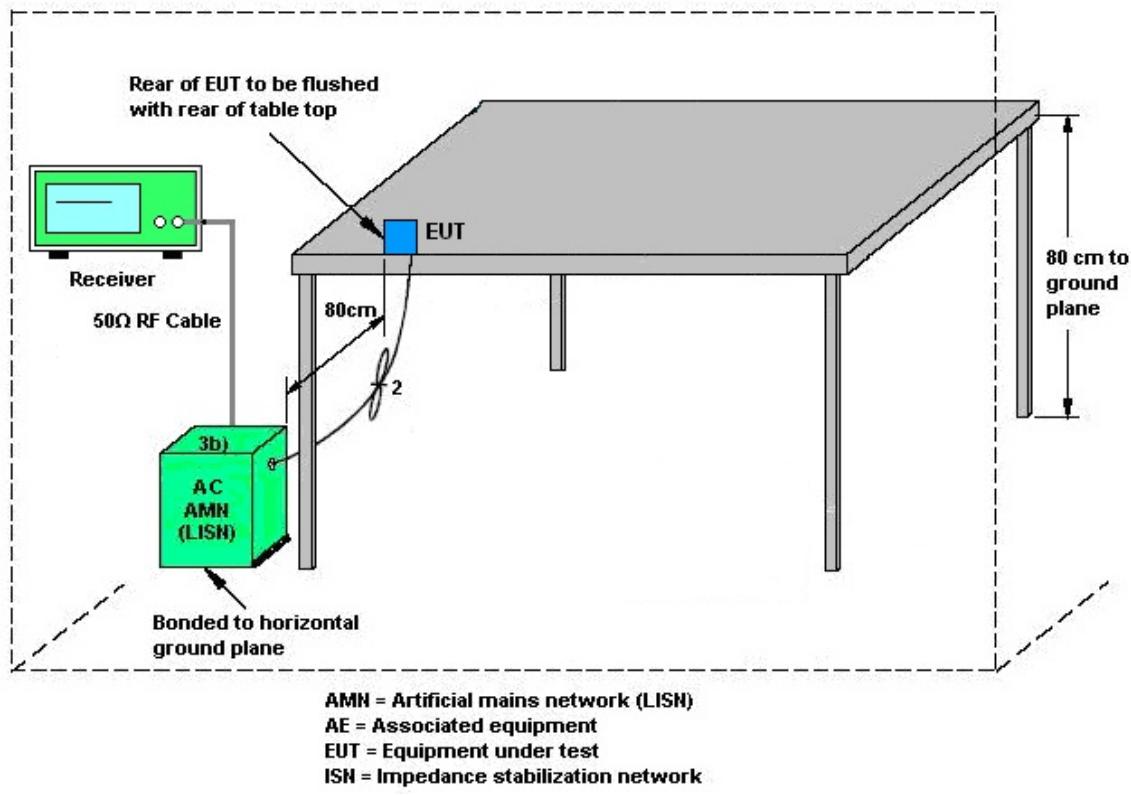

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 3.7.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.

Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Mar. 06, 2025~Apr. 22, 2025	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Mar. 06, 2025~Apr. 22, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Mar. 06, 2025~Apr. 22, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Mar. 06, 2025~Apr. 22, 2025	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Mar. 06, 2025~Apr. 22, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Mar. 06, 2025~Mar. 23, 2025	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 24, 2025	Mar. 24, 2025~Apr. 22, 2025	Mar. 23, 2026	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 21, 2025	Mar. 06, 2025~Apr. 22, 2025	Jan. 20, 2026	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Mar. 06, 2025~Apr. 22, 2025	Aug. 22, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Mar. 06, 2025~Apr. 22, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Mar. 06, 2025~Apr. 22, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 06, 2025~Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Mar. 06, 2025~Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 06, 2025~Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Mar. 06, 2025~Apr. 22, 2025	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Mar. 06, 2025~Apr. 22, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 05, 2025	Mar. 06, 2025~Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 05, 2025	Mar. 06, 2025~Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9k~30M	Mar. 05, 2025	Mar. 06, 2025~Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 05, 2025	Mar. 06, 2025~Apr. 22, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Mar. 06, 2025~Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WHKX8-5872-5-6750-18000-40SS	SN3	6.75GHz High Pass Filter	Sep. 10, 2024	Mar. 06, 2025~Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Mar. 06, 2025~Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Mar. 06, 2025~Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK10-4630-5093-11000-40SS	SN1	4.5GHz Low Pass Filter	Sep. 10, 2024	Mar. 06, 2025~Apr. 22, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 25, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 25, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Apr. 25, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Apr. 25, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Apr. 25, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Apr. 25, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Mar. 21, 2025~Apr. 11, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Mar. 21, 2025~Apr. 11, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Mar. 21, 2025~Apr. 11, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Mar. 21, 2025~Apr. 11, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Mar. 21, 2025~Apr. 11, 2025	N/A	Conducted (TH05-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	3.7 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	6.4 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	5.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	5.3 dB
---	--------

## Appendix A. Test Result of Conducted Test Items


Test Engineer:	Benny Ku and Junyu Jhou			Temperature:	21~25		°C
Test Date:	2025/3/21~2025/4/11			Relative Humidity:	51~54		%


<u><b>TEST RESULTS DATA</b></u> <u><b>6dB and 99% Occupied Bandwidth</b></u>								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Thread	250K	1	11	2405	2.204	1.550	0.50	Pass
Thread	250K	1	18	2440	2.209	1.560	0.50	Pass
Thread	250K	1	25	2475	2.212	1.564	0.50	Pass
Thread	250K	1	26	2480	2.215	1.555	0.50	Pass


<u><b>TEST RESULTS DATA</b></u> <u><b>Average Power Table</b></u>										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Thread	250K	1	11	2405	20.23	30.00	-2.26	17.97	36.00	Pass
Thread	250K	1	18	2440	19.79	30.00	-2.26	17.53	36.00	Pass
Thread	250K	1	25	2475	20.31	30.00	-2.26	18.05	36.00	Pass
Thread	250K	1	26	2480	20.65	30.00	-2.26	18.39	36.00	Pass


<u><b>TEST RESULTS DATA</b></u> <u><b>Peak Power Density</b></u>									
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Thread	250K	1	11	2405	17.26	6.27	-2.26	8.00	Pass
Thread	250K	1	18	2440	16.91	6.09	-2.26	8.00	Pass
Thread	250K	1	25	2475	17.19	6.31	-2.26	8.00	Pass
Thread	250K	1	26	2480	17.53	6.41	-2.26	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

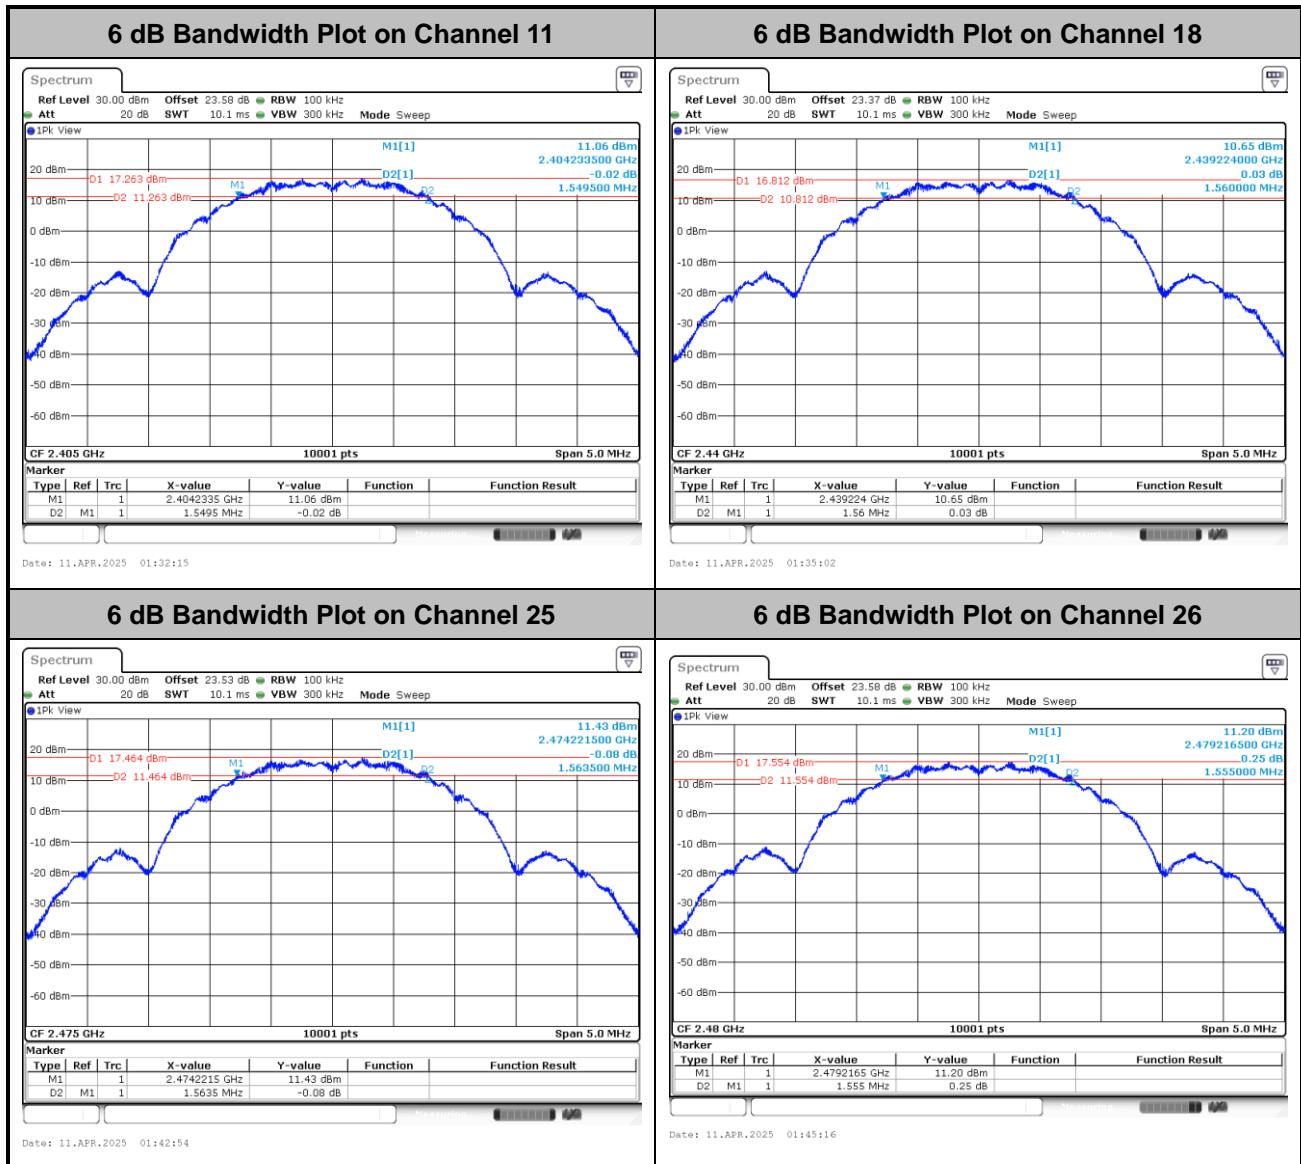
**6dB Bandwidth**

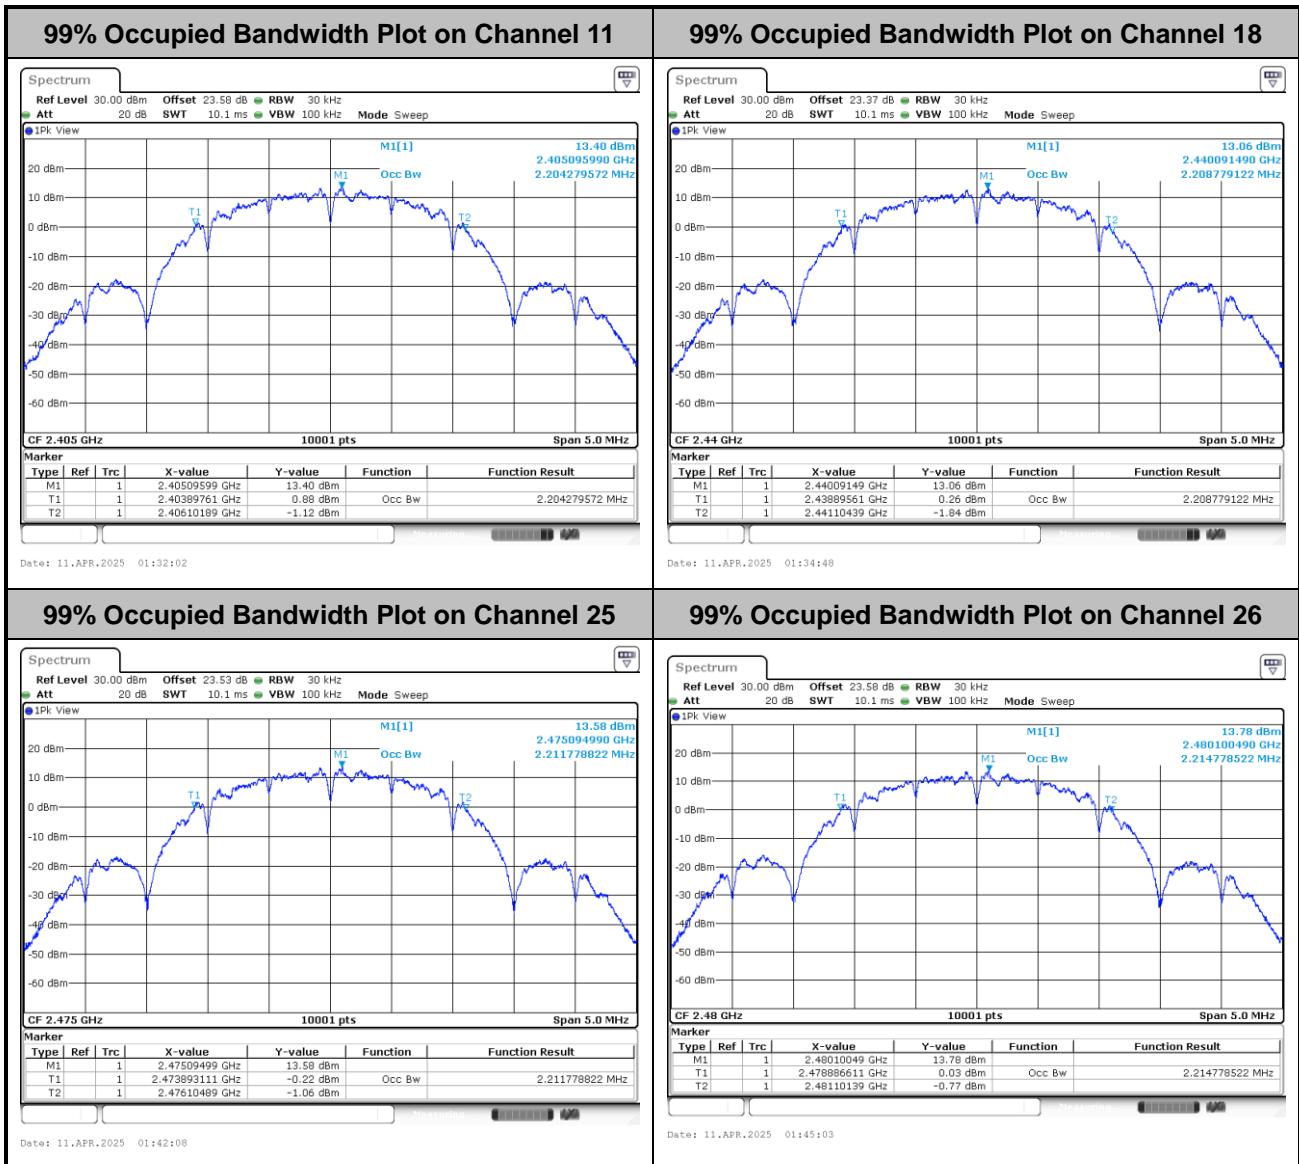
**99% Occupied Bandwidth**

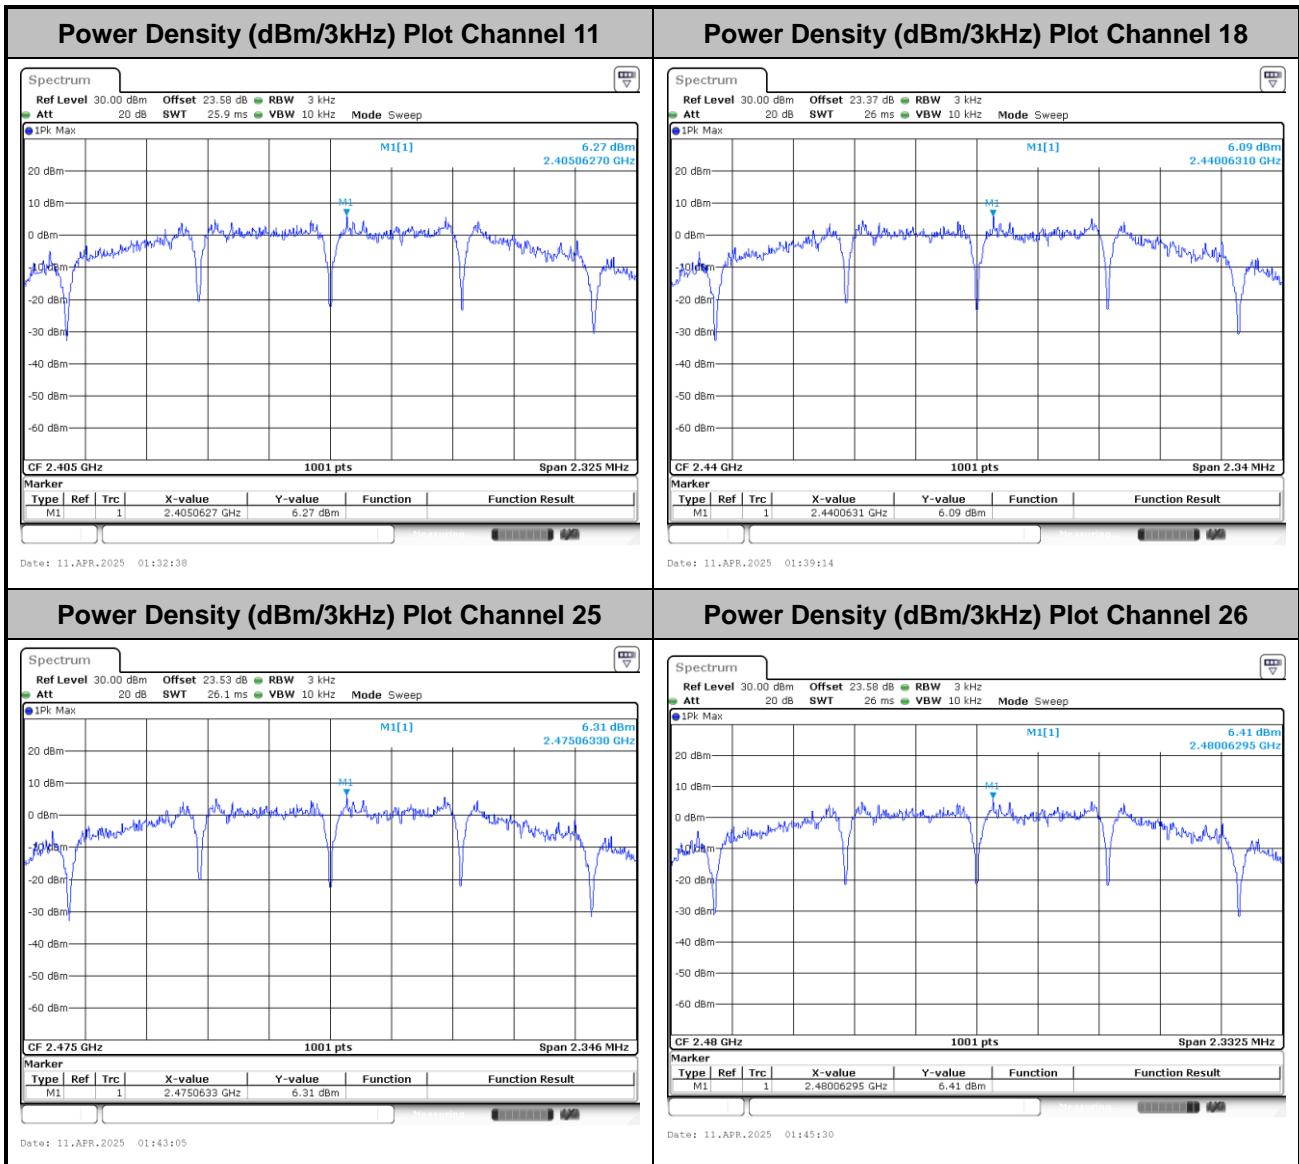**Power Spectral Density (dBm/3kHz)**

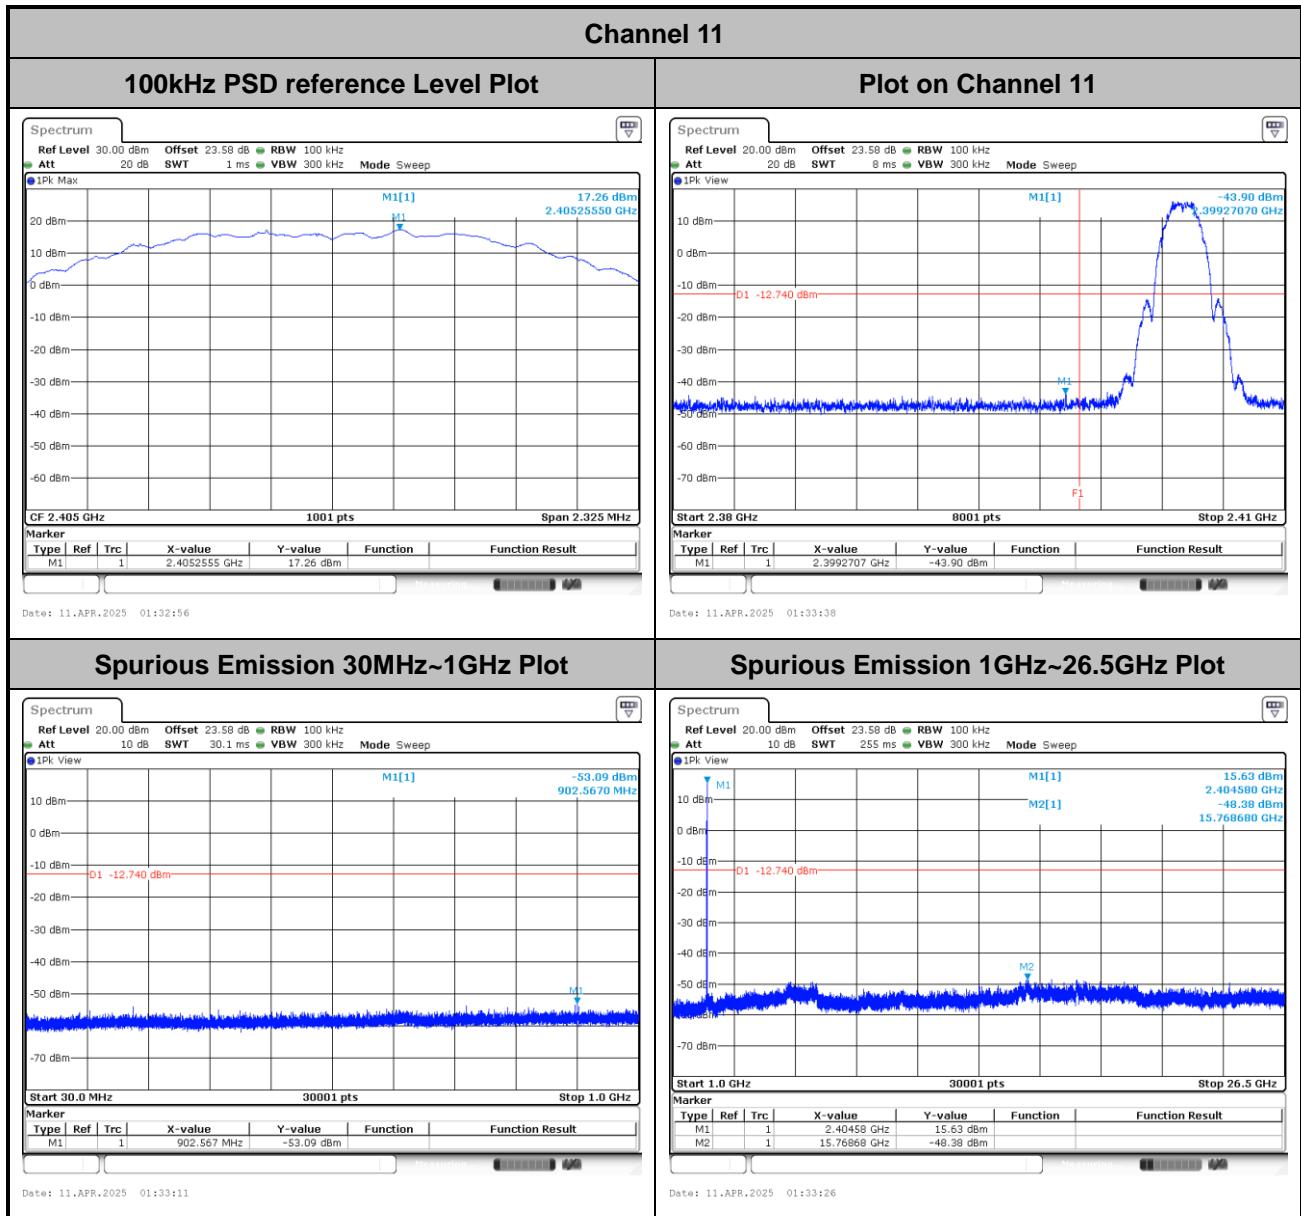**Band Edge and Conducted Spurious Emission**

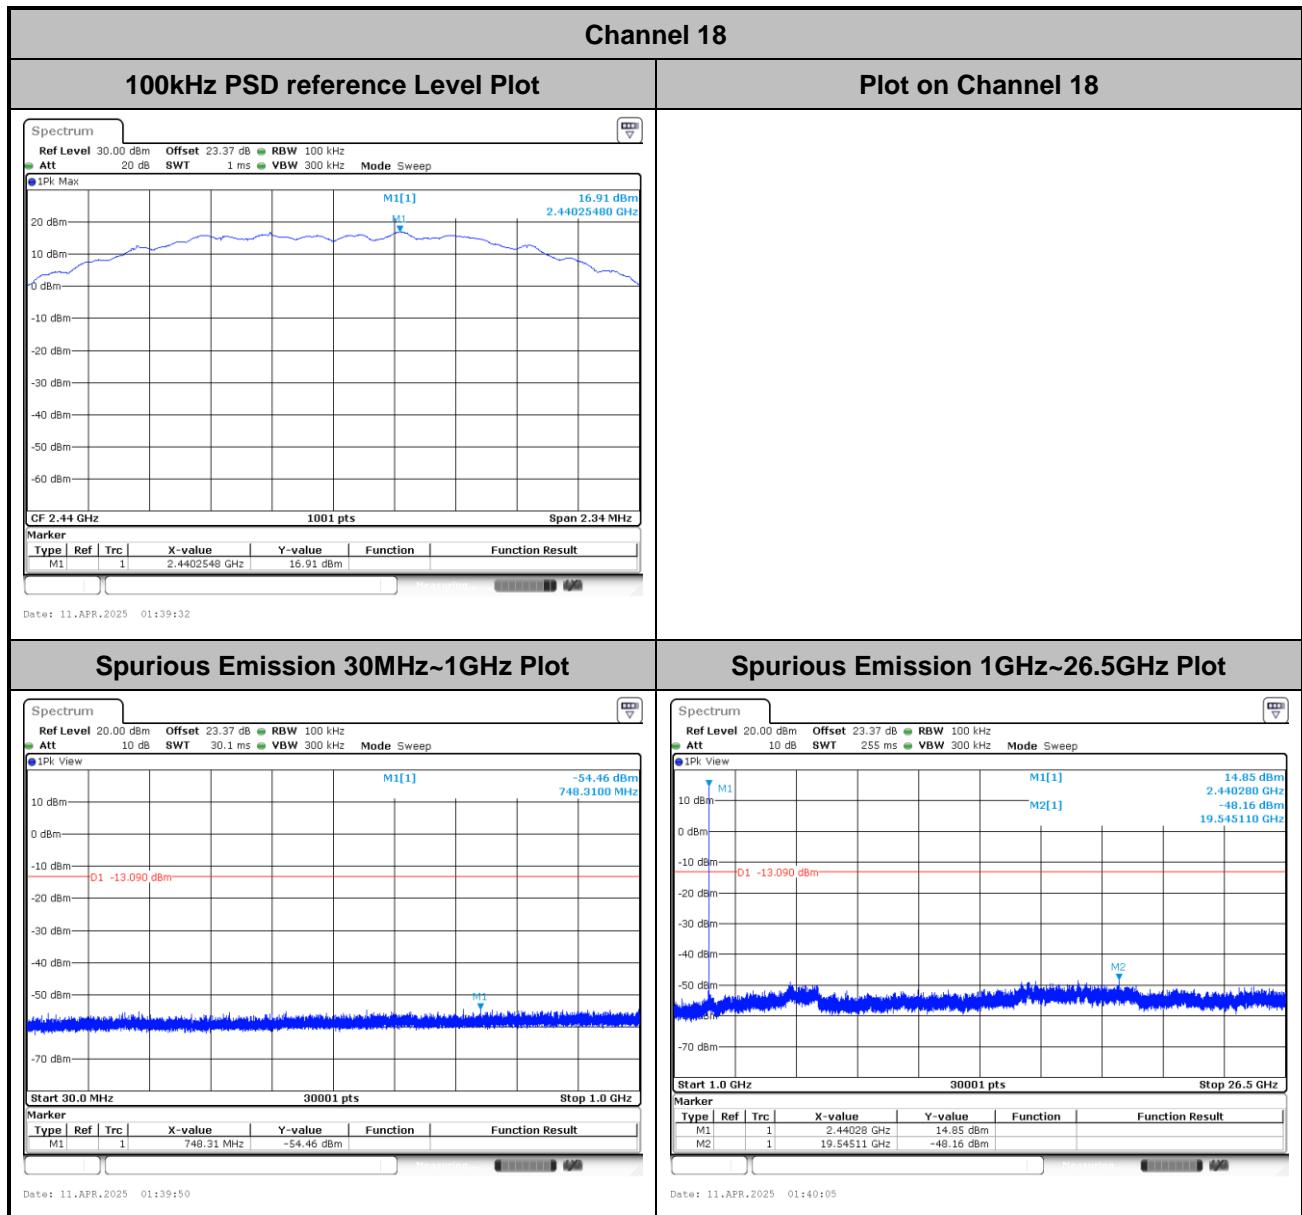

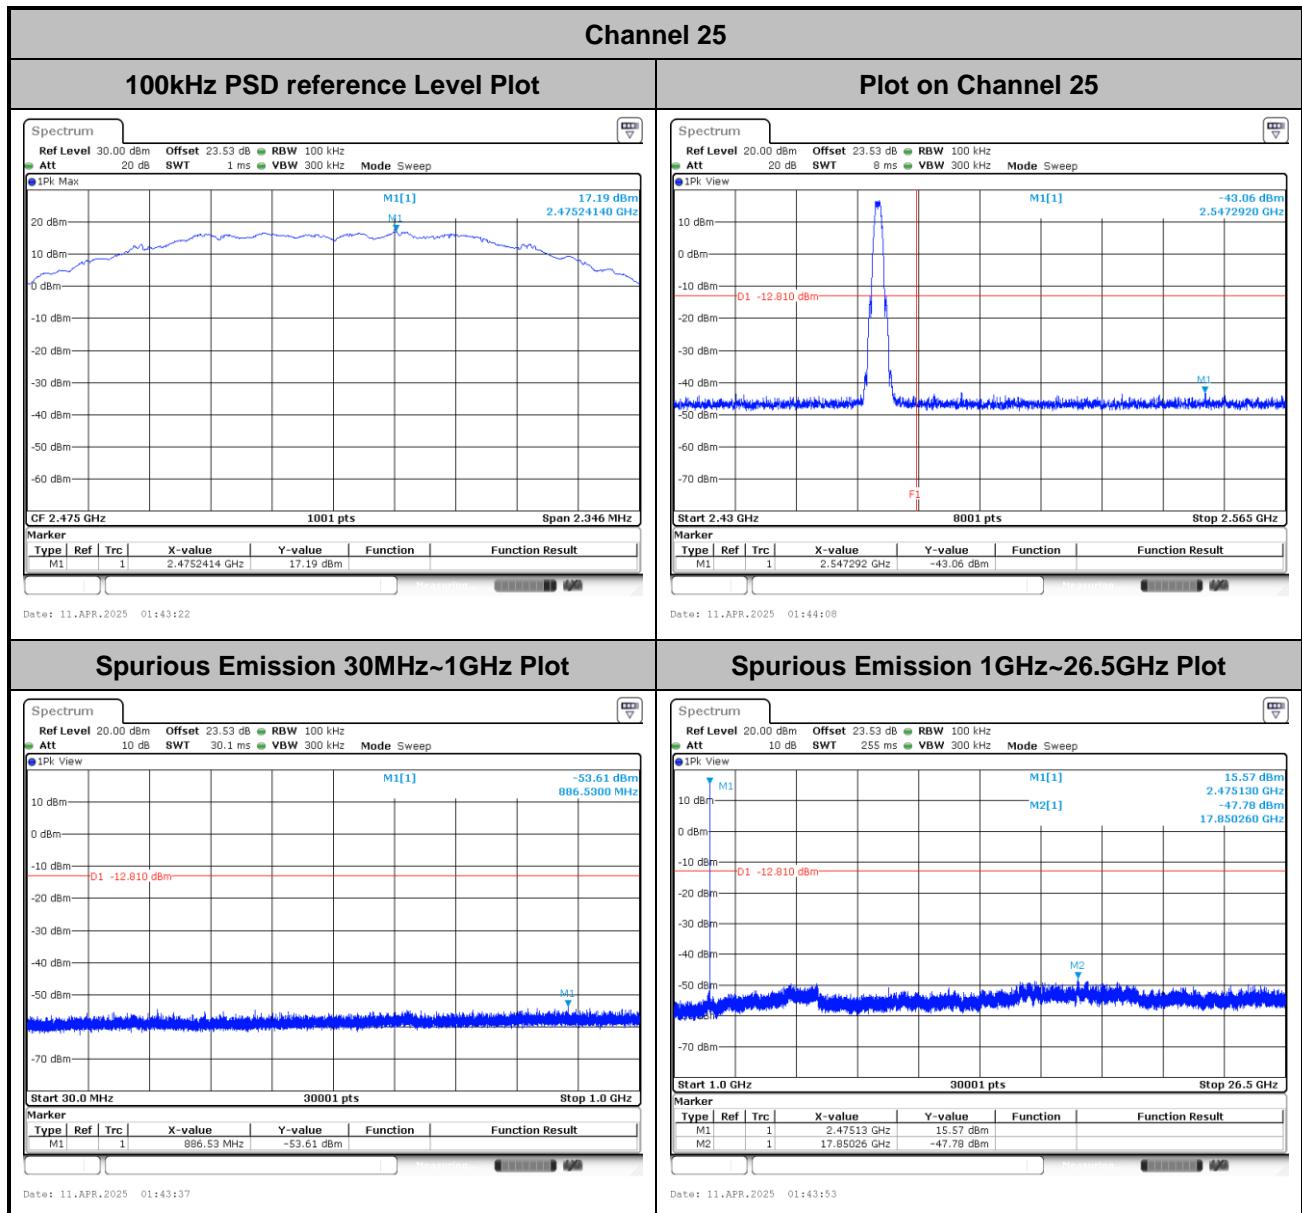

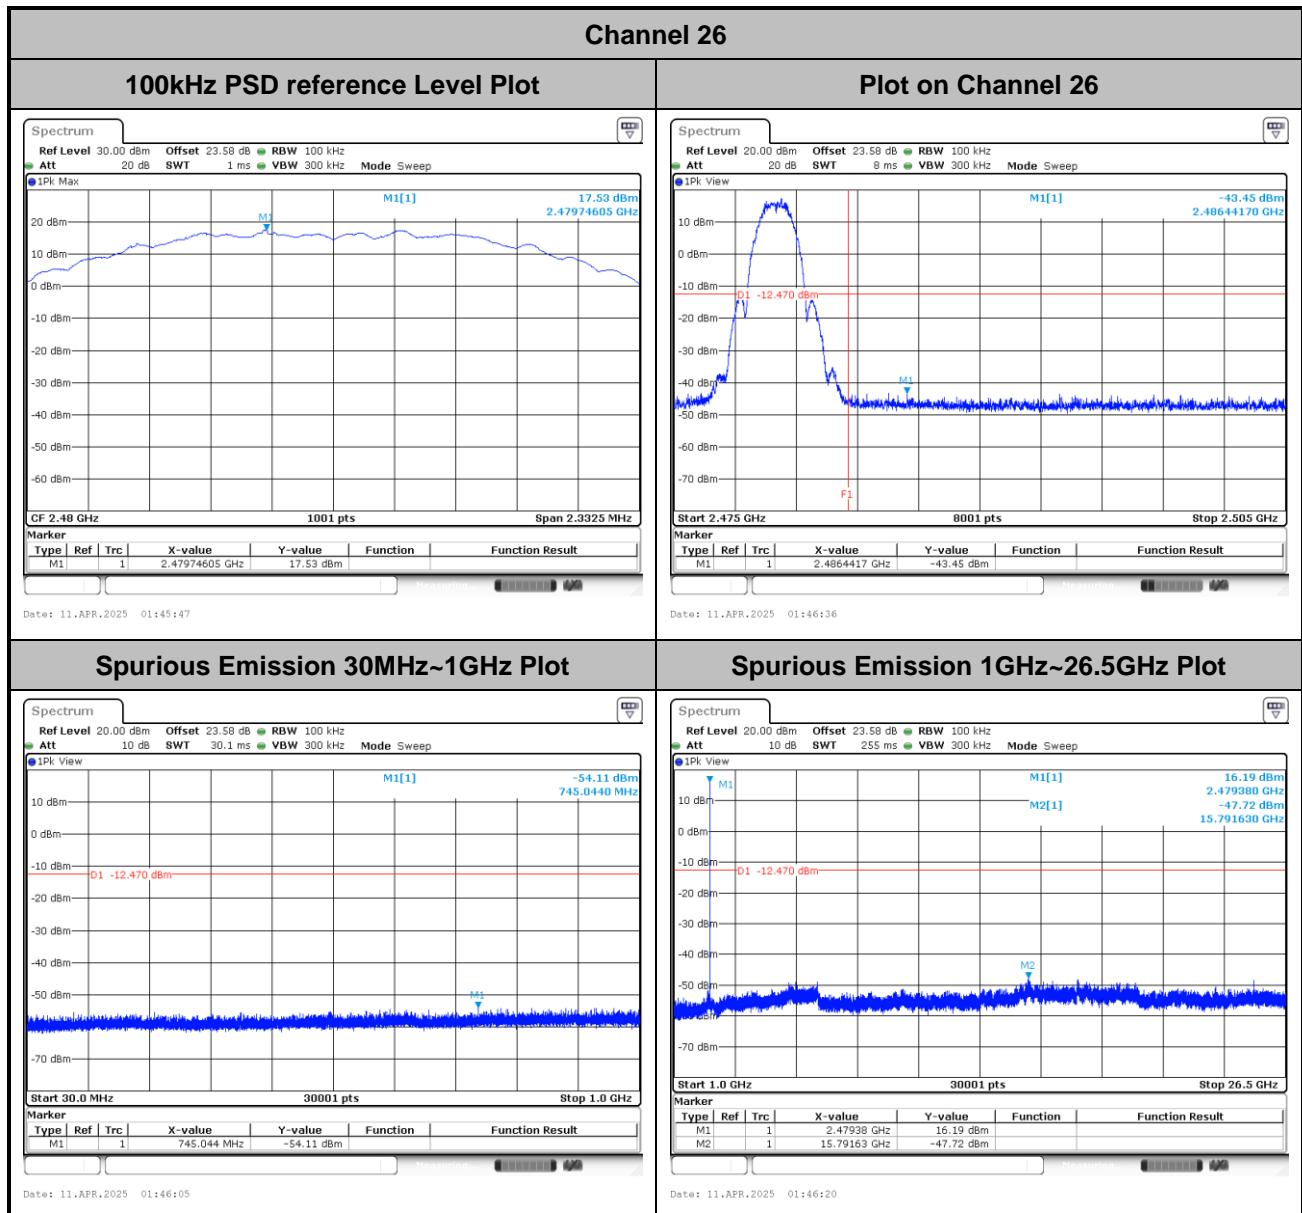




## Appendix B. AC Conducted Emission Test Results

<b>Test Engineer :</b>	Louis Chung	<b>Temperature :</b>	21.9~23.7°C
		<b>Relative Humidity :</b>	45.3~47.2%

## EUT Information

Report NO : 4N0920  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

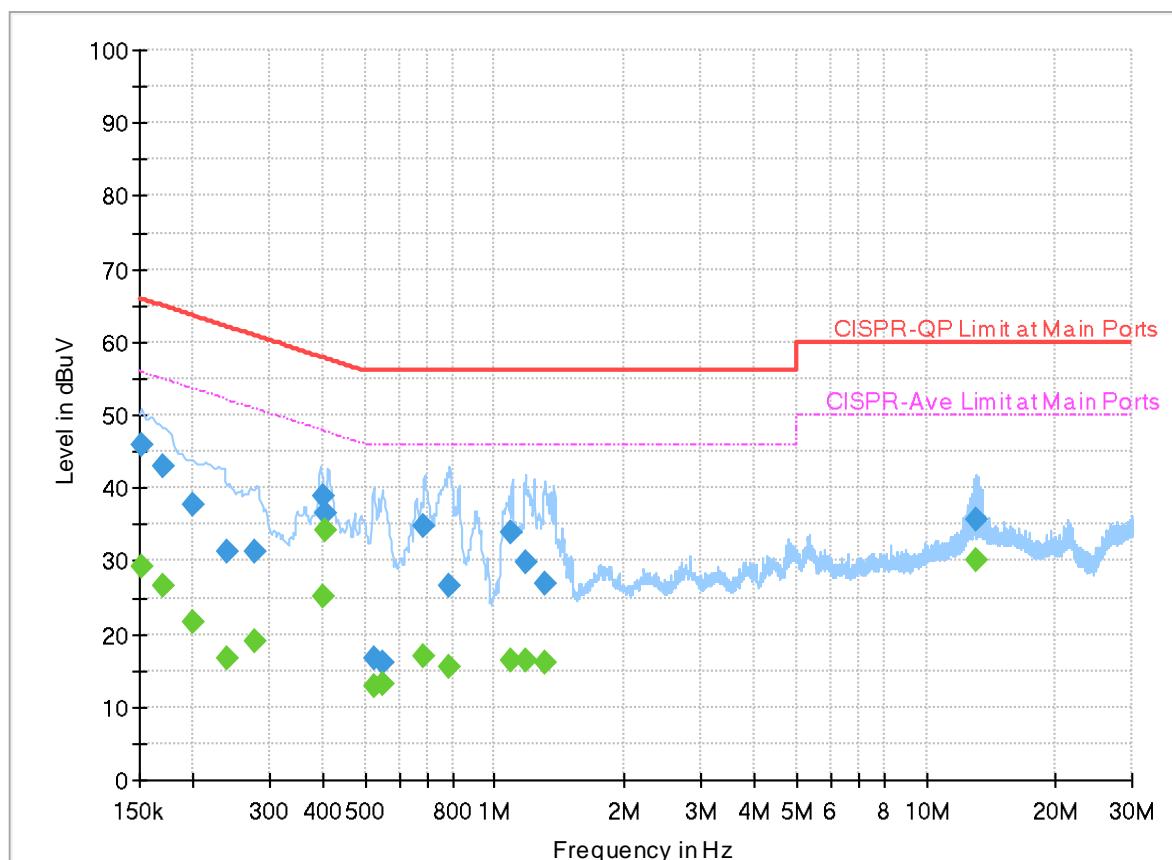

## Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.151418	---	29.36	55.92	26.56	L1	FLO	20.2
0.151418	46.00	---	65.92	19.92	L1	FLO	20.2
0.170250	---	26.60	54.95	28.35	L1	FLO	20.1
0.170250	42.89	---	64.95	22.06	L1	FLO	20.1
0.200400	---	21.55	53.59	32.04	L1	FLO	20.1
0.200400	37.75	---	63.59	25.84	L1	FLO	20.1
0.240000	---	16.68	52.10	35.42	L1	FLO	20.1
0.240000	31.16	---	62.10	30.94	L1	FLO	20.1
0.276000	---	19.12	50.94	31.82	L1	FLO	20.1
0.276000	31.38	---	60.94	29.56	L1	FLO	20.1
0.399300	---	25.19	47.87	22.68	L1	FLO	20.1
0.399300	38.92	---	57.87	18.95	L1	FLO	20.1
0.406500	---	34.07	47.72	13.65	L1	FLO	20.1
0.406500	36.41	---	57.72	21.31	L1	FLO	20.1
0.527280	---	12.95	46.00	33.05	L1	FLO	20.1
0.527280	16.63	---	56.00	39.37	L1	FLO	20.1
0.548250	---	13.13	46.00	32.87	L1	FLO	20.1
0.548250	16.15	---	56.00	39.85	L1	FLO	20.1
0.686580	---	17.05	46.00	28.95	L1	FLO	20.1

<b>0.686580</b>	<b>34.69</b>	---	<b>56.00</b>	<b>21.31</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>0.784320</b>	---	<b>15.38</b>	<b>46.00</b>	<b>30.62</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>0.784320</b>	<b>26.58</b>	---	<b>56.00</b>	<b>29.42</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>1.095000</b>	---	<b>16.27</b>	<b>46.00</b>	<b>29.73</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>1.095000</b>	<b>34.05</b>	---	<b>56.00</b>	<b>21.95</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>1.182750</b>	---	<b>16.40</b>	<b>46.00</b>	<b>29.60</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>1.182750</b>	<b>29.73</b>	---	<b>56.00</b>	<b>26.27</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>1.310460</b>	---	<b>15.96</b>	<b>46.00</b>	<b>30.04</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>1.310460</b>	<b>26.91</b>	---	<b>56.00</b>	<b>29.09</b>	L1	<b>FLO</b>	<b>20.1</b>
<b>13.056000</b>	---	<b>30.09</b>	<b>50.00</b>	<b>19.91</b>	L1	<b>FLO</b>	<b>20.2</b>
<b>13.056000</b>	<b>35.56</b>	---	<b>60.00</b>	<b>24.44</b>	L1	<b>FLO</b>	<b>20.2</b>

**EUT Information**

Report NO : 4N0920  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

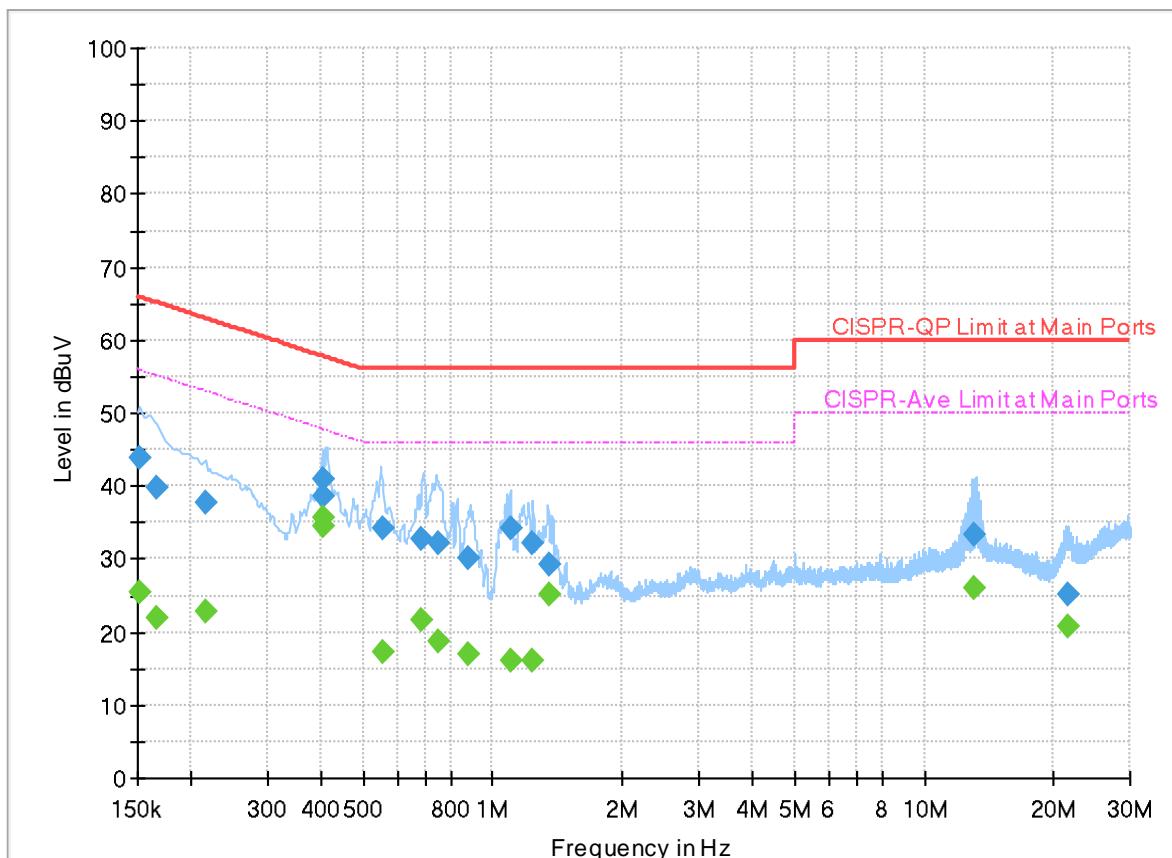**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.151620	---	25.51	55.91	30.40	N	FLO	20.1
0.151620	43.75	---	65.91	22.16	N	FLO	20.1
0.165390	---	21.86	55.19	33.33	N	FLO	20.1
0.165390	39.76	---	65.19	25.43	N	FLO	20.1
0.215250	---	22.91	53.00	30.09	N	FLO	20.1
0.215250	37.71	---	63.00	25.29	N	FLO	20.1
0.404340	---	35.70	47.76	12.06	N	FLO	20.1
0.404340	40.89	---	57.76	16.87	N	FLO	20.1
0.406500	---	34.53	47.72	13.19	N	FLO	20.1
0.406500	38.67	---	57.72	19.05	N	FLO	20.1
0.554640	---	17.31	46.00	28.69	N	FLO	20.1
0.554640	34.25	---	56.00	21.75	N	FLO	20.1
0.683250	---	21.51	46.00	24.49	N	FLO	20.1
0.683250	32.69	---	56.00	23.31	N	FLO	20.1
0.744000	---	18.72	46.00	27.28	N	FLO	20.1
0.744000	32.23	---	56.00	23.77	N	FLO	20.1
0.881250	---	16.83	46.00	29.17	N	FLO	20.1
0.881250	30.20	---	56.00	25.80	N	FLO	20.1
1.098510	---	15.98	46.00	30.02	N	FLO	20.1

<b>1.098510</b>	<b>34.27</b>	---	<b>56.00</b>	<b>21.73</b>	<b>N</b>	<b>FLO</b>	<b>20.1</b>
<b>1.237470</b>	---	<b>16.16</b>	<b>46.00</b>	<b>29.84</b>	<b>N</b>	<b>FLO</b>	<b>20.1</b>
<b>1.237470</b>	<b>32.12</b>	---	<b>56.00</b>	<b>23.88</b>	<b>N</b>	<b>FLO</b>	<b>20.1</b>
<b>1.349250</b>	---	<b>25.27</b>	<b>46.00</b>	<b>20.73</b>	<b>N</b>	<b>FLO</b>	<b>20.1</b>
<b>1.349250</b>	<b>29.35</b>	---	<b>56.00</b>	<b>26.65</b>	<b>N</b>	<b>FLO</b>	<b>20.1</b>
<b>13.037190</b>	---	<b>26.06</b>	<b>50.00</b>	<b>23.94</b>	<b>N</b>	<b>FLO</b>	<b>20.3</b>
<b>13.037190</b>	<b>33.32</b>	---	<b>60.00</b>	<b>26.68</b>	<b>N</b>	<b>FLO</b>	<b>20.3</b>
<b>21.527790</b>	---	<b>20.84</b>	<b>50.00</b>	<b>29.16</b>	<b>N</b>	<b>FLO</b>	<b>20.3</b>
<b>21.527790</b>	<b>25.07</b>	---	<b>60.00</b>	<b>34.93</b>	<b>N</b>	<b>FLO</b>	<b>20.3</b>



## Appendix C. Radiated Spurious Emission Test Data

<b>Test Engineer :</b>	Daniel Lee, Fu Chen and Troye Hsieh	<b>Temperature :</b>	19~22.5°C
		<b>Relative Humidity :</b>	50.1~65.7%

### Note symbol

-L	<b>Low channel location</b>
-R	<b>High channel location</b>



## C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	4	Thread	11	2405	250Kbps	-	-
Mode 2	2400-2483.5	4	Thread	18	2440	250Kbps	-	-
Mode 3	2400-2483.5	4	Thread	25	2475	250Kbps	-	-
Mode 4	2400-2483.5	4	Thread	26	2480	250Kbps	-	-
Mode 5	2400-2483.5	4	Thread	26	2480	250Kbps	-	SHF
Mode 6	2400-2483.5	4	Thread	26	2480	250Kbps	-	LF



## C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Thread-250Kbps	11	2388.95	42.63	54.00	-11.37	H	Avg.	Pass	-	Band Edge
	Thread-250Kbps	11	4810.00	40.37	74.00	-33.63	H	Peak	Pass	-	Harmonic
2	Thread-250Kbps	18	2489.56	43.47	54.00	-10.53	H	Avg.	Pass	-	Band Edge
	Thread-250Kbps	18	7320.00	42.63	74.00	-31.37	V	Peak	Pass	-	Harmonic
3	Thread-250Kbps	25	2483.68	43.99	54.00	-10.01	H	Avg.	Pass	-	Band Edge
	Thread-250Kbps	25	7425.00	43.44	74.00	-30.56	H	Peak	Pass	-	Harmonic
4	Thread-250Kbps	26	2483.52	50.83	54.00	-3.17	H	Avg.	Pass	-	Band Edge
	Thread-250Kbps	26	7440.00	43.08	74.00	-30.92	V	Peak	Pass	-	Harmonic
5	SHF	26	25592.00	34.86	74.00	-39.14	H	Peak	Pass	-	SHF
	SHF	26	25584.00	34.86	74.00	-39.14	V	Peak	Pass	-	SHF
6	LF	26	32.91	29.82	40.00	-10.18	V	QP	Pass	-	LF





Mode	1																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Thread-250Kbps _CH11_2405MHz																																																																																																					
ANT	4																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2318.84</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>43.13</td><td>27.20</td><td>7.09</td><td>33.27</td><td>10.01</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td><td>245 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2318.84	54.16	74.00	-19.84	43.13	27.20	7.09	33.27	10.01									227	245 PEAK	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>114.57</td><td>-----</td><td>-----</td><td>103.12</td><td>27.40</td><td>7.21</td><td>33.19</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td><td>245 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	114.57	-----	-----	103.12	27.40	7.21	33.19	10.03									227	245 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2318.84	54.16	74.00	-19.84	43.13	27.20	7.09	33.27	10.01																																																																																													
								227	245 PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2405.00	114.57	-----	-----	103.12	27.40	7.21	33.19	10.03																																																																																													
								227	245 PEAK																																																																																													
Avg	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.95</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>31.32</td><td>27.29</td><td>7.19</td><td>33.20</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td><td>245 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.95	42.63	54.00	-11.37	31.32	27.29	7.19	33.20	10.03									227	245 AVERAGE	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>112.63</td><td>-----</td><td>-----</td><td>101.18</td><td>27.40</td><td>7.21</td><td>33.19</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>227</td><td>245 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	112.63	-----	-----	101.18	27.40	7.21	33.19	10.03									227	245 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2388.95	42.63	54.00	-11.37	31.32	27.29	7.19	33.20	10.03																																																																																													
								227	245 AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2405.00	112.63	-----	-----	101.18	27.40	7.21	33.19	10.03																																																																																													
								227	245 AVERAGE																																																																																													







Mode	1																																																															
	Band Edge																																																															
	2400-2483.5_Thread-250Kbps_CH11_2405MHz																																																															
ANT	4																																																															
Pol.	Vertical	Fundamental																																																														
Peak	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.11</td><td>54.15</td><td>74.00</td><td>-19.85</td><td>42.93</td><td>27.22</td><td>7.18</td><td>33.21</td><td>10.03</td><td>386 135 PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.11	54.15	74.00	-19.85	42.93	27.22	7.18	33.21	10.03	386 135 PEAK	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>108.03</td><td>-----</td><td>-----</td><td>96.58</td><td>27.40</td><td>7.21</td><td>33.19</td><td>10.03</td><td>386 135 PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	108.03	-----	-----	96.58	27.40	7.21	33.19	10.03	386 135 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2382.11	54.15	74.00	-19.85	42.93	27.22	7.18	33.21	10.03	386 135 PEAK																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2405.00	108.03	-----	-----	96.58	27.40	7.21	33.19	10.03	386 135 PEAK																																																						
Avg	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.33</td><td>42.41</td><td>54.00</td><td>-11.59</td><td>31.10</td><td>27.29</td><td>7.19</td><td>33.20</td><td>10.03</td><td>386 135 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.33	42.41	54.00	-11.59	31.10	27.29	7.19	33.20	10.03	386 135 AVERAGE	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>106.14</td><td>-----</td><td>-----</td><td>94.69</td><td>27.40</td><td>7.21</td><td>33.19</td><td>10.03</td><td>386 135 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	106.14	-----	-----	94.69	27.40	7.21	33.19	10.03	386 135 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2389.33	42.41	54.00	-11.59	31.10	27.29	7.19	33.20	10.03	386 135 AVERAGE																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2405.00	106.14	-----	-----	94.69	27.40	7.21	33.19	10.03	386 135 AVERAGE																																																						



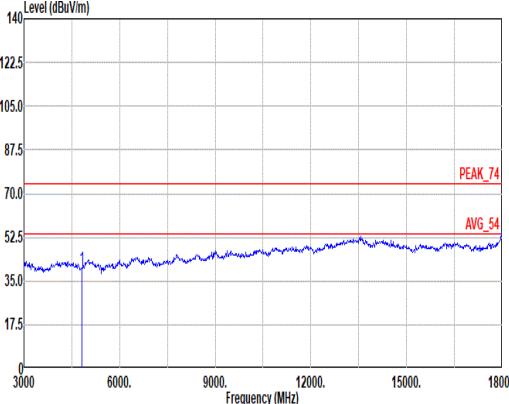
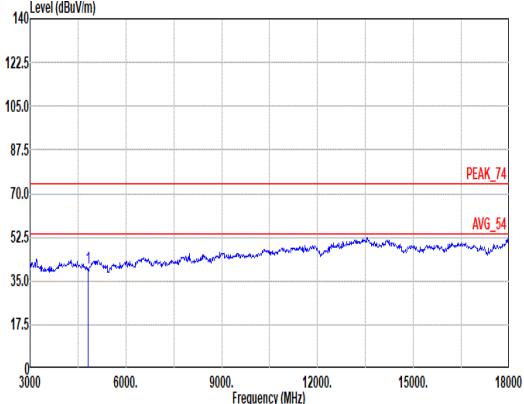


Mode	1																																								
	Harmonic																																								
	2400-2483.5_Thread-250Kbps_CH11_2405MHz																																								
ANT	4																																								
Pol.	Horizontal																																								
Peak																																									
	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>1</td><td>4810.00</td><td>40.37</td><td>74.00</td><td>-33.63</td><td>63.26</td><td>32.36</td><td>11.00</td><td>66.75</td><td>0.50</td></tr><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dB</td><td>dB</td><td>dB</td><td>dB</td><td>cm deg</td></tr></tbody></table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		1	4810.00	40.37	74.00	-33.63	63.26	32.36	11.00	66.75	0.50		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																	
1	4810.00	40.37	74.00	-33.63	63.26	32.36	11.00	66.75	0.50																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm deg																																

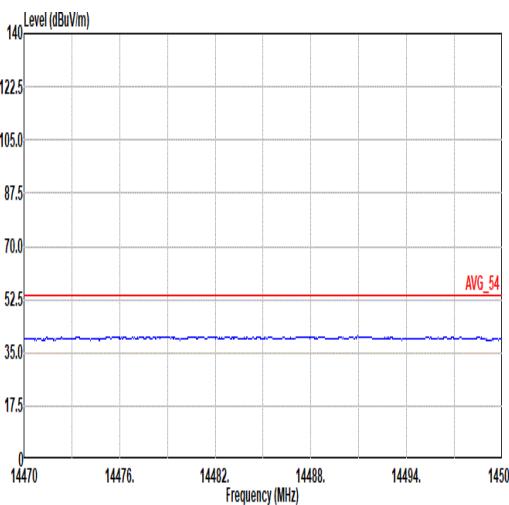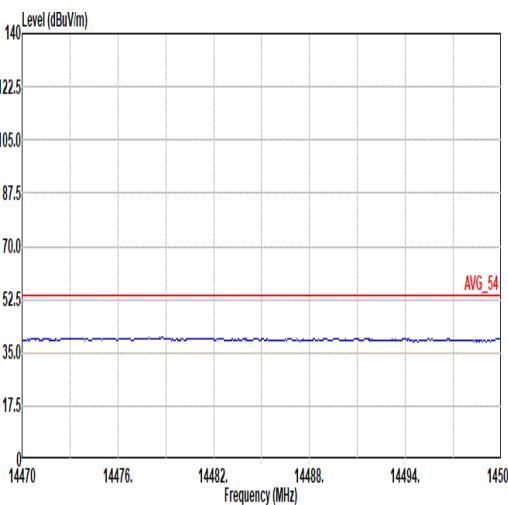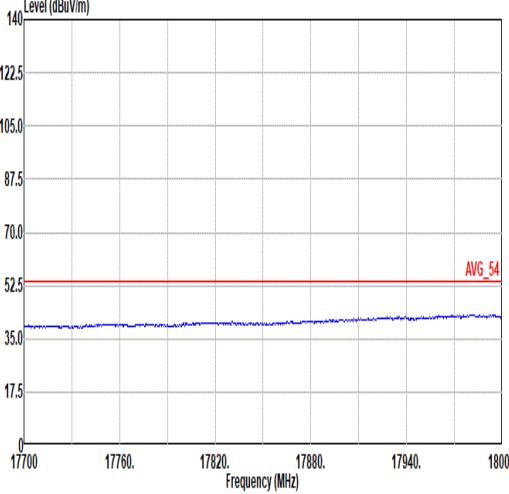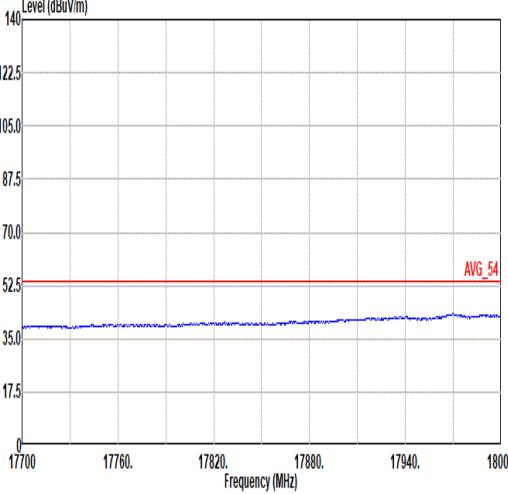

Mode	1	
	Harmonic	
	2400-2483.5_Thread-250Kbps_CH11_2405MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p>
17.7G ~18G Avg	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p>

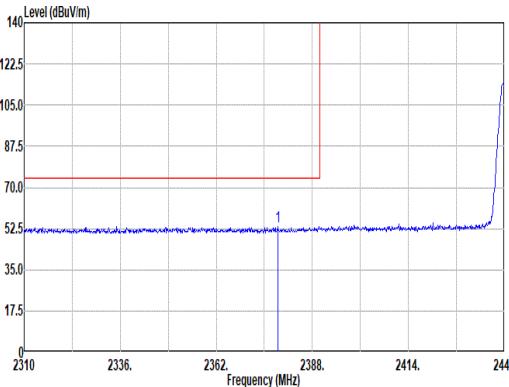
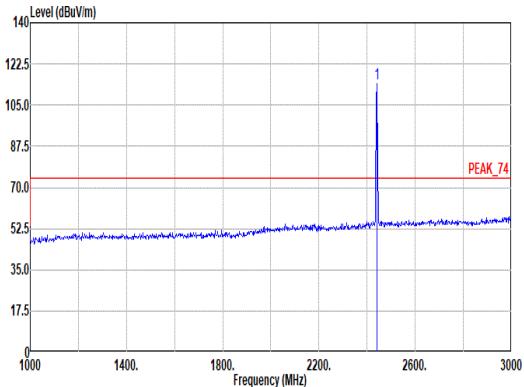
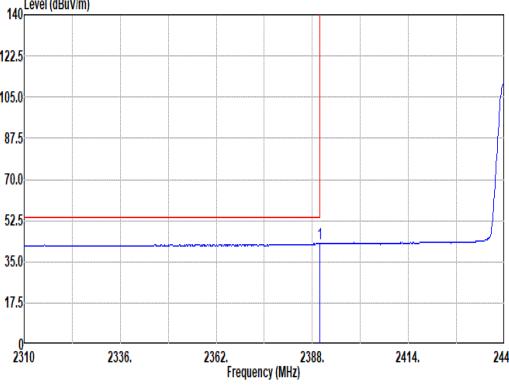
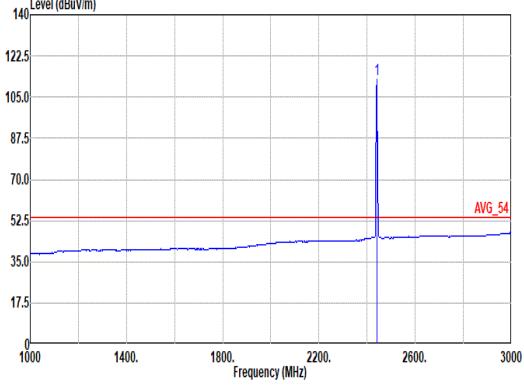


Mode	2																																																																																					
	Band Edge - L																																																																																					
	2400-2483.5_Thread-250Kbps_CH18_2440MHz																																																																																					
ANT	4																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2378.64</td><td>53.60</td><td>74.00</td><td>-28.40</td><td>42.42</td><td>27.20</td><td>7.17</td><td>33.21</td><td>10.02</td><td>105</td><td>242 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2378.64	53.60	74.00	-28.40	42.42	27.20	7.17	33.21	10.02	105	242 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>114.13</td><td>-----</td><td>-----</td><td>102.40</td><td>27.60</td><td>7.26</td><td>33.16</td><td>10.03</td><td>105</td><td>242 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	114.13	-----	-----	102.40	27.60	7.26	33.16	10.03	105	242 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2378.64	53.60	74.00	-28.40	42.42	27.20	7.17	33.21	10.02	105	242 PEAK																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2440.00	114.13	-----	-----	102.40	27.60	7.26	33.16	10.03	105	242 PEAK																																																																											
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>31.58</td><td>27.30</td><td>7.19</td><td>33.20</td><td>10.03</td><td>105</td><td>242 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.90	54.00	-11.10	31.58	27.30	7.19	33.20	10.03	105	242 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>112.29</td><td>-----</td><td>-----</td><td>100.56</td><td>27.60</td><td>7.26</td><td>33.16</td><td>10.03</td><td>105</td><td>242 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	112.29	-----	-----	100.56	27.60	7.26	33.16	10.03	105	242 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2389.95	42.90	54.00	-11.10	31.58	27.30	7.19	33.20	10.03	105	242 AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2440.00	112.29	-----	-----	100.56	27.60	7.26	33.16	10.03	105	242 AVERAGE																																																																											





	2																																																			
Mode	Band Edge - R																																																			
	2400-2483.5_Thread-250Kbps _CH18_2440MHz																																																			
ANT	4																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2491.96</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>42.24</td><td>27.90</td><td>7.33</td><td>33.11</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>105 242 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.96	54.39	74.00	-19.61	42.24	27.90	7.33	33.11	10.03										105 242 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2491.96	54.39	74.00	-19.61	42.24	27.90	7.33	33.11	10.03																																											
									105 242 PEAK																																											
Avg	<p>Level (dBuV/m)</p> <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2489.56</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>31.32</td><td>27.90</td><td>7.33</td><td>33.11</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>105 242 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.56	43.47	54.00	-10.53	31.32	27.90	7.33	33.11	10.03										105 242 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2489.56	43.47	54.00	-10.53	31.32	27.90	7.33	33.11	10.03																																											
									105 242 AVERAGE																																											

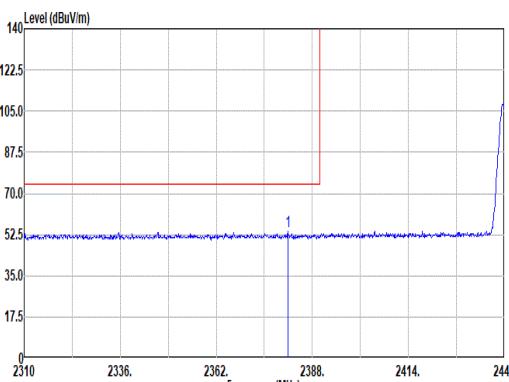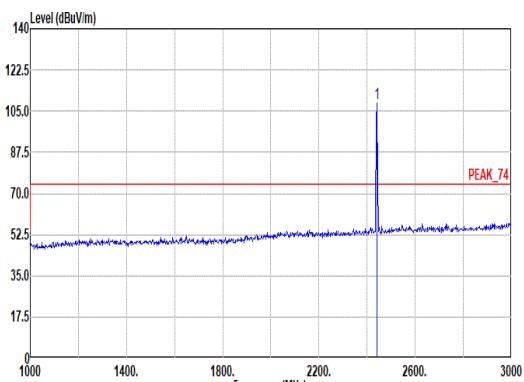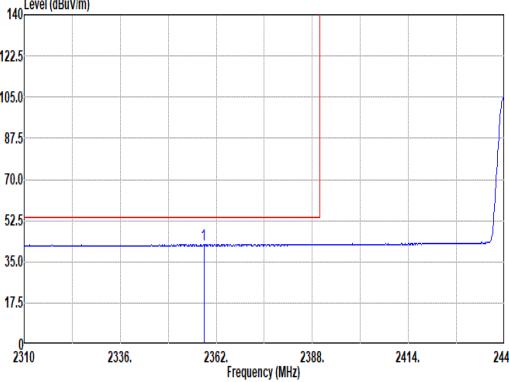
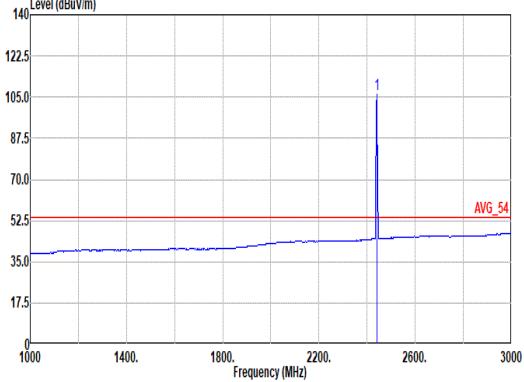


Mode	2																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_Thread-250Kbps_CH18_2440MHz																																																																																	
ANT	4																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2381.37</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>42.49</td><td>27.21</td><td>7.17</td><td>33.21</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>376</td><td>133 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.37	53.69	74.00	-20.31	42.49	27.21	7.17	33.21	10.03									376	133 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>108.26</td><td>-----</td><td>-----</td><td>96.53</td><td>27.60</td><td>7.26</td><td>33.16</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>376</td><td>133 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	108.26	-----	-----	96.53	27.60	7.26	33.16	10.03									376	133 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2381.37	53.69	74.00	-20.31	42.49	27.21	7.17	33.21	10.03																																																																									
								376	133 PEAK																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2440.00	108.26	-----	-----	96.53	27.60	7.26	33.16	10.03																																																																									
								376	133 PEAK																																																																									
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2358.62</td><td>42.30</td><td>54.00</td><td>-11.70</td><td>31.17</td><td>27.20</td><td>7.14</td><td>33.23</td><td>10.02</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>376</td><td>133 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.62	42.30	54.00	-11.70	31.17	27.20	7.14	33.23	10.02									376	133 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2440.00</td><td>106.41</td><td>-----</td><td>-----</td><td>94.68</td><td>27.60</td><td>7.26</td><td>33.16</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>376</td><td>133 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	106.41	-----	-----	94.68	27.60	7.26	33.16	10.03									376	133 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2358.62	42.30	54.00	-11.70	31.17	27.20	7.14	33.23	10.02																																																																									
								376	133 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2440.00	106.41	-----	-----	94.68	27.60	7.26	33.16	10.03																																																																									
								376	133 AVERAGE																																																																									



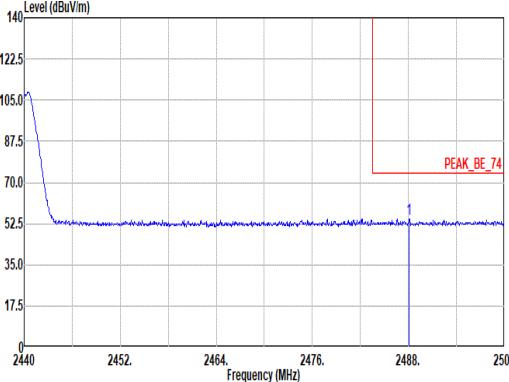
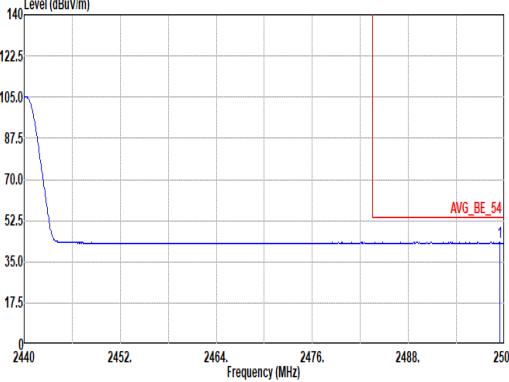


	2																																																			
Mode	Band Edge - R																																																			
	2400-2483.5_Thread-250Kbps _CH18_2440MHz																																																			
ANT	4																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2488.12</td><td>54.60</td><td>74.00</td><td>-19.40</td><td>42.48</td><td>27.88</td><td>7.32</td><td>33.11</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>376</td><td>133 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.12	54.60	74.00	-19.40	42.48	27.88	7.32	33.11	10.03									376	133 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2488.12	54.60	74.00	-19.40	42.48	27.88	7.32	33.11	10.03																																											
								376	133 PEAK																																											
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2499.40</td><td>43.22</td><td>54.00</td><td>-10.78</td><td>31.05</td><td>27.90</td><td>7.34</td><td>33.10</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>376</td><td>133 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.40	43.22	54.00	-10.78	31.05	27.90	7.34	33.10	10.03									376	133 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2499.40	43.22	54.00	-10.78	31.05	27.90	7.34	33.10	10.03																																											
								376	133 AVERAGE																																											



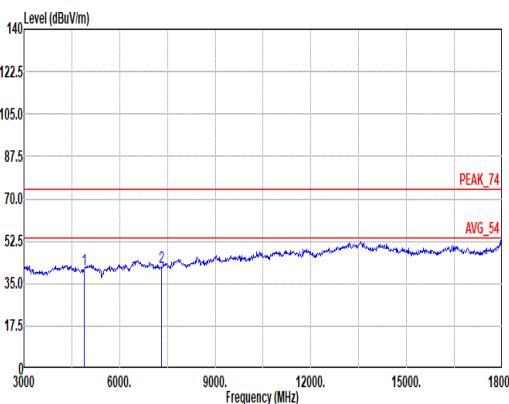
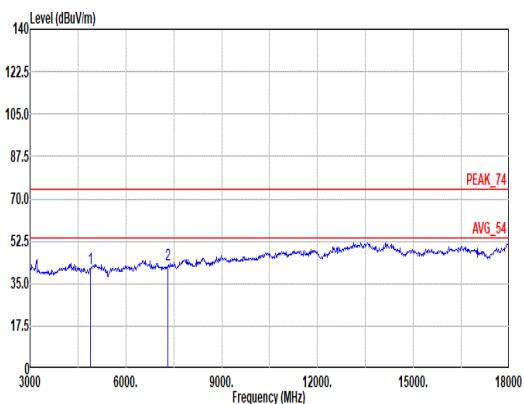


Mode	2																																																																																
	Harmonic																																																																																
	2400-2483.5_Thread-250Kbps_CH18_2440MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal																																																																																
Peak Avg																																																																																	
	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>40.68</td><td>74.00</td><td>-33.32</td><td>62.79</td><td>32.72</td><td>11.33</td><td>66.70</td><td>0.54</td></tr><tr><td>2</td><td>7320.00</td><td>41.77</td><td>74.00</td><td>-32.23</td><td>55.88</td><td>36.76</td><td>14.60</td><td>65.78</td><td>0.31</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4880.00	40.68	74.00	-33.32	62.79	32.72	11.33	66.70	0.54	2	7320.00	41.77	74.00	-32.23	55.88	36.76	14.60	65.78	0.31	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>41.10</td><td>74.00</td><td>-32.90</td><td>63.21</td><td>32.72</td><td>11.33</td><td>66.70</td><td>0.54</td></tr><tr><td>2</td><td>7320.00</td><td>42.63</td><td>74.00</td><td>-31.37</td><td>56.74</td><td>36.76</td><td>14.60</td><td>65.78</td><td>0.31</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4880.00	41.10	74.00	-32.90	63.21	32.72	11.33	66.70	0.54	2	7320.00	42.63	74.00	-31.37	56.74	36.76	14.60	65.78
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4880.00	40.68	74.00	-33.32	62.79	32.72	11.33	66.70	0.54																																																																								
2	7320.00	41.77	74.00	-32.23	55.88	36.76	14.60	65.78	0.31																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4880.00	41.10	74.00	-32.90	63.21	32.72	11.33	66.70	0.54																																																																								
2	7320.00	42.63	74.00	-31.37	56.74	36.76	14.60	65.78	0.31																																																																								

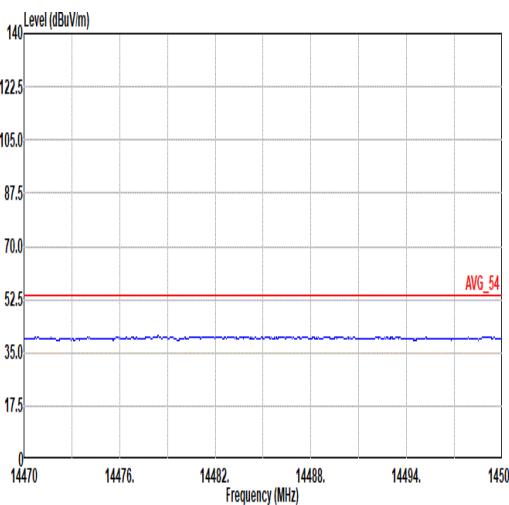
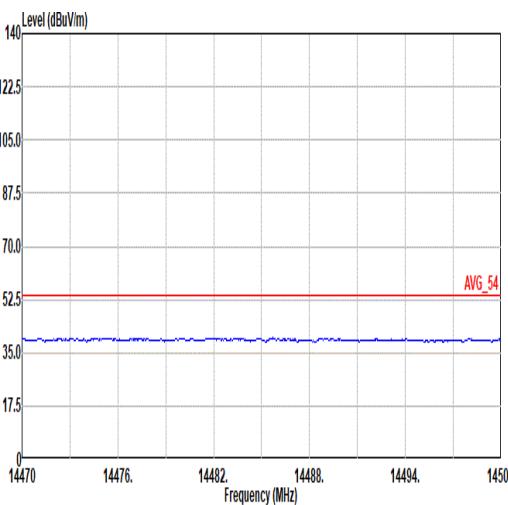
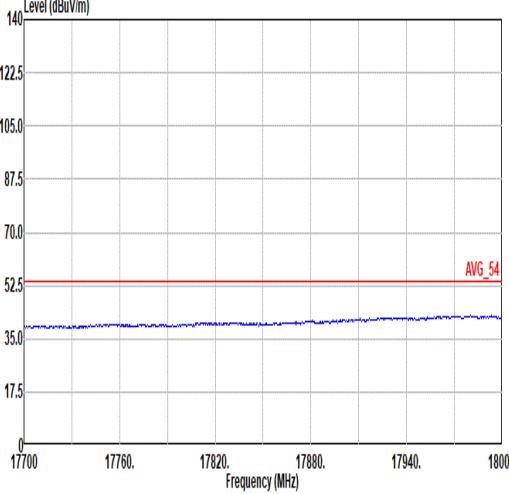
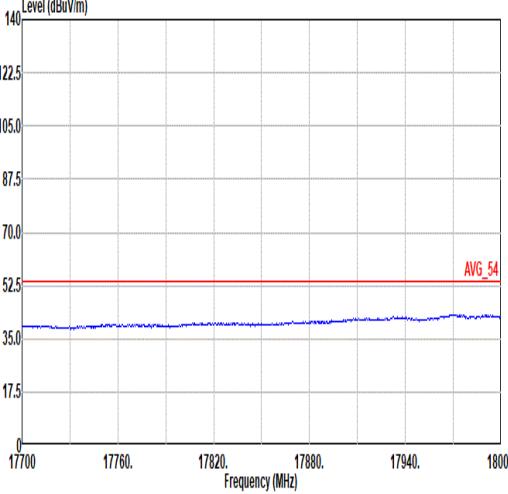


Mode	2	
	Harmonic	
	2400-2483.5_Thread-250Kbps_CH18_2440MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL

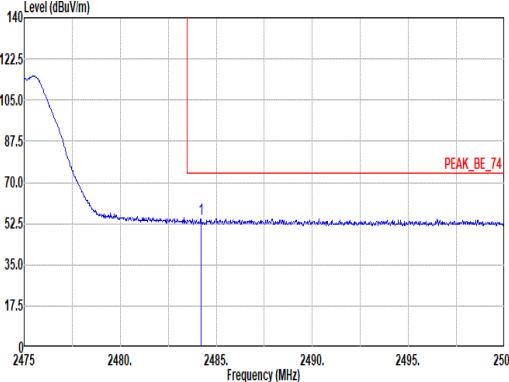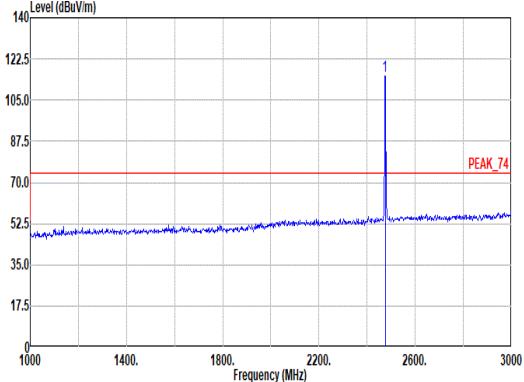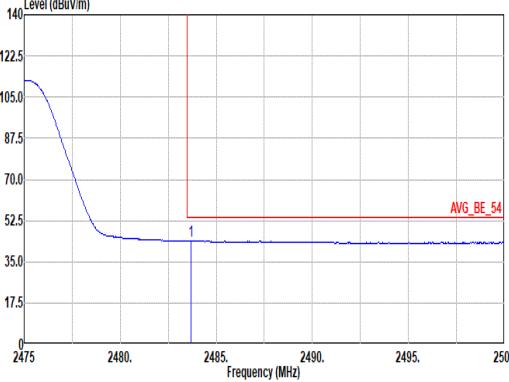
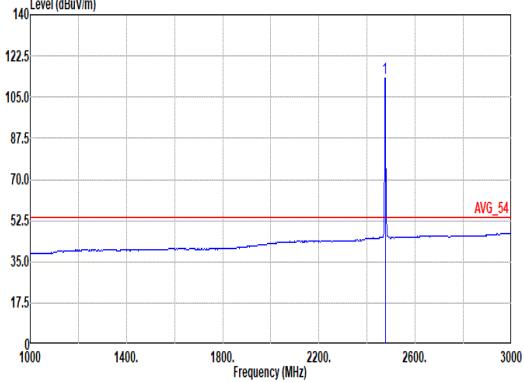


Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Thread-250Kbps _CH25_2475MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.20</td><td>54.54</td><td>74.00</td><td>-19.46</td><td>42.46</td><td>27.84</td><td>7.32</td><td>33.11</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>104 255 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2484.20	54.54	74.00	-19.46	42.46	27.84	7.32	33.11	10.03										104 255 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>115.16</td><td>-----</td><td>-----</td><td>103.18</td><td>27.76</td><td>7.31</td><td>33.12</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>104 255 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2475.00	115.16	-----	-----	103.18	27.76	7.31	33.12	10.03										104 255 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
1	2484.20	54.54	74.00	-19.46	42.46	27.84	7.32	33.11	10.03																																																																									
									104 255 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
1	2475.00	115.16	-----	-----	103.18	27.76	7.31	33.12	10.03																																																																									
									104 255 PEAK																																																																									
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.68</td><td>43.99</td><td>54.00</td><td>-10.01</td><td>31.92</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>104 255 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2483.68	43.99	54.00	-10.01	31.92	27.84	7.32	33.12	10.03										104 255 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>113.22</td><td>-----</td><td>-----</td><td>101.24</td><td>27.76</td><td>7.31</td><td>33.12</td><td>10.03</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>104 255 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2475.00	113.22	-----	-----	101.24	27.76	7.31	33.12	10.03										104 255 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
1	2483.68	43.99	54.00	-10.01	31.92	27.84	7.32	33.12	10.03																																																																									
									104 255 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
1	2475.00	113.22	-----	-----	101.24	27.76	7.31	33.12	10.03																																																																									
									104 255 AVERAGE																																																																									

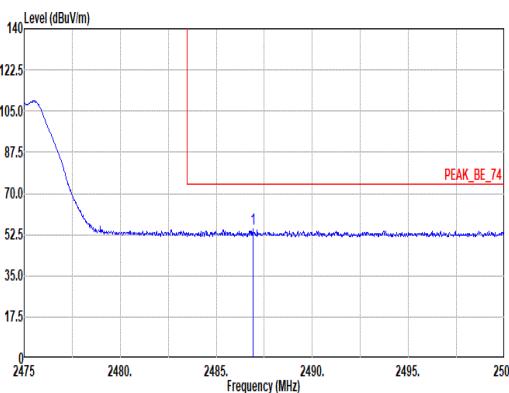
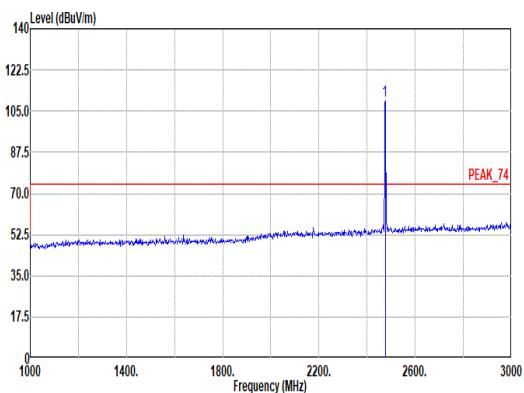
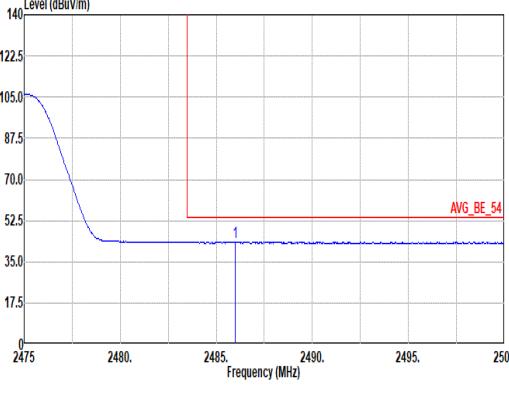
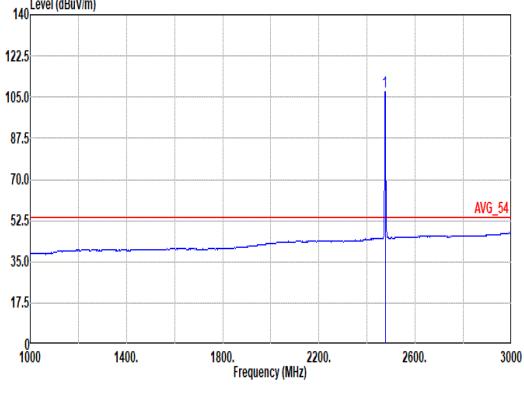


Mode	3																																																															
	Band Edge																																																															
	2400-2483.5_Thread-250Kbps _CH25_2475MHz																																																															
ANT	4																																																															
Pol.	Vertical	Fundamental																																																														
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2486.90</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>42.84</td><td>27.87</td><td>7.32</td><td>33.11</td><td>10.03</td><td>400 136 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2486.90	54.95	74.00	-19.05	42.84	27.87	7.32	33.11	10.03	400 136 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>109.22</td><td>-----</td><td>-----</td><td>97.24</td><td>27.76</td><td>7.31</td><td>33.12</td><td>10.03</td><td>400 136 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2475.00	109.22	-----	-----	97.24	27.76	7.31	33.12	10.03	400 136 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																											
1	2486.90	54.95	74.00	-19.05	42.84	27.87	7.32	33.11	10.03	400 136 PEAK																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																											
1	2475.00	109.22	-----	-----	97.24	27.76	7.31	33.12	10.03	400 136 PEAK																																																						
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2485.98</td><td>43.30</td><td>54.00</td><td>-10.70</td><td>31.20</td><td>27.86</td><td>7.32</td><td>33.11</td><td>10.03</td><td>400 136 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2485.98	43.30	54.00	-10.70	31.20	27.86	7.32	33.11	10.03	400 136 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2475.00</td><td>107.31</td><td>-----</td><td>-----</td><td>95.33</td><td>27.76</td><td>7.31</td><td>33.12</td><td>10.03</td><td>400 136 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					1	2475.00	107.31	-----	-----	95.33	27.76	7.31	33.12	10.03	400 136 AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																											
1	2485.98	43.30	54.00	-10.70	31.20	27.86	7.32	33.11	10.03	400 136 AVERAGE																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																											
1	2475.00	107.31	-----	-----	95.33	27.76	7.31	33.12	10.03	400 136 AVERAGE																																																						
Avg																																																																



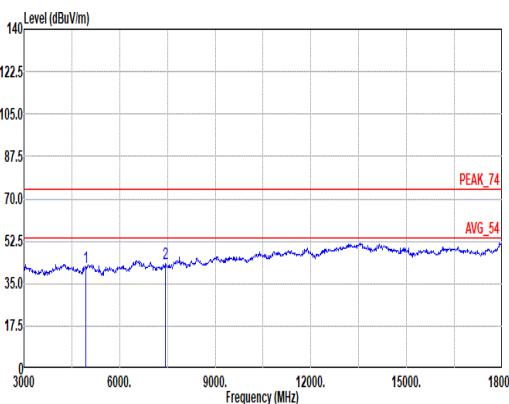
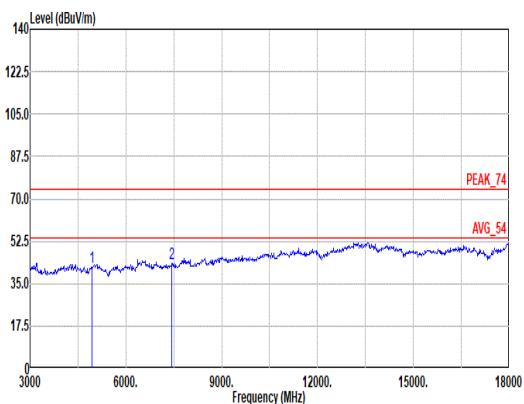


Mode	3																																																																																
	Harmonic																																																																																
	2400-2483.5_Thread-250Kbps_CH25_2475MHz																																																																																
ANT	4																																																																																
Pol.	Horizontal																																																																																
Peak Avg																																																																																	
	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4950.00</td><td>41.83</td><td>74.00</td><td>-32.17</td><td>63.24</td><td>33.08</td><td>11.66</td><td>66.64</td><td>0.57</td></tr><tr><td>2</td><td>7425.00</td><td>43.44</td><td>74.00</td><td>-30.56</td><td>58.05</td><td>36.30</td><td>14.69</td><td>65.91</td><td>0.31</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4950.00	41.83	74.00	-32.17	63.24	33.08	11.66	66.64	0.57	2	7425.00	43.44	74.00	-30.56	58.05	36.30	14.69	65.91	0.31	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4950.00</td><td>41.67</td><td>74.00</td><td>-32.33</td><td>63.08</td><td>33.08</td><td>11.66</td><td>66.64</td><td>0.57</td></tr><tr><td>2</td><td>7425.00</td><td>43.14</td><td>74.00</td><td>-30.86</td><td>57.75</td><td>36.30</td><td>14.69</td><td>65.91</td><td>0.31</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4950.00	41.67	74.00	-32.33	63.08	33.08	11.66	66.64	0.57	2	7425.00	43.14	74.00	-30.86	57.75	36.30	14.69	65.91
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4950.00	41.83	74.00	-32.17	63.24	33.08	11.66	66.64	0.57																																																																								
2	7425.00	43.44	74.00	-30.56	58.05	36.30	14.69	65.91	0.31																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																										
1	4950.00	41.67	74.00	-32.33	63.08	33.08	11.66	66.64	0.57																																																																								
2	7425.00	43.14	74.00	-30.86	57.75	36.30	14.69	65.91	0.31																																																																								

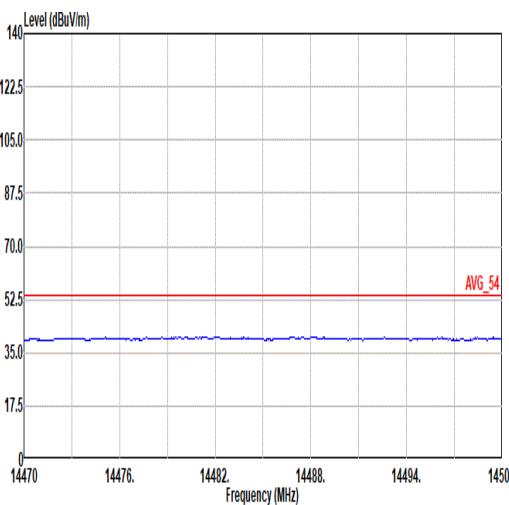
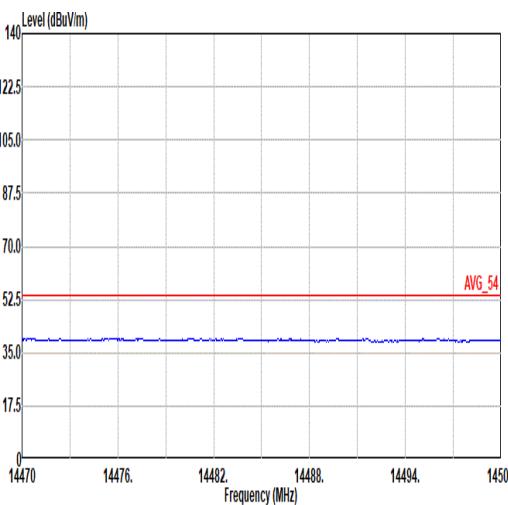
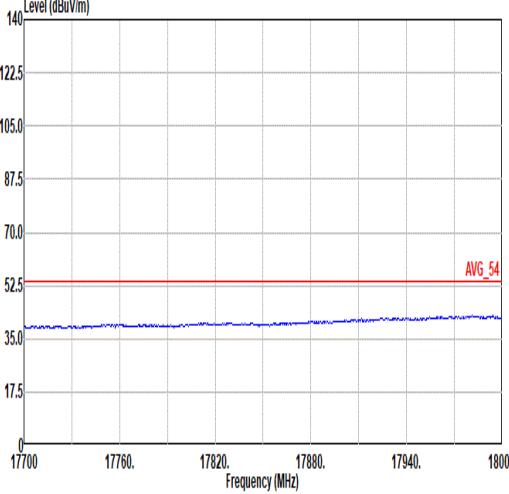
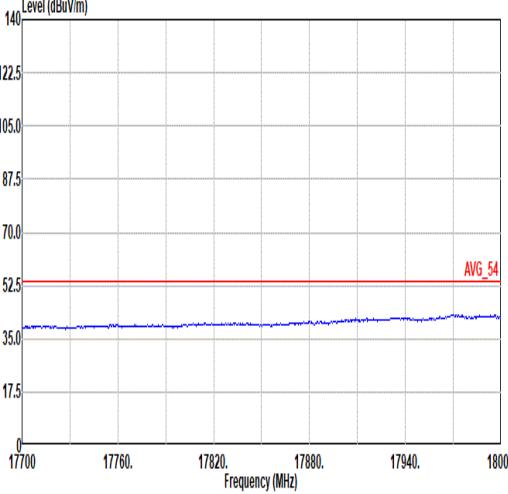


Mode	3	
	Harmonic	
	2400-2483.5_Thread-250Kbps_CH25_2475MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL

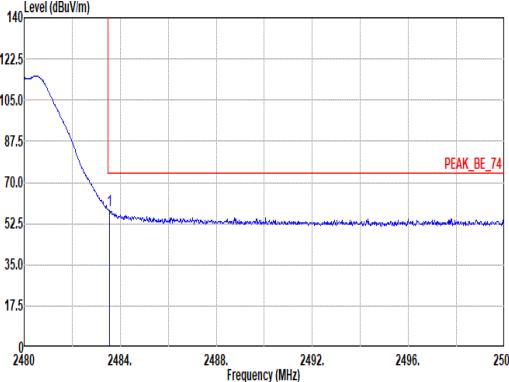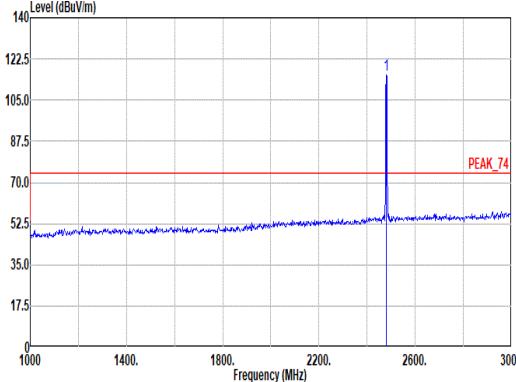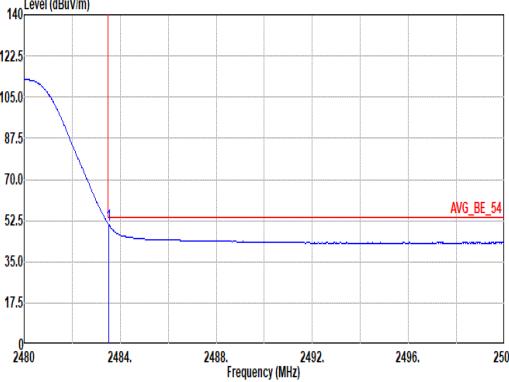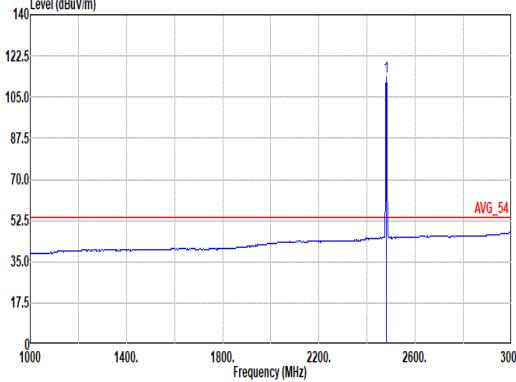

Mode	4																																																															
	Band Edge																																																															
	2400-2483.5_Thread-250Kbps _CH26_2480MHz																																																															
ANT	4																																																															
Pol.	Horizontal	Fundamental																																																														
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.54</td><td>57.98</td><td>74.00</td><td>-16.02</td><td>45.91</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>100 252 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	57.98	74.00	-16.02	45.91	27.84	7.32	33.12	10.03	100 252 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>115.62</td><td>-----</td><td>-----</td><td>103.60</td><td>27.80</td><td>7.31</td><td>33.12</td><td>10.03</td><td>100 252 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	115.62	-----	-----	103.60	27.80	7.31	33.12	10.03	100 252 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2483.54	57.98	74.00	-16.02	45.91	27.84	7.32	33.12	10.03	100 252 PEAK																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2480.00	115.62	-----	-----	103.60	27.80	7.31	33.12	10.03	100 252 PEAK																																																						
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.52</td><td>50.83</td><td>54.00</td><td>-3.17</td><td>38.76</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>100 252 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	50.83	54.00	-3.17	38.76	27.84	7.32	33.12	10.03	100 252 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>113.64</td><td>-----</td><td>-----</td><td>101.62</td><td>27.80</td><td>7.31</td><td>33.12</td><td>10.03</td><td>100 252 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	113.64	-----	-----	101.62	27.80	7.31	33.12	10.03	100 252 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2483.52	50.83	54.00	-3.17	38.76	27.84	7.32	33.12	10.03	100 252 AVERAGE																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2480.00	113.64	-----	-----	101.62	27.80	7.31	33.12	10.03	100 252 AVERAGE																																																						

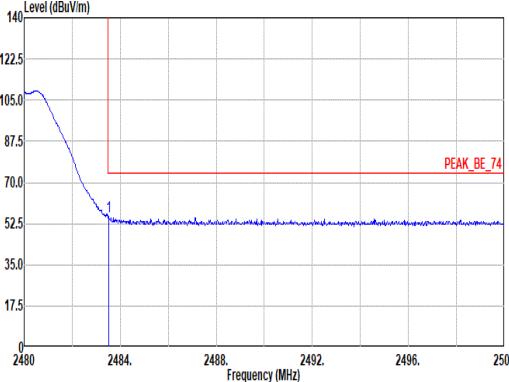
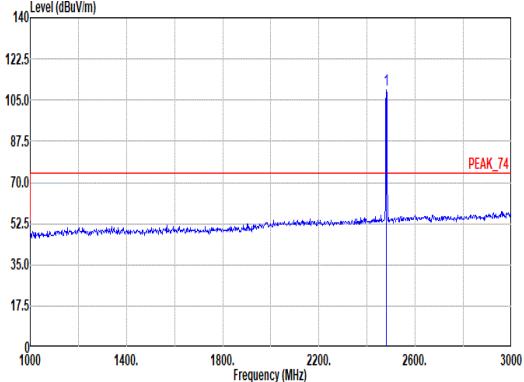
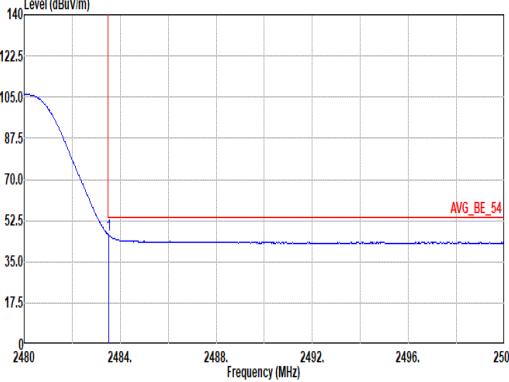
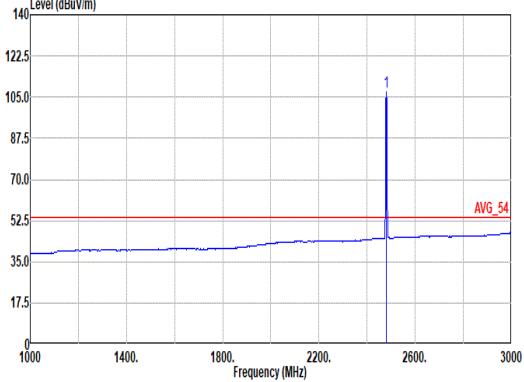


Mode	4																																																															
	Band Edge																																																															
	2400-2483.5_Thread-250Kbps _CH26_2480MHz																																																															
ANT	4																																																															
Pol.	Vertical	Fundamental																																																														
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.52</td><td>55.43</td><td>74.00</td><td>-18.57</td><td>43.36</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>400 139 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	55.43	74.00	-18.57	43.36	27.84	7.32	33.12	10.03	400 139 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>109.35</td><td>-----</td><td>-----</td><td>97.33</td><td>27.80</td><td>7.31</td><td>33.12</td><td>10.03</td><td>400 139 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	109.35	-----	-----	97.33	27.80	7.31	33.12	10.03	400 139 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2483.52	55.43	74.00	-18.57	43.36	27.84	7.32	33.12	10.03	400 139 PEAK																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2480.00	109.35	-----	-----	97.33	27.80	7.31	33.12	10.03	400 139 PEAK																																																						
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2483.52</td><td>46.39</td><td>54.00</td><td>-7.61</td><td>34.32</td><td>27.84</td><td>7.32</td><td>33.12</td><td>10.03</td><td>400 139 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	46.39	54.00	-7.61	34.32	27.84	7.32	33.12	10.03	400 139 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>107.31</td><td>-----</td><td>-----</td><td>95.29</td><td>27.80</td><td>7.31</td><td>33.12</td><td>10.03</td><td>400 139 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	107.31	-----	-----	95.29	27.80	7.31	33.12	10.03	400 139 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2483.52	46.39	54.00	-7.61	34.32	27.84	7.32	33.12	10.03	400 139 AVERAGE																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2480.00	107.31	-----	-----	95.29	27.80	7.31	33.12	10.03	400 139 AVERAGE																																																						





Mode	4																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Thread-250Kbps_CH26_2480MHz																																																																																	
ANT	4																																																																																	
Pol.	Horizontal																																																																																	
Peak																																																																																		
Avg	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>42.44</td><td>74.00</td><td>-31.56</td><td>63.78</td><td>33.02</td><td>11.70</td><td>66.63</td><td>0.57</td></tr><tr><td>2</td><td>7440.00</td><td>42.17</td><td>74.00</td><td>-31.83</td><td>56.83</td><td>36.24</td><td>14.71</td><td>65.93</td><td>0.32</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4960.00	42.44	74.00	-31.56	63.78	33.02	11.70	66.63	0.57	2	7440.00	42.17	74.00	-31.83	56.83	36.24	14.71	65.93	0.32	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>42.18</td><td>74.00</td><td>-31.82</td><td>63.52</td><td>33.02</td><td>11.70</td><td>66.63</td><td>0.57</td></tr><tr><td>2</td><td>7440.00</td><td>43.08</td><td>74.00</td><td>-30.92</td><td>57.74</td><td>36.24</td><td>14.71</td><td>65.93</td><td>0.32</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	4960.00	42.18	74.00	-31.82	63.52	33.02	11.70	66.63	0.57	2	7440.00	43.08	74.00	-30.92	57.74	36.24	14.71	65.93	0.32
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	4960.00	42.44	74.00	-31.56	63.78	33.02	11.70	66.63	0.57																																																																									
2	7440.00	42.17	74.00	-31.83	56.83	36.24	14.71	65.93	0.32																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
1	4960.00	42.18	74.00	-31.82	63.52	33.02	11.70	66.63	0.57																																																																									
2	7440.00	43.08	74.00	-30.92	57.74	36.24	14.71	65.93	0.32																																																																									

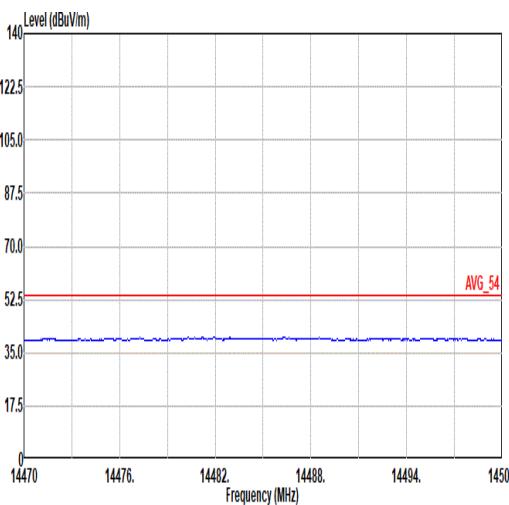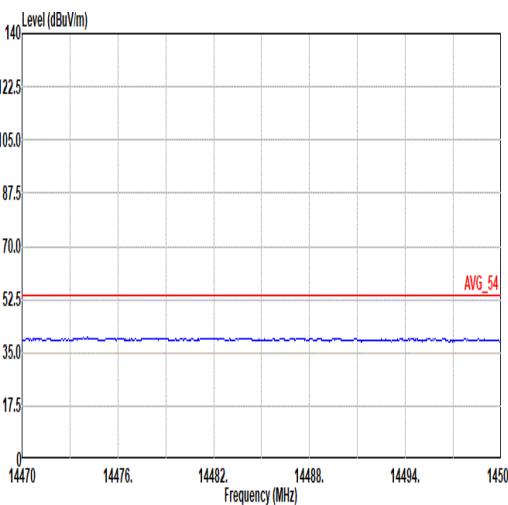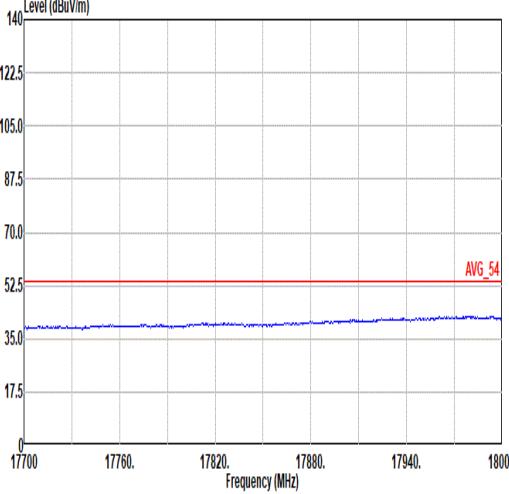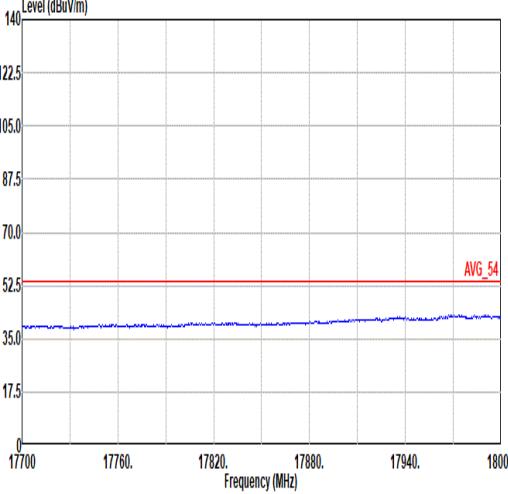

Mode	4	
	Harmonic	
	2400-2483.5_Thread-250Kbps_CH26_2480MHz	
ANT	4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL
17.7G ~18G Avg	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL

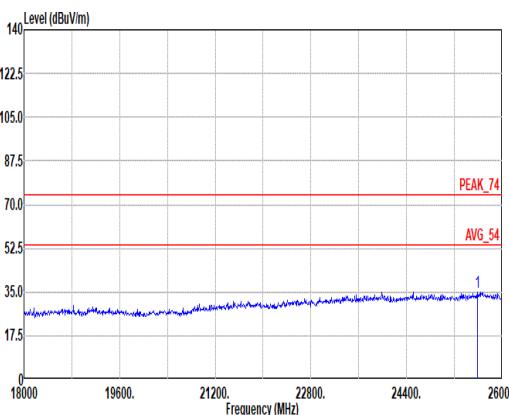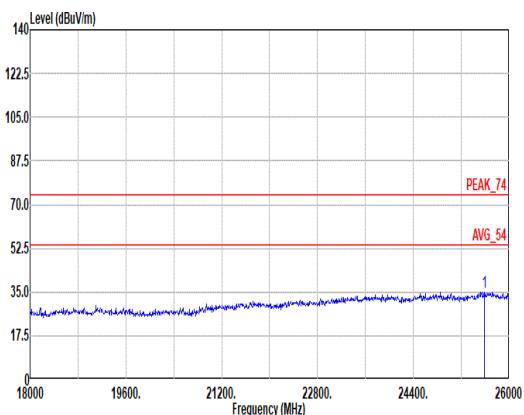

Mode	5																																																																																																				
	SHF																																																																																																				
	2400-2483.5_Thread-250Kbps_CH26_2480MHz																																																																																																				
ANT	4																																																																																																				
Pol.	Horizontal																																																																																																				
Peak																																																																																																					
	<p>Site : 03CH11-HY Condition: PEAK_74 1m SHF_1223_240624 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dB</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>25592.00</td><td>34.86</td><td>74.00</td><td>-39.14</td><td>35.98</td><td>39.18</td><td>29.74</td><td>60.50</td><td>-9.54</td></tr><tr><td></td><td></td><td></td><td></td><td>--</td><td></td><td></td><td>--</td><td>--</td><td>-- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	25592.00	34.86	74.00	-39.14	35.98	39.18	29.74	60.50	-9.54					--			--	--	-- PEAK	<p>Site : 03CH11-HY Condition: PEAK_74 1m SHF_1223_240624 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>1</td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dB</td><td>dB</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1</td><td>25584.00</td><td>34.86</td><td>74.00</td><td>-39.14</td><td>35.99</td><td>39.17</td><td>29.74</td><td>60.50</td><td>-9.54</td></tr><tr><td></td><td></td><td></td><td></td><td>--</td><td></td><td></td><td>--</td><td>--</td><td>-- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm deg	1	25584.00	34.86	74.00	-39.14	35.99	39.17	29.74	60.50	-9.54					--			--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																													
1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																																												
1	25592.00	34.86	74.00	-39.14	35.98	39.18	29.74	60.50	-9.54																																																																																												
				--			--	--	-- PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																													
1	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	cm deg																																																																																												
1	25584.00	34.86	74.00	-39.14	35.99	39.17	29.74	60.50	-9.54																																																																																												
				--			--	--	-- PEAK																																																																																												




Mode	6																																																																																																																																																																													
	LF																																																																																																																																																																													
	2400-2483.5_Thread-250Kbps_CH26_2480MHz																																																																																																																																																																													
ANT	4																																																																																																																																																																													
Pol.	Horizontal																																																																																																																																																																													
QP/ Peak	<p>Site : 03CH11-HY Condition: QP 3m BILOG_37059801_241127 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>38.97</td> <td>28.85</td> <td>40.00</td> <td>-11.15</td> <td>36.11</td> <td>24.21</td> <td>0.87</td> <td>32.41</td> <td>0.07</td> <td>100 222 QP</td> </tr> <tr> <td>2</td> <td>94.99</td> <td>33.79</td> <td>43.50</td> <td>-9.71</td> <td>49.08</td> <td>15.53</td> <td>1.46</td> <td>32.32</td> <td>0.04</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>159.98</td> <td>28.02</td> <td>43.50</td> <td>-15.48</td> <td>41.51</td> <td>16.74</td> <td>1.89</td> <td>32.26</td> <td>0.14</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>181.32</td> <td>29.77</td> <td>43.50</td> <td>-13.73</td> <td>44.63</td> <td>15.22</td> <td>1.99</td> <td>32.22</td> <td>0.15</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>860.32</td> <td>30.57</td> <td>46.00</td> <td>-15.43</td> <td>28.49</td> <td>29.38</td> <td>4.21</td> <td>31.63</td> <td>0.12</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>948.59</td> <td>32.22</td> <td>46.00</td> <td>-13.78</td> <td>27.53</td> <td>30.87</td> <td>4.52</td> <td>30.91</td> <td>0.21</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	38.97	28.85	40.00	-11.15	36.11	24.21	0.87	32.41	0.07	100 222 QP	2	94.99	33.79	43.50	-9.71	49.08	15.53	1.46	32.32	0.04	-- -- Peak	3	159.98	28.02	43.50	-15.48	41.51	16.74	1.89	32.26	0.14	-- -- Peak	4	181.32	29.77	43.50	-13.73	44.63	15.22	1.99	32.22	0.15	-- -- Peak	5	860.32	30.57	46.00	-15.43	28.49	29.38	4.21	31.63	0.12	-- -- Peak	6	948.59	32.22	46.00	-13.78	27.53	30.87	4.52	30.91	0.21	-- -- Peak	<p>Site : 03CH11-HY Condition: QP 3m BILOG_37059801_241127 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>32.91</td> <td>29.82</td> <td>40.00</td> <td>-10.18</td> <td>37.99</td> <td>23.26</td> <td>0.89</td> <td>32.37</td> <td>0.05</td> <td>100 347 QP</td> </tr> <tr> <td>2</td> <td>67.83</td> <td>30.28</td> <td>40.00</td> <td>-9.72</td> <td>48.91</td> <td>12.39</td> <td>1.25</td> <td>32.32</td> <td>0.05</td> <td>-- -- Peak</td> </tr> <tr> <td>3</td> <td>91.11</td> <td>34.16</td> <td>43.50</td> <td>-9.34</td> <td>49.90</td> <td>15.14</td> <td>1.40</td> <td>32.33</td> <td>0.05</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>165.80</td> <td>31.54</td> <td>43.50</td> <td>-11.96</td> <td>45.45</td> <td>16.28</td> <td>1.92</td> <td>32.25</td> <td>0.14</td> <td>-- -- Peak</td> </tr> <tr> <td>5</td> <td>845.77</td> <td>30.95</td> <td>46.00</td> <td>-15.05</td> <td>29.14</td> <td>29.25</td> <td>4.18</td> <td>31.72</td> <td>0.10</td> <td>-- -- Peak</td> </tr> <tr> <td>6</td> <td>950.53</td> <td>33.18</td> <td>46.00</td> <td>-12.90</td> <td>28.27</td> <td>30.98</td> <td>4.53</td> <td>30.89</td> <td>0.21</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	32.91	29.82	40.00	-10.18	37.99	23.26	0.89	32.37	0.05	100 347 QP	2	67.83	30.28	40.00	-9.72	48.91	12.39	1.25	32.32	0.05	-- -- Peak	3	91.11	34.16	43.50	-9.34	49.90	15.14	1.40	32.33	0.05	-- -- Peak	4	165.80	31.54	43.50	-11.96	45.45	16.28	1.92	32.25	0.14	-- -- Peak	5	845.77	30.95	46.00	-15.05	29.14	29.25	4.18	31.72	0.10	-- -- Peak	6	950.53	33.18	46.00	-12.90	28.27	30.98	4.53	30.89	0.21	-- -- Peak
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																					
1	38.97	28.85	40.00	-11.15	36.11	24.21	0.87	32.41	0.07	100 222 QP																																																																																																																																																																				
2	94.99	33.79	43.50	-9.71	49.08	15.53	1.46	32.32	0.04	-- -- Peak																																																																																																																																																																				
3	159.98	28.02	43.50	-15.48	41.51	16.74	1.89	32.26	0.14	-- -- Peak																																																																																																																																																																				
4	181.32	29.77	43.50	-13.73	44.63	15.22	1.99	32.22	0.15	-- -- Peak																																																																																																																																																																				
5	860.32	30.57	46.00	-15.43	28.49	29.38	4.21	31.63	0.12	-- -- Peak																																																																																																																																																																				
6	948.59	32.22	46.00	-13.78	27.53	30.87	4.52	30.91	0.21	-- -- Peak																																																																																																																																																																				
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																					
1	32.91	29.82	40.00	-10.18	37.99	23.26	0.89	32.37	0.05	100 347 QP																																																																																																																																																																				
2	67.83	30.28	40.00	-9.72	48.91	12.39	1.25	32.32	0.05	-- -- Peak																																																																																																																																																																				
3	91.11	34.16	43.50	-9.34	49.90	15.14	1.40	32.33	0.05	-- -- Peak																																																																																																																																																																				
4	165.80	31.54	43.50	-11.96	45.45	16.28	1.92	32.25	0.14	-- -- Peak																																																																																																																																																																				
5	845.77	30.95	46.00	-15.05	29.14	29.25	4.18	31.72	0.10	-- -- Peak																																																																																																																																																																				
6	950.53	33.18	46.00	-12.90	28.27	30.98	4.53	30.89	0.21	-- -- Peak																																																																																																																																																																				



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Thread - 250kbps	89.83	4256	0.235	300Hz

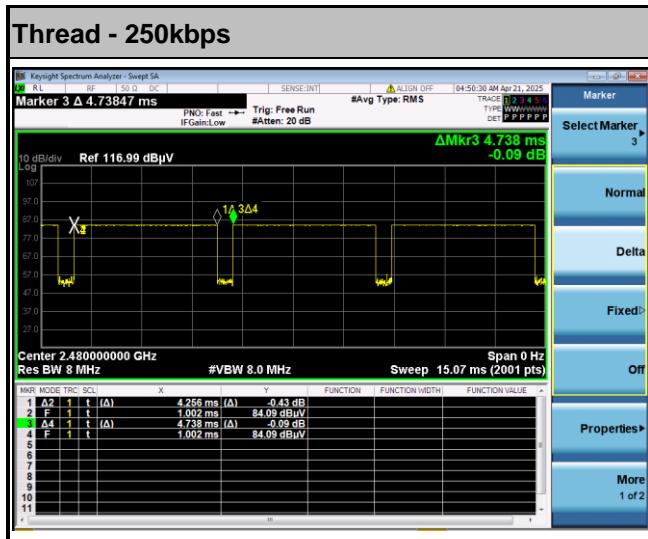

—————THE END—————