


HEARING AID COMPATIBILITY Volume Control Evaluation Report

FCC ID : A4RGU0NP
Equipment : Phone
Model Name : GU0NP, GM66V
Applicant : Google LLC
: 1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
FCC 47 CFR §20.19
Standard : ANSI C63.19-2019
ANSI/TIA-5050-2018

The product was received on Jan. 03, 2025 and testing was started from Mar. 21, 2025 and completed on Aug. 05, 2025. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in ANSI C63.19-2019 / 47 CFR Part 20.19 / ANSI/TIA-5050-2018 and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. General Information	4
2. Testing Location.....	5
3. Applied Standards	5
4. Air Interface and Operating Mode.....	6
5. Volume Control Requirements	8
6. System Description.....	9
7. Device positioning	10
8. Volume Control Test Procedure	11
9. Test Equipment List	12
10. Device Support Codec.....	13
11. Volume Control Evaluation Results.....	14
12. Uncertainty Assessment	29
13. References.....	30

Appendix A. Worst Volume Control Evaluation Results

Appendix B. Calibration Certificate

Appendix C. Test Setup Photos

Appendix D. Attestation to FCC HAC Waiver DA23-914

History of this test report

Report No.	Version	Description	Issued Date
HA4N0920C	Rev. 01	Initial issue of report	May 23, 2025
HA4N0920C	Rev. 02	Update section 10	Jun. 05, 2025
HA4N0920C	Rev. 03	1. Update section 1 and section 11 2. Update Appendix A and B	Aug. 06, 2025



1. General Information

Product Feature & Specification	
Applicant Name	Google LLC
Equipment Name	Phone
Model Name	GUONP, GM66V
FCC ID	A4RGUONP
S/N	52181FDCG0008N, 52181FDCG0009P
2N lowest conversational gain	17.2 dB
8N lowest conversational gain	18.0 dB
Test Results	Pass
Frequency Band	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz, 3450MHz ~ 3550MHz 5G NR n78: 3700 MHz ~ 3800 MHz, 3450MHz ~ 3550MHz 5G NR n258 : 24.25 GHz~24.45 GHz, 24.75GHz ~25.25GHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz NTN NB IoT B23: 2000 MHz ~2020 MHz NTN NB IoT B255: 1626.5 MHz ~ 1660.5 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.9 GHz Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz~6525 MHz, 6525 MHz~6875 MHz, 6875 MHz~7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC: 13.56 MHz WPC: 110 kHz ~ 148.5 kHz(Rx) UWB: 6489.6 MHz, 7987.2 MHz Thread: 2405 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS UMTS: RMC/AMR 12.2Kbps, HSDPA, HSUPA LTE: QPSK, 16QAM, 64QAM, 256QAM NTN: BPSK, QPSK 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax/be HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160/EHT20/EHT40/EHT80/EHT160 Bluetooth BR/EDR/LE/CS NFC: ASK WPC: ASK UWB: BPM-BPSK/HPSK Thread: QPSK

Reviewed by: Jason WangReport Producer: Carlie Tsai

2. Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.: AC01-HY

3. Applied Standards

- FCC CFR47 Part 20.19
- ANSI C63.19-2019
- FCC KDB 285076 D01 HAC Guidance v06r04
- FCC KDB 285076 D04 Volume Control v02
- FCC KDB 285076 D05 CG Interim Waiver DA 23-914 v01
- ANSI/TIA-5050-2018

4. Air Interface and Operating Mode

Air Interface	Band MHz	Type	C63.19 Volume Control Tested	Simultaneous Transmitter	Name of Voice Service	Power State for HAC Compliance		
GSM	GSM850	VO	Yes	WLAN, BT, Thread	CMRS Voice	Head		
	GSM1900				Google Meet ⁽³⁾			
	EDGE850	VD			No			
	EDGE1900							
UMTS	Band 2	VO	Yes	WLAN, BT, Thread	CMRS Voice	Pmax		
	Band 4				Google Meet ⁽³⁾			
	Band 5							
	HSPA	VD					No	
LTE	Band 2	VD	Yes	5G NR, WLAN, BT, Thread	VoLTE / Google Meet ⁽³⁾	Pmax		
	Band 4							
	Band 5							
	Band 7							
	Band 12							
	Band 13							
	Band 14							
	Band 17							
	Band 25							
	Band 26							
	Band 30							
	Band 38							
	Band 41							
	Band 48							
	Band 66							
	Band 71							
5G NR	n2	VD	Yes	LTE, WLAN, BT, Thread	VoNR / Google Meet ⁽³⁾	Pmax		
	n5							
	n7							
	n12							
	n14							
	n25							
	n26							
	n30							
	n38							
	n41							
	n48							
	n66							
	n70							
	n71							
	n77							
	n78							
	n258	VD	No ⁽¹⁾		Google Meet ⁽³⁾	NA		
	n260							
	n261							



Wi-Fi	2450	VD	Yes	GSM, WCDMA, LTE, 5G NR, 5G/6GHz WLAN	VoWiFi / Google Meet ⁽³⁾	Pmax
	5200			GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT, Thread		
	5300					
	5500					
	5800 / 5900					
	U-NII 5	VD	Yes ⁽²⁾	GSM, WCDMA, LTE, 5G NR, 2.4G WLAN, BT, Thread	VoWiFi / Google Meet ⁽³⁾	Pmax
	U-NII 6		No ⁽¹⁾			
	U-NII 7					
U-NII 8						
NTN	B23	DT	No	NA	NA	NA
	B255					
BT / Thread	2450	DT	No	GSM, WCDMA, LTE, 5G NR, 5G/6GHz WLAN	NA	NA
UWB	6500/8000	DT	No	WWAN, WLAN, BT, Thread, NFC	NA	NA
NFC	13.56	DT	No	WWAN, WLAN, BT, Thread, UWB	NA	NA
Type Transport: VO= Voice only DT= Digital Transport only (no voice) VD= CMRS and IP Voice Service over Digital Transport						
Remark 1. The FR2 / U-NII 6/7/8 were above 6GHz and were not evaluated due to outside of the current scope of ANSI C63.19 and FCC HAC regulations. 2. The UNII-5 was evaluated for operations which are entirely below 6 GHz, above 6 GHz were not evaluated due outside of the current scope of ANSI C63.19 and FCC HAC regulations. 3. According to KDB 285076 D05 and Waiver DA 23-914, only CMRS narrowband and CMRS wideband voice codecs are subject to conversational gain compliance, as outlined in Section 10. Other codecs—such as full-band and super-wideband codecs defined by 3GPP, as well as over-the-top (OTT) codecs—are required to be documented in the test report but are not subject to the TIA-5050 Volume Control Standard compliance requirements. 4. The product supports the TAS feature for UMTS, LTE, NR, and Wi-Fi; therefore, HAC testing for these technologies was conducted at the Pmax power level. For GSM, the device was configured to operate at its maximum transmit power in the held-to-ear mode. 5. Pmax is the maximum output power for the handset for the indicated air interface. 6. Head refers to the handset's maximum RF power possible for all user conditions during held-to-ear scenarios.						

5. Volume Control Requirements

<Conversational Gain>

- Per KDB 285076 D05, With a mounting force of 8N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB
- Per KDB 285076 D05, With a mounting force of 2N, the DUT shall have at least one volume control setting that will produce a conversational gain of ≥ 6 dB.
- Calculate the Conversational Gain by subtracting 70 dB from the measured dBSPL.
[Conversational Gain = (Measured dBSPL Level – 70 dBSPL) dB]

<Receive Distortion And Noise Performance>

With a mounting force of 8N and 2N, the ratio of the stimulus signal power to the 100 Hz to 8000 Hz total A-weighted distortion and noise power shall be ≥ 20 dB when tested over the range of 1/3 octave band center frequencies:

- Narrowband transmission mode: Each 1/3 octave band center frequency from 400 Hz to 3150 Hz
- Wideband transmission mode: Each 1/3 octave band center frequency from 250 Hz to 5000 Hz
- Per KDB 285076 D05, choose one narrowband and one wideband for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing to meet Receive Distortion And Noise Performance requirement.

<Receive Acoustic Frequency Response Performance>

For the volume control settings determined in ANSI/TIA-5050-2018 section 5.1.1 with a mounting force of 8N and 2N, the receive frequency response shall be measured at the DRP in 1/12 octave bands. After translation to the FF or DF, it shall fall between the applicable upper and lower limits. The exact limit values at any 1/12 octave band center frequency falling between two consecutive points specified in the table may be calculated using the formula given in Eq 2 below

$$X_f = X_1 + (X_2 - X_1) * \left(\frac{\log_{10} f - \log_{10} f_1}{\log_{10} f_2 - \log_{10} f_1} \right) \quad \text{Eq 2}$$

Where

X_f = limit value at frequency f

X_1 = limit value at frequency f_1 as given in table

X_2 = limit value at frequency f_2 as given in table

For Narrowband: The 1/12 octave band frequency response after translation to the FF or DF shall fall between the upper and lower limits given in Table 1

For Wideband: The 1/12 octave band frequency response after translation to the FF or DF shall fall between the upper and lower limits given in Table 2

Table 1 – Narrowband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
300	-6	100	+6
3400	-6	4000	+6



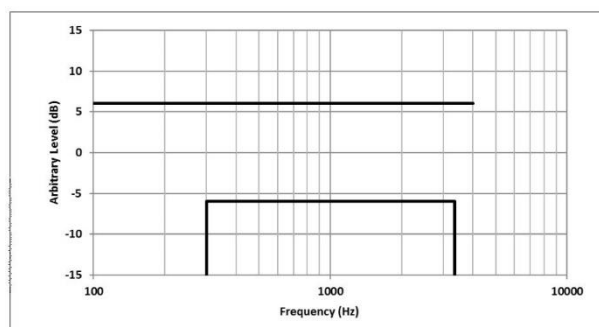


Table 2 – Wideband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
200	-10	100	+6
300	-6	1000	+6
5000	-6	2000	+8
6300	-12	8000	+8

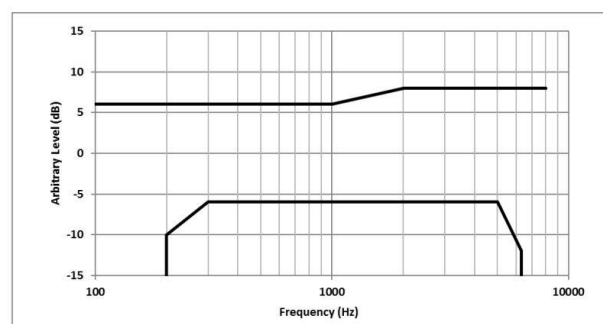

6. System Description

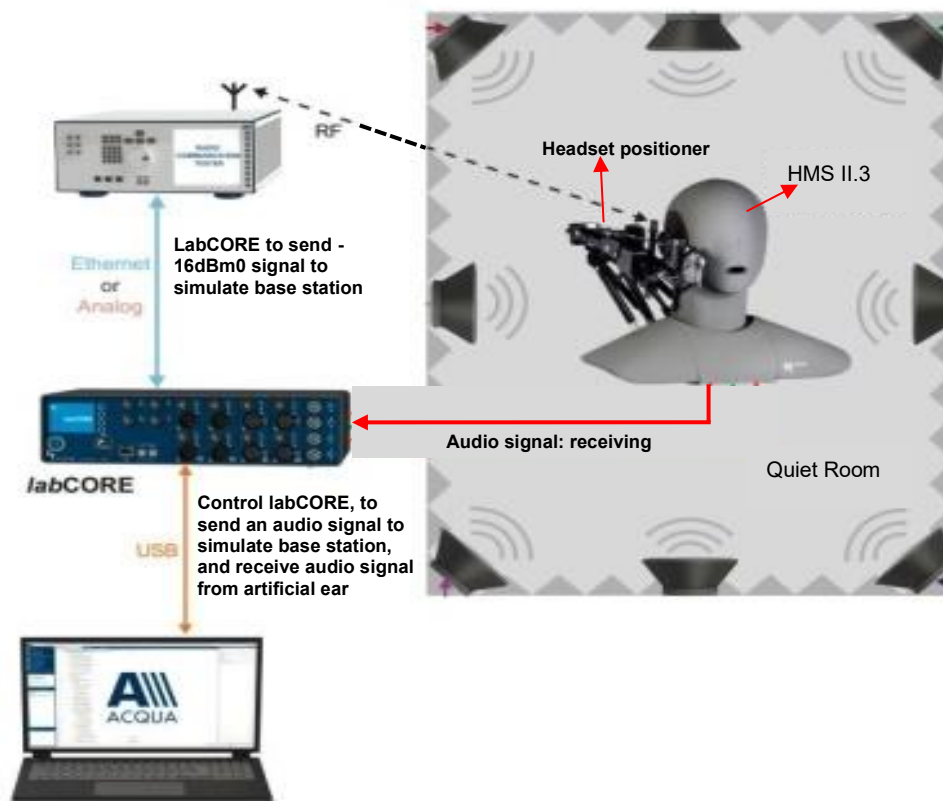


System Components:

Name of Equipment	Equipment Description
labCORE Audio Analyzer	labCORE is a high-precision measurement hardware platform. It provides multiple channels, a wide variety of analog and digital inputs and outputs, high processing power and high-performance interfaces. labCORE is an all-in-one solution for measuring the voice and audio quality of a wide range of devices. labCORE is used in conjunction with the communication quality analysis system ACQUA. Connected to a computer via USB (Plug & Play), it is configured and controlled by ACQUA. Combinations with other HEAD acoustics hardware platforms and software applications are possible. labCORE settings are controlled via the intuitive ACQUA settings. They can be stored and assigned to selectable measurement sequences.
HMS II.3, artificial head	HMS II.3 supports measurements in sending and receiving direction. For this purpose, the artificial head is equipped with an impedance simulator in the right ear and a two-way mouth loudspeaker – both meeting the requirements in the recommendations ITU-T P.57 and P.58
Handset positioner	Control the Newton's force(2N/8N) of the mobile phone on the artificial head
ACQUA, TIA-5050 Test Software	The SW version5.1.200 can be evaluated TIA-5050 section5.1, 5.2, 5.3
R&S base station simulator	RF connect with the mobile phone

7. Device positioning

The two primary handset positions are the MECRP and the STP. If an MECRP is defined by the manufacturer, it shall be used. Otherwise, the STP shall be used. Once positioned, all measurements shall be performed in the same primary position. Positioning devices can hold the receiver by position relative to the ERP or by force on the pinna. However, the relationship between applied force and position may be nonlinear. Therefore, the recommended procedure is to begin by placing the receiver in the positioning device without contacting the pinna, then gradually moving the receiver inward so as to increase the force, and stopping at the target force or position.

Following figure shows the device positioning

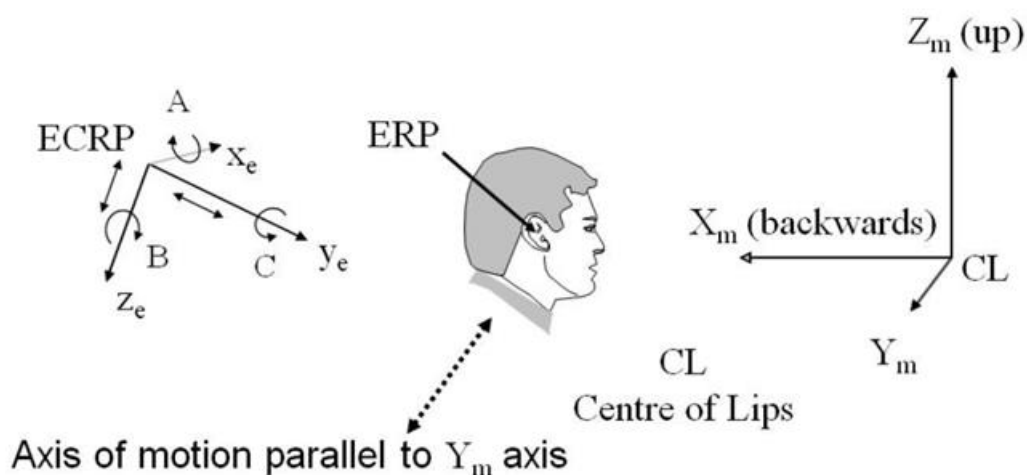

8. Volume Control Test Procedure

<Conversational Gain>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in section 5 in an active call state with the applicable codec for the transmission mode under test.
2. Set the DUT volume control to the maximum setting.
3. If the DUT has an adjustable tone control feature, a tone control setting that meets the frequency response requirements in ANSI/TIA-5050 section 5.3.1 shall be used.
4. The ACQUA system is apply the real speech test signal at a level of -16 dBm0 at the RETP and measure the acoustic output at the Drum Reference Point (DRP) over one complete sequence of the test signal.
5. Translate the measurement made at the DRP to the FF or DF using the translation data in ANSI/TIA-5050 Annex B.
6. Over the applicable frequency band, determine the ASL in dBSPL for the resulting sound pressure level in accordance with Method B of ITU-T Recommendation P.56:
 - a. Narrowband 100 Hz through 4000 Hz.
 - b. Wideband 100 Hz through 7720 Hz.Calculate the Conversational Gain by subtracting 70 dB from the measured dBSPL.
[Conversational Gain = (Measured dBSPL Level – 70 dBSPL) dB]
7. Measure the output distortion per ANSI/TIA-5050 clause 5.2. If a distortion failure occurs at the maximum volume control setting, reduce the volume control setting and repeat the measurement to determine if a setting can be found for which the conversational gain requirement is met without a distortion failure.
8. Repeat steps 2-8 with a mounting force of 2N

<Receive Distortion And Noise Performance>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in section in an active call state with the applicable codec for the transmission mode under test.
2. Receive distortion and noise is measured using the PN-SDNR procedure as described in ANSI/TIA-5050 Annex A
3. To ensure DUT activation, the ACQUA system is apply the real speech test signal at a level of -16 dBm0 followed immediately by the initial 1/3 octave center frequency PN test signal in ANSI/TIA-5050 Table A.1 based on the narrowband or wideband operating mode. Measure the acoustic output at the DRP over the complete sequence of the PN test signal.
4. Translate the measurement made at the DRP to the FF or DF using the translation data in ANSI/TIA-5050 Annex B
5. Calculate the acoustic output unweighted total signal power of the stimulus measurement band as described in ANSI/TIA-5050 A.2.
6. Calculate the notched A-weighting distortion and noise components as described in ANSI/TIA-5050 A.3.
7. Calculate the ratio of the signal power to the total A-weighted distortion and noise power using ANSI/TIA-5050 Eq A-1.
8. Repeat for each of the remaining 1/3 octave center frequencies in Table A.1 based on the narrowband or wideband operating mode
9. Repeat steps 2-8 with a mounting force of 2N
10. The measured value that the system equipment will automatically calculates or converts to define whether it meets the requirements of ANSI/TIS-5050 annex A and annex B

<Receive Acoustic Frequency Response Performance>

1. Configure the DUT with a mounting force of 8N and test equipment as shown in Figure 1 in an active call state with the applicable codec for the transmission mode under test.
2. If the DUT has an adjustable tone control feature the initial measurement is to be performed with the default tone control setting.
3. The ACQUA system is apply the real speech test signal with a level of -16 dBm0 at the RETP.
4. Capture the frequency spectrum at the DRP of the HATS using real-time analysis with 1/12 octave bands over the frequency range from 100 Hz to 4000 Hz for narrowband measurements, or over the frequency range from 100 Hz to 8000 Hz for wideband measurements, averaged over the entire duration of the test signal.
5. Transform the DRP frequency spectrum measurement to the FF or DF (include ANSI/TIA-5050 Annex B).
6. Divide the 1/12 octave measurement data by the 1/12 octave frequency spectrum of the test signal at the RETP and present the measurement in terms of dB(Pa/V).
7. Apply the applicable frequency response limits to determine compliance.
8. If the default tone control setting does not meet the requirement, repeat the above steps for other tone control settings to determine a tone control setting that meets the requirements.
9. Repeat with a mounting force of 2N

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
HEAD acoustic GmbH	Audio Analyzer	labCORE	77000342	Jul. 08, 2024	Jul. 07, 2025
HEAD acoustic GmbH	Audio Analyzer	labCORE	77000342	Jul. 29, 2025	Jul. 28, 2026
R&S	Wideband Radio Communication Tester	CMW500	115793	Dec. 12, 2024	Dec. 11, 2025
R&S	Wideband Radio Communication Tester	CMX500	101931	Sep. 23, 2024	Sep. 22, 2025
Testo	Hygro meter	608-H1	45196600	Oct. 28, 2024	Oct. 27, 2025
HEAD acoustic GmbH	Fullband artificial head	HMS II.3	12306610	NCR	NCR

Remark:

1. NCR: no calibration required

10. Device Support Codec

General Note:

1. Per KDB 285076 D04, it is expected to investigate and document only the worst-case test conditions and results. Each submitted test report shall document the codec type (i.e., NB, WB, EVS, etc.), every air interface (i.e., LTE, 5G NR, WI-FI) and band supported for the worst-case codec bit rate, band channel, bandwidth, air interface bit rate, subcarrier spacings, and resource blocks
2. Through Internal codec and air interface configuration investigation (e.g. (i.e., NB, WB, EVS codec, bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst investigate results of codec, air interface configuration etc. were include in section10
3. Per KDB 285076 D05, Waiver DA 23-914 only requires conversational gain compliance for CMRS narrowband and CMRS wideband voice codecs. All other codecs either part of 3GPP set such as full-band and super-wideband codecs or OTT codecs are to be documented in the test report but not required to comply with the TIA 5050 Volume Control Standard
4. If a handset does not have a wideband codec or the handset only has an AMR wideband codec, then the test report must document this fact and the passing requirement under these circumstances for the wideband codec test is waived. The passing results for the distortion/noise and frequency response tests must be reported in the handset's test report

GSM Codec/bitrate investigation			
Codec	AMR NB	AMR WB	EFR NB
Bitrate	4.75kbps	6.60kbps	12.2kbps
	5.15kbps	8.85kbps	
	5.9kbps	12.65kbps	
	6.7kbps		
	7.4kbps		
	7.95kbps		
	10.2kbps		
	12.2kbps		

WCDMA Codec/bitrate investigation		
Codec	AMR NB	AMR WB
Bitrate	4.75kbps	6.60kbps
	5.15kbps	8.85kbps
	5.9kbps	12.65kbps
	6.7kbps	14.25kbps
	7.4kbps	15.85kbps
	7.95kbps	18.25kbps
	10.2kbps	19.85kbps
	12.2kbps	23.05kbps
		23.85kbps

VoLTE/VoNR/VoWiFi Codec/bitrate investigation					
Codec	AMR NB	AMR WB	EVS NB	EVS WB	EVS SWB
Bitrate	4.75kbps	6.60kbps	5.9kbps	5.9kbps	9.6kbps
	5.15kbps	8.85kbps	7.2kbps	7.2kbps	13.2kbps
	5.9kbps	12.65kbps	8kbps	8kbps	16.4kbps
	6.7kbps	14.25kbps	9.6kbps	9.6kbps	24.4kbps
	7.4kbps	15.85kbps	13.2kbps	13.2kbps	
	7.95kbps	18.25kbps	16.4kbps	16.4kbps	
	10.2kbps	19.85kbps	24.4kbps	24.4kbps	
	12.2kbps	23.05kbps			
		23.85kbps			

Google meet Codec/bitrate investigation	
Codec	Opus (Full Band)
Bitrate	6Kbps~75Kbps

11. Volume Control Evaluation Results

General Note:

1. The device supports both closed-mode and open-mode user scenarios during voice calls. All testing was conducted under the closed-mode scenario. For the open-mode scenario, spot checks were performed under the worst-case air interface conditions identified during closed-mode testing.
2. All the test result was done at quiet room and measured ambient noise is 33.43 dBa and less than 40dBa.
3. Per KDB 285076 D05, Under the waiver, only CMRS narrowband and CMRS wideband voice codecs are required to comply with the volume control requirements of the TIA 5050-2018 Volume Control Standard as amended as follows:
 - a. For the 2N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing
 - b. For the 8N mounting force test, one narrowband and one wideband voice codec embedded with the handset must pass with at least one volume control setting with a conversational gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate but is not required to meet or exceed the full 18 dB of conversational gain specified in section 5.1.1 of the TIA 5050 Volume Control Standard using one codec bit rate of the applicant's choosing
4. For all other narrowband and wideband codecs not evaluated in item1. above, TIA 5050-2018 Receive Distortion and Noise Performance and Receive Acoustic Frequency Response Performance evaluations are not required; however, these codecs shall be assessed for conversational gain and documented in the test report at the 2N and 8N levels with a gain of ≥ 6 dB for all voice services, bands of operation and air interfaces over which they operate. The handset volume setting used to comply with item2. shall be used for these other CMRS codec evaluations.
5. Any other codec for voice services embedded in the handset, not identified in item 2. and item3. above, is not required to comply or demonstrate in the test reports for conversational gain.
6. Per KDB 285076 D05 and document of DA 23-914 item 30, the manufacturer only perform EVS codec to meet distortion/noise and frequency response tests at the 2N and 8N force levels.
7. All the test results were set the DUT volume control to the maximum setting.
8. Conversational Gain = (measured dB SPL Level – 70 dB) dB
9. Through Internal radio configuration investigation (e.g. bandwidth, modulation data rate, subcarrier spacing, and resource blocks) that the worst radio configuration was document as below table.
10. The device operates on overlapping frequency ranges in certain LTE and NR bands, specifically LTE Bands 12/17, 5/26, 4/66, 38/41, and 77/78. As the frequency coverage of the smaller bands is entirely contained within that of the corresponding larger bands, only the larger LTE and NR bands were tested for hearing aid compatibility.



<Evaluation results for KDB 285076 D05 2.a>

<LTE>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Receive Volume Control Performance				Receive Distortion and Noise Performance			Receive Acoustic Frequency Response Performance
							Measured dBSPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS NB 24.4kbps	2N	88.92	18.92	≥6	12.92	21.89	≥20	1.89	Pass
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS NB 24.4kbps	8N	89.12	19.12	≥6	13.12	22.4	≥20	2.4	Pass
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS WB 24.4kbps	2N	88.39	18.39	≥6	12.39	20.93	≥20	0.93	Pass
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS WB 24.4kbps	8N	89.3	19.3	≥6	13.3	21.05	≥20	1.05	Pass
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS NB 24.4kbps	2N	88.04	18.04	≥6	12.04	20.87	≥20	0.87	Pass
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS NB 24.4kbps	8N	88.33	18.33	≥6	12.33	20.81	≥20	0.81	Pass
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS WB 24.4kbps	2N	88.82	18.82	≥6	12.82	21.61	≥20	1.61	Pass
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS WB 24.4kbps	8N	88.9	18.9	≥6	12.9	21.23	≥20	1.23	Pass
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS NB 24.4kbps	2N	87.87	17.87	≥6	11.87	23.15	≥20	3.15	Pass
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS NB 24.4kbps	8N	88.83	18.83	≥6	12.83	20.99	≥20	0.99	Pass
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS WB 24.4kbps	2N	88.63	18.63	≥6	12.63	21.06	≥20	1.06	Pass
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS WB 24.4kbps	8N	88.75	18.75	≥6	12.75	21.55	≥20	1.55	Pass
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS NB 24.4kbps	2N	88.02	18.02	≥6	12.02	20.65	≥20	0.65	Pass
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS NB 24.4kbps	8N	88.21	18.21	≥6	12.21	21.15	≥20	1.15	Pass
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS WB 24.4kbps	2N	88.57	18.57	≥6	12.57	20.5	≥20	0.5	Pass
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS WB 24.4kbps	8N	88.81	18.81	≥6	12.81	21.12	≥20	1.12	Pass
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS NB 24.4kbps	2N	88.54	18.54	≥6	12.54	21.84	≥20	1.84	Pass
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS NB 24.4kbps	8N	89.07	19.07	≥6	13.07	22.97	≥20	2.97	Pass
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS WB 24.4kbps	2N	87.92	17.92	≥6	11.92	21.48	≥20	1.48	Pass
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS WB 24.4kbps	8N	88.68	18.68	≥6	12.68	20.54	≥20	0.54	Pass
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS NB 24.4kbps	2N	88.66	18.66	≥6	12.66	20.97	≥20	0.97	Pass
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS NB 24.4kbps	8N	88.75	18.75	≥6	12.75	21.19	≥20	1.19	Pass
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS WB 24.4kbps	2N	88.8	18.8	≥6	12.8	20.53	≥20	0.53	Pass
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS WB 24.4kbps	8N	88.9	18.9	≥6	12.9	21.47	≥20	1.47	Pass
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS NB 24.4kbps	2N	87.27	17.27	≥6	11.27	22.98	≥20	2.98	Pass
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS NB 24.4kbps	8N	88.03	18.03	≥6	12.03	24.72	≥20	4.72	Pass
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS WB 24.4kbps	2N	88.24	18.24	≥6	12.24	20.73	≥20	0.73	Pass
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS WB 24.4kbps	8N	88.83	18.83	≥6	12.83	21.15	≥20	1.15	Pass
	LTE Band 30	10M_QPSK_1_0	27710	Open Mode	EVS NB 24.4kbps	2N	89.26	19.26	≥6	13.26	23.01	≥20	3.01	Pass
	LTE Band 30	10M_QPSK_1_0	27710	Open Mode	EVS NB 24.4kbps	8N	88.67	18.67	≥6	12.67	22.93	≥20	2.93	Pass
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS NB 24.4kbps	2N	88.22	18.22	≥6	12.22	20.84	≥20	0.84	Pass
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS NB 24.4kbps	8N	88.63	18.63	≥6	12.63	20.58	≥20	0.58	Pass
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS WB 24.4kbps	2N	87.52	17.52	≥6	11.52	21.05	≥20	1.05	Pass
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS WB 24.4kbps	8N	88.12	18.12	≥6	12.12	21.19	≥20	1.19	Pass
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS NB 24.4kbps	2N	88.48	18.48	≥6	12.48	21.82	≥20	1.82	Pass
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS NB 24.4kbps	8N	88.83	18.83	≥6	12.83	21.4	≥20	1.4	Pass
1	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS WB 24.4kbps	2N	87.46	17.46	≥6	11.46	20.81	≥20	0.81	Pass
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS WB 24.4kbps	8N	89.26	19.26	≥6	13.26	20.46	≥20	0.46	Pass
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS NB 24.4kbps	2N	88	18	≥6	12	21.81	≥20	1.81	Pass
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS NB 24.4kbps	8N	88.68	18.68	≥6	12.68	21.04	≥20	1.04	Pass
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS WB 24.4kbps	2N	88.82	18.82	≥6	12.82	21.2	≥20	1.2	Pass
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS WB 24.4kbps	8N	89.11	19.11	≥6	13.11	20.74	≥20	0.74	Pass
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS NB 24.4kbps	2N	87.98	17.98	≥6	11.98	21.03	≥20	1.03	Pass
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS NB 24.4kbps	8N	88.96	18.96	≥6	12.96	22.34	≥20	2.34	Pass
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS WB 24.4kbps	2N	87.99	17.99	≥6	11.99	20.92	≥20	0.92	Pass
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS WB 24.4kbps	8N	89.17	19.17	≥6	13.17	20.66	≥20	0.66	Pass



<NR>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Receive Volume Control Performance				Receive Distortion and Noise Performance			Receive Acoustic Frequency Response Performance
							Measured dB SPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
	FR1 n7	50M_BPSK_1_1	507000	Close Mode	EVS NB 24.4kbps	2N	90.37	20.37	≥6	14.37	22.97	≥20	2.97	Pass
	FR1 n7	50M_BPSK_1_1	507000	Close Mode	EVS NB 24.4kbps	8N	87.96	17.96	≥6	11.96	23.22	≥20	3.22	Pass
	FR1 n7	50M_BPSK_1_1	507000	Close Mode	EVS WB 24.4kbps	2N	90.89	20.89	≥6	14.89	22.19	≥20	2.19	Pass
	FR1 n7	50M_BPSK_1_1	507000	Close Mode	EVS WB 24.4kbps	8N	88.88	18.88	≥6	12.88	22.75	≥20	2.75	Pass
	FR1 n12	15M_BPSK_1_1	141500	Close Mode	EVS NB 24.4kbps	2N	89.69	19.69	≥6	13.69	22.76	≥20	2.76	Pass
	FR1 n12	15M_BPSK_1_1	141500	Close Mode	EVS NB 24.4kbps	8N	88.03	18.03	≥6	12.03	23.2	≥20	3.2	Pass
2	FR1 n12	15M_BPSK_1_1	141500	Close Mode	EVS WB 24.4kbps	2N	89.34	19.34	≥6	13.34	22.83	≥20	2.83	Pass
	FR1 n12	15M_BPSK_1_1	141500	Close Mode	EVS WB 24.4kbps	8N	90.53	20.53	≥6	14.53	21.87	≥20	1.87	Pass
	FR1 n14	10M_BPSK_1_1	158600	Close Mode	EVS NB 24.4kbps	2N	90.36	20.36	≥6	14.36	23.54	≥20	3.54	Pass
	FR1 n14	10M_BPSK_1_1	158600	Close Mode	EVS NB 24.4kbps	8N	88.62	18.62	≥6	12.62	23.23	≥20	3.23	Pass
	FR1 n14	10M_BPSK_1_1	158600	Close Mode	EVS WB 24.4kbps	2N	89.82	19.82	≥6	13.82	22.08	≥20	2.08	Pass
	FR1 n14	10M_BPSK_1_1	158600	Close Mode	EVS WB 24.4kbps	8N	89.26	19.26	≥6	13.26	22.56	≥20	2.56	Pass
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS NB 24.4kbps	2N	89.95	19.95	≥6	13.95	23.34	≥20	3.34	Pass
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS NB 24.4kbps	8N	88.12	18.12	≥6	12.12	23.32	≥20	3.32	Pass
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS WB 24.4kbps	2N	89.76	19.76	≥6	13.76	22.55	≥20	2.55	Pass
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS WB 24.4kbps	8N	89.79	19.79	≥6	13.79	22.78	≥20	2.78	Pass
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS NB 24.4kbps	2N	90.9	20.9	≥6	14.9	23.36	≥20	3.36	Pass
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS NB 24.4kbps	8N	87.96	17.96	≥6	11.96	22.97	≥20	2.97	Pass
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS WB 24.4kbps	2N	90.13	20.13	≥6	14.13	22.59	≥20	2.59	Pass
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS WB 24.4kbps	8N	90.36	20.36	≥6	14.36	21.93	≥20	1.93	Pass
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS NB 24.4kbps	2N	90.36	20.36	≥6	14.36	23.44	≥20	3.44	Pass
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS NB 24.4kbps	8N	88.67	18.67	≥6	12.67	23.31	≥20	3.31	Pass
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS WB 24.4kbps	2N	89.91	19.91	≥6	13.91	22.26	≥20	2.26	Pass
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS WB 24.4kbps	8N	88.57	18.57	≥6	12.57	22.44	≥20	2.44	Pass
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS NB 24.4kbps	2N	89.76	19.76	≥6	13.76	23.5	≥20	3.5	Pass
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS NB 24.4kbps	8N	88.81	18.81	≥6	12.81	23.52	≥20	3.52	Pass
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS WB 24.4kbps	2N	90.27	20.27	≥6	14.27	22.04	≥20	2.04	Pass
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS WB 24.4kbps	8N	89.36	19.36	≥6	13.36	21.88	≥20	1.88	Pass
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS NB 24.4kbps	2N	90.27	20.27	≥6	14.27	23.25	≥20	3.25	Pass
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS NB 24.4kbps	8N	87.83	17.83	≥6	11.83	23.48	≥20	3.48	Pass
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS WB 24.4kbps	2N	90.84	20.84	≥6	14.84	22.42	≥20	2.42	Pass
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS WB 24.4kbps	8N	89.43	19.43	≥6	13.43	22.36	≥20	2.36	Pass
	FR1 n70	15M_BPSK_1_1	340500	Open Mode	EVS NB 24.4kbps	2N	88.81	18.81	≥6	12.81	23.15	≥20	3.15	Pass
	FR1 n70	15M_BPSK_1_1	340500	Open Mode	EVS NB 24.4kbps	8N	90.11	20.11	≥6	14.11	23.28	≥20	3.28	Pass
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS NB 24.4kbps	2N	90.28	20.28	≥6	14.28	23.54	≥20	3.54	Pass
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS NB 24.4kbps	8N	88.15	18.15	≥6	12.15	23.33	≥20	3.33	Pass
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS WB 24.4kbps	2N	90.36	20.36	≥6	14.36	22.53	≥20	2.53	Pass
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS WB 24.4kbps	8N	89.23	19.23	≥6	13.23	22.29	≥20	2.29	Pass
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS NB 24.4kbps	2N	90.82	20.82	≥6	14.82	23.46	≥20	3.46	Pass
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS NB 24.4kbps	8N	87.94	17.94	≥6	11.94	23.37	≥20	3.37	Pass
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS WB 24.4kbps	2N	90.97	20.97	≥6	14.97	22.62	≥20	2.62	Pass
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS WB 24.4kbps	8N	87.84	17.84	≥6	11.84	22.85	≥20	2.85	Pass
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS NB 24.4kbps	2N	90.51	20.51	≥6	14.51	23.16	≥20	3.16	Pass
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS NB 24.4kbps	8N	88.53	18.53	≥6	12.53	23.33	≥20	3.33	Pass
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS WB 24.4kbps	2N	89.74	19.74	≥6	13.74	22.89	≥20	2.89	Pass
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS WB 24.4kbps	8N	89.35	19.35	≥6	13.35	23.14	≥20	3.14	Pass
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS NB 24.4kbps	2N	90.11	20.11	≥6	14.11	23.3	≥20	3.3	Pass
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS NB 24.4kbps	8N	87.96	17.96	≥6	11.96	23.39	≥20	3.39	Pass
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS WB 24.4kbps	2N	90.71	20.71	≥6	14.71	22.74	≥20	2.74	Pass
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS WB 24.4kbps	8N	89.99	19.99	≥6	13.99	22.41	≥20	2.41	Pass



<WLAN>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Receive Volume Control Performance				Receive Distortion and Noise Performance			Receive Acoustic Frequency Response Performance
							Measured dBSPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)	Minimum PN-SDNR (dB) Doc. Section	Limit (dB)	Margin to Limit (dB)	PASS/FAIL
3	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS NB 24.4kbps	2N	87.28	17.28	≥6	11.28	26.29	≥20	6.29	Pass
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS NB 24.4kbps	8N	88.48	18.48	≥6	12.48	22.96	≥20	2.96	Pass
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS WB 24.4kbps	2N	87.93	17.93	≥6	11.93	20.55	≥20	0.55	Pass
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS WB 24.4kbps	8N	88.26	18.26	≥6	12.26	22.05	≥20	2.05	Pass
	WLAN2.4GHz	802.11b 1Mbps	6	Open Mode	EVS NB 24.4kbps	2N	90.39	20.39	≥6	14.39	22.82	≥20	2.82	Pass
	WLAN2.4GHz	802.11b 1Mbps	6	Open Mode	EVS NB 24.4kbps	8N	90.74	20.74	≥6	14.74	22.98	≥20	2.98	Pass
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS NB 24.4kbps	2N	88.14	18.14	≥6	12.14	24.97	≥20	4.97	Pass
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS NB 24.4kbps	8N	88.69	18.69	≥6	12.69	25.89	≥20	5.89	Pass
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS WB 24.4kbps	2N	88.62	18.62	≥6	12.62	21.95	≥20	1.95	Pass
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS WB 24.4kbps	8N	89.59	19.59	≥6	13.59	21.66	≥20	1.66	Pass
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS NB 24.4kbps	2N	88.06	18.06	≥6	12.06	25.96	≥20	5.96	Pass
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS NB 24.4kbps	8N	88.31	18.31	≥6	12.31	26.03	≥20	6.03	Pass
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS WB 24.4kbps	2N	88.5	18.5	≥6	12.5	21.52	≥20	1.52	Pass
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS WB 24.4kbps	8N	89.18	19.18	≥6	13.18	22.34	≥20	2.34	Pass
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS NB 24.4kbps	2N	88.16	18.16	≥6	12.16	24.62	≥20	4.62	Pass
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS NB 24.4kbps	8N	88.66	18.66	≥6	12.66	24.94	≥20	4.94	Pass
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS WB 24.4kbps	2N	88.61	18.61	≥6	12.61	20.63	≥20	0.63	Pass
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS WB 24.4kbps	8N	88.93	18.93	≥6	12.93	21.43	≥20	1.43	Pass
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS NB 24.4kbps	2N	88.16	18.16	≥6	12.16	23.45	≥20	3.45	Pass
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS NB 24.4kbps	8N	88.94	18.94	≥6	12.94	20.88	≥20	0.88	Pass
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS WB 24.4kbps	2N	88.8	18.8	≥6	12.8	21.9	≥20	1.9	Pass
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS WB 24.4kbps	8N	90.42	20.42	≥6	14.42	21.81	≥20	1.81	Pass
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS NB 24.4kbps	2N	87.9	17.9	≥6	11.9	21.68	≥20	1.68	Pass
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS NB 24.4kbps	8N	88.48	18.48	≥6	12.48	22.05	≥20	2.05	Pass
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS WB 24.4kbps	2N	88.19	18.19	≥6	12.19	22.21	≥20	2.21	Pass
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS WB 24.4kbps	8N	89.14	19.14	≥6	13.14	22.02	≥20	2.02	Pass
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS NB 24.4kbps	2N	90.15	20.15	≥6	14.15	22.85	≥20	2.85	Pass
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS NB 24.4kbps	8N	88.54	18.54	≥6	12.54	23.18	≥20	3.18	Pass
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS WB 24.4kbps	2N	90.06	20.06	≥6	14.06	22.52	≥20	2.52	Pass
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS WB 24.4kbps	8N	89.45	19.45	≥6	13.45	21.16	≥20	1.16	Pass

<Codec Investigation and Evaluation results for KDB 285076 D05 2.b>

<GSM>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Conversational Gain			
							Measured dB SPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)
4	GSM850	GSM Voice	189	Close Mode	EFR NB 12.2kbps	2N	88.11	18.11	≥6	12.11
	GSM850	GSM Voice	189	Close Mode	EFR NB 12.2kbps	8N	89.23	19.23	≥6	13.23
	GSM850	GSM Voice	189	Close Mode	AMR NB 4.75kbps	2N	88.92	18.92	≥6	12.92
	GSM850	GSM Voice	189	Close Mode	AMR NB 4.75kbps	8N	89.13	19.13	≥6	13.13
	GSM850	GSM Voice	189	Close Mode	AMR NB 12.2kbps	2N	88.93	18.93	≥6	12.93
	GSM850	GSM Voice	189	Close Mode	AMR NB 12.2kbps	8N	89.3	19.3	≥6	13.3
	GSM850	GSM Voice	189	Close Mode	AMR WB 6.60kbps	2N	88.35	18.35	≥6	12.35
	GSM850	GSM Voice	189	Close Mode	AMR WB 6.60kbps	8N	89.4	19.4	≥6	13.4
	GSM850	GSM Voice	189	Close Mode	AMR WB 12.65kbps	2N	89.84	19.84	≥6	13.84
	GSM850	GSM Voice	189	Close Mode	AMR WB 12.65kbps	8N	88.5	18.5	≥6	12.5
	GSM850	GSM Voice	189	Open Mode	EFR NB 12.2kbps	2N	89.1	19.1	≥6	13.1
	GSM850	GSM Voice	189	Open Mode	EFR NB 12.2kbps	8N	89.23	19.23	≥6	13.23
	GSM1900	GSM Voice	661	Close Mode	EFR NB 12.2kbps	2N	89.41	19.41	≥6	13.41
	GSM1900	GSM Voice	661	Close Mode	EFR NB 12.2kbps	8N	89.09	19.09	≥6	13.09
	GSM1900	GSM Voice	661	Close Mode	AMR NB 4.75kbps	2N	89.89	19.89	≥6	13.89
	GSM1900	GSM Voice	661	Close Mode	AMR NB 4.75kbps	8N	89.09	19.09	≥6	13.09
	GSM1900	GSM Voice	661	Close Mode	AMR NB 12.2kbps	2N	89.04	19.04	≥6	13.04
	GSM1900	GSM Voice	661	Close Mode	AMR NB 12.2kbps	8N	89.11	19.11	≥6	13.11
	GSM1900	GSM Voice	661	Close Mode	AMR WB 6.60kbps	2N	90.84	20.84	≥6	14.84
	GSM1900	GSM Voice	661	Close Mode	AMR WB 6.60kbps	8N	88.52	18.52	≥6	12.52
	GSM1900	GSM Voice	661	Close Mode	AMR WB 12.65kbps	2N	89.57	19.57	≥6	13.57
	GSM1900	GSM Voice	661	Close Mode	AMR WB 12.65kbps	8N	90.17	20.17	≥6	14.17

<UMTS>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Conversational Gain			
							Measured dBSPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)
5	WCDMA II	Voice	9400	Close Mode	AMR NB 4.75kbps	2N	89.32	19.32	≥6	13.32
	WCDMA II	Voice	9400	Close Mode	AMR NB 4.75kbps	8N	88.34	18.34	≥6	12.34
	WCDMA II	Voice	9400	Close Mode	AMR NB 12.2kbps	2N	90.46	20.46	≥6	14.46
	WCDMA II	Voice	9400	Close Mode	AMR NB 12.2kbps	8N	88.75	18.75	≥6	12.75
	WCDMA II	Voice	9400	Close Mode	AMR WB 6.60kbps	2N	88.99	18.99	≥6	12.99
	WCDMA II	Voice	9400	Close Mode	AMR WB 6.60kbps	8N	88.17	18.17	≥6	12.17
	WCDMA II	Voice	9400	Close Mode	AMR WB 23.85kbps	2N	89.73	19.73	≥6	13.73
	WCDMA II	Voice	9400	Close Mode	AMR WB 23.85kbps	8N	88.55	18.55	≥6	12.55
	WCDMA IV	Voice	1413	Close Mode	AMR NB 4.75kbps	2N	89.79	19.79	≥6	13.79
	WCDMA IV	Voice	1413	Close Mode	AMR NB 4.75kbps	8N	88.72	18.72	≥6	12.72
	WCDMA IV	Voice	1513	Close Mode	AMR NB 12.2kbps	2N	90.35	20.35	≥6	14.35
	WCDMA IV	Voice	1513	Close Mode	AMR NB 12.2kbps	8N	88.65	18.65	≥6	12.65
	WCDMA IV	Voice	1413	Close Mode	AMR WB 6.60kbps	2N	90.42	20.42	≥6	14.42
	WCDMA IV	Voice	1413	Close Mode	AMR WB 6.60kbps	8N	88.77	18.77	≥6	12.77
	WCDMA IV	Voice	1413	Close Mode	AMR WB 23.85kbps	2N	90.34	20.34	≥6	14.34
	WCDMA IV	Voice	1413	Close Mode	AMR WB 23.85kbps	8N	89.05	19.05	≥6	13.05
	WCDMA V	Voice	4182	Close Mode	AMR NB 4.75kbps	2N	90.65	20.65	≥6	14.65
	WCDMA V	Voice	4182	Close Mode	AMR NB 4.75kbps	8N	88.67	18.67	≥6	12.67
	WCDMA V	Voice	4182	Close Mode	AMR NB 12.2kbps	2N	89.95	19.95	≥6	13.95
	WCDMA V	Voice	4182	Close Mode	AMR NB 12.2kbps	8N	89.13	19.13	≥6	13.13
	WCDMA V	Voice	4182	Close Mode	AMR WB 6.60kbps	2N	90.6	20.6	≥6	14.6
	WCDMA V	Voice	4182	Close Mode	AMR WB 6.60kbps	8N	88.21	18.21	≥6	12.21
	WCDMA V	Voice	4182	Close Mode	AMR WB 23.85kbps	2N	90.39	20.39	≥6	14.39
	WCDMA V	Voice	4182	Close Mode	AMR WB 23.85kbps	8N	89.35	19.35	≥6	13.35
	WCDMA V	Voice	4182	Open Mode	AMR WB 23.85kbps	2N	90.33	20.33	≥6	14.33
	WCDMA V	Voice	4182	Open Mode	AMR WB 23.85kbps	8N	89.91	19.91	≥6	13.91

<LTE>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Conversational Gain			
							Measured dBSPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR NB 4.75kbps	2N	88.93	18.93	≥6	12.93
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR NB 4.75kbps	8N	88.83	18.83	≥6	12.83
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR NB 12.2kbps	2N	88.86	18.86	≥6	12.86
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR NB 12.2kbps	8N	88.87	18.87	≥6	12.87
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR WB 6.60kbps	2N	89.95	19.95	≥6	13.95
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR WB 6.60kbps	8N	89.05	19.05	≥6	13.05
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR WB 23.85kbps	2N	89.9	19.9	≥6	13.9
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	AMR WB 23.85kbps	8N	89.14	19.14	≥6	13.14
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS NB 5.9kbps	2N	88.2	18.2	≥6	12.2
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS NB 5.9kbps	8N	88.76	18.76	≥6	12.76
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS WB 5.9kbps	2N	87.41	17.41	≥6	11.41
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS WB 5.9kbps	8N	89.16	19.16	≥6	13.16
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS NB 24.4kbps	2N	88.92	18.92	≥6	12.92
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS NB 24.4kbps	8N	89.12	19.12	≥6	13.12
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS WB 24.4kbps	2N	88.39	18.39	≥6	12.39
	LTE Band 7	20M_QPSK_1_0	21100	Close Mode	EVS WB 24.4kbps	8N	89.3	19.3	≥6	13.3
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR NB 4.75kbps	2N	88.97	18.97	≥6	12.97
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR NB 4.75kbps	8N	88.32	18.32	≥6	12.32



Volume Control Evaluation Report

Report No. : HA4N0920C

	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR NB 12.2kbps	2N	88.65	18.65	≥6	12.65
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR NB 12.2kbps	8N	88.06	18.06	≥6	12.06
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR WB 6.60kbps	2N	88.84	18.84	≥6	12.84
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR WB 6.60kbps	8N	88.17	18.17	≥6	12.17
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR WB 23.85kbps	2N	88.86	18.86	≥6	12.86
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	AMR WB 23.85kbps	8N	88.31	18.31	≥6	12.31
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS NB 5.9kbps	2N	88.47	18.47	≥6	12.47
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS NB 5.9kbps	8N	88.78	18.78	≥6	12.78
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS WB 5.9kbps	2N	88.79	18.79	≥6	12.79
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS WB 5.9kbps	8N	89.41	19.41	≥6	13.41
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS NB 24.4kbps	2N	88.04	18.04	≥6	12.04
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS NB 24.4kbps	8N	88.33	18.33	≥6	12.33
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS WB 24.4kbps	2N	88.82	18.82	≥6	12.82
	LTE Band 12	10M_QPSK_1_0	23095	Close Mode	EVS WB 24.4kbps	8N	88.9	18.9	≥6	12.9
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR NB 4.75kbps	2N	89.19	19.19	≥6	13.19
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR NB 4.75kbps	8N	88.57	18.57	≥6	12.57
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR NB 12.2kbps	2N	88.62	18.62	≥6	12.62
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR NB 12.2kbps	8N	88.86	18.86	≥6	12.86
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR WB 6.60kbps	2N	90.79	20.79	≥6	14.79
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR WB 6.60kbps	8N	88.01	18.01	≥6	12.01
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR WB 23.85kbps	2N	90.52	20.52	≥6	14.52
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	AMR WB 23.85kbps	8N	88.01	18.01	≥6	12.01
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS NB 5.9kbps	2N	87.98	17.98	≥6	11.98
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS NB 5.9kbps	8N	88.39	18.39	≥6	12.39
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS WB 5.9kbps	2N	87.76	17.76	≥6	11.76
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS WB 5.9kbps	8N	88.69	18.69	≥6	12.69
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS NB 24.4kbps	2N	87.87	17.87	≥6	11.87
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS NB 24.4kbps	8N	88.83	18.83	≥6	12.83
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS WB 24.4kbps	2N	88.63	18.63	≥6	12.63
	LTE Band 13	10M_QPSK_1_0	23230	Close Mode	EVS WB 24.4kbps	8N	88.75	18.75	≥6	12.75
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR NB 4.75kbps	2N	89.37	19.37	≥6	13.37
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR NB 4.75kbps	8N	88.23	18.23	≥6	12.23
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR NB 12.2kbps	2N	89.24	19.24	≥6	13.24
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR NB 12.2kbps	8N	88.06	18.06	≥6	12.06
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR WB 6.60kbps	2N	90.08	20.08	≥6	14.08
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR WB 6.60kbps	8N	88.57	18.57	≥6	12.57
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR WB 23.85kbps	2N	88.68	18.68	≥6	12.68
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	AMR WB 23.85kbps	8N	88.71	18.71	≥6	12.71
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS NB 5.9kbps	2N	88.62	18.62	≥6	12.62
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS NB 5.9kbps	8N	88.8	18.8	≥6	12.8
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS WB 5.9kbps	2N	87.38	17.38	≥6	11.38
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS WB 5.9kbps	8N	88.88	18.88	≥6	12.88
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS NB 24.4kbps	2N	88.02	18.02	≥6	12.02
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS NB 24.4kbps	8N	88.21	18.21	≥6	12.21
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS WB 24.4kbps	2N	88.57	18.57	≥6	12.57
	LTE Band 14	10M_QPSK_1_0	23330	Close Mode	EVS WB 24.4kbps	8N	88.81	18.81	≥6	12.81
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR NB 4.75kbps	2N	88.84	18.84	≥6	12.84
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR NB 4.75kbps	8N	88.57	18.57	≥6	12.57
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR NB 12.2kbps	2N	90.13	20.13	≥6	14.13
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR NB 12.2kbps	8N	88.92	18.92	≥6	12.92
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR WB 6.60kbps	2N	88.66	18.66	≥6	12.66
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR WB 6.60kbps	8N	88.31	18.31	≥6	12.31
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR WB 23.85kbps	2N	89.21	19.21	≥6	13.21
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	AMR WB 23.85kbps	8N	88.04	18.04	≥6	12.04
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS NB 5.9kbps	2N	88.49	18.49	≥6	12.49
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS NB 5.9kbps	8N	89.16	19.16	≥6	13.16

	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS WB 5.9kbps	2N	87.29	17.29	≥6	11.29
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS WB 5.9kbps	8N	88.98	18.98	≥6	12.98
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS NB 24.4kbps	2N	88.54	18.54	≥6	12.54
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS NB 24.4kbps	8N	89.07	19.07	≥6	13.07
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS WB 24.4kbps	2N	87.92	17.92	≥6	11.92
	LTE Band 25	20M_QPSK_1_0	26340	Close Mode	EVS WB 24.4kbps	8N	88.68	18.68	≥6	12.68
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR NB 4.75kbps	2N	89.14	19.14	≥6	13.14
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR NB 4.75kbps	8N	88.29	18.29	≥6	12.29
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR NB 12.2kbps	2N	90.49	20.49	≥6	14.49
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR NB 12.2kbps	8N	88.47	18.47	≥6	12.47
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR WB 6.60kbps	2N	90.82	20.82	≥6	14.82
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR WB 6.60kbps	8N	88.73	18.73	≥6	12.73
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR WB 23.85kbps	2N	88.89	18.89	≥6	12.89
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	AMR WB 23.85kbps	8N	88.73	18.73	≥6	12.73
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS NB 5.9kbps	2N	88.04	18.04	≥6	12.04
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS NB 5.9kbps	8N	88.58	18.58	≥6	12.58
6	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS WB 5.9kbps	2N	87.19	17.19	≥6	11.19
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS WB 5.9kbps	8N	88.15	18.15	≥6	12.15
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS NB 24.4kbps	2N	88.66	18.66	≥6	12.66
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS NB 24.4kbps	8N	88.75	18.75	≥6	12.75
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS WB 24.4kbps	2N	88.8	18.8	≥6	12.8
	LTE Band 26	15M_QPSK_1_0	26865	Close Mode	EVS WB 24.4kbps	8N	88.9	18.9	≥6	12.9
	LTE Band 26	15M_QPSK_1_0	26865	Open Mode	EVS WB 5.9kbps	2N	88.92	18.92	≥6	12.92
	LTE Band 26	15M_QPSK_1_0	26865	Open Mode	EVS WB 5.9kbps	8N	88.77	18.77	≥6	12.77
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR NB 4.75kbps	2N	90.15	20.15	≥6	14.15
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR NB 4.75kbps	8N	88.09	18.09	≥6	12.09
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR NB 12.2kbps	2N	88.96	18.96	≥6	12.96
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR NB 12.2kbps	8N	88.54	18.54	≥6	12.54
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR WB 6.60kbps	2N	90.25	20.25	≥6	14.25
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR WB 6.60kbps	8N	88.25	18.25	≥6	12.25
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR WB 23.85kbps	2N	89.78	19.78	≥6	13.78
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	AMR WB 23.85kbps	8N	88.51	18.51	≥6	12.51
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS NB 5.9kbps	2N	88.2	18.2	≥6	12.2
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS NB 5.9kbps	8N	88.54	18.54	≥6	12.54
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS WB 5.9kbps	2N	87.39	17.39	≥6	11.39
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS WB 5.9kbps	8N	88.5	18.5	≥6	12.5
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS NB 24.4kbps	2N	87.27	17.27	≥6	11.27
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS NB 24.4kbps	8N	88.03	18.03	≥6	12.03
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS WB 24.4kbps	2N	88.24	18.24	≥6	12.24
	LTE Band 30	10M_QPSK_1_0	27710	Close Mode	EVS WB 24.4kbps	8N	88.83	18.83	≥6	12.83
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR NB 4.75kbps	2N	88.81	18.81	≥6	12.81
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR NB 4.75kbps	8N	88.58	18.58	≥6	12.58
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR NB 12.2kbps	2N	88.71	18.71	≥6	12.71
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR NB 12.2kbps	8N	89.08	19.08	≥6	13.08
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR WB 6.60kbps	2N	89.24	19.24	≥6	13.24
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR WB 6.60kbps	8N	89.78	19.78	≥6	13.78
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR WB 23.85kbps	2N	90.17	20.17	≥6	14.17
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	AMR WB 23.85kbps	8N	88.15	18.15	≥6	12.15
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS NB 5.9kbps	2N	88.6	18.6	≥6	12.6
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS NB 5.9kbps	8N	89.14	19.14	≥6	13.14
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS WB 5.9kbps	2N	88.15	18.15	≥6	12.15
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS WB 5.9kbps	8N	88.58	18.58	≥6	12.58
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS NB 24.4kbps	2N	88.22	18.22	≥6	12.22
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS NB 24.4kbps	8N	88.63	18.63	≥6	12.63
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS WB 24.4kbps	2N	87.52	17.52	≥6	11.52
	LTE Band 66	20M_QPSK_1_0	132322	Close Mode	EVS WB 24.4kbps	8N	88.12	18.12	≥6	12.12

	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR NB 4.75kbps	2N	89.01	19.01	≥6	13.01
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR NB 4.75kbps	8N	88.56	18.56	≥6	12.56
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR NB 12.2kbps	2N	89.29	19.29	≥6	13.29
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR NB 12.2kbps	8N	88.02	18.02	≥6	12.02
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR WB 6.60kbps	2N	90.66	20.66	≥6	14.66
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR WB 6.60kbps	8N	88.73	18.73	≥6	12.73
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR WB 23.85kbps	2N	89.93	19.93	≥6	13.93
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	AMR WB 23.85kbps	8N	88.53	18.53	≥6	12.53
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS NB 5.9kbps	2N	87.49	17.49	≥6	11.49
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS NB 5.9kbps	8N	88.08	18.08	≥6	12.08
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS WB 5.9kbps	2N	88.48	18.48	≥6	12.48
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS WB 5.9kbps	8N	89.13	19.13	≥6	13.13
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS NB 24.4kbps	2N	88.48	18.48	≥6	12.48
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS NB 24.4kbps	8N	88.83	18.83	≥6	12.83
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS WB 24.4kbps	2N	87.46	17.46	≥6	11.46
	LTE Band 71	20M_QPSK_1_0	133297	Close Mode	EVS WB 24.4kbps	8N	89.26	19.26	≥6	13.26
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR NB 4.75kbps	2N	89.09	19.09	≥6	13.09
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR NB 4.75kbps	8N	88.61	18.61	≥6	12.61
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR NB 12.2kbps	2N	89.01	19.01	≥6	13.01
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR NB 12.2kbps	8N	88.91	18.91	≥6	12.91
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR WB 6.60kbps	2N	88.93	18.93	≥6	12.93
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR WB 6.60kbps	8N	89.6	19.6	≥6	13.6
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR WB 23.85kbps	2N	90.62	20.62	≥6	14.62
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	AMR WB 23.85kbps	8N	88.16	18.16	≥6	12.16
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS NB 5.9kbps	2N	87.5	17.5	≥6	11.5
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS NB 5.9kbps	8N	89.37	19.37	≥6	13.37
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS WB 5.9kbps	2N	87.48	17.48	≥6	11.48
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS WB 5.9kbps	8N	88.96	18.96	≥6	12.96
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS NB 24.4kbps	2N	88	18	≥6	12
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS NB 24.4kbps	8N	88.68	18.68	≥6	12.68
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS WB 24.4kbps	2N	88.82	18.82	≥6	12.82
	LTE Band 41	20M_QPSK_1_0	40620	Close Mode	EVS WB 24.4kbps	8N	89.11	19.11	≥6	13.11
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR NB 4.75kbps	2N	90.43	20.43	≥6	14.43
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR NB 4.75kbps	8N	88.64	18.64	≥6	12.64
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR NB 12.2kbps	2N	89.75	19.75	≥6	13.75
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR NB 12.2kbps	8N	88.78	18.78	≥6	12.78
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR WB 6.60kbps	2N	88.92	18.92	≥6	12.92
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR WB 6.60kbps	8N	88.05	18.05	≥6	12.05
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR WB 23.85kbps	2N	90.76	20.76	≥6	14.76
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	AMR WB 23.85kbps	8N	88.51	18.51	≥6	12.51
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS NB 5.9kbps	2N	87.88	17.88	≥6	11.88
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS NB 5.9kbps	8N	88.71	18.71	≥6	12.71
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS WB 5.9kbps	2N	88.01	18.01	≥6	12.01
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS WB 5.9kbps	8N	88.54	18.54	≥6	12.54
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS NB 24.4kbps	2N	87.98	17.98	≥6	11.98
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS NB 24.4kbps	8N	88.96	18.96	≥6	12.96
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS WB 24.4kbps	2N	87.99	17.99	≥6	11.99
	LTE Band 48	20M_QPSK_1_0	55830	Close Mode	EVS WB 24.4kbps	8N	89.17	19.17	≥6	13.17

<NR>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Conversational Gain			
							Measured dB SPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR NB 4.75kbps	2N	90.19	20.19	≥6	14.19
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR NB 4.75kbps	8N	88.13	18.13	≥6	12.13
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR NB 12.2kbps	2N	88.67	18.67	≥6	12.67
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR NB 12.2kbps	8N	89.09	19.09	≥6	13.09
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR WB 6.60kbps	2N	90.77	20.77	≥6	14.77
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR WB 6.60kbps	8N	89.44	19.44	≥6	13.44
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR WB 23.85kbps	2N	89.85	19.85	≥6	13.85
	FR1 n7	50M_BPSK1_1	507000	Close Mode	AMR WB 23.85kbps	8N	88.83	18.83	≥6	12.83
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS NB 5.9kbps	2N	90.23	20.23	≥6	14.23
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS NB 5.9kbps	8N	88.62	18.62	≥6	12.62
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS WB 5.9kbps	2N	90.27	20.27	≥6	14.27
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS WB 5.9kbps	8N	89.16	19.16	≥6	13.16
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS NB 24.4kbps	2N	90.37	20.37	≥6	14.37
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS NB 24.4kbps	8N	88.6	18.6	≥6	12.6
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS WB 24.4kbps	2N	90.89	20.89	≥6	14.89
	FR1 n7	50M_BPSK1_1	507000	Close Mode	EVS WB 24.4kbps	8N	88.88	18.88	≥6	12.88
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR NB 4.75kbps	2N	89.97	19.97	≥6	13.97
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR NB 4.75kbps	8N	88.12	18.12	≥6	12.12
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR NB 12.2kbps	2N	88.87	18.87	≥6	12.87
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR NB 12.2kbps	8N	88.13	18.13	≥6	12.13
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR WB 6.60kbps	2N	89.61	19.61	≥6	13.61
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR WB 6.60kbps	8N	90.37	20.37	≥6	14.37
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR WB 23.85kbps	2N	89.79	19.79	≥6	13.79
	FR1 n12	15M_BPSK1_1	141500	Close Mode	AMR WB 23.85kbps	8N	90.12	20.12	≥6	14.12
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS NB 5.9kbps	2N	89.21	19.21	≥6	13.21
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS NB 5.9kbps	8N	88.11	18.11	≥6	12.11
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS WB 5.9kbps	2N	90.75	20.75	≥6	14.75
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS WB 5.9kbps	8N	89.22	19.22	≥6	13.22
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS NB 24.4kbps	2N	89.69	19.69	≥6	13.69
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS NB 24.4kbps	8N	88.03	18.03	≥6	12.03
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS WB 24.4kbps	2N	89.34	19.34	≥6	13.34
	FR1 n12	15M_BPSK1_1	141500	Close Mode	EVS WB 24.4kbps	8N	90.53	20.53	≥6	14.53
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR NB 4.75kbps	2N	90.54	20.54	≥6	14.54
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR NB 4.75kbps	8N	88.53	18.53	≥6	12.53
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR NB 12.2kbps	2N	88.9	18.9	≥6	12.9
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR NB 12.2kbps	8N	88.53	18.53	≥6	12.53
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR WB 6.60kbps	2N	90.16	20.16	≥6	14.16
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR WB 6.60kbps	8N	89.13	19.13	≥6	13.13
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR WB 23.85kbps	2N	88.18	18.18	≥6	12.18
	FR1 n14	10M_BPSK1_1	158600	Close Mode	AMR WB 23.85kbps	8N	90.75	20.75	≥6	14.75
	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS NB 5.9kbps	2N	90.13	20.13	≥6	14.13
	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS NB 5.9kbps	8N	88.67	18.67	≥6	12.67
7	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS WB 5.9kbps	2N	87.88	17.88	≥6	11.88
	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS WB 5.9kbps	8N	88.94	18.94	≥6	12.94
	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS NB 24.4kbps	2N	90.36	20.36	≥6	14.36
	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS NB 24.4kbps	8N	88.62	18.62	≥6	12.62
	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS WB 24.4kbps	2N	89.82	19.82	≥6	13.82
	FR1 n14	10M_BPSK1_1	158600	Close Mode	EVS WB 24.4kbps	8N	89.26	19.26	≥6	13.26
	FR1 n14	10M_BPSK1_1	158600	Open Mode	EVS NB 5.9kbps	2N	88.82	18.82	≥6	12.82
	FR1 n14	10M_BPSK1_1	158600	Open Mode	EVS NB 5.9kbps	8N	90.14	20.14	≥6	14.14
	FR1 n25	40M_BPSK1_1	376500	Close Mode	AMR NB 4.75kbps	2N	90.22	20.22	≥6	14.22



Volume Control Evaluation Report

Report No. : HA4N0920C

	FR1 n25	40M_BPSK_1_1	376500	Close Mode	AMR NB 4.75kbps	8N	88.13	18.13	≥6	12.13
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	AMR NB 12.2kbps	2N	89.83	19.83	≥6	13.83
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	AMR NB 12.2kbps	8N	88.62	18.62	≥6	12.62
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	AMR WB 6.60kbps	2N	88.97	18.97	≥6	12.97
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	AMR WB 6.60kbps	8N	88.68	18.68	≥6	12.68
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	AMR WB 23.85kbps	2N	89.72	19.72	≥6	13.72
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	AMR WB 23.85kbps	8N	88.17	18.17	≥6	12.17
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS NB 5.9kbps	2N	88.92	18.92	≥6	12.92
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS NB 5.9kbps	8N	88.59	18.59	≥6	12.59
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS WB 5.9kbps	2N	88.56	18.56	≥6	12.56
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS WB 5.9kbps	8N	89.17	19.17	≥6	13.17
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS NB 24.4kbps	2N	89.95	19.95	≥6	13.95
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS NB 24.4kbps	8N	88.12	18.12	≥6	12.12
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS WB 24.4kbps	2N	89.76	19.76	≥6	13.76
	FR1 n25	40M_BPSK_1_1	376500	Close Mode	EVS WB 24.4kbps	8N	89.79	19.79	≥6	13.79
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR NB 4.75kbps	2N	89.2	19.2	≥6	13.2
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR NB 4.75kbps	8N	88.5	18.5	≥6	12.5
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR NB 12.2kbps	2N	90.58	20.58	≥6	14.58
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR NB 12.2kbps	8N	88.05	18.05	≥6	12.05
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR WB 6.60kbps	2N	88.68	18.68	≥6	12.68
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR WB 6.60kbps	8N	88.66	18.66	≥6	12.66
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR WB 23.85kbps	2N	88.57	18.57	≥6	12.57
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	AMR WB 23.85kbps	8N	88.11	18.11	≥6	12.11
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS NB 5.9kbps	2N	90.22	20.22	≥6	14.22
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS NB 5.9kbps	8N	88.26	18.26	≥6	12.26
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS WB 5.9kbps	2N	89.9	19.9	≥6	13.9
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS WB 5.9kbps	8N	89.35	19.35	≥6	13.35
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS NB 24.4kbps	2N	90.9	20.9	≥6	14.9
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS NB 24.4kbps	8N	88.66	18.66	≥6	12.66
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS WB 24.4kbps	2N	90.13	20.13	≥6	14.13
	FR1 n26	20M_BPSK_1_1	166300	Close Mode	EVS WB 24.4kbps	8N	90.36	20.36	≥6	14.36
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR NB 4.75kbps	2N	89.94	19.94	≥6	13.94
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR NB 4.75kbps	8N	89.21	19.21	≥6	13.21
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR NB 12.2kbps	2N	90.7	20.7	≥6	14.7
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR NB 12.2kbps	8N	88.11	18.11	≥6	12.11
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR WB 6.60kbps	2N	89.63	19.63	≥6	13.63
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR WB 6.60kbps	8N	88.67	18.67	≥6	12.67
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR WB 23.85kbps	2N	88.85	18.85	≥6	12.85
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	AMR WB 23.85kbps	8N	88.07	18.07	≥6	12.07
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS NB 5.9kbps	2N	90.22	20.22	≥6	14.22
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS NB 5.9kbps	8N	88.16	18.16	≥6	12.16
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS WB 5.9kbps	2N	88.33	18.33	≥6	12.33
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS WB 5.9kbps	8N	89.06	19.06	≥6	13.06
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS NB 24.4kbps	2N	90.36	20.36	≥6	14.36
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS NB 24.4kbps	8N	88.67	18.67	≥6	12.67
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS WB 24.4kbps	2N	89.91	19.91	≥6	13.91
	FR1 n30	10M_BPSK_1_1	462000	Close Mode	EVS WB 24.4kbps	8N	88.57	18.57	≥6	12.57
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR NB 4.75kbps	2N	90.86	20.86	≥6	14.86
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR NB 4.75kbps	8N	88.19	18.19	≥6	12.19
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR NB 12.2kbps	2N	90.63	20.63	≥6	14.63
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR NB 12.2kbps	8N	88.15	18.15	≥6	12.15
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR WB 6.60kbps	2N	90.21	20.21	≥6	14.21
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR WB 6.60kbps	8N	88.51	18.51	≥6	12.51
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR WB 23.85kbps	2N	88.67	18.67	≥6	12.67
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	AMR WB 23.85kbps	8N	88.05	18.05	≥6	12.05
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS NB 5.9kbps	2N	89.25	19.25	≥6	13.25



Volume Control Evaluation Report

Report No. : HA4N0920C

	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS NB 5.9kbps	8N	88.15	18.15	≥6	12.15
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS WB 5.9kbps	2N	90.19	20.19	≥6	14.19
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS WB 5.9kbps	8N	88.04	18.04	≥6	12.04
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS NB 24.4kbps	2N	89.76	19.76	≥6	13.76
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS NB 24.4kbps	8N	88.81	18.81	≥6	12.81
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS WB 24.4kbps	2N	90.27	20.27	≥6	14.27
	FR1 n66	40M_BPSK_1_1	349000	Close Mode	EVS WB 24.4kbps	8N	89.36	19.36	≥6	13.36
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR NB 4.75kbps	2N	90.47	20.47	≥6	14.47
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR NB 4.75kbps	8N	88.78	18.78	≥6	12.78
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR NB 12.2kbps	2N	90.81	20.81	≥6	14.81
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR NB 12.2kbps	8N	89.06	19.06	≥6	13.06
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR WB 6.60kbps	2N	90.95	20.95	≥6	14.95
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR WB 6.60kbps	8N	90.45	20.45	≥6	14.45
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR WB 23.85kbps	2N	87.96	17.96	≥6	11.96
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	AMR WB 23.85kbps	8N	90.43	20.43	≥6	14.43
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS NB 5.9kbps	2N	89.65	19.65	≥6	13.65
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS NB 5.9kbps	8N	88.91	18.91	≥6	12.91
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS WB 5.9kbps	2N	90.22	20.22	≥6	14.22
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS WB 5.9kbps	8N	88.05	18.05	≥6	12.05
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS NB 24.4kbps	2N	90.27	20.27	≥6	14.27
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS NB 24.4kbps	8N	88.65	18.65	≥6	12.65
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS WB 24.4kbps	2N	90.84	20.84	≥6	14.84
	FR1 n70	15M_BPSK_1_1	340500	Close Mode	EVS WB 24.4kbps	8N	89.43	19.43	≥6	13.43
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR NB 4.75kbps	2N	90.86	20.86	≥6	14.86
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR NB 4.75kbps	8N	88.98	18.98	≥6	12.98
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR NB 12.2kbps	2N	89.87	19.87	≥6	13.87
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR NB 12.2kbps	8N	88.62	18.62	≥6	12.62
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR WB 6.60kbps	2N	89.96	19.96	≥6	13.96
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR WB 6.60kbps	8N	88.31	18.31	≥6	12.31
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR WB 23.85kbps	2N	90.83	20.83	≥6	14.83
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	AMR WB 23.85kbps	8N	88.01	18.01	≥6	12.01
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS NB 5.9kbps	2N	89.91	19.91	≥6	13.91
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS NB 5.9kbps	8N	89.33	19.33	≥6	13.33
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS WB 5.9kbps	2N	90.51	20.51	≥6	14.51
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS WB 5.9kbps	8N	88.87	18.87	≥6	12.87
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS NB 24.4kbps	2N	90.28	20.28	≥6	14.28
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS NB 24.4kbps	8N	88.15	18.15	≥6	12.15
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS WB 24.4kbps	2N	90.36	20.36	≥6	14.36
	FR1 n71	20M_BPSK_1_1	136100	Close Mode	EVS WB 24.4kbps	8N	89.23	19.23	≥6	13.23
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR NB 4.75kbps	2N	89.25	19.25	≥6	13.25
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR NB 4.75kbps	8N	88.88	18.88	≥6	12.88
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR NB 12.2kbps	2N	90.11	20.11	≥6	14.11
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR NB 12.2kbps	8N	88.18	18.18	≥6	12.18
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR WB 6.60kbps	2N	90.41	20.41	≥6	14.41
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR WB 6.60kbps	8N	88.61	18.61	≥6	12.61
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR WB 23.85kbps	2N	90.71	20.71	≥6	14.71
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	AMR WB 23.85kbps	8N	89.69	19.69	≥6	13.69
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS NB 5.9kbps	2N	90.07	20.07	≥6	14.07
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS NB 5.9kbps	8N	88.13	18.13	≥6	12.13
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS WB 5.9kbps	2N	88.04	18.04	≥6	12.04
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS WB 5.9kbps	8N	89.65	19.65	≥6	13.65
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS NB 24.4kbps	2N	90.82	20.82	≥6	14.82
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS NB 24.4kbps	8N	88.69	18.69	≥6	12.69
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS WB 24.4kbps	2N	90.97	20.97	≥6	14.97
	FR1 n41	100M_BPSK_1_1	518598	Close Mode	EVS WB 24.4kbps	8N	89.18	19.18	≥6	13.18
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR NB 4.75kbps	2N	90.51	20.51	≥6	14.51



Volume Control Evaluation Report

Report No. : HA4N0920C

	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR NB 4.75kbps	8N	89.22	19.22	≥6	13.22
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR NB 12.2kbps	2N	89.92	19.92	≥6	13.92
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR NB 12.2kbps	8N	89.25	19.25	≥6	13.25
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR WB 6.60kbps	2N	89.16	19.16	≥6	13.16
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR WB 6.60kbps	8N	89.03	19.03	≥6	13.03
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR WB 23.85kbps	2N	90.41	20.41	≥6	14.41
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	AMR WB 23.85kbps	8N	90.87	20.87	≥6	14.87
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS NB 5.9kbps	2N	88.88	18.88	≥6	12.88
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS NB 5.9kbps	8N	89.13	19.13	≥6	13.13
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS WB 5.9kbps	2N	88.69	18.69	≥6	12.69
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS WB 5.9kbps	8N	88.79	18.79	≥6	12.79
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS NB 24.4kbps	2N	90.51	20.51	≥6	14.51
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS NB 24.4kbps	8N	88.53	18.53	≥6	12.53
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS WB 24.4kbps	2N	89.74	19.74	≥6	13.74
	FR1 n48	100M_BPSK_1_1	641666	Close Mode	EVS WB 24.4kbps	8N	89.35	19.35	≥6	13.35
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR NB 4.75kbps	2N	90.71	20.71	≥6	14.71
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR NB 4.75kbps	8N	88.78	18.78	≥6	12.78
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR NB 12.2kbps	2N	90.51	20.51	≥6	14.51
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR NB 12.2kbps	8N	88.69	18.69	≥6	12.69
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR WB 6.60kbps	2N	90.24	20.24	≥6	14.24
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR WB 6.60kbps	8N	88.63	18.63	≥6	12.63
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR WB 23.85kbps	2N	90.55	20.55	≥6	14.55
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	AMR WB 23.85kbps	8N	88.73	18.73	≥6	12.73
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS NB 5.9kbps	2N	90.39	20.39	≥6	14.39
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS NB 5.9kbps	8N	88.72	18.72	≥6	12.72
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS WB 5.9kbps	2N	88.94	18.94	≥6	12.94
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS WB 5.9kbps	8N	88.82	18.82	≥6	12.82
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS NB 24.4kbps	2N	90.11	20.11	≥6	14.11
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS NB 24.4kbps	8N	88.54	18.54	≥6	12.54
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS WB 24.4kbps	2N	90.71	20.71	≥6	14.71
	FR1 n77	100M_BPSK_1_1	633332	Close Mode	EVS WB 24.4kbps	8N	89.99	19.99	≥6	13.99

<WLAN>

Plot No.	Air Interface	Radio Configuration	Channel	DUT Status	Codec & Bitrate	Mounting Force (N)	Conversational Gain			
							Measured dB SPL Level	Conv. Gain (dB)	Limit (dB)	Margin to Limit (dB)
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR NB 4.75kbps	2N	89.94	19.94	≥6	13.94
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR NB 4.75kbps	8N	88.15	18.15	≥6	12.15
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR NB 12.2kbps	2N	90.19	20.19	≥6	14.19
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR NB 12.2kbps	8N	88.12	18.12	≥6	12.12
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR WB 6.60kbps	2N	89.41	19.41	≥6	13.41
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR WB 6.60kbps	8N	88.75	18.75	≥6	12.75
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR WB 23.85kbps	2N	90.26	20.26	≥6	14.26
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	AMR WB 23.85kbps	8N	88.98	18.98	≥6	12.98
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS NB 5.9kbps	2N	88.07	18.07	≥6	12.07
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS NB 5.9kbps	8N	88.55	18.55	≥6	12.55
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS WB 5.9kbps	2N	87.78	17.78	≥6	11.78
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS WB 5.9kbps	8N	88.49	18.49	≥6	12.49
8	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS NB 24.4kbps	2N	87.28	17.28	≥6	11.28
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS NB 24.4kbps	8N	88.48	18.48	≥6	12.48
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS WB 24.4kbps	2N	87.93	17.93	≥6	11.93
	WLAN2.4GHz	802.11b 1Mbps	6	Close Mode	EVS WB 24.4kbps	8N	88.26	18.26	≥6	12.26
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR NB 4.75kbps	2N	90.78	20.78	≥6	14.78
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR NB 4.75kbps	8N	88.28	18.28	≥6	12.28

	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR NB 12.2kbps	2N	89.25	19.25	≥6	13.25
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR NB 12.2kbps	8N	88.6	18.6	≥6	12.6
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR WB 6.60kbps	2N	90.07	20.07	≥6	14.07
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR WB 6.60kbps	8N	89.41	19.41	≥6	13.41
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR WB 23.85kbps	2N	90.44	20.44	≥6	14.44
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	AMR WB 23.85kbps	8N	88.18	18.18	≥6	12.18
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS NB 5.9kbps	2N	88.29	18.29	≥6	12.29
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS NB 5.9kbps	8N	88.66	18.66	≥6	12.66
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS WB 5.9kbps	2N	88.4	18.4	≥6	12.4
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS WB 5.9kbps	8N	88.72	18.72	≥6	12.72
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS NB 24.4kbps	2N	88.14	18.14	≥6	12.14
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS NB 24.4kbps	8N	88.69	18.69	≥6	12.69
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS WB 24.4kbps	2N	88.62	18.62	≥6	12.62
	WLAN5GHz	802.11a 6Mbps	40	Close Mode	EVS WB 24.4kbps	8N	89.59	19.59	≥6	13.59
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR NB 4.75kbps	2N	90.94	20.94	≥6	14.94
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR NB 4.75kbps	8N	88.63	18.63	≥6	12.63
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR NB 12.2kbps	2N	89.41	19.41	≥6	13.41
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR NB 12.2kbps	8N	88.49	18.49	≥6	12.49
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR WB 6.60kbps	2N	90.46	20.46	≥6	14.46
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR WB 6.60kbps	8N	88.02	18.02	≥6	12.02
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR WB 23.85kbps	2N	89.77	19.77	≥6	13.77
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	AMR WB 23.85kbps	8N	88	18	≥6	12
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS NB 5.9kbps	2N	90.53	20.53	≥6	14.53
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS NB 5.9kbps	8N	88.34	18.34	≥6	12.34
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS WB 5.9kbps	2N	88.2	18.2	≥6	12.2
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS WB 5.9kbps	8N	88.6	18.6	≥6	12.6
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS NB 24.4kbps	2N	88.06	18.06	≥6	12.06
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS NB 24.4kbps	8N	88.31	18.31	≥6	12.31
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS WB 24.4kbps	2N	88.5	18.5	≥6	12.5
	WLAN5GHz	802.11a 6Mbps	60	Close Mode	EVS WB 24.4kbps	8N	89.18	19.18	≥6	13.18
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR NB 4.75kbps	2N	88.94	18.94	≥6	12.94
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR NB 4.75kbps	8N	88.47	18.47	≥6	12.47
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR NB 12.2kbps	2N	88.87	18.87	≥6	12.87
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR NB 12.2kbps	8N	88.13	18.13	≥6	12.13
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR WB 6.60kbps	2N	89.45	19.45	≥6	13.45
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR WB 6.60kbps	8N	88.71	18.71	≥6	12.71
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR WB 23.85kbps	2N	90.37	20.37	≥6	14.37
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	AMR WB 23.85kbps	8N	89.63	19.63	≥6	13.63
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS NB 5.9kbps	2N	89.13	19.13	≥6	13.13
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS NB 5.9kbps	8N	88.49	18.49	≥6	12.49
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS WB 5.9kbps	2N	88.85	18.85	≥6	12.85
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS WB 5.9kbps	8N	88.1	18.1	≥6	12.1
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS NB 24.4kbps	2N	88.16	18.16	≥6	12.16
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS NB 24.4kbps	8N	88.66	18.66	≥6	12.66
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS WB 24.4kbps	2N	88.61	18.61	≥6	12.61
	WLAN5GHz	802.11a 6Mbps	116	Close Mode	EVS WB 24.4kbps	8N	88.93	18.93	≥6	12.93
	WLAN5GHz	802.11a 6Mbps	116	Open Mode	AMR WB 23.85kbps	2N	89.64	19.64	≥6	13.64
	WLAN5GHz	802.11a 6Mbps	116	Open Mode	AMR WB 23.85kbps	8N	88.77	18.77	≥6	12.77
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR NB 4.75kbps	2N	88.6	18.6	≥6	12.6
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR NB 4.75kbps	8N	88.12	18.12	≥6	12.12
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR NB 12.2kbps	2N	88.47	18.47	≥6	12.47
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR NB 12.2kbps	8N	88.07	18.07	≥6	12.07
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR WB 6.60kbps	2N	90.92	20.92	≥6	14.92
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR WB 6.60kbps	8N	88.91	18.91	≥6	12.91
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR WB 23.85kbps	2N	90.44	20.44	≥6	14.44
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	AMR WB 23.85kbps	8N	88.28	18.28	≥6	12.28

	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS NB 5.9kbps	2N	89.27	19.27	≥6	13.27
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS NB 5.9kbps	8N	88.92	18.92	≥6	12.92
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS WB 5.9kbps	2N	90.92	20.92	≥6	14.92
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS WB 5.9kbps	8N	90.22	20.22	≥6	14.22
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS NB 24.4kbps	2N	88.16	18.16	≥6	12.16
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS NB 24.4kbps	8N	88.94	18.94	≥6	12.94
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS WB 24.4kbps	2N	88.8	18.8	≥6	12.8
	WLAN5GHz	802.11a 6Mbps	157	Close Mode	EVS WB 24.4kbps	8N	90.42	20.42	≥6	14.42
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR NB 4.75kbps	2N	90.63	20.63	≥6	14.63
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR NB 4.75kbps	8N	88.01	18.01	≥6	12.01
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR NB 12.2kbps	2N	88.54	18.54	≥6	12.54
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR NB 12.2kbps	8N	88.17	18.17	≥6	12.17
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR WB 6.60kbps	2N	89.59	19.59	≥6	13.59
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR WB 6.60kbps	8N	88.73	18.73	≥6	12.73
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR WB 23.85kbps	2N	89.9	19.9	≥6	13.9
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	AMR WB 23.85kbps	8N	88.5	18.5	≥6	12.5
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS NB 5.9kbps	2N	88.99	18.99	≥6	12.99
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS NB 5.9kbps	8N	88.48	18.48	≥6	12.48
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS WB 5.9kbps	2N	89.82	19.82	≥6	13.82
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS WB 5.9kbps	8N	89.61	19.61	≥6	13.61
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS NB 24.4kbps	2N	87.9	17.9	≥6	11.9
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS NB 24.4kbps	8N	88.48	18.48	≥6	12.48
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS WB 24.4kbps	2N	88.19	18.19	≥6	12.19
	WLAN5GHz	802.11a 6Mbps	173	Close Mode	EVS WB 24.4kbps	8N	89.14	19.14	≥6	13.14
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR NB 4.75kbps	2N	90.28	20.28	≥6	14.28
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR NB 4.75kbps	8N	88.51	18.51	≥6	12.51
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR NB 12.2kbps	2N	90.42	20.42	≥6	14.42
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR NB 12.2kbps	8N	89.28	19.28	≥6	13.28
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR WB 6.60kbps	2N	89.63	19.63	≥6	13.63
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR WB 6.60kbps	8N	88.66	18.66	≥6	12.66
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR WB 23.85kbps	2N	90.69	20.69	≥6	14.69
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	AMR WB 23.85kbps	8N	88.69	18.69	≥6	12.69
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS NB 5.9kbps	2N	89.39	19.39	≥6	13.39
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS NB 5.9kbps	8N	88.98	18.98	≥6	12.98
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS WB 5.9kbps	2N	90.26	20.26	≥6	14.26
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS WB 5.9kbps	8N	88.58	18.58	≥6	12.58
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS NB 24.4kbps	2N	90.15	20.15	≥6	14.15
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS NB 24.4kbps	8N	88.54	18.54	≥6	12.54
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS WB 24.4kbps	2N	90.06	20.06	≥6	14.06
	WLAN6GHz	802.11ax-HE20 MCS0	1	Close Mode	EVS WB 24.4kbps	8N	89.45	19.45	≥6	13.45

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Test Engineer : Din Liang

12. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Component	Standard uncertainty (dB)	U^2 (%)
Generator Accuracy To enable harmonic distortion measurements to 0.1%, the generator distortion must be <0.05%. This is equivalent to a standard uncertainty of 0.043 dB.	0.043	0.25
Ear Simulator Pressure Sensitivity (incl. Measurement Mic.) The uncertainty of the ear simulator as per the standards and quoted on its calibration certificate is 0.3 dB with a coverage factor of $k = 2$. This is equivalent to a standard uncertainty of $0.3/2 = 0.15$ dB.	0.15	3.03
Microphone Preamplifier The manufacturer quotes the preamp to be within ± 0.02 dB with a 95% probability or 2σ . This is equivalent to a standard uncertainty of $0.02/2 = 0.01$ dB.	0.01	0.01
Analysis System / RMS Detector Typical measurement system detector accuracy is 0.1 dB with a coverage factor of $k = 2$. This is equivalent to a standard uncertainty of $0.1/2 = 0.05$ dB.	0.05	0.33
Effect of Positioning on Mid-Band Sensitivity For a handset, with the HATS positioning jig, the typical standard deviation estimated from a statistically significant number of measurements is ± 2 dB. This is equivalent to a standard uncertainty of 2 dB.	0.5	35.11
Time Varying Effects of the Mouth Simulator for Send & Sidetone For a receive measurement on a handset, the mouth simulator is not used (its uncertainty is zero). The standard uncertainty of 0 dB	0	0.00
Total Standard Uncertainty (%)	6.22	
UMAX ($k = 2$) (%)	12.45	
UMAX ($k = 2$) (dB)	1.02	

Uncertainty Budget of Volume Control assessment



13. References

- [1] ANSI C63.19:2019, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", Aug. 2019.
- [2] FCC KDB 285076 D01v06r04, "Equipment Authorization Guidance for Hearing Aid Compatibility", Sep 2023.
- [3] FCC KDB 285076 D04 Volume Control v02, "GUIDANCE FOR PERFORMING VOLUME CONTROL MEASUREMENTS ON MOBILE HANDSETS", Sep. 2023
- [4] FCC KDB 285076 D05 HAC Waiver DA 23-914 v01, "HAC COMPLIANCE UNDER WAIVER DA 23-914", Sep. 2023
- [5] ANSI/TIA-5050-2018, "Receive Volume Control Requirements for Wireless (Mobile) Devices", Jan. 2018
- [6] Head Acoustic System Handbook