



FCC RADIO TEST REPORT

FCC ID : A4RGX7AS
Equipment : Phone
Model Name : GX7AS, GB17L
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2, 27

The product was received on Oct. 05, 2021 and testing was performed from Oct. 06, 2021 to Feb. 08, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example.....	10
2.5 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Items	12
3.1 Measuring Instruments	12
3.2 Conducted Output Power and EIRP	13
3.3 Peak-to-Average Ratio	14
3.4 Occupied Bandwidth.....	15
3.5 Conducted Band Edge	16
3.6 Conducted Spurious Emission	17
3.7 Frequency Stability	18
4 Radiated Test Items	19
4.1 Measuring Instruments	19
4.2 Radiated Spurious Emission Measurement	21
5 List of Measuring Equipment.....	22
6 Uncertainty of Evaluation	24
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of EIRP and Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG161608-05C	01	Initial issue of report	Feb. 11, 2022
FG161608-05C	02	1. Revise Limit for Test Results of Conducted Test 2. Revise EUT Information List and remark in section 2.1	Feb. 17, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§27.50 (h)(2)	Equivalent Isotropic Radiated Power (n38) (n41)	Pass	
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (n38) (n41)	Pass	-
3.6	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (n38) (n41)	Pass	-
3.7	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1051 §27.53 (m)(4)	Radiated Spurious Emission (n38) (n41)	Pass	Under limit 15.59 dB at 10404.000 MHz for Primary Antenna Under limit 13.68 dB at 7494.000 MHz for ASDIV Antenna

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: William Chen

Report Producer: Lucy Wu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
Model Name	GX7AS, GB17L
FCC ID	A4RGX7AS
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/GNSS WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE

Remark:

1. The above EUT's information was declared by manufacturer.
2. All the tests were performed with GX7AS.

EUT Information List	
S/N	Performed Test Item
19111FQGR00006 1A261FQGR00052	Conducted Measurement EIRP
1B161FQGR00042	Radiated Spurious Emission

1.2 Product Specification of Equipment Under Test

Product Specification is subjective to this standard	
Tx Frequency	5G NR n38: 2575.00 MHz ~ 2615.00 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz
Rx Frequency	5G NR n38: 2575.00 MHz ~ 2615.00 MHz 5G NR n41: 2506.02 MHz ~ 2679.99 MHz
Bandwidth	5G NR n38: 10MHz / 15MHz / 20MHz 5G NR n41: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz
Maximum Output Power to Antenna	<Primary Antenna> 5G NR n38 : 25.14 dBm 5G NR n41 : 24.77 dBm 5G NR n41 : 26.57 dBm for HPUE <ASDIV Antenna> 5G NR n38 : 24.95 dBm 5G NR n41 : 25.51 dBm 5G NR n41 : 26.45 dBm for HPUE
Antenna Type	<Primary Antenna>: IFA Antenna <ASDIV Antenna>: ILA Antenna
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM



<Primary Antenna>

Radio Tech	Band Number	Antenna name	Gain
5G NR	n38	ANT5	-1.9
5G NR	n41	ANT5	-1.9

<ASDIV Antenna>

Radio Tech	Band Number	Antenna name	Gain
5G NR	n38	ANT1	-2.2
5G NR	n41	ANT1	-2.2

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Luffy Lin
Temperature (°C)	23.4~24.6
Relative Humidity (%)	47.7~55.4

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Lance Chiang and Chuan Chu
Temperature (°C)	22.2~26.8
Relative Humidity (%)	56.6~68.2
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168

D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and Accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find **<Primary Antenna>**: Y plane with Adapter for EN-DC 4A-n41A; Z plane with Adapter for EN-DC 3A-n38A; **<ASDIV Antenna>**: Z Plane with Adapter for EN-DC 3A-n38A and EN-DC 4A-n41A as worst plane.

Test Items	NR Band	Bandwidth (MHz)										Modulation					RB #			Test Channel			
		10	15	20	30	40	50	60	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H	
Max. Output Power	n38	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	
	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n38			v	-	-	-	-	-	-	-	v	v	v	v	v			v		v		
	n41			v								v	v	v	v	v			v		v		
26dB and 99% Bandwidth	n38	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v			v		v		
	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v			v		v		
Conducted Band Edge	n38	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v		v	v		v	
	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v		v	
Conducted Spurious Emission	n38	v			-	-	-	-	-	-	-		v				v			v	v	v	
	n41	v											v				v			v	v	v	
Frequency Stability	n38	v			-	-	-	-	-	-	-	v							v		v		
	n41			v								v							v		v		
E.I.R.P	n38	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	Max. Power						
	n41	v	v	v	v	v	v	v	v	v	v	v	v	v	v								
Frequency Stability	n38	Worst Case																		v	v	v	
	n41	Worst Case																		v	v	v	
Remark	1. The mark "v " means that this configuration is chosen for testing																						
	2. The mark "- " means that this bandwidth is not supported.																						
	3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																						
	4. Test combination are EN-DC 3A-n38A and EN-DC 4A-n41A.																						
	5. For radiated test, the cases were performed with Adapter 2 and USB Cable 2.																						
	6. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant.																						
	7. All the NR SA/NSA modes are evaluated conducted power to determine the worst case mode for conducted items to be reported, for RSE, the NSA mode is selected to be performed instead of SA mode based on the NR output power is similar.																						

2.2 Connection Diagram of Test System

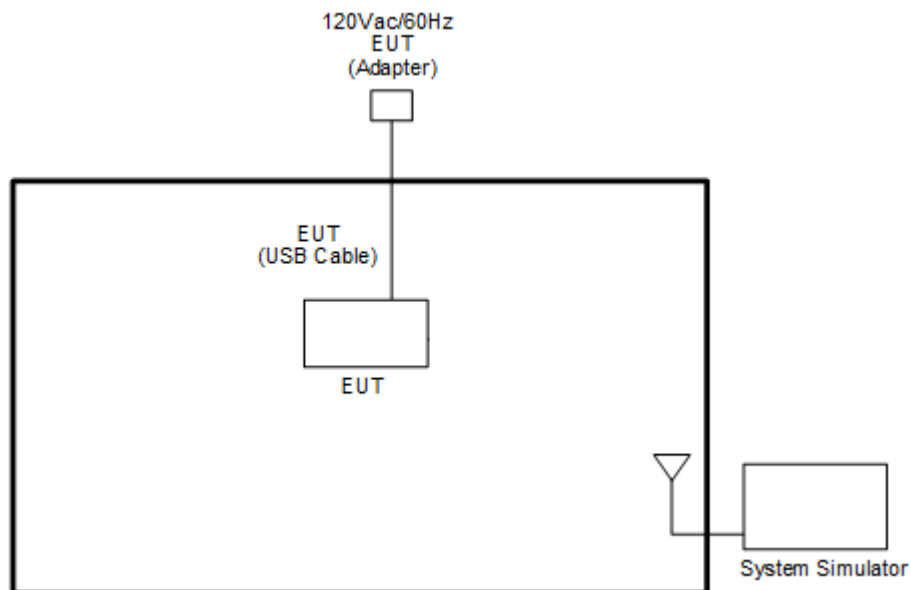

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	516000	519000	522000
	Frequency	2580.0	2595.0	2610.0
15	Channel	515500	519000	522500
	Frequency	2577.5	2595.0	2612.5
10	Channel	515000	519000	523000
	Frequency	2575.0	2595.0	2615.0



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511.00	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

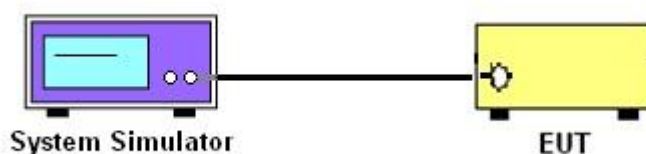

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

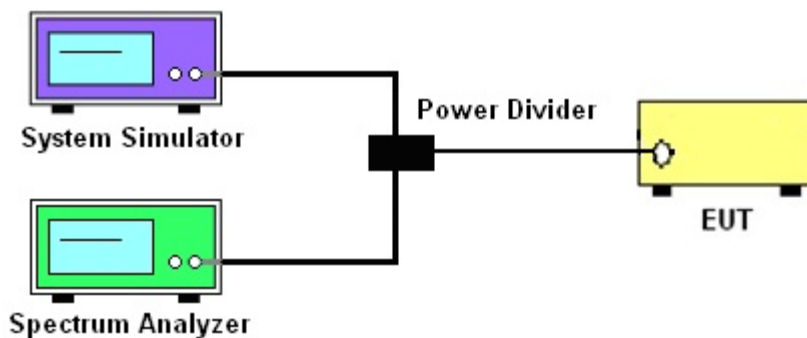

3.1.4 Frequency Stability

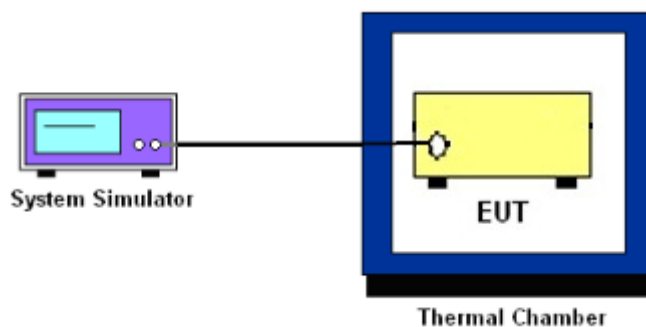

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and EIRP

3.2.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n38 and n41

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n38, n41

The other 40 dB, and 55 dB have additionally applied same calculation above.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n38, n41

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n38, n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

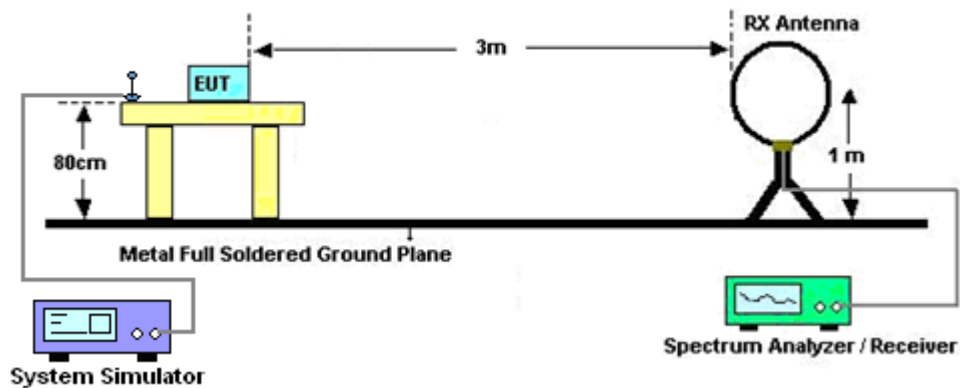


For radiated test from 30MHz to 1GHz

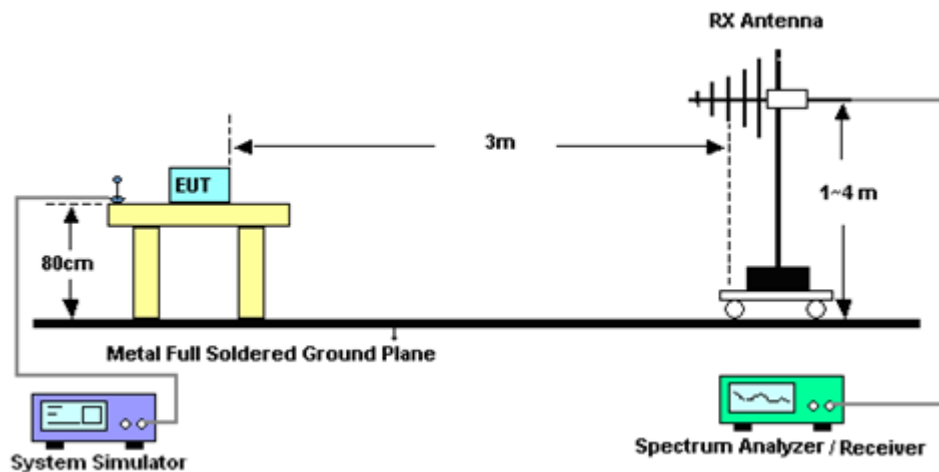

For radiated test from 1GHz to 18GHz

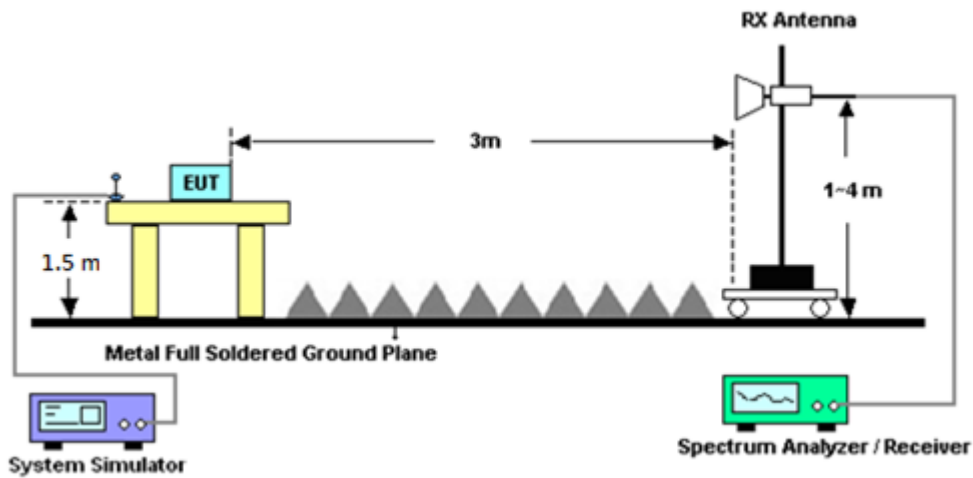

For radiated test above 18GHz

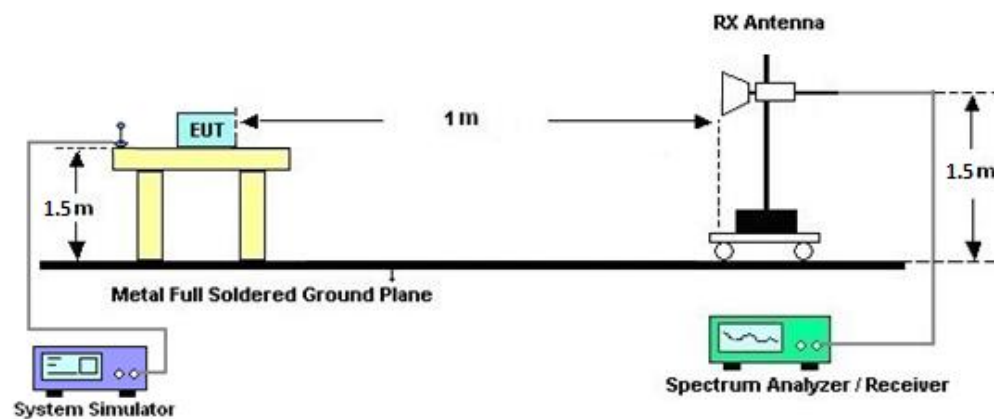

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n38, n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

For 5G NR n38, n41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Dec. 17, 2021~ Dec. 19, 2021	Jan. 03, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Oct. 09, 2021	Dec. 17, 2021~ Dec. 19, 2021	Oct. 08, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	Dec. 17, 2021~ Dec. 19, 2021	Oct. 08, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Oct. 25, 2021	Dec. 17, 2021~ Dec. 19, 2021	Oct. 24, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz~18GHz	May 18, 2021	Dec. 17, 2021~ Dec. 19, 2021	May 17, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	BBHA917098 0	18GHz~40GHz	Jan. 11, 2021	Dec. 17, 2021~ Dec. 19, 2021	Jan. 10, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917057 6	18GHz~40GHz	May 21, 2021	Dec. 17, 2021~ Dec. 19, 2021	May 20, 2022	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 24, 2021	Dec. 17, 2021~ Dec. 19, 2021	Mar. 23, 2022	Radiation (03CH12-HY)
Preamplifier	Aglient	8449B	3008A02375	1GHz~26.5GHz	May 25, 2021	Dec. 17, 2021~ Dec. 19, 2021	May 24, 2022	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03K	1710001800 054002	1GHz~18GHz	Jun. 16, 2021	Dec. 17, 2021~ Dec. 19, 2021	Jun. 15, 2022	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	Dec. 17, 2021~ Dec. 19, 2021	Dec. 23, 2022	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Jan. 15, 2021	Dec. 17, 2021~ Dec. 19, 2021	Jan. 14, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	Dec. 17, 2021~ Dec. 19, 2021	Dec. 09, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 22, 2021	Dec. 17, 2021~ Dec. 19, 2021	Feb. 21, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 22, 2021	Dec. 17, 2021~ Dec. 19, 2021	Feb. 21, 2022	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN2	6.75GHz High Pass Filter	Mar. 17, 2021	Dec. 17, 2021~ Dec. 19, 2021	Mar. 16, 2022	Radiation (03CH12-HY)
Hygrometer	TECEPEL	DTM-303B	TP140349	N/A	Sep. 30, 2021	Dec. 17, 2021~ Dec. 19, 2021	Sep. 29, 2022	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 17, 2021~ Dec. 19, 2021	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Dec. 17, 2021~ Dec. 19, 2021	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Dec. 17, 2021~ Dec. 19, 2021	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Dec. 17, 2021~ Dec. 19, 2021	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Programmable Power Supply	GW Instek	PSS-2005	EL890001	50Hz~60Hz	Oct. 06, 2021	Oct. 06, 2021~ Feb. 08, 2022	Oct. 05, 2022	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101048	10Hz~44GHz	Apr. 20, 2021	Oct. 06, 2021~ Feb. 08, 2022	Apr. 19, 2022	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-241	92003713	-30℃ ~95℃	May 21, 2021	Oct. 06, 2021~ Feb. 08, 2022	May 20, 2022	Conducted (TH03-HY)
Hygrometer	Testo	608-H11	3489324	NA	Mar. 01, 2021	Oct. 06, 2021~ Feb. 08, 2022	Feb. 28, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6262116733	LTE	Jul. 19, 2021	Oct. 06, 2021~ Feb. 08, 2022	Jul. 18, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262012917	FR1	Jan. 07, 2021	Oct. 08, 2021~ Jan. 05, 2022	Jan. 06, 2022	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262134933	FR1	Apr. 27, 2021	Feb. 08, 2022	Apr. 26, 2022	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.10 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.39 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.34 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power and EIRP)

<Primary Antenna>

NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.55	24.75	24.23	22.86	0.1932		
10	1	22		24.49	24.76	24.21				
10	12	6		24.54	24.73	24.12				
10	1	0		24.02	24.21	23.66				
10	1	23		24.01	24.26	23.68				
10	24	0		23.99	24.20	23.67				
10	1	1	QPSK	24.52	24.75	24.22				
10	1	22		24.51	24.71	24.22				
10	12	6		24.51	24.73	24.23				
10	1	0		23.56	23.71	23.21				
10	1	23		23.51	23.77	23.23				
10	24	0		23.73	23.74	23.33				
10	1	1	16-QAM	23.52	23.78	23.22	21.88	0.1542		
10	1	1	64-QAM	22.01	22.19	21.66				
10	1	1	256-QAM	19.89	20.09	19.48				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.49	24.75	24.21	22.87	0.1936		
15	1	36		24.52	24.76	24.24				
15	18	9		24.52	24.70	24.16				
15	1	0		23.97	24.22	23.77				
15	1	37		23.96	24.25	23.76				
15	36	0		24.01	24.22	23.56				
15	1	1	QPSK	24.48	24.68	24.22				
15	1	36		24.53	24.77	24.22				
15	18	9		24.52	24.74	24.10				
15	1	0		23.46	23.72	23.22				
15	1	37		23.49	23.75	23.33				
15	36	0		23.51	23.70	23.25				
15	1	1	16-QAM	23.47	23.73	23.22	21.83	0.1524		
15	1	1	64-QAM	22.01	22.16	21.80				
15	1	1	256-QAM	19.95	20.04	19.66				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.42	24.73	24.23	22.84	0.1923		
20	1	49		24.36	24.74	24.22				
20	25	12		24.42	24.71	24.32				
20	1	0		23.88	24.26	23.74				
20	1	50		23.88	24.28	23.75				
20	50	0		23.91	24.28	23.79				
20	1	1	QPSK	24.41	24.72	24.22				
20	1	49		24.37	24.69	24.07				
20	25	12		24.43	24.72	24.22				
20	1	0		23.42	23.75	23.12				
20	1	50		23.36	23.68	23.21				
20	50	0		23.40	23.69	23.13				
20	1	1	16-QAM	23.28	23.91	23.23	22.01	0.1589		
20	1	1	64-QAM	21.88	22.21	21.65				
20	1	1	256-QAM	19.76	20.02	19.66				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.46	24.71	24.23	22.85	0.1928		
30	1	76		24.43	24.67	24.22				
30	36	18		24.44	24.75	24.22				
30	1	0		23.89	24.13	23.63				
30	1	77		23.98	24.17	23.61				
30	75	0		23.99	24.19	23.65				
30	1	1	QPSK	24.41	24.71	24.12				
30	1	76		24.46	24.61	24.17				
30	36	18		24.45	24.69	24.33				
30	1	0		23.69	23.68	23.26				
30	1	77		23.44	23.64	23.13				
30	75	0		23.42	23.67	23.15				
30	1	1	16-QAM	23.46	23.56	23.25	21.66	0.1466		
30	1	1	64-QAM	21.75	22.02	21.51				
30	1	1	256-QAM	19.90	20.07	19.58				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.32	24.70	24.25	22.82	0.1914		
40	1	104		24.41	24.68	24.22				
40	50	25		24.37	24.72	24.16				
40	1	0		23.82	24.12	23.68				
40	1	105		23.95	24.14	23.65				
40	100	0		23.86	24.17	23.64				
40	1	1	QPSK	24.34	24.67	24.13				
40	1	104		24.45	24.60	24.13				
40	50	25		24.40	24.70	24.17				
40	1	0		23.32	23.60	23.19				
40	1	105		23.46	23.61	23.16				
40	100	0		23.35	23.71	23.22				
40	1	1	16-QAM	23.38	23.71	23.26	21.81	0.1517		
40	1	1	64-QAM	21.75	22.12	21.66				
40	1	1	256-QAM	19.82	20.01	19.66				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	24.38	24.62	24.39	22.83	0.1919		
50	1	131		24.65	24.60	24.12				
50	64	32		24.54	24.72	24.22				
50	1	0		23.82	24.07	23.82				
50	1	132		24.15	24.09	23.68				
50	128	0		24.06	24.19	23.75				
50	1	1	QPSK	24.31	24.58	24.25				
50	1	131		24.62	24.60	24.15				
50	64	32		24.51	24.73	24.18				
50	1	0		23.29	23.52	23.28				
50	1	132		23.61	23.57	23.11				
50	128	0		23.53	23.67	23.23				
50	1	1	16-QAM	23.38	23.64	23.35	21.74	0.1493		
50	1	1	64-QAM	21.63	22.04	21.72				
50	1	1	256-QAM	19.79	19.98	19.82				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	24.25	24.51	24.34	22.83	0.1919		
60	1	160		24.50	24.68	24.01				
60	81	40		24.49	24.73	24.22				
60	1	0		23.72	24.03	23.95				
60	1	161		23.98	24.12	23.55				
60	162	0		24.00	24.18	23.66				
60	1	1	QPSK	24.23	24.53	24.34				
60	1	160		24.52	24.50	24.02				
60	81	40		24.48	24.67	24.12				
60	1	0		23.26	23.49	23.36				
60	1	161		23.51	23.45	23.02				
60	162	0		23.49	23.71	23.05				
60	1	1	16-QAM	23.35	23.68	23.55	21.78	0.1507		
60	1	1	64-QAM	21.73	21.87	21.86				
60	1	1	256-QAM	19.75	19.83	19.86				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	24.23	24.41	24.38	22.72	0.1871		
80	1	215		24.52	24.29	23.88				
80	108	54		24.42	24.62	24.19				
80	1	0		23.70	23.84	23.92				
80	1	216		24.02	23.77	23.32				
80	216	0		23.91	23.95	23.65				
80	1	1	QPSK	24.19	24.36	24.36				
80	1	215		24.44	24.32	23.79				
80	108	54		24.48	24.56	24.13				
80	1	0		23.17	23.35	23.34				
80	1	216		23.42	23.29	22.83				
80	216	0		23.42	23.54	23.16				
80	1	1	16-QAM	22.91	23.46	23.39	21.56	0.1432		
80	1	1	64-QAM	21.57	22.12	21.96				
80	1	1	256-QAM	19.62	19.94	19.68				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	24.09	24.38	24.37	22.72	0.1871		
90	1	243		24.52	24.26	23.81				
90	120	60		24.52	24.62	24.27				
90	1	0		23.63	23.85	23.91				
90	1	244		23.99	23.77	23.39				
90	243	0		24.02	23.96	23.68				
90	1	1	QPSK	24.12	24.44	24.42				
90	1	243		24.48	24.24	23.87				
90	120	60		24.54	24.57	24.27				
90	1	0		23.01	23.33	23.41				
90	1	244		23.46	23.21	22.98				
90	243	0		23.51	23.47	23.18				
90	1	1	16-QAM	23.09	23.19	23.42	21.52	0.1419		
90	1	1	64-QAM	21.71	22.03	22.09				
90	1	1	256-QAM	19.60	19.84	19.93				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	24.18	24.34	24.35	22.69	0.1858		
100	1	271		24.42	24.16	23.88				
100	135	67		24.43	24.59	24.18				
100	1	0		23.58	23.87	23.82				
100	1	272		23.88	23.37	23.28				
100	270	0		23.87	23.95	23.65				
100	1	1	QPSK	24.15	24.31	24.37				
100	1	271		24.46	24.19	23.77				
100	135	67		24.44	24.54	24.17				
100	1	0		23.08	23.34	23.38				
100	1	272		23.27	23.16	22.82				
100	270	0		23.35	23.46	23.12				
100	1	1	16-QAM	23.12	23.23	23.46	21.56	0.1432		
100	1	1	64-QAM	21.56	21.77	21.99				
100	1	1	256-QAM	19.59	19.84	19.81				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	25.11	24.97	24.88	23.24	0.2109		
10	1	22		25.07	24.92	24.83				
10	12	6		25.12	24.96	24.87				
10	1	0		24.65	24.51	24.39				
10	1	23		24.61	24.45	24.34				
10	24	0		24.63	24.46	24.40				
10	1	1	QPSK	25.14	25.03	24.89				
10	1	22		25.06	24.95	24.86				
10	12	6		25.11	24.98	24.86				
10	1	0		24.16	24.02	23.92				
10	1	23		24.07	23.93	23.78				
10	24	0		24.07	23.95	23.80				
10	1	1	16-QAM	24.21	24.08	23.98	22.31	0.1702		
10	1	1	64-QAM	22.57	22.66	22.35				
10	1	1	256-QAM	20.69	20.41	20.26				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.02	25.01	25.11	23.21	0.2094		
15	1	36		24.93	24.87	24.79				
15	18	9		24.88	24.96	25.01				
15	1	0		24.49	24.52	24.46				
15	1	37		24.36	24.35	24.41				
15	36	0		24.42	24.48	24.42				
15	1	1	QPSK	24.98	25.02	25.06				
15	1	36		24.79	24.89	24.96				
15	18	9		24.93	24.98	24.89				
15	1	0		23.88	23.93	23.96				
15	1	37		23.81	23.89	23.79				
15	36	0		23.96	23.98	23.92				
15	1	1	16-QAM	23.95	23.99	23.85	22.09	0.1618		
15	1	1	64-QAM	22.33	22.42	22.39				
15	1	1	256-QAM	20.34	20.41	20.32				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.06	25.03	24.98	23.16	0.207		
20	1	49		24.79	24.84	24.81				
20	25	12		24.92	24.98	24.96				
20	1	0		24.55	24.50	24.44				
20	1	50		24.45	24.34	24.33				
20	50	0		24.51	24.45	24.41				
20	1	1	QPSK	25.01	24.99	24.92				
20	1	49		24.95	24.84	24.79				
20	25	12		24.98	24.96	24.85				
20	1	0		24.06	24.01	23.99				
20	1	50		23.98	23.83	23.72				
20	50	0		24.01	23.94	23.88				
20	1	1	16-QAM	23.98	23.95	23.76	22.08	0.1614		
20	1	1	64-QAM	22.42	22.37	22.29				
20	1	1	256-QAM	20.59	20.45	20.39				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	25.84	25.97	25.44	24.11	0.2576		
10	1	22		25.86	26.01	25.48				
10	12	6		25.82	25.98	25.32				
10	1	0		23.32	22.53	22.02				
10	1	23		22.38	22.52	22.06				
10	24	0		24.34	24.56	24.01				
10	1	1	QPSK	25.83	25.96	25.39				
10	1	22		25.81	25.98	25.47				
10	12	6		25.83	25.95	25.45				
10	1	0		22.38	22.49	22.06				
10	1	23		22.39	22.50	22.02				
10	24	0		24.36	24.48	24.01				
10	1	1	16-QAM	24.82	24.85	24.59	22.95	0.1972		
10	1	1	64-QAM	23.16	23.49	22.98				
10	1	1	256-QAM	21.29	21.35	20.85				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.80	25.98	25.48	24.08	0.2559		
15	1	36		25.81	25.96	25.46				
15	18	9		25.86	25.92	25.50				
15	1	0		22.31	22.55	22.01				
15	1	37		22.34	22.48	21.96				
15	36	0		24.32	24.49	24.02				
15	1	1	QPSK	25.84	25.95	25.48				
15	1	36		25.81	25.93	25.43				
15	18	9		25.85	25.96	25.49				
15	1	0		22.33	22.47	22.02				
15	1	37		22.29	22.46	21.98				
15	36	0		24.36	24.48	24.05				
15	1	1	16-QAM	24.87	24.92	24.71	23.02	0.2004		
15	1	1	64-QAM	23.40	23.43	22.98				
15	1	1	256-QAM	21.29	21.42	20.91				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.75	26.04	25.51	24.14	0.2594		
20	1	49		25.76	26.02	25.44				
20	25	12		25.78	26.01	25.54				
20	1	0		22.46	22.58	21.93				
20	1	50		22.42	22.51	21.95				
20	50	0		24.38	24.51	23.98				
20	1	1	QPSK	25.78	26.03	25.48				
20	1	49		25.75	25.96	25.53				
20	25	12		25.78	25.99	25.52				
20	1	0		22.39	22.53	21.96				
20	1	50		22.38	22.51	21.95				
20	50	0		24.22	24.47	24.03				
20	1	1	16-QAM	24.71	24.93	24.55	23.03	0.2009		
20	1	1	64-QAM	23.15	23.42	22.84				
20	1	1	256-QAM	21.18	21.46	20.91				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.83	26.02	25.43	24.12	0.2582		
30	1	76		25.92	25.95	25.44				
30	36	18		25.89	25.97	25.55				
30	1	0		22.31	22.53	21.95				
30	1	77		22.36	22.38	21.96				
30	75	0		24.36	24.49	23.97				
30	1	1	QPSK	25.79	25.92	25.41				
30	1	76		25.86	25.88	25.45				
30	36	18		25.83	25.93	25.51				
30	1	0		22.36	22.45	21.88				
30	1	77		22.32	22.38	21.95				
30	75	0		24.33	24.51	23.98				
30	1	1	16-QAM	24.83	25.02	24.48	23.12	0.2051		
30	1	1	64-QAM	23.34	23.57	22.98				
30	1	1	256-QAM	21.27	21.37	20.91				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	25.68	25.99	25.42	24.09	0.2564
40	1	104		25.72	25.86	25.44		
40	50	25		25.82	25.93	25.46		
40	1	0		22.21	22.45	21.96		
40	1	105		22.26	22.41	21.95		
40	100	0		24.21	24.42	23.98		
40	1	1	QPSK	25.66	25.92	25.44	24.09	0.2564
40	1	104		25.81	25.83	25.42		
40	50	25		25.76	25.94	25.46		
40	1	0		22.18	22.42	21.96		
40	1	105		22.16	22.32	21.85		
40	100	0		24.38	24.40	23.95		
40	1	1	16-QAM	24.82	24.96	24.52	23.06	0.2023
40	1	1	64-QAM	23.22	23.48	23.01		
40	1	1	256-QAM	21.24	21.35	20.98		
Limit	EIRP < 2W			Result			Pass	

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
50	1	1	PI/2 BPSK	25.76	25.93	25.62	24.08	0.2559
50	1	131		25.72	25.85	25.44		
50	64	32		25.82	25.98	25.51		
50	1	0		22.33	22.46	22.09		
50	1	132		22.31	22.39	21.95		
50	128	0		24.42	24.51	23.99		
50	1	1	QPSK	25.75	25.91	25.55	24.08	0.2559
50	1	131		25.79	25.86	25.42		
50	64	32		25.75	25.95	25.52		
50	1	0		22.38	22.41	22.01		
50	1	132		22.26	22.38	21.94		
50	128	0		24.38	24.45	24.01		
50	1	1	16-QAM	24.72	24.98	24.66	23.08	0.2032
50	1	1	64-QAM	23.15	23.38	23.14		
50	1	1	256-QAM	21.24	21.35	20.98		
Limit	EIRP < 2W			Result			Pass	



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	25.62	25.91	25.62	24.12	0.2582		
60	1	160		25.78	25.90	25.21				
60	81	40		25.76	26.02	25.34				
60	1	0		22.12	22.38	22.13				
60	1	161		22.30	22.37	21.67				
60	162	0		24.25	24.46	23.85				
60	1	1	QPSK	25.67	25.86	25.63				
60	1	160		25.74	25.84	25.34				
60	81	40		25.77	25.95	25.35				
60	1	0		22.12	22.35	22.12				
60	1	161		22.30	22.37	21.70				
60	162	0		24.25	24.41	23.82				
60	1	1	16-QAM	24.56	24.62	24.58	22.72	0.1871		
60	1	1	64-QAM	23.21	23.33	23.09				
60	1	1	256-QAM	21.12	21.24	21.03				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	25.63	25.85	25.74	24.07	0.2553		
80	1	215		25.84	25.74	25.21				
80	108	54		25.82	25.95	25.54				
80	1	0		22.12	22.35	22.18				
80	1	216		22.42	22.21	21.75				
80	216	0		24.32	24.40	23.96				
80	1	1	QPSK	25.62	25.81	25.67				
80	1	215		25.82	25.70	25.23				
80	108	54		25.82	25.97	25.47				
80	1	0		22.11	22.29	22.19				
80	1	216		22.29	22.18	21.74				
80	216	0		24.30	24.33	23.94				
80	1	1	16-QAM	25.51	24.95	24.83	23.61	0.2296		
80	1	1	64-QAM	23.02	23.27	23.16				
80	1	1	256-QAM	21.02	21.16	21.11				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	26.37	26.47	25.77	24.57	0.2864		
90	1	243		26.40	26.32	25.33				
90	120	60		25.86	25.72	24.83				
90	1	0		23.00	22.91	22.19				
90	1	244		22.88	22.75	21.81				
90	240	0		25.14	24.97	24.86				
90	1	1	QPSK	26.33	26.36	25.69				
90	1	243		26.35	26.21	26.01				
90	120	60		25.84	25.68	24.88				
90	1	0		22.90	22.87	22.85				
90	1	244		22.88	22.70	22.74				
90	240	0		25.08	24.92	24.56				
90	1	1	16-QAM	25.36	25.18	24.63	23.46	0.2218		
90	1	1	64-QAM	23.73	23.69	23.35				
90	1	1	256-QAM	21.78	21.75	21.53				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -1.9 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	26.21	26.44	26.39	24.67	0.2931		
100	1	271		26.35	26.33	26.17				
100	135	67		26.46	26.57	26.30				
100	1	0		22.64	23.01	22.94				
100	1	272		22.87	22.83	22.67				
100	270	0		24.88	25.01	24.78				
100	1	1	QPSK	26.24	26.35	26.27				
100	1	271		26.32	26.26	26.14				
100	135	67		26.46	26.52	26.24				
100	1	0		22.69	22.91	22.82				
100	1	272		22.85	22.79	22.61				
100	270	0		24.94	24.93	24.69				
100	1	1	16-QAM	25.21	25.39	25.33	23.49	0.2234		
100	1	1	64-QAM	23.77	23.91	23.89				
100	1	1	256-QAM	21.56	21.86	21.76				
Limit	EIRP < 2W			Result			Pass			



<ASDIV Antenna>

NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.67	25.18	25.41	23.21	0.2094		
10	1	22		24.80	25.28	25.38				
10	12	6		24.71	25.38	25.39				
10	1	0		24.02	24.79	24.75				
10	1	23		24.09	24.85	24.74				
10	24	0		24.11	24.74	24.72				
10	1	1	QPSK	24.52	25.25	25.21				
10	1	22		24.58	25.30	25.22				
10	12	6		24.53	25.24	25.21				
10	1	0		23.53	24.19	24.23				
10	1	23		23.58	24.27	24.22				
10	24	0		23.68	24.26	24.25				
10	1	1	16-QAM	23.52	24.18	24.25	22.05	0.1603		
10	1	1	64-QAM	22.16	22.73	22.78				
10	1	1	256-QAM	20.02	20.65	20.74				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.69	25.29	25.51	23.31	0.2143		
15	1	36		24.64	25.33	25.44				
15	18	9		24.67	25.30	25.43				
15	1	0		24.32	24.75	25.12				
15	1	37		24.36	24.82	25.16				
15	36	0		24.33	24.80	25.17				
15	1	1	QPSK	24.62	25.22	25.51				
15	1	36		24.63	25.28	25.44				
15	18	9		24.65	25.19	25.45				
15	1	0		24.36	24.96	25.13				
15	1	37		24.39	24.91	25.12				
15	36	0		24.38	24.95	25.15				
15	1	1	16-QAM	24.13	24.73	25.00	22.80	0.1905		
15	1	1	64-QAM	22.62	23.28	23.45				
15	1	1	256-QAM	20.13	20.69	21.01				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.72	25.21	25.41	23.21	0.2094		
20	1	49		24.63	25.29	25.39				
20	25	12		24.72	25.27	25.36				
20	1	0		24.33	24.73	25.04				
20	1	50		24.37	24.86	25.01				
20	50	0		24.36	24.81	25.01				
20	1	1	QPSK	24.69	25.14	25.34				
20	1	49		24.67	25.16	25.33				
20	25	12		24.69	25.18	25.36				
20	1	0		24.41	24.91	25.07				
20	1	50		24.33	24.88	25.06				
20	50	0		24.39	24.82	25.06				
20	1	1	16-QAM	24.13	24.66	24.83	22.63	0.1832		
20	1	1	64-QAM	22.65	23.13	23.37				
20	1	1	256-QAM	20.16	20.69	20.89				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	24.64	25.13	25.51	23.31	0.2143		
30	1	76		24.55	25.34	25.45				
30	36	18		24.57	25.35	25.48				
30	1	0		24.26	24.63	25.20				
30	1	77		24.30	24.79	25.16				
30	75	0		24.31	24.73	25.11				
30	1	1	QPSK	24.62	25.13	25.46				
30	1	76		24.54	25.08	25.45				
30	36	18		24.56	25.05	25.47				
30	1	0		24.32	24.73	25.18				
30	1	77		24.29	24.81	25.17				
30	75	0		24.31	24.81	25.20				
30	1	1	16-QAM	24.06	24.54	24.97	22.77	0.1892		
30	1	1	64-QAM	22.57	23.08	23.46				
30	1	1	256-QAM	20.06	20.55	21.00				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	24.53	25.07	25.46	23.26	0.2118		
40	1	104		24.43	25.32	25.45				
40	50	25		24.46	25.28	25.45				
40	1	0		24.16	24.63	25.09				
40	1	105		24.18	24.81	25.07				
40	100	0		24.15	24.77	25.15				
40	1	1	QPSK	24.44	24.99	25.41				
40	1	104		24.49	24.99	25.41				
40	50	25		24.47	25.02	25.46				
40	1	0		24.17	24.74	25.08				
40	1	105		24.18	24.74	25.15				
40	100	0		24.18	24.68	25.11				
40	1	1	16-QAM	23.94	24.55	24.88	22.68	0.1854		
40	1	1	64-QAM	22.44	22.98	23.38				
40	1	1	256-QAM	19.97	20.49	20.91				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	24.51	25.04	25.38	23.18	0.208		
50	1	131		24.42	25.29	25.36				
50	64	32		24.43	25.32	25.34				
50	1	0		24.21	24.56	25.07				
50	1	132		24.14	24.83	25.04				
50	128	0		24.19	24.74	25.04				
50	1	1	QPSK	24.44	25.02	25.33				
50	1	131		24.44	25.00	25.37				
50	64	32		24.48	25.01	25.34				
50	1	0		24.13	24.73	25.05				
50	1	132		24.12	24.65	25.00				
50	128	0		24.17	24.71	25.00				
50	1	1	16-QAM	24.00	24.45	24.86	22.66	0.1845		
50	1	1	64-QAM	22.48	22.95	23.37				
50	1	1	256-QAM	19.97	20.45	20.87				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	24.43	25.01	25.25	23.12	0.2051		
60	1	160		24.35	25.32	25.20				
60	81	40		24.41	25.28	25.20				
60	1	0		24.10	24.50	24.87				
60	1	161		24.07	24.82	24.91				
60	162	0		24.04	24.71	24.92				
60	1	1	QPSK	24.43	24.93	25.18				
60	1	160		24.34	24.98	25.16				
60	81	40		24.35	24.99	25.25				
60	1	0		24.04	24.63	24.95				
60	1	161		24.11	24.70	24.85				
60	162	0		24.13	24.63	24.85				
60	1	1	16-QAM	23.84	24.44	24.70	22.50	0.1778		
60	1	1	64-QAM	22.35	23.01	23.20				
60	1	1	256-QAM	19.85	20.43	20.65				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	24.47	24.82	25.26	23.13	0.2056		
80	1	215		24.43	25.33	25.16				
80	108	54		24.47	25.30	25.19				
80	1	0		24.12	24.41	24.89				
80	1	216		24.07	24.83	24.95				
80	216	0		24.09	24.62	24.87				
80	1	1	QPSK	24.42	24.77	25.24				
80	1	215		24.45	24.72	25.25				
80	108	54		24.43	24.76	25.19				
80	1	0		24.07	24.44	24.96				
80	1	216		24.13	24.50	24.87				
80	216	0		24.12	24.51	24.94				
80	1	1	16-QAM	23.89	24.29	24.69	22.49	0.1774		
80	1	1	64-QAM	22.46	22.78	23.18				
80	1	1	256-QAM	19.93	20.28	20.75				
Limit	EIRP < 2W			Result			Pass			



NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	24.46	24.82	25.15	23.14	0.2061		
90	1	243		24.36	25.34	25.12				
90	120	60		24.45	25.22	25.06				
90	1	0		24.13	24.35	24.78				
90	1	244		24.07	24.88	24.85				
90	243	0		24.10	24.67	24.82				
90	1	1	QPSK	24.39	24.80	25.06				
90	1	243		24.43	24.76	25.07				
90	120	60		24.42	24.81	25.05				
90	1	0		24.07	24.47	24.84				
90	1	244		24.15	24.46	24.83				
90	243	0		24.06	24.50	24.78				
90	1	1	16-QAM	23.95	24.29	24.57	22.37	0.1726		
90	1	1	64-QAM	22.42	22.81	23.08				
90	1	1	256-QAM	19.87	20.30	20.65				
Limit	EIRP < 2W			Result			Pass			

NR n41 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	24.42	24.78	25.05	23.11	0.2046		
100	1	271		24.33	25.31	24.98				
100	135	67		24.42	25.22	25.03				
100	1	0		24.10	24.31	24.71				
100	1	272		24.10	24.87	24.71				
100	270	0		24.12	24.66	24.67				
100	1	1	QPSK	24.41	24.73	25.01				
100	1	271		24.37	24.72	25.03				
100	135	67		24.34	24.68	25.04				
100	1	0		24.05	24.48	24.74				
100	1	272		24.10	24.44	24.66				
100	270	0		24.07	24.38	24.68				
100	1	1	16-QAM	23.85	24.24	24.54	22.34	0.1714		
100	1	1	64-QAM	22.38	22.73	23.01				
100	1	1	256-QAM	19.83	20.22	20.46				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	24.95	24.93	24.67	22.75	0.1884		
10	1	22		24.92	24.84	24.58				
10	12	6		24.93	24.81	24.58				
10	1	0		24.60	24.35	24.30				
10	1	23		24.57	24.29	24.31				
10	24	0		24.57	24.43	24.35				
10	1	1	QPSK	24.87	24.93	24.60				
10	1	22		24.90	24.87	24.57				
10	12	6		24.89	24.88	24.60				
10	1	0		24.64	24.57	24.32				
10	1	23		24.63	24.56	24.37				
10	24	0		24.61	24.53	24.36				
10	1	1	16-QAM	24.38	24.42	24.16	22.22	0.1667		
10	1	1	64-QAM	22.87	22.84	22.58				
10	1	1	256-QAM	20.36	20.38	20.09				
Limit	EIRP < 2W			Result			Pass			

NR n38 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	24.92	24.83	24.92	22.72	0.1871		
15	1	36		24.88	24.75	24.86				
15	18	9		24.90	24.85	24.88				
15	1	0		24.56	24.35	24.60				
15	1	37		24.54	24.26	24.57				
15	36	0		24.56	24.43	24.60				
15	1	1	QPSK	24.87	24.82	24.86				
15	1	36		24.84	24.76	24.82				
15	18	9		24.83	24.74	24.82				
15	1	0		24.62	24.53	24.57				
15	1	37		24.55	24.52	24.55				
15	36	0		24.62	24.49	24.53				
15	1	1	16-QAM	24.33	24.26	24.40	22.20	0.166		
15	1	1	64-QAM	22.85	22.81	22.90				
15	1	1	256-QAM	20.33	20.31	20.35				
Limit	EIRP < 2W			Result			Pass			



NR n38 Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	24.93	24.92	24.87	22.73	0.1875		
20	1	49		24.86	24.65	24.78				
20	25	12		24.89	24.82	24.81				
20	1	0		24.58	24.35	24.49				
20	1	50		24.59	24.17	24.48				
20	50	0		24.57	24.38	24.48				
20	1	1	QPSK	24.83	24.91	24.84				
20	1	49		24.86	24.88	24.79				
20	25	12		24.84	24.83	24.79				
20	1	0		24.61	24.53	24.53				
20	1	50		24.55	24.56	24.56				
20	50	0		24.54	24.52	24.51				
20	1	1	16-QAM	24.36	24.41	24.37	22.21	0.1663		
20	1	1	64-QAM	22.87	22.83	22.83				
20	1	1	256-QAM	20.33	20.38	20.36				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
10	1	1	PI/2 BPSK	25.88	26.25	26.35	24.18	0.2618		
10	1	22		25.86	26.33	26.29				
10	12	6		25.88	26.38	26.33				
10	1	0		25.57	22.86	25.96				
10	1	23		25.50	22.82	26.00				
10	24	0		25.50	24.85	26.03				
10	1	1	QPSK	25.83	26.23	26.29				
10	1	22		25.83	26.18	26.31				
10	12	6		25.85	26.20	26.31				
10	1	0		25.48	25.92	26.00				
10	1	23		25.55	25.93	25.97				
10	24	0		25.52	25.88	25.97				
10	1	1	16-QAM	25.35	25.68	25.82	23.62	0.2301		
10	1	1	64-QAM	23.87	24.22	24.31				
10	1	1	256-QAM	21.28	21.66	21.85				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
15	1	1	PI/2 BPSK	25.80	26.33	26.34	24.15	0.26		
15	1	36		25.72	26.32	26.26				
15	18	9		25.80	26.35	26.27				
15	1	0		25.47	22.88	26.03				
15	1	37		25.45	22.85	25.96				
15	36	0		25.46	24.88	26.02				
15	1	1	QPSK	25.77	26.25	26.26				
15	1	36		25.76	26.25	26.28				
15	18	9		25.79	26.32	26.26				
15	1	0		25.46	25.93	26.02				
15	1	37		25.47	25.96	25.96				
15	36	0		25.49	26.02	25.97				
15	1	1	16-QAM	25.28	25.75	25.80	23.60	0.2291		
15	1	1	64-QAM	23.74	24.27	24.29				
15	1	1	256-QAM	21.24	21.73	21.79				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
20	1	1	PI/2 BPSK	25.75	26.21	26.42	24.22	0.2642		
20	1	49		25.72	26.32	26.37				
20	25	12		25.66	26.24	26.41				
20	1	0		25.39	22.87	26.09				
20	1	50		25.37	22.86	26.08				
20	50	0		25.44	24.85	26.07				
20	1	1	QPSK	25.68	26.14	26.33				
20	1	49		25.72	26.18	26.42				
20	25	12		25.75	26.11	26.35				
20	1	0		25.44	25.82	26.10				
20	1	50		25.37	25.87	26.07				
20	50	0		25.43	25.88	26.08				
20	1	1	16-QAM	25.18	25.67	25.83	23.63	0.2307		
20	1	1	64-QAM	23.71	24.13	24.37				
20	1	1	256-QAM	21.17	21.66	21.83				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
30	1	1	PI/2 BPSK	25.78	26.21	26.44	24.24	0.2655		
30	1	76		25.70	26.33	26.43				
30	36	18		25.71	26.35	26.37				
30	1	0		25.44	22.65	26.14				
30	1	77		25.40	22.85	26.10				
30	75	0		25.40	24.93	26.06				
30	1	1	QPSK	25.70	26.12	26.41				
30	1	76		25.75	26.11	26.35				
30	36	18		25.68	26.18	26.42				
30	1	0		25.38	25.88	26.07				
30	1	77		25.39	25.88	26.06				
30	75	0		25.39	25.88	26.11				
30	1	1	16-QAM	25.23	25.66	25.86	23.66	0.2323		
30	1	1	64-QAM	23.70	24.20	24.40				
30	1	1	256-QAM	21.27	21.64	21.89				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
40	1	1	PI/2 BPSK	25.68	26.18	26.45	24.25	0.2661		
40	1	104		25.62	26.38	26.36				
40	50	25		25.60	26.33	26.42				
40	1	0		25.35	22.71	26.09				
40	1	105		25.30	22.83	26.13				
40	100	0		25.33	24.86	26.13				
40	1	1	QPSK	25.62	26.08	26.43				
40	1	104		25.62	26.08	26.45				
40	50	25		25.67	26.16	26.43				
40	1	0		25.30	25.80	26.08				
40	1	105		25.36	25.80	26.14				
40	100	0		25.36	25.80	26.06				
40	1	1	16-QAM	25.08	25.60	25.93	23.73	0.236		
40	1	1	64-QAM	23.67	24.09	24.36				
40	1	1	256-QAM	21.09	21.65	21.86				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
50	1	1	PI/2 BPSK	25.66	26.18	26.42	24.22	0.2642		
50	1	131		25.58	26.42	26.39				
50	64	32		25.57	26.41	26.32				
50	1	0		25.27	22.60	26.11				
50	1	132		25.26	22.91	26.07				
50	128	0		25.32	24.88	26.09				
50	1	1	QPSK	25.59	26.10	26.36				
50	1	131		25.65	26.15	26.33				
50	64	32		25.65	26.18	26.34				
50	1	0		25.31	25.80	26.03				
50	1	132		25.26	25.84	26.09				
50	128	0		25.29	25.87	26.11				
50	1	1	16-QAM	25.14	25.61	25.87	23.67	0.2328		
50	1	1	64-QAM	23.60	24.11	24.37				
50	1	1	256-QAM	21.15	21.61	21.91				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
60	1	1	PI/2 BPSK	25.62	26.04	26.35	24.18	0.2618		
60	1	160		25.61	26.38	26.32				
60	81	40		25.61	26.32	26.30				
60	1	0		25.22	22.49	25.97				
60	1	161		25.27	22.85	26.01				
60	162	0		25.28	24.92	25.99				
60	1	1	QPSK	25.54	26.00	26.26				
60	1	160		25.53	26.03	26.34				
60	81	40		25.53	25.94	26.25				
60	1	0		25.25	25.73	26.00				
60	1	161		25.26	25.70	26.04				
60	162	0		25.28	25.66	26.04				
60	1	1	16-QAM	25.07	25.49	25.81	23.61	0.2296		
60	1	1	64-QAM	23.58	23.95	24.32				
60	1	1	256-QAM	21.06	21.52	21.75				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
80	1	1	PI/2 BPSK	25.62	25.82	25.58	24.12	0.2582		
80	1	215		25.54	26.32	25.58				
80	108	54		25.61	26.28	25.57				
80	1	0		25.26	22.40	25.24				
80	1	216		25.28	22.83	25.26				
80	216	0		25.29	24.82	25.20				
80	1	1	QPSK	25.55	25.77	25.54				
80	1	215		25.52	25.74	25.54				
80	108	54		25.57	25.78	25.49				
80	1	0		25.31	25.51	25.21				
80	1	216		25.26	25.46	25.23				
80	216	0		25.23	25.50	25.26				
80	1	1	16-QAM	25.04	25.29	24.98	23.09	0.2037		
80	1	1	64-QAM	23.62	23.76	23.49				
80	1	1	256-QAM	21.10	21.25	21.03				
Limit	EIRP < 2W			Result			Pass			



NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
90	1	1	PI/2 BPSK	25.58	25.89	26.14	24.18	0.2618		
90	1	243		25.56	26.38	26.08				
90	120	60		25.52	26.22	26.10				
90	1	0		25.23	22.45	25.77				
90	1	244		25.26	22.89	25.75				
90	240	0		25.23	24.81	25.83				
90	1	1	QPSK	25.49	25.85	26.10				
90	1	243		25.50	25.84	26.12				
90	120	60		25.56	25.89	26.11				
90	1	0		25.23	25.59	25.74				
90	1	244		25.19	25.54	25.79				
90	240	0		25.18	25.54	25.78				
90	1	1	16-QAM	25.06	25.31	25.57	23.37	0.2173		
90	1	1	64-QAM	23.49	23.82	24.08				
90	1	1	256-QAM	21.07	21.29	21.57				
Limit	EIRP < 2W			Result			Pass			

NR n41 (HPUE) Maximum Average Power [dBm] (GT - LC = -2.2 dB)										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)		
100	1	1	PI/2 BPSK	25.63	25.92	26.15	24.24	0.2655		
100	1	271		25.54	26.44	26.08				
100	135	67		25.53	26.37	26.14				
100	1	0		25.32	22.41	25.85				
100	1	272		25.24	23.02	25.76				
100	270	0		25.33	24.77	25.77				
100	1	1	QPSK	25.56	25.82	26.11				
100	1	271		25.57	25.88	26.12				
100	135	67		25.59	25.86	26.06				
100	1	0		25.29	25.55	25.83				
100	1	272		25.27	25.60	25.79				
100	270	0		25.29	25.57	25.78				
100	1	1	16-QAM	25.06	25.41	25.58	23.38	0.2178		
100	1	1	64-QAM	23.60	23.84	24.06				
100	1	1	256-QAM	21.03	21.37	21.62				
Limit	EIRP < 2W			Result			Pass			


**FR1 n38****Peak-to-Average Ratio**

Mode	FR1 n38 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.24	5.46	5.86	6.32	PASS
Mode	FR1 n38 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.38				PASS




FR1 n38 / 20MHz / DFT-S OFDM / Middle Channel / Full RB


PI/2 BPSK

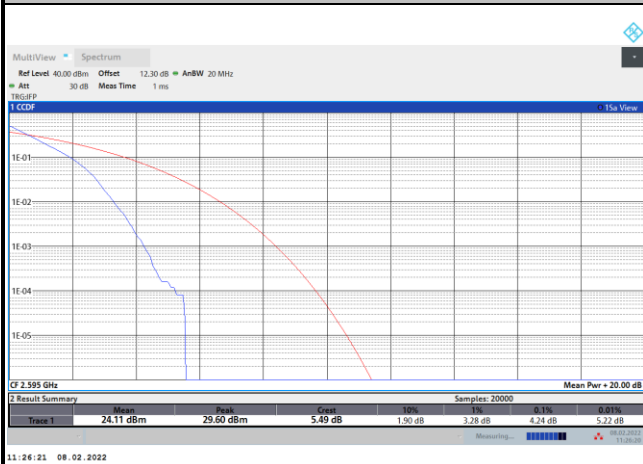


QPSK

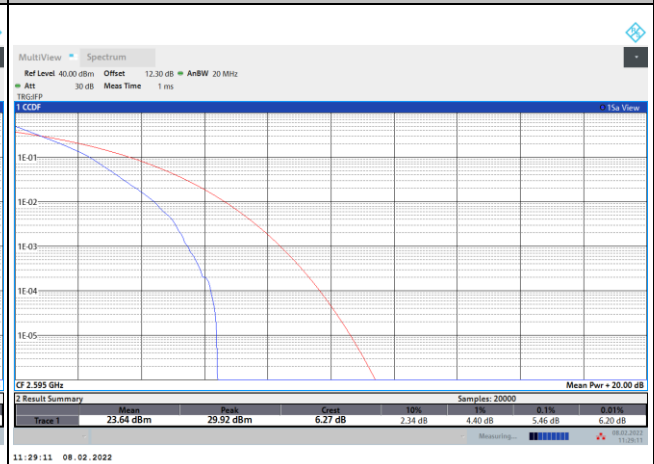


16QAM

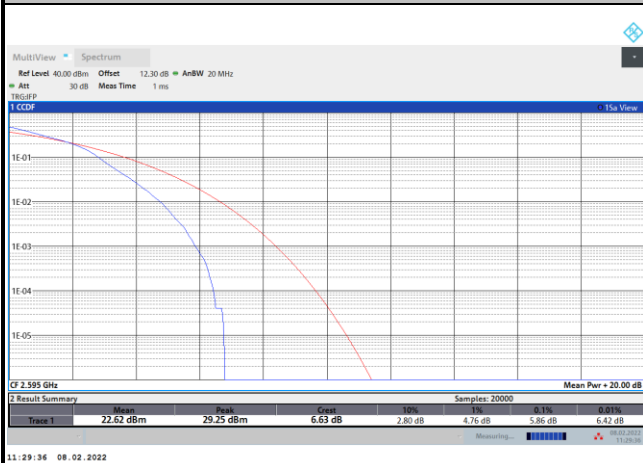

64QAM

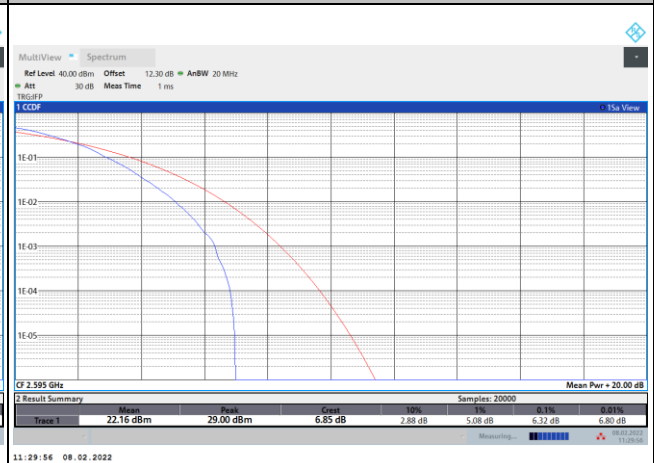






256QAM





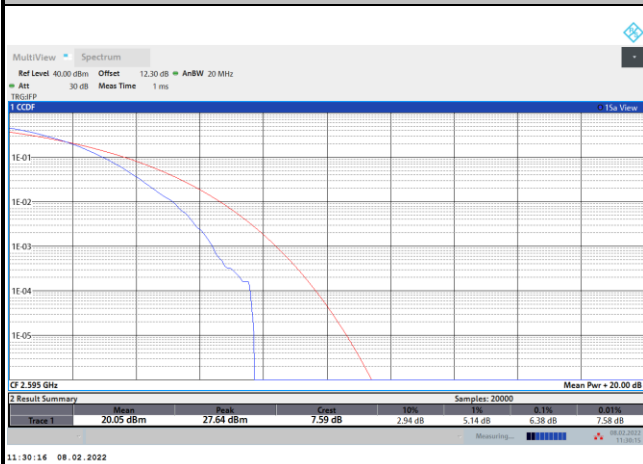


**26dB Bandwidth**

Mode	FR1 n38 : 26dB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz					
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK					
Middle CH	9.57	13.64	18.82					


Mode	FR1 n38 : 26dB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Middle CH	8.93	9.29	14.39	14.39	19.14	19.10		
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM		
Middle CH	9.55	9.11	14.54	14.57	19.10	19.30		

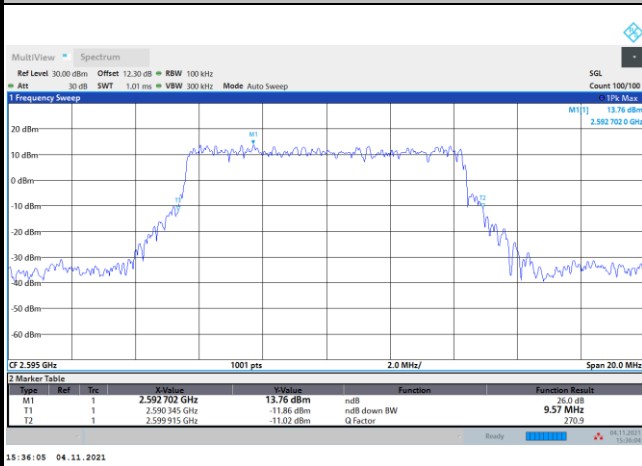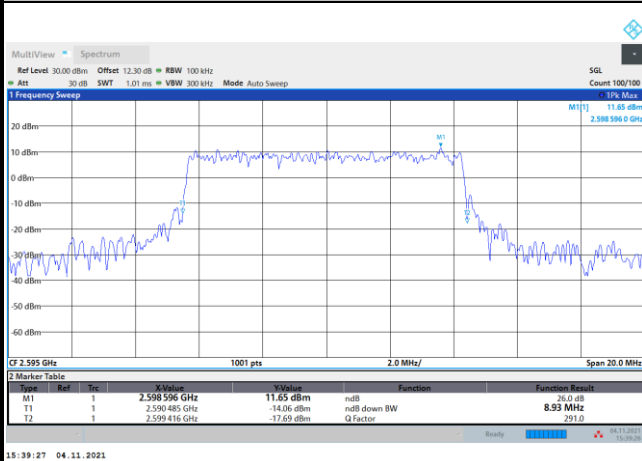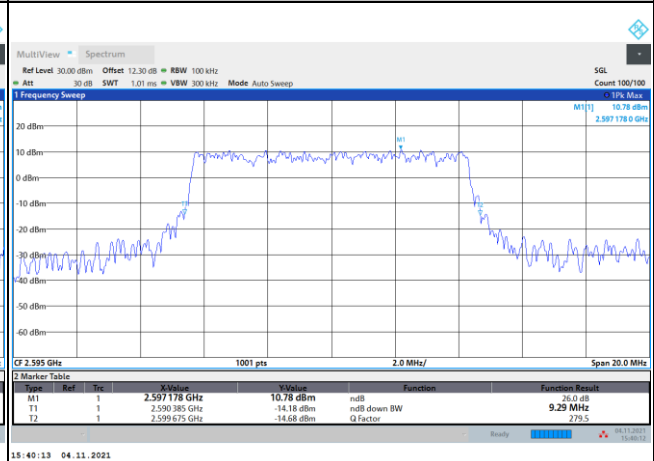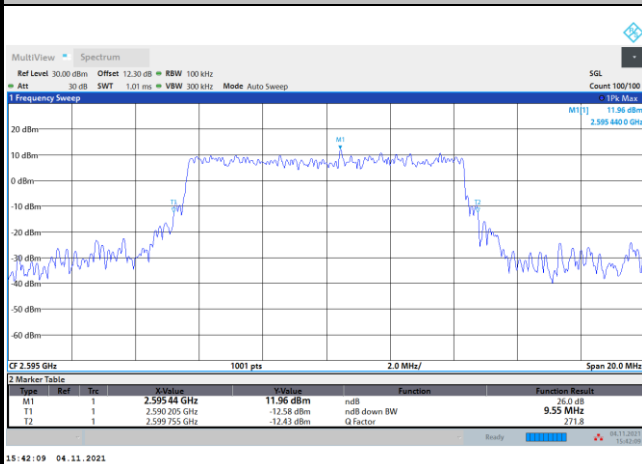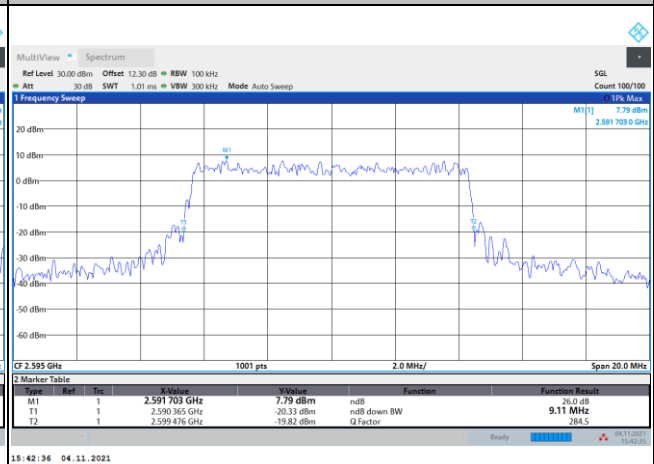FR1 n38 / 10MHz / DFT-S OFDM / Middle Channel / Full RB
PI/2 BPSK

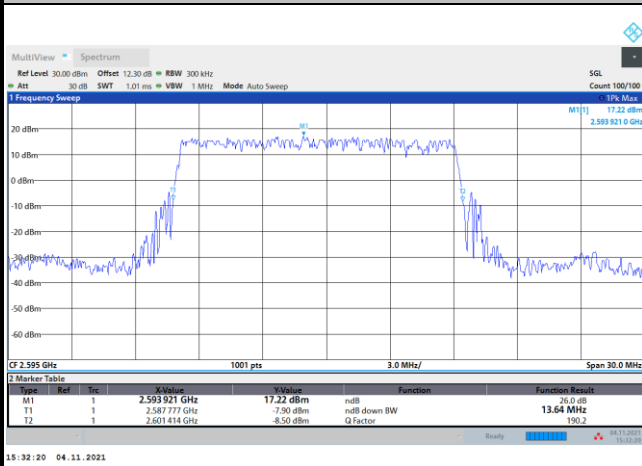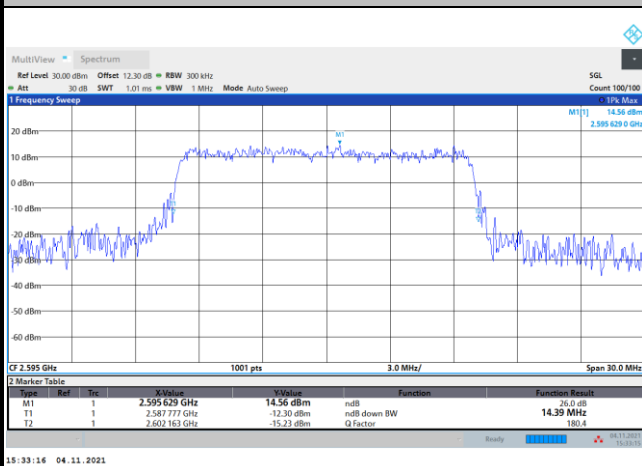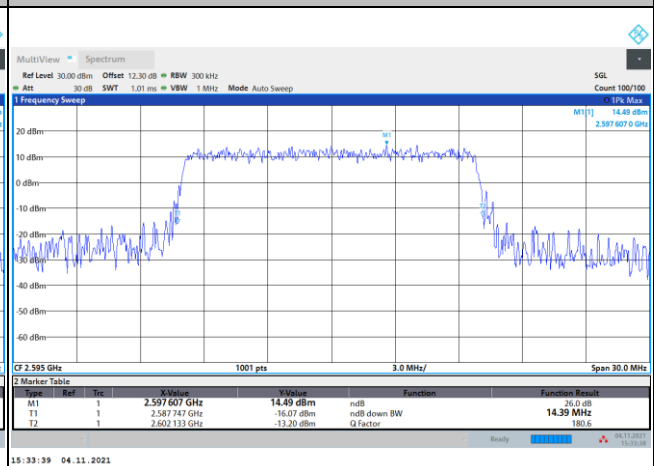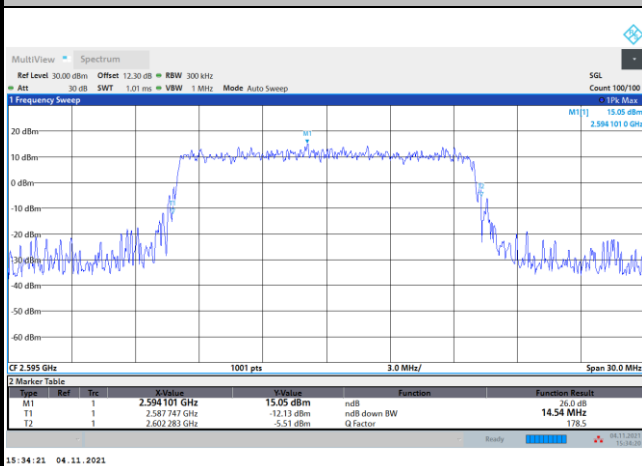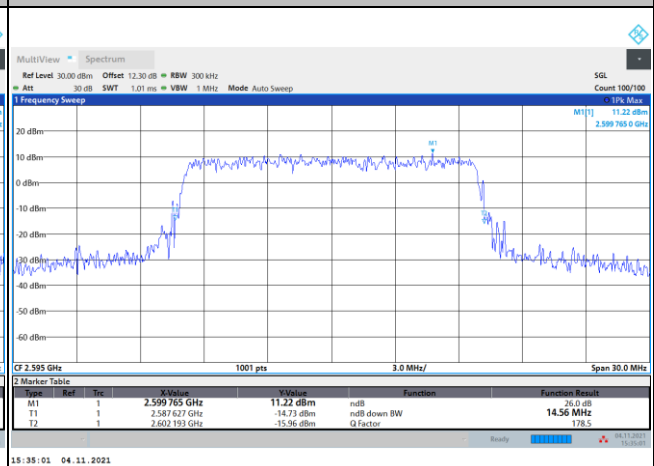FR1 n38 / 10MHz / CP OFDM / Middle Channel / Full RB
QPSK

16QAM

64QAM

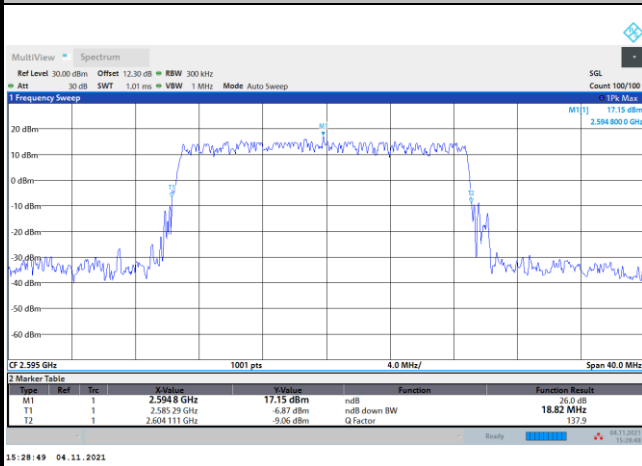256QAM


FR1 n38 / 15MHz / DFT-S OFDM / Middle Channel / Full RB
PI/2 BPSK

FR1 n38 / 15MHz / CP OFDM / Middle Channel / Full RB
QPSK

16QAM

64QAM

256QAM


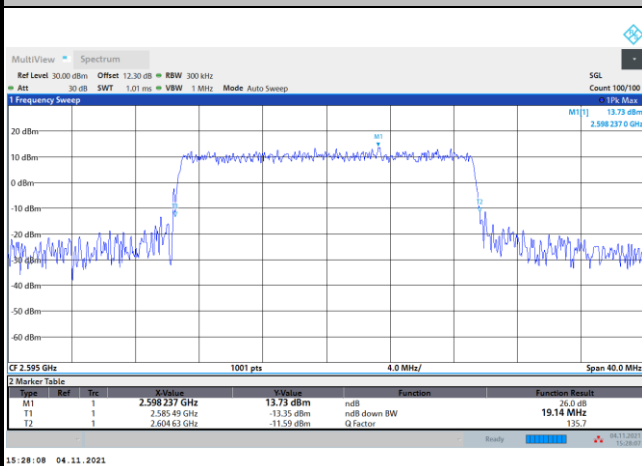
FR1 n38 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK




FR1 n38 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK




16QAM

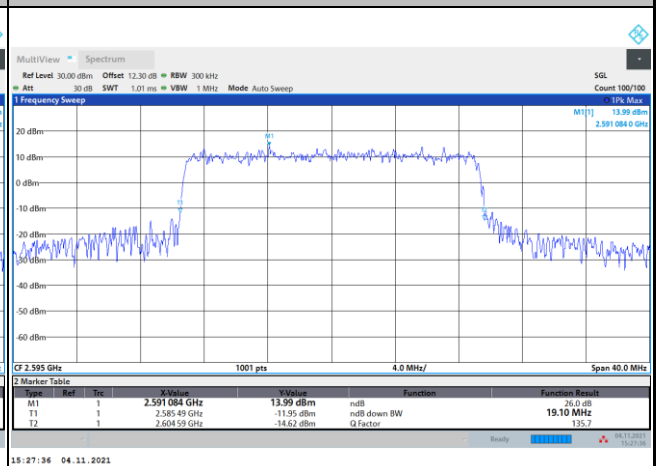

64QAM

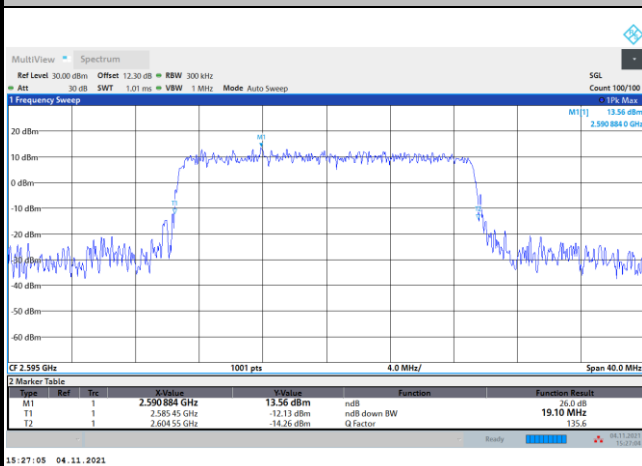






256QAM





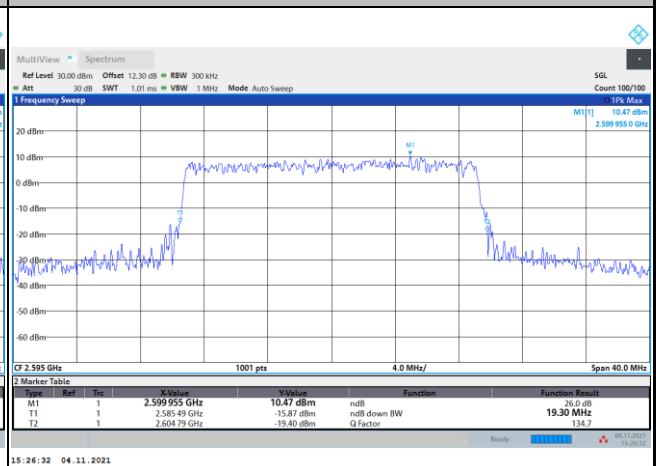







**Occupied Bandwidth**

Mode	FR1 n38 : OB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz					
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK					
Middle CH	8.61	12.92	17.93					

Mode	FR1 n38 : OB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Middle CH	8.60	8.57	13.59	13.64	18.23	18.16		
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM		
Middle CH	8.59	8.57	13.62	13.61	18.32	18.19		

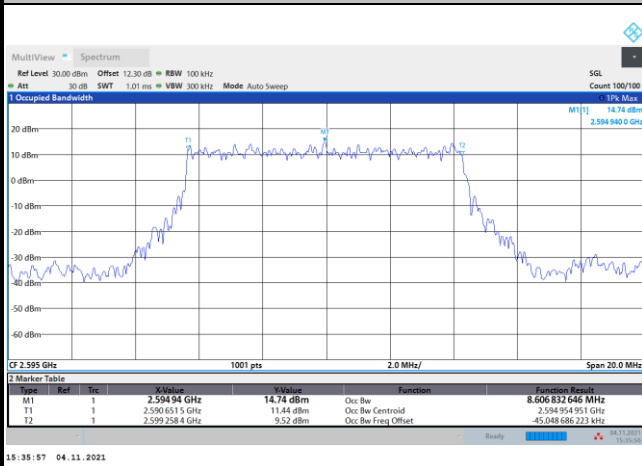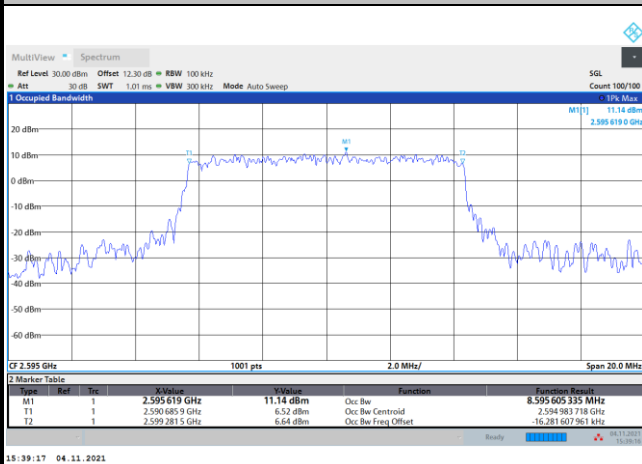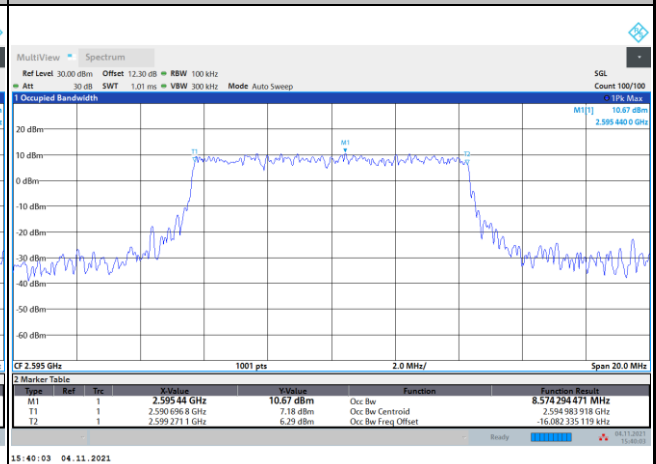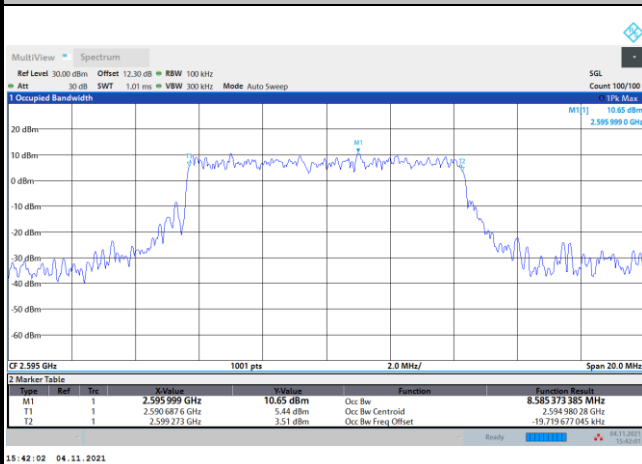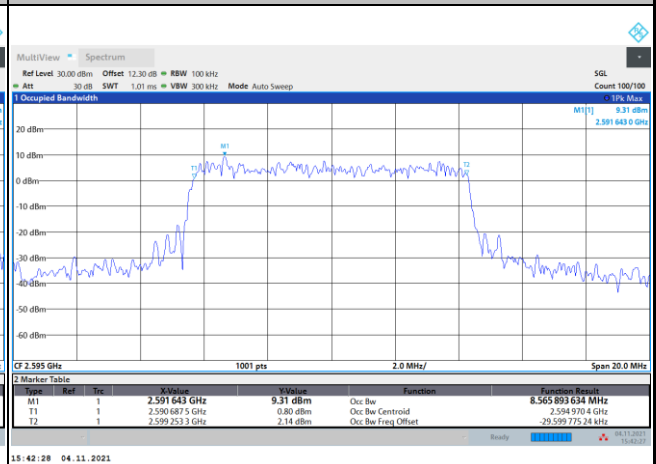FR1 n38 / 10MHz / DFT-S OFDM / Middle Channel / Full RB
PI/2 BPSK

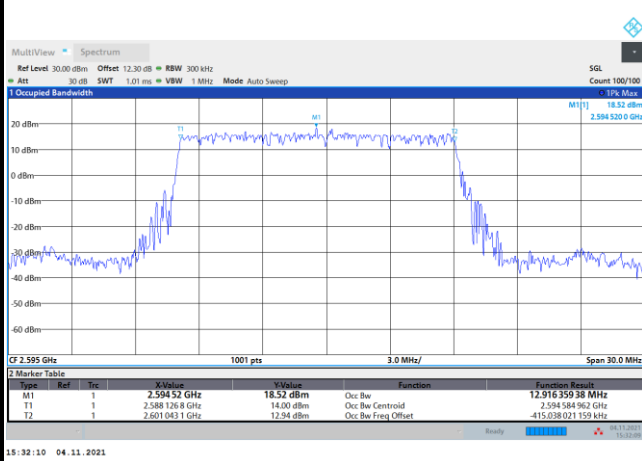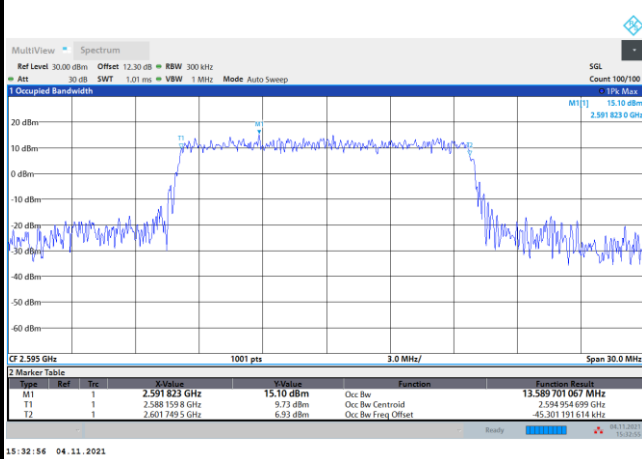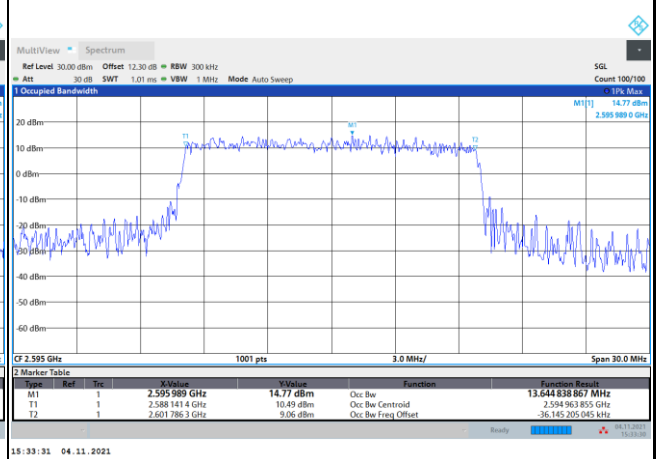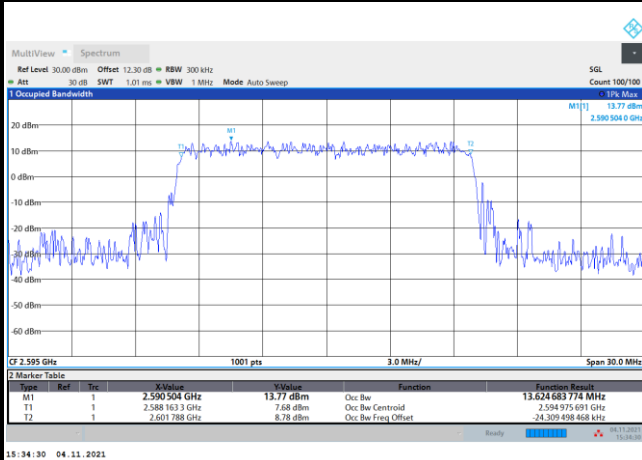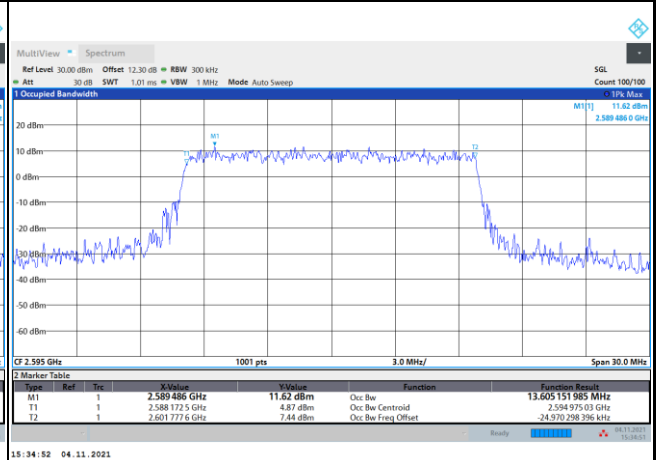FR1 n38 / 10MHz / CP OFDM / Middle Channel / Full RB
QPSK

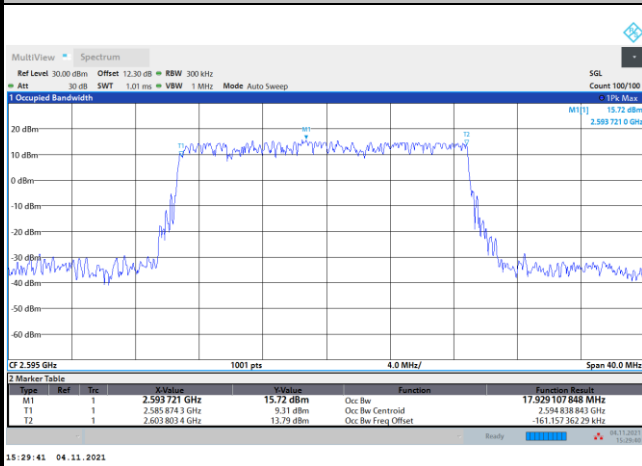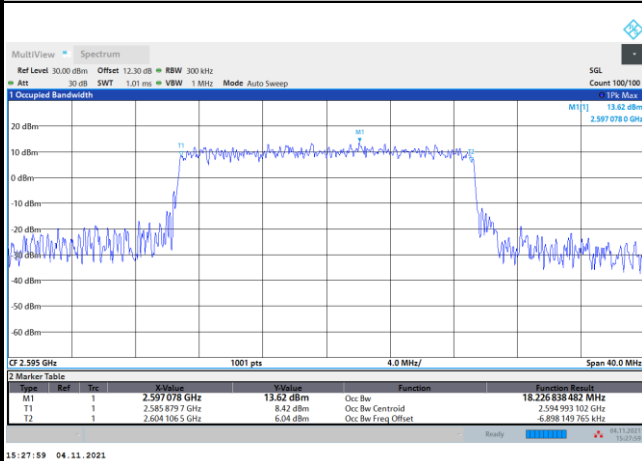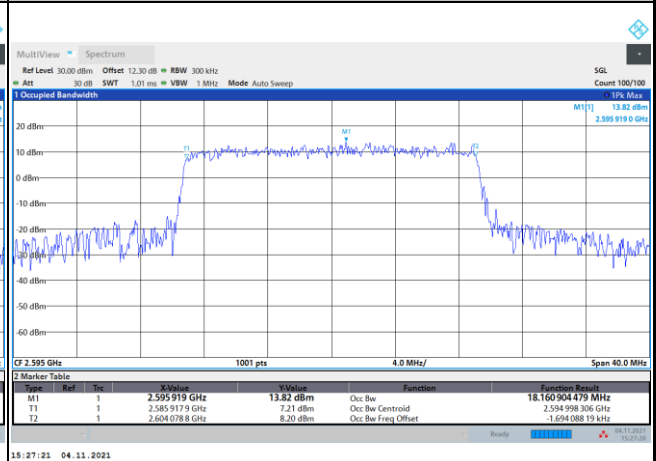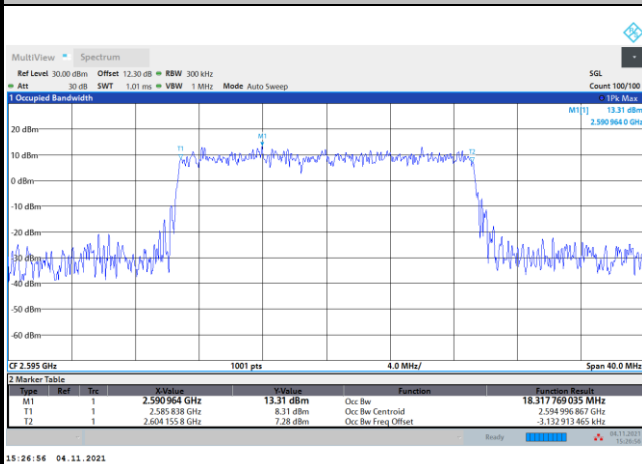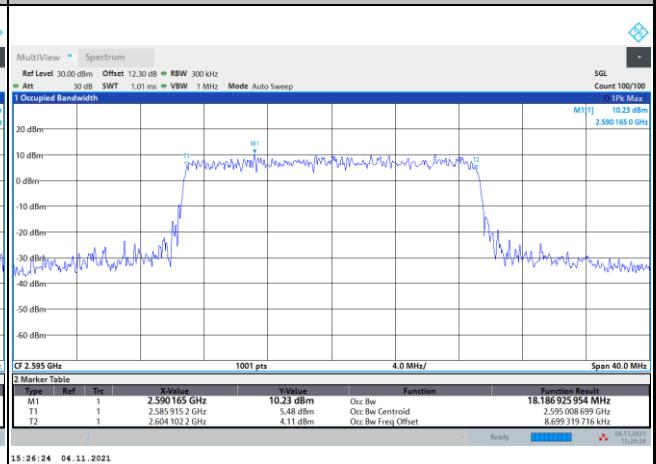16QAM

64QAM

256QAM


FR1 n38 / 15MHz / DFT-S OFDM / Middle Channel / Full RB
PI/2 BPSK

FR1 n38 / 15MHz / CP OFDM / Middle Channel / Full RB
QPSK

16QAM

64QAM

256QAM


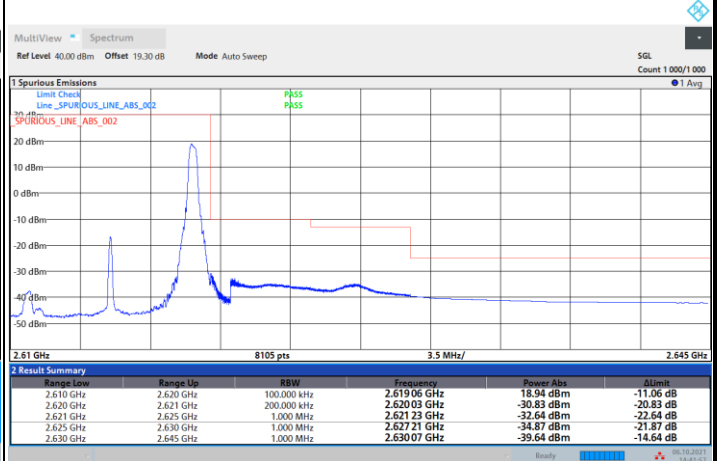
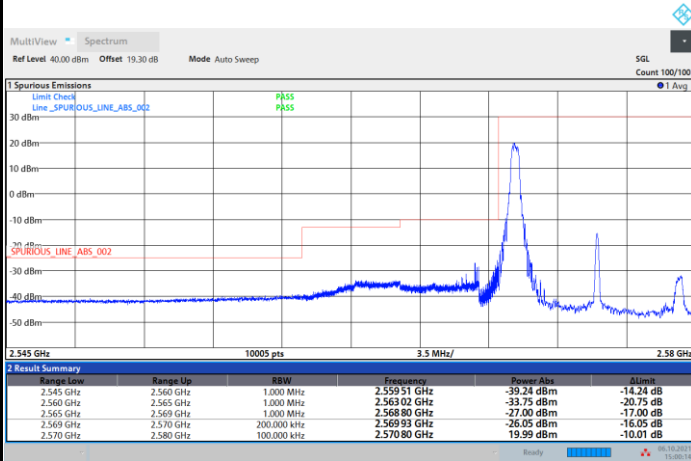
FR1 n38 / 20MHz / DFT-S OFDM / Middle Channel / Full RB
PI/2 BPSK

FR1 n38 / 20MHz / CP OFDM / Middle Channel / Full RB
QPSK

16QAM

64QAM

256QAM


Conducted Band Edge

FR1 n38 / 10MHz / DFT-S OFDM / PI/2 BPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax



Lowest Band Edge / Full RB

Highest Band Edge / Full RB

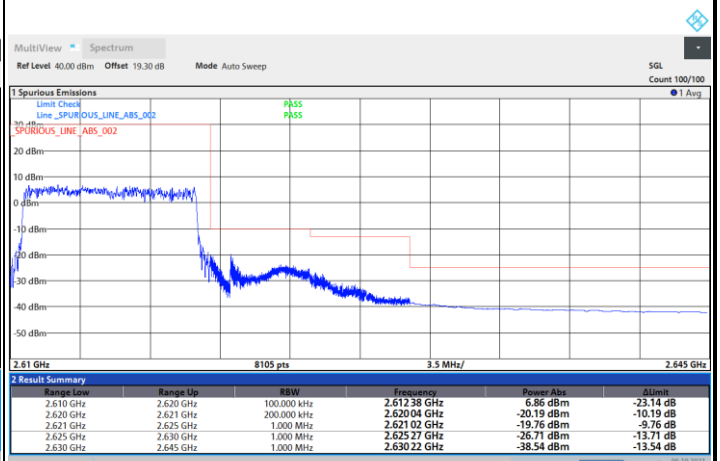
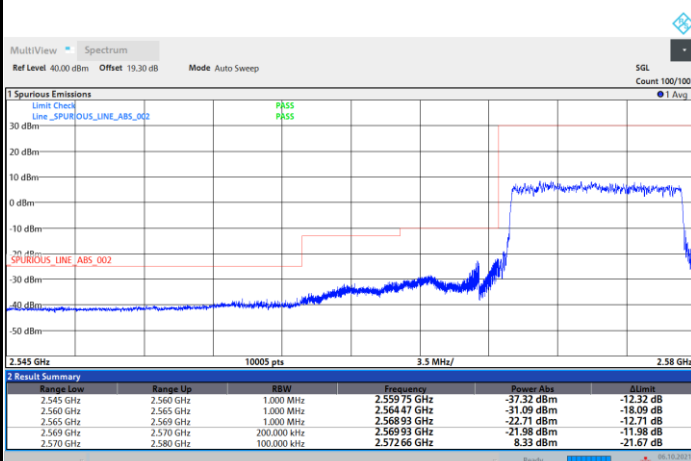




FR1 n38 / 10MHz / DFT-S OFDM / QPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

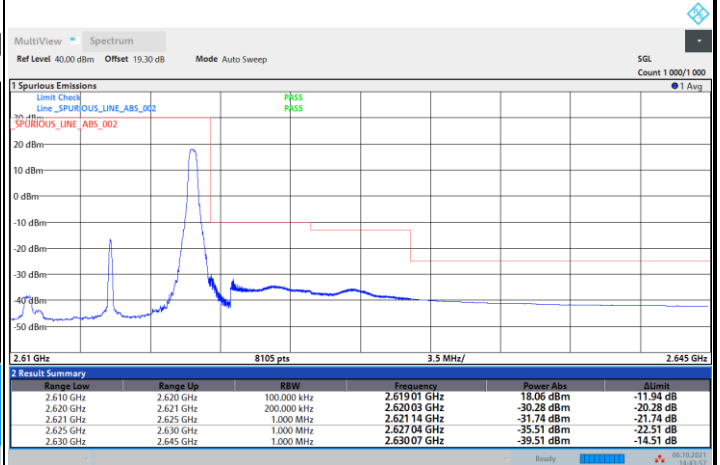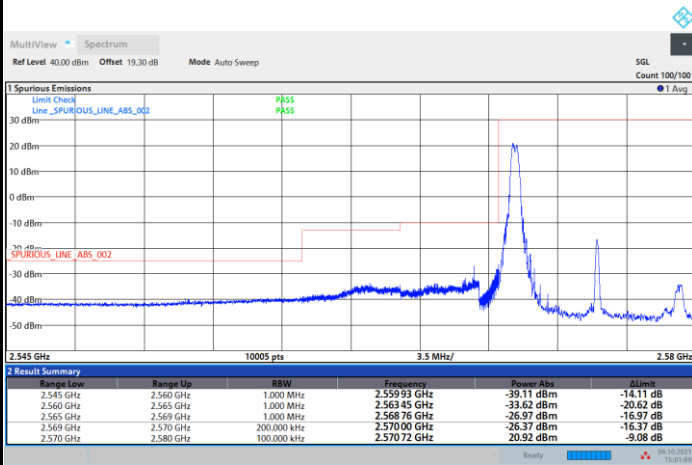

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

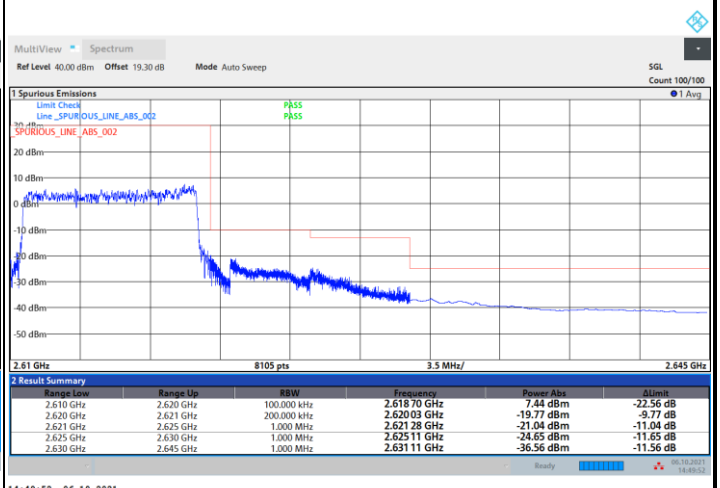
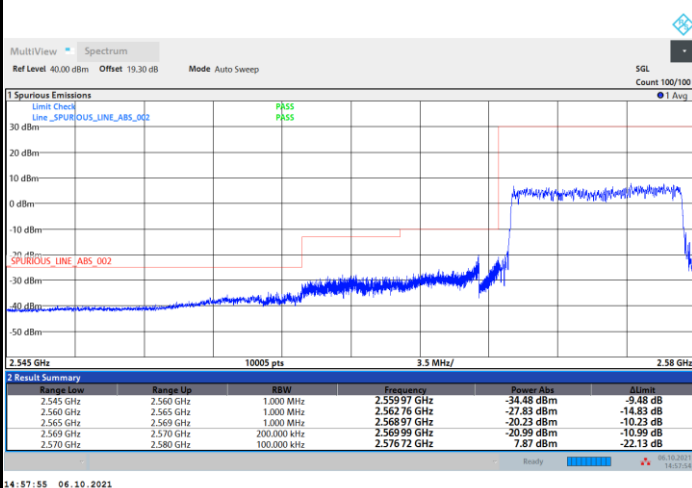




FR1 n38 / 10MHz / DFT-S OFDM / 16QAM



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

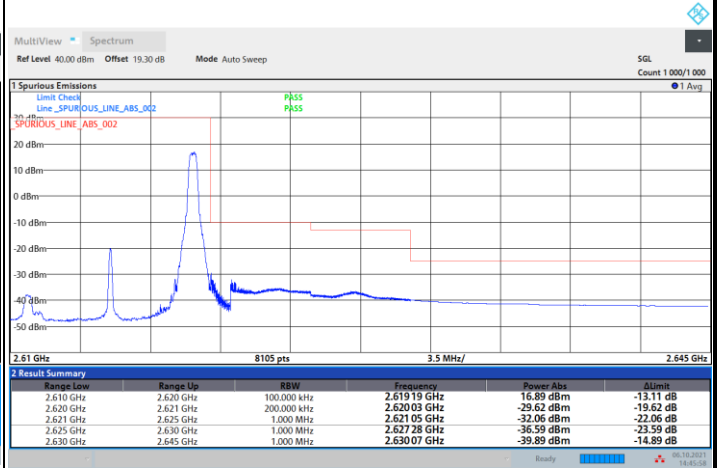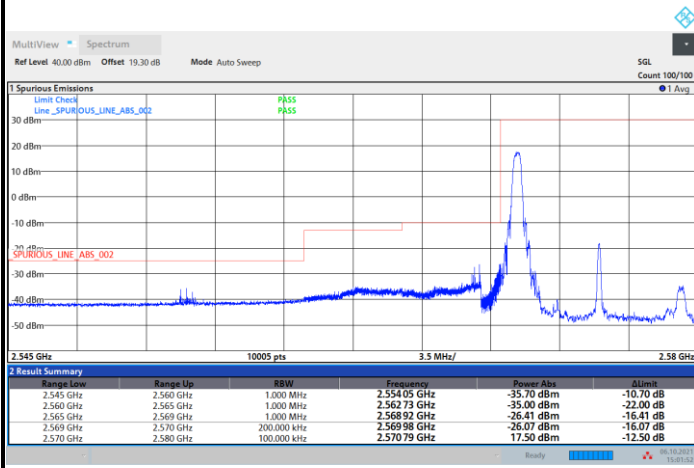

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

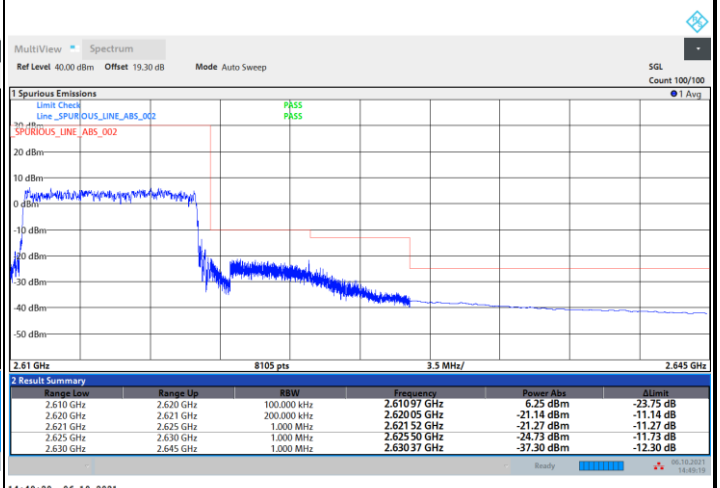
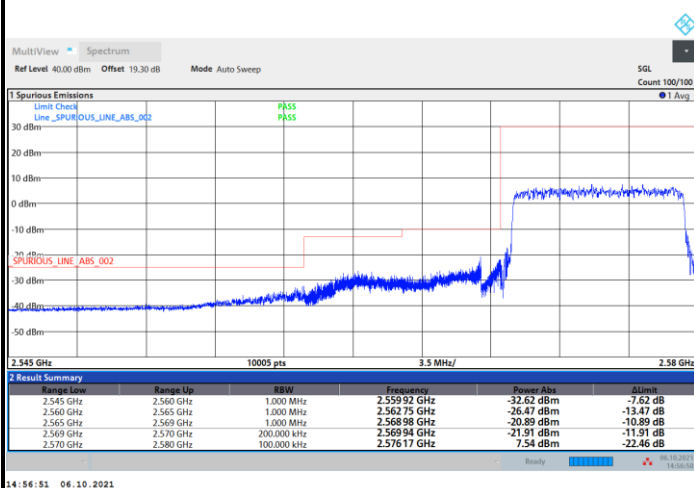




FR1 n38 / 10MHz / DFT-S OFDM / 64QAM



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

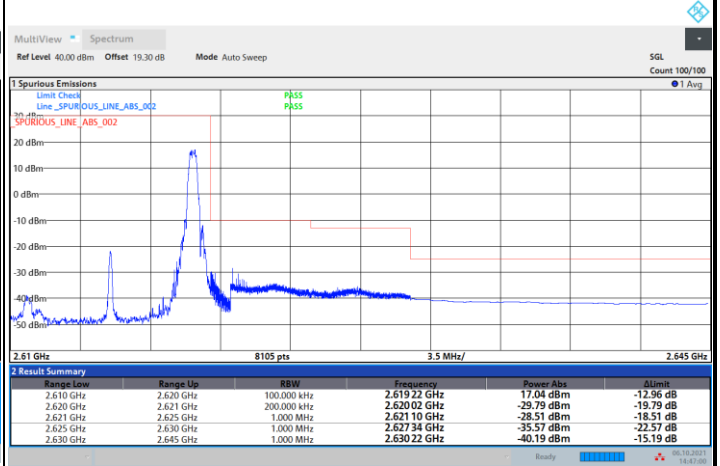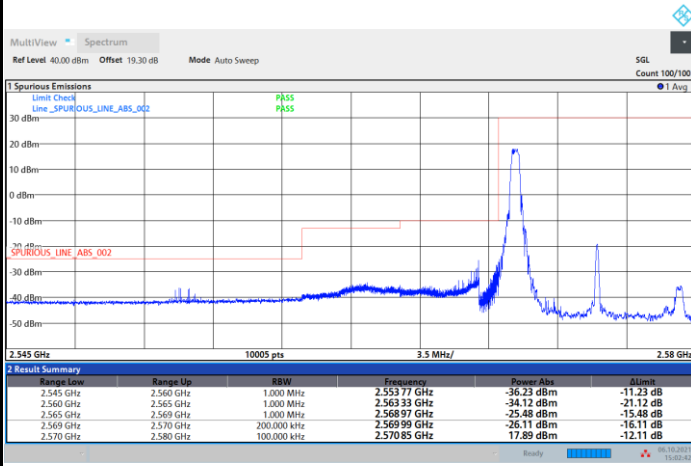

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

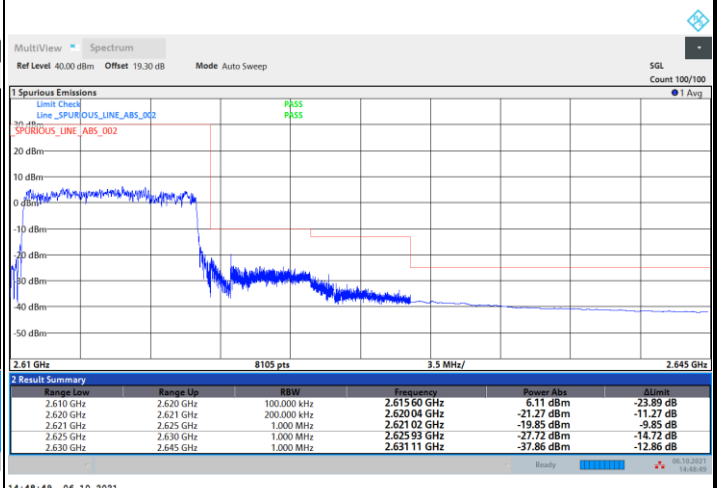
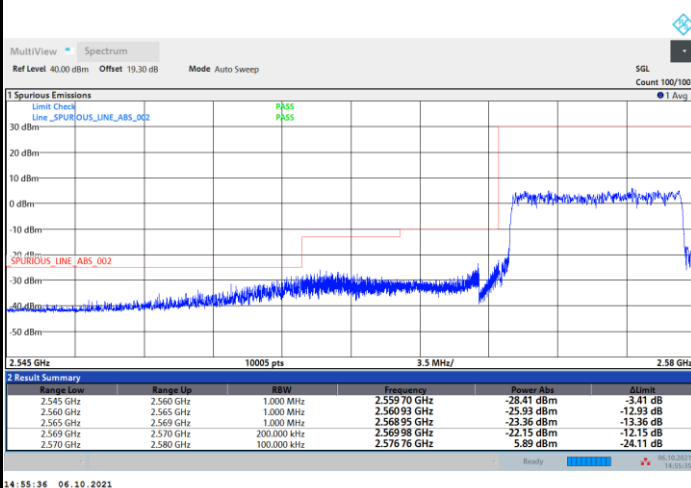




FR1 n38 / 10MHz / DFT-S OFDM / 256QAM



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

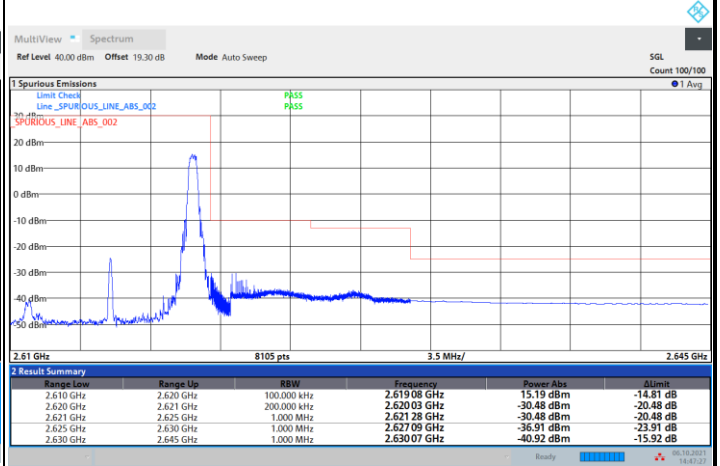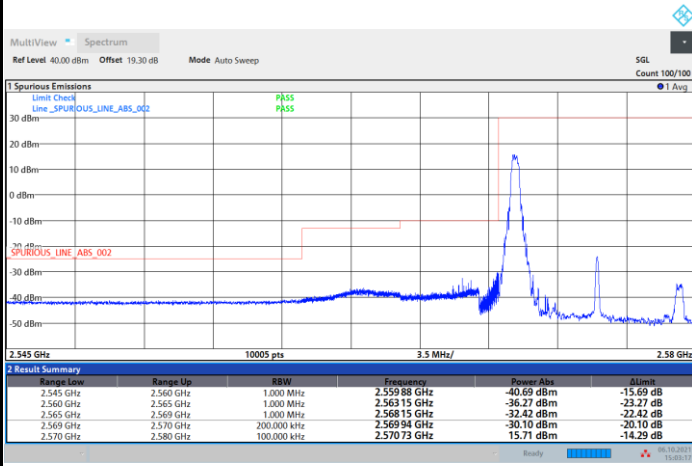

Lowest Band Edge / Full RB


Highest Band Edge / Full RB

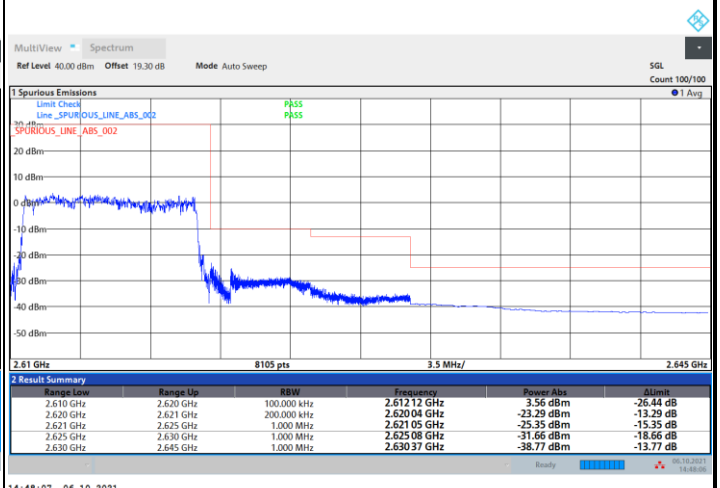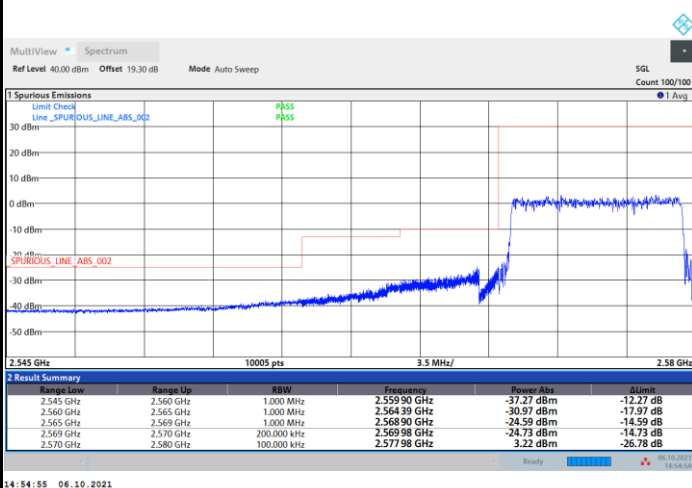




FR1 n38 / 10MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

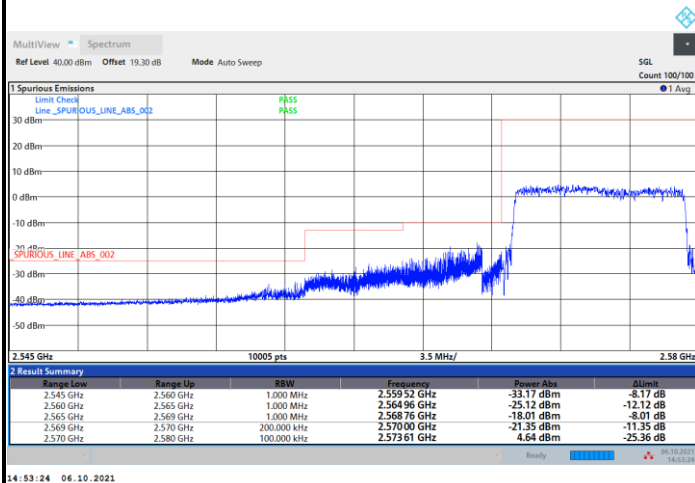

Highest Band Edge


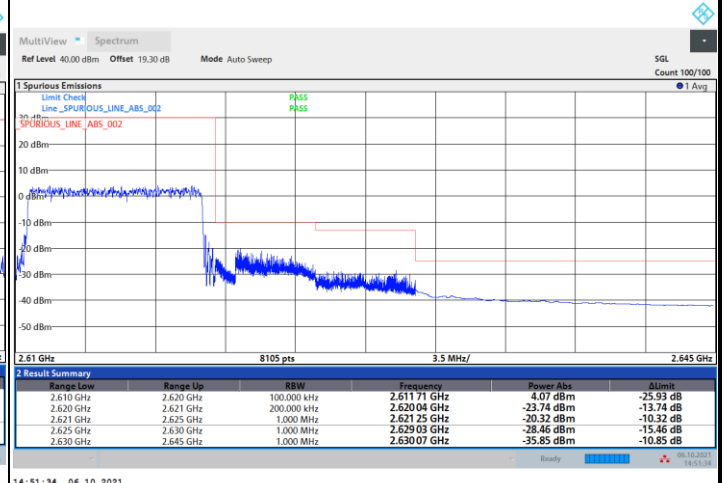




FR1 n38 / 15MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

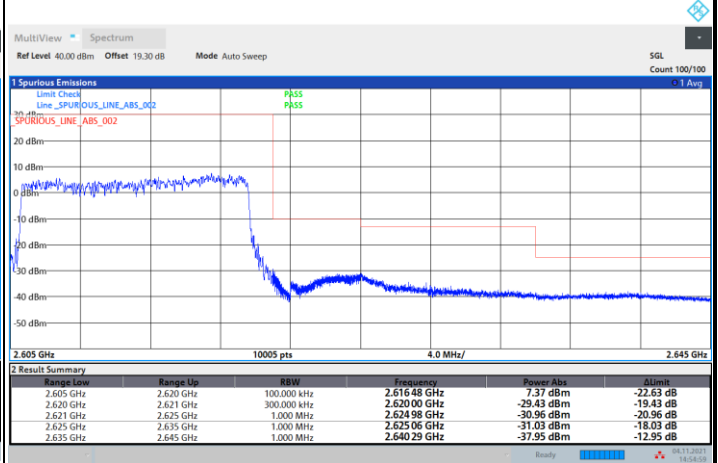
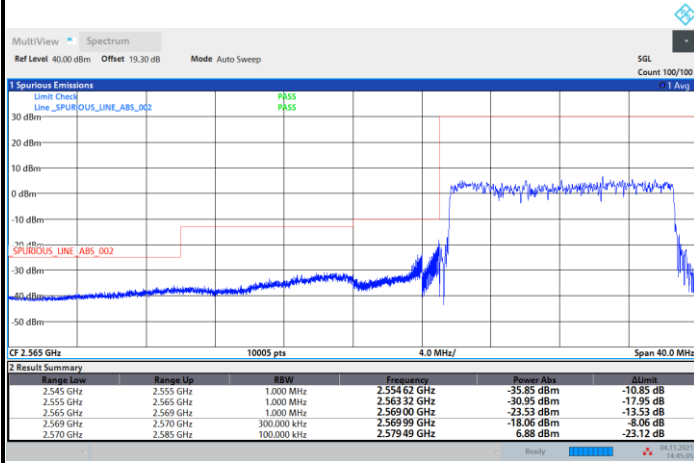




FR1 n38 / 15MHz / DFT-S OFDM / QPSK

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

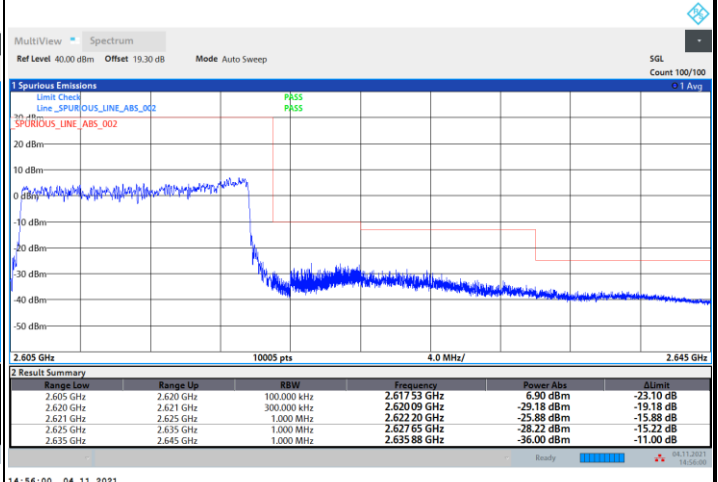
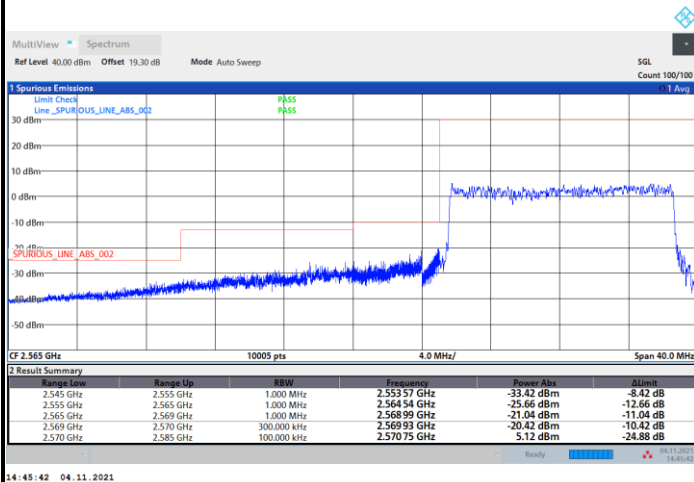




FR1 n38 / 15MHz / DFT-S OFDM / 16QAM

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

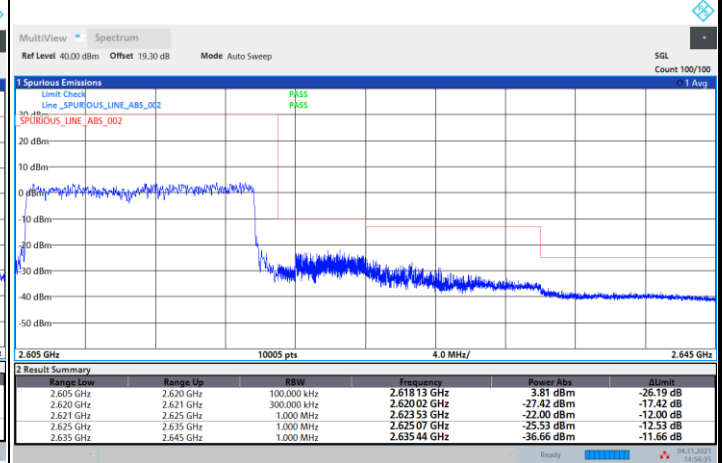
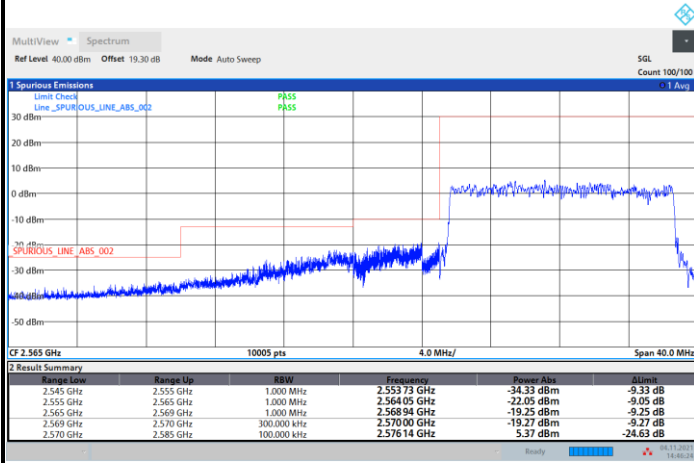




FR1 n38 / 15MHz / DFT-S OFDM / 64QAM

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

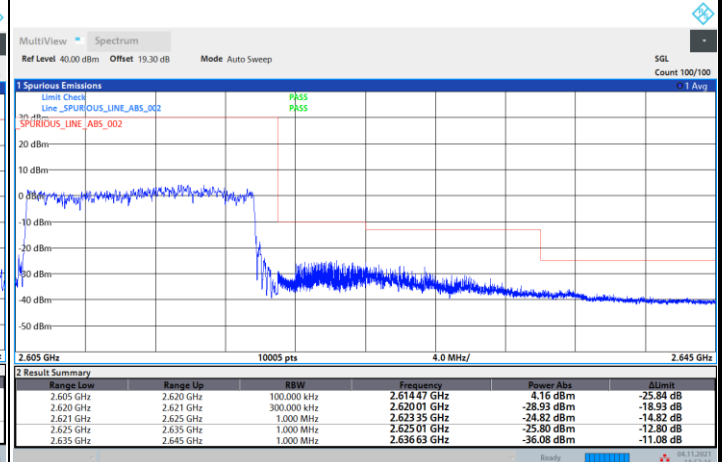
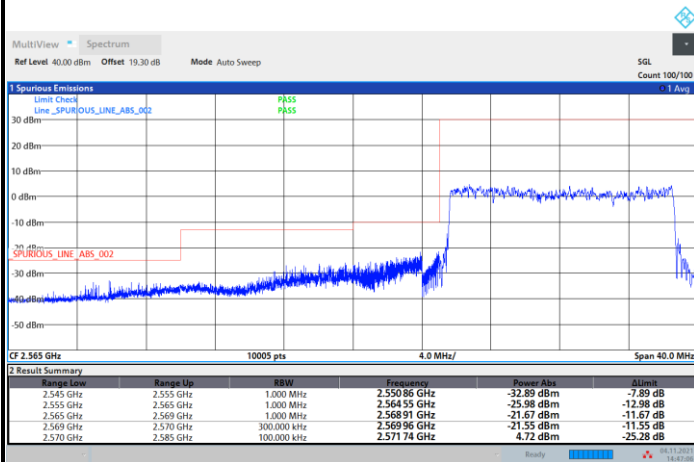




FR1 n38 / 15MHz / DFT-S OFDM / 256QAM

Lowest Band Edge / Full RB


Highest Band Edge / Full RB

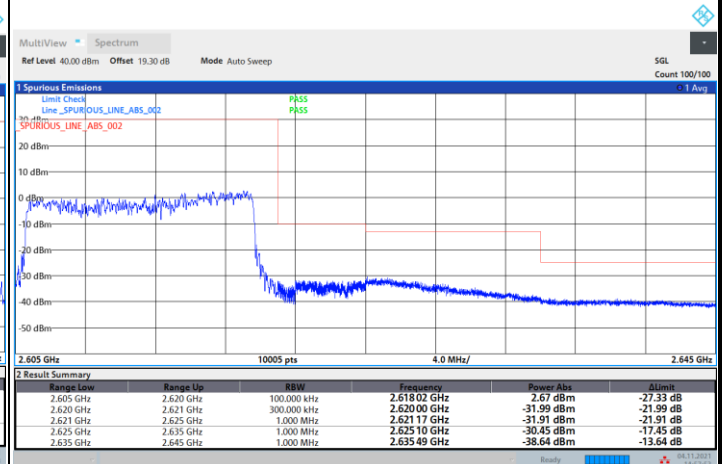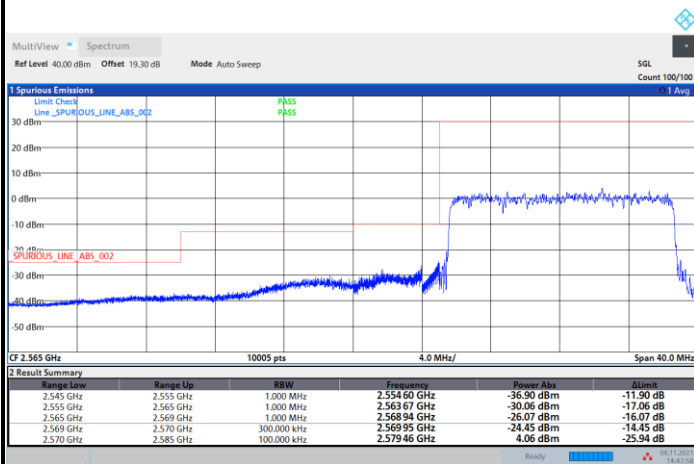




FR1 n38 / 15MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

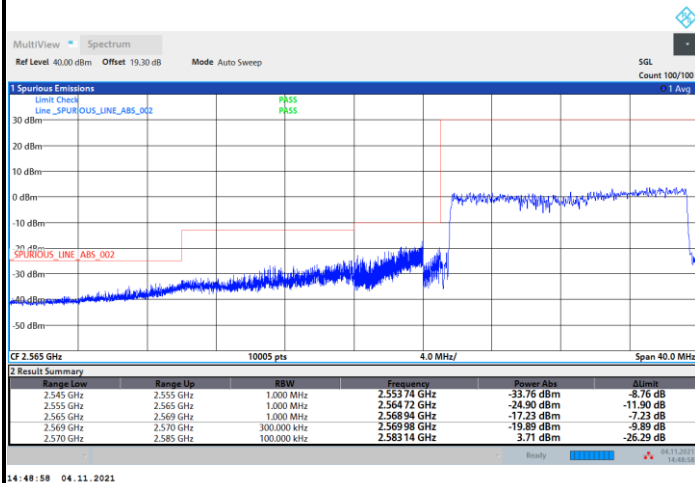

Highest Band Edge

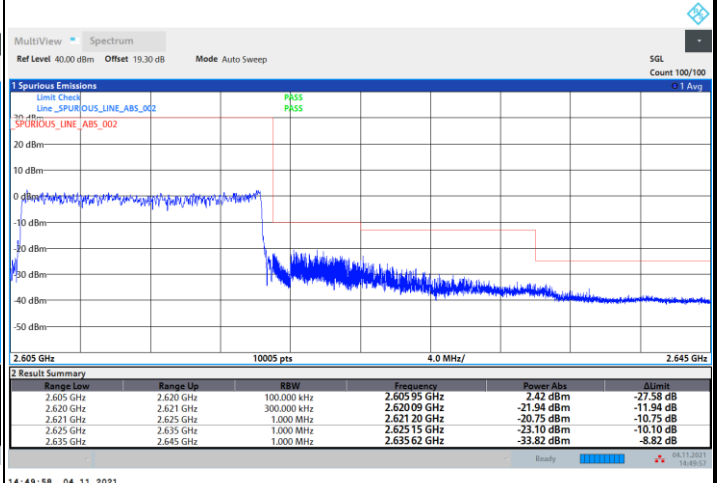



FR1 n38 / 20MHz / DFT-S OFDM / PI/2 BPSK

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

