

Frequency Stability

Test Conditions		FR1 n48 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0022	PASS
40	Normal Voltage	0.0033	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0037	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0027	
-20	Normal Voltage	0.0010	
-30	Normal Voltage	0.0020	
20	Maximum Voltage	0.0010	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0007	

Note:

1. Normal Voltage = 3.9 V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage = 4.5 V.
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 96	NR SA n48	H	14725	-49.33	RMS	41.65	-23.00	0.42	-95.23	26.83	-40.00	-9.33	H	6
2	Part 96	NR SA n48	H	14725	-49.89	RMS	41.65	-23.00	0.42	-95.23	26.27	-40.00	-9.89	H	2
3	Part 96	EN-DC B5+n48	M	14465	-52.45	RMS	39.33	-22.73	0.42	-95.23	25.76	-40.00	-12.45	V	6
4	Part 96	NR SA n48	M	14465	-51.74	RMS	39.33	-22.73	0.42	-95.23	26.47	-40.00	-11.74	H	6+1
5	Part 96	NR SA n48	H	14725	-52.33	RMS	39.50	-23.00	0.42	-95.23	25.98	-40.00	-12.33	H	2+5




Ant. 6

Part 96 Mode 1

NR SA n48 20M Ch637334 1RB1 BPSK

L

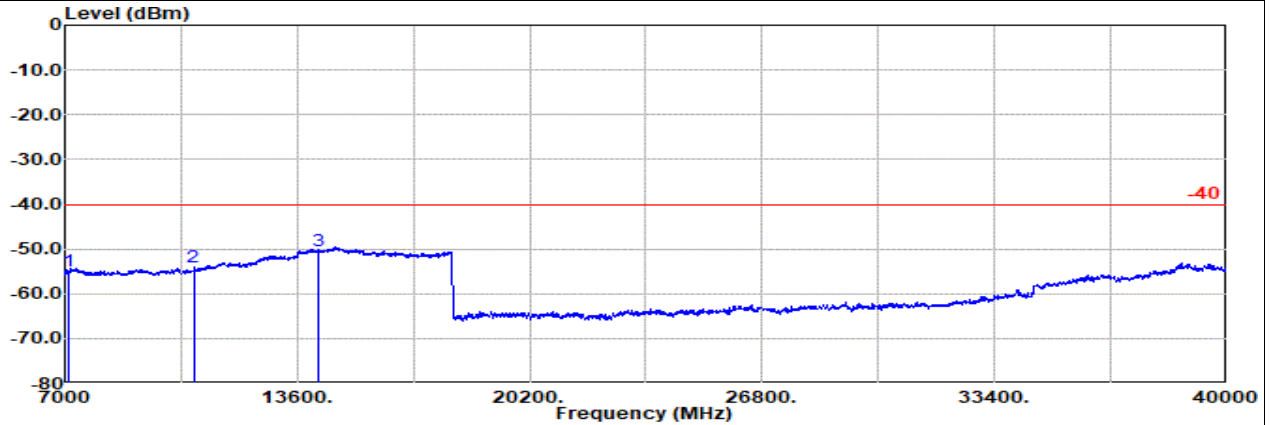


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Horizontal

: SA n48 20M Ch637334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1						
1	7103.00	-55.03	RMS	36.41	-21.43	1.19	-95.23	24.03	-40.00	-15.03	Horizontal
2	10654.00	-54.07	RMS	37.50	-21.68	0.44	-95.23	24.90	-40.00	-14.07	Horizontal
3	14205.00	-50.41	RMS	41.00	-22.35	0.41	-95.23	25.76	-40.00	-10.41	Horizontal

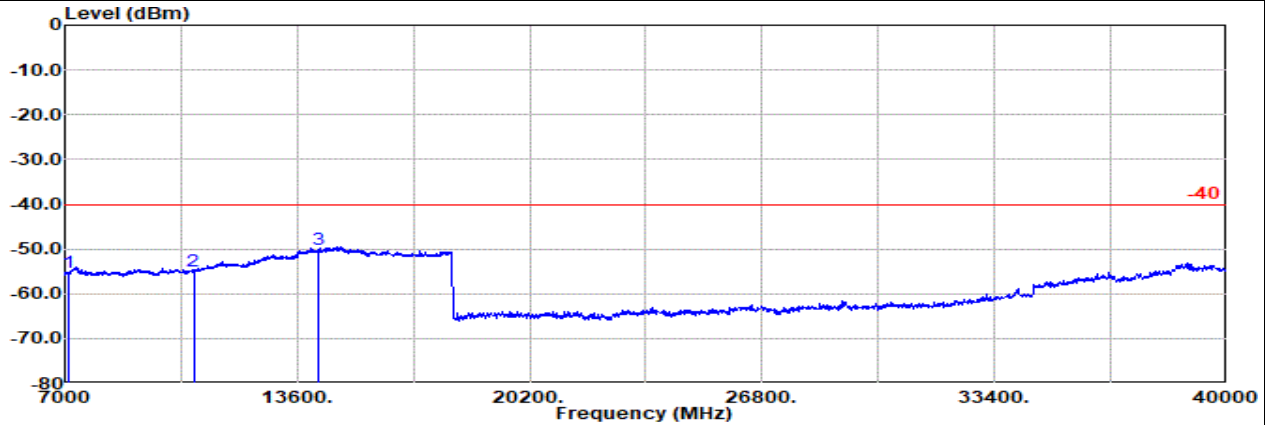

Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Vertical

: SA n48 20M Ch637334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
				Factor	1						
1	7103.00	-55.17	RMS	36.41	-21.43	1.19	-95.23	23.89	-40.00	-15.17	Vertical
2	10654.00	-54.90	RMS	37.50	-21.68	0.44	-95.23	24.07	-40.00	-14.90	Vertical
3	14205.00	-50.15	RMS	41.00	-22.35	0.41	-95.23	26.02	-40.00	-10.15	Vertical




Ant. 6

Part 96 Mode 1

NR SA n48 20M Ch641666 1RB1 BPSK

M

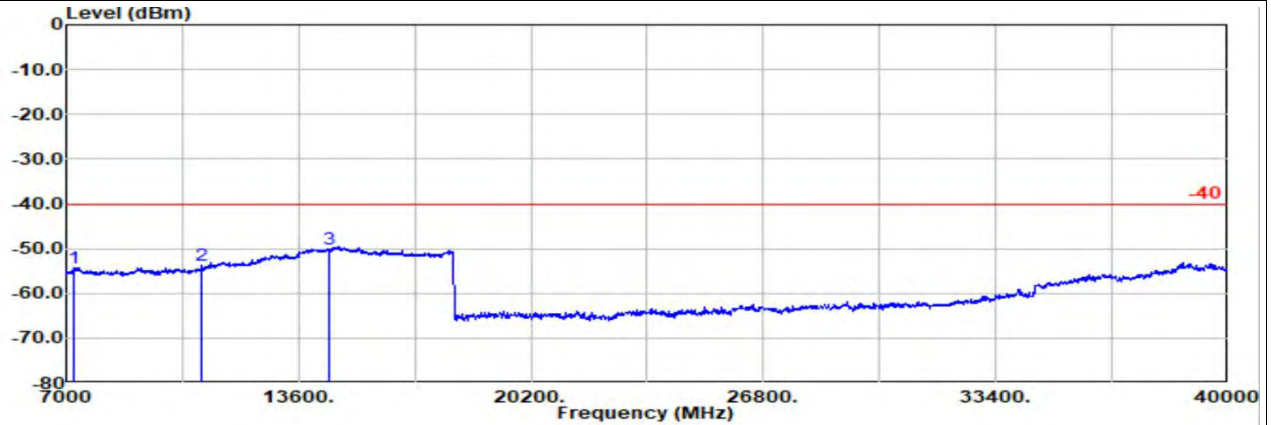


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Horizontal

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin		Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7233.00	-54.33	RMS	36.87	-21.34	1.13	-95.23	24.24	-40.00	-14.33	Horizontal
2	10849.00	-53.65	RMS	37.50	-21.65	0.44	-95.23	25.29	-40.00	-13.65	Horizontal
3	14465.00	-50.15	RMS	41.16	-22.73	0.42	-95.23	26.23	-40.00	-10.15	Horizontal

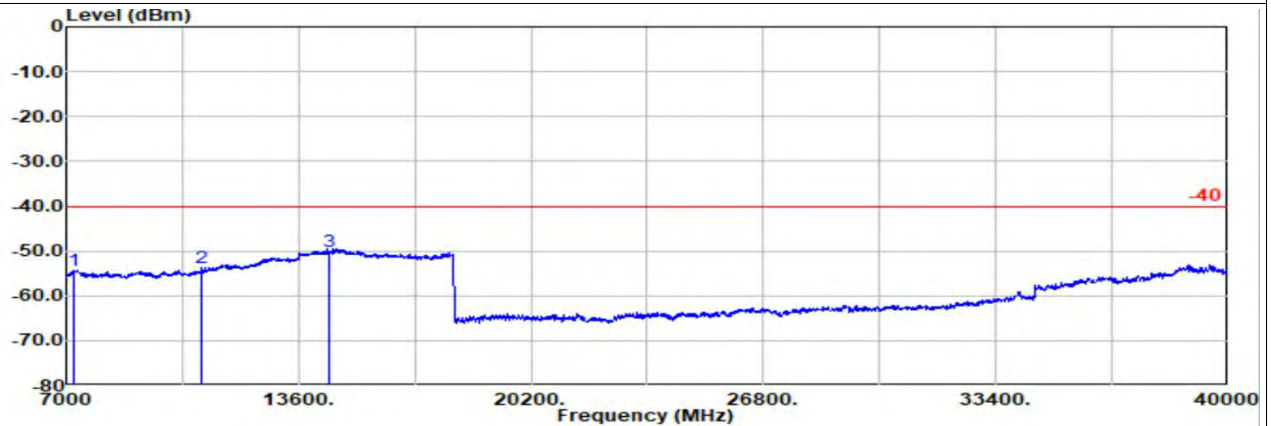

Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Vertical

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin		Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7233.00	-54.43	RMS	36.87	-21.34	1.13	-95.23	24.14	-40.00	-14.43	Vertical
2	10849.00	-53.83	RMS	37.50	-21.65	0.44	-95.23	25.11	-40.00	-13.83	Vertical
3	14465.00	-50.11	RMS	41.16	-22.73	0.42	-95.23	26.27	-40.00	-10.11	Vertical




Ant. 6


Part 96 Mode 1

NR SA n48 20M Ch646000 1RB1 BPSK

H

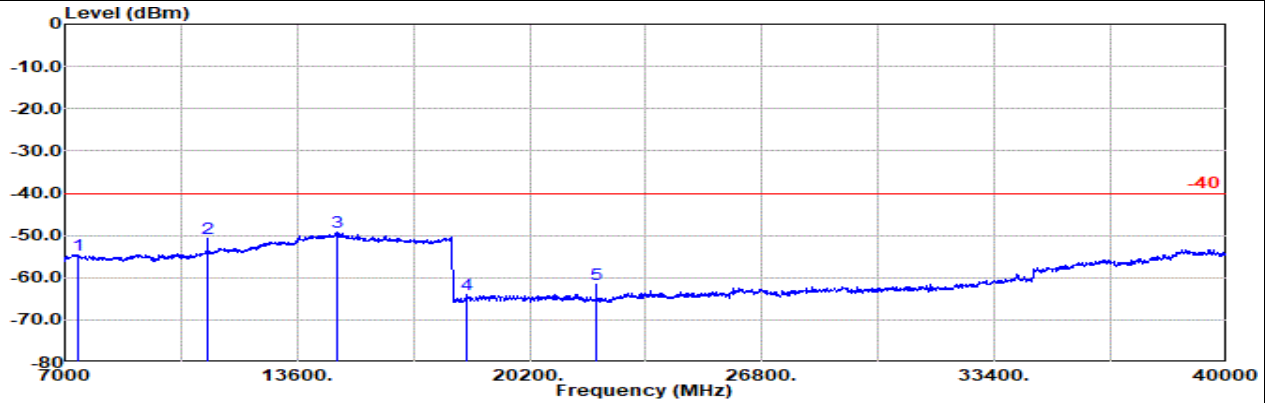

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	7363.00	-54.64	RMS	36.97	-21.28	1.05	-95.23	23.85	-40.00	-14.64	Horizontal
2	11044.00	-50.76	RMS	37.98	-21.61	0.44	-95.23	27.66	-40.00	-10.76	Horizontal
3	14725.00	-49.33	RMS	41.65	-23.00	0.42	-95.23	26.83	-40.00	-9.33	Horizontal
4	18406.00	-63.97	RMS	37.94	-39.41	-9.54	-95.23	42.27	-40.00	-23.97	Horizontal
5	22088.00	-61.73	RMS	38.32	-33.81	-9.54	-95.23	38.53	-40.00	-21.73	Horizontal

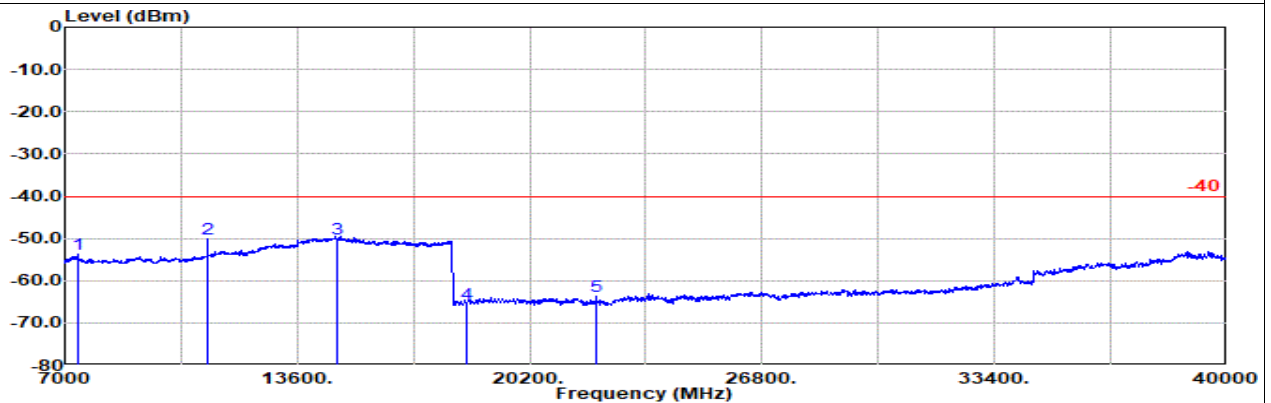

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	7363.00	-53.64	RMS	36.97	-21.28	1.05	-95.23	24.85	-40.00	-13.64	Vertical
2	11044.00	-50.26	RMS	37.98	-21.61	0.44	-95.23	28.16	-40.00	-10.26	Vertical
3	14725.00	-49.98	RMS	41.65	-23.00	0.42	-95.23	26.18	-40.00	-9.98	Vertical
4	18406.00	-65.58	RMS	37.94	-39.41	-9.54	-95.23	40.66	-40.00	-25.58	Vertical
5	22088.00	-63.67	RMS	38.32	-33.81	-9.54	-95.23	36.59	-40.00	-23.67	Vertical




Ant. 6

Part 96 Mode 3


EN-DC B5+n48 10M + 20M Ch20525 1RB0 QPSK + Ch641666 1RB1 BPSK

M

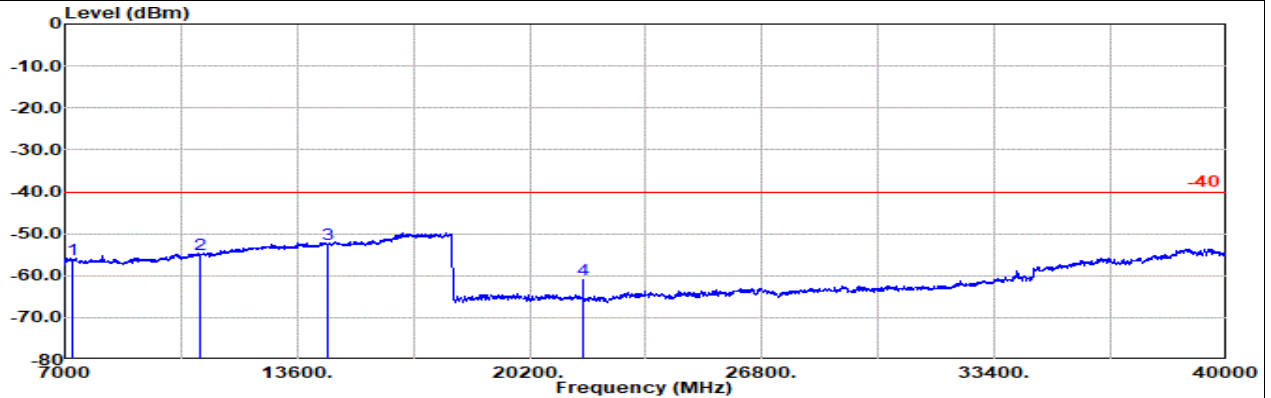

Site : 03CH21-HY
Condition: -40 1m BBHA9170_1223_240624 Horizontal
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	7233.00	-56.04	RMS	35.60	-21.34	1.13	-95.23	23.80	-40.00	-16.04	Horizontal
2	10849.00	-54.86	RMS	37.50	-21.65	0.44	-95.23	24.08	-40.00	-14.86	Horizontal
3	14465.00	-52.56	RMS	39.33	-22.73	0.42	-95.23	25.65	-40.00	-12.56	Horizontal
4	21704.00	-61.04	RMS	38.20	-34.22	-9.54	-95.23	39.75	-40.00	-21.04	Horizontal

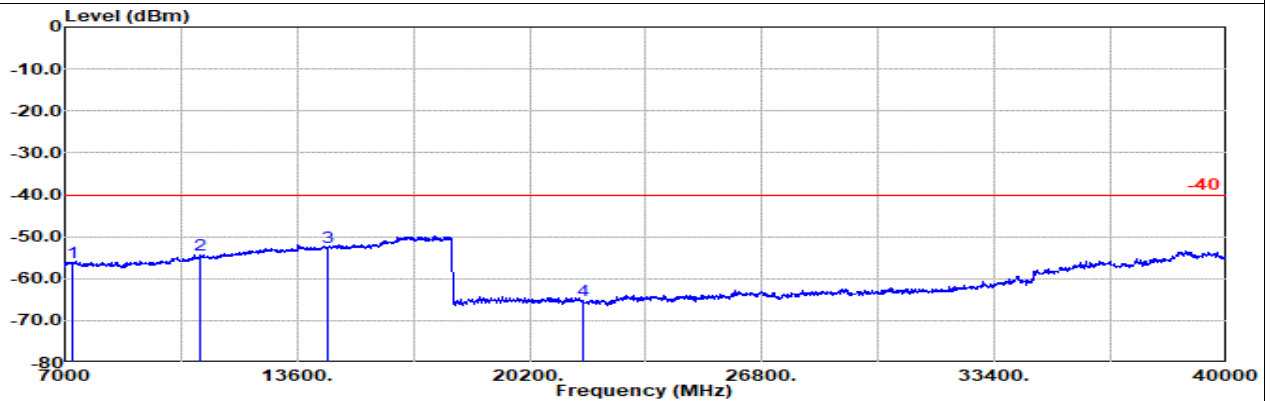

Site : 03CH21-HY
Condition: -40 1m BBHA9170_1223_240624 Vertical
: LTE Band 5 10M Ch20525 1RB0 QPSK
: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	7233.00	-56.06	RMS	35.60	-21.34	1.13	-95.23	23.78	-40.00	-16.06	Vertical
2	10849.00	-54.43	RMS	37.50	-21.65	0.44	-95.23	24.51	-40.00	-14.43	Vertical
3	14465.00	-52.45	RMS	39.33	-22.73	0.42	-95.23	25.76	-40.00	-12.45	Vertical
4	21704.00	-65.29	RMS	38.20	-34.22	-9.54	-95.23	35.50	-40.00	-25.29	Vertical




MIMO <Ant. 6+1>

Part 96 Mode 4

NR SA n48 20M Ch637334 1RB1 BPSK

L

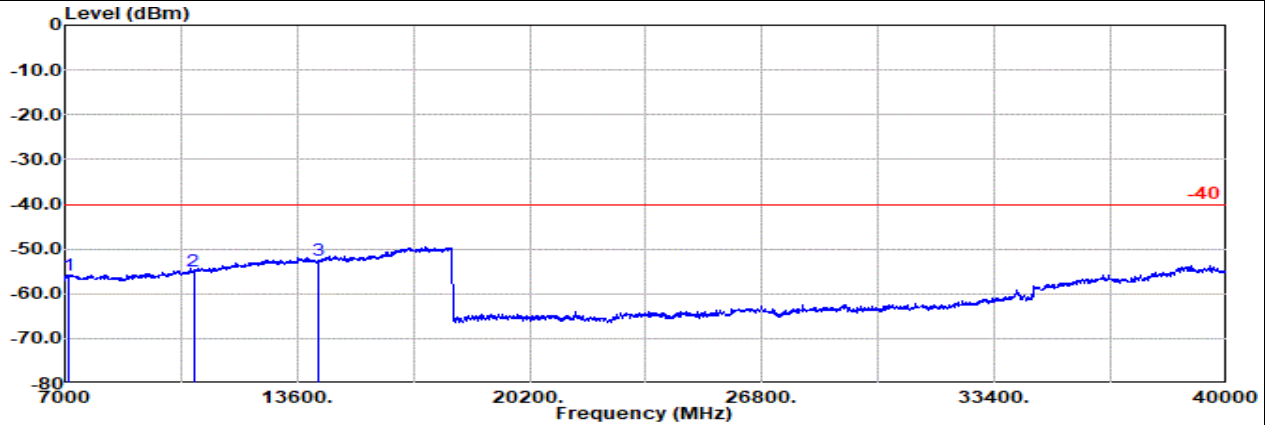


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Horizontal

: SA n48 20M Ch637334 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7103.00	-55.76	RMS	35.69	-21.43	1.19	-95.23	24.02	-40.00	-15.76
2	10654.00	-55.00	RMS	37.50	-21.68	0.44	-95.23	23.97	-40.00	-15.00
3	14205.00	-52.61	RMS	38.82	-22.35	0.41	-95.23	25.74	-40.00	-12.61

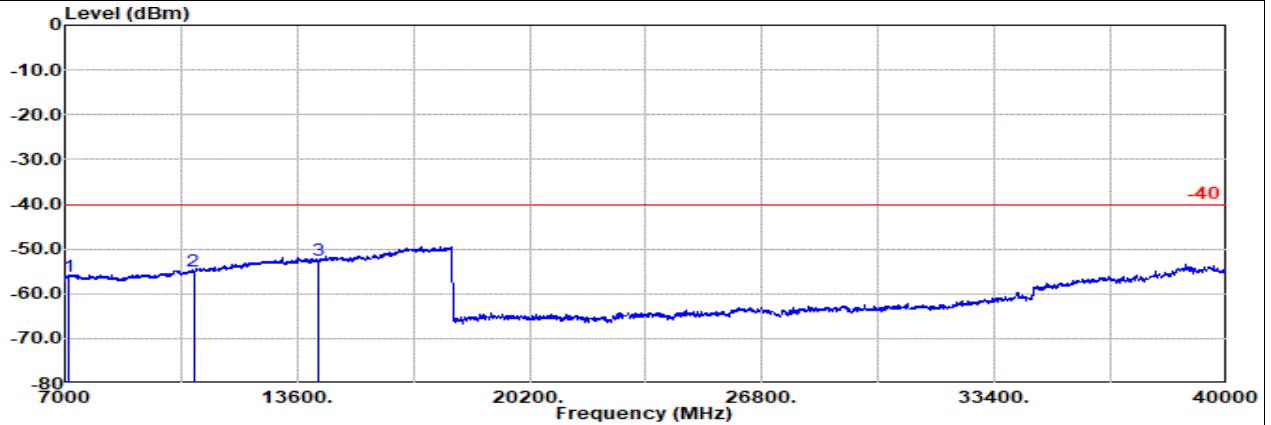

Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Vertical

: SA n48 20M Ch637334 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7103.00	-56.13	RMS	35.69	-21.43	1.19	-95.23	23.65	-40.00	-16.13
2	10654.00	-54.84	RMS	37.50	-21.68	0.44	-95.23	24.13	-40.00	-14.84
3	14205.00	-52.50	RMS	38.82	-22.35	0.41	-95.23	25.85	-40.00	-12.50




MIMO <Ant. 6+1>

Part 96 Mode 4

NR SA n48 20M Ch641666 1RB1 BPSK

M

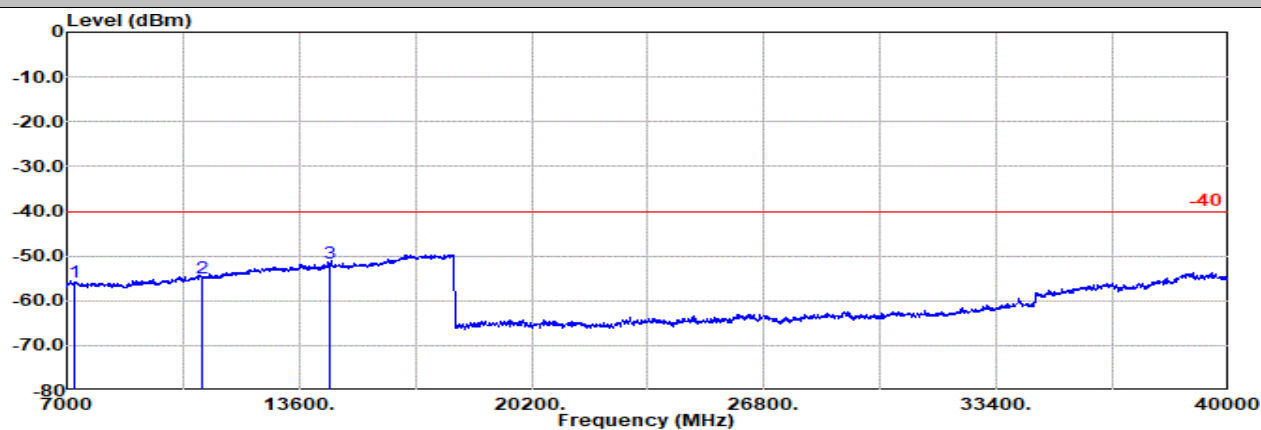


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Horizontal

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7233.00	-55.93	RMS	35.60	-21.34	1.13	-95.23	23.91	-40.00	-15.93	Horizontal
2	10849.00	-54.80	RMS	37.50	-21.65	0.44	-95.23	24.14	-40.00	-14.80	Horizontal
3	14465.00	-51.74	RMS	39.33	-22.73	0.42	-95.23	26.47	-40.00	-11.74	Horizontal

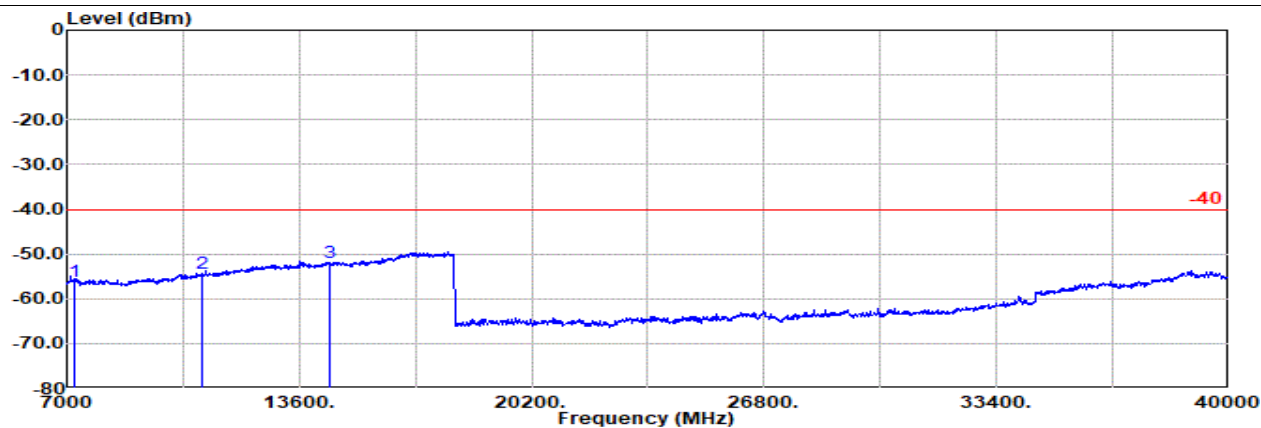

Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Vertical

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb l	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	7233.00	-56.05	RMS	35.60	-21.34	1.13	-95.23	23.79	-40.00	-16.05	Vertical
2	10849.00	-54.22	RMS	37.50	-21.65	0.44	-95.23	24.72	-40.00	-14.22	Vertical
3	14465.00	-52.00	RMS	39.33	-22.73	0.42	-95.23	26.21	-40.00	-12.00	Vertical




MIMO <Ant. 6+1>

Part 96 Mode 4

NR SA n48 20M Ch646000 1RB1 BPSK

H

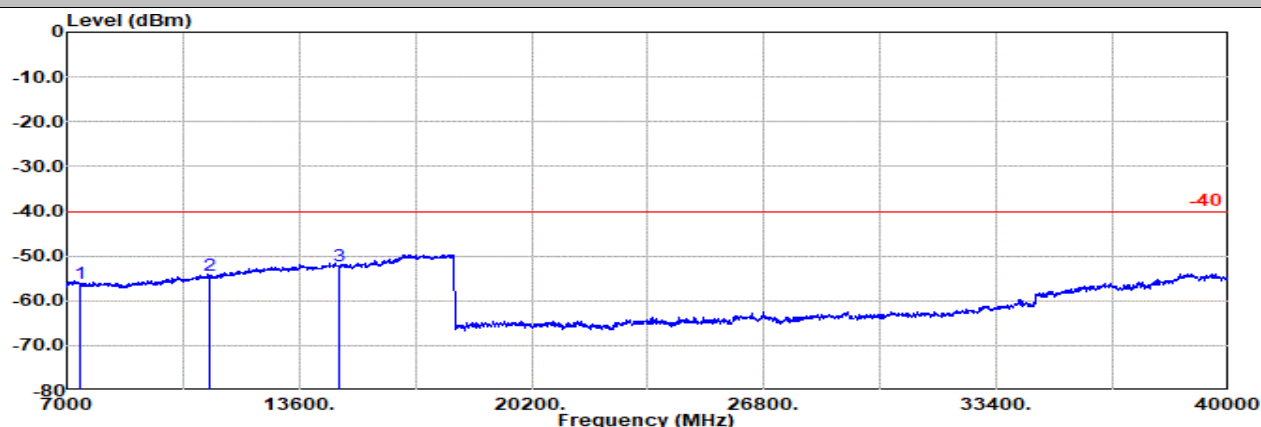


Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Horizontal

: SA n48 20M Ch646000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7363.00	-56.11	RMS	35.50	-21.28	1.05	-95.23	23.85	-40.00	-16.11
2	11044.00	-54.37	RMS	37.50	-21.61	0.44	-95.23	24.53	-40.00	-14.37
3	14725.00	-52.26	RMS	39.50	-23.00	0.42	-95.23	26.05	-40.00	-12.26

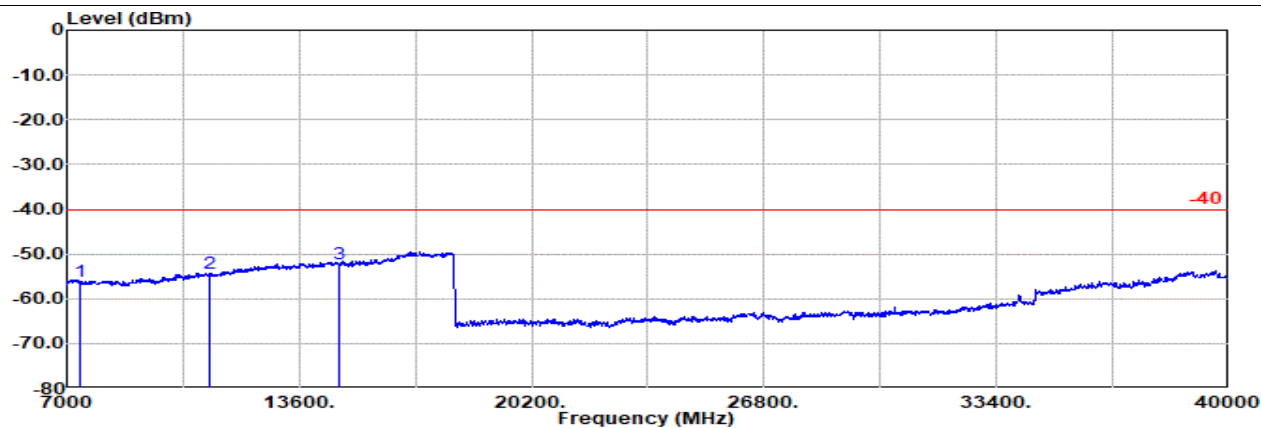

Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Vertical

: SA n48 20M Ch646000 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7363.00	-56.17	RMS	35.50	-21.28	1.05	-95.23	23.79	-40.00	-16.17
2	11044.00	-54.38	RMS	37.50	-21.61	0.44	-95.23	24.52	-40.00	-14.38
3	14725.00	-52.08	RMS	39.50	-23.00	0.42	-95.23	26.23	-40.00	-12.08




Ant. 2

Part 96 Mode 2

NR SA n48 20M Ch637334 1RB1 BPSK

L

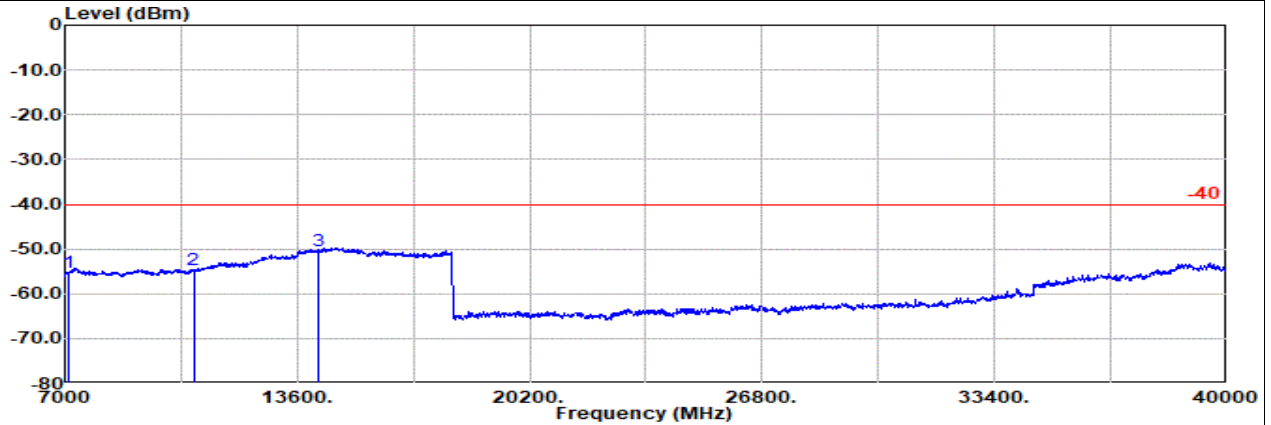


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Horizontal

: SA n48 20M Ch637334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	7103.00	-55.17	RMS	36.41	-21.43	1.19	-95.23	23.89	-40.00	-15.17 Horizontal
2	10654.00	-54.74	RMS	37.50	-21.68	0.44	-95.23	24.23	-40.00	-14.74 Horizontal
3	14205.00	-50.35	RMS	41.00	-22.35	0.41	-95.23	25.82	-40.00	-10.35 Horizontal

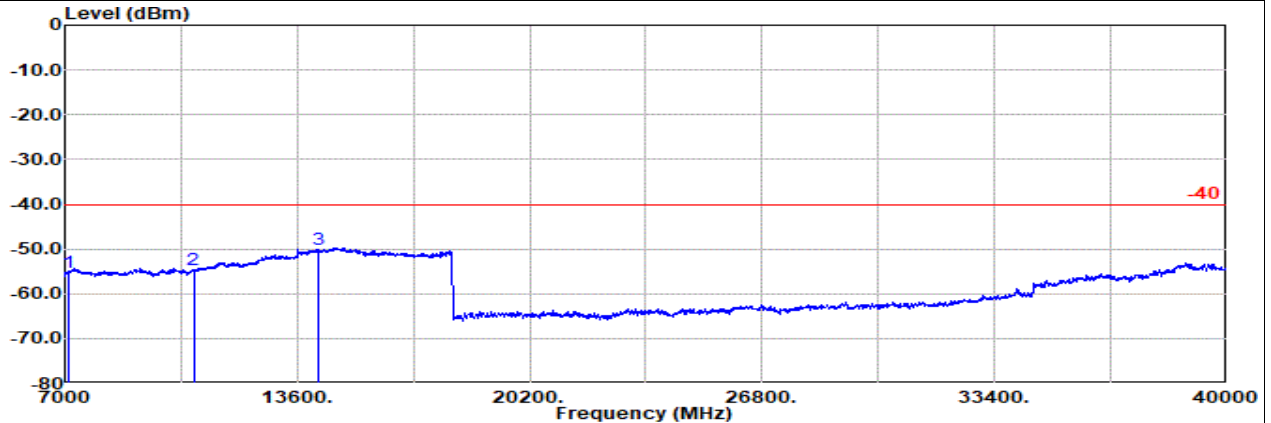

Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Vertical

: SA n48 20M Ch637334 1RB1 BPSK

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin Pol	
				Factor	1					
1	7103.00	-55.11	RMS	36.41	-21.43	1.19	-95.23	23.95	-40.00	-15.11 Vertical
2	10654.00	-54.65	RMS	37.50	-21.68	0.44	-95.23	24.32	-40.00	-14.65 Vertical
3	14205.00	-50.21	RMS	41.00	-22.35	0.41	-95.23	25.96	-40.00	-10.21 Vertical




Ant. 2

Part 96 Mode 2

NR SA n48 20M Ch641666 1RB1 BPSK

M

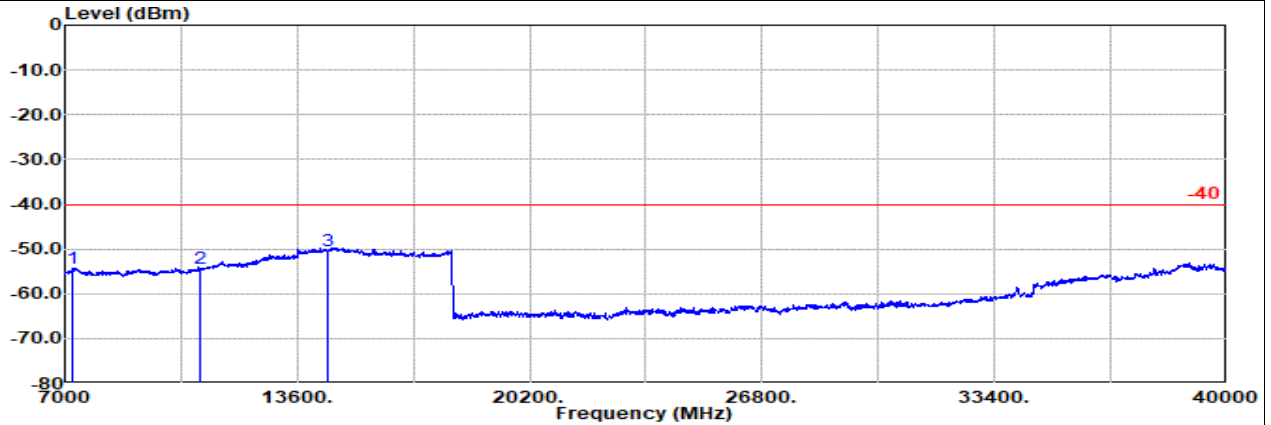


Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Horizontal

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7233.00	-54.36	RMS	36.87	-21.34	1.13	-95.23	24.21	-40.00	-14.36
2	10849.00	-54.38	RMS	37.50	-21.65	0.44	-95.23	24.56	-40.00	-14.38
3	14465.00	-50.27	RMS	41.16	-22.73	0.42	-95.23	26.11	-40.00	-10.27

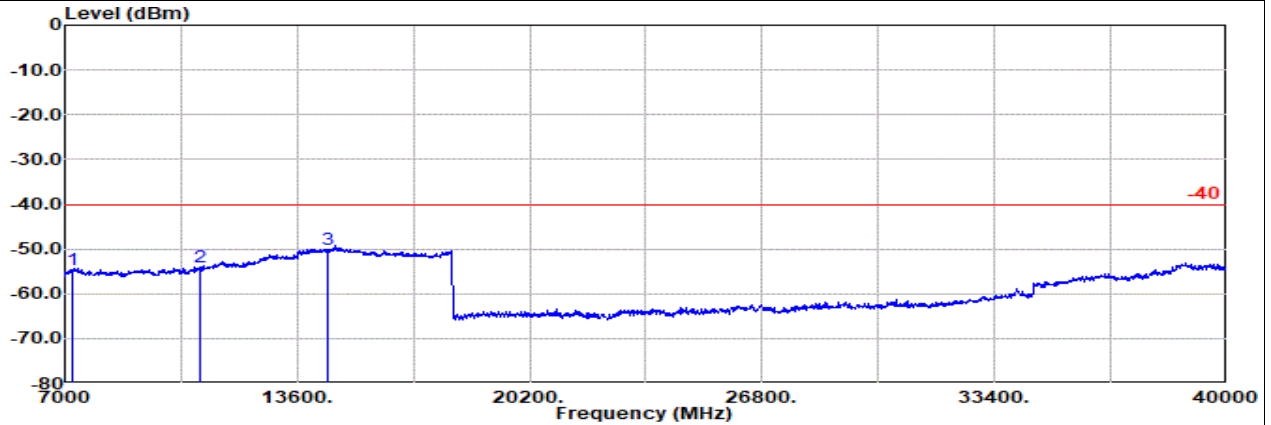

Site : 03CH21-HY

Condition: -40 1m BBHA9170_1223_240624 Vertical

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7233.00	-54.53	RMS	36.87	-21.34	1.13	-95.23	24.04	-40.00	-14.53
2	10849.00	-53.91	RMS	37.50	-21.65	0.44	-95.23	25.03	-40.00	-13.91
3	14465.00	-50.11	RMS	41.16	-22.73	0.42	-95.23	26.27	-40.00	-10.11




Ant. 2


Part 96 Mode 2

NR SA n48 20M Ch646000 1RB1 BPSK

H

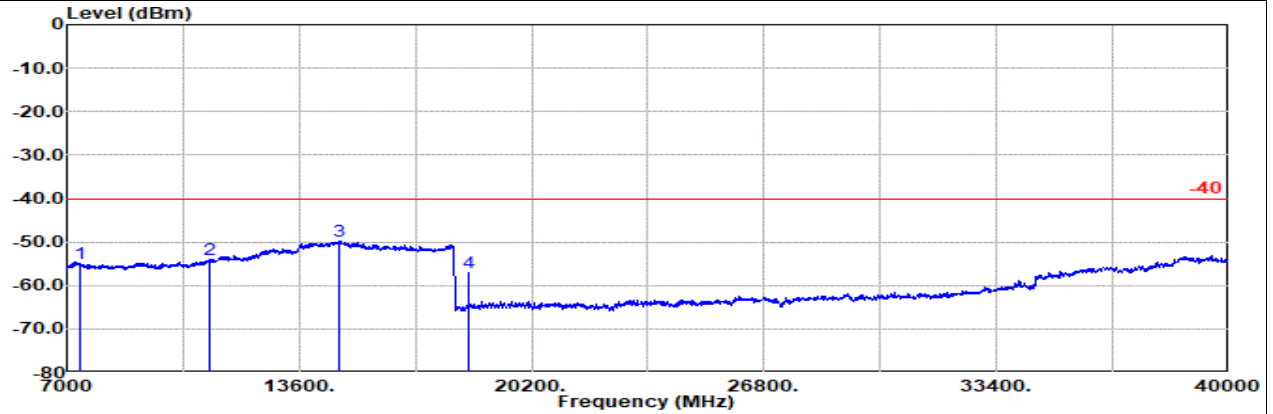

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	7363.00	-55.08	RMS	36.97	-21.28	1.05	-95.23	23.41	-40.00	-15.08	Horizontal	
2	11044.00	-54.00	RMS	37.98	-21.61	0.44	-95.23	24.42	-40.00	-14.00	Horizontal	
3	14725.00	-49.89	RMS	41.65	-23.00	0.42	-95.23	26.27	-40.00	-9.89	Horizontal	
4	18406.00	-57.13	RMS	37.94	-39.41	-9.54	-95.23	49.11	-40.00	-17.13	Horizontal	

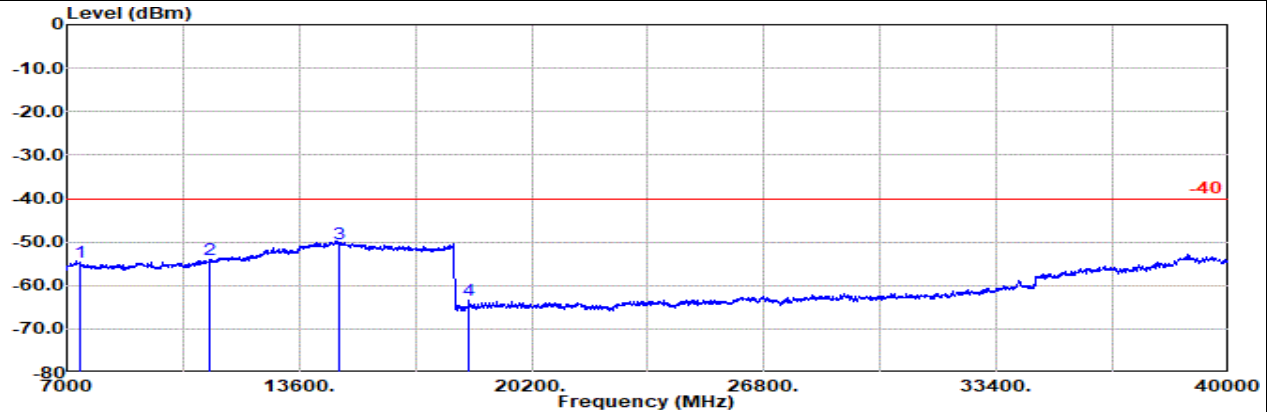

	Freq	Level	Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
					dB/m	dB						
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	7363.00	-54.67	RMS	36.97	-21.28	1.05	-95.23	23.82	-40.00	-14.67	Vertical	
2	11044.00	-54.10	RMS	37.98	-21.61	0.44	-95.23	24.32	-40.00	-14.10	Vertical	
3	14725.00	-50.31	RMS	41.65	-23.00	0.42	-95.23	25.85	-40.00	-10.31	Vertical	
4	18406.00	-63.47	RMS	37.94	-39.41	-9.54	-95.23	42.77	-40.00	-23.47	Vertical	




MIMO <Ant. 2+5>

Part 96 Mode 5

NR SA n48 20M Ch637334 1RB1 BPSK

L

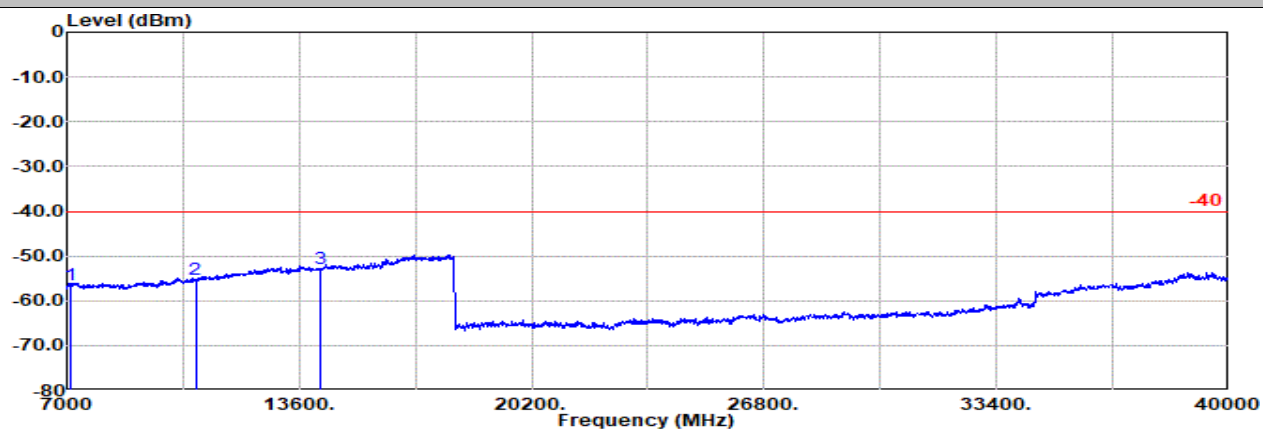


Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Horizontal

: SA n48 20M Ch637334 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7103.00	-56.41	RMS	35.69	-21.43	1.19	-95.23	23.37	-40.00	-16.41
2	10654.00	-55.10	RMS	37.50	-21.68	0.44	-95.23	23.87	-40.00	-15.10
3	14205.00	-52.90	RMS	38.82	-22.35	0.41	-95.23	25.45	-40.00	-12.90

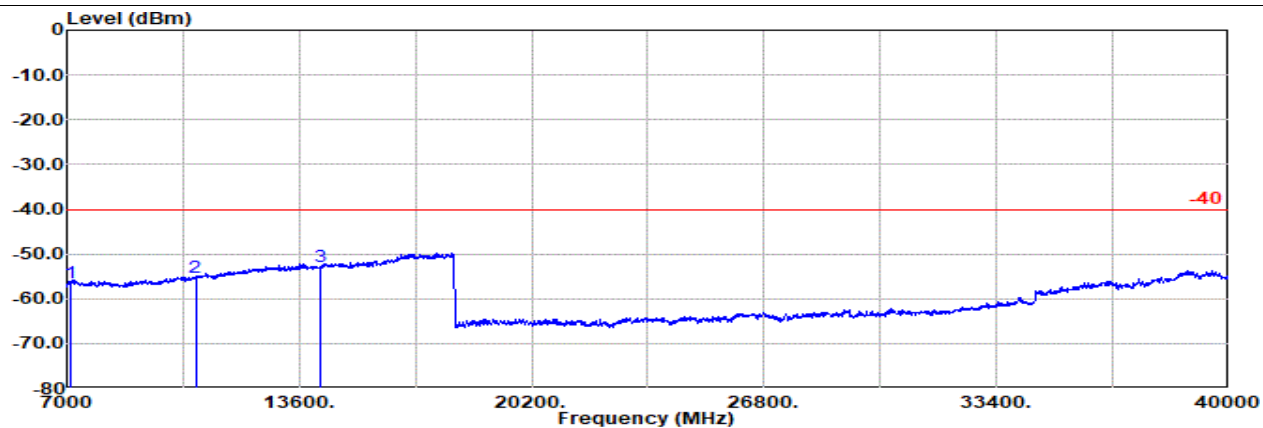

Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Vertical

: SA n48 20M Ch637334 1RB1 BPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	7103.00	-56.38	RMS	35.69	-21.43	1.19	-95.23	23.40	-40.00	-16.38
2	10654.00	-55.18	RMS	37.50	-21.68	0.44	-95.23	23.79	-40.00	-15.18
3	14205.00	-52.84	RMS	38.82	-22.35	0.41	-95.23	25.51	-40.00	-12.84




MIMO <Ant. 2+5>

Part 96 Mode 5

NR SA n48 20M Ch641666 1RB1 BPSK

M

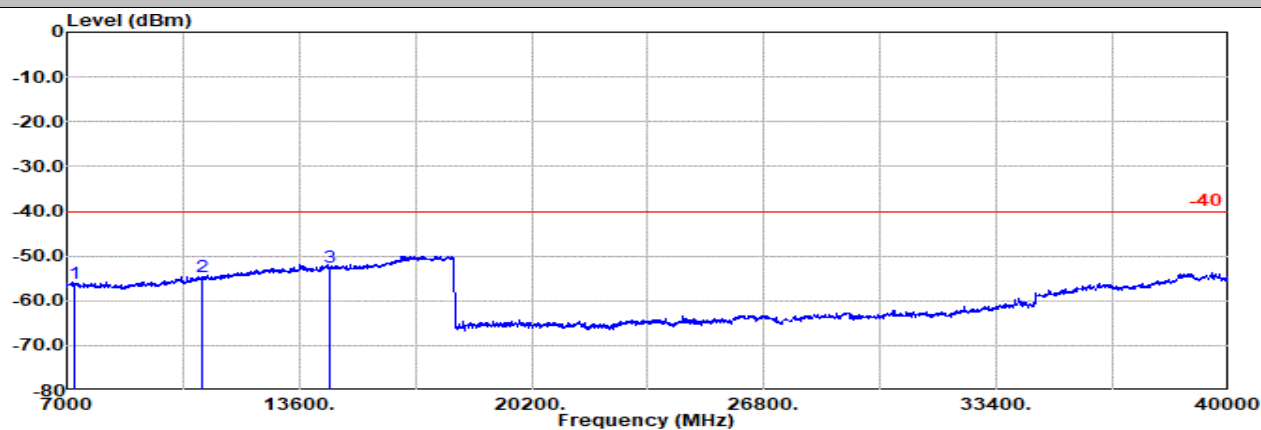


Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Horizontal

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	7233.00	-56.12	RMS		35.60	-21.34	1.13	-95.23	23.72	-40.00	-16.12 Horizontal
2	10849.00	-54.71	RMS		37.50	-21.65	0.44	-95.23	24.23	-40.00	-14.71 Horizontal
3	14465.00	-52.53	RMS		39.33	-22.73	0.42	-95.23	25.68	-40.00	-12.53 Horizontal

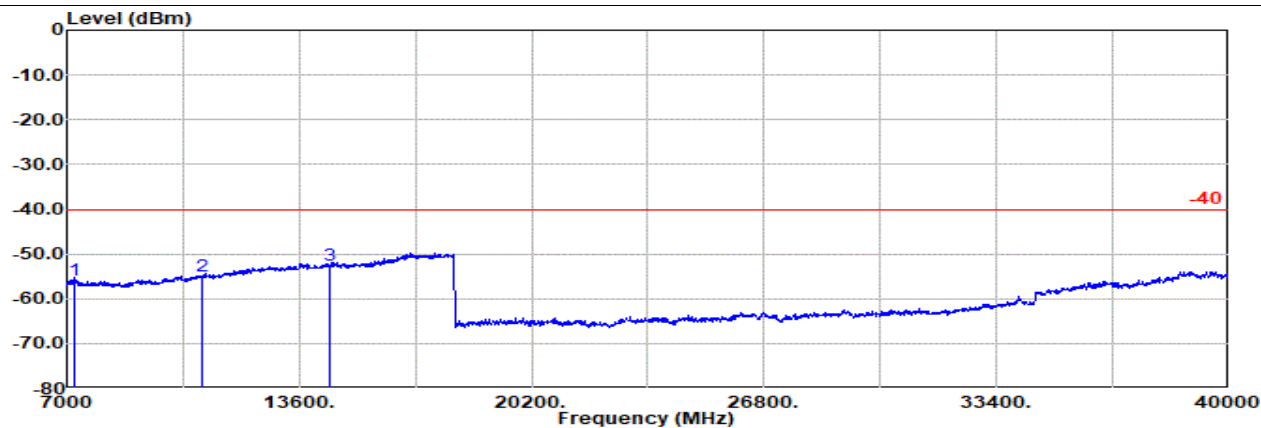

Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Vertical

: SA n48 20M Ch641666 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	7233.00	-55.72	RMS		35.60	-21.34	1.13	-95.23	24.12	-40.00	-15.72 Vertical
2	10849.00	-54.89	RMS		37.50	-21.65	0.44	-95.23	24.05	-40.00	-14.89 Vertical
3	14465.00	-52.50	RMS		39.33	-22.73	0.42	-95.23	25.71	-40.00	-12.50 Vertical




MIMO <Ant. 2+5>

Part 96 Mode 5

NR SA n48 20M Ch646000 1RB1 BPSK

H

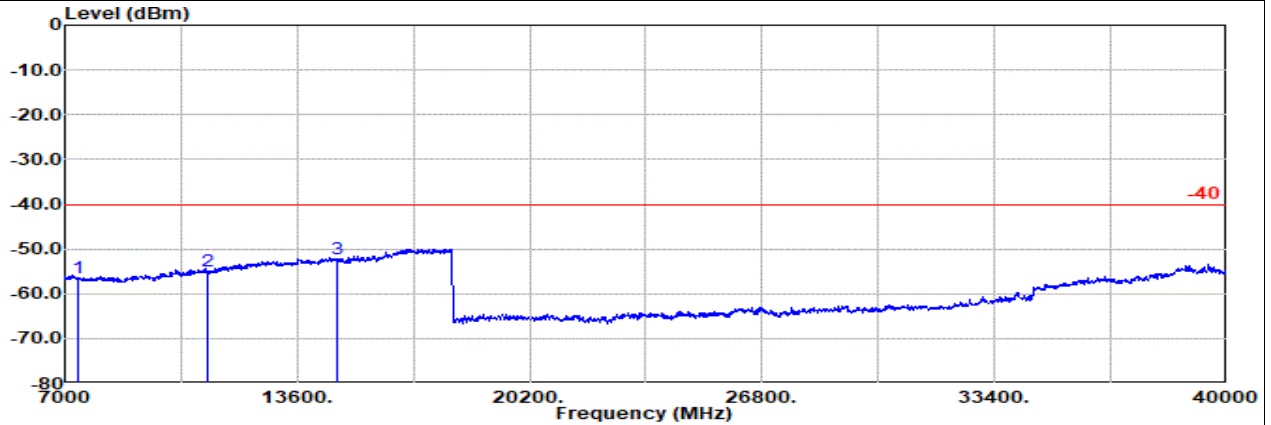


Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Horizontal

: SA n48 20M Ch646000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	7363.00	-56.54	RMS	35.50	-21.28	1.05	-95.23	23.42	-40.00	-16.54	Horizontal
2	11044.00	-54.88	RMS	37.50	-21.61	0.44	-95.23	24.02	-40.00	-14.88	Horizontal
3	14725.00	-52.33	RMS	39.50	-23.00	0.42	-95.23	25.98	-40.00	-12.33	Horizontal

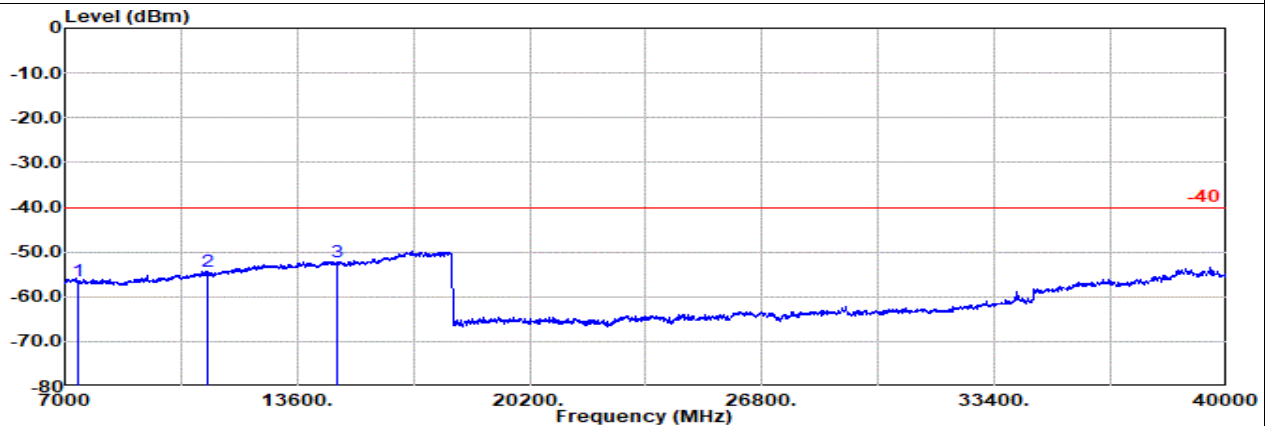

Site : 03CH21-HY

Condition: -40 3m ETS-Lindgren_3117_00227880_231004 Vertical

: SA n48 20M Ch646000 1RB1 BPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm									
1	7363.00	-56.58	RMS	35.50	-21.28	1.05	-95.23	23.38	-40.00	-16.58	Vertical
2	11044.00	-54.47	RMS	37.50	-21.61	0.44	-95.23	24.43	-40.00	-14.47	Vertical
3	14725.00	-52.35	RMS	39.50	-23.00	0.42	-95.23	25.96	-40.00	-12.35	Vertical




Ant. 6

Part 96 Mode 3

NR SA n48 20M Ch637334 1RB1 BPSK

L

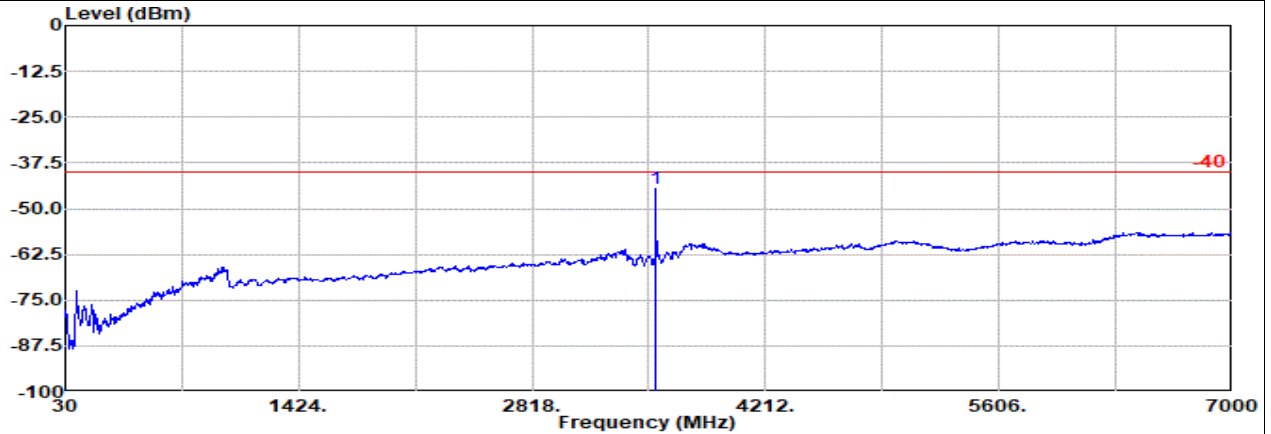


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_240711 Horizontal

: SA n48 20M Ch637334 1RB1 BPSK

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3560.00	-44.66	RMS	29.18	-23.35	0.53	-95.23	44.21	-40.00	-4.66	Horizontal

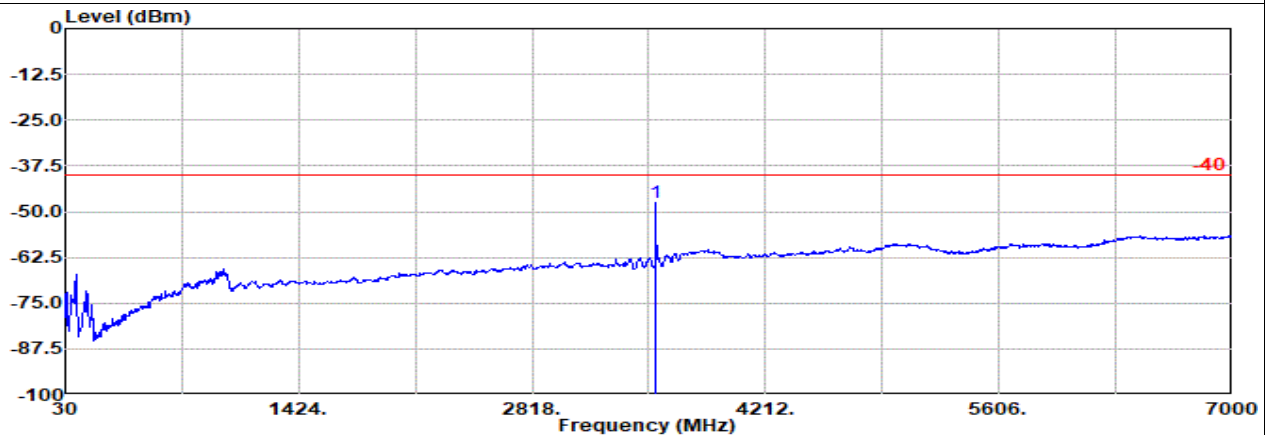

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_240711 Vertical

: SA n48 20M Ch637334 1RB1 BPSK

: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3560.00	-47.42	RMS	29.18	-23.35	0.53	-95.23	41.45	-40.00	-7.42	Vertical

Remark: #1 is fundamental signal which can be ignored.

—THE END—