

承认书

SPECIFICATION FOR APPROVEAL

客户名称 (CUSTOMER): ZLGD A1-0051

客户料号 (PART NO.):

品 名 (DESCRIPTION): Coil + Magnetic Plate

规格 (SPECIFICATION): 0.08 * 10⁵ P wire wrapped coil, diameter 38mm x length 14mm, inductance 6.8uH, magnetic spacer $\varnothing 44 \times 0.8$ (with open slot), magnetic edge protrudes 20mm

日 期 (DATE): 20220415

本司确认 (TRX APPROVAL)		
make	audit	Acknowledgment Date
Pan Ximing	Qiu Zhihui	20240415
客户确认 (CUSTOMER APPROVAL)		
make	audit	Acknowledgment Date
确认结果 (Result): ☐ qualified ☐ disqualification ☐ other		

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

No. 107, Xinfeng West Road, Shige Town, Dongguan City

phone: 0769-86016320

fax: 0769-86372427


东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	ZLGD0-14*38-20-FR	版本 Rev:A	Customer:	ZLGD
			Description:	Coil + Magnetic Plate
			Date:	20220415

一、尺寸DIMENSION: (mm)

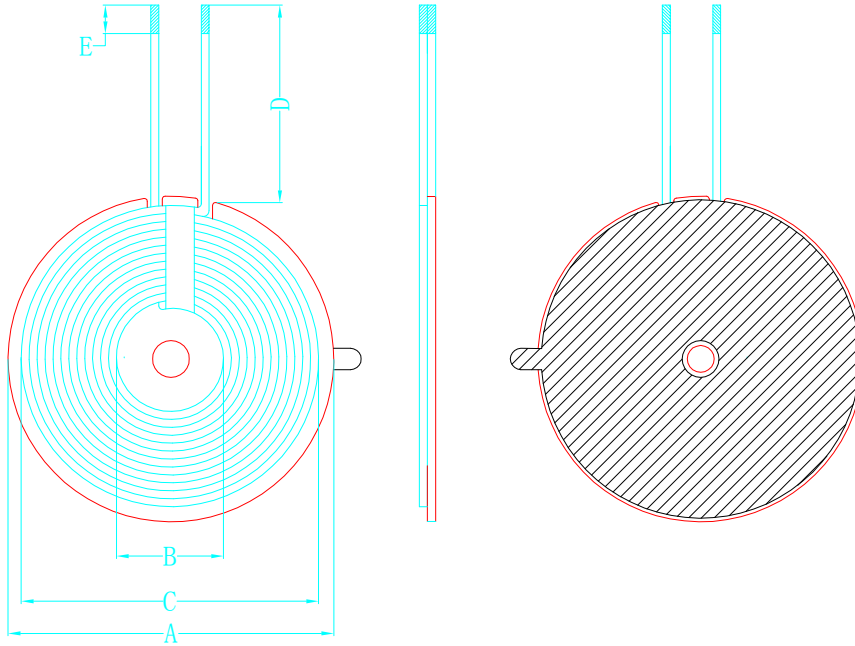

A	44.0±1.0
B	14.0±1.0
C	38.0±1.5
D	20.0±2.0
E	3.5±1.5
F	
G	
H	
I	
J	
K	
L	

notice:

1. The coil is placed against the hard magnet with the magnetic sheet having holes and double slots, and the thickness of the magnetic sheet is between 0.8 and 0.89. The position of the coil is centered.
2. The back of the magnetic sheet is covered with white double-sided adhesive tape with ears.
3. 5mm heat-resistant adhesive tape is wound at the outlet position of the coil.
4. The coil must not be loose.

二、原理图 (schematic diagram:)

三、绕线参数(WindingSpecification:)

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		0.08X105P丝包线	12TS	逆时针

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10° C,湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		6.8UH (必须在6.5-7.1内)	100KHZ/1.0V	SHDA 1062
2	IND.				
3	Q值				
4	DCR				

拟制/日期PREPARED BY/DATE	审核/日期CHECKED BY/DATE	客户/日期CUSTOMEU/DATE