

TABLE OF CONTENTS LIST

APPLICANT: RADIOSHACK, A DIVISION OF TANDY CORP.

FCC ID: AA01901206

TEST REPORT:

PAGE	1.....	COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.
PAGE	2.....	TECHNICAL DESCRIPTION CONTD & RF POWER OUTPUT
PAGE	3.....	MODULATION CHARACTERISTICS & OCCUPIED BANDWIDTH
PAGE	4.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE	5.....	METHOD OF MEASURING SPURIOUS EMISSIONS AT ANTENNA TERMINAS AND RADIATED EMISSIONS TEST DATA
PAGE	6.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE	7.....	FREQUENCY STABILITY
PAGE	8-9....	TRANSIENT FREQUENCY STABILITY
PAGE	10.....	CERTIFICATION OF TECHNICAL DATA
PAGE	11.....	LIST OF TEST EQUIPMENT

EXHIBITS:

EXHIBIT	1.....	POWER OF ATTORNEY LETTER
EXHIBIT	2.....	FCC ID LABEL SAMPLE
EXHIBIT	3.....	SKETCH OF FCC ID LOCATION
EXHIBIT	4.....	FRONT VIEW EXTERNAL PHOTOGRAPH
EXHIBIT	5.....	REAR VIEW EXTERNAL PHOTOGRAPH
EXHIBIT	6.....	COMPONENT SIDE INTERNAL PHOTOGRAPH
EXHIBIT	7.....	COPPER SIDE INTERNAL PHOTOGRAPH
EXHIBIT	8.....	BLOCK DIAGRAM
EXHIBIT	9A-9F....	PARTS LIST
EXHIBIT	10A-10B..	SCHEMATIC
EXHIBIT	11A-11K..	USER'S MANUAL
EXHIBIT	12A-12D..	THEORY OF OPERATION
EXHIBIT	13A-13B..	ALIGNMENT PROCEDURE
EXHIBIT	14A-14C..	CRYSTAL SPECIFICATION
EXHIBIT	15.....	AUDIO FREQUENCY RESPONSE GRAPH
EXHIBIT	16.....	AUDIO INPUT VS DEVIATION GRAPH
EXHIBIT	17.....	AUDIO LOW PASS FILTER GRAPH
EXHIBIT	18.....	OCCUPIED BANDWIDTH CW PLOT
EXHIBIT	19.....	OCCUPIED BANDWIDTH 3000 Hz TONE
EXHIBIT	20A-20B...	TRANSIENT FREQUENCY RESPONSE PLOTS

APPLICANT: RADIOSHACK, A DIVISION OF TANDY CORP.

FCC ID: AA01901206

REPORT #: F:\CUS\R\RADSHACK\RAD178A8.RPT

PAGE: TABLE OF CONTENTS

GENERAL_INFORMATION_REQUIRED
FOR_TYPE_ACCEPTANCE

2.983 (a,b,c) RADIOSHACK, A DIVISION OF TANDY CORP. will sell the
MODEL NO. AAO1901206 VHF transmitter in quantity,
for use under FCC RULES PART 22 & 90.

2.983 (d) TECHNICAL_DESCRIPTION

(1) Type of Emission: 10K0F3E For 25KHz
10K0F3E For 12.5KHz

For 25KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 2.0\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(2.0K)(1) = 6.0K + 4.0K = 10.0K$$

ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

For 12.5KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 2.0\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(2.0K)(1) = 6.0K + 4.0K = 10.0K$$

ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.

90.209(b)(5)

(2) Frequency Range: 148-174 MHz

(3) Power Range and Controls: There are NO user Power
controls.

(4) Maximum Output Power Rating:
2.0 Watts & 0.60 Watts,
into a 50 ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:

POWER INPUT

High FINAL AMPLIFIER ONLY

$$V_{ce} = 7.20 \text{ Volts}$$

$$I_{ce} = 0.72 \text{ A.}$$

$$P_{in} = 5.18 \text{ Watts}$$

Low FINAL AMPLIFIER ONLY

$$V_{ce} = 7.20 \text{ Volts}$$

$$I_{ce} = 0.35 \text{ A.}$$

$$P_{in} = 2.52 \text{ Watts}$$

(6) Function of each electron tube or semiconductor
device or other active circuit device:

- 2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT #7. The block diagram is included as EXHIBIT #5.
- (8) Instruction book. The instruction manual is included as EXHIBIT #8.
- (9) Tune-up procedure. The tune-up procedure is given in EXHIBIT #8.
- (10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in the instruction manual.

- 2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power. In addition to the interstage filtering the multi-section low pass filter made up of L12, L11, C40, C47, C95, C46, C94, C45, & C26.

Limiting Modulator:

The transmitter audio limiting circuitry is contained in the loop filter IC01.


Limiting Power: There is no provision for limiting power.

- (12) Digital modulation. This unit does NOT use digital modulation.

2.983(e) The data required by 2.985 through 2.997 is submitted below.

2.985(a) RF power output.
RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.2V, and the transmitter properly adjusted the RF output measures:

POWER HIGH
 INPUT POWER: (7.2V)(0.72A) = 5.18 Watts
 OUTPUT POWER: 2.0 Watts Efficiency: 38%
 LOW POWER
 INPUT POWER: (7.2V)(0.35A) = 2.52 Watts
 OUTPUT POWER: 0.62Watts Efficiency: 24%

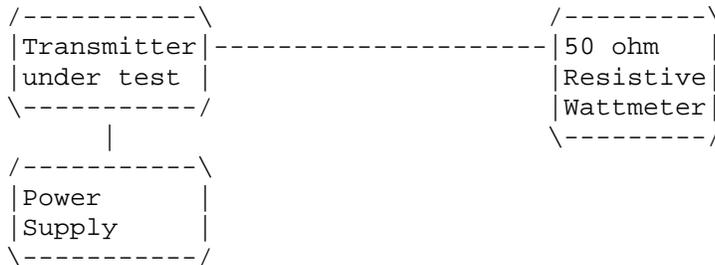

- 2.987(a) Voice Modulation_characteristics:
- (a) AUDIO_FREQUENCY_RESPONSE See the EXHIBIT #9.
- 2.987(a) AUDIO_LOW_PASS_FILTER
The audio low pass filter is included and the plot is shown as EXHIBIT #11. Rules 90.210(b,d, & e) for mobile stations with a low pass filter.
- 2.987(b) Audio_input_versus_modulation A plot of the audio input versus deviation is shown in in EXHIBIT #10.

2.989(c) Occupied_bandwidth:
90.210(b,)
Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + \log(P)$ dB.

90.210(d) 12.5KHz channel bandwidth equipment. For transmitters designed to operate with a 12.5KHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows;


- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625kHz removed from f_{P0} : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency $(f_d - 2.88\text{kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency $(f_d \text{ in kHz } \log(P) \text{ or } 70\text{dB})$, whichever is the lesser attenuation.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11 , with the exception that various tones were used.


Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

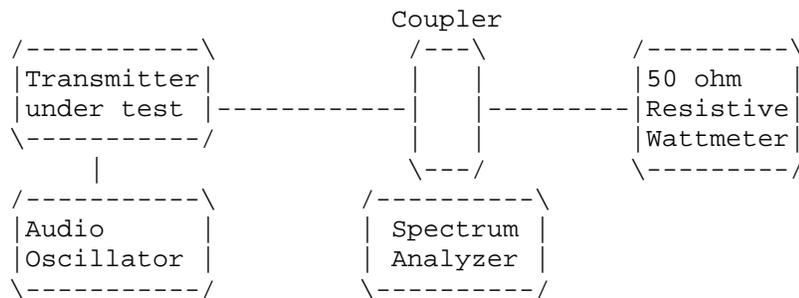

2.991 Spurious_emissions_at_antenna_terminals(conducted):
 Data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of fundamental. The measurements were made in accordance with standard TIA/EIA-603.

Method of Measuring Conducted Spurious Emissions

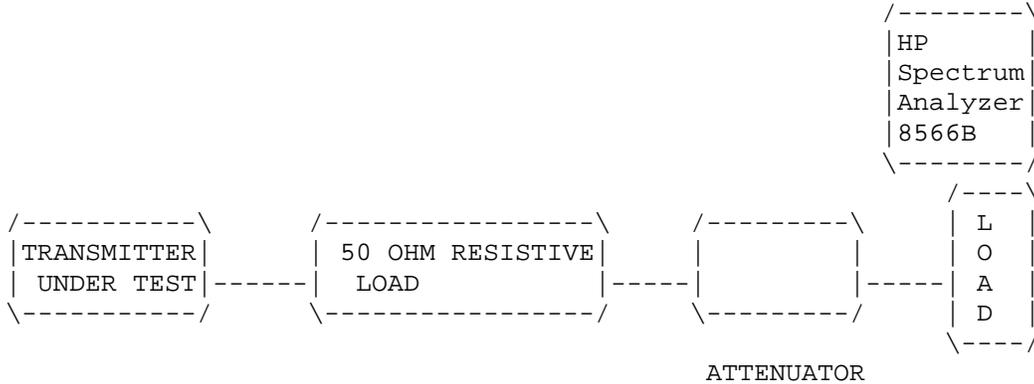

2.991 Continued Spurious_Emissions_at_the_Antenna_Terminals:
 REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.
 For 25KHz $43 + 10\log(5.5) = 43 + 7.4 = 50.4\text{dB}$
 For 12.5KHz $50 + 10\log(P_o) = 50 + 3.01 = 53.01$

	EMISSION FREQUENCY MHz	dB BELOW CARRIER
HIGH	154.57	00.0
	140.10	-68.9
	309.14	-54.9
	463.71	-54.6
	618.28	-72.6
	772.85	-66.4
	927.42	-73.6
	1081.99	-73.9
	1236.56	-76.0
	1391.13	-74.5
1545.70	-75.5	
LOW	154.57	0.0
	140.10	-62.7
	309.14	-48.8
	463.71	-54.8
	618.28	-66.5
	772.85	-60.6
	927.42	-69.6
	1081.99	-68.4
	1236.56	-67.6
	1391.13	-68.3
1545.70	-68.9	

2.991 Continued Spurious_Emissions_at_the_Antenna_Terminals:

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400KHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 25355 WEST NEWBERRY ROAD, NEWBERRY FLORIDA 32669.

2.993(a)(b) Field_strength_of_spurious_emissions:

REQUIREMENTS: Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

HIGH POWER

$$43 + 10\log(2.0) = 46.0 \text{ dB}$$

LOW POWER

$$43 + 10 \text{ LOG}(0.6) = 40.8 \text{ dB}$$


TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m uV	COAX LOSS dB	ACF dB	FIELD STRENGTH uV/m	reference LEVEL uV/m	MARGIN dB	ANT.
HIGH POWER							
154.58	107.50	0.90	16.76	125.16	0.0	0.0	H
309.14	61.60	1.40	15.67	78.37	-46.79	1.19	V
463.74	50.20	1.60	18.47	70.27	-54.89	9.29	V
618.32	37.40	1.60	20.50	59.50	-65.66	20.06	V
772.86	47.30	2.00	22.08	71.38	-53.78	8.18	H
927.44	30.20	2.90	24.12	57.22	-67.94	22.34	H
1082.02	36.50	1.00	24.33	61.83	-63.33	17.73	H
1236.56	27.20	1.00	24.95	53.15	-72.07	26.7	H
1391.13	22.80	1.00	25.56	49.36	-75.8	30.2	H
1545.80	22.20	1.00	26.18	49.38	-75.78	30.18	H
LOW POWER							
154.56	99.00	0.90	16.76	116.66	0.0	0.0	H
309.14	55.60	1.40	15.37	72.37	-44.29	3.49	V
463.74	48.50	1.60	18.47	68.57	-48.09	7.29	V
618.32	43.00	1.60	20.50	65.10	-51.56	10.76	H
772.86	47.70	2.00	22.08	71.78	-44.88	4.08	H
927.44	31.70	2.90	24.12	58.72	-57.94	17.14	H
1082.02	29.90	1.00	24.33	55.23	-61.43	20.63	H
1236.56	20.80	1.00	24.95	46.75	-69.97	29.11	H
1391.13	20.50	1.00	25.56	47.06	-69.60	28.80	H
1545.80	15.00	1.00	26.18	42.18	-74.48	33.46	V

2.993(a)(b) Continued Field_strength_of_spurious_emissions:

METHOD OF MEASUREMENT: The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per ANSI STANDARD C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane Gainesville, FL 32605.

Method of Measuring Radiated Spurious Emissions

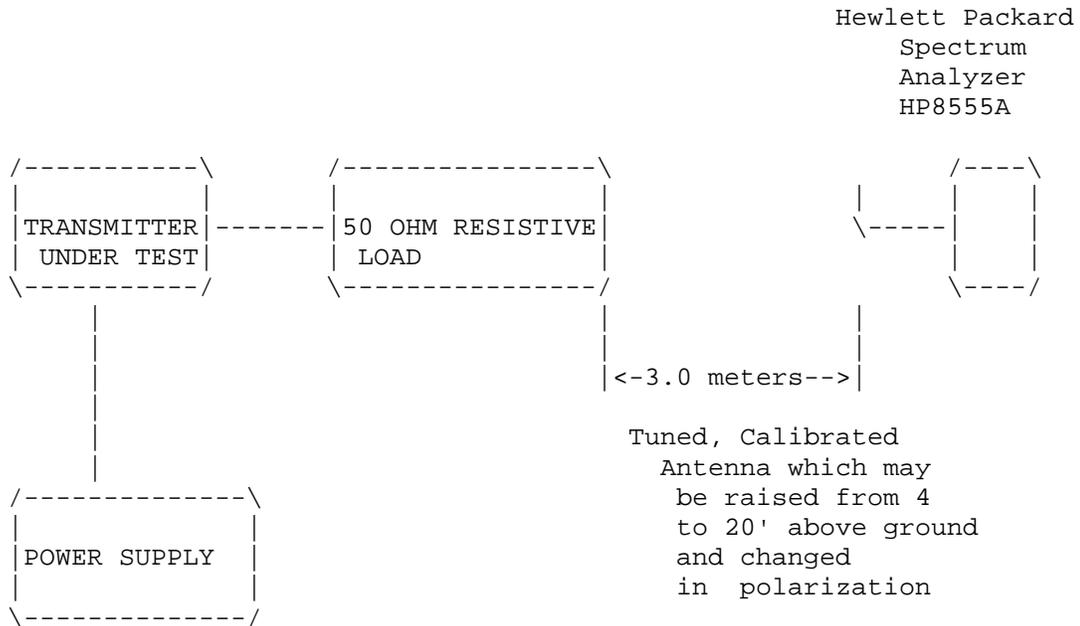

Equipment placed 4' above ground
on a rotatable platform.

2.995(a)(b)(d) Frequency_stability:
90.213(a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0005%, 5.0 ppm specification limit, for 25KHz spacing & 0.0005%, 5.0ppm for 12.5KHz spacing units with 2.0Watts or less. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C.

Readings were also taken at minus 25% of the battery voltage of 5.4VDC, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 154.569 000MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	154.569 000	00.0
-30_____	154.568 350	-4.21
-20_____	154.568 430	-3.69
-10_____	154.569 060	+0.39
0_____	154.569 390	+2.52
+10_____	154.569 510	3.30
+30_____	154.569 480	3.10
+40_____	154.569 120	0.77
+50_____	154.569 090	0.58
20c 85% BATT. 5.40V/dc	154.569 150	0.97

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -4.21 to +3.30 ppm. The maximum frequency variation at the end-point was +0.97 ppm.

2.995(a)(b)(d) Frequency_stability:
90.214 Transient Frequency Behavior


REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:

Time Interval	Maximum Frequency	Portable Radios 150-174Mhz
t1	+12.5kHz	5.0ms
t2	+6.25kHz	20.0ms
t3,t4	+12.5kHz	5.0ms

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

2.995(a)(b)(d) Frequency_stability:
 90.214 Transient Frequency Behavior
 (Continued)

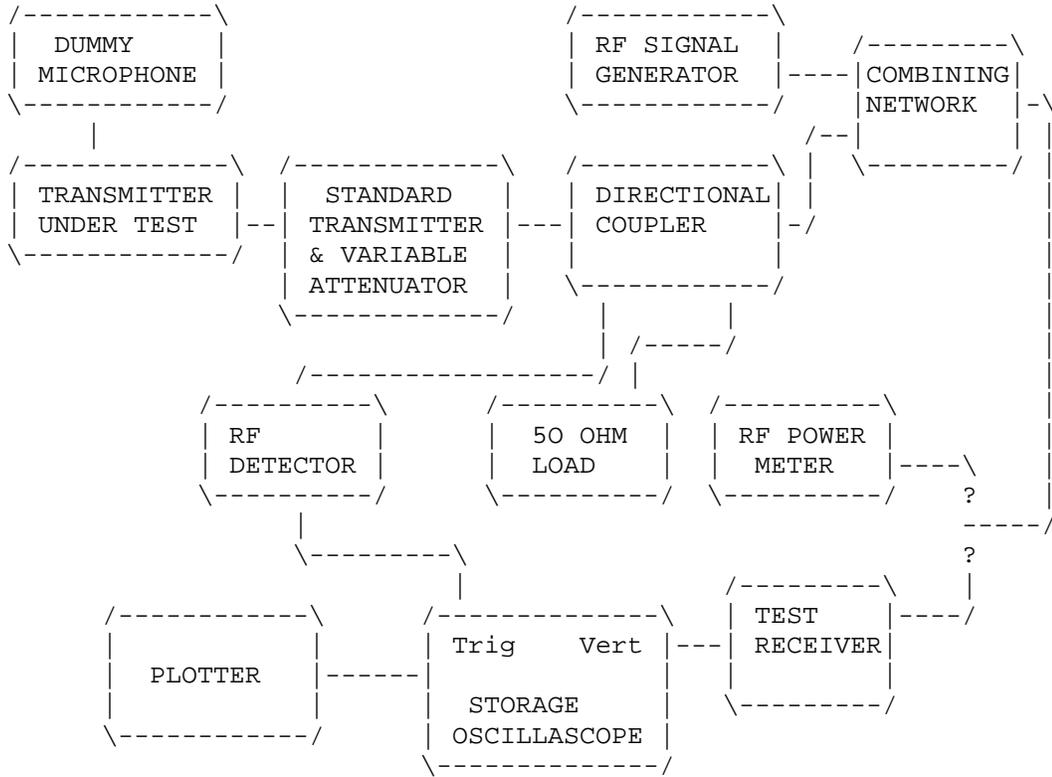

2.983(f) Photo_or_Drawing_of_Label: See Page 25.

2.983(g) Photos_of_Equipment:
 See Pages 21-24.

2.999 Measurement_Procedures_for_Type_Acceptance:

 Measurement techniques have been in accordance
 with EIA specifications and the FCC requirements.

2.909 Certification_of_Technical_Data_by_Engineers

We, the undersigned, certify that the enclosed
measurements and enclosed data are true and
correct.

____S.S.Sanders_____

Engineer

LIST_OF_TEST_EQUIPMENT

1. Frequency Counter - Hewlett Packard Model 5383A
S/N 2338A06071
2. SPECTRUM ANALYZER - HP Model 8568B
3. RF PRE-SELECTOR - HP Model 85685A
4. QUASI-PEAK ADAPTER - HP 85650A
5. RF Power Meter - Bird Model 43 Serial 81398
6. RF Attenuators - Narda MOD 766-20
7. Audio Oscillator - Hewlett Packard Model 201C
Serial 351-06107
8. Modulation meter - IFR MODEL AM/FM 500A.
9. Voltmeter - Hewlett Packard Model 427A
Serial Number 731-0751
10. HP Distortion Analyzer Model No. 334A
Serial Number 822-01817
11. Tenney Jr. Temperature Chamber
11. Eaton Biconical antenna Model 94455-1 antenna kit 20-200 MHz
12. Electro-Metric Dipole Kit 20-1000MHz, Model TDA 25
13. Electro-Metrics RGA-180 antenna kit 1- 18 GHz
14. HP broadband preamplifier model 8447D, serial no.
1644A00978, 30 - 1000 MHz.
15. Avaatek AFT-2032 broadband preamplifier, serial no.
8606SN01, 1 - 2 GHz.