

**Tandy Electronics (China) Ltd. SZ R&D**

Application  
For  
Certification  
**(FCC ID: AAO2101813)**

March 31, 1999

WO# 9902173  
WN/at  
March 31, 1999

- The test results reported in this report shall refer only to the sample actually tested and shall not refer or be deemed a refer to bulk from which such a sample may be said to have been obtained
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited.

FCC ID: AAO2101813

---

# INTERTEK TESTING SERVICES

---

## SUMMARY OF CONTENTS

### LIST OF EXHIBITS

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	RF Power Output
<i>EXHIBIT 4:</i>	Modulation Characteristics
<i>EXHIBIT 5:</i>	Occupied Bandwidth
<i>EXHIBIT 6:</i>	Emission Spurious
<i>EXHIBIT 7:</i>	Frequency Stability
<i>EXHIBIT 8:</i>	Technical Specifications
<i>EXHIBIT 9:</i>	Product Labelling
<i>EXHIBIT 10:</i>	Photographs
<i>EXHIBIT 11:</i>	Instruction Manual

---

---

**INTERTEK TESTING SERVICES**

---

---

**MEASUREMENT/TECHNICAL REPORT**

**Application** : Tandy Electronics (China) Ltd. SZ R&D  
**Trade Name/Model No** : Radio Shack 21-1813  
**Date** : March 31, 1999

This report concerns (check one:) Original Grant  X  Class II Change \_\_\_\_\_

Equipment Type:  Family Radio Service, FRS

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes \_\_\_\_\_ No  X

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

Wilbur Ng  
Intertek Testing Services.  
2/F., Garment Centre,  
576 Castle Peak Road,  
Kowloon, Hong Kong.  
Phone: 852-2746-8680  
Fax: 852-2785-5487

---

---

# INTERTEK TESTING SERVICES

---

---

## Table of Contents

1.0 <b><u>General Description</u></b> .....	2
1.1 Product Description .....	2
1.2 Related Submittal(s) Grants .....	3
1.3 Test Methodology .....	3
1.4 Test Facility .....	3
2.0 <b><u>System Test Configuration</u></b> .....	5
2.1 Justification .....	5
2.2 EUT Exercising Software .....	6
2.3 Special Accessories .....	6
2.4 Equipment Modification .....	6
3.0 <b><u>RF Output Power (Section 95.639(d))</u></b> .....	8
4.0 <b><u>Modulation Characteristics (Section 95.637(a))</u></b> .....	12
4.1 Modulation Frequency Response .....	14
4.2 Modulation Limiting Characteristic .....	16
5.0 <b><u>Occupied Bandwidth (Section 95.633(c))</u></b> .....	21
6.0 <b><u>Spurious Emission (Section 95.635(b))</u></b> .....	20
6.1 Field Strength of Spurious Radiation .....	27
7.0 <b><u>Frequency Stability (Section 95.627)</u></b> .....	34
7.1 Frequency Tolerance .....	35
7.2 Voltage Extreme Condition .....	38
7.3 Temperature Extreme Condition .....	42
8.0 <b><u>Technical Specifications</u></b> .....	45
9.0 <b><u>Product Labelling</u></b> .....	49
10.0 <b><u>Equipment Photographs</u></b> .....	53
11.0 <b><u>Instruction Manual</u></b> .....	55

## INTERTEK TESTING SERVICES

---

List of attached file

Exhibit type	File Description	Filename
Cover Letter	Letter of Agency	letter.pdf
Operation Description	Technical Description	descri.pdf
Test Report	Bandwidth Plot	bw.pdf
Test Report	Modulation Frequency Response	mfr.pdf
Test Report	Modulation Limit Characteristic	mlc.pdf
Test Report	Spurious Emission	spurious.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Test Report	Test Report	report.doc
Test Setup Photo	Radiated Emission	radiated1.jpg to radiated2.jpg
Internal Photo	Internal Photo	iphoto1.jpg to <a href="#">iphoto4.jpg</a>
External Photo	External Photo	ophoto1.jpg to <a href="#">ophoto2.jpg</a>

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 1**

**GENERAL DESCRIPTION**

# INTERTEK TESTING SERVICES

---

## 1.0 **General Description**

### 1.1 Product Description

The Equipment Under Test (EUT) is a 14-Channel Family Radio Service (FRS) transceiver operation from 462.5625MHz to 467.7125MHz. The EUT is powered by 4.5V battery (3 x "AA" battery).

Transmitter portion:

- (i) Type of Emission : F3E
- (ii) Frequency Range : 462.5625MHz to 467.7125MHz
- (iii) Maximum Power Rating : 0.34W

The device transmits CTCSS subaudible tone (50Hz to 300Hz) which is used to identify user group to avoid unwanted signal interference continuously only while the user is talking. And an audible ringer tone (more than 300Hz) will be transmitted less than 5 second for the paging function in the group.

The brief circuit description is saved with filename: descri.pdf

## INTERTEK TESTING SERVICES

---

### 1.2 Related Submittal(s) Grants

This is an Application for Certification of the transmitter portion of a FRS Transceiver. The receiver section of the FRS Transceiver is subject to verification process.

### 1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurement were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. For each scan, the procedure of maximizing emissions in Appendices D and E were followed. All Radiated tests were performed at an antenna the EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

### 1.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. The test facility and site measurement data have been fully placed on file with the FCC.

**EXHIBIT 2**  
**SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 2.0 **System Test Configuration**

#### 2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). The device was placed on a turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes. When the radiated emissions are measured.

The device was powered by 3 fully charged 1.5V "AA" battery.

The frequency range from 30 MHz to 10<sup>th</sup> harmonics was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

## INTERTEK TESTING SERVICES

---

### 2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered on, a signal is transmitted.

### 2.3 Special Accessories

A special headset is provided by client for compliance of this device.


### 2.4 Equipment Modification

Any modification installed previous to testing by Tandy Electronics (China) Ltd. SZ R&D will be incorporated in each production model sold/leased in the United States.

No modification were installed by Intertek Testing Services.

*Confirmed by:*

*Wilbur Ng  
Assistant Manager  
Intertek Testing Services  
Agent for Tandy Electronics (China) Ltd. SZ R&D*

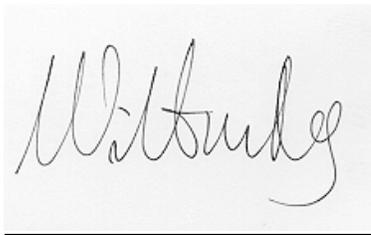

Signature

April 7, 1999 Date

**EXHIBIT 3**

**RF POWER OUTPUT**

---

---

## INTERTEK TESTING SERVICES

---

---

### 3.0 **RF Power Output (Section 2.985(a))**

#### A. Equipment Used

<b>Equipment</b>	<b>Brand Name</b>	<b>Model No.</b>
Biconical Antenna	CDI	B300
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF
Tuned Dipole Antenna	CDI	Robert Antenna 4
Signal Generator	Maconi	2024

#### B. Testing Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarisation located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

## INTERTEK TESTING SERVICES

---

6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarisation and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarisation.
17. The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

---

---

**INTERTEK TESTING SERVICES**

---

---

**Table 1**

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

**Transmission Power**

Channel	Frequency (MHz)	Effectived Radiated Power (W)	Limit (W)	Margin (W)
1	462.563	0.31	0.5	-0.190
2	462.588	0.32	0.5	-0.180
3	462.613	0.31	0.5	-0.190
4	462.638	0.33	0.5	-0.170
5	462.663	0.32	0.5	-0.180
6	462.688	0.31	0.5	-0.190
7	462.713	0.33	0.5	-0.170
8	467.563	0.32	0.5	-0.180
9	467.588	0.32	0.5	-0.180
10	467.613	0.34	0.5	-0.160
11	467.638	0.33	0.5	-0.170
12	467.663	0.33	0.5	-0.170
13	467.688	0.31	0.5	-0.190
14	467.713	0.32	0.5	-0.180

Notes: Negative sign in the margin column shows the value below limits.

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

**EXHIBIT 4**

**MODULATION CHARACTERISTICS**

## INTERTEK TESTING SERVICES

---

### 4.0 Modulation Characteristics

In order to satisfy the 95.637(a) requirement, Modulation Frequency Response and Modulation Limit Characteristics are attached in Exhibit 4.1 & 4.2.

Plots for each tests are saved with filename: mfr.pdf and mlc.pdf

---

# INTERTEK TESTING SERVICES

---


## 4.1 Modulation Frequency Response

### A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi Instrument	2945

### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

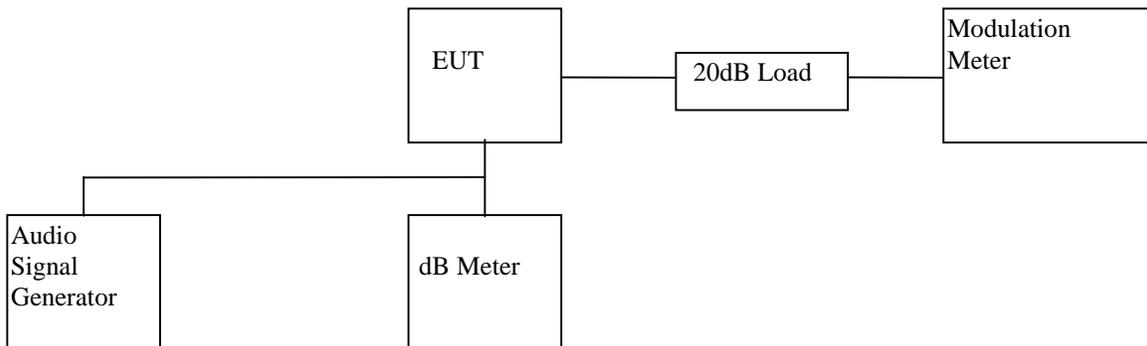

- 2) Set the audio signal generator frequency to the sound pressure level 97.0dB SPL at the microphone of the EUT.
- 3) The frequency of the audio signal generator is changed from 300Hz to 5kHz.
- 4) Record the frequency deviation.

---

---

**INTERTEK TESTING SERVICES**

---

---

**C. Test Result**

**Table 2**

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

**Modulation Frequency Response**

Test Channel : 4  
Input level = 97.0dB SPL

Modulation Frequency (Hz)	Modulation index (%)
300	2.37
400	1.90
500	3.24
600	2.42
700	1.23
800	0.53
900	0.77
1000	0.62
1250	0.42
1500	0.28
1750	0.20
2000	0.35
2250	0.44
2500	0.72
2750	0.34
3000	0.26
3125	0.14
3250	0.13
3500	0.12
4000	0.09
5000	0.04

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

---

## INTERTEK TESTING SERVICES

---


### 4.2 Modulation Limiting Characteristics (Section 2.987(b))

#### A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
20 dB RF Load	Bird	8304-200-N
Modulation Meter	Marconi	2950

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

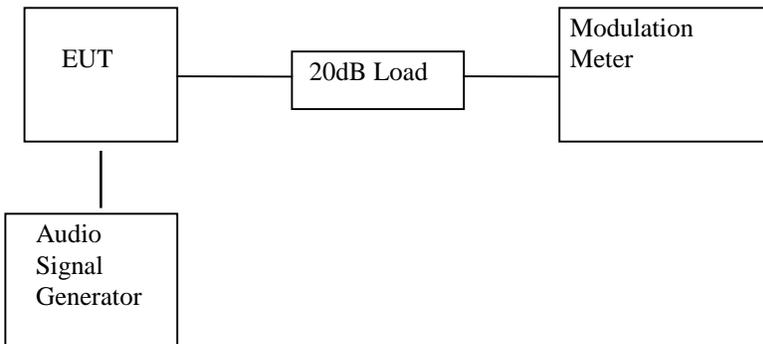

- 2) Set the frequency of the audio signal generator to 500Hz and adjust the level from 47dBSPL to 127dBSPL.
- 3) Record the maximum value of plus or minus peak frequency deviation.
- 4) Repeat the above procedure with frequency 1000Hz, 2500Hz & 3125Hz.

---

---

**INTERTEK TESTING SERVICES**

---

---

**C. Test Result**

**Table 3**

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

**Modulation Limiting Characteristics**

Test Channel : 4

<b>Modulation Input (dB SPL)</b>	<b>Peak Frequency Deviation (kHz) at 500Hz</b>	<b>Peak Frequency Deviation (kHz) at 1000Hz</b>	<b>Peak Frequency Deviation (kHz) at 2500Hz</b>	<b>Peak Frequency Deviation (kHz) at 3125Hz</b>
47	0.13	0.15	0.15	0.10
57	0.13	0.15	0.15	0.10
67	0.13	0.15	0.15	0.10
77	0.28	0.15	0.30	0.10
87	0.79	0.25	0.76	0.25
97	1.62	0.62	1.01	0.45
107	1.94	1.28	1.03	0.76
117	2.01	1.42	0.98	0.78
127	1.94	1.40	0.98	0.79

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

**EXHIBIT 5**

**OCCUPIED BANDWIDTH**

---

---

## INTERTEK TESTING SERVICES

---

---


### 5.0 Occupied Bandwidth (Section 95.633(c))

#### A. Test Equipment

Equipment	Brand Name	Model No.
Audio Signal Generator	Leader	LFG-1300S
dB meter	Leader	LMV-182A
20 dB RF Load	Bird	8304-200-N
Spectrum Analyzer	Hewlett Packard	8951EM

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

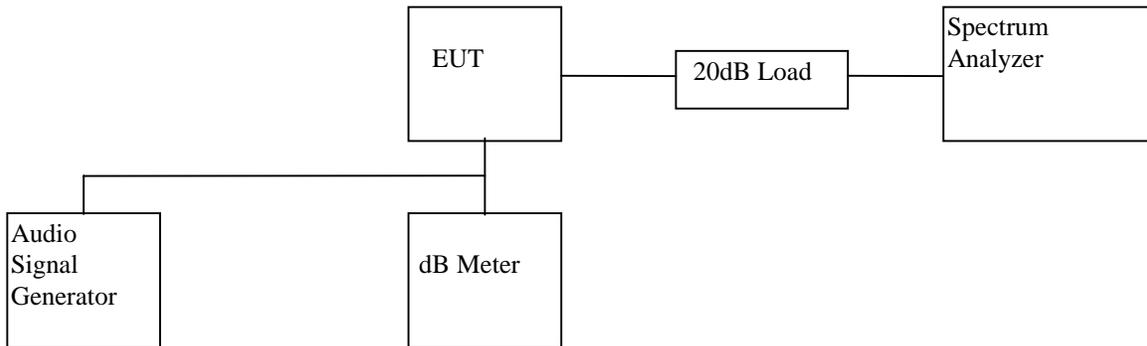

- 2) Set the level of audio signal generator to obtain 16 dB greater than required for 50% modulation.
- 3) The occupied bandwidth is measured with the spectrum analyzer set at 5kHz/div scan and 10dB/div.

#### C. Test Result

The occupied Bandwidth is measured to be 7.2 kHz.

For the electronic filing, the bandwidth plot is saved with filename:  
bw.pdf

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

**EXHIBIT 6**

**SPURIOUS EMISSION**

## INTERTEK TESTING SERVICES

---

### 6.0 **Spurious Emission (Section 95.635)**

In order to satisfy the 95.635 requirement, the spurious emission from the EUT are measured and shown in the Exhibit 6.1.

## INTERTEK TESTING SERVICES

---

### 6.2 Field Strength of Spurious Radiation (Section 95.635)

#### A. Test Equipment

<b>Equipment</b>	<b>Brand Name</b>	<b>Model No.</b>
Antenna	CDI	B100,B200,B300, Horn
Test receiver	Rohde & Schwarz	ESVS30
RF Filter	Tailithic	3VF

#### B. Testing Procedure

Radiated emission measurements were performed according to the procedures in ANSI C63.4(1992). All measurements were performed in Open Area Test Sites located at Roof Top of Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

## INTERTEK TESTING SERVICES

---

### **C. Radiated Emission Configuration Photograph**

#### Worst Case Radiated Emission

For electronic filing, the radiated emission configurations photograph is saved with filename: radiated1.jpg & radiated2.jpg

---

## INTERTEK TESTING SERVICES

---

### C. Test Result

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

**Table 4(a)**

1. Unwanted emission from CARRIER  $\pm 6.25\text{kHz}$  to Carrier  $\pm 31.25\text{kHz}$

(Refer to the plots which is saved with filename: spurious.pdf)

<b>Region</b>	<b>Unwanted emission</b>	
	<b>Channel 4</b>	<b>Channel 11</b>
CARRIER $\pm 6.25\text{kHz}$ to $\pm 12.5\text{kHz}$	<25dB	<25dB
CARRIER $\pm 12.5\text{kHz}$ to $\pm 31.25\text{kHz}$	<35dB	<35dB

## INTERTEK TESTING SERVICES

---

**Table 4(b): Channel 4**

Orientation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp (dB)	Antenna Factor (dB)	Calculated Net at 3m (dB $\mu$ V/m)	Calculated Limit at 3m * (dB $\mu$ V/m)	Margin (dB)
H	925.326	53.1	16	33.0	70.1	82.2	-12.1
V	1387.986	75.7	34	25.5	67.2	82.2	-15.0
V	1850.645	85.1	34	26.5	77.6	82.2	-4.6
V	2313.308	77.0	34	29.1	72.1	82.2	-10.1
V	2775.964	82.0	34	29.1	77.1	82.2	-5.1
V	3238.627	79.6	34	31.4	77.0	82.2	-5.2
V	3701.290	80.3	34	32.8	79.1	82.2	-3.1
V	4163.953	78.0	34	34.2	78.2	82.2	-4.0
V	4626.601	71.6	34	34.0	71.6	82.2	-10.6
V	5089.264	69.2	34	35.2	70.4	82.2	-11.8

- Remark:
1. Quasi-peak data for emission below 1000MHz.
  2. '-' sign in margin column shows the value below the limits.
  3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
  4. Horn Antenna and average detector is used for emission over 1000MHz.

$$\begin{aligned}
 * \text{ Calculated limit} &= 10 \log_{10} (\text{TP(W)}) - 43 - 10 \log_{10} (\text{TP}) \\
 &= -43\text{dBW} \\
 &= 82.2\text{dB}\mu\text{V/m at 3m}
 \end{aligned}$$

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

## INTERTEK TESTING SERVICES

---

**Table 4(b): Channel 11 (Cont'd)**

Orientation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp (dB)	Antenna Factor (dB)	Calculated Net at 3m (dB $\mu$ V/m)	Calculated Limit at 3m* (dB $\mu$ V/m)	Margin (dB)
H	935.326	53.3	16	33.0	70.3	82.2	-11.9
V	1402.989	76.7	34	25.5	68.2	82.2	-14.0
V	1870.653	83.1	34	26.5	75.6	82.2	-6.6
V	2338.315	75.9	34	29.1	71.0	82.2	-11.2
V	2805.978	80.2	34	29.1	75.3	82.2	-6.9
V	3273.641	78.2	34	31.4	75.6	82.2	-6.6
V	3741.305	79.3	34	32.8	78.1	82.2	-4.1
V	4208.967	77.4	34	34.2	77.6	82.2	-4.6
V	4676.631	72.1	34	34.0	72.1	82.2	-10.1
V	5144.292	69.0	34	35.2	70.2	82.2	-12.0

- Remark:
1. Quasi-peak data for emission below 1000MHz.
  2. '-' sign in margin column shows the value below the limits.
  3. Any emissions and any other harmonics which are attenuated more than 20dB below the permissible value need not be recorded.
  4. Horn Antenna and average detector is used for emission over 1000MHz.

$$\begin{aligned}
 * \text{ Calculated limit} &= 10 \log_{10} (\text{TP(W)}) - 43 - 10 \log_{10} (\text{TP}) \\
 &= -43\text{dBW} \\
 &= 82.2\text{dB}\mu\text{V/m at 3m}
 \end{aligned}$$

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

**EXHIBIT 7**

**FREQUENCY STABILITY**

### 7.0 **Frequency Stability**

The frequency tolerance was tested in normal condition & over extreme ambient conditions with respect to voltage and temperature variation.

# INTERTEK TESTING SERVICES

---


## 7.1 Frequency Tolerance (Section 95.625)

### A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

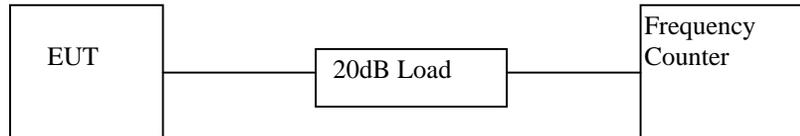

- 2) Measure all transmit channel frequencies in MHz.

---

---

**INTERTEK TESTING SERVICES**

---

---

**C. Test Result**

**Table 5**

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

**Frequency Tolerance**

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
1	462.5625	462.5621	0.00009
2	462.5875	462.5876	-0.00002
3	462.6125	462.6133	-0.00017
4	462.6375	462.6370	0.00011
5	462.6625	462.6624	0.00002
6	462.6875	462.6881	-0.00013
7	462.7125	462.7126	-0.00002
8	467.5625	467.5634	-0.00019
9	467.5875	467.5883	-0.00017
10	467.6125	467.6120	0.00011
11	467.6375	467.6376	-0.00002
12	467.6625	467.6631	-0.00013
13	467.6875	467.6876	-0.00002
14	467.7125	467.7134	-0.00019

# INTERTEK TESTING SERVICES

---


## 7.2 Frequency Stability - Temperature (Section 2.995)

### A. Test Equipment

Equipment	Brand Name	Model No.
20 dB RF Load	Bird	8304-200-N
Frequency Counter	Phillips	PM6668

### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

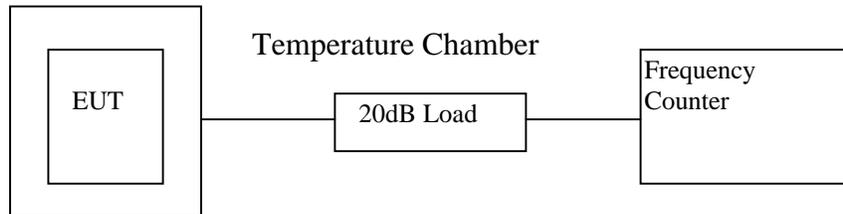

- 2) Set the Temperature Chamber to  $-20^{\circ}\text{C}$  and stabilize the EUT temperature for one hour. Set transmitter ON for two minutes.
- 3) Measure the channel frequency of channel 4, 11 in MHz.
- 4) Turn the EUT OFF
- 5) Repeat the above procedure from  $-20^{\circ}\text{C}$  to  $50^{\circ}\text{C}$  with  $10^{\circ}\text{C}$  increment.

---

---

**INTERTEK TESTING SERVICES**

---

---

**C. Test Result**

**Table 6(a)**

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

**Frequency Deviation with Temperature Variation**

Channel : 4

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
-20	462.6375	462.6376	0.00002
-10	462.6375	462.6379	0.00009
0	462.6375	462.6380	0.00011
10	462.6375	462.6379	0.00009
20	462.6375	462.6370	-0.00011
30	462.6375	462.6376	0.00002
40	462.6375	462.6379	0.00009
50	462.6375	462.6373	-0.00004

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

---

---

**INTERTEK TESTING SERVICES**

---

---

**C. Test Result**

**Table 6(b)**

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

**Frequency Deviation with Temperature Variation**

Channel : 11

Temperature (°C)	Assigned Frequency (MHz)	Measured Frequency (MHz)	% Deviation
-20	467.6375	467.6373	-0.00004
-10	467.6375	467.6380	0.00011
0	467.6375	467.6373	-0.00004
10	467.6375	467.6374	-0.00002
20	467.6375	467.6376	0.00002
30	467.6375	467.6373	-0.00004
40	467.6375	467.6381	0.00013
50	467.6375	467.6373	-0.00004

Test Engineer: Liza C. Y. Chan

Date of Test: March 23, 1999

---

## INTERTEK TESTING SERVICES

---


### 7.3 Frequency Stability - Voltage (Section 2.995)

#### A. Test Equipment

Equipment	Brand Name	Model No.
Regulated Power Supply	PAD	30-35L
20 dB RF Load	Bird	8304-200-N
Voltage meter	Fluke	87
Frequency Counter	Phillips	PM6668

#### B. Testing Procedure

- 1) Set-up the test equipment in the following configuration:

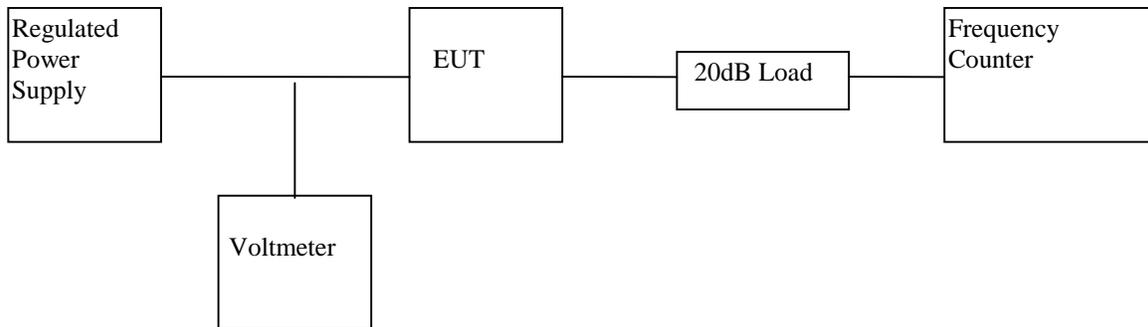

- 2) Vary the level of regulated power supply to [the manufacturer specified battery end point](#) of the EUT.
- 3) Measure the channel frequency of channel [4 and 11](#) in MHz.

---

---

## INTERTEK TESTING SERVICES

---

---

### C. Test Result

**Table 7**

**Tandy Electronics (China) Ltd. SZ R&D  
Radio Shack 21-1813**

#### Frequency Deviation with Voltage Variation

The manufacturer specified battery end point 3.2V

Channel	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (%)
4	462.6375	462.63788	0.00008
11	467.6375	467.63800	0.00011

**EXHIBIT 8**

**TECHNICAL SPECIFICATIONS**

8.0 **Technical Specifications**

### 8.1 Block Diagram

For electronic filing, the block diagram of the FRS is saved with filename:  
block.pdf

Figure 8.1 Block Diagram

### 8.2 Schematic Diagram

For electronic filing, the schematic diagram of the FRS is saved with filename:  
circuit.pdf

Figure 8.2 Schematic Diagram

**EXHIBIT 9**

**PRODUCT LABELLING**

9.0 **Product Labelling**

## INTERTEK TESTING SERVICES

---

### 9.1 Label Artwork & Location

Figure 9.1 Label Artwork & Location

An engineering drawing of the label which will be permanently affixed to the unit. For electronic filing, the label artwork & location are saved with filename: label.pdf

**EXHIBIT 10**  
**PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

### 10.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: ophoto1.jpg to [ophoto2.jpg](#) for external photo and iphoto1.jpg to [iphoto4.jpg](#) for internal photo.

**EXHIBIT 11**

**INSTRUCTION MANUAL**

## INTERTEK TESTING SERVICES

---

### 11.0 **Instruction Manual**

This manual will be provided to the end-user with each unit sold/leased in the United States.

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf