




YY2987 Headset Antenna report of AB1577AM

Applicant	Shenzhen Cicent Communication Technology Co., Ltd.
Address	505-506 ,ABlock,Donglian Building,Chuangye 2 road,Baoan District,Shenzhen,Guangdong,P.R china

Manufacturer or Supplier	Shenzhen Cicent Communication Technology Co., Ltd.
Address	505-506 ,ABlock,Donglian Building,Chuangye 2 road,Baoan District,Shenzhen,Guangdong,P.R china
Product	AB1577AM ANT
Brand Name	SONY
Model	FPC ANT
Max. Peak Gain	3.63dBi
Date of tests	2025-01-17
Tested by Chunlei Zhao	Approved by fuyu Fu
	


1. Antenna Size (mm)

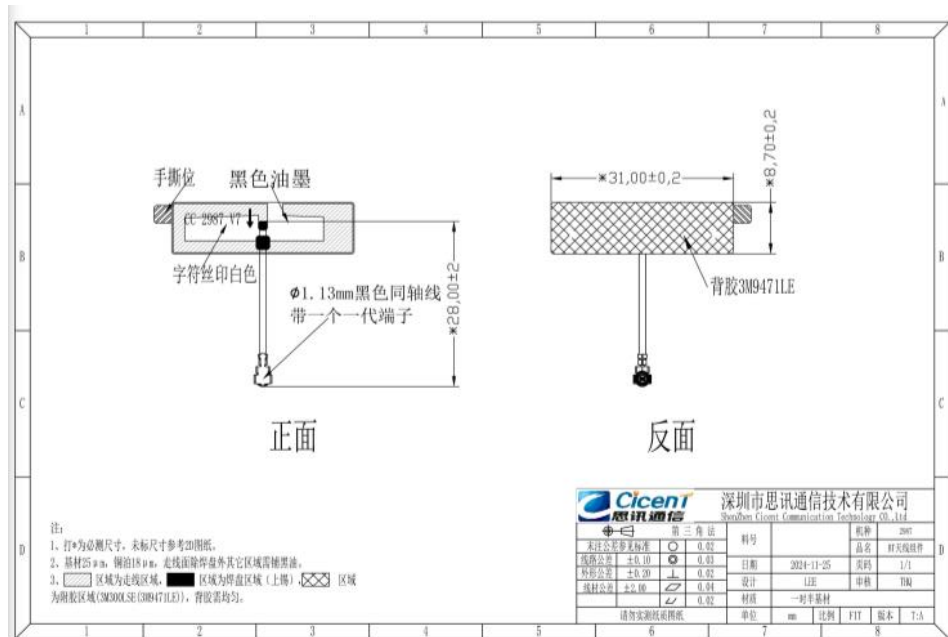

2. Antenna photo (Please refer to Antena photos document)

3. Test setup photo (Please refer to Antena photos document)

4. Return loss & impedance

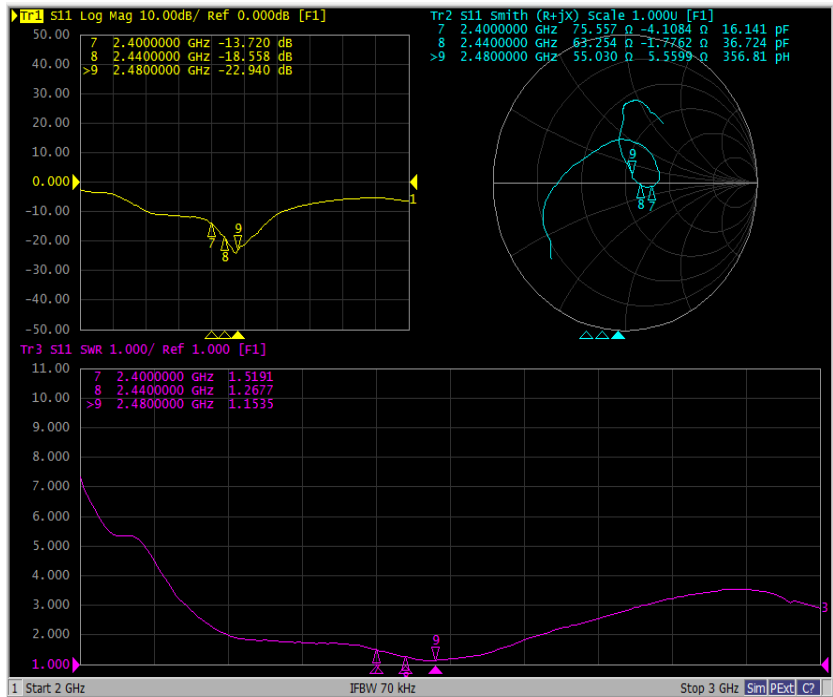


5. Test standard

Name	Parameter	Method	Standard no.
Antenna performance	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-1979

6. Equipment list

Equipment	Manufacturer	Model No	Serial No.	Last Cal.	Due Date
Network Aanlyzer	Agilent	E5071C	MY46630767	2024.11.27	2025.11.26
Microwave chamber	GTS	GTS Maxsign-Dart7000		2024.11.27	2025.11.26
Turn table	GTS	Dart-700 turn table		2024.11.27	2025.11.26
turn table controller	GTS	Dart-700 turn table controller		2024.11.27	2025.11.26
Broad-Band Horn Antenna	GTS	AT-6000	MA-D0460	2024.11.27	2025.11.26
Test Software	GTS	Libra Version-3.0.3.1		2024.11.27	2025.11.26

7.Test configuration diagram

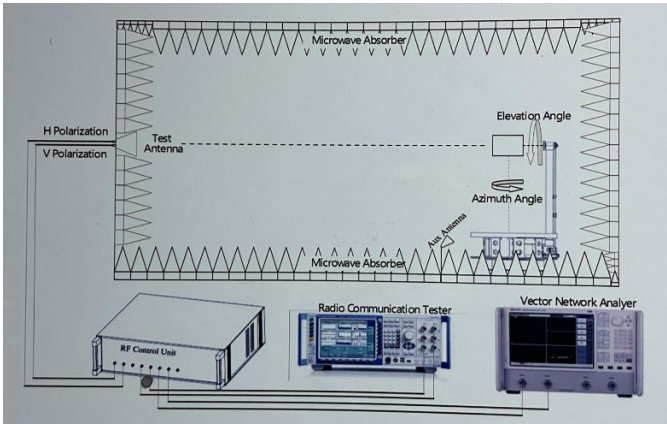


Test step flow:

- 1) Maintain the test ambient temperature of 23 ± 2 C, the instrument is powered on and preheated for more than 30 minutes;

- 2) Turn on the darkroom power supply, connect the test cable, and set up the sample according to the standard;
- 3) Outline sets the test content objectives and conducts calibration tests;
- 4) Run the software, when the test is completed, export the corresponding test diagram and test data, and save to the corresponding directory.

8. Antenna Matching circuit

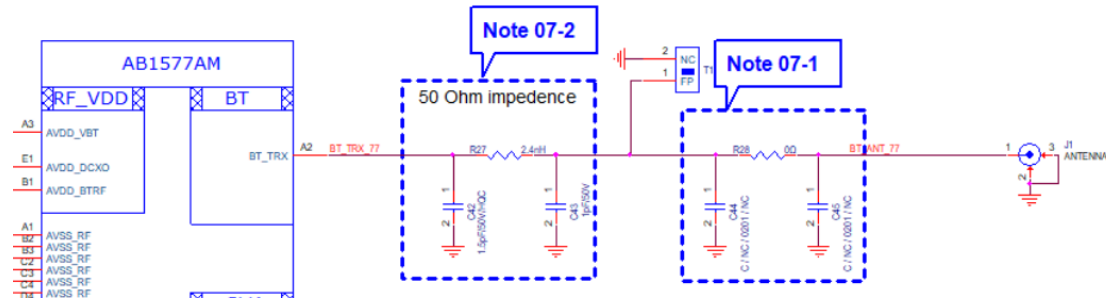


9. Antenna gain


1577			
Fre(MHz)	Gain	Effi(dB)	Effi(%)
2400	3.45	-3.35	46.23
2410	3.63	-3.34	46.34
2420	3.57	-3.49	44.78
2430	3.33	-3.41	45.63
2440	3.08	-3.45	45.18
2450	3.29	-3.46	45.08
2460	3.27	-3.31	46.64
2470	3.32	-3.28	46.99
2480	3.47	-3.26	47.23
AVG.	3.38	-3.37	46.01

10. Antenna test data


2440MHz

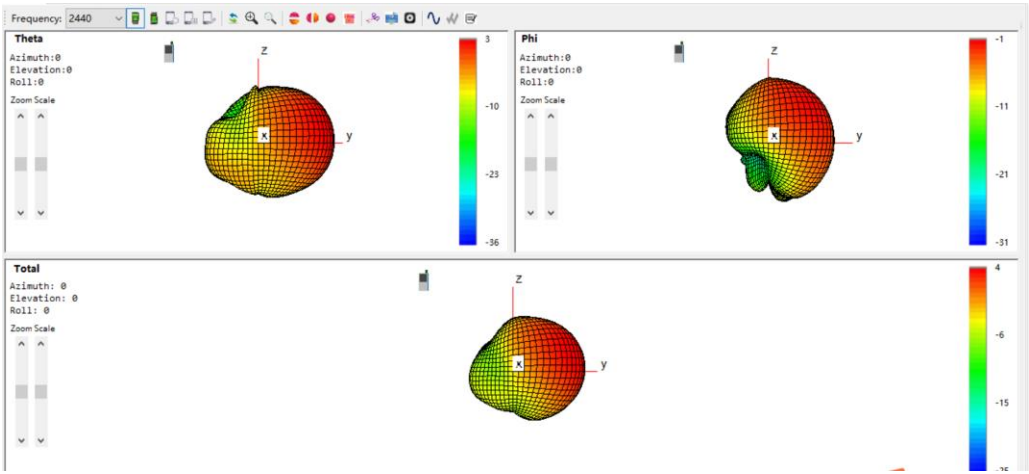

XY-Plane Total

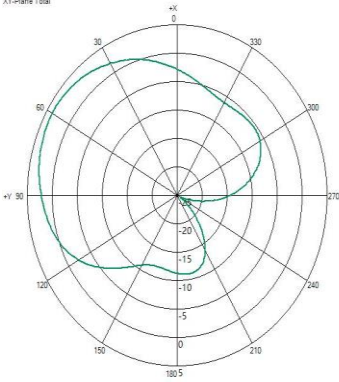

ZY-Plane Total

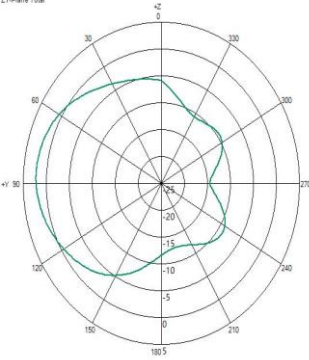

ZX-Plane Total

