

AMUT05

SPECIFICATIONS and User Manual

[CONFIDENTIAL]



Commercial names: Monitoring Ear Tag
(Previous name eSense Flex V2 TAG)



©Copyright SCR Engineers LTD. 2016

This Monitoring Ear Tag Specification is copyrighted. All rights are reserved and no part of this publication may be reproduced or transmitted in any form or by any means without prior written consent.

Disclaimer

The information in this manual was accurate and reliable at the time of its release. However, we reserve the right to change the specifications of the product described in this manual without notice at any time.

Registered Trademarks

All other proprietary names mentioned in this manual are the trademarks of their respective owners.

Revision 0.9

Issued by: Zeev Kapelnik

Approved by:

September 2020

Version History:

1	Initial version
2	Brand name update - SCR
3	Add IC ID and certification warnings for NA and CN
4	Add Regulatory ID by e-labeling
5	Product name update to eSense Flex V2
6	Remove BD
7	Update modulation type and regulatory ID marking
8	Update regions notifications
9	Update product name to Monitoring Ear Tag

Contents

1	Global system specifications	7
1.1	System components	7
2	Monitoring Ear Tag Specifications.....	7
2.1	General description	7
2.2	2.4GHz Transceiver Parameters	8
2.3	TAG – BU/SH communication overview	
2.4	NFC Parameters.....	8
2.5	Mechanical dimensions	8
3	Environmental Conditions	8
4	Monitoring Ear Tag Installation instructions	9
5	Product marking – Regulatory ID – e-Labeling	10

FCC warning:

Monitoring Ear Tag FCC ID: AMUT05

Manufacturer: SCR Engineers Ltd.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

This device may not cause harmful interference, and
this device must accept any interference received,
including interference that may cause undesired operation.

The FCC Wants You to know

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- a) Reorient or relocate the receiving antenna.
- b) Increase the separation between the equipment and receiver.
- c) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- d) Consult the dealer or an experienced radio/TV technician for help.

FCC Warning

Modifications to this equipment not expressly approved by the party responsible for compliance (SCR Engineers Ltd.) could void the user's authority to operate the equipment under FCC Rules.

ISED Warning

SCR engineers Ltd n'approuve aucune modification apportée à l'appareil par l'utilisateur, quelle qu'en soit la nature. Tout changement ou modification peuvent annuler le droit d'utilisation de l'appareil par l'utilisateur.

RF Exposure Warnings

RF Exposure - This device has been tested for compliance with FCC RF exposure limits in a portable configuration. This device must not be used with any other antenna or transmitter that has not been approved to operate in conjunction with this device.

Industry Canada Notice:

IC: 26436-AMUT05

- This Class B digital apparatus complies with Canadian ICES-003.
- Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

This device complies with Industry Canada ICES-003 licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Interference statement

This device complies with Part 15 of the FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Wireless notice

This device complies with FCC/ISED radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines and RSS-102 of the ISED radio frequency (RF) Exposure rules. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Le présent appareil est conforme à l'exposition aux radiations FCC / ISED définies pour un environnement non contrôlé et répond aux directives d'exposition de la fréquence de la FCC radiofréquence (RF) et RSS-102 de la fréquence radio (RF) ISED règles d'exposition. L'émetteur ne doit pas être colocalisé ni fonctionner conjointement avec à autre antenne ou autre émetteur.

Brasil:

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados

México

La operación de este equipo está sujeta a las siguientes dos condiciones:

- (1) Es posible que este equipo o dispositivo no cause interferencia perjudicial y
- (2) Este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada."

Warning

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

1 Global system specifications

All units are for outdoor use, required Radio regulations according to the target market & Low voltage 24VDC regulation - tag powered by an internal, 3VDC non-rechargeable battery.

1.1 System components

TAG – Activity-based tag with 2.4GHz transceiver.

BU-500 – LD Base unit, with an RS-485 network interface and 2.4GHz transceiver.

BU-500E – LD Base unit, with 10BASE-T/100BASE-TX Ethernet network interface and 2.4GHz transceiver.

SHC – SenseHub Controller – same communication protocol with TAGs as **BUxxx**

2 Monitoring Ear Tag Specifications

2.1 General description

Brand Name:- Allflex

Product Name:- **Monitoring Ear Tag**

Model Number: AMUT05

- Dairy/Beef cow ear tag
- Includes LED indicator (operation depends on system SW)
- Basic operational functionality:
 1. Identification of animals using 2.4GHz transceiver and/or HFC reader unit.
 2. Measure various animal parameters, processes and transmit them via 2.4 GHz link to the base unit (BU500/E or SHC).
 3. The tag transmits a message 4ms/Hour.
 4. Outdoor installation, sealed unit, powered from internal 3V battery.

2.4GHz Transceiver Parameters

RF Transceiver: Part of SOC SiLabs EFR32FG14P232F256GM32-B

RF Frequency: 2.405-2.48GHz

Modulation type: O QPSK DSSS

RF Channels: 5MHz separation 16ch

Occupied Bandwidth: 2.25MHz

Baud Rate: 250Kbps

Output power: 4dBm max

Antenna type: PCB Omni-directional

Antenna gain: Average -6.94dBi (Max gain: -1.69dBi)

Average RF data: TX - 2 msg of 4ms every 20min; Rx - 4 msg/hour of 1ms

Tag communication on a specific, predefined channel.

Channel can be changed via the management system


2.2 NFC Parameters

Utilizing **Passive** internal HFC High-Frequency inlay (IC and Antenna) complying with the following standards

- ISO/IEC 15693-2, -3
- ISO/IEC 18000-3 Compliant
- 13.56-MHz Operating Frequency

2.3 Mechanical dimensions

All dimensions in mm

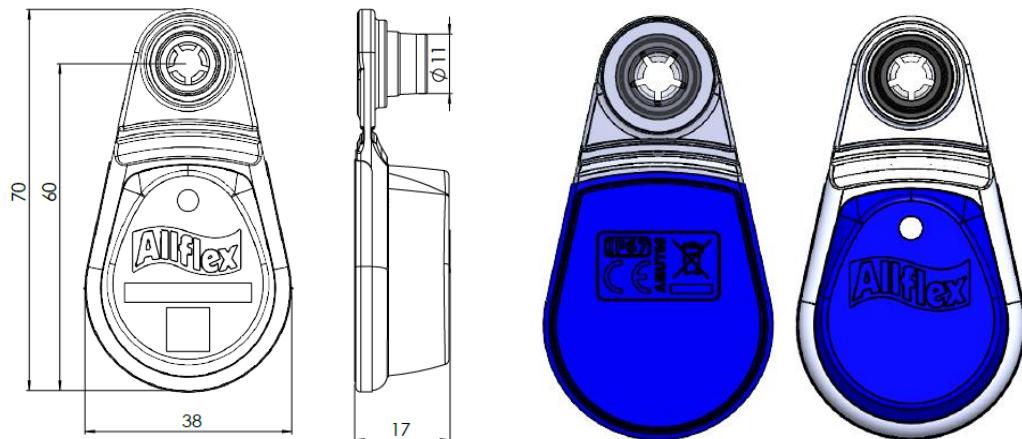

3 Environmental Conditions

1. **IP – required IP67.**

2. **Operational temperature** -33°C to 50°C.

4 Monitoring Ear Tag Installation instructions

It is important to correctly attach the tags to the cow's ear in a secure manner to avoid them from turning or falling off.

To securely attach the tag to the cow's ear:


1. Ensure that your tag assembly kit includes the following parts:
 - i. AMUT05 TAG
 - ii. Pins – optional MO5 1195 or similar as will be decided in future



- iii Applicator - Universal tagger



A properly mounted tag should look like this picture:

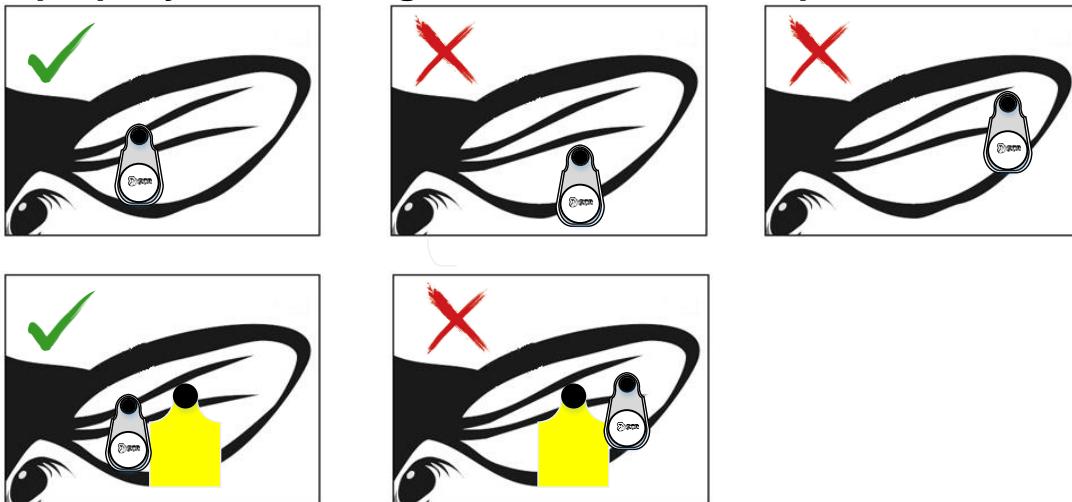

5 Product marking – Regulatory ID – e-Labeling

As the product is too small, regulatory IDs as required by e-labeling, operation system as below chart, on user guide and package.

On the product itself, only safety marking and model name.

eLabeling on the web management application

