
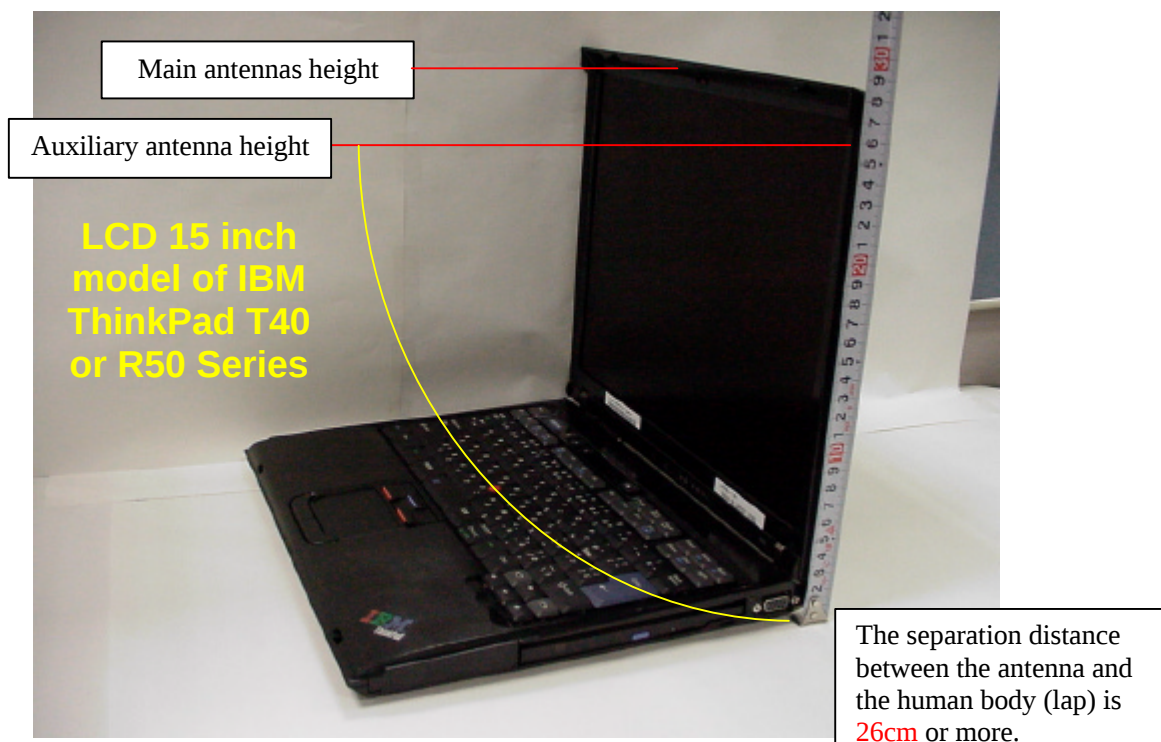


RF Exposure evaluation

1. RF Exposure evaluation for the applying LMA transmitter

As shown below, the all transmission antennas of both host PC devices (IBM ThinkPad R50 and T40 Series) are located at the upper portions of each display (LCD) section, and the separation distance between each antenna and the human body is 20cm or more. Therefore the applying LMA transmitter and each antenna system is categorized as a mobile device by FCC CFR 47 Section 2.1091.

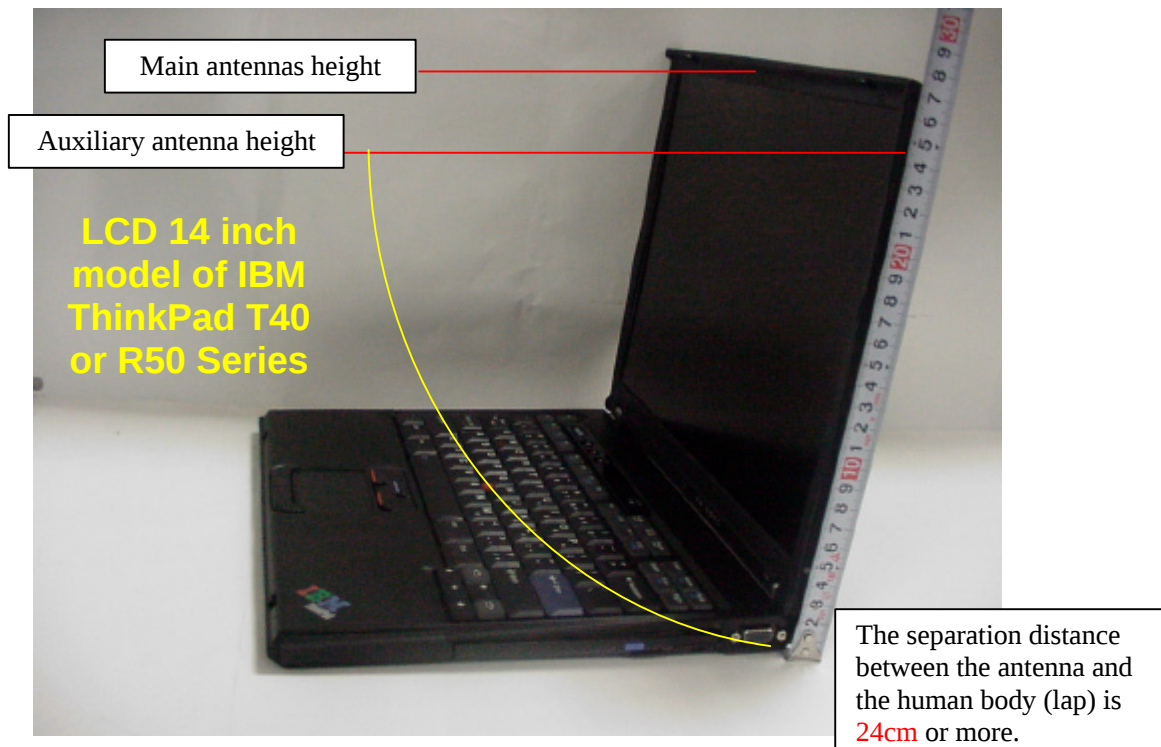

[MPE evaluation]

The following table shows the highest conducted peak output power values of the applying modular device, and the maximum peak antenna gains of each host device.

Transmission mode	P : conducted peak output power
2.4GHz band DSSS	22.08 dBm (161.4 mW)
2.4GHz band OFDM	21.31 dBm (135.2 mW)
5.8GHz band OFDM	24.22 dBm (264.2 mW)

Host PC model	G : peak antenna gain	
ThinkPad T40 Series	2.4GHz band	1.24 dBi (Main antenna)
	5.8GHz band	1.01 dBi (Main antenna)
ThinkPad R50 Series	2.4GHz band	1.84 dBi (Auxiliary antenna)
	5.8GHz band	1.78 dBi (Main antenna)

With those results, the maximum power density at 20cm distance is calculated as follows.

IBM ThinkPad T40 Series

Transmission mode	EIRP = P + G (dBm)	EIRP (mW)	Max. power density $S = \text{EIRP} / (4 \times 20^2 \times \pi)$
2.4GHz band DSSS	23.32	214.8	0.0428 mW/ cm ²
2.4GHz band OFDM	22.55	179.9	0.0358 mW/ cm ²
5.8GHz band OFDM	25.23	333.4	0.0664 mW/ cm ²

IBM ThinkPad R50 Series

Transmission mode	EIRP = P + G (dBm)	EIRP (mW)	Max. power density $S = \text{EIRP} / (4 \times 20^2 \times \pi)$
2.4GHz band DSSS	23.92	248.3	0.0494 mW/ cm ²
2.4GHz band OFDM	23.15	206.5	0.0411 mW/ cm ²
2.4GHz band OFDM	26.00	398.1	0.0792 mW/ cm ²

Since the applying modular transmitter device does not function to emit the radio frequency from both diversity antennas simultaneously, the above results are the maximum values of RF exposure to the persons, and are far below the MPE limit (1.0 mW/cm²). Therefore the LMA transmitter meets the MPE requirements for general Population/Uncontrolled exposure.


2. RF Exposure evaluation with co-located Bluetooth transmitters

Collocated Bluetooth options for ThinkPad R50 and T40 Series



The specific laptop PC, IBM ThinkPad R50 and T40 Series support the following Bluetooth device.

Option type	FCC ID	Grantee Name	Product Name	Granted Date	Power in Test Report
Built-in LMA Transmitter	ANO20020100MTN	IBM Japan, Ltd.	IBM integrated Bluetooth III with 56K Modem	Feb/26/2003 (T40 14")	2.5mW
				Sep/29/2003 (R50)	
				May/04/2004 (T40 15")	

Collocated Bluetooth options for ThinkPad R50 Series

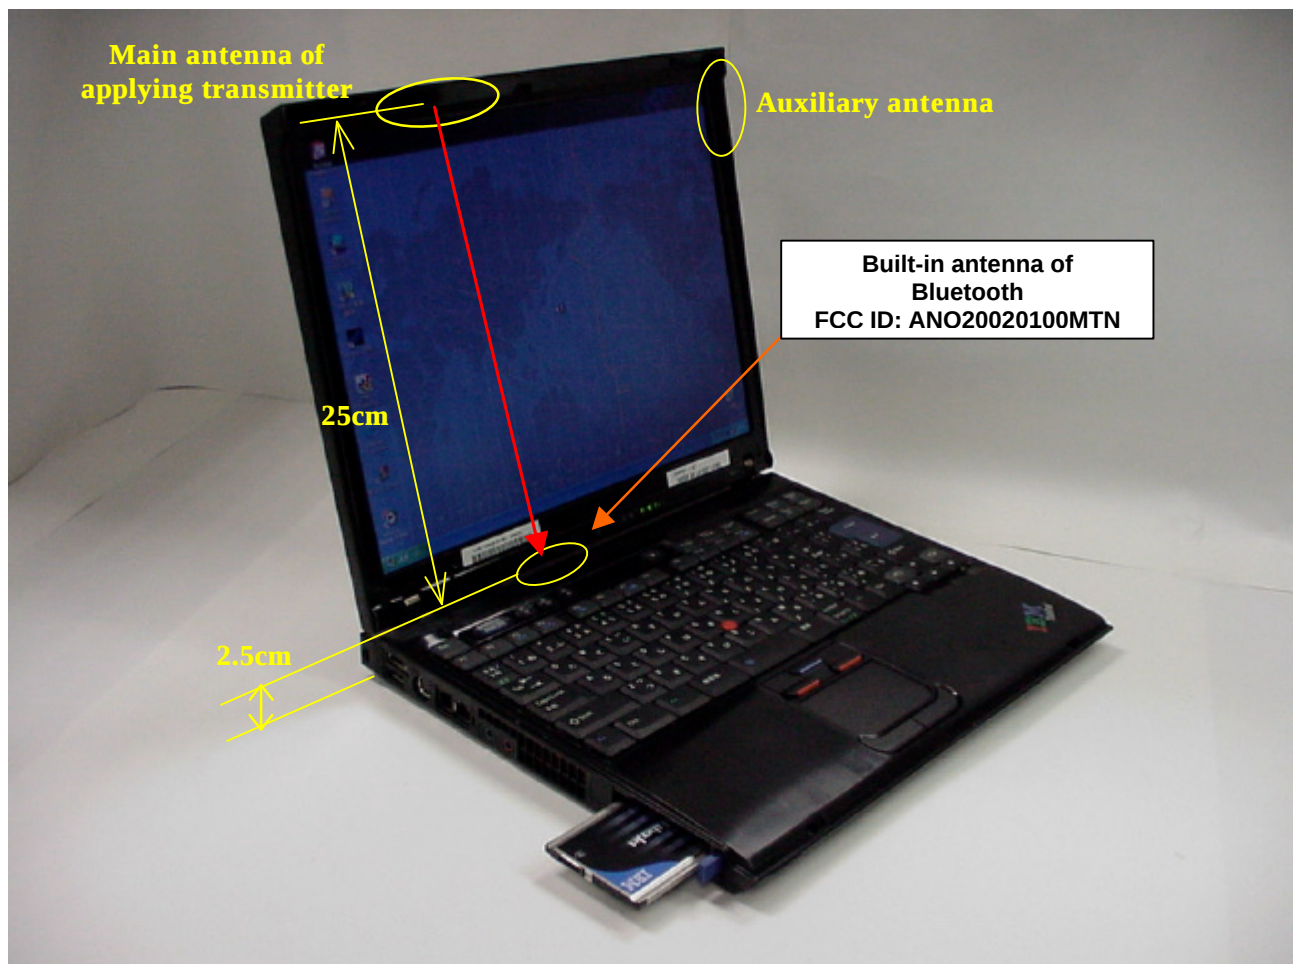

Collocated Bluetooth options for ThinkPad T40 Series

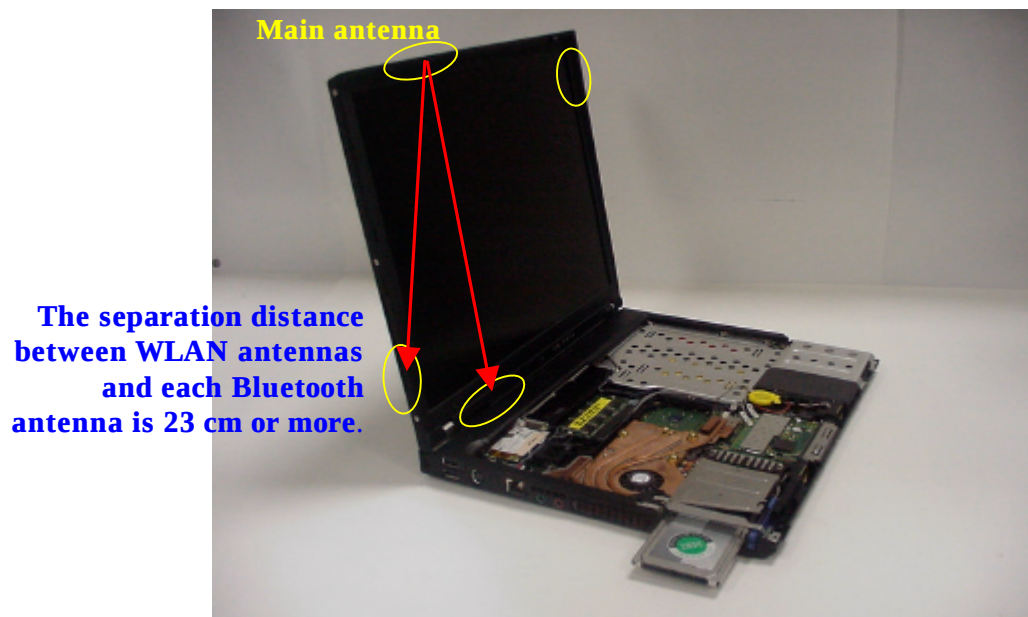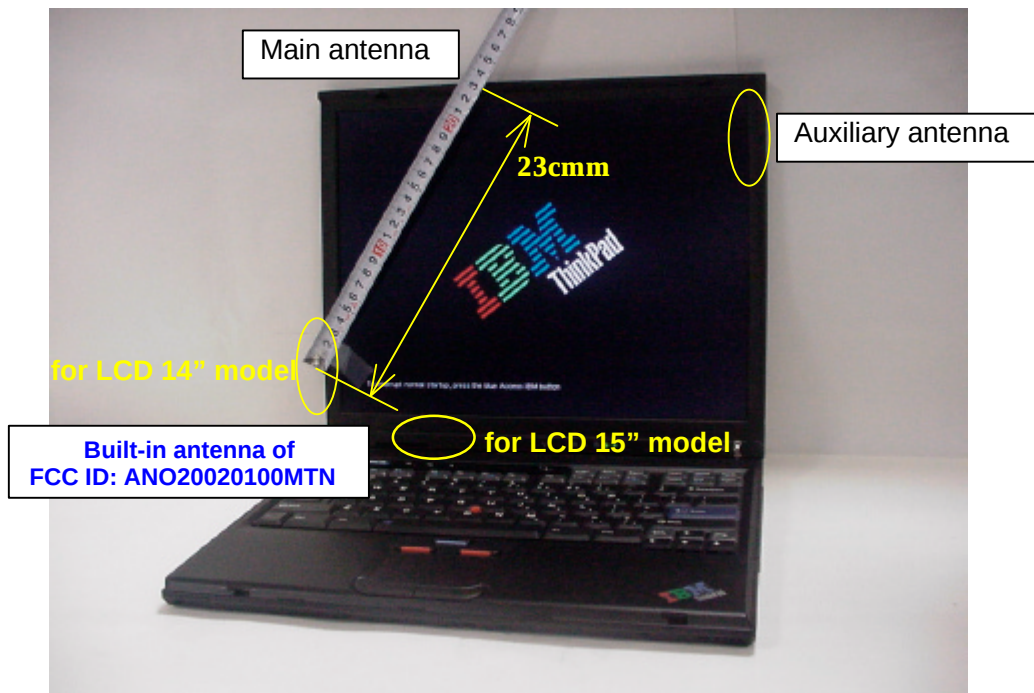

The main and auxiliary antennas located at LCD section of each host device (ThinkPad T40 Series, or R50 Series) are assembled apart from each Bluetooth antenna shown in the previous pages with 20 cm or more.

Therefore, those co-located Bluetooth transmitters are allowed to evaluate the RF exposure compliance independently of the applying modular transmitter. In other word, the SAR testing for the applying transmitter in co-locating with those Bluetooth transmitters is not required, when the Bluetooth transmitters could satisfy the RF exposure requirement with those own transmission powers.

When a customer operates the applying PC on one's lap, the sufficient separation distance (minimum 20cm) between the above Bluetooth antennas and the person's body (lap) can not be maintained.

But the footnote of the Section 3 in Supplement C to OET Bulletin 65 states :

“¹⁴ If a device, its antenna or other radiating structures are operating at closer than 2.5 cm from a person's body or in contact with the body, SAR evaluation may be necessary when the output is more than 50 – 100 mW, depending on the device operating configurations and exposure conditions.”

The total output power of the two Bluetooth transmitters in the previous table does not exceed 5mW (far below 50mW). Therefore these transmitters also satisfy the RF exposure requirement regarding CFR 47 Part 15.247(b)(4) without a SAR compliance test report, and can operate with the applying transmitter simultaneously.

IBM Web site provides customers the grant conditions for the co-locating use and approved co-located Bluetooth devices. See the next page.

3. IBM Web site

Note) The info for the applying LMA transmitter is not available until the product announcement.

<http://www.pc.ibm.com/qtechinfo/MIGR-53286.html>



[Home](#) | [Products & services](#) | [Support & downloads](#) | [My account](#)

[Select a language](#)
[PC support home](#)
[Login](#)
[Profile](#)
[My page](#)
[Ask an expert](#)
[Help](#)

PC support home

Warranty lookup

Related links:

- Support phone list
- Business Partner support
- IBM PC Institute
- IBM Publications Center
- Find a Business Partner
- IBM Supports
- Microsoft Service Packs

TP Wireless Systems – Approved wireless Mini PCI options and additional RF option devices receive FCC certification

Applicable countries/regions

United States

Service hints & tips

Affected configurations

Additional RF Option devices receive FCC certification for use on:

LMA (Limited Modular Approval) adapters	FCC IDs	Approved ThinkPad models	PC options allowed multiple transmission		
			#1	#2	#3
Intel Pro/Wireless 2915ABG Mini-PCI Adapter	ANO20040601CX2	R50 Series	O	NG	NG
		T40 Series	O	NG	NG
		G40 Series	NG	NG	NG
		R50 Series	O	NG	O
IBM 11a/b/g Wireless LAN Mini PCI Adapter II	ANO20040600BTL	T40 Series	O	NG	O
		X30 Series (X31)	O	O	O
		X40 Series	O	NG	NG
		R50 Series	O	NG	O
IBM 11b/g Wireless LAN Mini PCI Adapter	ANO20030500CMR	T40 Series	O	NG	O
		X30 Series (X31)	O	O	O
		X40 Series	O	NG	NG
		R50 Series	O	NG	O
Intel PRO/Wireless 2200BG Mini-PCI Adapter	ANO20040501CX2	T40 Series	O	NG	O
		X30 Series (X31)	O	O	O
		X40 Series	O	NG	NG
		R50 Series	O	NG	O

NOTES:

View [ThinkPad Wireless Systems I – Approved wireless Mini PCI options and additional RF option devices receive FCC certification](#)

NG: Not authorized to use by the FCC rule, or not recognized by BIOS.

#1: FCC ID: ANO20020100MTN ; [IBM Integrated Bluetooth III with 56K Modem](#)

#2: FCC ID: PI4BT-ULTRA ; [Bluetooth UltraPort Module from IBM](#)

#3: FCC ID: PI4BT-IBM-PCII ; [Bluetooth PC Card II](#)

Solution

The supplementary document of ThinkPad's "Service and Troubleshooting Guide" has the following information in "Wireless regulatory information – USA Federal Communications Commission (FCC)" section:

Use of wireless options

Please make sure of the following conditions on use of wireless features.

- Visit the IBM site at www.ibm.com/pc/qtechinfo/MIGR-53286.html and confirm the updated list of RF option devices that have been approved to cooperate with the integrated wireless feature.
- When you use any other RF option device that is not listed on the IBM site, all other wireless features including the integrated transmitter in your ThinkPad computer are required to be turned off.
- Users are requested to follow the RF Safety instructions on wireless option devices that are included in the RF option device's user's manual.

Document id: MIGR-53286
Last modified: 2004-xx-xx
Copyright (C) 2003 IBM Corporation