



FCC AND ISED CERTIFICATION TEST REPORT

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Multi-Channel Soundbar with wireless subwoofer
Model No.	:	BAR 1300XMK2
FCC ID	:	APIBAR1300MK2
IC	:	6132A-BAR1300MK2
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE24111520-1E03
Issue Date	:	2025/03/14
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions.....	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	6dB Bandwidth.....	13
4.1.	Block diagram of test setup	13
4.2.	Limits.....	13
4.3.	Test procedure.....	13
4.4.	Test result	14
4.5.	Test graphs	15
5.	99% Bandwidth	27
5.1.	Block diagram of test setup	27
5.2.	Limits.....	27
5.3.	Test procedure.....	27
5.4.	Test result	28
5.5.	Test graphs	29
6.	Conducted Output Power	41
6.1.	Block diagram of test setup	41
6.2.	Limits.....	41
6.3.	Test procedure.....	41
6.4.	Test result average	42
7.	Power Spectral Density	45
7.1.	Block diagram of test setup	45
7.2.	Limits.....	45
7.3.	Test procedure.....	45
7.4.	Test result	46
7.5.	Test graphs	49
8.	Band Edge Compliance (Conducted Method).....	81
8.1.	Block diagram of test setup	81

8.2.	Limits.....	81
8.3.	Test procedure.....	81
8.4.	Test result	82
8.5.	Test graphs.....	83
9.	RF Conducted Spurious Emissions.....	91
9.1.	Block diagram of test setup	91
9.2.	Limits.....	91
9.3.	Test procedure.....	91
9.4.	Test result	92
9.5.	Test graphs.....	93
10.	Duty Cycle.....	129
10.1.	Block diagram of test setup	129
10.2.	Limit.....	129
10.3.	Test procedure.....	129
10.4.	Test result	130
10.5.	Test graphs.....	132
11.	Antenna Requirements	164
11.1.	Limit.....	164
11.2.	Result.....	164
12.	Radiated Emission.....	165
12.1.	Test equipment	165
12.2.	Block diagram of test setup	166
12.3.	Limits.....	167
12.4.	Assistant equipment used for test	169
12.5.	Test procedure.....	169
12.6.	Test result	170
12.7.	Test data	171
13.	Band Edge Compliance	179
13.1.	Test equipment	179
13.2.	Block diagram of test setup	180
13.3.	Limits.....	180
13.4.	Assistant equipment used for test	180
13.5.	Test procedure.....	180
13.6.	Test result	180
13.7.	Test data	181
14.	Power Line Conducted Emissions.....	217
14.1.	Test equipment	217
14.2.	Block diagram of test setup	217

14.3. Limits..... 217

14.4. Assistant equipment used for test 217

14.5. Test procedure..... 217

14.6. Test result 218

14.7. Test data 219

15. Test Setup Photograph..... 221

16. Photos of the EUT 223

Test Report Declare

Applicant	:	Harman International Industries, Inc.
Address of Applicant	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES
Equipment under Test	:	Multi-Channel Soundbar with wireless subwoofer
Model No.	:	BAR 1300XMK2
Manufacturer	:	Harman International Industries, Inc.
Address of Manufacturer	:	8500 Balboa Boulevard, Northridge, CA 91329, UNITED STATES

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE24111520-1E03		
Date of Receipt:	2024/11/26	Date of Test:	2024/11/26 - 2025/03/14

Created: Bobo Chen	Reviewed: Ella Gong	Approved: Damon Hu
		
2025/03/14	2025/03/14	2025/03/14

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2025/03/14	

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2), RSS-247 Issue 3 clause 5.2(a), RSS-Gen Issue 5 clause 6.7	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3), RSS-247 Issue 3 clause 5.4(d)	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e), RSS-247 Issue 3 clause 5.2(b)	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
7	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
8	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	: Multi-Channel Soundbar with wireless subwoofer
Model Number	: BAR 1300XMK2
EUT Function Description	: Please reference user manual of this device
Power Supply	: AC 100-240V, 50/60Hz, 160W

Note: This EUT support Bluetooth BR/EDR/LE, 2.4 GHz WLAN, 5 GHz WLAN, 5 GHz Wireless, this report only for 2.4 GHz WLAN.

Radio Technology	: IEEE 802.11b/g/n/ax
Operation frequency	: IEEE 802.11b: 2412MHz to 2462MHz IEEE 802.11g: 2412MHz to 2462MHz IEEE 802.11n HT20: 2412MHz to 2462MHz IEEE 802.11n HT40: 2422MHz to 2452MHz IEEE 802.11ax HE20: 2412MHz to 2462MHz IEEE 802.11ax HE40: 2422MHz to 2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna information			
Antenna Type		FPC	
/		Ant1 gain	Ant2 gain
Max Antenna Gain(dBi)	IEEE 802.11b	2.31	2.39
	IEEE 802.11g	2.31	2.39
	IEEE 802.11n HT20	2.31	2.39
	IEEE 802.11n HT40	2.31	2.39
	IEEE 802.11ax HE20	2.31	2.39
	IEEE 802.11ax HE40	2.31	2.39
Note: This product does not support beamforming.			

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
AC cable	Harman	N/A	Length: 150cm
HDMI cable	Harman	N/A	Length: 120cm, with two magnetic rings
Remote control	Harman	N/A	N/A

2.3. Block diagram of EUT configuration for test

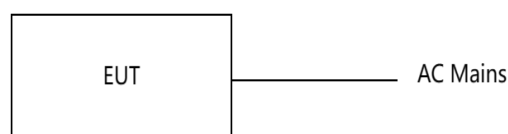

2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: adb.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency					
Tested mode	Tx Power Setting		Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
	ANT1	ANT2			
IEEE 802.11b	16	16	1	LCH: CH1	2412
	16	16	1	MCH: CH6	2437
	16	16	1	HCH: CH11	2462
IEEE 802.11g	16	16	6	LCH: CH1	2412
	16	16	6	MCH: CH6	2437
	16	16	6	HCH: CH11	2462
IEEE 802.11n HT20	12	12	MCS 8	LCH: CH1	2412
	12	12	MCS 8	MCH: CH6	2437
	12	12	MCS 8	HCH: CH11	2462
IEEE 802.11n HT40	12	12	MCS 8	LCH: CH3	2422
	12	12	MCS 8	MCH: CH6	2437
	12	12	MCS 8	HCH: CH9	2452
IEEE 802.11ax HE20	SU: 12 RU: 12	SU: 12 RU: 12	MCS 0	LCH: CH1	2412

IEEE 802.11ax HE40	SU: 12 RU: 12	SU: 12 RU: 12	MCS 0	MCH: CH6	2437
	SU: 12 RU: 12	SU: 12 RU: 12	MCS 0	HCH: CH11	2462
	SU: 12 RU: 12	SU: 12 RU: 12	MCS 0	LCH: CH3	2422
	SU: 12 RU: 12	SU: 12 RU: 12	MCS 0	MCH: CH6	2437
	SU: 12 RU: 12	SU: 12 RU: 12	MCS 0	HCH: CH9	2452
	SU: 12 RU: 12	SU: 12 RU: 12	MCS 0		
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.					

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2025/03/31
Wideband Radio Communication Tester	R&S	CMW500	120259	2025/07/08
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2025/03/31
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2025/03/31
RF Control Unit	Tonsend	JS0806-2	158060010	2025/03/31
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2025/04/22
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

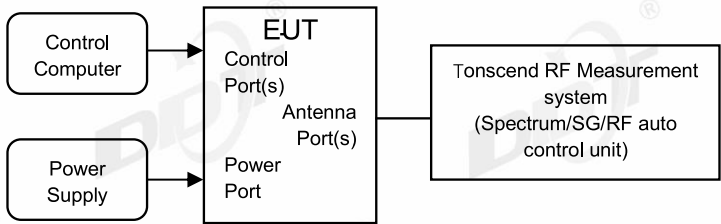

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.4℃,36.6%RH	Test Date:	2024.12.03-2025.03.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24111520-011


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.04	2407.96	2416.00	0.5	PASS
	Ant2	2412	8.04	2407.96	2416.00	0.5	PASS
	Ant1	2437	8.08	2432.92	2441.00	0.5	PASS
	Ant2	2437	8.04	2432.96	2441.00	0.5	PASS
	Ant1	2462	8.08	2457.92	2466.00	0.5	PASS
	Ant2	2462	8.04	2457.96	2466.00	0.5	PASS
11G	Ant1	2412	15.16	2404.40	2419.56	0.5	PASS
	Ant2	2412	15.08	2404.48	2419.56	0.5	PASS
	Ant1	2437	15.48	2429.08	2444.56	0.5	PASS
	Ant2	2437	15.48	2429.08	2444.56	0.5	PASS
	Ant1	2462	15.44	2454.08	2469.52	0.5	PASS
	Ant2	2462	15.48	2454.08	2469.56	0.5	PASS
11N20MIMO	Ant1	2412	15.12	2404.40	2419.52	0.5	PASS
	Ant2	2412	15.12	2404.40	2419.52	0.5	PASS
	Ant1	2437	15.16	2429.40	2444.56	0.5	PASS
	Ant2	2437	16.32	2428.80	2445.12	0.5	PASS
	Ant1	2462	15.68	2453.84	2469.52	0.5	PASS
	Ant2	2462	16.68	2453.44	2470.12	0.5	PASS
11N40MIMO	Ant1	2422	35.12	2404.40	2439.52	0.5	PASS
	Ant2	2422	35.12	2404.40	2439.52	0.5	PASS
	Ant1	2437	35.12	2419.40	2454.52	0.5	PASS
	Ant2	2437	35.12	2419.40	2454.52	0.5	PASS
	Ant1	2452	35.12	2434.40	2469.52	0.5	PASS
	Ant2	2452	35.12	2434.40	2469.52	0.5	PASS
11AX20MIMO	Ant1	2412	17.96	2402.96	2420.92	0.5	PASS
	Ant2	2412	17.56	2403.40	2420.96	0.5	PASS
	Ant1	2437	18.12	2427.64	2445.76	0.5	PASS
	Ant2	2437	18.64	2427.60	2446.24	0.5	PASS
	Ant1	2462	18.56	2452.68	2471.24	0.5	PASS
	Ant2	2462	18.12	2452.60	2470.72	0.5	PASS
11AX40MIMO	Ant1	2422	37.28	2403.28	2440.56	0.5	PASS
	Ant2	2422	35.92	2404.40	2440.32	0.5	PASS
	Ant1	2437	37.20	2418.28	2455.48	0.5	PASS
	Ant2	2437	36.40	2418.92	2455.32	0.5	PASS
	Ant1	2452	36.40	2433.28	2469.68	0.5	PASS
	Ant2	2452	36.16	2434.40	2470.56	0.5	PASS

4.5. Test graphs

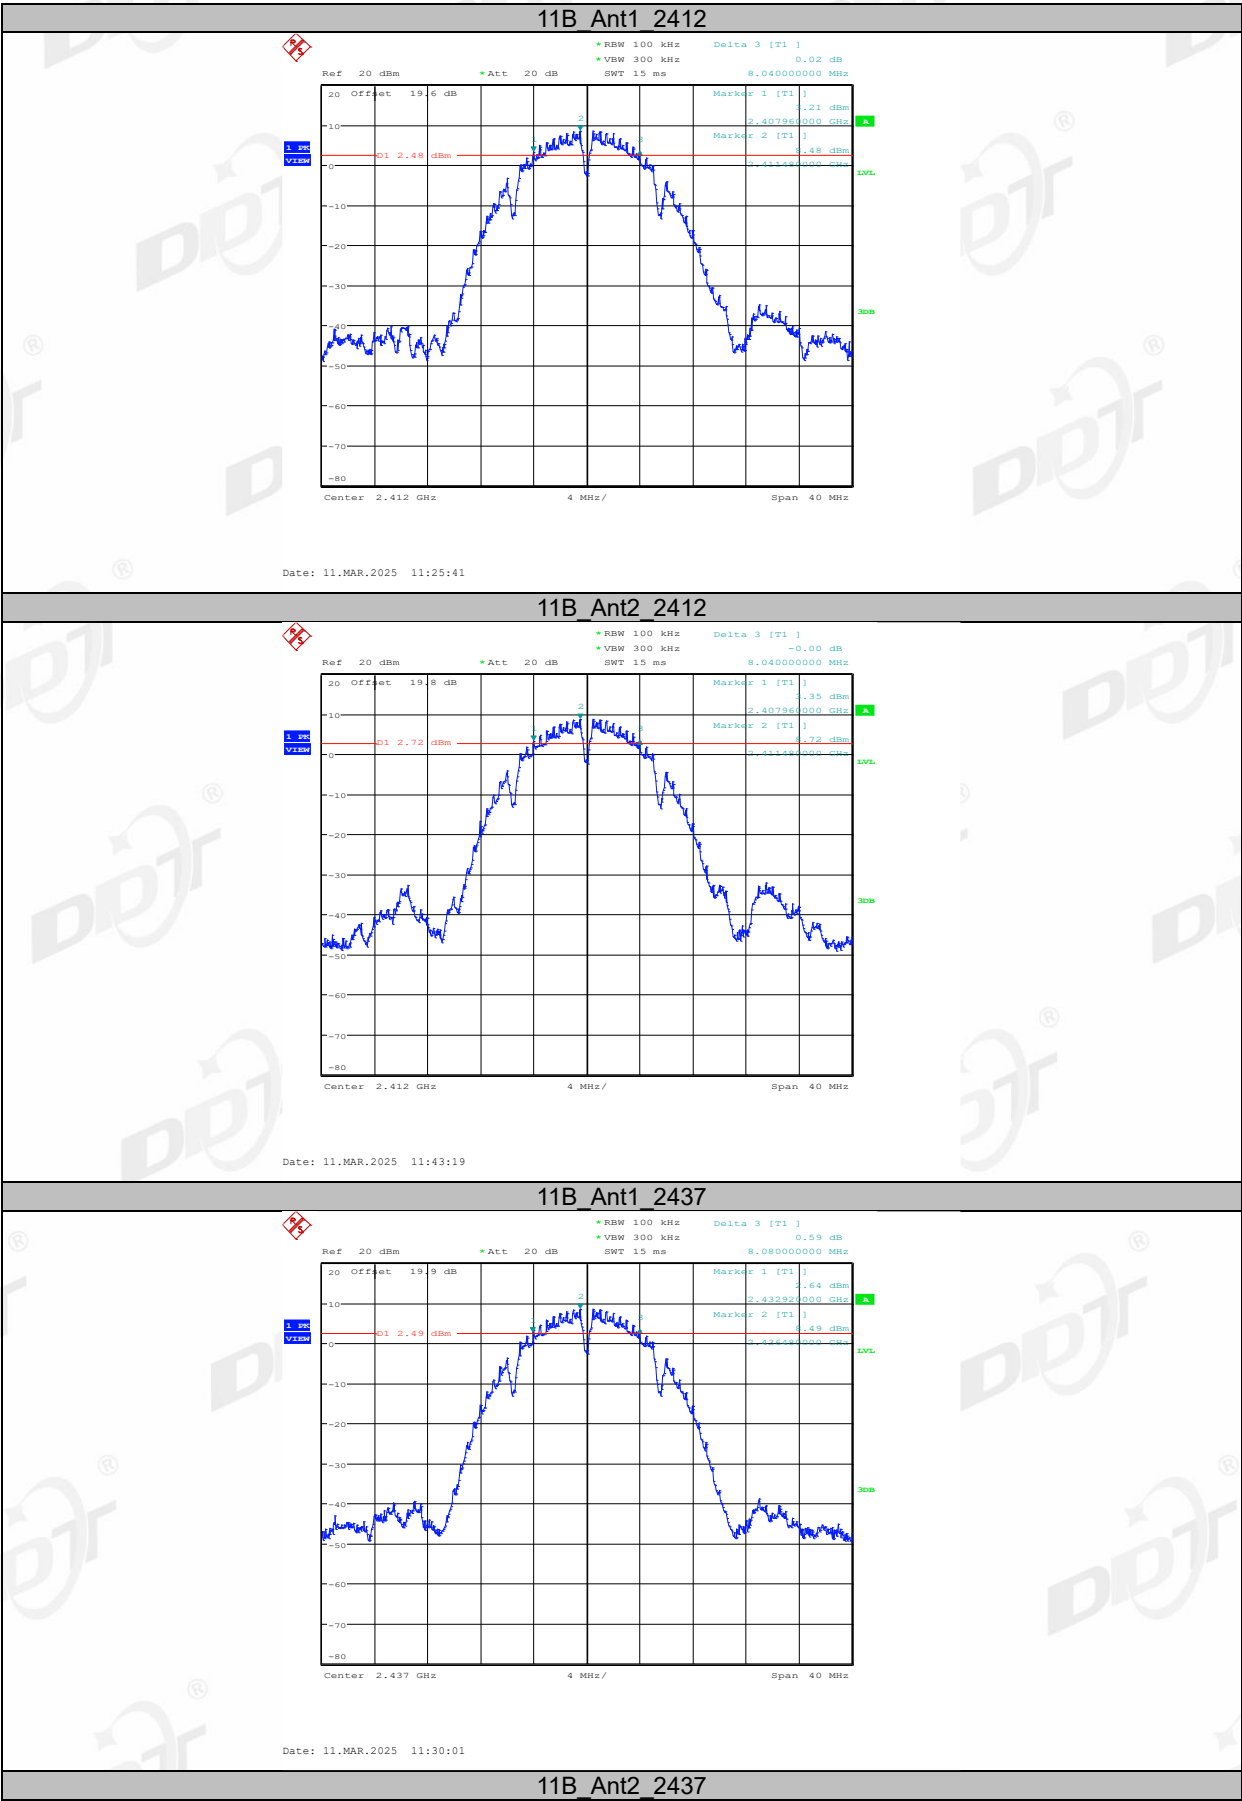


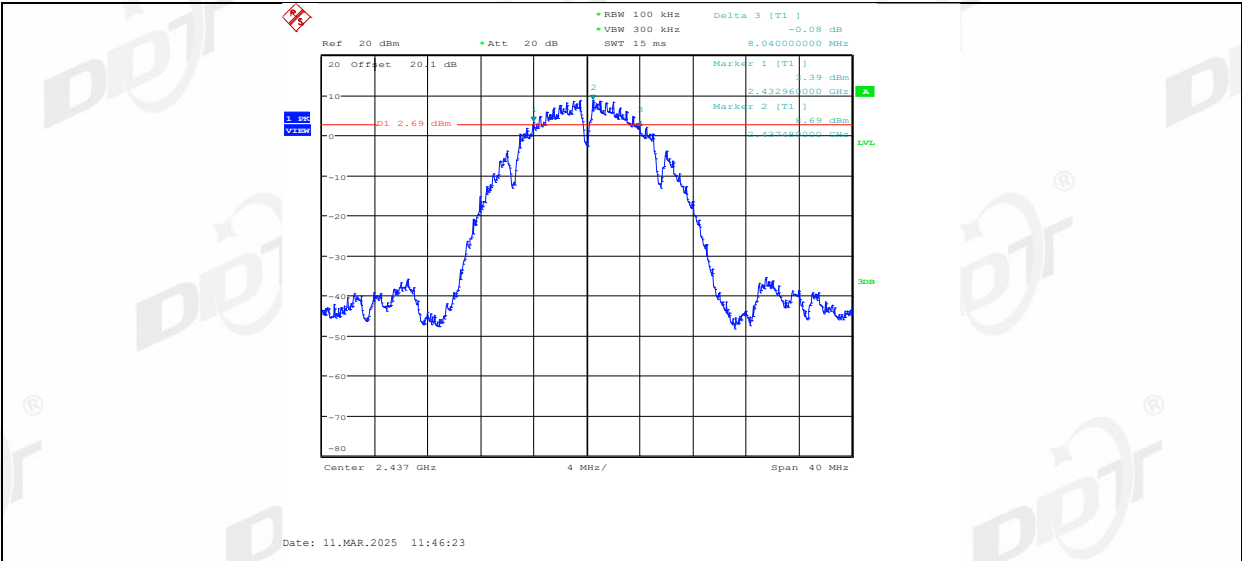


11B_Ant1_2462

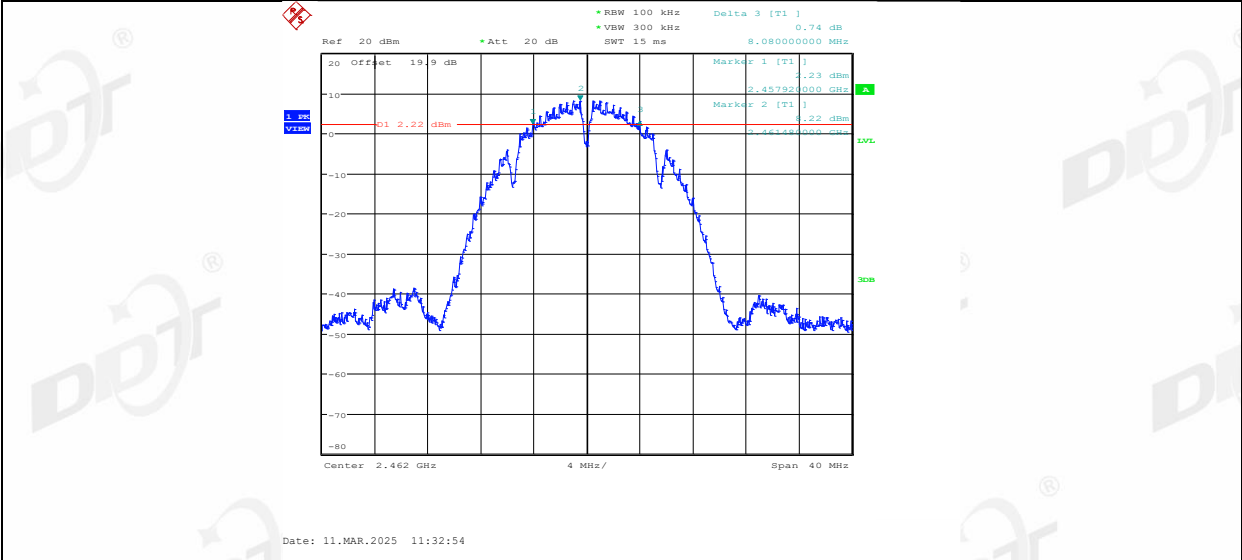


11B_Ant2_2462

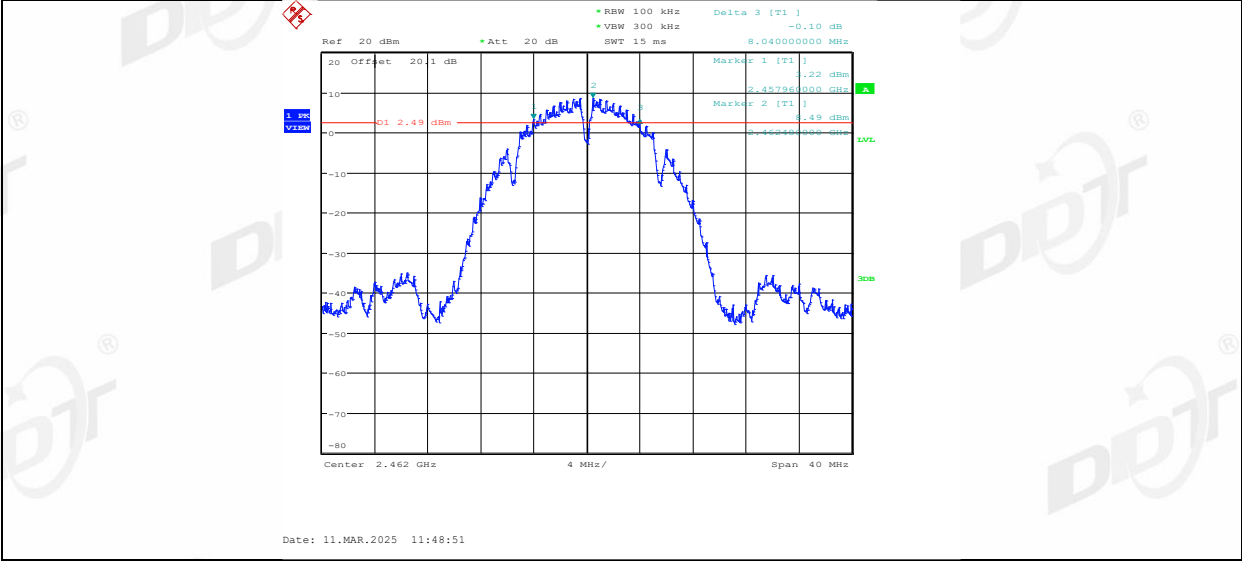


11G_Ant1_2412

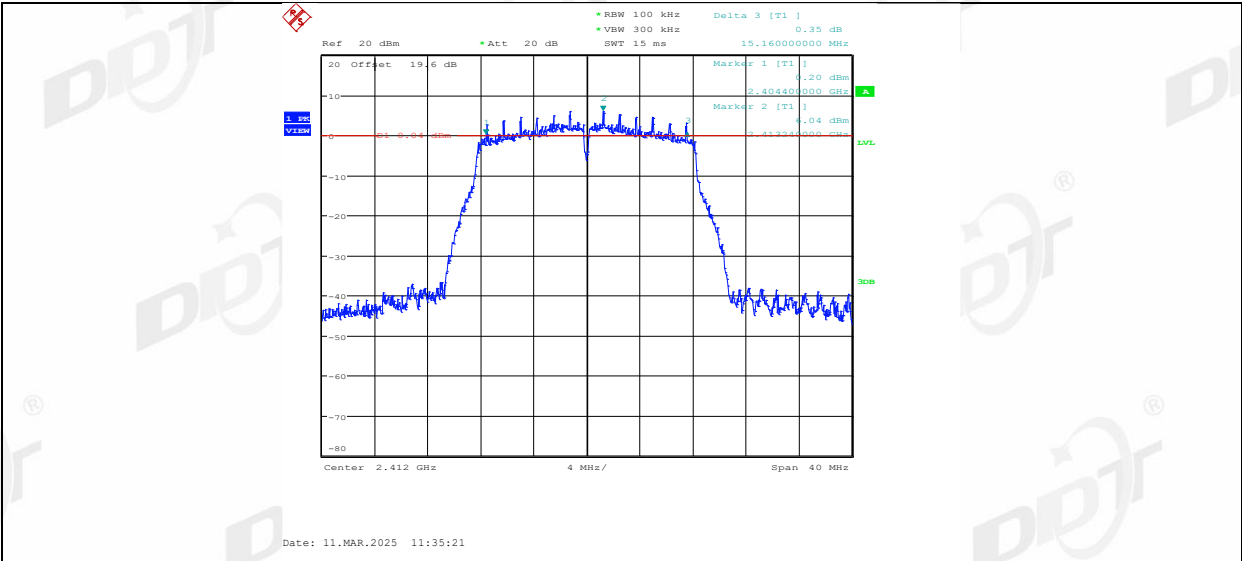


11G_Ant2_2412

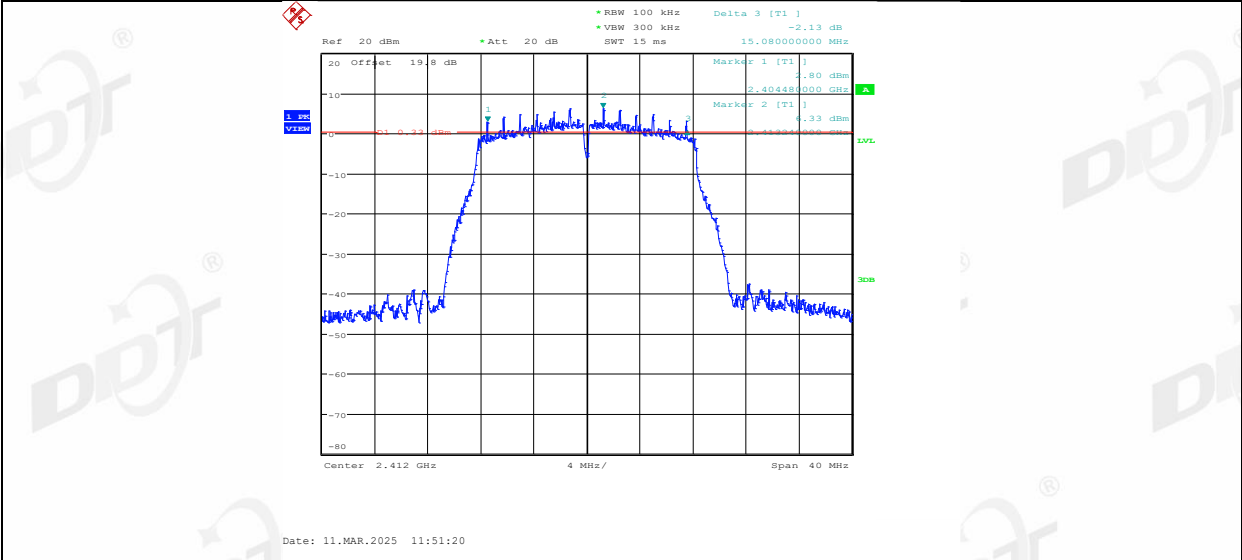


11G_Ant1_2437

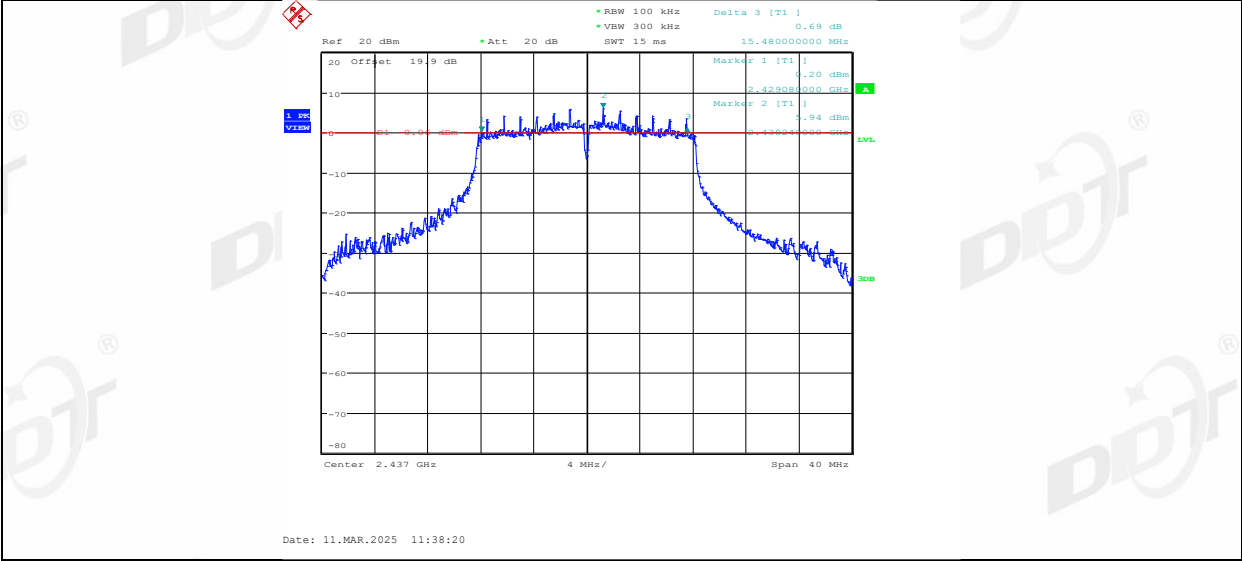


11G_Ant2_2437

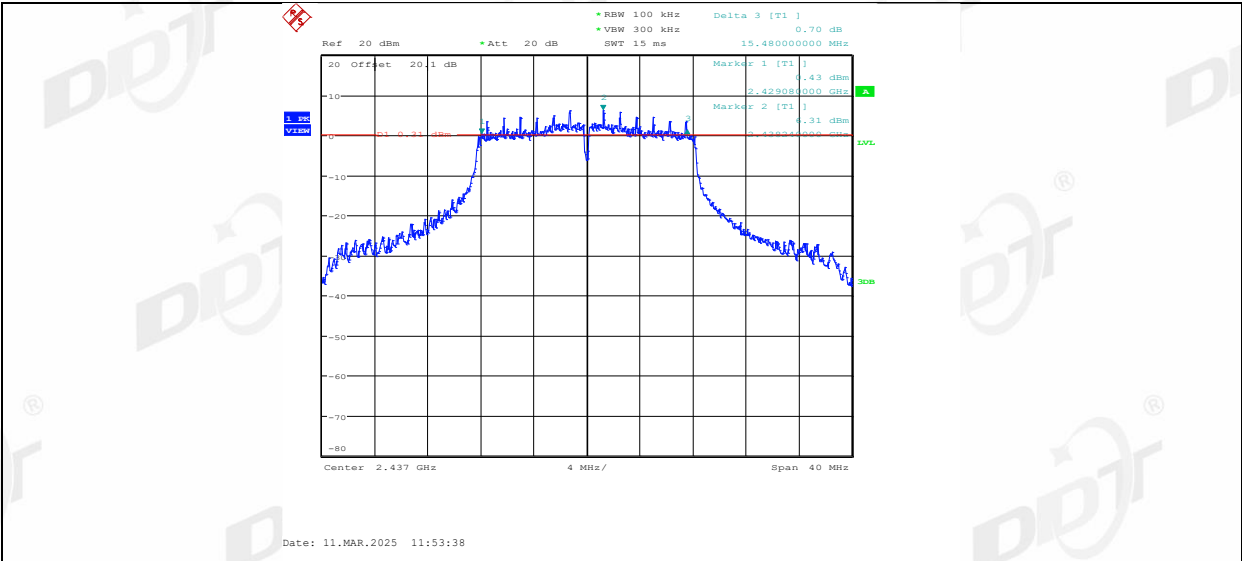


11G_Ant1_2462

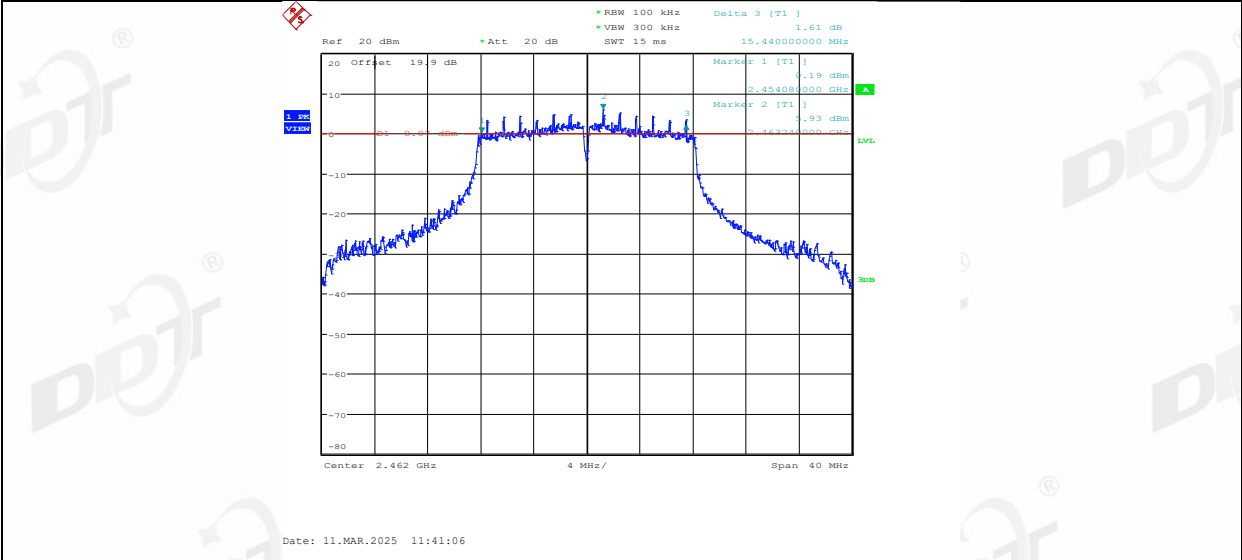


11G_Ant2_2462

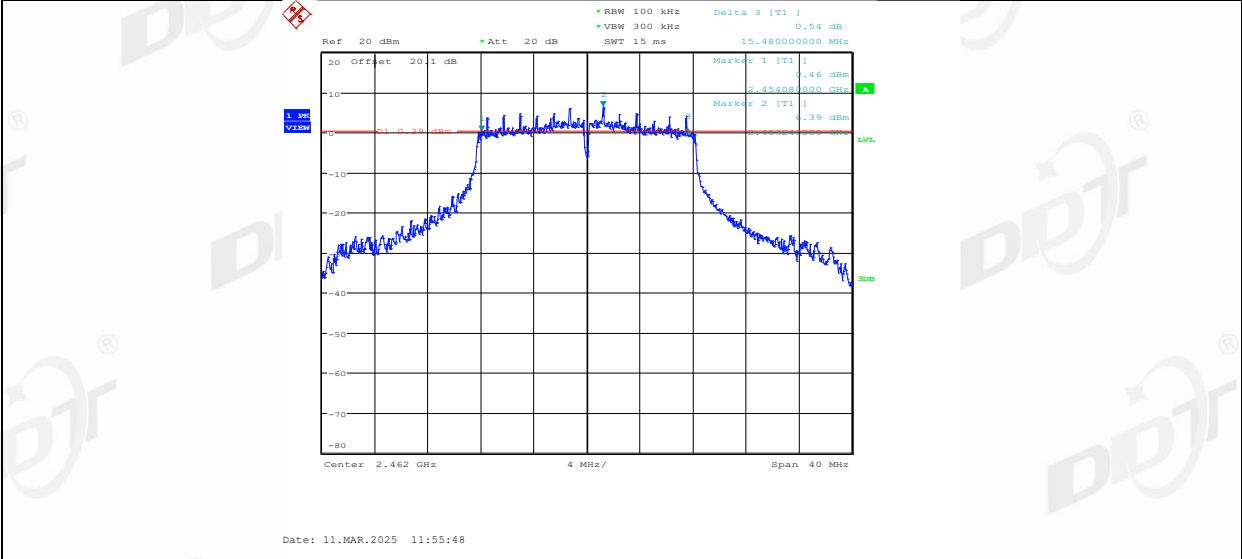


11N20MIMO_Ant1_2412

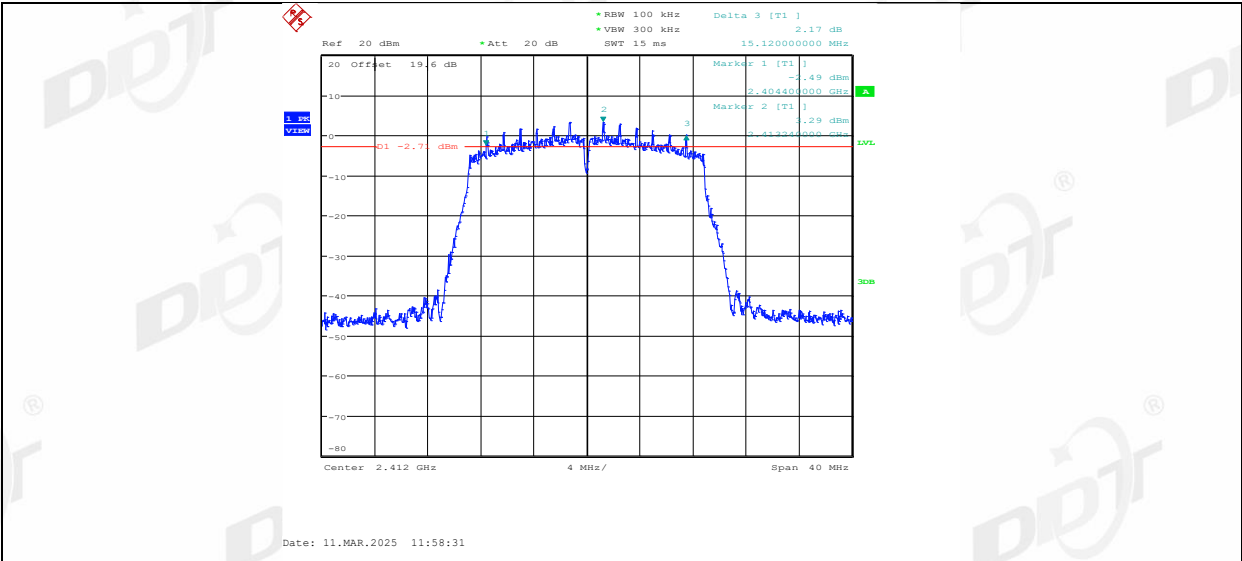


11N20MIMO_Ant2_2412

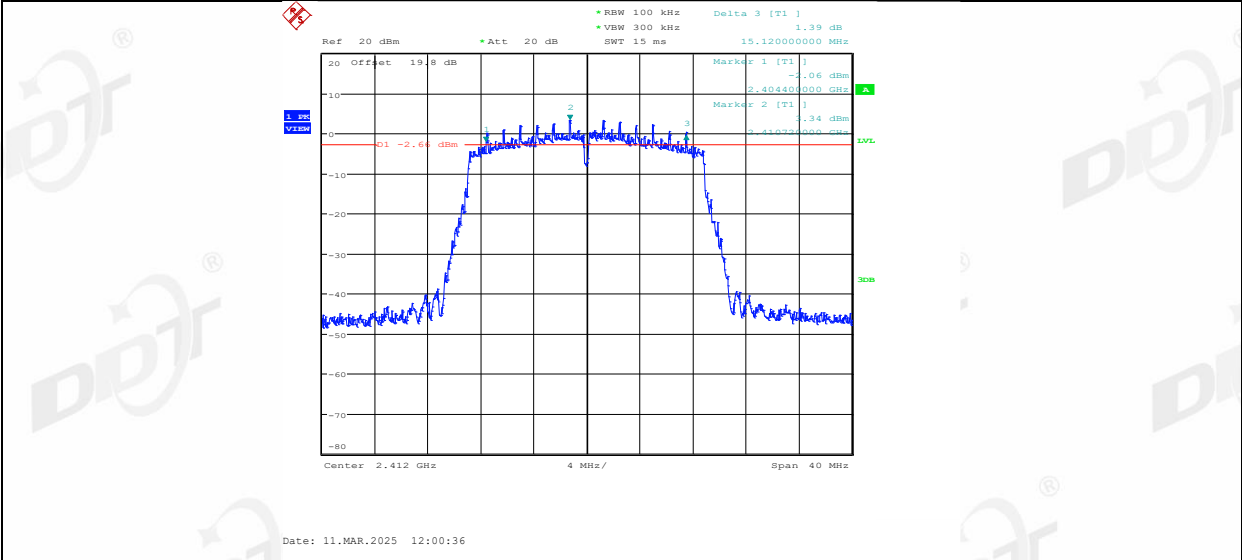


11N20MIMO_Ant1_2437

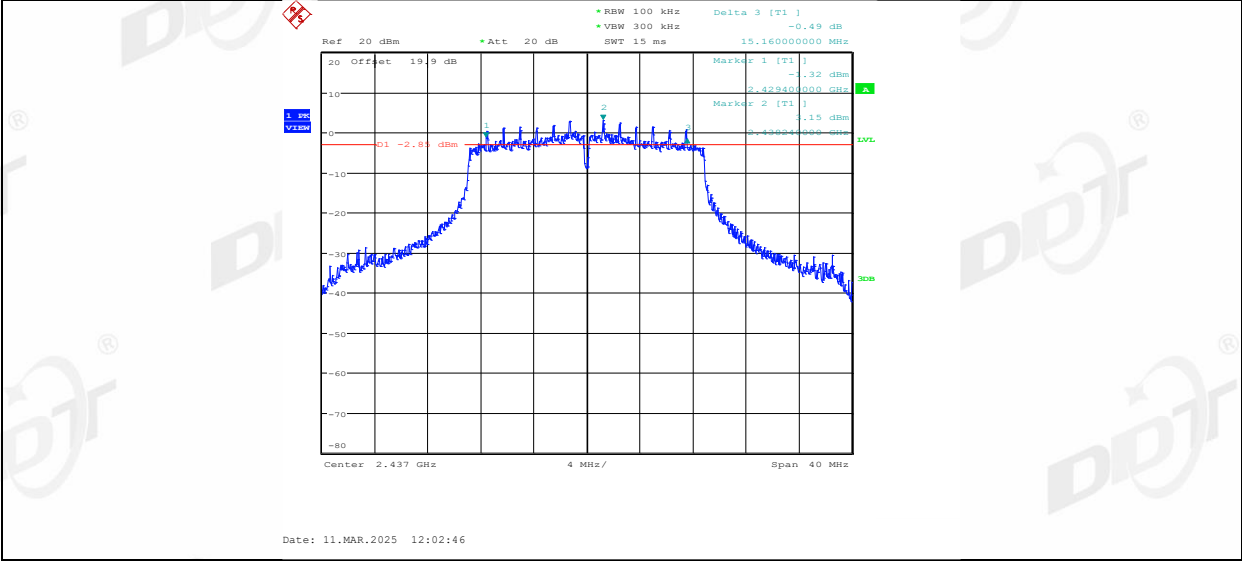


11N20MIMO_Ant2_2437

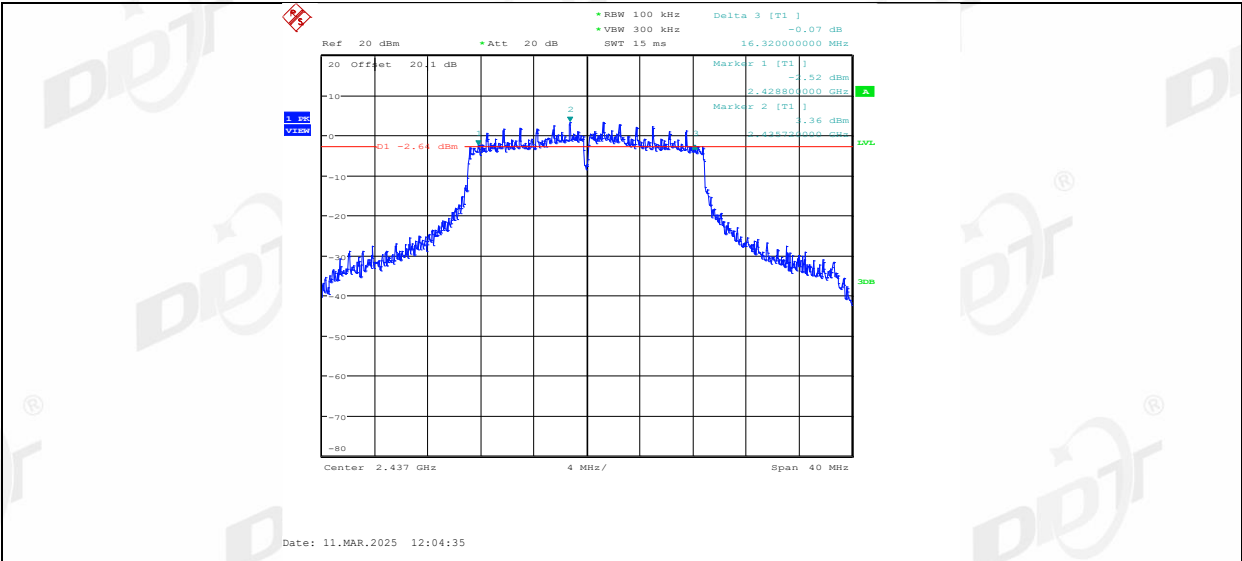


11N20MIMO_Ant1_2462

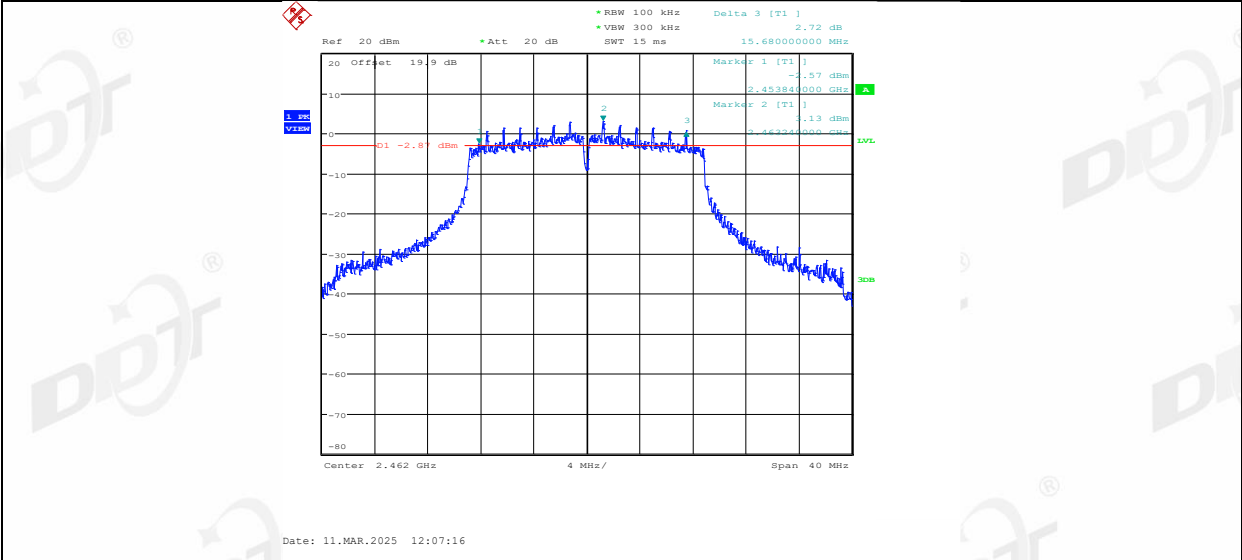


11N20MIMO_Ant2_2462

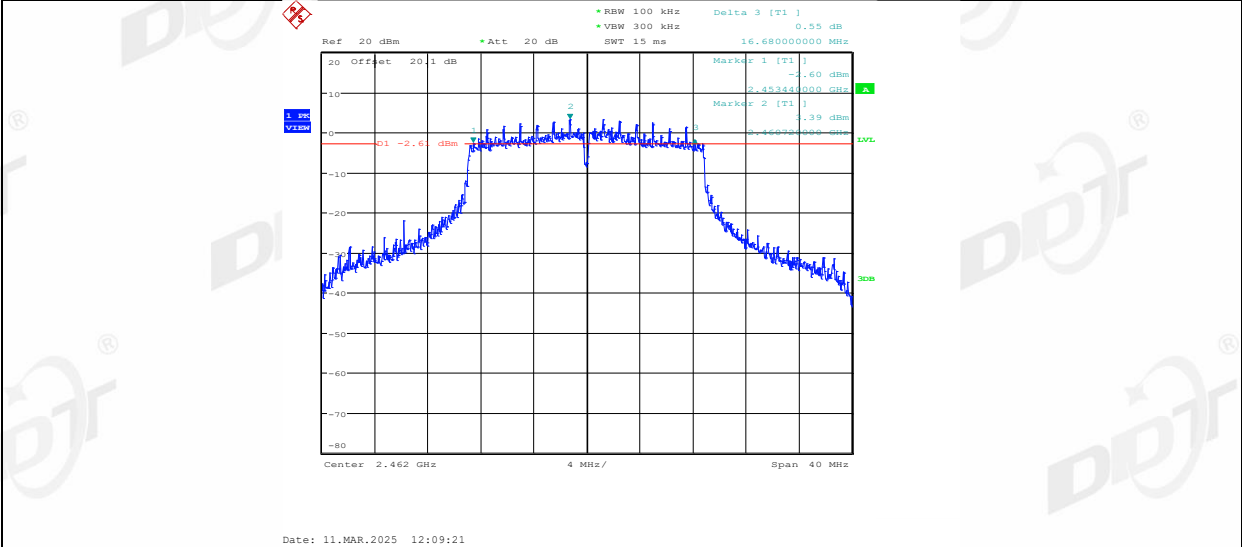


11N40MIMO_Ant1_2422

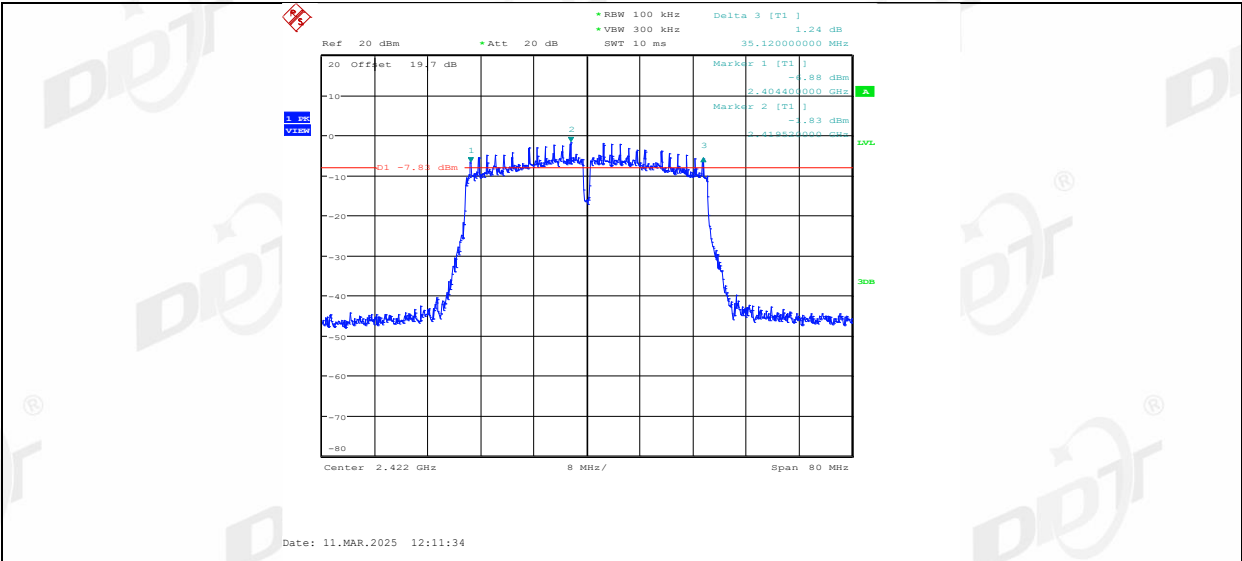


11N40MIMO_Ant2_2422

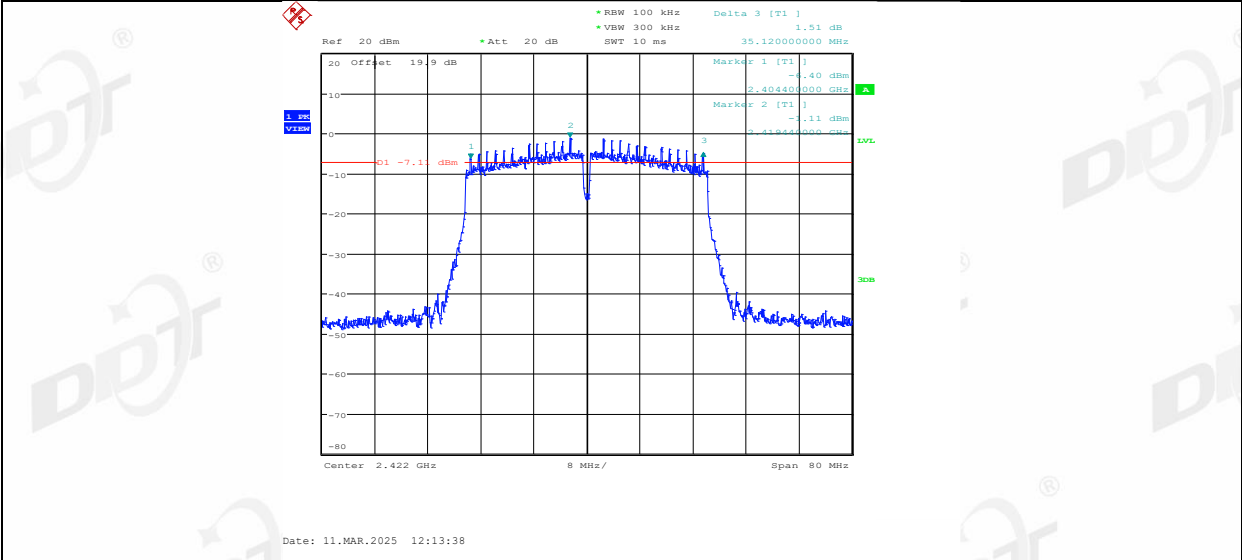


11N40MIMO_Ant1_2437

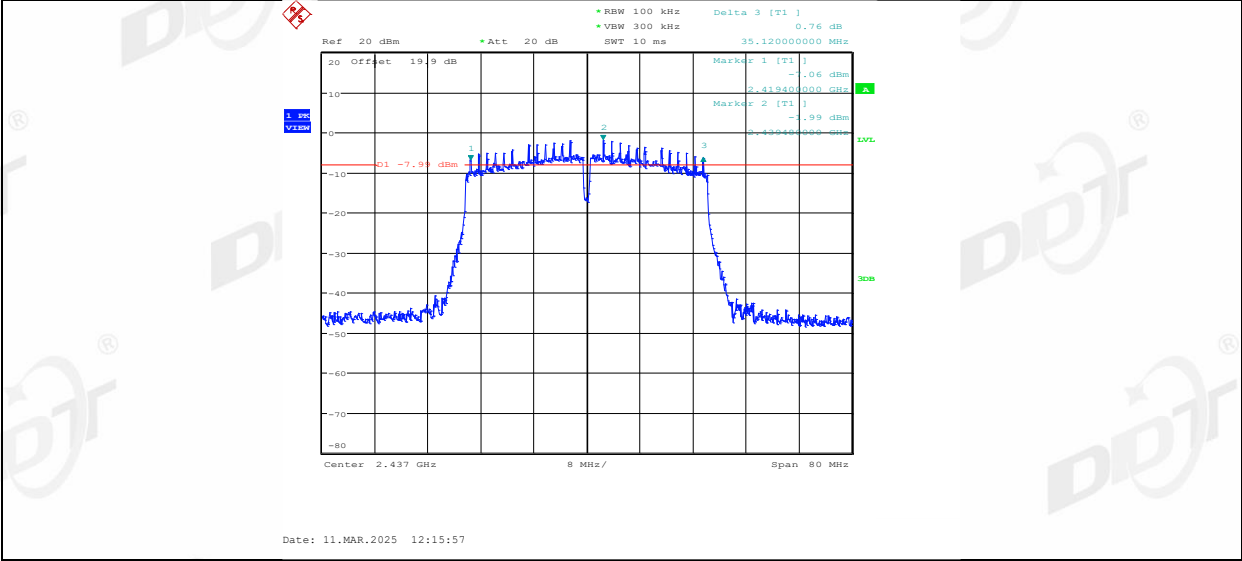


11N40MIMO_Ant2_2437

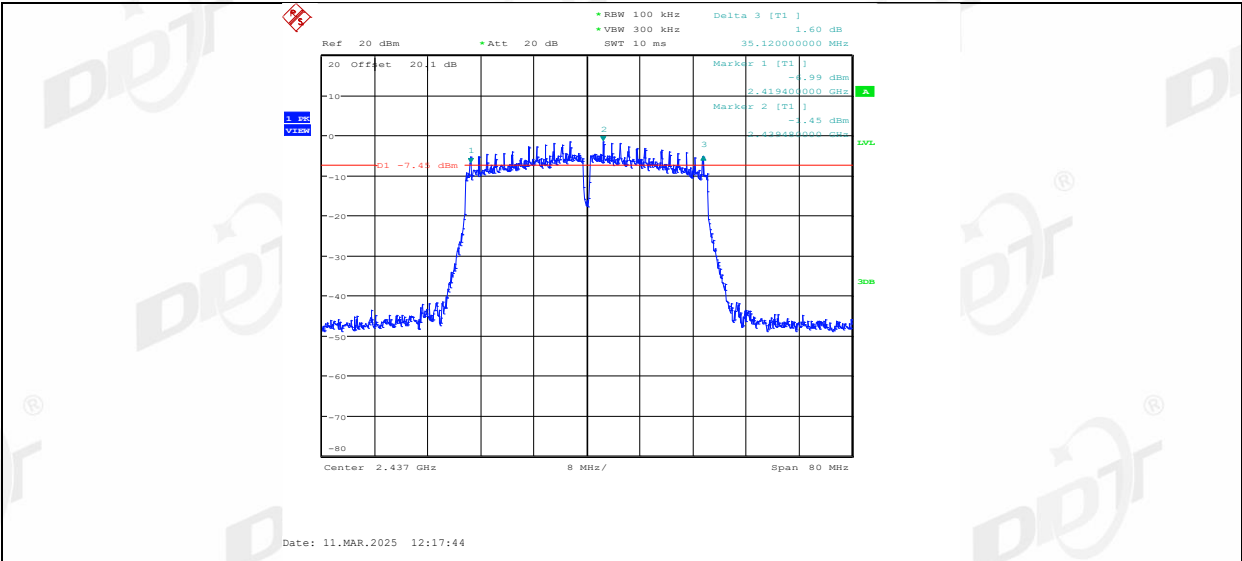




11N40MIMO_Ant1_2452

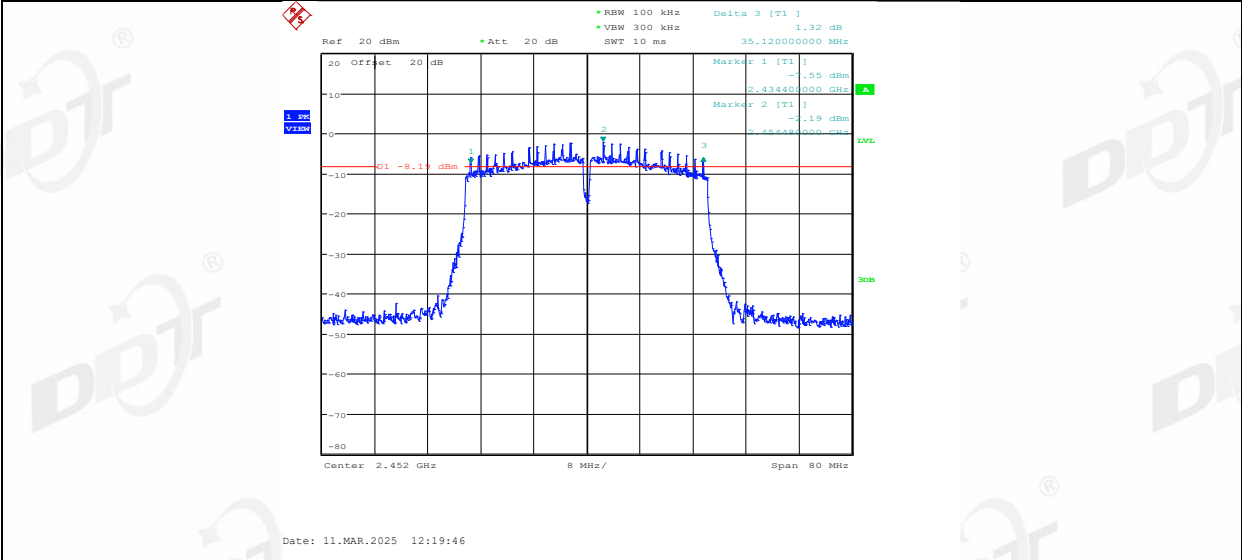


11N40MIMO_Ant2_2452

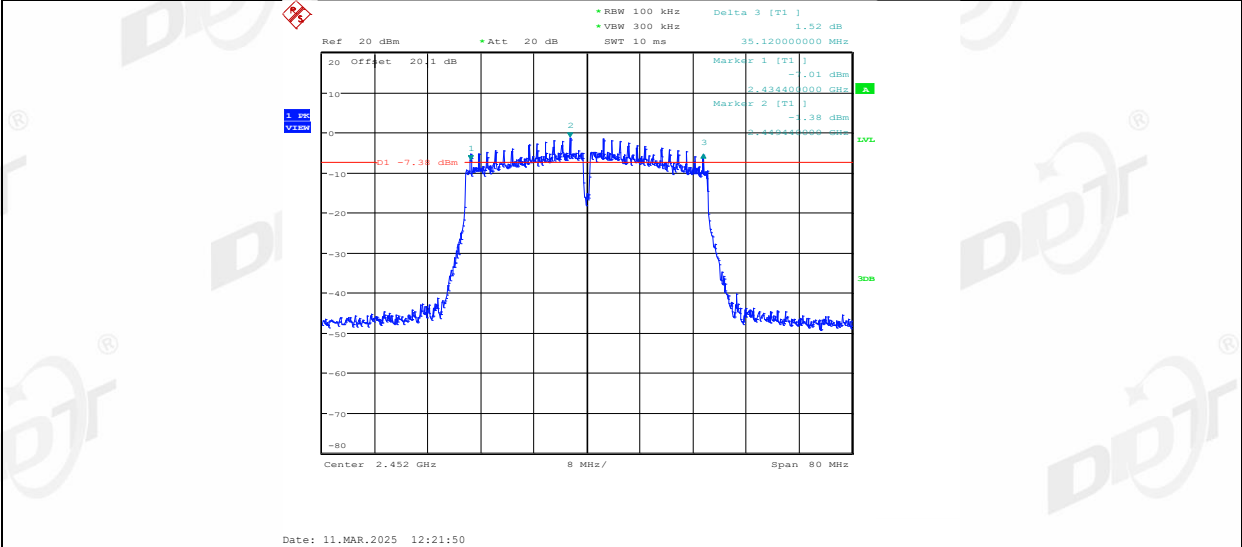


11AX20MIMO_Ant1_2412

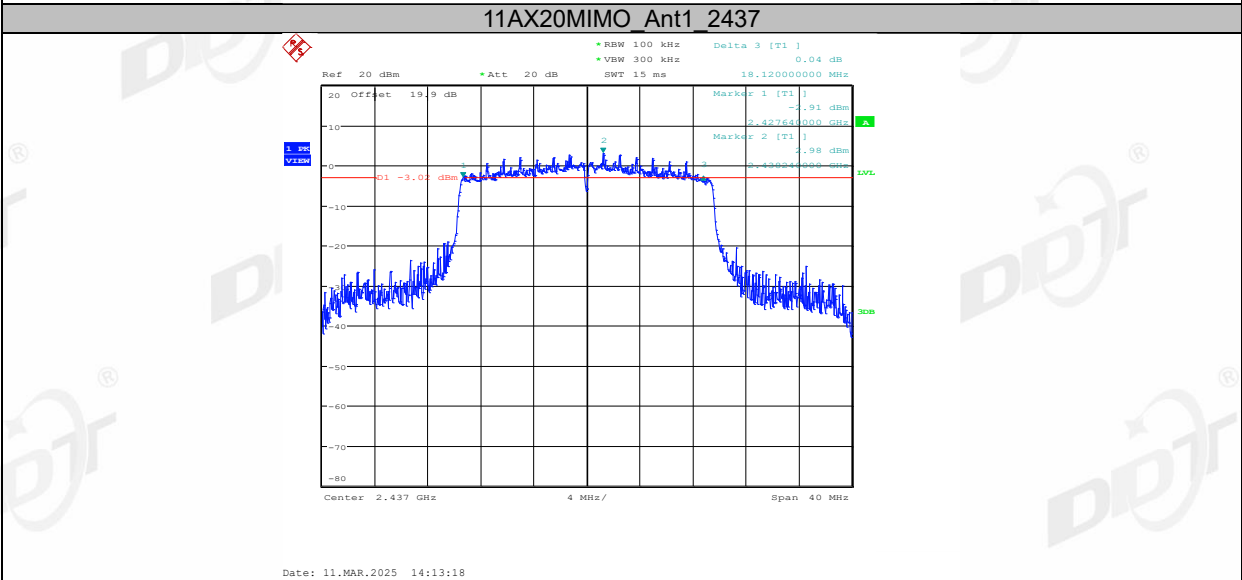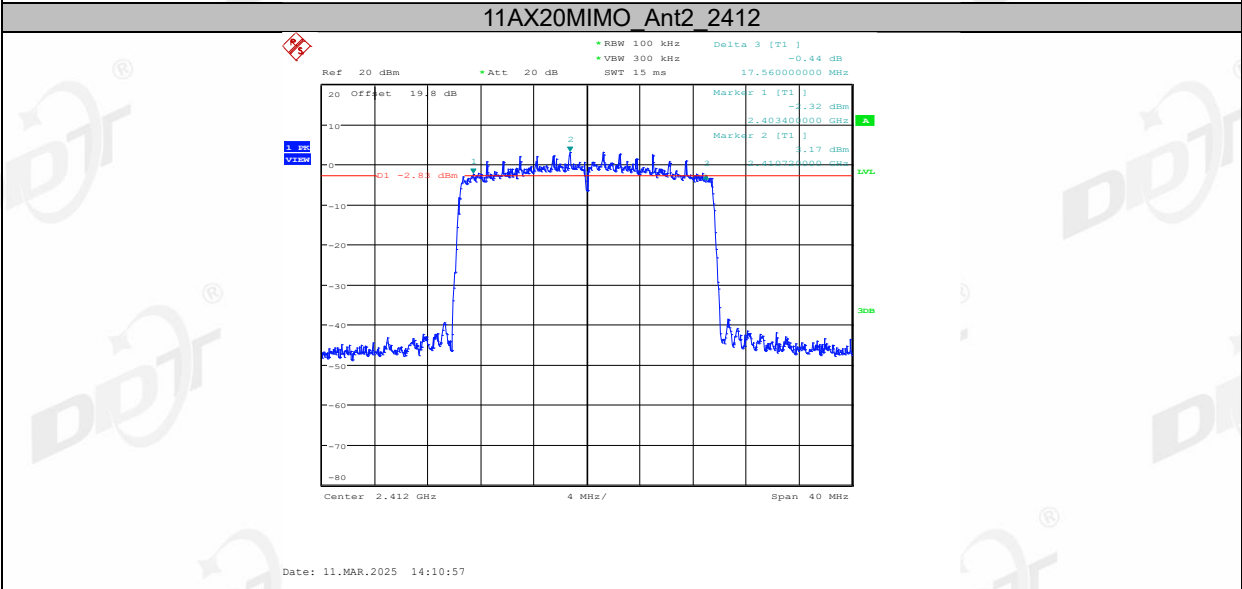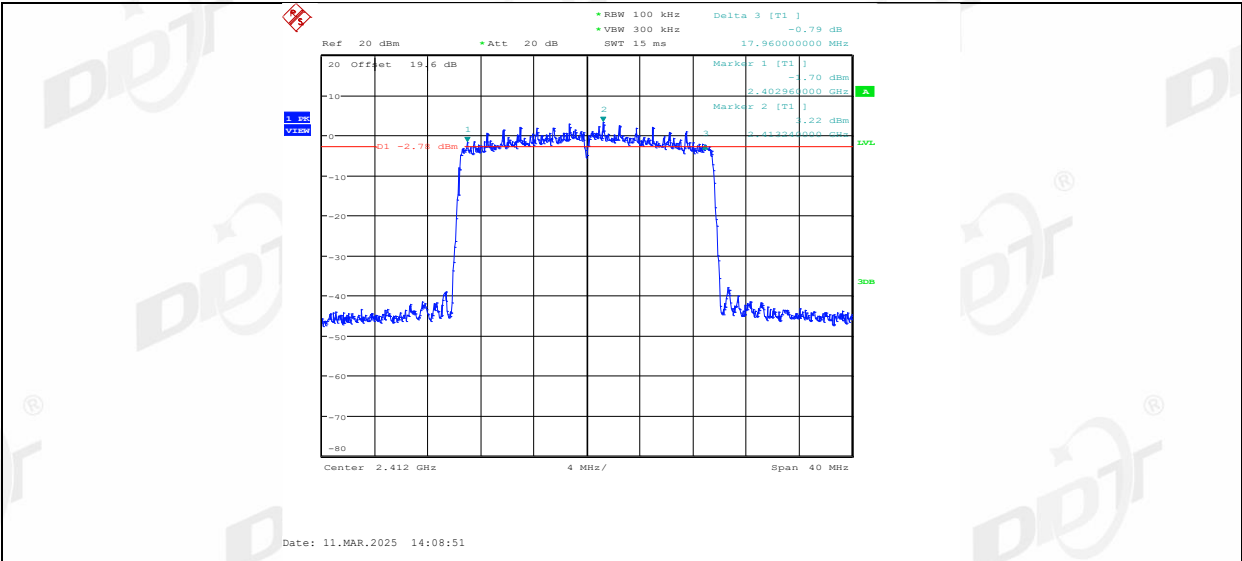


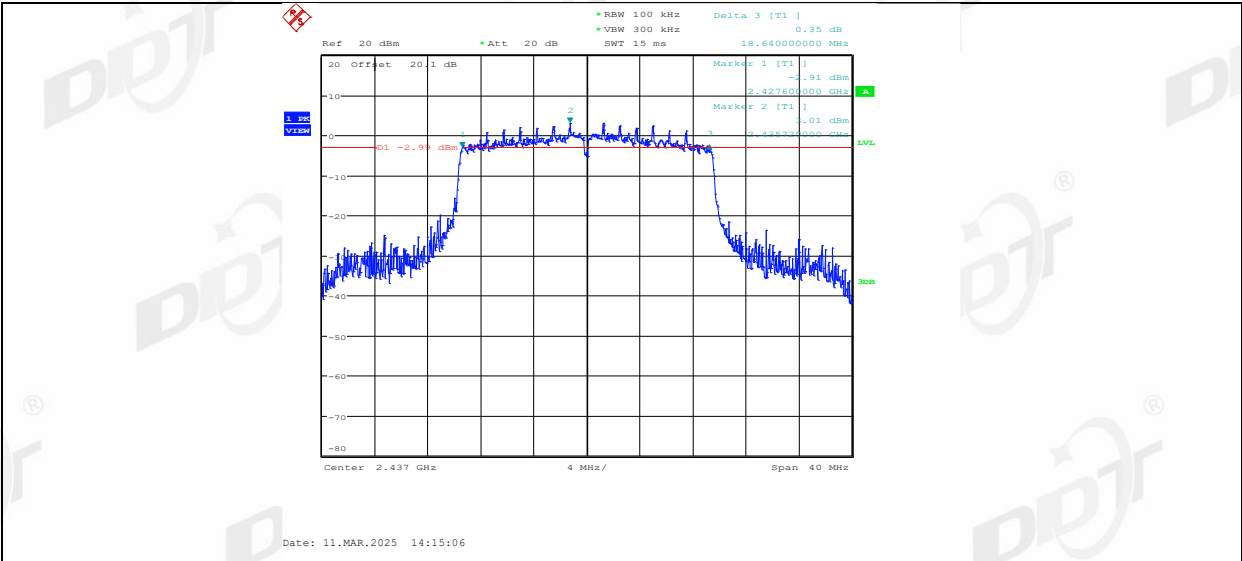


11AX20MIMO Ant1 2462

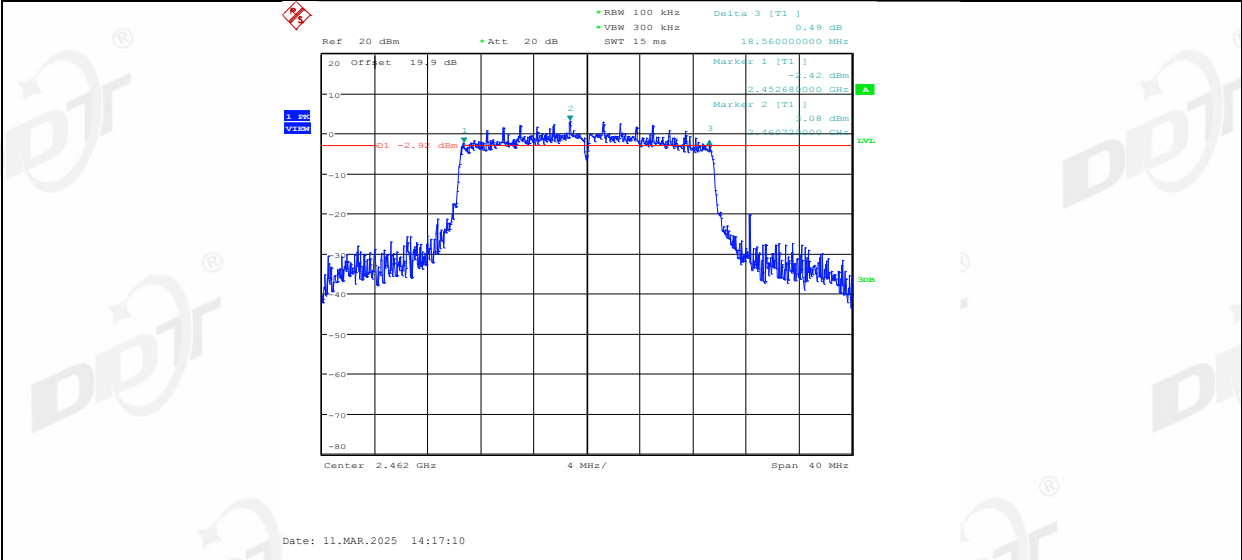


11AX20MIMO Ant2 2462

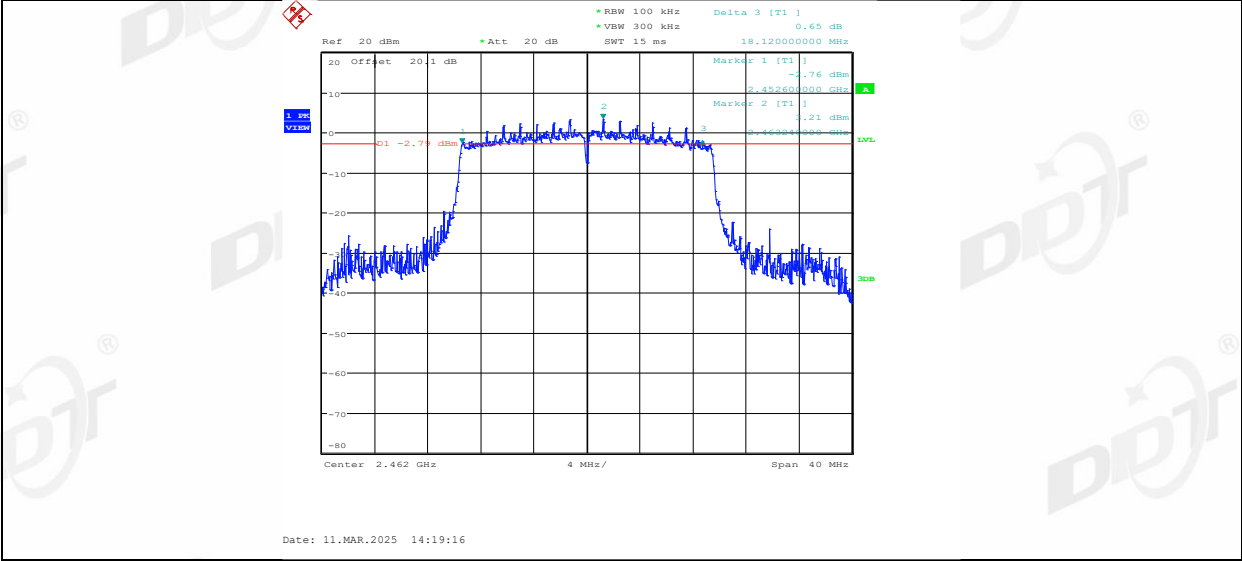


11AX40MIMO Ant1 2422

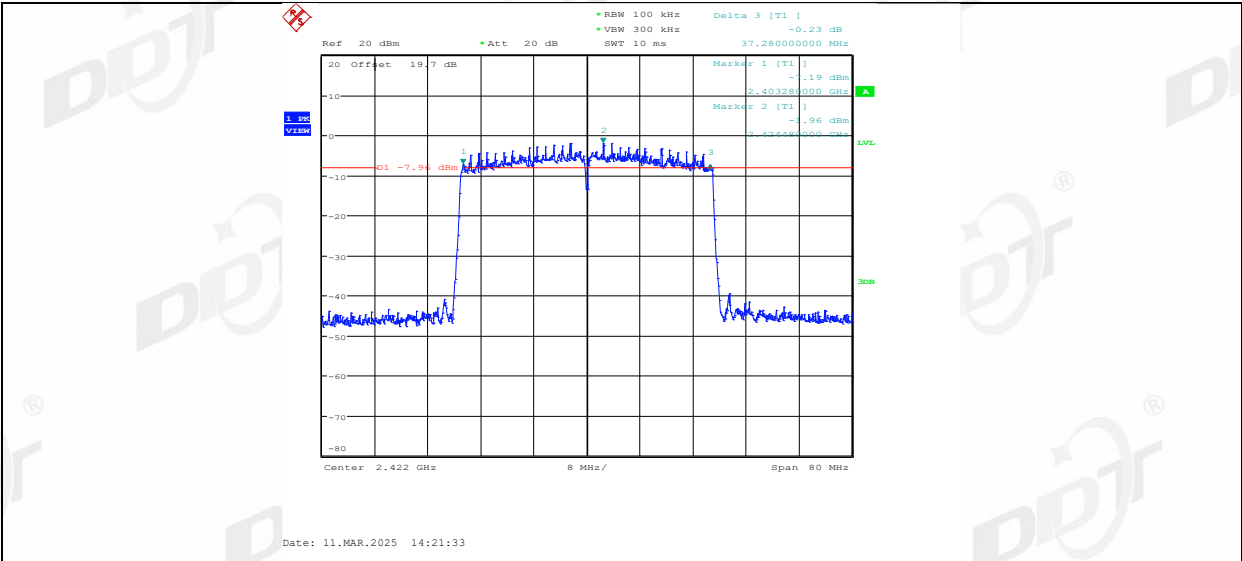


11AX40MIMO_Ant2_2422

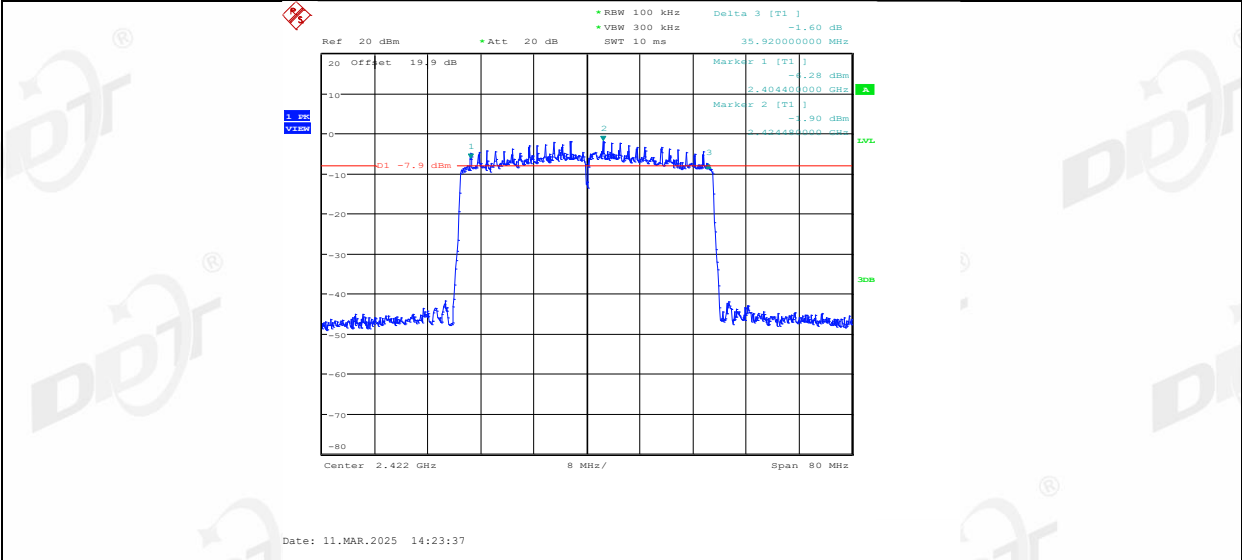


11AX40MIMO_Ant1_2437

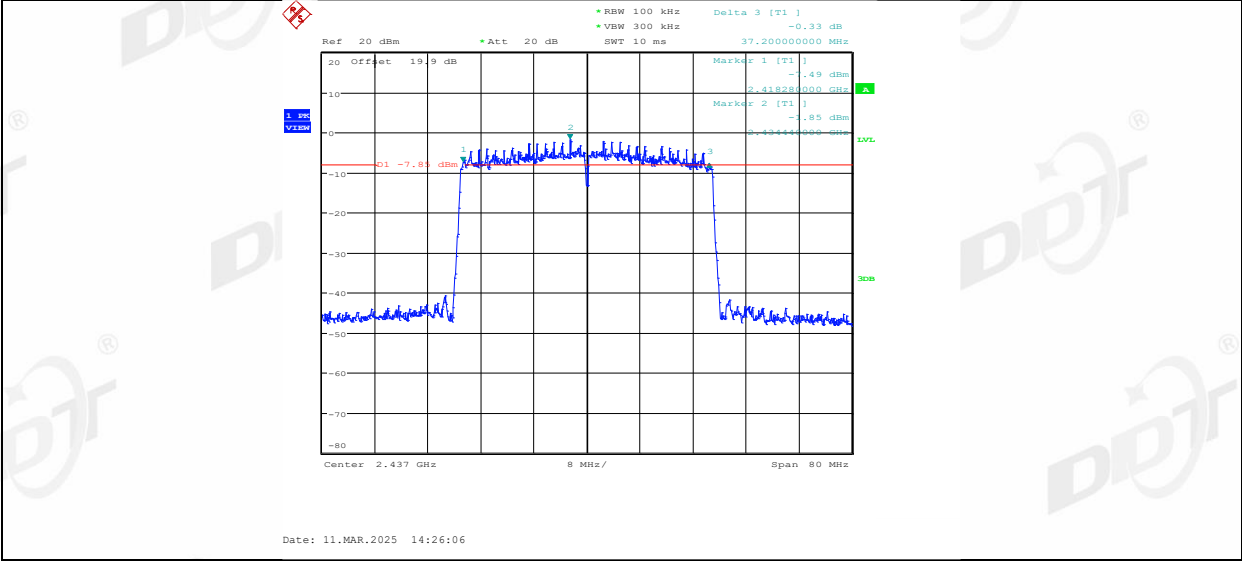


11AX40MIMO_Ant2_2437

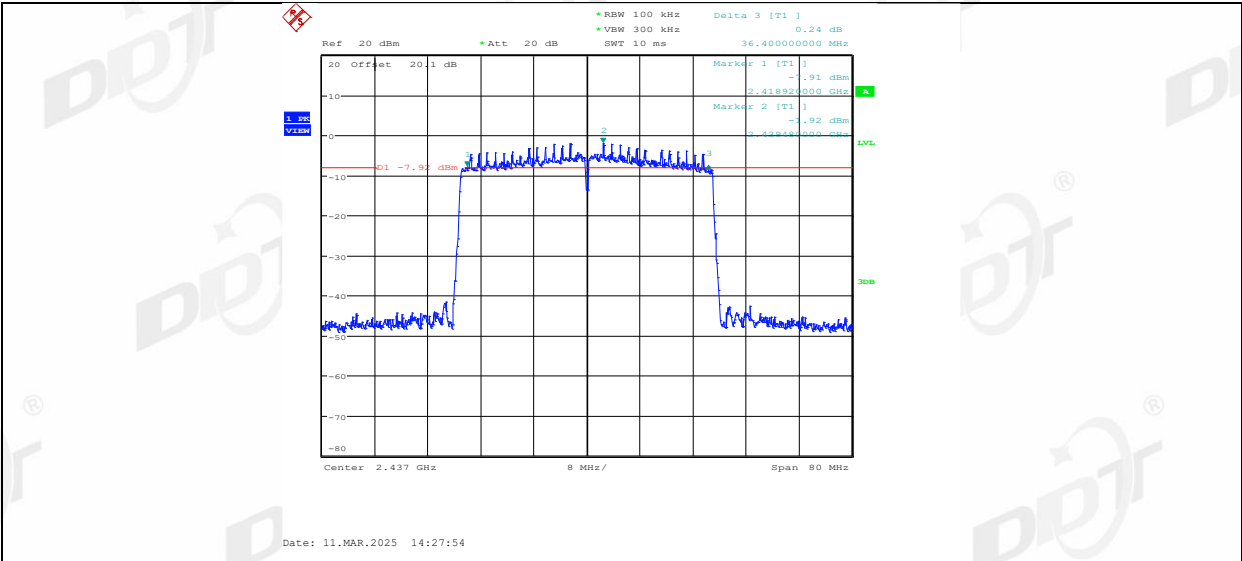

11AX40MIMO Ant1 2452

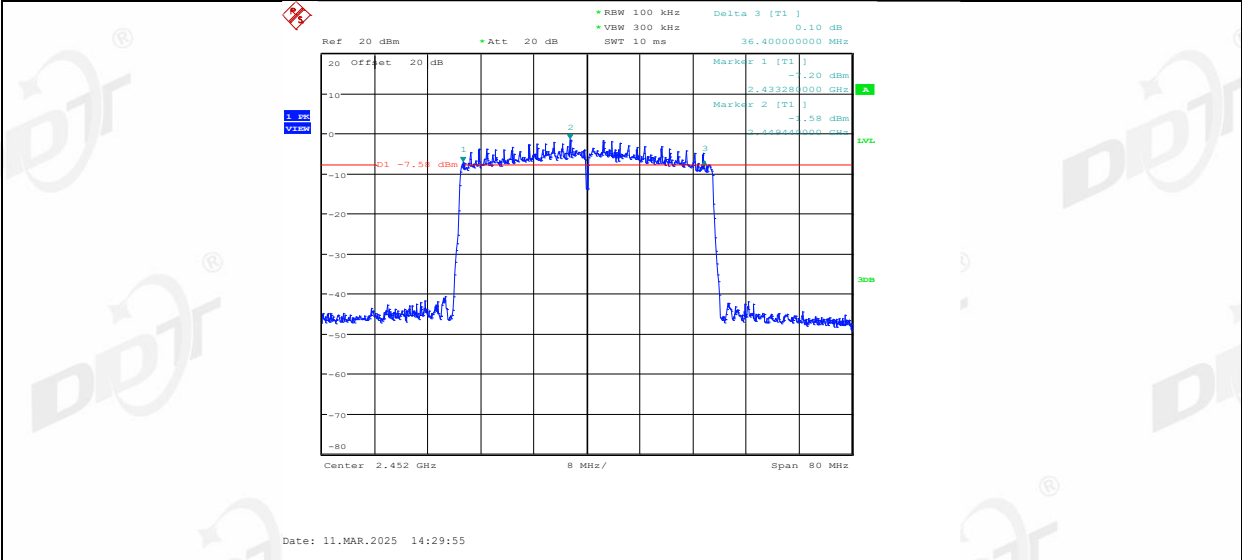


11AX40MIMO Ant2 2452

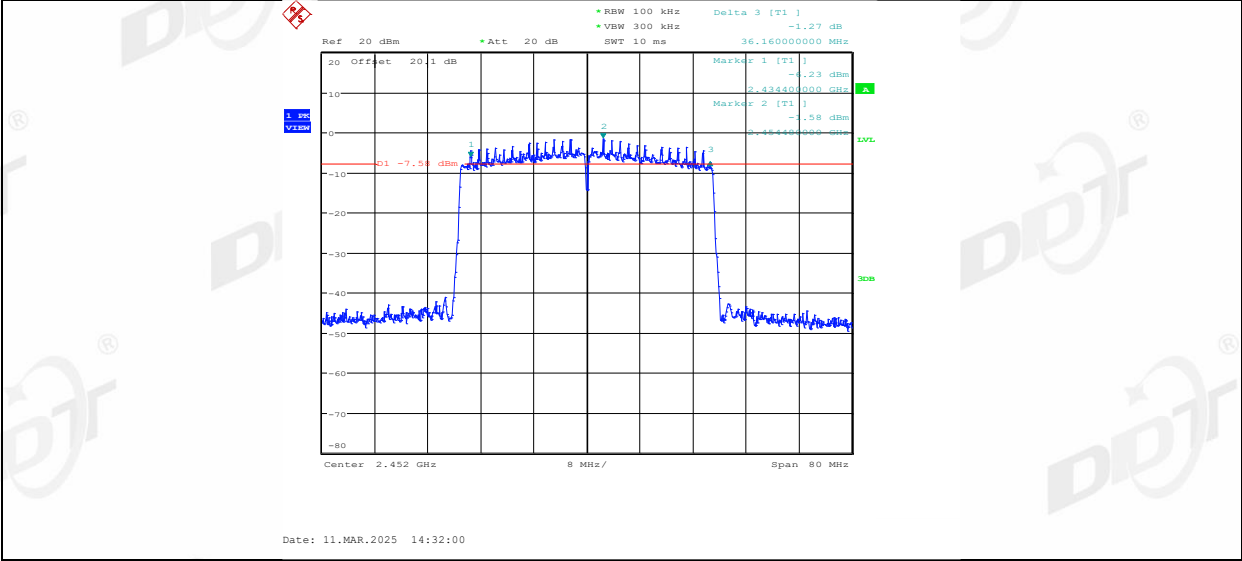

5. 99% Bandwidth

5.1. Block diagram of test setup

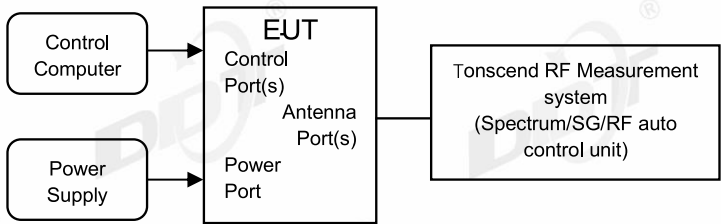

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:
 - RBW: 1% to 5% of the OBW
 - VBW: approximately three times RBW
 - Span: between 1.5 times and 5.0 times the OBW
 - Detector Mode: peak
 - Sweep time: auto
 - Trace mode max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.4℃,36.6%RH	Test Date:	2024.12.03-2025.03.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24111520-011


Test Mode	Antenna	Channel Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.48	2405.7200	2418.2000	---	---
	Ant2	2412	12.24	2405.8400	2418.0800	---	---
	Ant1	2437	12.68	2430.6000	2443.2800	---	---
	Ant2	2437	12.48	2430.7200	2443.2000	---	---
	Ant1	2462	12.68	2455.6000	2468.2800	---	---
	Ant2	2462	12.44	2455.7200	2468.1600	---	---
11G	Ant1	2412	16.96	2403.4400	2420.4000	---	---
	Ant2	2412	17.00	2403.4000	2420.4000	---	---
	Ant1	2437	18.84	2427.4400	2446.2800	---	---
	Ant2	2437	18.76	2427.4800	2446.2400	---	---
	Ant1	2462	18.84	2452.4000	2471.2400	---	---
	Ant2	2462	18.84	2452.4000	2471.2400	---	---
11N20MIMO	Ant1	2412	17.84	2403.0400	2420.8800	---	---
	Ant2	2412	17.8	2403.0400	2420.8400	---	---
	Ant1	2437	19.68	2427.0000	2446.6800	---	---
	Ant2	2437	18.60	2427.5600	2446.1600	---	---
	Ant1	2462	19.72	2452.0000	2471.7200	---	---
	Ant2	2462	18.56	2452.5600	2471.1200	---	---
11N40MIMO	Ant1	2422	36.24	2403.8400	2440.0800	---	---
	Ant2	2422	36.24	2403.8400	2440.0800	---	---
	Ant1	2437	36.24	2418.8400	2455.0800	---	---
	Ant2	2437	36.32	2418.7600	2455.0800	---	---
	Ant1	2452	36.32	2433.7600	2470.0800	---	---
	Ant2	2452	36.16	2433.8400	2470.0000	---	---
11AX20MIMO	Ant1	2412	18.96	2402.4800	2421.4400	---	---
	Ant2	2412	18.92	2402.5200	2421.4400	---	---
	Ant1	2437	19.20	2427.3600	2446.5600	---	---
	Ant2	2437	19.16	2427.4000	2446.5600	---	---
	Ant1	2462	19.24	2452.3200	2471.5600	---	---
	Ant2	2462	19.24	2452.3200	2471.5600	---	---
11AX40MIMO	Ant1	2422	37.84	2403.0400	2440.8800	---	---
	Ant2	2422	37.92	2403.0400	2440.9600	---	---
	Ant1	2437	37.84	2418.0400	2455.8800	---	---
	Ant2	2437	37.92	2417.9600	2455.8800	---	---
	Ant1	2452	37.92	2432.9600	2470.8800	---	---
	Ant2	2452	37.84	2433.0400	2470.8800	---	---

5.5. Test graphs

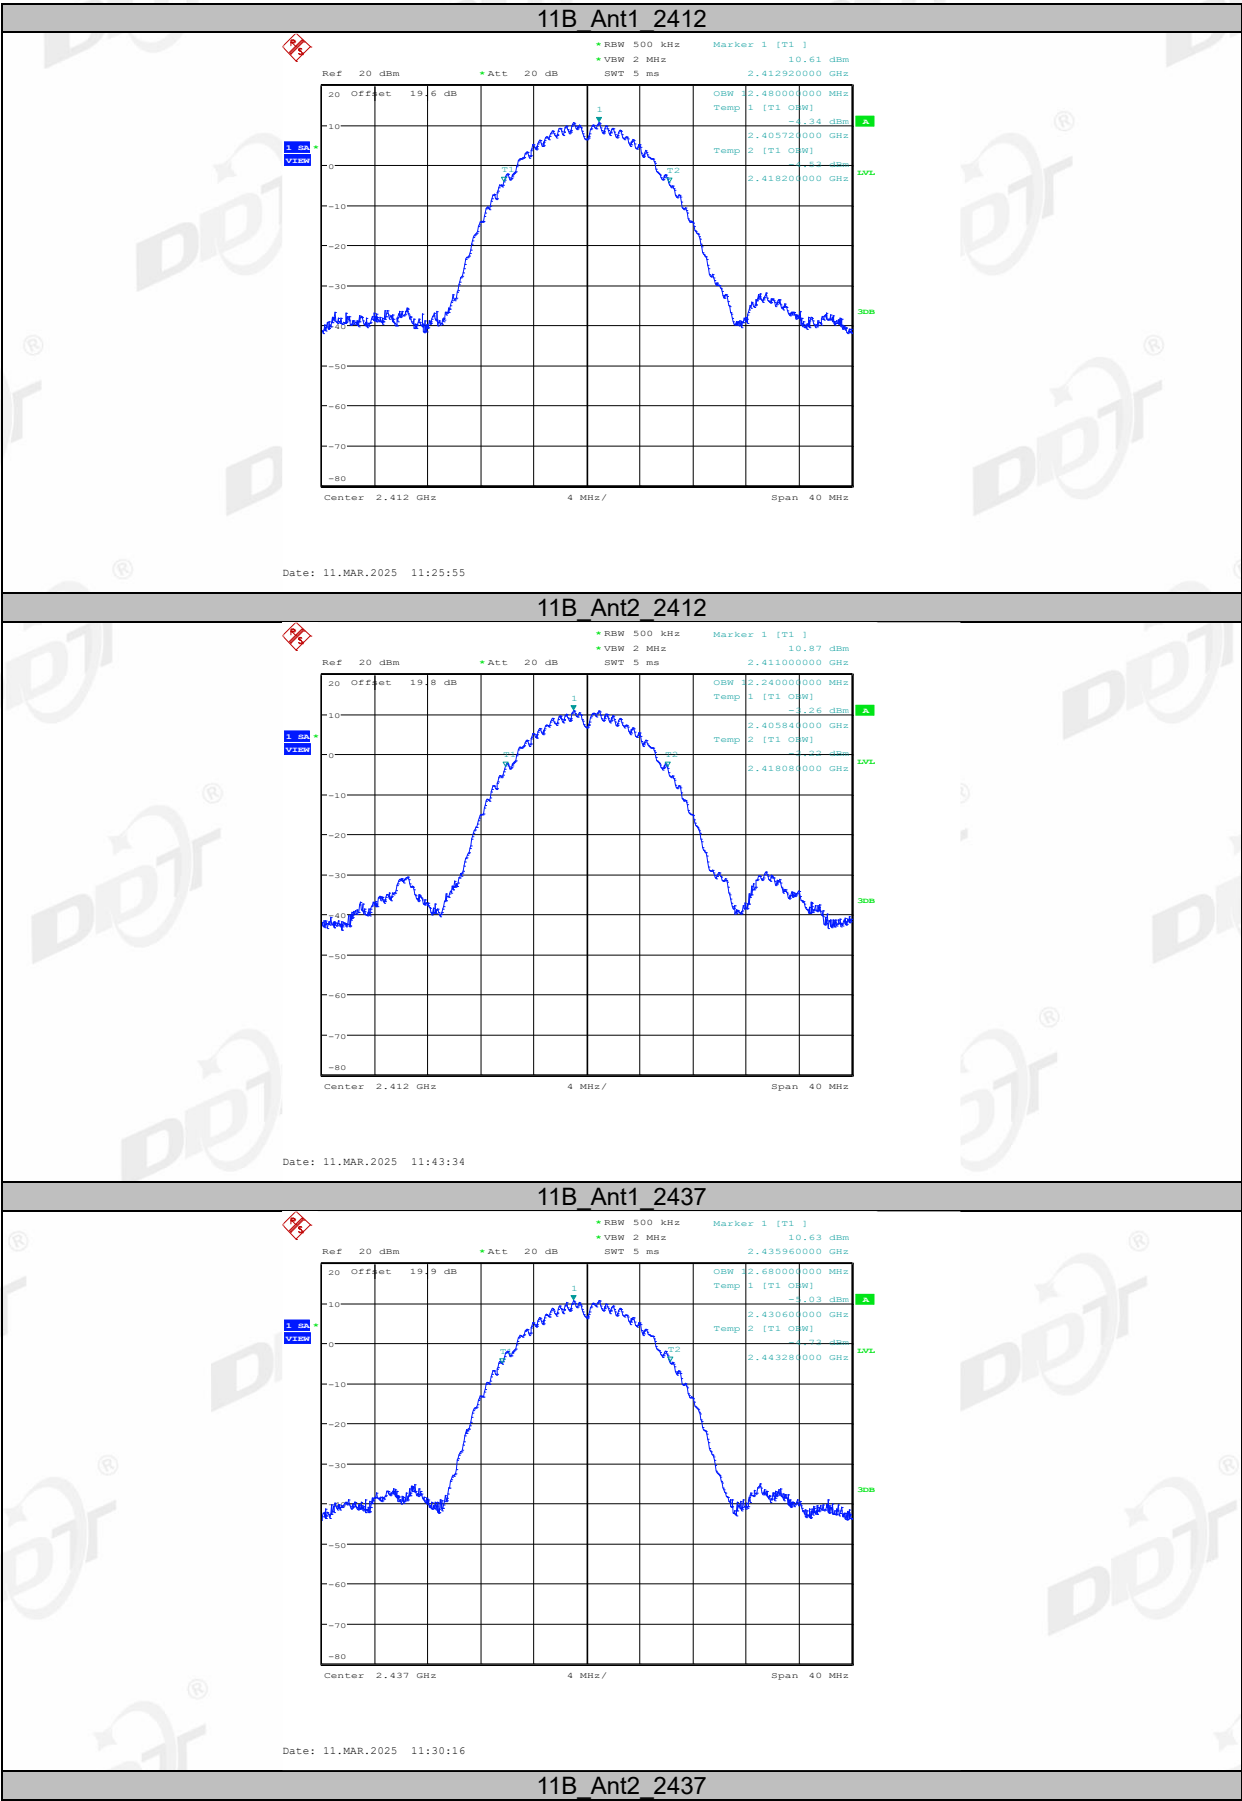


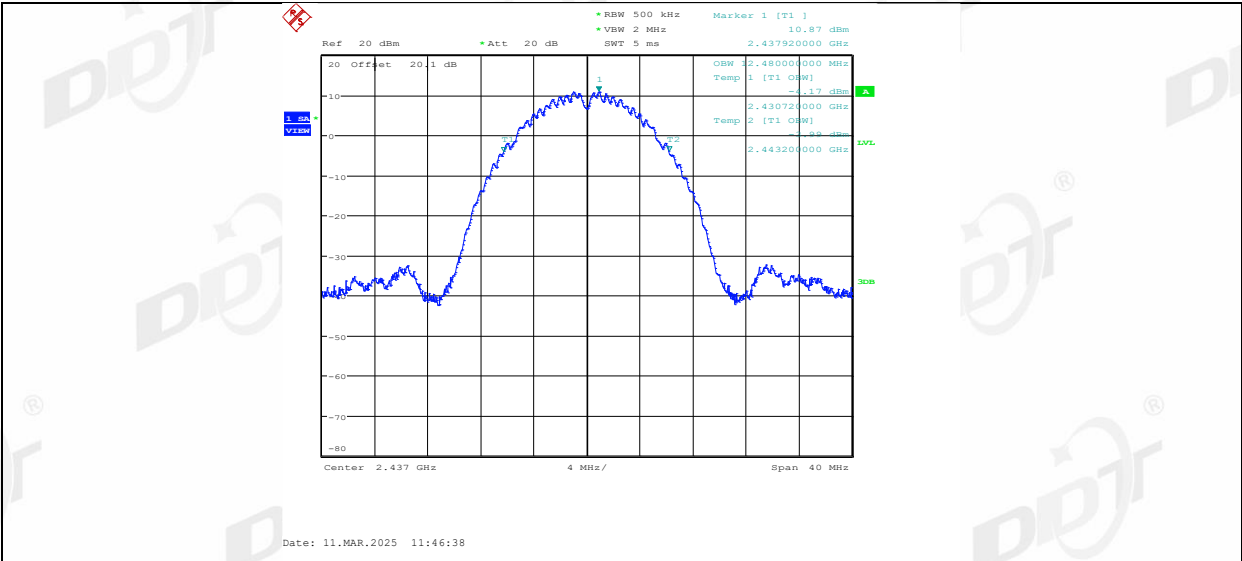


11B_Ant1_2462

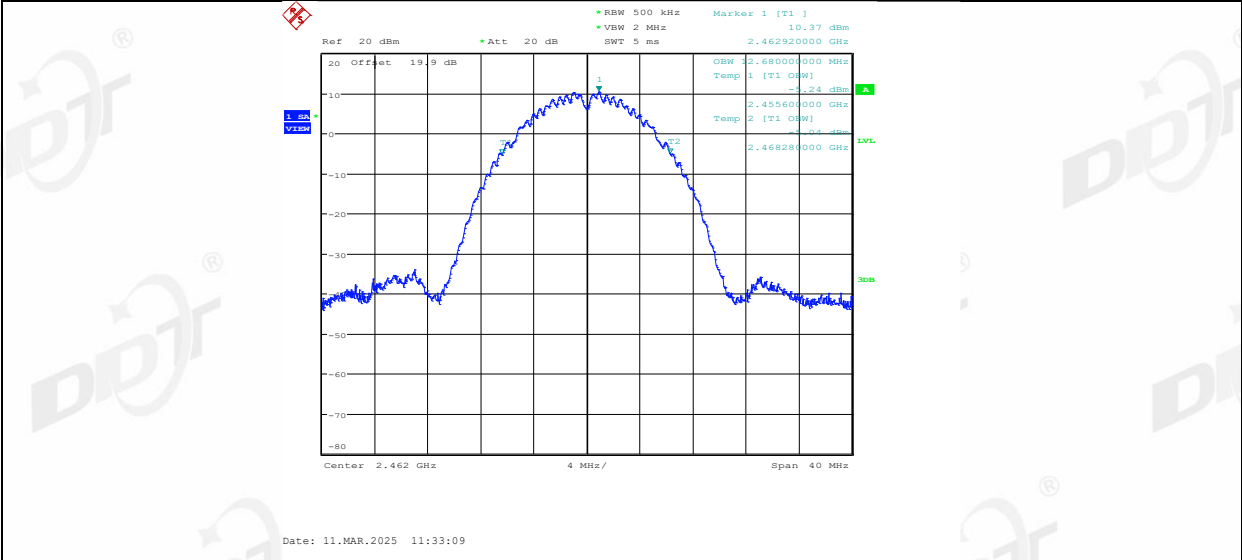


11B_Ant2_2462

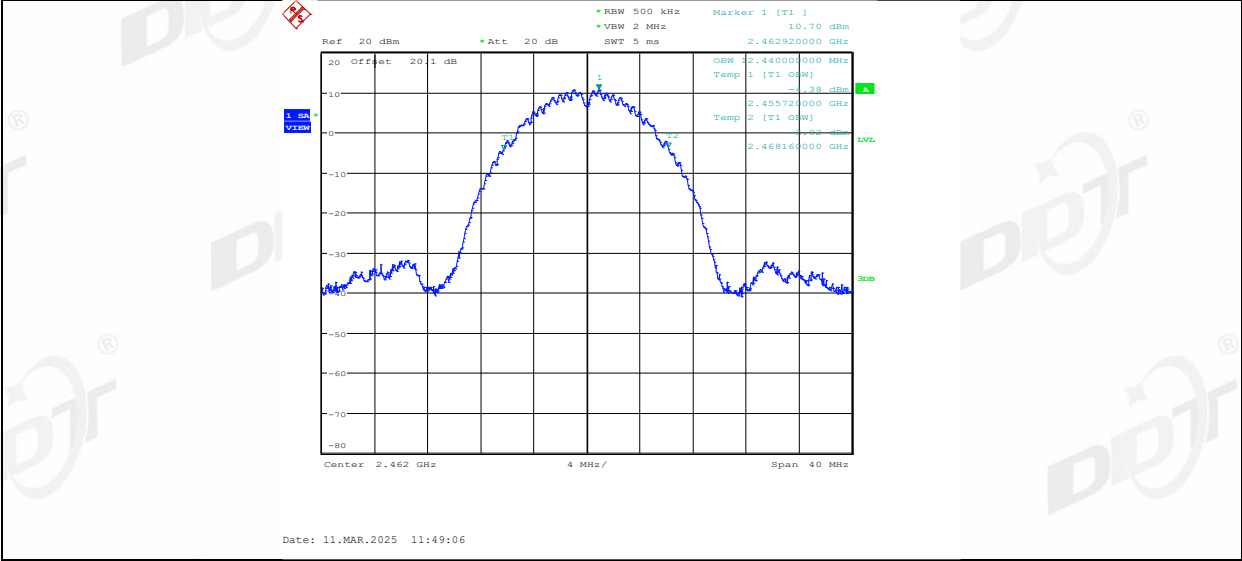


11G_Ant1_2412

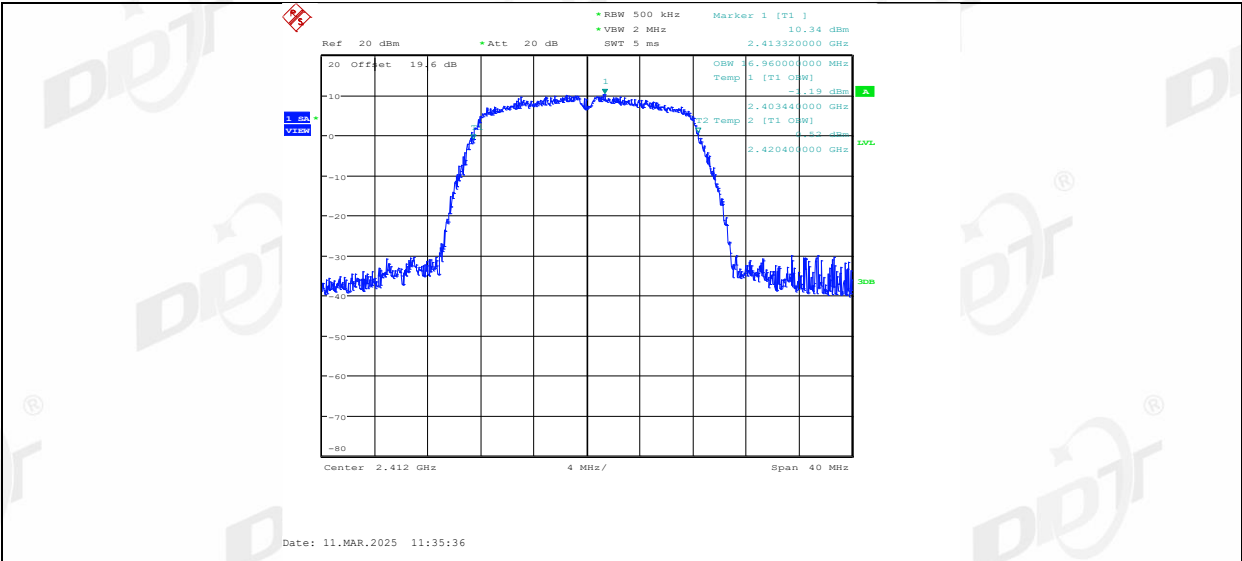


11G_Ant2_2412

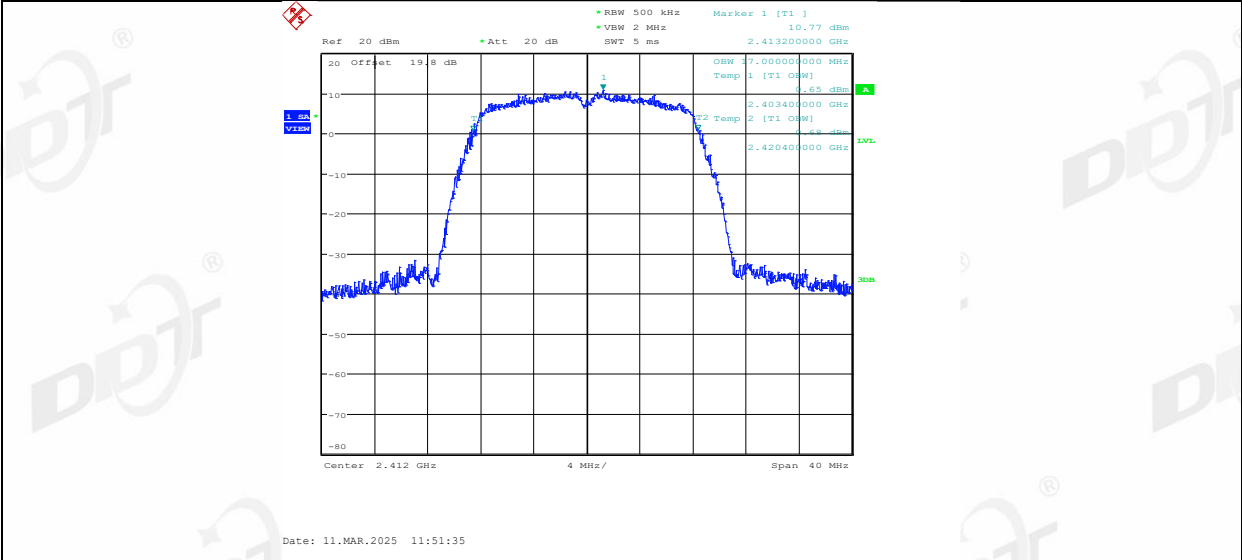


11G_Ant1_2437

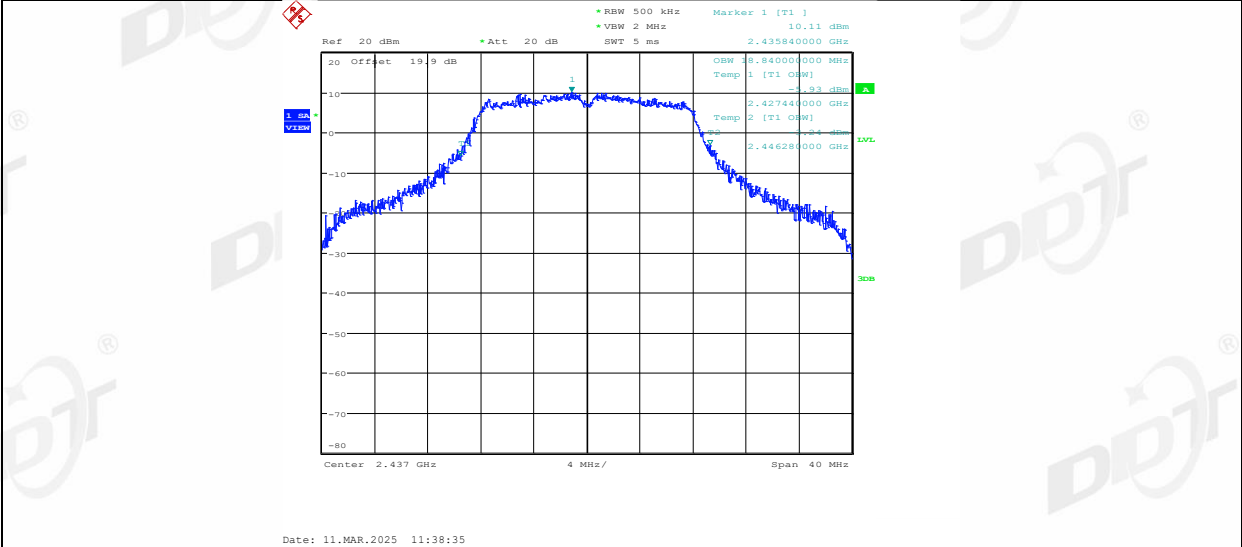


11G_Ant2_2437

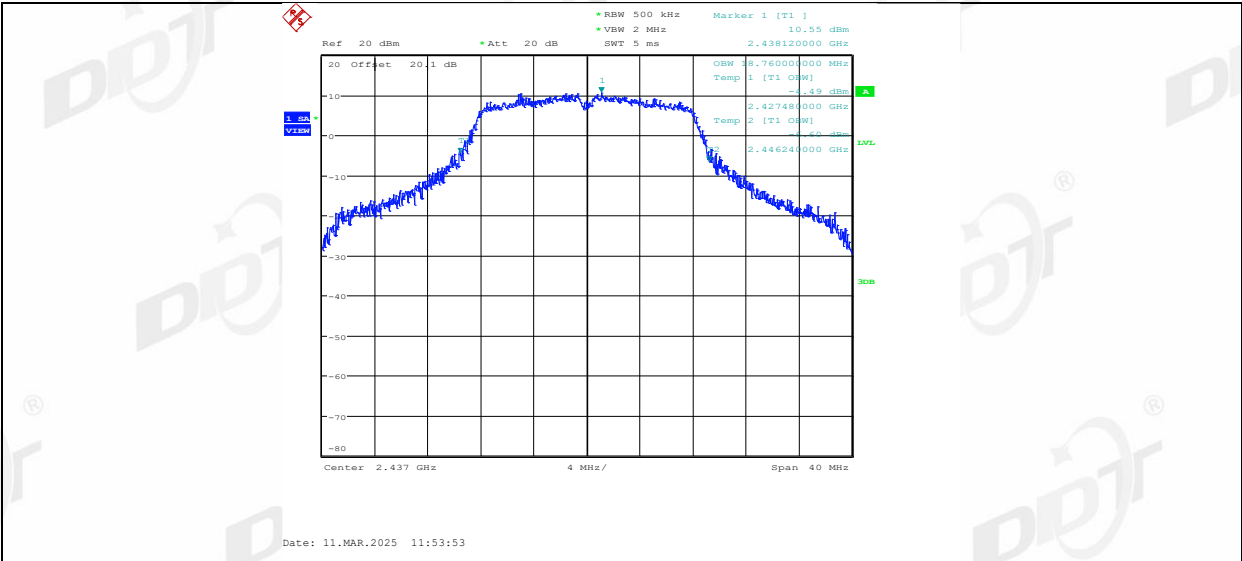


11G_Ant1_2462

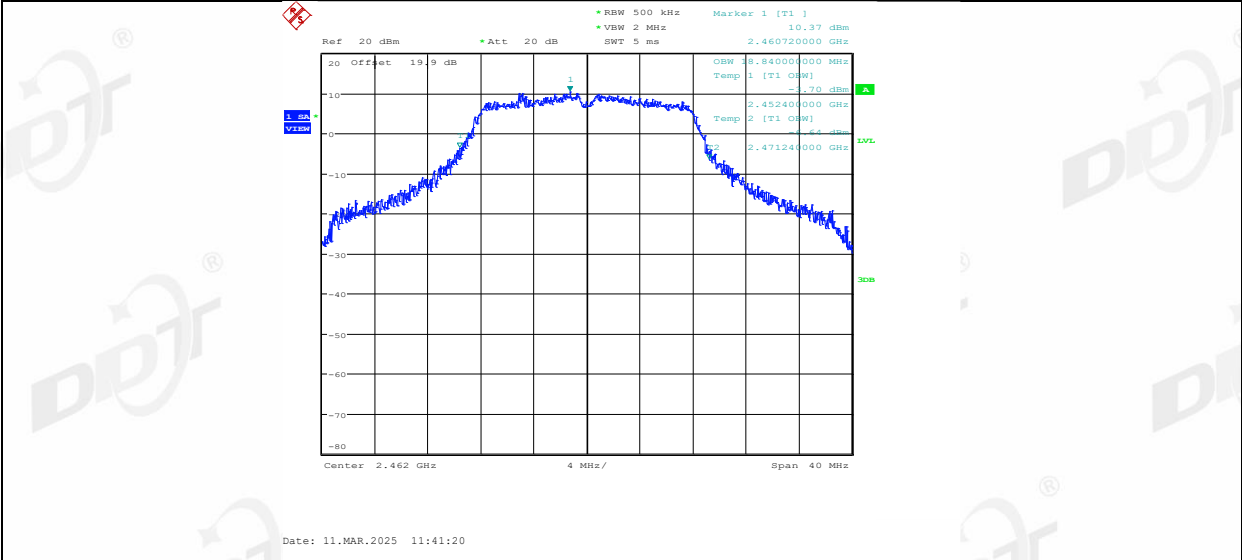


11G_Ant2_2462

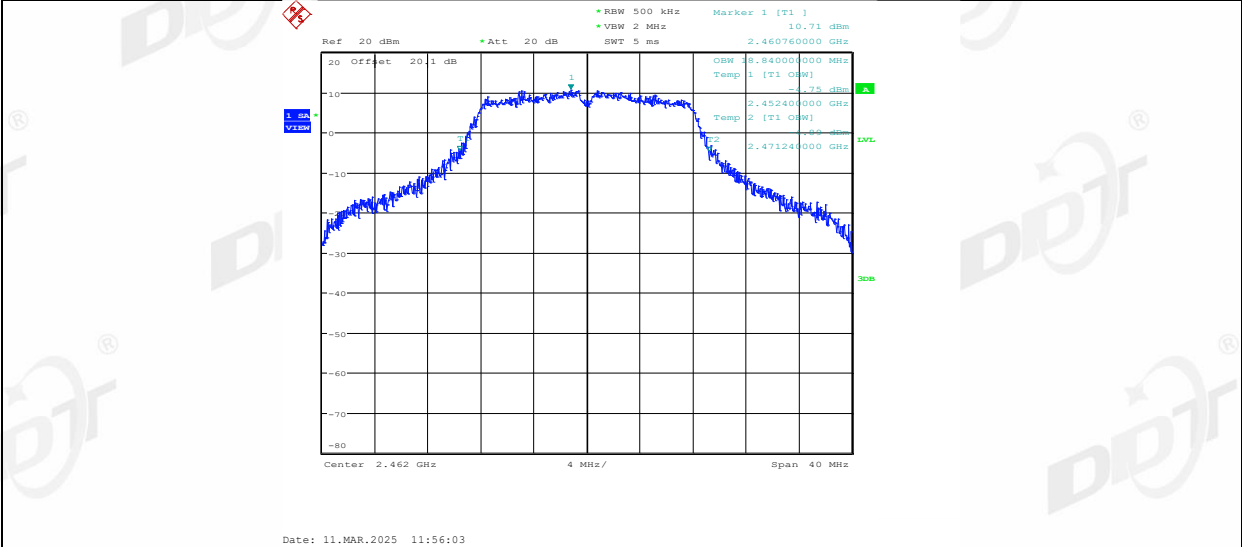


11N20MIMO_Ant1_2412

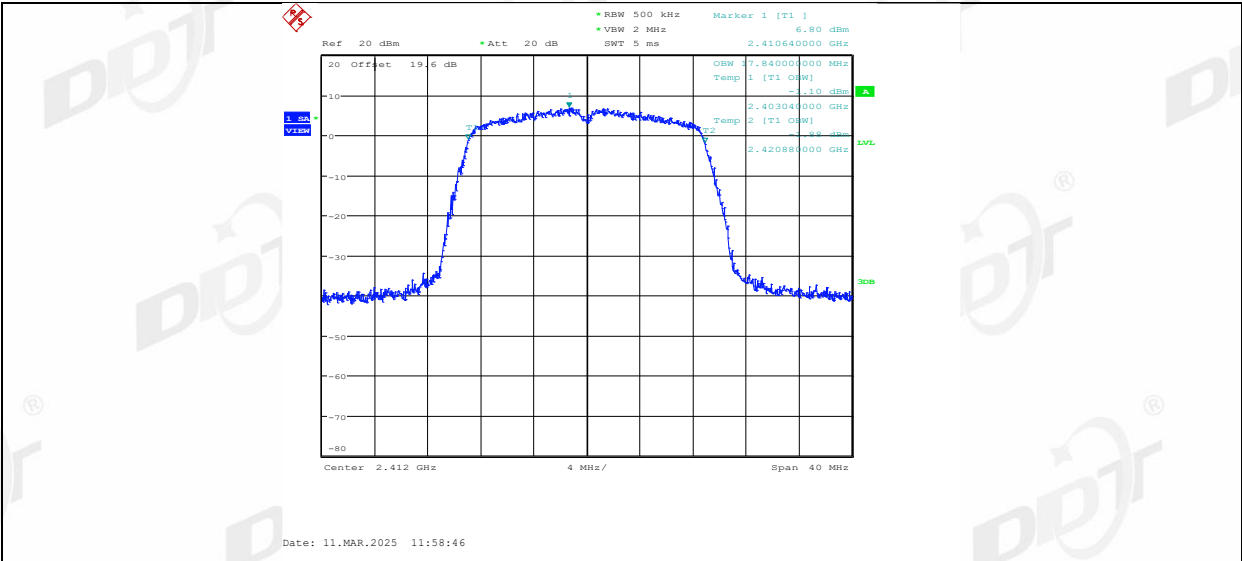


11N20MIMO_Ant2_2412

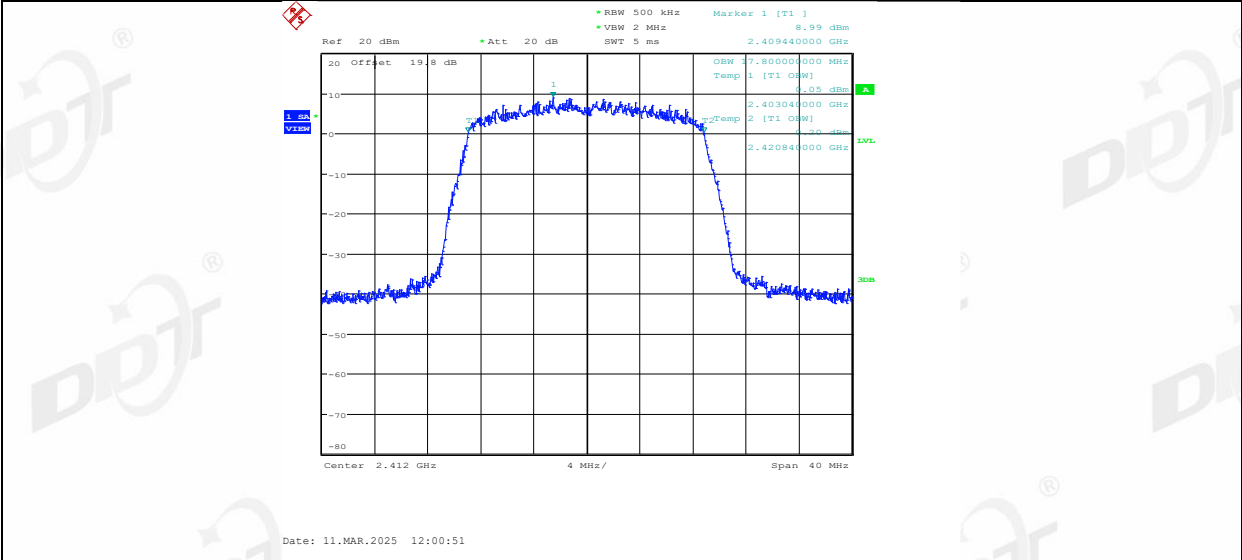


11N20MIMO_Ant1_2437

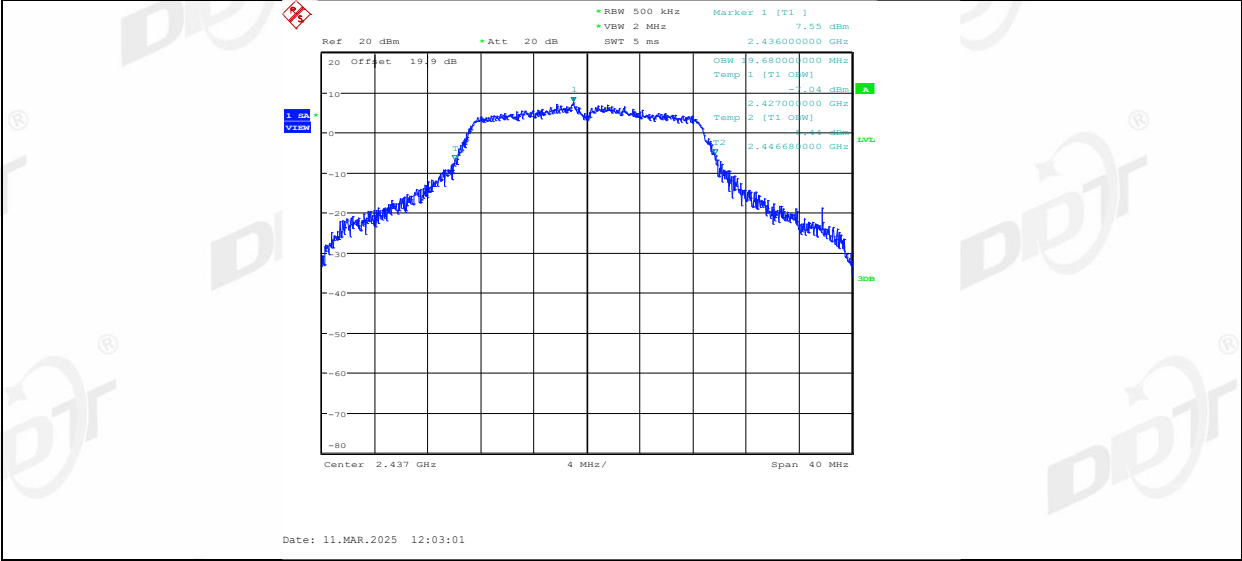


11N20MIMO_Ant2_2437

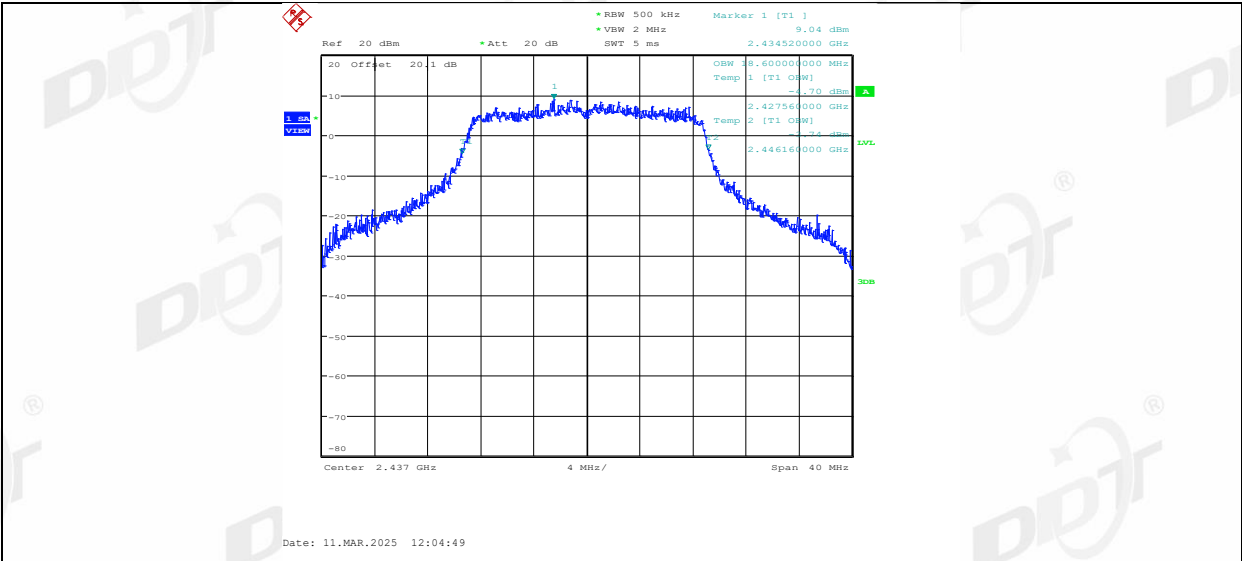


11N20MIMO_Ant1_2462

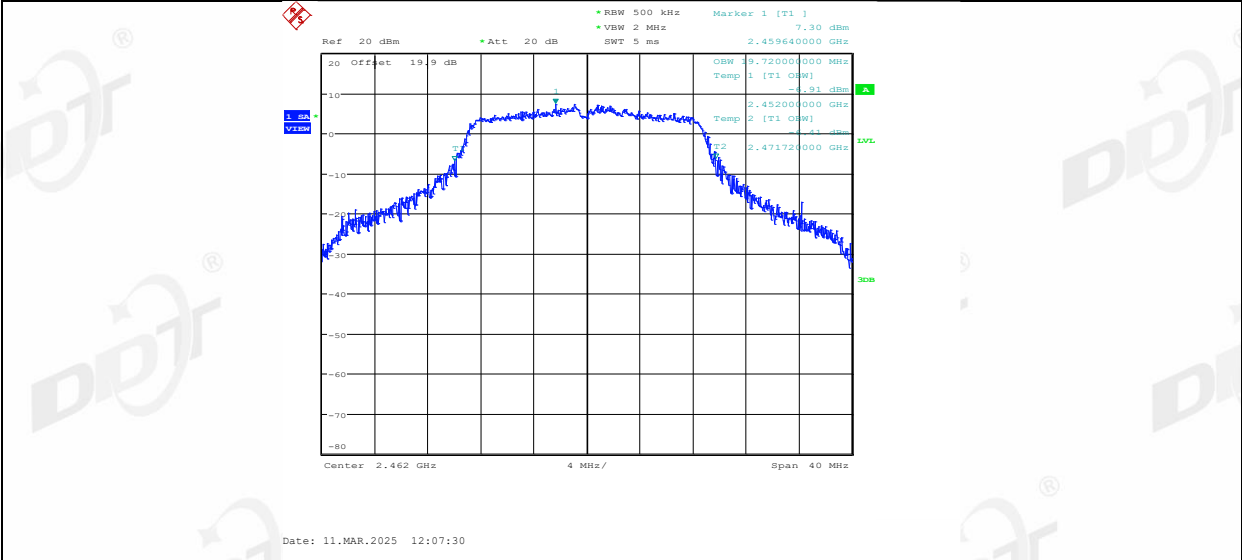


11N20MIMO_Ant2_2462

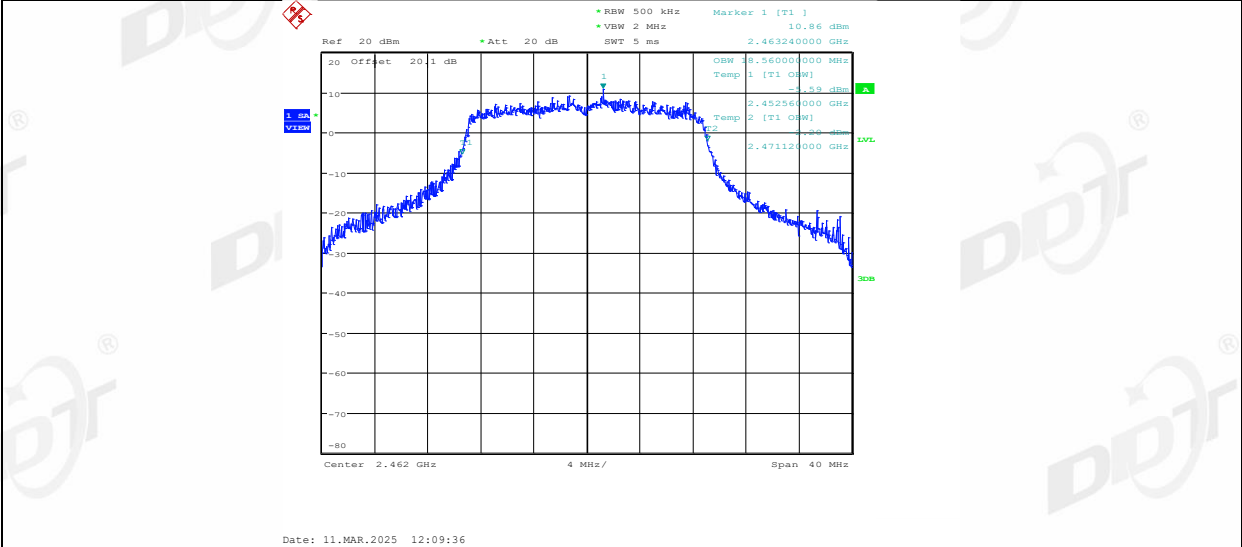


11N40MIMO_Ant1_2422

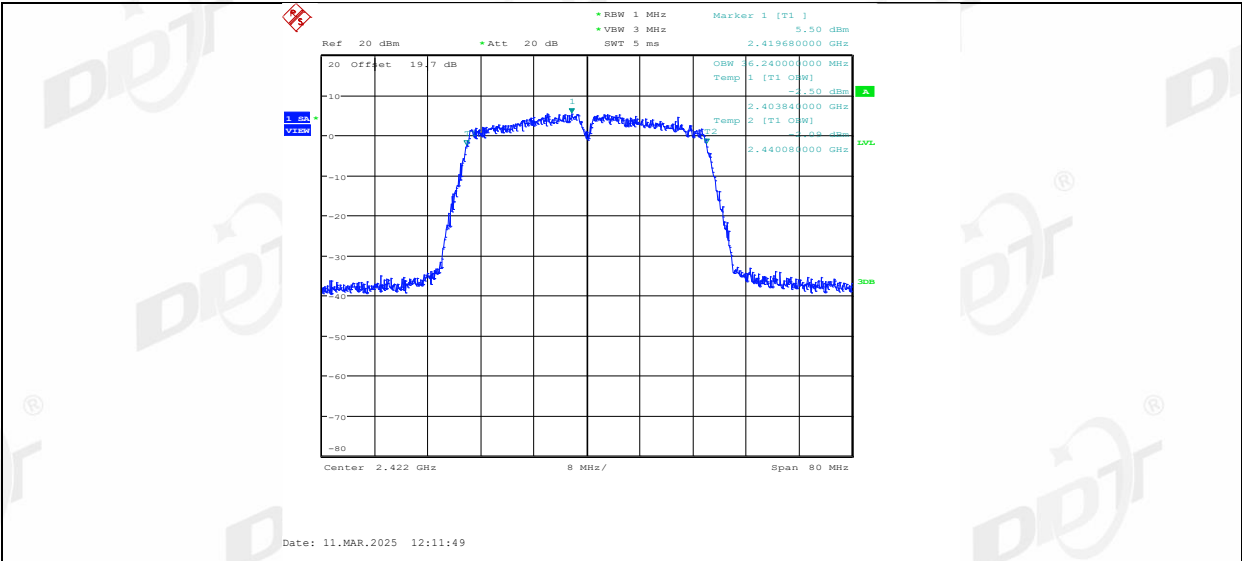


11N40MIMO_Ant2_2422

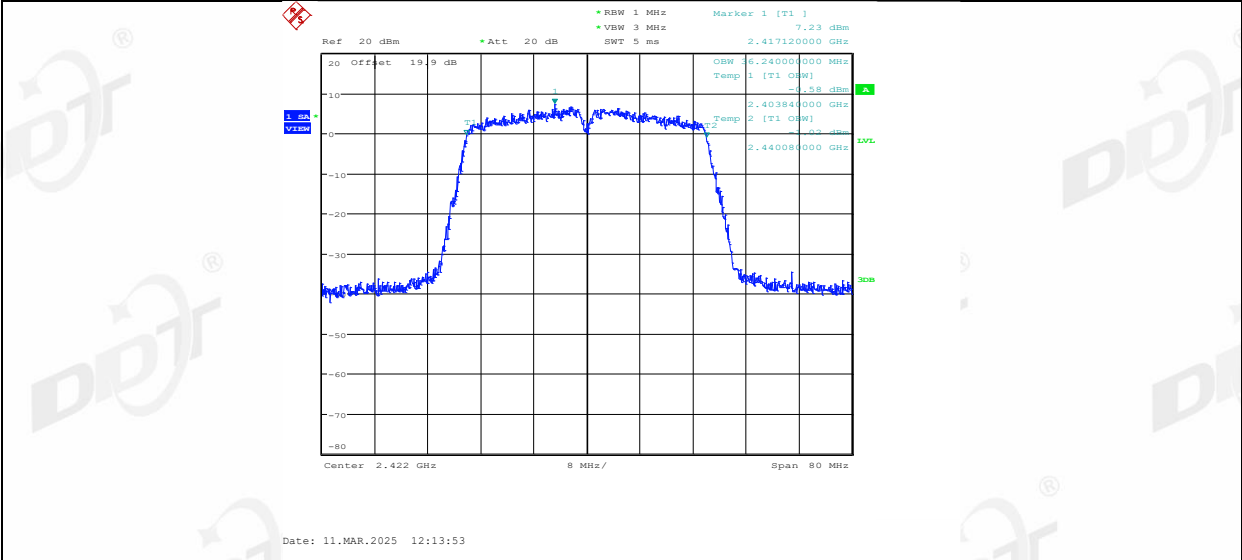


11N40MIMO_Ant1_2437

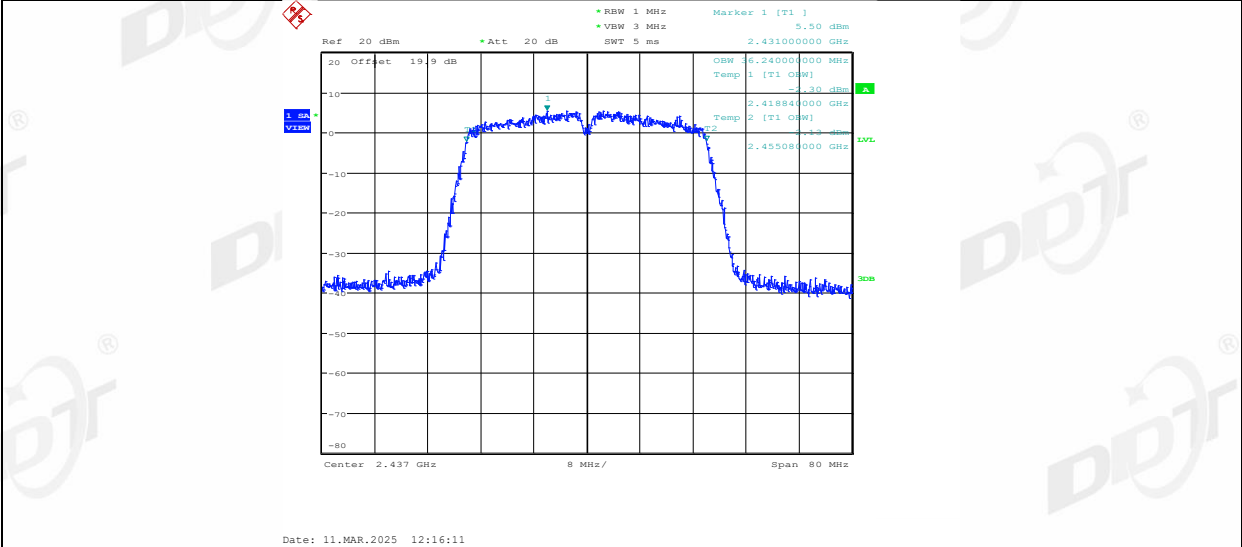


11N40MIMO_Ant2_2437

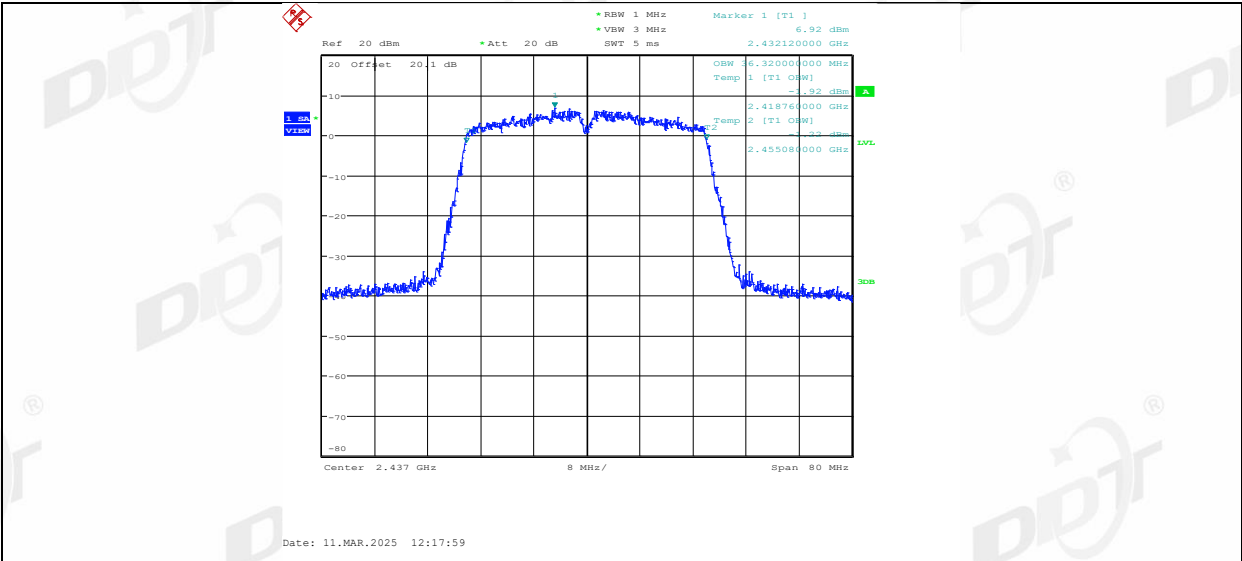


11N40MIMO_Ant1_2452

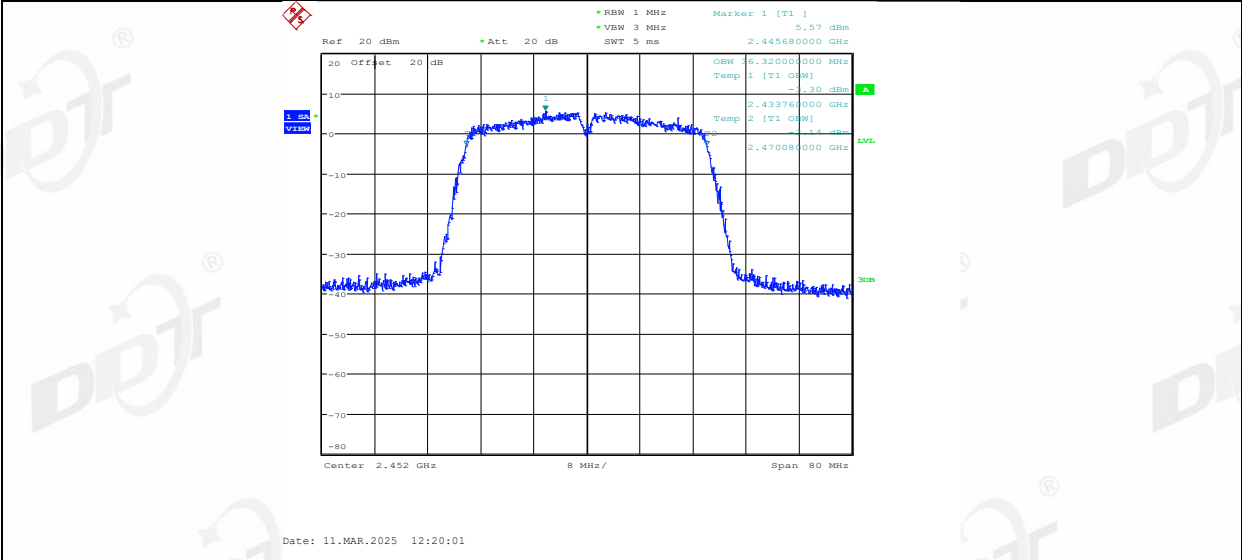


11N40MIMO_Ant2_2452

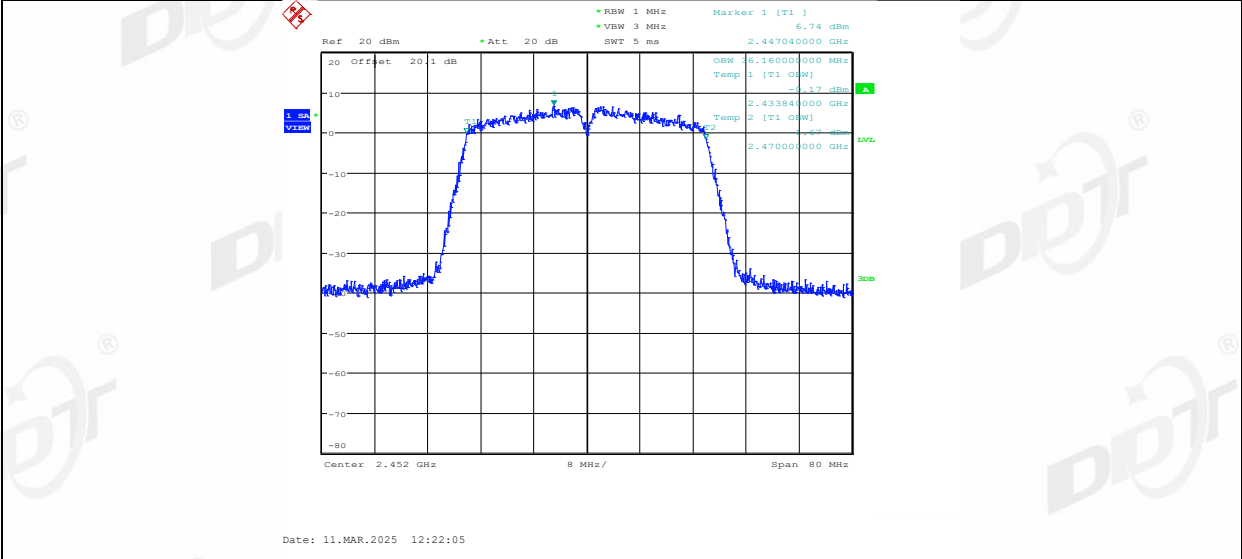


11AX20MIMO_Ant1_2412

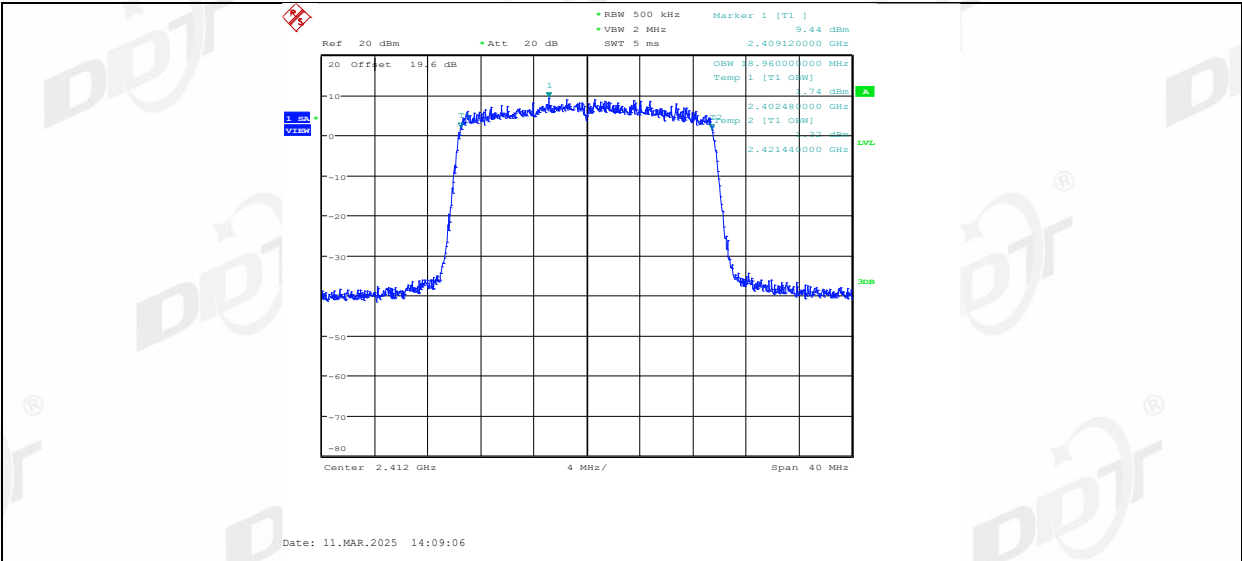


11AX20MIMO_Ant2_2412

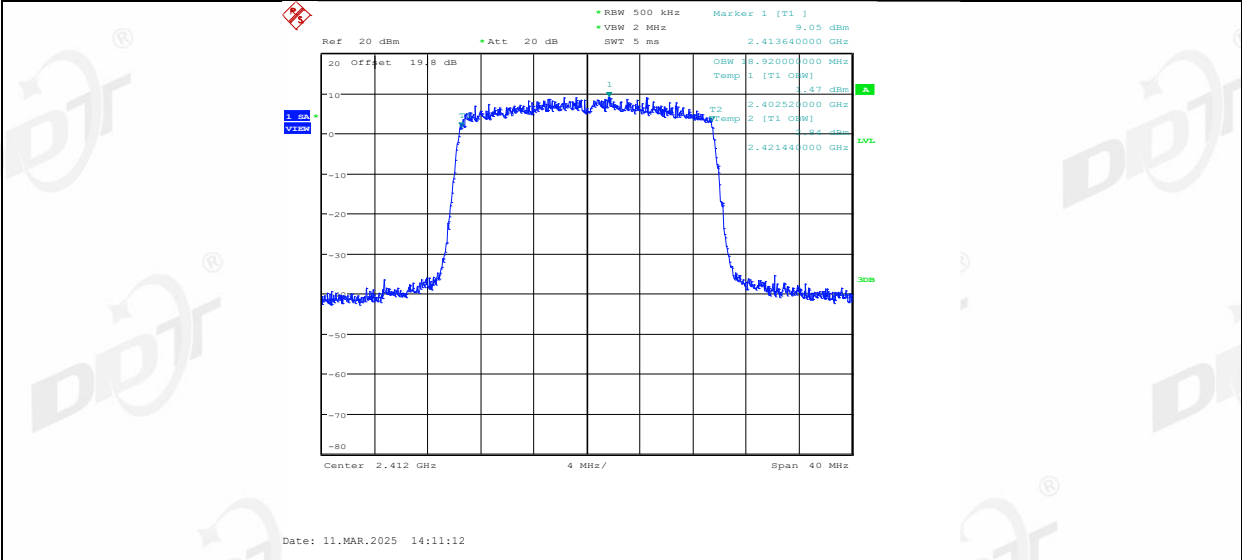


11AX20MIMO_Ant1_2437

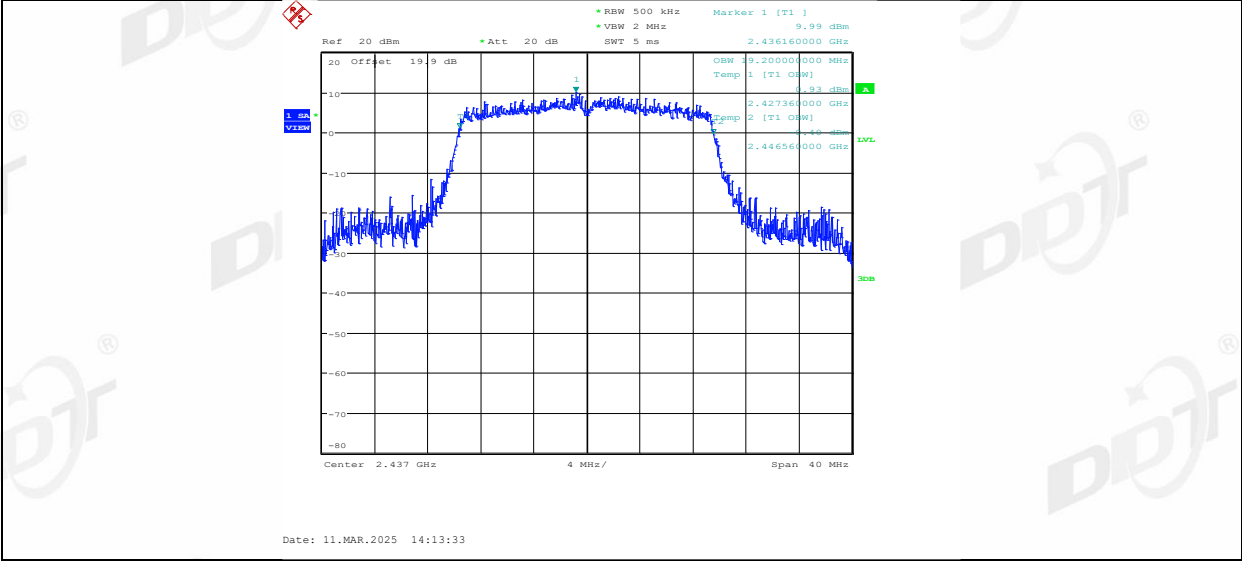


11AX20MIMO_Ant2_2437

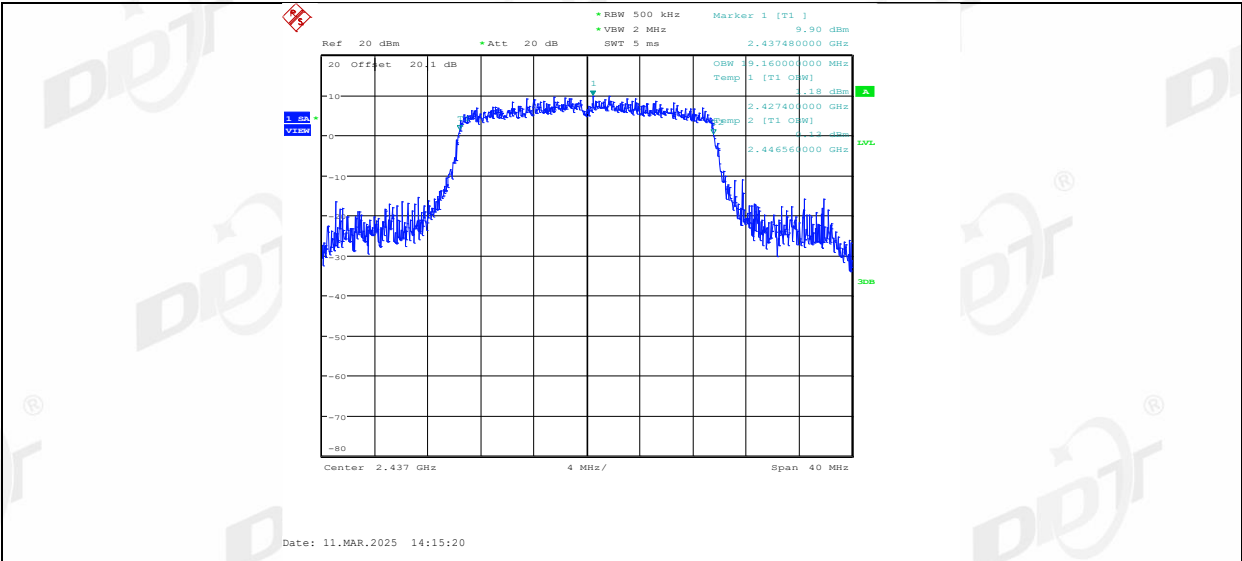


11AX20MIMO_Ant1_2462

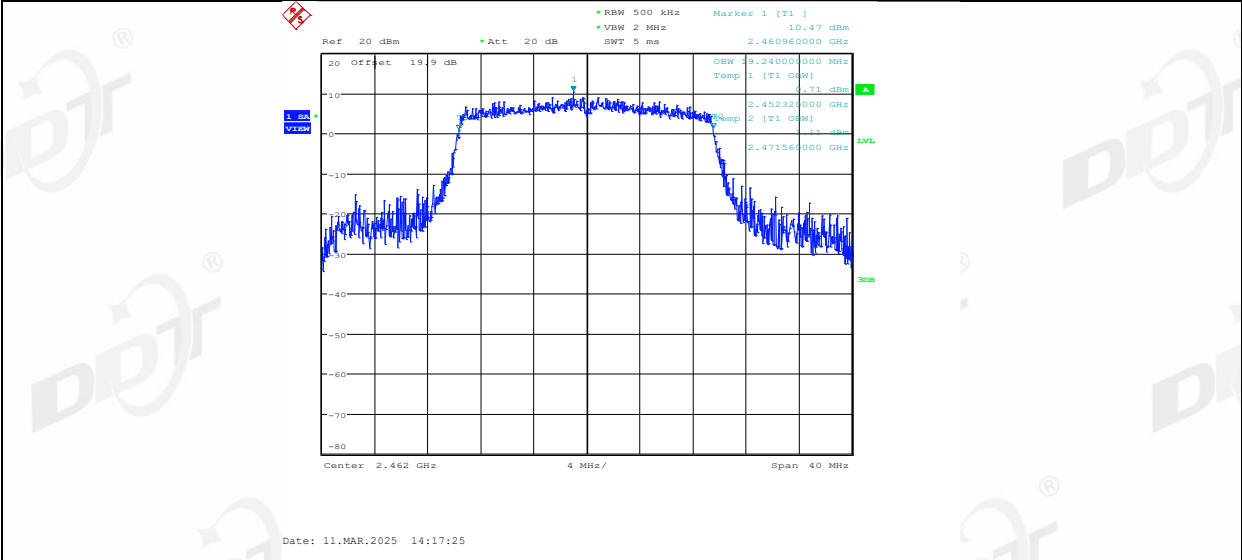


11AX20MIMO_Ant2_2462

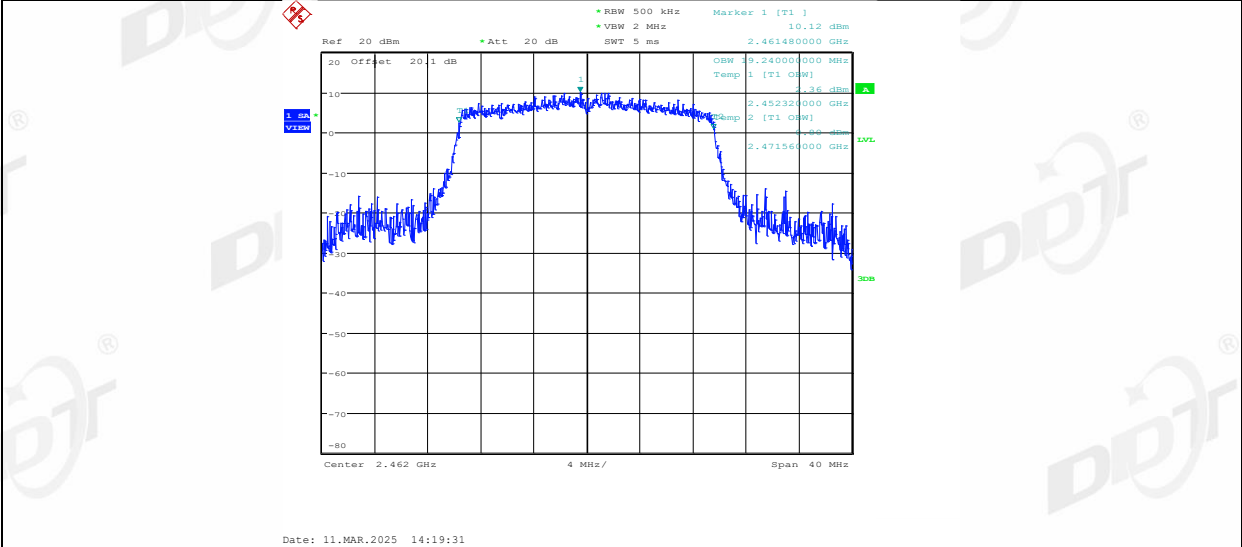


11AX40MIMO_Ant1_2422

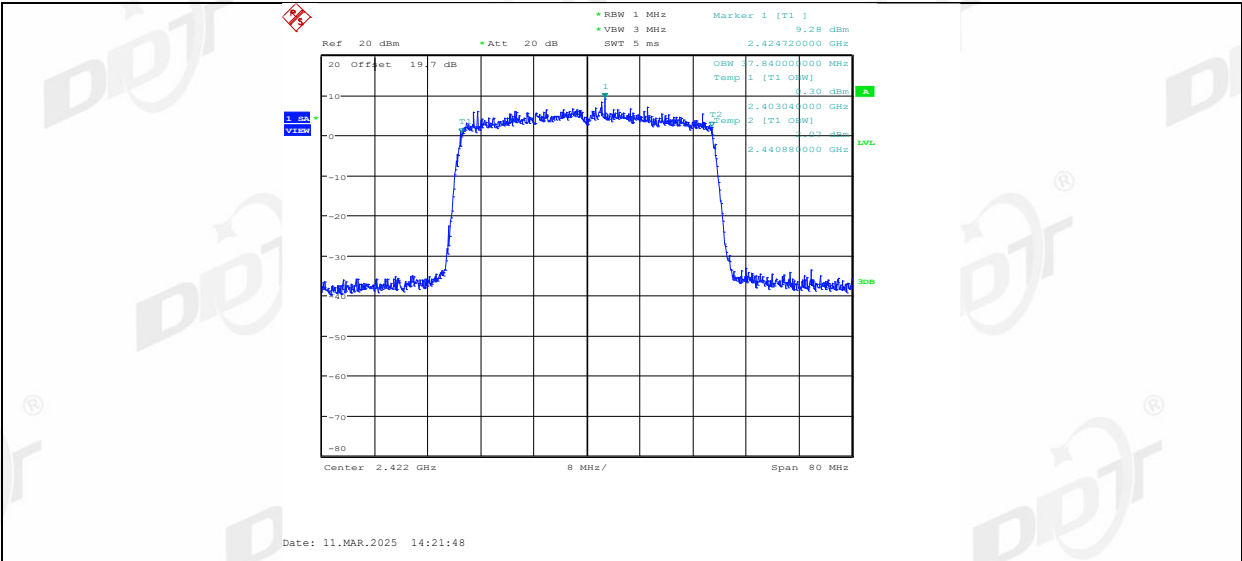


11AX40MIMO_Ant2_2422

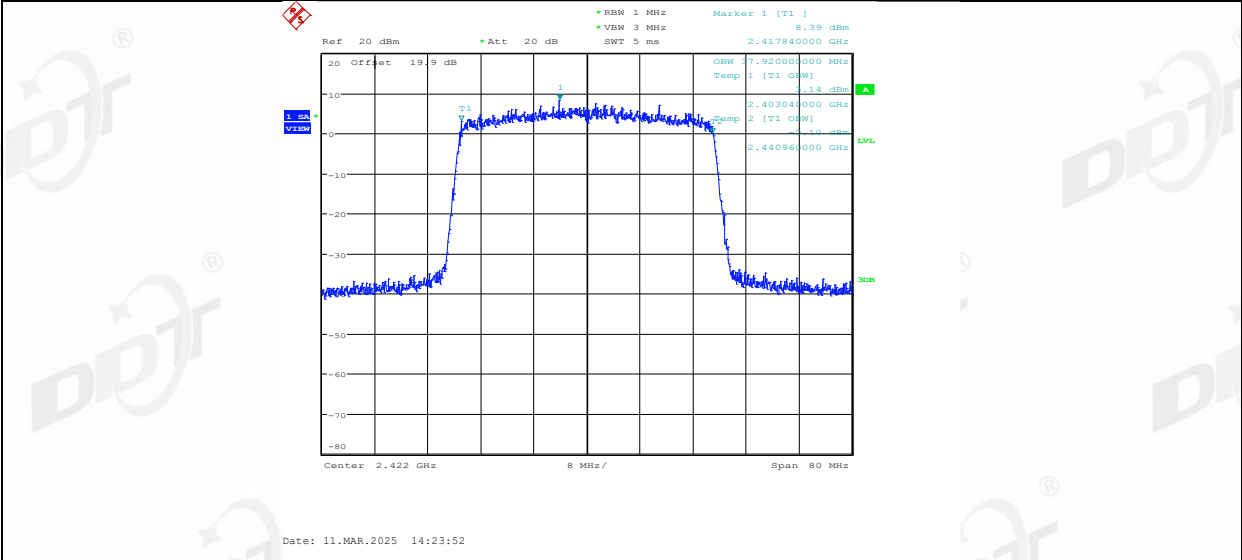


11AX40MIMO_Ant1_2437

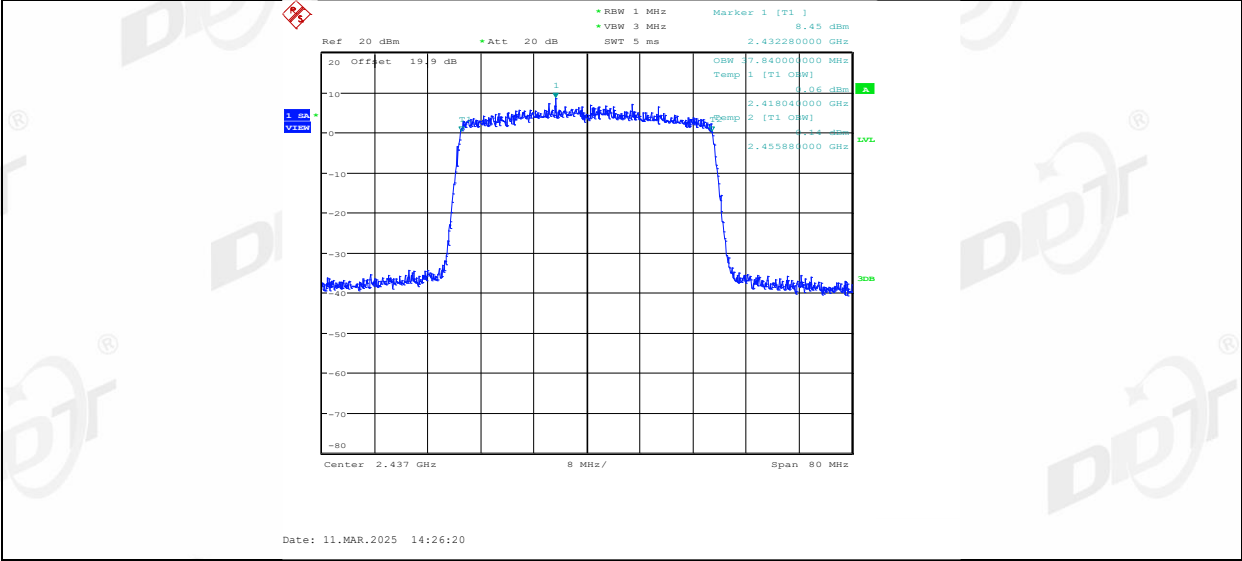


11AX40MIMO_Ant2_2437

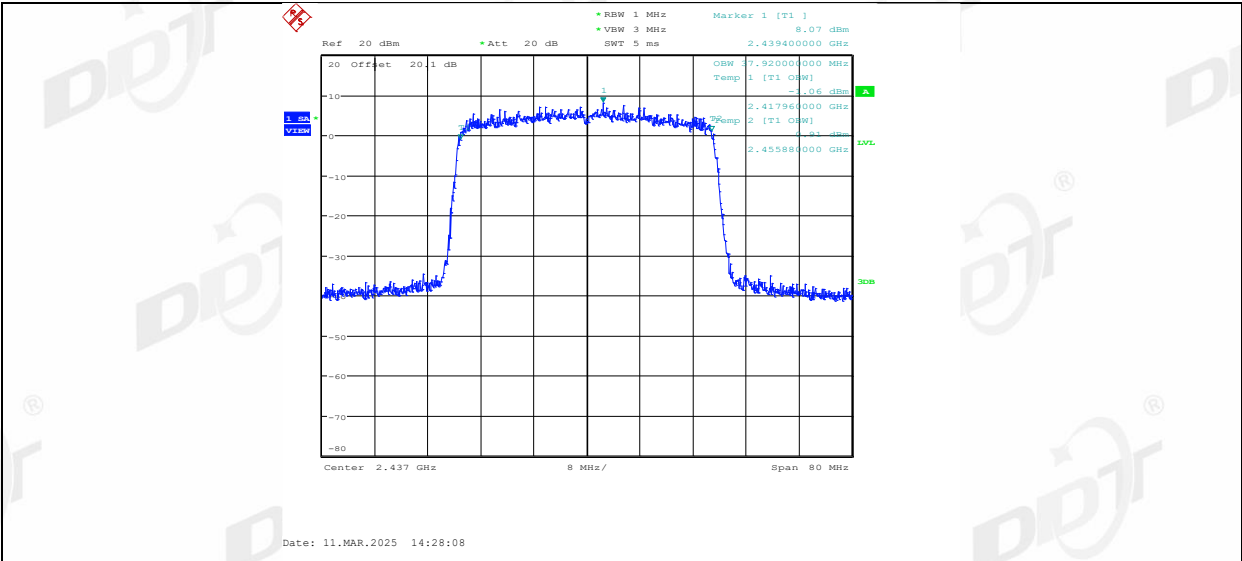

11AX40MIMO_Ant1_2452

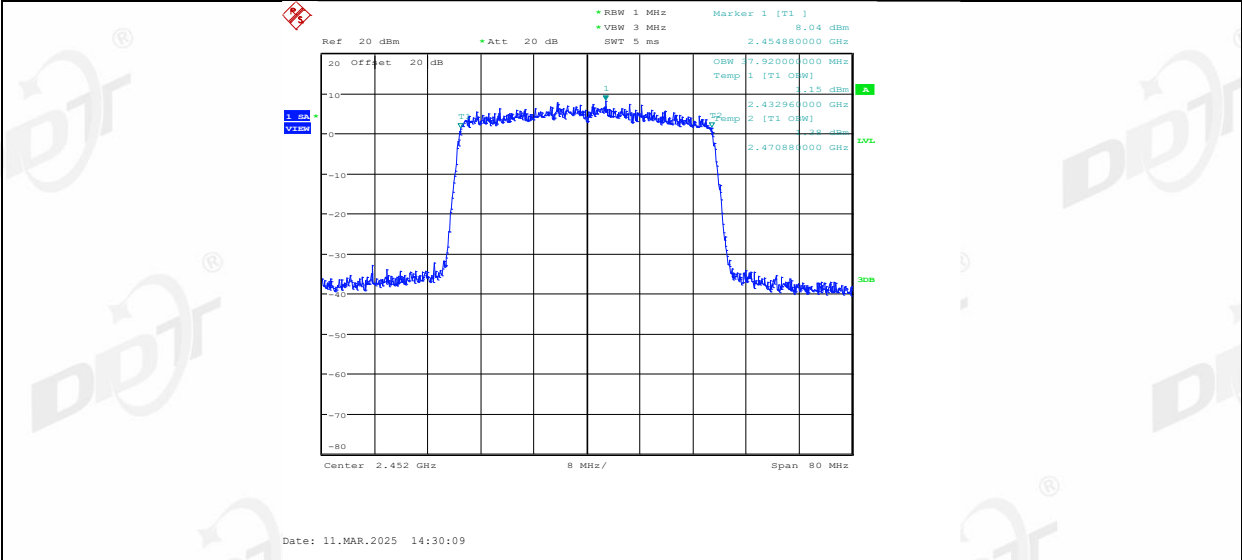


11AX40MIMO_Ant2_2452

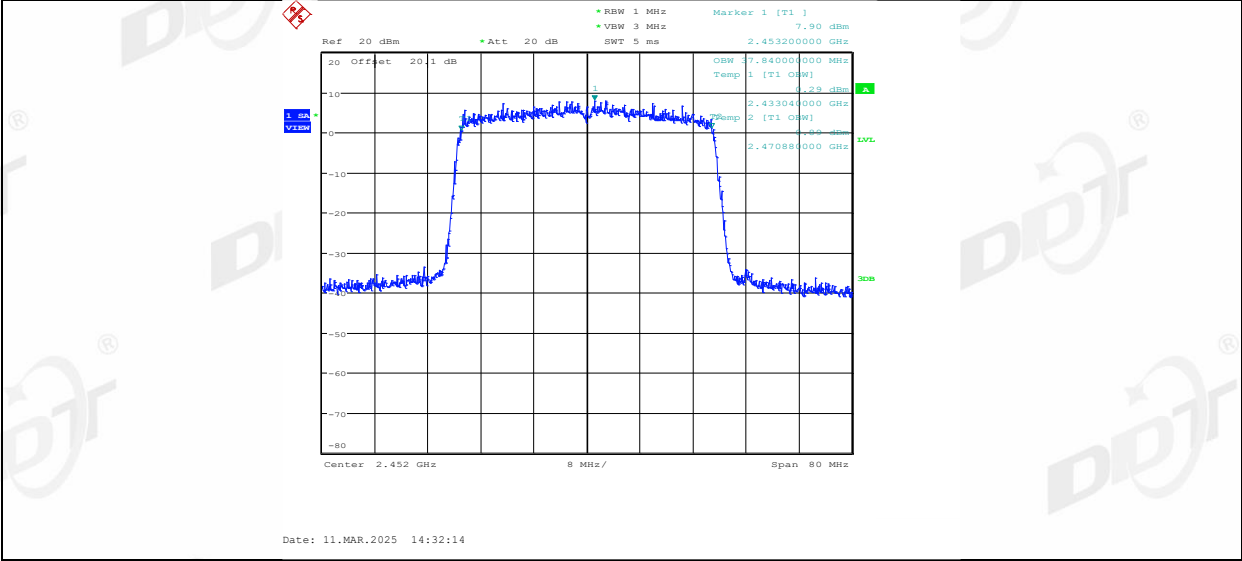

6. Conducted Output Power

6.1. Block diagram of test setup

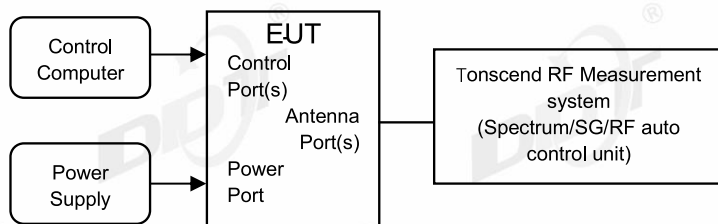

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.4℃,36.6%RH	Test Date:	2024.12.03-2025.03.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24111520-011

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	17.91	99.64	0.02	17.93	≤30.00	20.24	≤36.00	PASS
	Ant2	2412	17.88	99.64	0.02	17.90	≤30.00	20.29	≤36.00	PASS
	Ant1	2437	17.76	99.64	0.02	17.78	≤30.00	20.09	≤36.00	PASS
	Ant2	2437	17.90	99.64	0.02	17.92	≤30.00	20.31	≤36.00	PASS
	Ant1	2462	17.79	99.64	0.02	17.81	≤30.00	20.12	≤36.00	PASS
	Ant2	2462	17.93	99.52	0.02	17.95	≤30.00	20.34	≤36.00	PASS
11G	Ant1	2412	16.62	97.22	0.12	16.74	≤30.00	19.05	≤36.00	PASS
	Ant2	2412	16.49	97.22	0.12	16.61	≤30.00	19.00	≤36.00	PASS
	Ant1	2437	16.28	97.22	0.12	16.40	≤30.00	18.71	≤36.00	PASS
	Ant2	2437	16.64	97.22	0.12	16.76	≤30.00	19.15	≤36.00	PASS
	Ant1	2462	16.63	97.90	0.09	16.72	≤30.00	19.03	≤36.00	PASS
	Ant2	2462	16.93	97.22	0.12	17.05	≤30.00	19.44	≤36.00	PASS
11N20MIMO	Ant1	2412	13.51	95.77	0.19	13.70	≤30.00	16.01	≤36.00	PASS
	Ant2	2412	12.64	95.77	0.19	12.83	≤30.00	15.22	≤36.00	PASS
	total	2412	---	---	---	16.30	≤30.00	18.64	≤36.00	PASS
	Ant1	2437	13.32	95.77	0.19	13.51	≤30.00	15.82	≤36.00	PASS
	Ant2	2437	13.25	94.37	0.25	13.50	≤30.00	15.89	≤36.00	PASS
	total	2437	---	---	---	16.52	≤30.00	18.87	≤36.00	PASS
	Ant1	2462	13.55	95.77	0.19	13.74	≤30.00	16.05	≤36.00	PASS
	Ant2	2462	13.49	94.37	0.25	13.74	≤30.00	16.13	≤36.00	PASS
11N40MIMO	total	2462	---	---	---	16.75	≤30.00	19.10	≤36.00	PASS
	Ant1	2422	10.91	92.11	0.36	11.27	≤30.00	13.58	≤36.00	PASS
	Ant2	2422	11.29	92.11	0.36	11.65	≤30.00	14.04	≤36.00	PASS
	total	2422	---	---	---	14.47	≤30.00	16.83	≤36.00	PASS
	Ant1	2437	10.67	92.11	0.36	11.03	≤30.00	13.34	≤36.00	PASS
	Ant2	2437	10.52	89.74	0.47	10.99	≤30.00	13.38	≤36.00	PASS
	total	2437	---	---	---	14.02	≤30.00	16.37	≤36.00	PASS
	Ant1	2452	10.72	89.74	0.47	11.19	≤30.00	13.50	≤36.00	PASS
11AX20MIMO	Ant2	2452	11.00	89.74	0.47	11.47	≤30.00	13.86	≤36.00	PASS
	total	2452	---	---	---	14.34	≤30.00	16.69	≤36.00	PASS
	Ant1	2412	13.86	96.23	0.17	14.03	≤30.00	16.34	≤36.00	PASS
	Ant2	2412	12.97	96.23	0.17	13.14	≤30.00	15.53	≤36.00	PASS
	total	2412	---	---	---	16.62	≤30.00	18.96	≤36.00	PASS
	Ant1	2437	13.76	97.14	0.13	13.89	≤30.00	16.20	≤36.00	PASS
	Ant2	2437	12.99	96.23	0.17	13.16	≤30.00	15.55	≤36.00	PASS
	total	2437	---	---	---	16.55	≤30.00	18.90	≤36.00	PASS
11AX40MIMO	Ant1	2462	14.06	96.23	0.17	14.23	≤30.00	16.54	≤36.00	PASS
	Ant2	2462	13.38	96.23	0.17	13.55	≤30.00	15.94	≤36.00	PASS
	total	2462	---	---	---	16.91	≤30.00	19.26	≤36.00	PASS
	Ant1	2422	11.61	94.74	0.23	11.84	≤30.00	14.15	≤36.00	PASS
	Ant2	2422	10.82	92.98	0.32	11.14	≤30.00	13.53	≤36.00	PASS
	total	2422	---	---	---	14.51	≤30.00	16.86	≤36.00	PASS
	Ant1	2437	11.30	94.74	0.23	11.53	≤30.00	13.84	≤36.00	PASS
	Ant2	2437	11.32	92.98	0.32	11.64	≤30.00	14.03	≤36.00	PASS
11AX20MIMO	total	2437	---	---	---	14.60	≤30.00	16.95	≤36.00	PASS
	Ant1	2452	11.20	92.98	0.32	11.52	≤30.00	13.83	≤36.00	PASS
	Ant2	2452	11.17	92.98	0.32	11.49	≤30.00	13.88	≤36.00	PASS
	total	2452	---	---	---	14.52	≤30.00	16.87	≤36.00	PASS


Test Mode	Antenna	Frequency [MHz]	Ru Size	Ru Index	Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20MIMO	Ant1	2412	26Tone	RU0	11.97	≤30.00	14.28	≤36.00	PASS
				RU4	12.18	≤30.00	14.49	≤36.00	PASS
				RU8	12.19	≤30.00	14.50	≤36.00	PASS
			52Tone	RU37	12.19	≤30.00	14.50	≤36.00	PASS
				RU39	12.26	≤30.00	14.57	≤36.00	PASS
				RU40	12.32	≤30.00	14.63	≤36.00	PASS
			106Tone	RU53	12.13	≤30.00	14.44	≤36.00	PASS
				RU54	12.07	≤30.00	14.38	≤36.00	PASS
				RU0	12.01	≤30.00	14.40	≤36.00	PASS
	Ant2	2412	26Tone	RU4	12.14	≤30.00	14.53	≤36.00	PASS
				RU8	11.66	≤30.00	14.05	≤36.00	PASS
				RU37	11.35	≤30.00	13.74	≤36.00	PASS
			52Tone	RU39	12.01	≤30.00	14.40	≤36.00	PASS
				RU40	12.18	≤30.00	14.57	≤36.00	PASS
				RU53	12.08	≤30.00	14.47	≤36.00	PASS
			106Tone	RU54	12.10	≤30.00	14.49	≤36.00	PASS
				RU0	15.00	≤30.00	17.35	≤36.00	PASS
	total	2412	26Tone	RU4	15.17	≤30.00	17.52	≤36.00	PASS
				RU8	14.94	≤30.00	17.29	≤36.00	PASS
				RU37	14.80	≤30.00	17.15	≤36.00	PASS
			52Tone	RU39	15.15	≤30.00	17.50	≤36.00	PASS
				RU40	15.26	≤30.00	17.61	≤36.00	PASS
				RU53	15.12	≤30.00	17.47	≤36.00	PASS
			106Tone	RU54	15.10	≤30.00	17.45	≤36.00	PASS
	Ant1	2437	26Tone	RU0	11.97	≤30.00	14.28	≤36.00	PASS
				RU4	12.09	≤30.00	14.40	≤36.00	PASS
				RU8	11.92	≤30.00	14.23	≤36.00	PASS
			52Tone	RU37	12.20	≤30.00	14.51	≤36.00	PASS
				RU39	12.18	≤30.00	14.49	≤36.00	PASS
				RU40	12.09	≤30.00	14.40	≤36.00	PASS
			106Tone	RU53	11.89	≤30.00	14.20	≤36.00	PASS
				RU54	11.81	≤30.00	14.12	≤36.00	PASS
	Ant2	2437	26Tone	RU0	11.90	≤30.00	14.29	≤36.00	PASS
				RU4	12.13	≤30.00	14.52	≤36.00	PASS
				RU8	11.98	≤30.00	14.37	≤36.00	PASS
			52Tone	RU37	11.93	≤30.00	14.32	≤36.00	PASS
				RU39	11.78	≤30.00	14.17	≤36.00	PASS
				RU40	12.04	≤30.00	14.43	≤36.00	PASS
			106Tone	RU53	11.83	≤30.00	14.22	≤36.00	PASS
				RU54	12.01	≤30.00	14.40	≤36.00	PASS
	total	2437	26Tone	RU0	14.95	≤30.00	17.30	≤36.00	PASS
				RU4	15.12	≤30.00	17.47	≤36.00	PASS
				RU8	14.96	≤30.00	17.31	≤36.00	PASS
			52Tone	RU37	15.08	≤30.00	17.43	≤36.00	PASS
				RU39	14.99	≤30.00	17.34	≤36.00	PASS
				RU40	15.08	≤30.00	17.43	≤36.00	PASS
			106Tone	RU53	14.87	≤30.00	17.22	≤36.00	PASS
				RU54	14.92	≤30.00	17.27	≤36.00	PASS
	Ant1	2462	26Tone	RU0	12.19	≤30.00	14.50	≤36.00	PASS
				RU4	12.13	≤30.00	14.44	≤36.00	PASS
				RU8	12.24	≤30.00	14.55	≤36.00	PASS
			52Tone	RU37	12.05	≤30.00	14.36	≤36.00	PASS
				RU39	12.17	≤30.00	14.48	≤36.00	PASS
				RU40	12.10	≤30.00	14.41	≤36.00	PASS
			106Tone	RU53	12.10	≤30.00	14.41	≤36.00	PASS
				RU54	11.91	≤30.00	14.22	≤36.00	PASS
	Ant2	2462	26Tone	RU0	12.16	≤30.00	14.55	≤36.00	PASS
				RU4	12.12	≤30.00	14.51	≤36.00	PASS
				RU8	12.09	≤30.00	14.48	≤36.00	PASS
			52Tone	RU37	12.07	≤30.00	14.46	≤36.00	PASS
				RU39	12.21	≤30.00	14.60	≤36.00	PASS

			106Tone	RU40	12.12	≤30.00	14.51	≤36.00	PASS
				RU53	11.72	≤30.00	14.11	≤36.00	PASS
				RU54	12.10	≤30.00	14.49	≤36.00	PASS
	total	2462	26Tone	RU0	15.19	≤30.00	17.54	≤36.00	PASS
				RU4	15.14	≤30.00	17.49	≤36.00	PASS
				RU8	15.18	≤30.00	17.53	≤36.00	PASS
			52Tone	RU37	15.07	≤30.00	17.42	≤36.00	PASS
				RU39	15.20	≤30.00	17.55	≤36.00	PASS
				RU40	15.12	≤30.00	17.47	≤36.00	PASS
			106Tone	RU53	14.92	≤30.00	17.27	≤36.00	PASS
				RU54	15.02	≤30.00	17.37	≤36.00	PASS
				RU61	14.46	≤30.00	16.77	≤36.00	PASS
11AX40MIMO	Ant1	2422	242Tone	RU62	14.49	≤30.00	16.80	≤36.00	PASS
				RU61	13.57	≤30.00	15.96	≤36.00	PASS
	Ant2	2422	242Tone	RU62	13.47	≤30.00	15.86	≤36.00	PASS
				RU61	17.05	≤30.00	19.39	≤36.00	PASS
	total	2422	242Tone	RU62	17.02	≤30.00	19.37	≤36.00	PASS
				RU61	14.43	≤30.00	16.74	≤36.00	PASS
	Ant1	2437	242Tone	RU62	14.14	≤30.00	16.45	≤36.00	PASS
				RU61	14.13	≤30.00	16.52	≤36.00	PASS
	Ant2	2437	242Tone	RU62	14.07	≤30.00	16.46	≤36.00	PASS
				RU61	17.29	≤30.00	19.64	≤36.00	PASS
	total	2437	242Tone	RU62	17.12	≤30.00	19.47	≤36.00	PASS
				RU61	14.49	≤30.00	16.80	≤36.00	PASS
	Ant1	2452	242Tone	RU62	14.11	≤30.00	16.42	≤36.00	PASS
				RU61	14.35	≤30.00	16.74	≤36.00	PASS
	Ant2	2452	242Tone	RU62	14.10	≤30.00	16.49	≤36.00	PASS
				RU61	17.43	≤30.00	19.78	≤36.00	PASS
	total	2452	242Tone	RU62	17.12	≤30.00	19.47	≤36.00	PASS
				RU61	17.12	≤30.00	19.47	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

7. Power Spectral Density

7.1. Block diagram of test setup

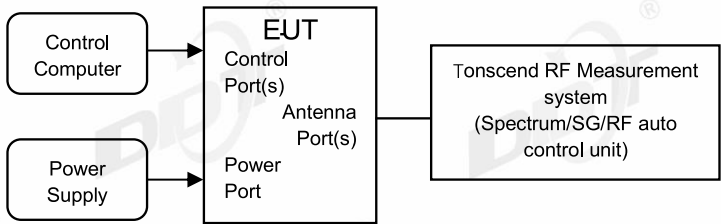

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.

- (5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.4. Test result

Test Engineer:	Zora Zhang	Test Site:	RF Measurement System 1#
Ambient Condition:	23.4℃,36.6%RH	Test Date:	2024.12.03-2025.03.11
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24111520-011


Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.48	≤8.00	PASS
	Ant2	2412	-6.44	≤8.00	PASS
	Ant1	2437	-8.77	≤8.00	PASS
	Ant2	2437	-9.65	≤8.00	PASS
	Ant1	2462	-8.57	≤8.00	PASS
	Ant2	2462	-9.17	≤8.00	PASS
11G	Ant1	2412	-11.23	≤8.00	PASS
	Ant2	2412	-11.55	≤8.00	PASS
	Ant1	2437	-11.80	≤8.00	PASS
	Ant2	2437	-11.59	≤8.00	PASS
	Ant1	2462	-11.70	≤8.00	PASS
	Ant2	2462	-11.81	≤8.00	PASS
11N20MIMO	Ant1	2412	-13.93	≤8.00	PASS
	Ant2	2412	-13.83	≤8.00	PASS
	total	2412	-10.87	≤8.00	PASS
	Ant1	2437	-13.75	≤8.00	PASS
	Ant2	2437	-13.65	≤8.00	PASS
	total	2437	-10.69	≤8.00	PASS
	Ant1	2462	-14.64	≤8.00	PASS
	Ant2	2462	-13.20	≤8.00	PASS
	total	2462	-10.85	≤8.00	PASS
	Ant1	2422	-25.56	≤8.00	PASS
11N40MIMO	Ant2	2422	-24.71	≤8.00	PASS
	total	2422	-22.10	≤8.00	PASS
	Ant1	2437	-25.61	≤8.00	PASS
	Ant2	2437	-24.87	≤8.00	PASS
	total	2437	-22.21	≤8.00	PASS
	Ant1	2452	-25.00	≤8.00	PASS
	Ant2	2452	-24.58	≤8.00	PASS
	total	2452	-21.77	≤8.00	PASS
	Ant1	2412	-12.83	≤8.00	PASS
	Ant2	2412	-13.51	≤8.00	PASS
11AX20MIMO	total	2412	-10.15	≤8.00	PASS
	Ant1	2437	-13.50	≤8.00	PASS
	Ant2	2437	-13.37	≤8.00	PASS
	total	2437	-10.42	≤8.00	PASS
	Ant1	2462	-13.07	≤8.00	PASS
	Ant2	2462	-13.13	≤8.00	PASS
	total	2462	-10.09	≤8.00	PASS
	Ant1	2422	-26.08	≤8.00	PASS
	Ant2	2422	-25.94	≤8.00	PASS
	total	2422	-23.00	≤8.00	PASS
11AX40MIMO	Ant1	2437	-26.01	≤8.00	PASS
	Ant2	2437	-25.99	≤8.00	PASS
	total	2437	-22.99	≤8.00	PASS
	Ant1	2452	-26.13	≤8.00	PASS
	Ant2	2452	-25.95	≤8.00	PASS
	total	2452	-23.03	≤8.00	PASS


Test Mode	Antenna	Frequency [MHz]	RuSize	RuIndex	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11AX20MIMO	Ant1	2412	26Tone	RU0	-14.40	≤8.00	PASS
				RU4	-12.59	≤8.00	PASS
				RU8	-13.21	≤8.00	PASS
			52Tone	RU37	-15.44	≤8.00	PASS
				RU39	-14.51	≤8.00	PASS
				RU40	-16.51	≤8.00	PASS
			106Tone	RU53	-18.14	≤8.00	PASS
				RU54	-18.73	≤8.00	PASS
	Ant2	2412	26Tone	RU0	-13.45	≤8.00	PASS
				RU4	-12.30	≤8.00	PASS
				RU8	-13.16	≤8.00	PASS
			52Tone	RU37	-15.57	≤8.00	PASS
				RU39	-14.90	≤8.00	PASS
				RU40	-15.63	≤8.00	PASS
			106Tone	RU53	-18.05	≤8.00	PASS
				RU54	-18.07	≤8.00	PASS
	total	2412	26Tone	RU0	-10.89	≤8.00	PASS
				RU4	-9.43	≤8.00	PASS
				RU8	-10.17	≤8.00	PASS
			52Tone	RU37	-12.49	≤8.00	PASS
				RU39	-11.69	≤8.00	PASS
				RU40	-13.04	≤8.00	PASS
			106Tone	RU53	-15.08	≤8.00	PASS
				RU54	-15.38	≤8.00	PASS
	Ant1	2437	26Tone	RU0	-13.27	≤8.00	PASS
				RU4	-13.39	≤8.00	PASS
				RU8	-13.43	≤8.00	PASS
			52Tone	RU37	-15.46	≤8.00	PASS
				RU39	-15.73	≤8.00	PASS
				RU40	-15.94	≤8.00	PASS
			106Tone	RU53	-17.68	≤8.00	PASS
				RU54	-18.58	≤8.00	PASS
	Ant2	2437	26Tone	RU0	-12.30	≤8.00	PASS
				RU4	-13.49	≤8.00	PASS
				RU8	-13.58	≤8.00	PASS
			52Tone	RU37	-15.27	≤8.00	PASS
				RU39	-16.29	≤8.00	PASS
				RU40	-16.27	≤8.00	PASS
			106Tone	RU53	-17.46	≤8.00	PASS
				RU54	-18.52	≤8.00	PASS
	total	2437	26Tone	RU0	-9.75	≤8.00	PASS
				RU4	-10.43	≤8.00	PASS
				RU8	-10.49	≤8.00	PASS
			52Tone	RU37	-12.35	≤8.00	PASS
				RU39	-12.99	≤8.00	PASS
				RU40	-13.09	≤8.00	PASS
			106Tone	RU53	-14.56	≤8.00	PASS
				RU54	-15.54	≤8.00	PASS
	Ant1	2462	26Tone	RU0	-13.12	≤8.00	PASS
				RU4	-13.14	≤8.00	PASS
				RU8	-13.78	≤8.00	PASS
			52Tone	RU37	-16.21	≤8.00	PASS
				RU39	-15.39	≤8.00	PASS
				RU40	-16.17	≤8.00	PASS
			106Tone	RU53	-18.49	≤8.00	PASS
				RU54	-18.40	≤8.00	PASS
	Ant2	2462	26Tone	RU0	-14.32	≤8.00	PASS
				RU4	-11.78	≤8.00	PASS
				RU8	-13.05	≤8.00	PASS
			52Tone	RU37	-15.40	≤8.00	PASS
				RU39	-15.53	≤8.00	PASS
			52Tone	RU39	-15.53	≤8.00	PASS
				RU40	-15.86	≤8.00	PASS

	total	2462	106Tone	RU53	-18.86	≤8.00	PASS
				RU54	-17.72	≤8.00	PASS
			26Tone	RU0	-10.67	≤8.00	PASS
				RU4	-9.40	≤8.00	PASS
				RU8	-10.39	≤8.00	PASS
			52Tone	RU37	-12.78	≤8.00	PASS
				RU39	-12.45	≤8.00	PASS
				RU40	-13.00	≤8.00	PASS
			106Tone	RU53	-15.66	≤8.00	PASS
				RU54	-15.04	≤8.00	PASS
11AX40MIMO	Ant1	2422	242Tone	RU61	-17.97	≤8.00	PASS
				RU62	-18.38	≤8.00	PASS
	Ant2	2422	242Tone	RU61	-18.29	≤8.00	PASS
				RU62	-19.35	≤8.00	PASS
	total	2422	242Tone	RU61	-15.12	≤8.00	PASS
				RU62	-15.83	≤8.00	PASS
	Ant1	2437	242Tone	RU61	-18.35	≤8.00	PASS
				RU62	-18.99	≤8.00	PASS
	Ant2	2437	242Tone	RU61	-18.96	≤8.00	PASS
				RU62	-17.94	≤8.00	PASS
	total	2437	242Tone	RU61	-15.63	≤8.00	PASS
				RU62	-15.42	≤8.00	PASS
	Ant1	2452	242Tone	RU61	-18.46	≤8.00	PASS
				RU62	-18.96	≤8.00	PASS
	Ant2	2452	242Tone	RU61	-18.20	≤8.00	PASS
				RU62	-18.50	≤8.00	PASS
	total	2452	242Tone	RU61	-15.32	≤8.00	PASS
				RU62	-15.71	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.

7.5. Test graphs

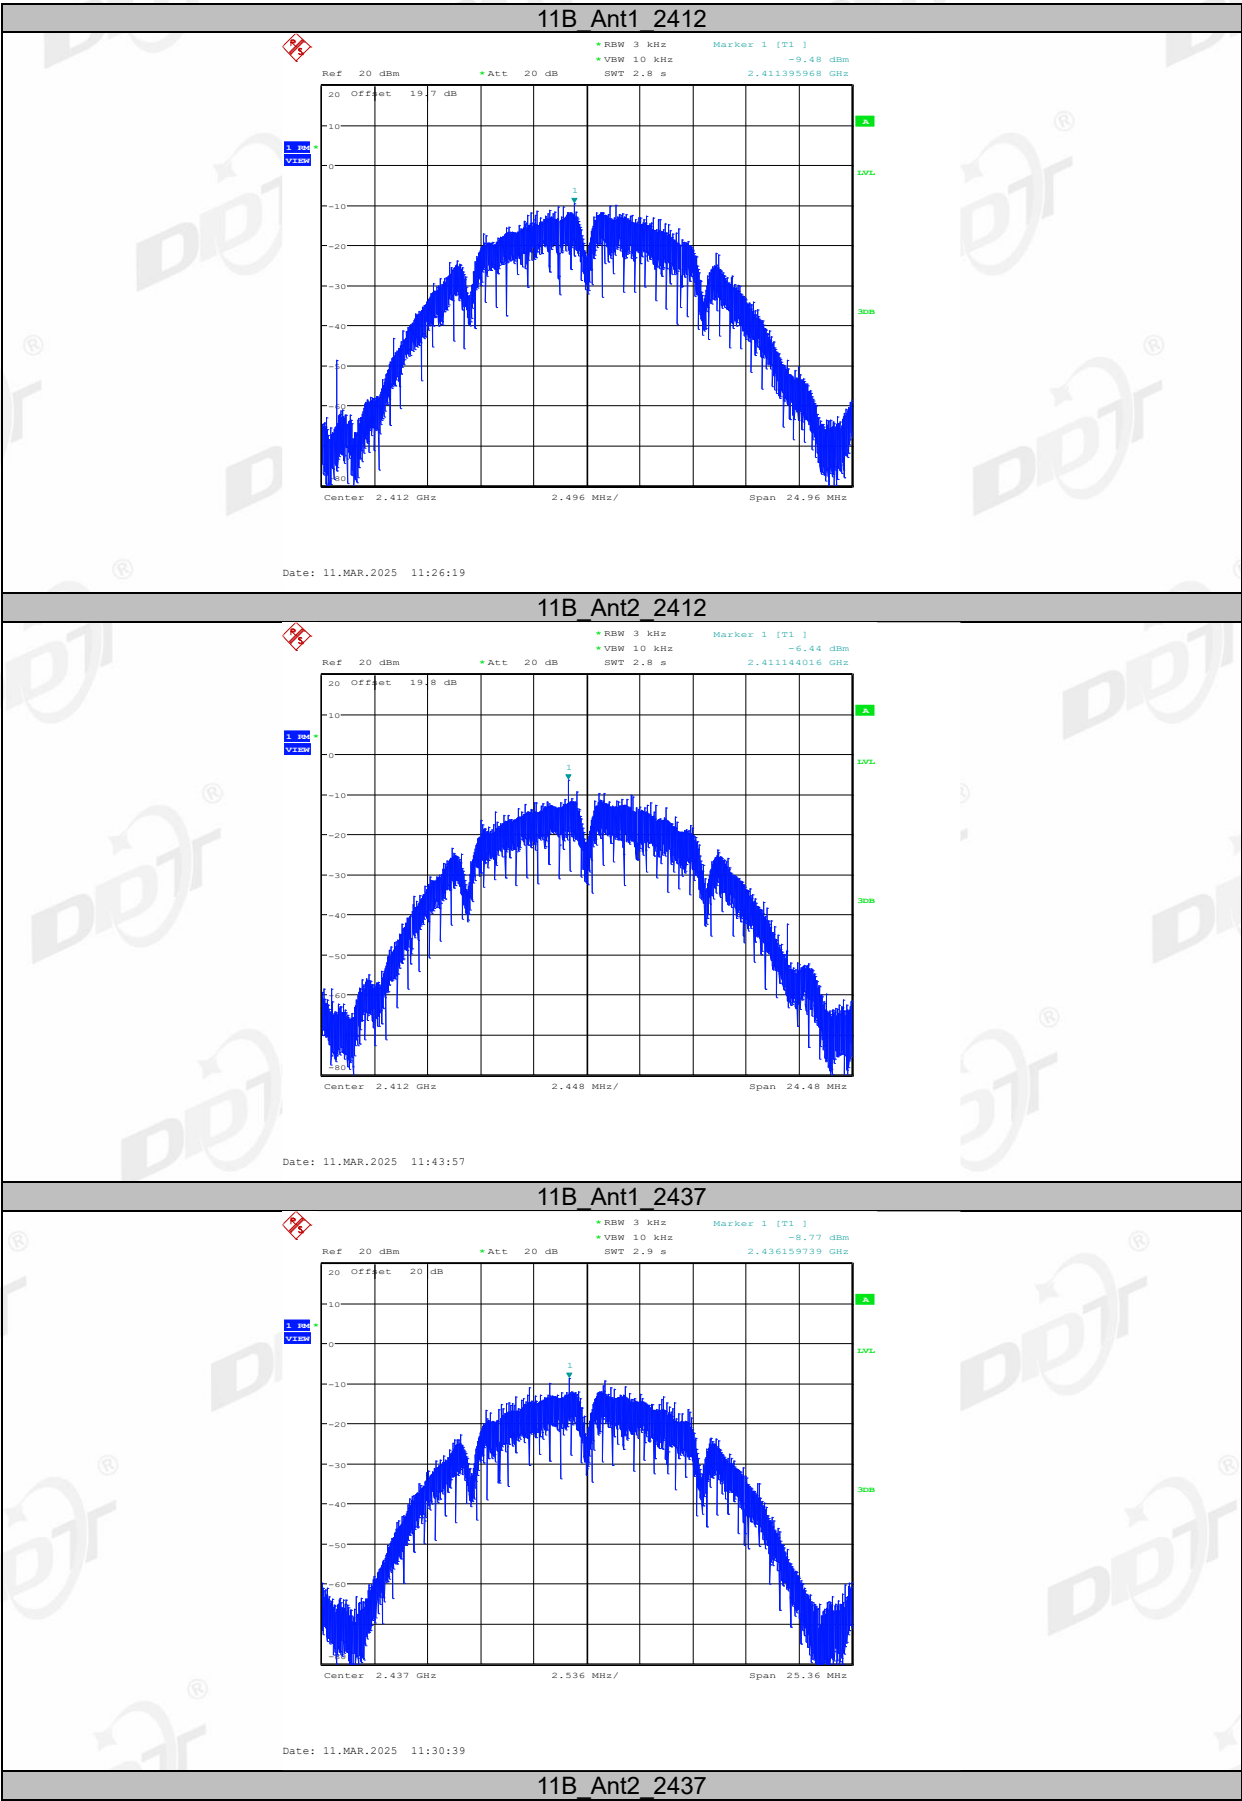


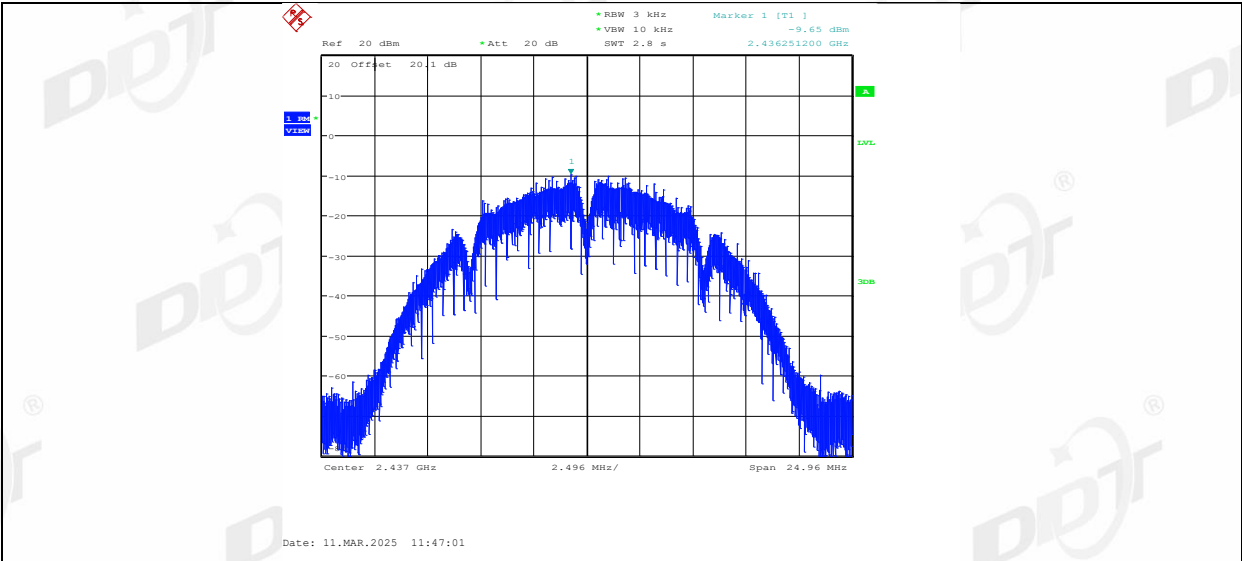


11B_Ant1_2462

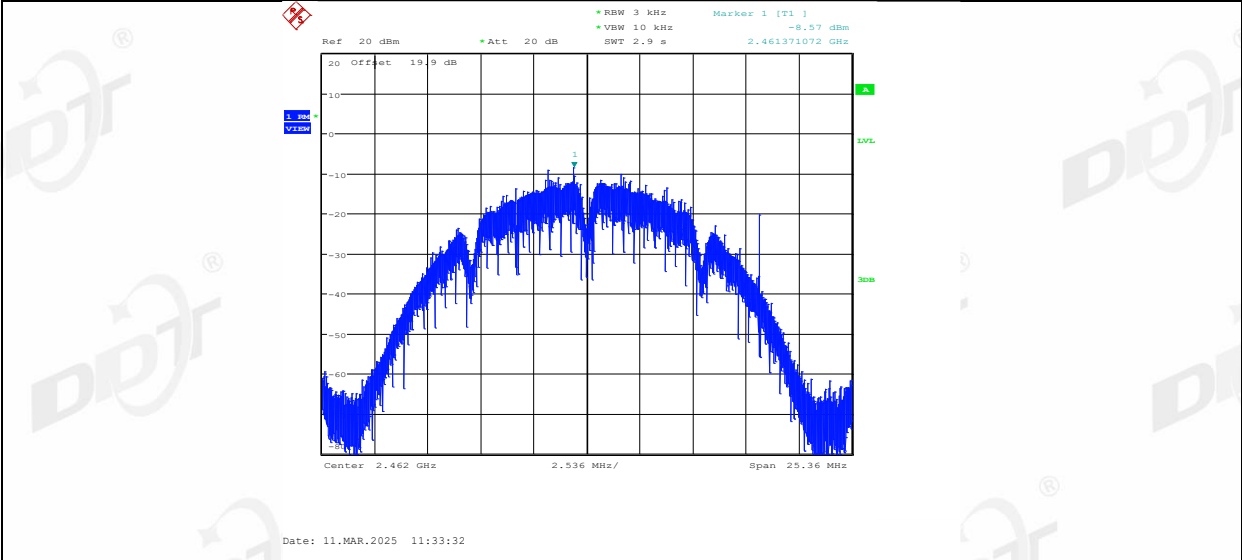


11B_Ant2_2462

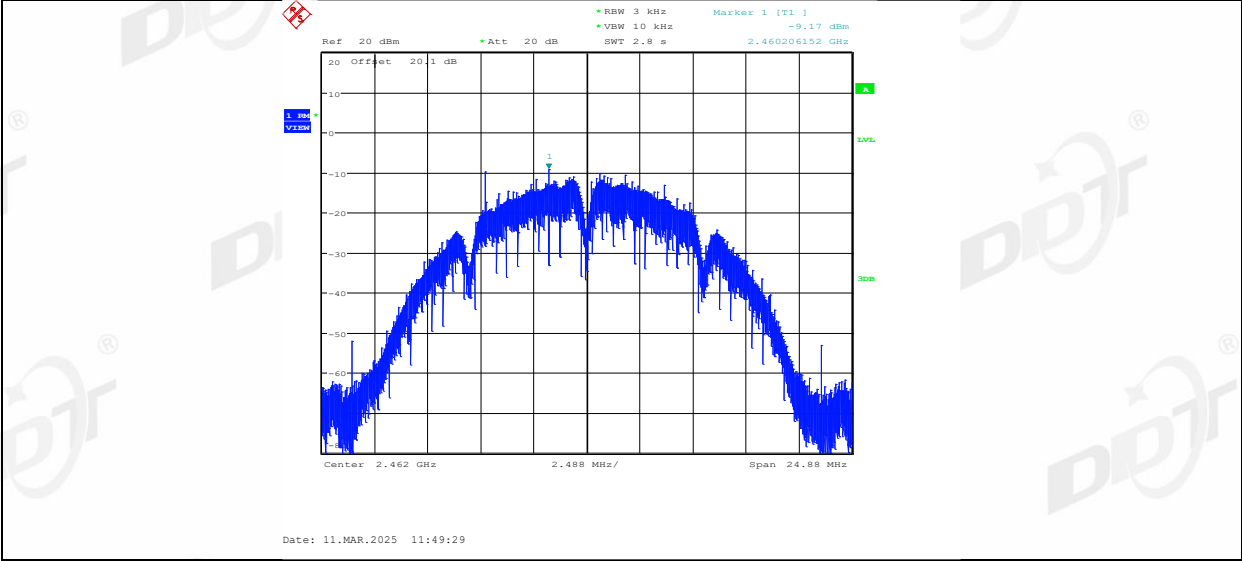


11G_Ant1_2412

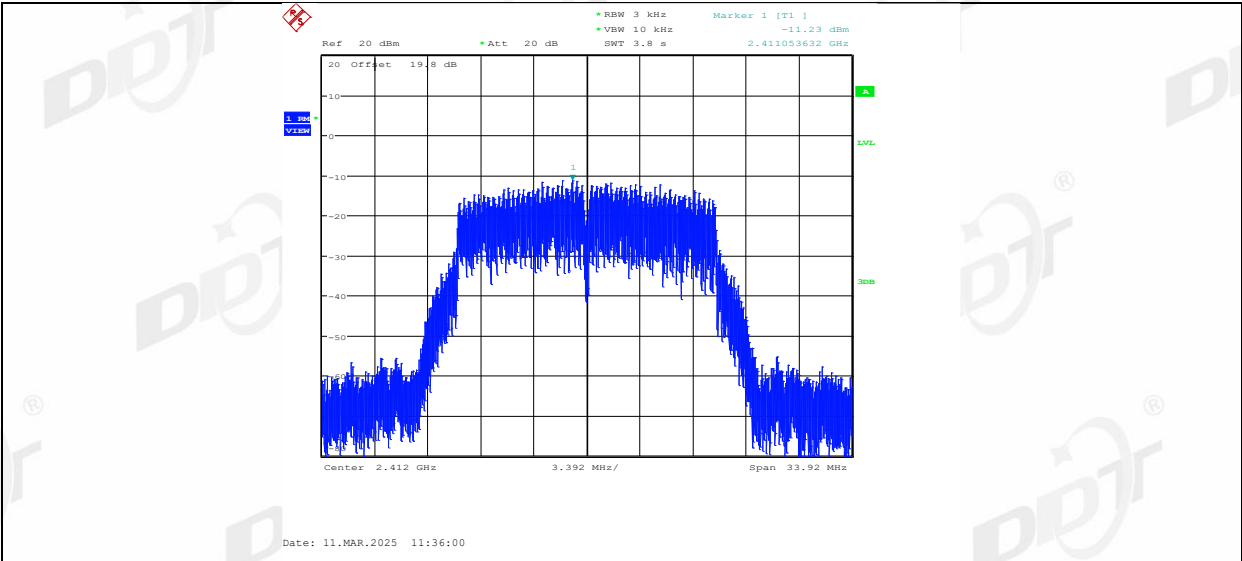


11G_Ant2_2412

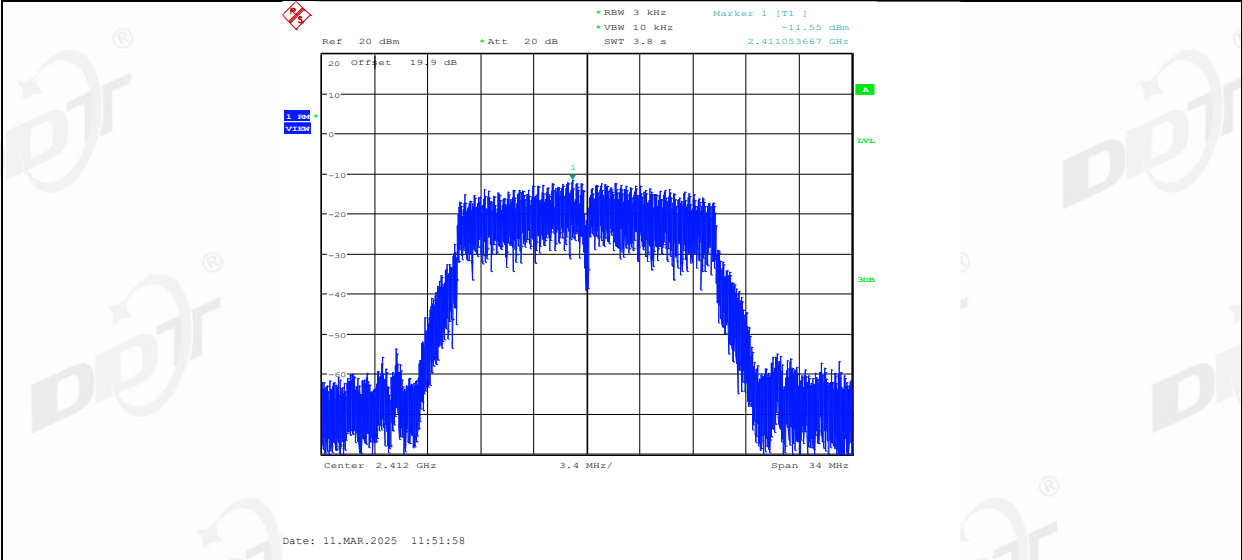


11G_Ant1_2437

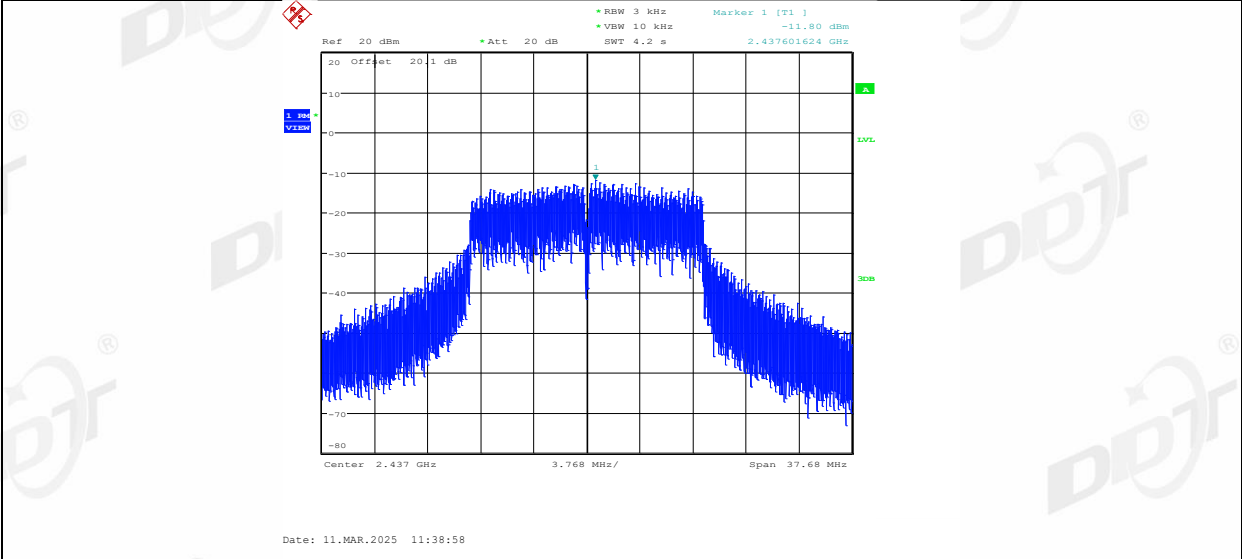


11G_Ant2_2437

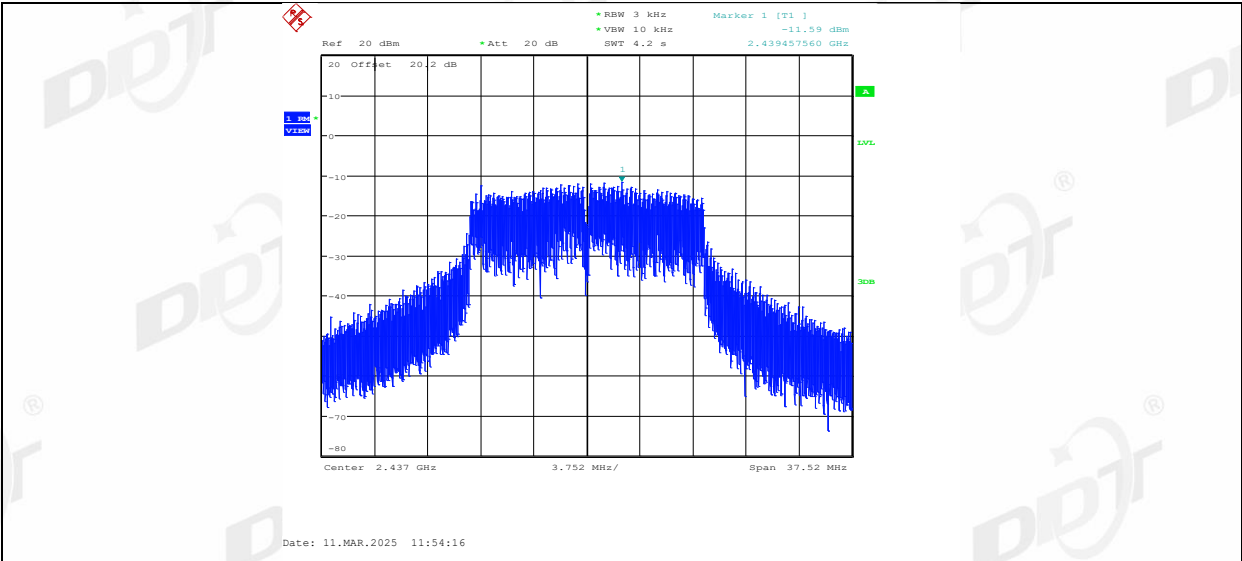


11G_Ant1_2462

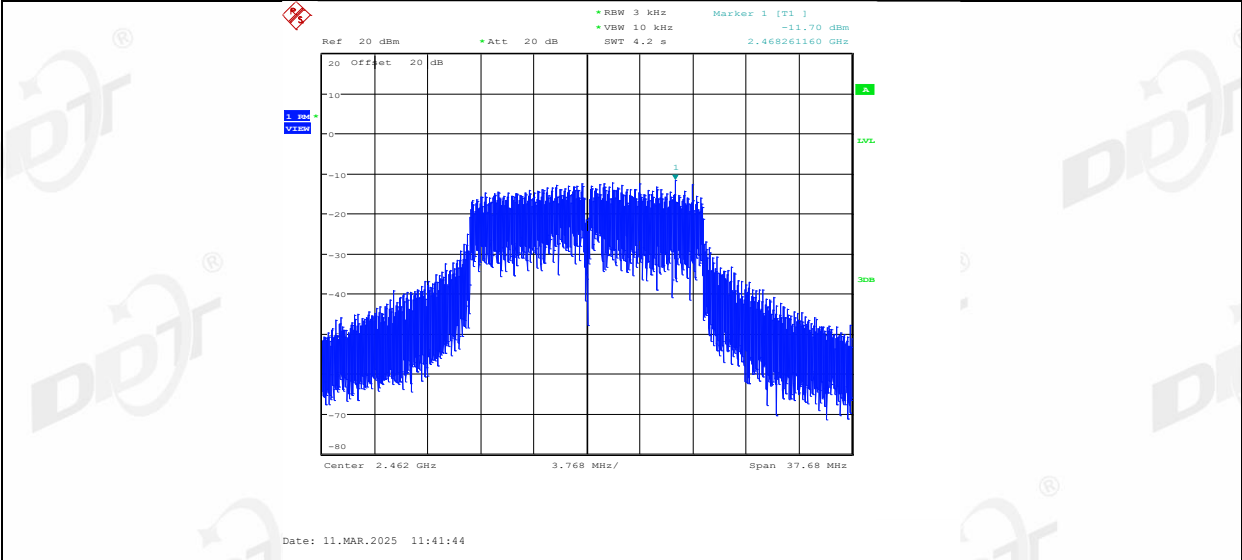


11G_Ant2_2462

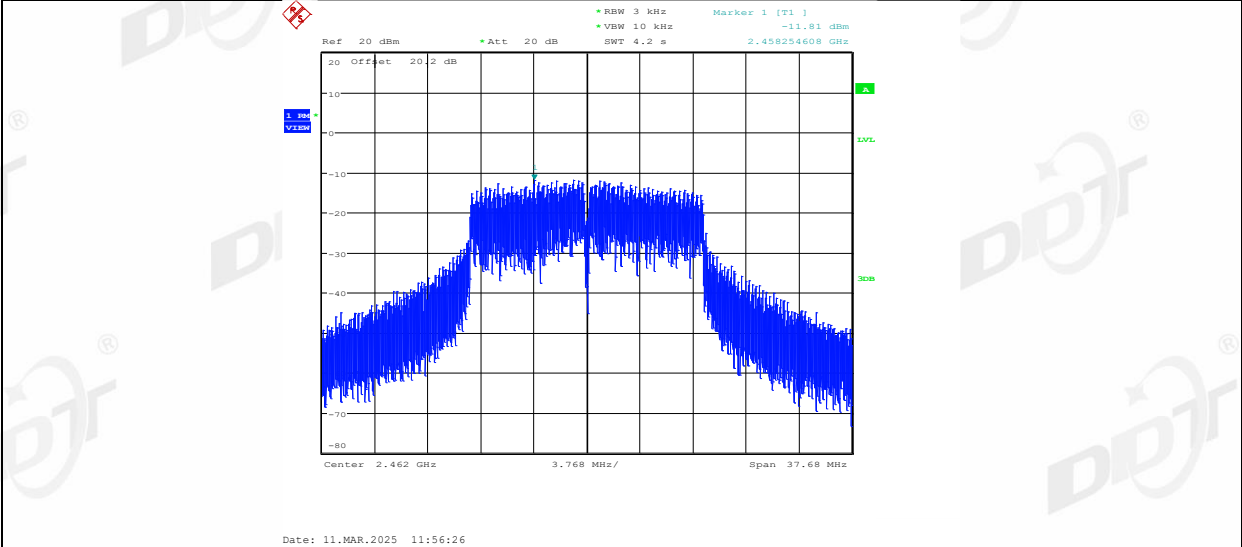


11N20MIMO_Ant1_2412

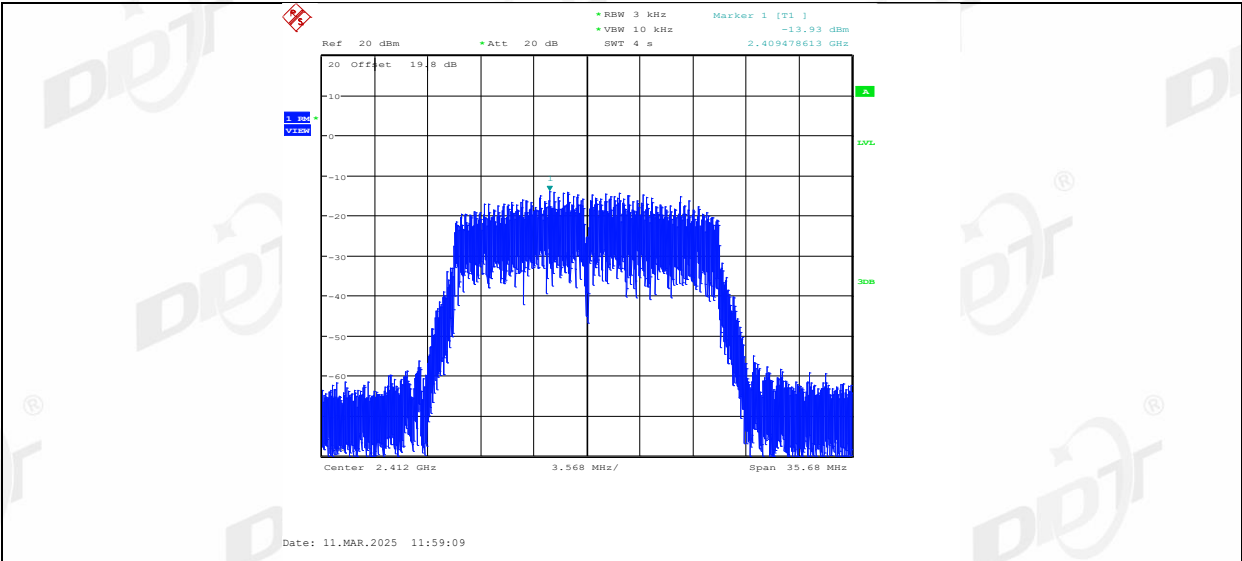


11N20MIMO_Ant2_2412

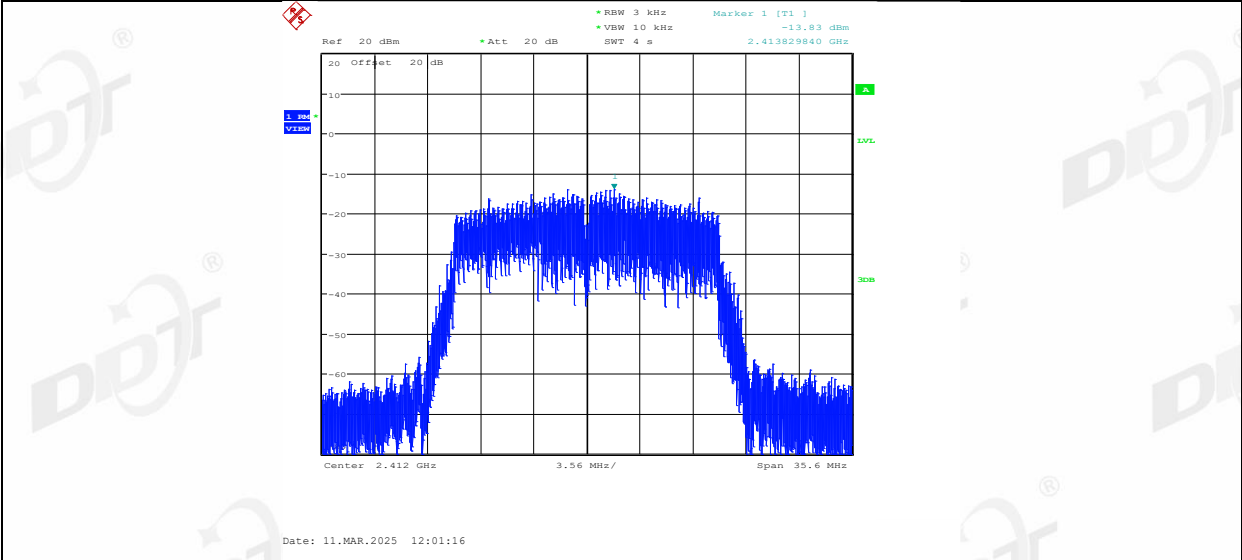


11N20MIMO_Ant1_2437

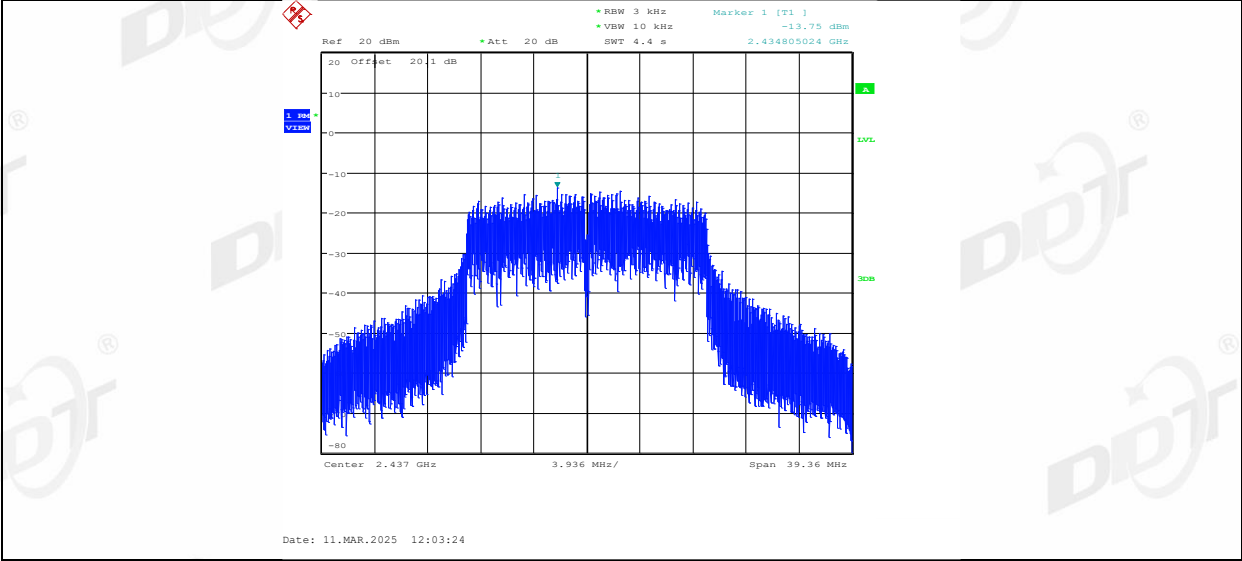


11N20MIMO_Ant2_2437

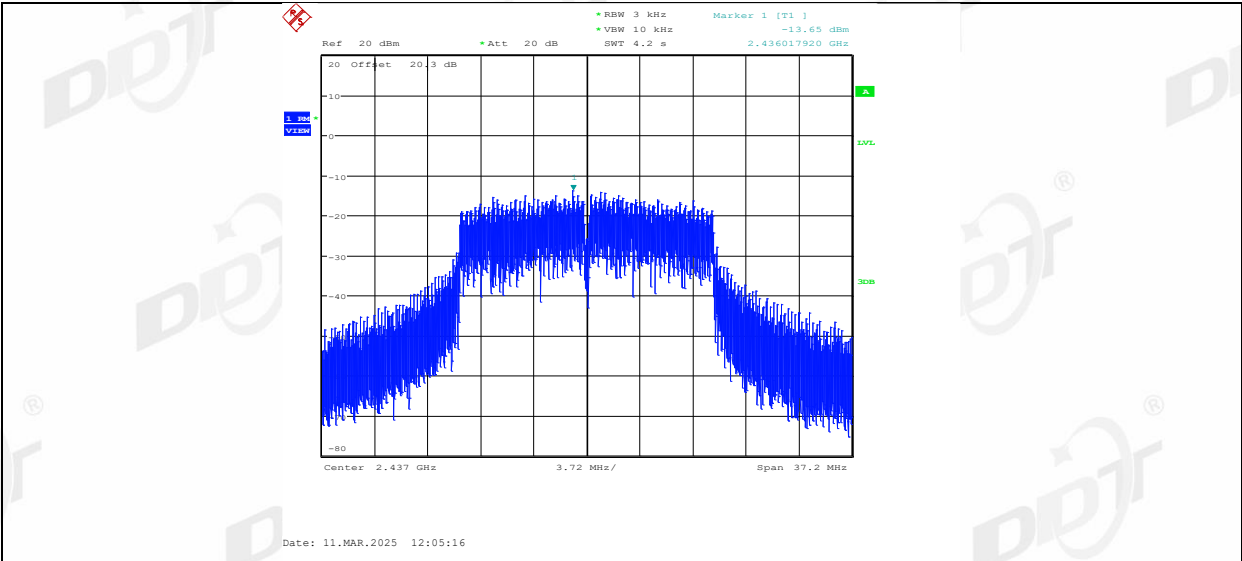


11N20MIMO_Ant1_2462

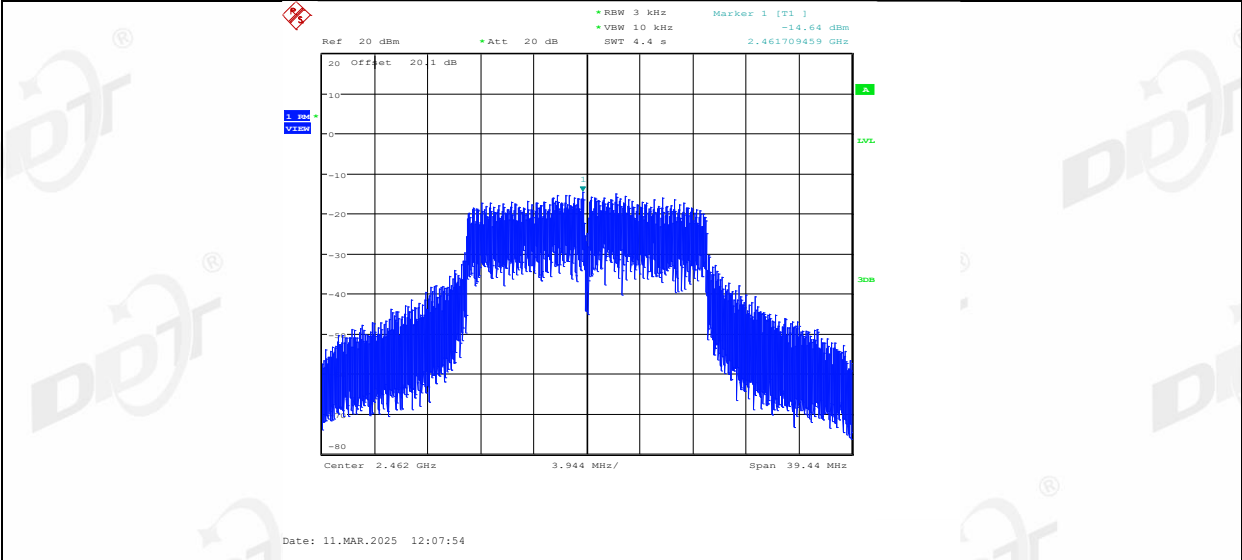


11N20MIMO_Ant2_2462

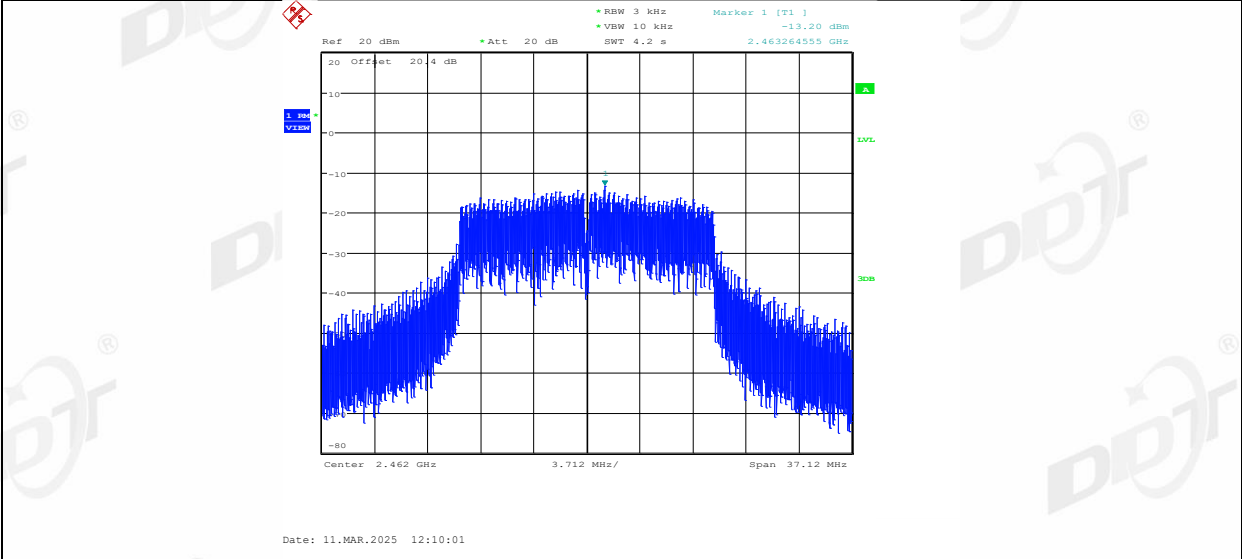


11N40MIMO_Ant1_2422

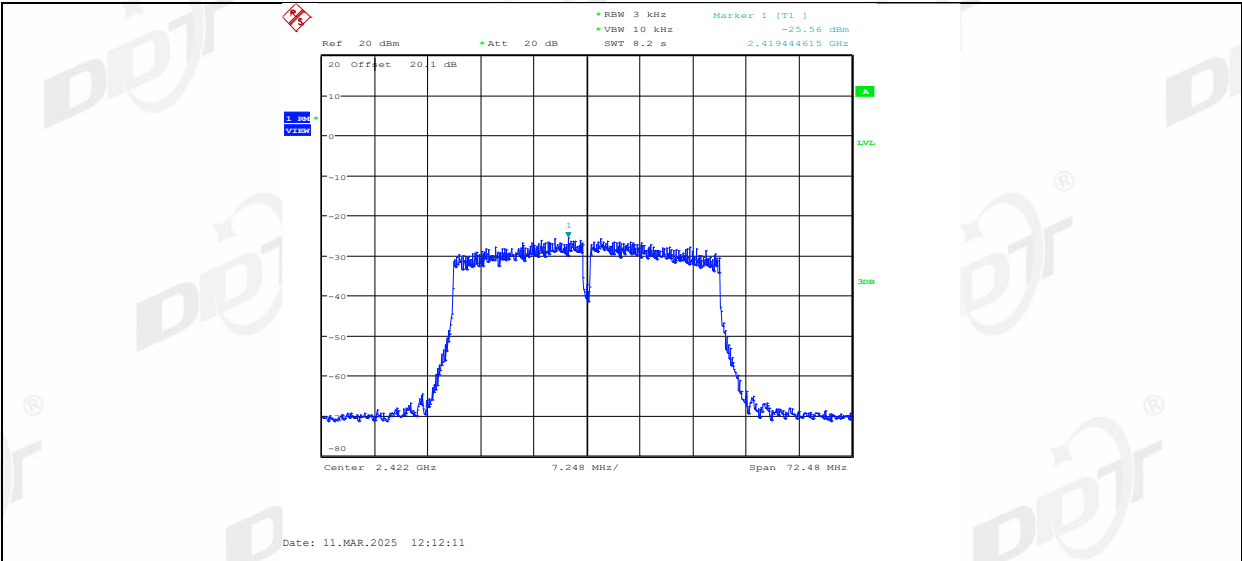


11N40MIMO_Ant2_2422

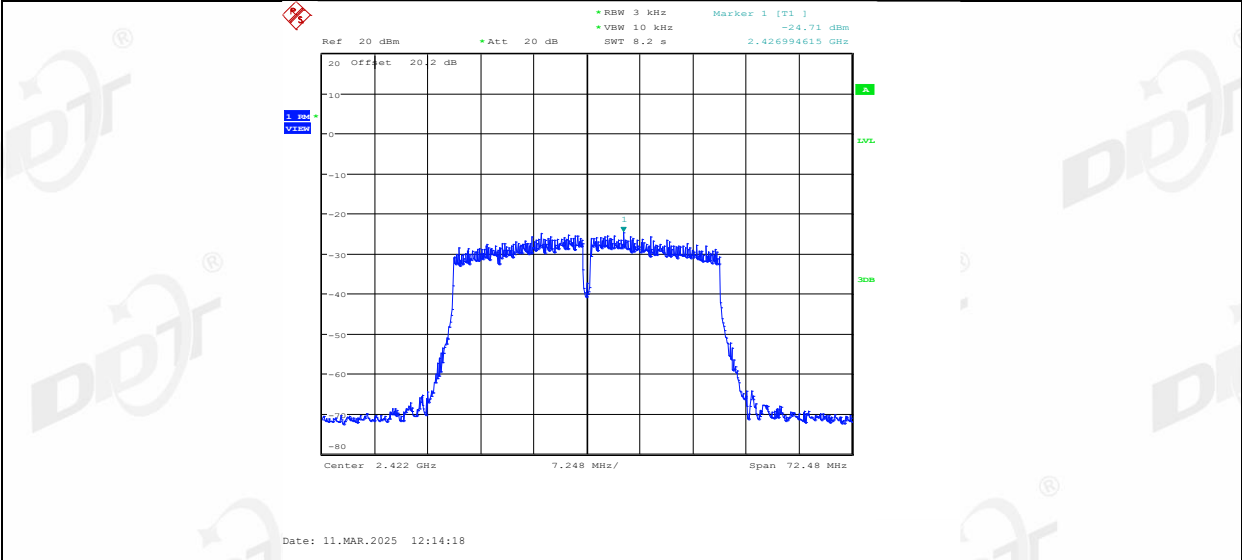


11N40MIMO_Ant1_2437

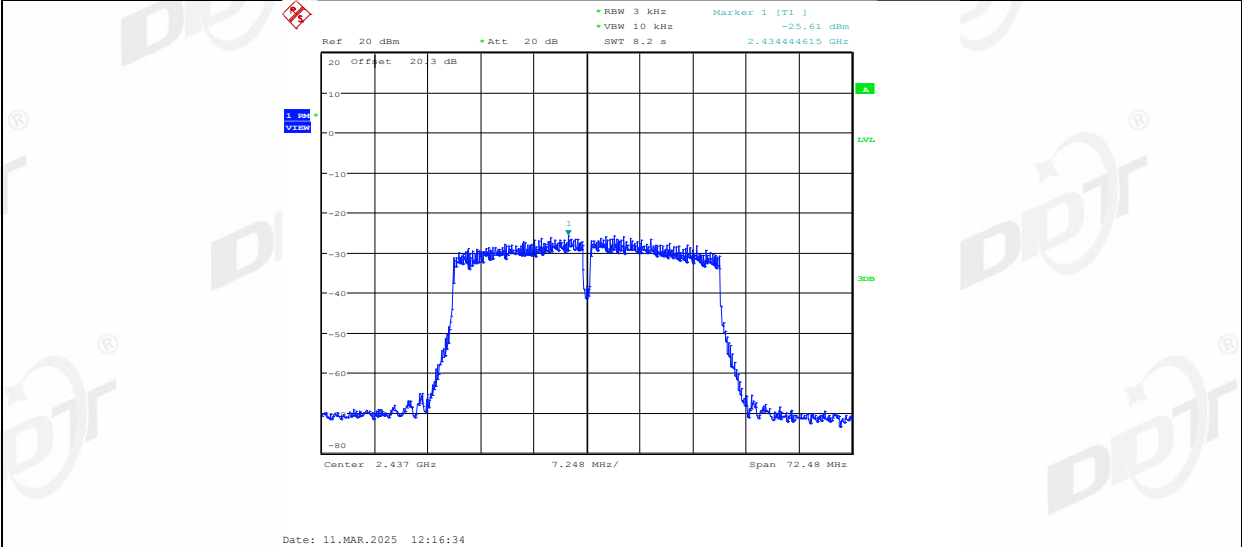


11N40MIMO_Ant2_2437

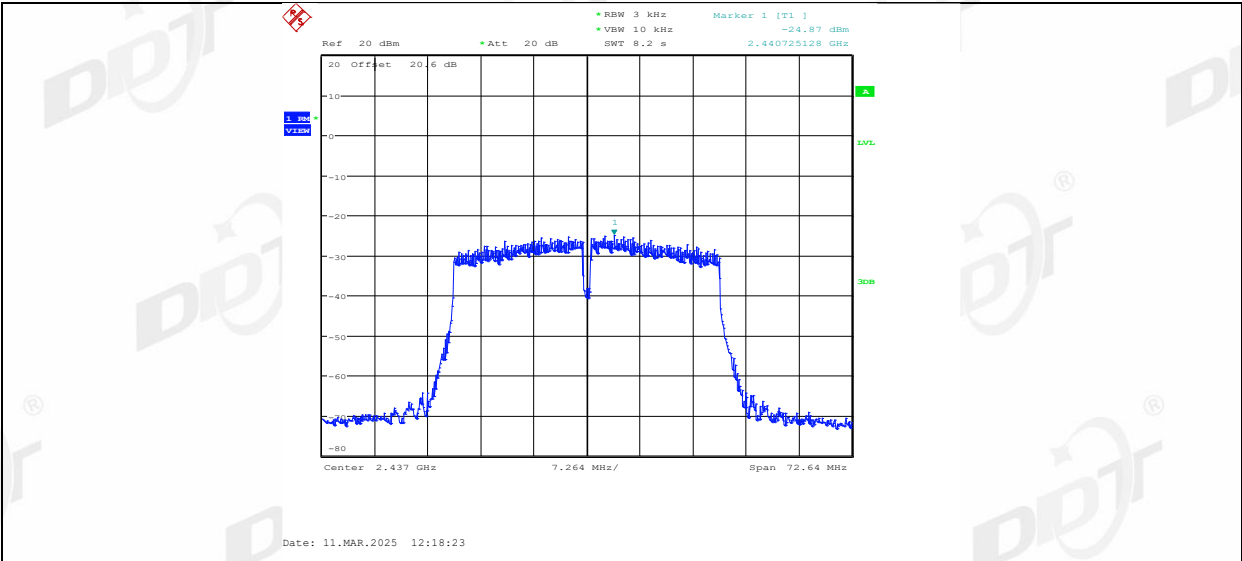


11N40MIMO_Ant1_2452

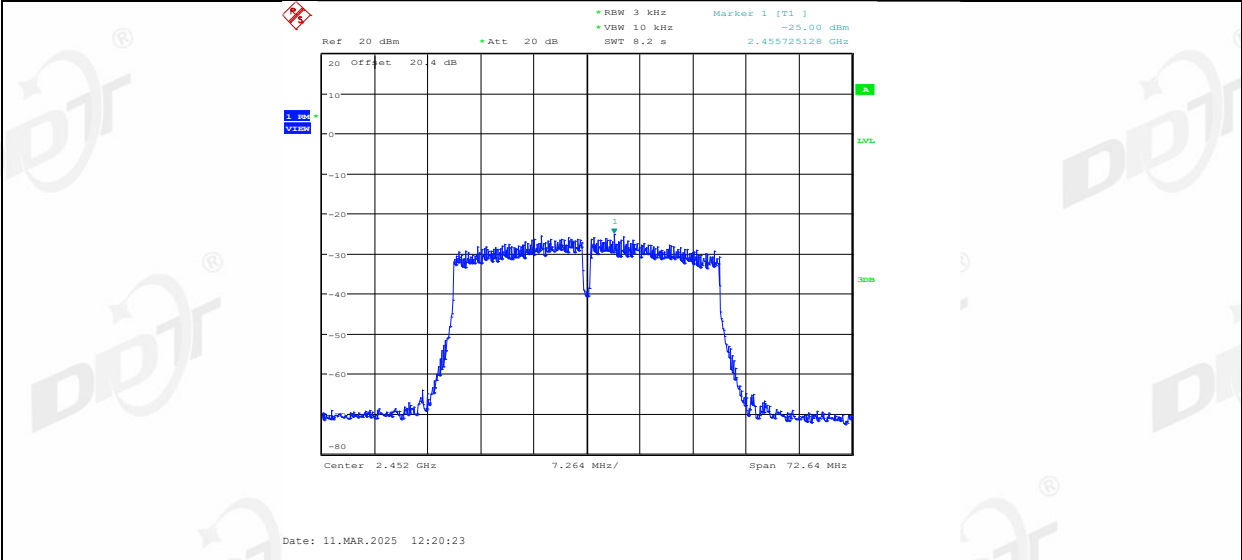


11N40MIMO_Ant2_2452

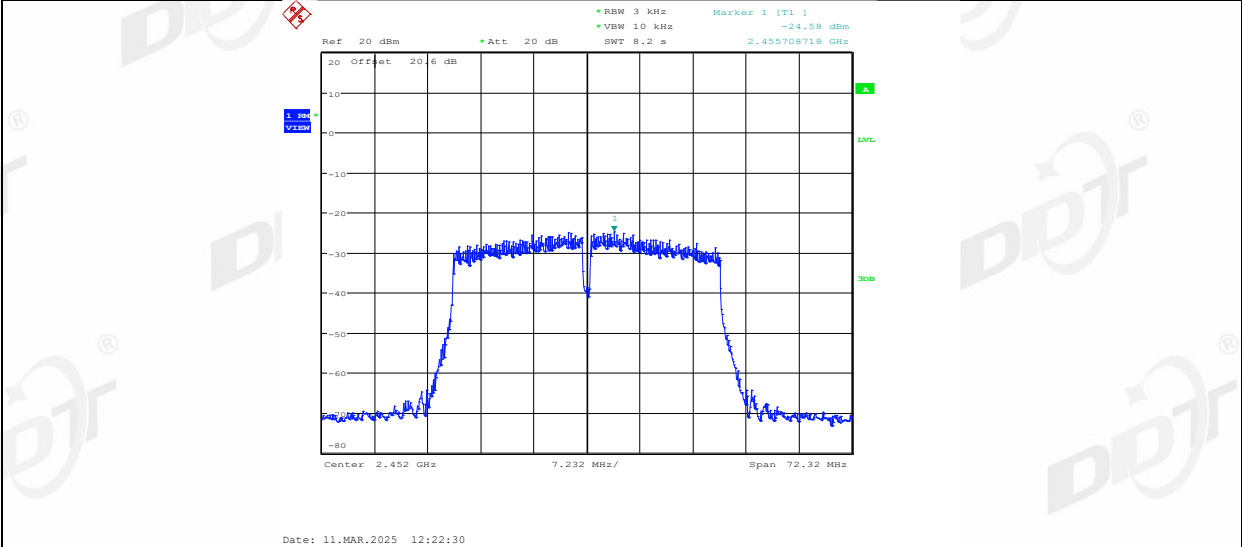


11AX20MIMO_Ant1_2412

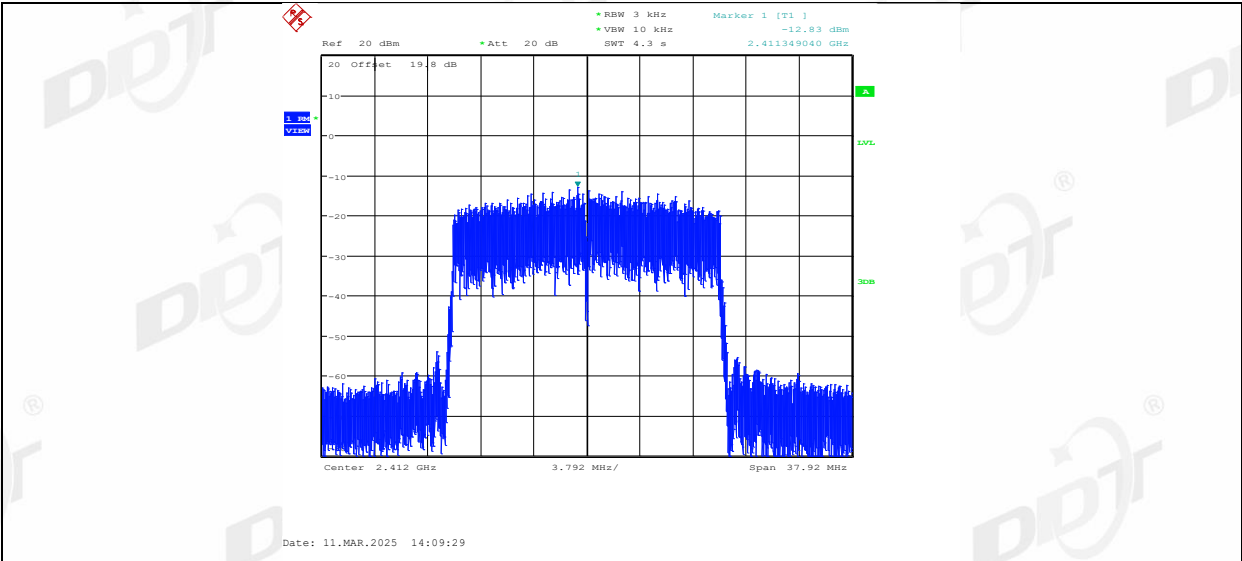


11AX20MIMO_Ant2_2412

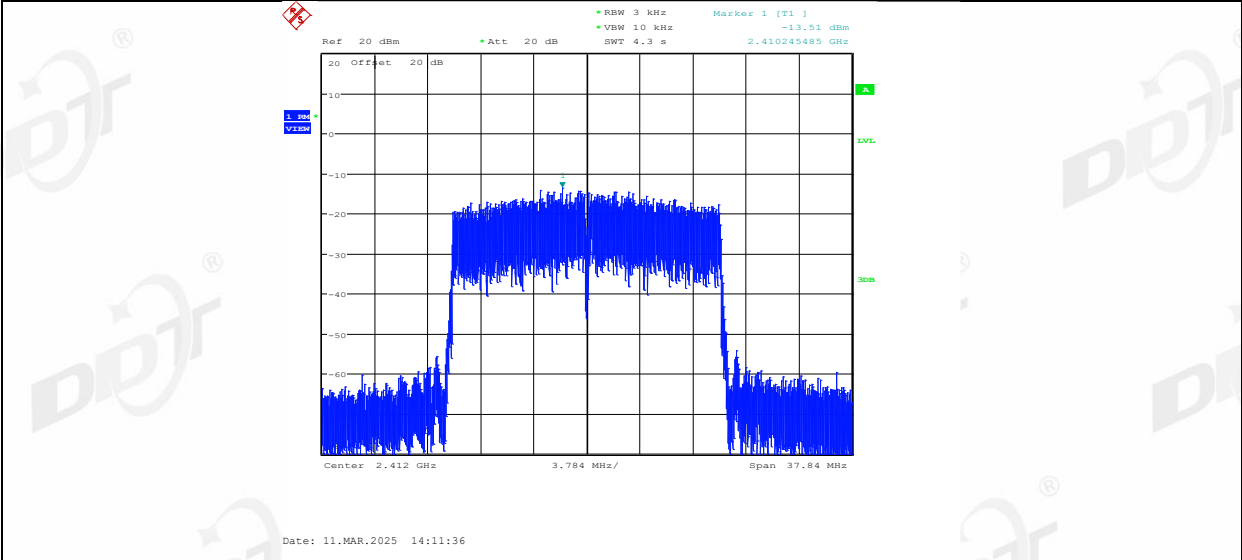


11AX20MIMO_Ant1_2437

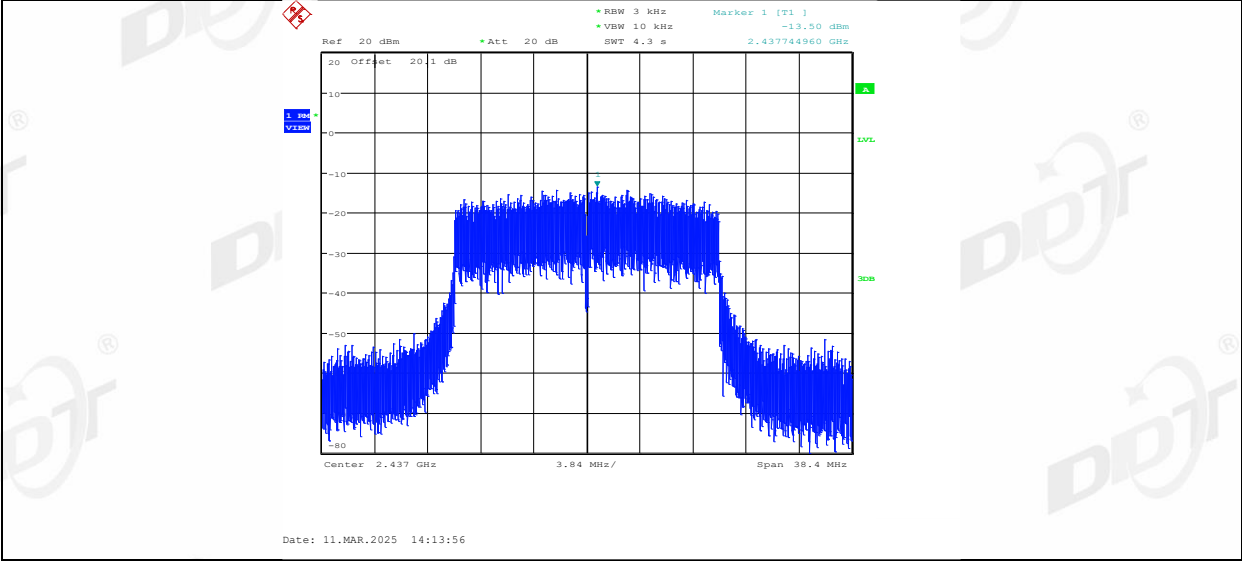


11AX20MIMO_Ant2_2437

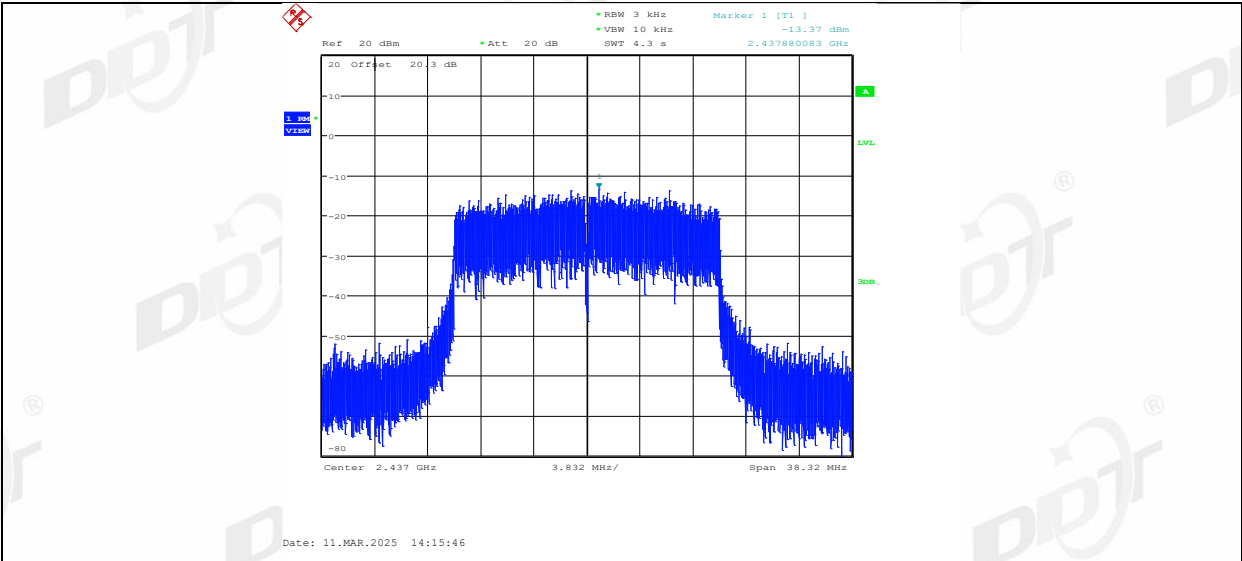

11AX20MIMO_Ant1_2462

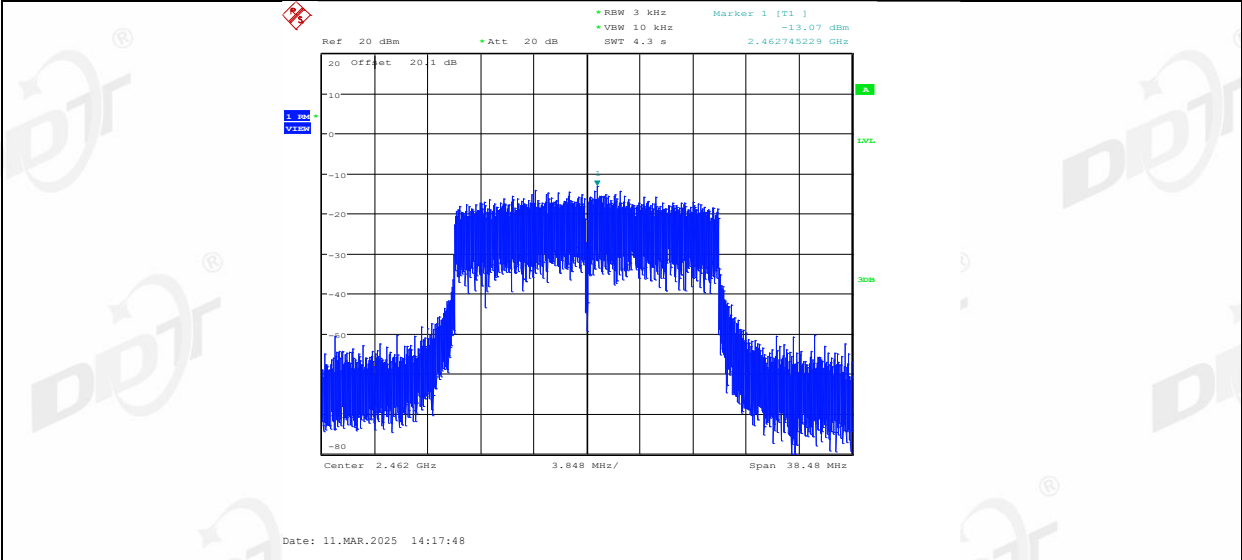

11AX20MIMO_Ant2_2462

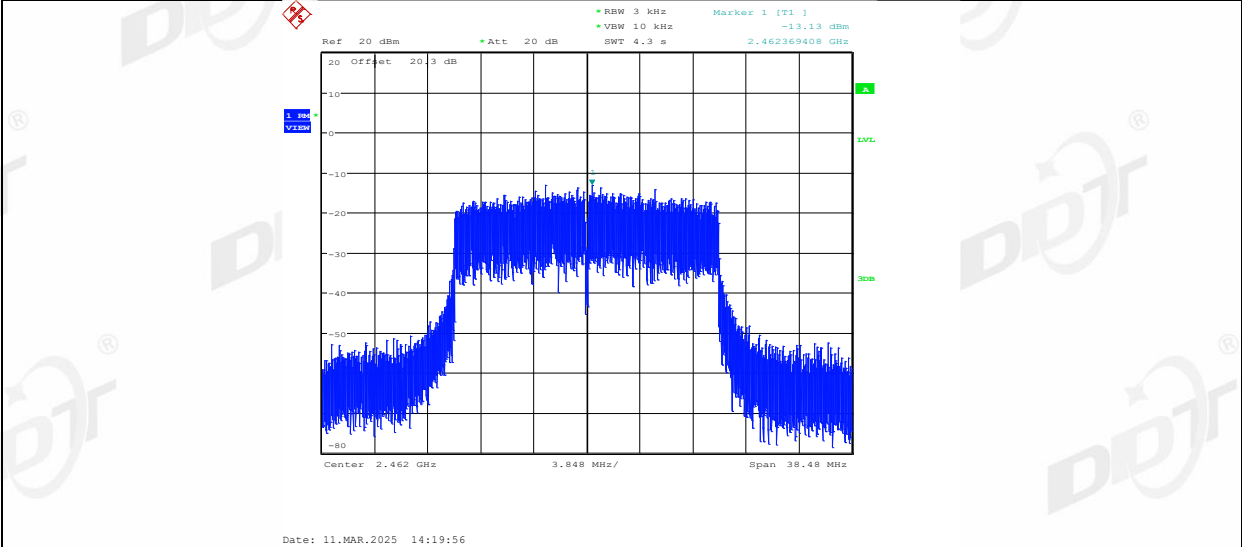

11AX40MIMO_Ant1_2422