




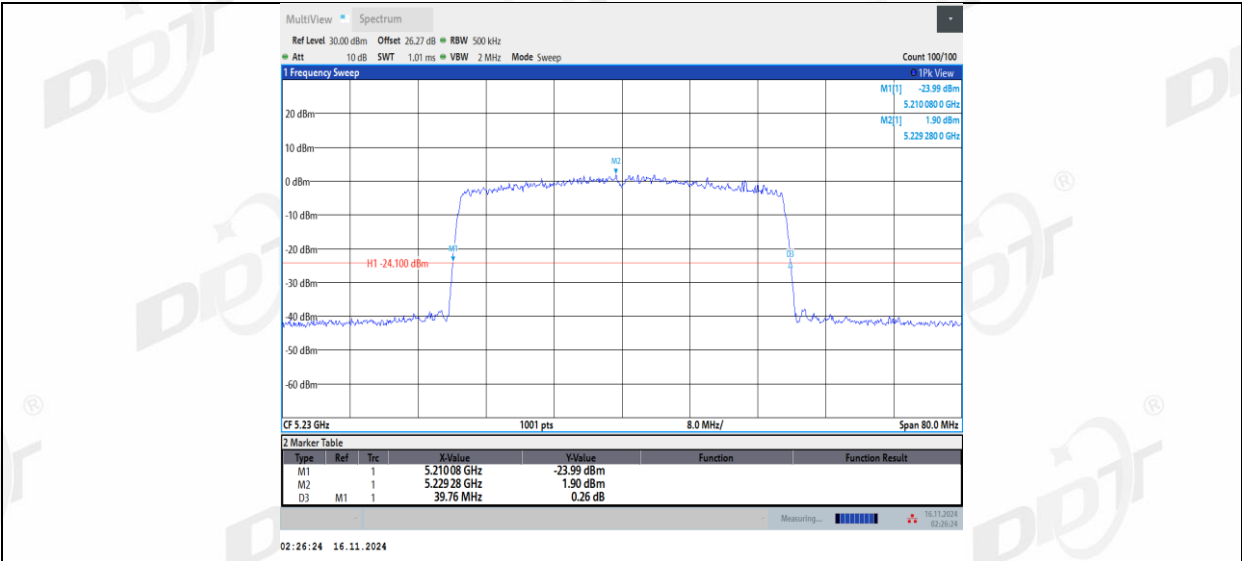


11AX40MIMO_Ant1_5270

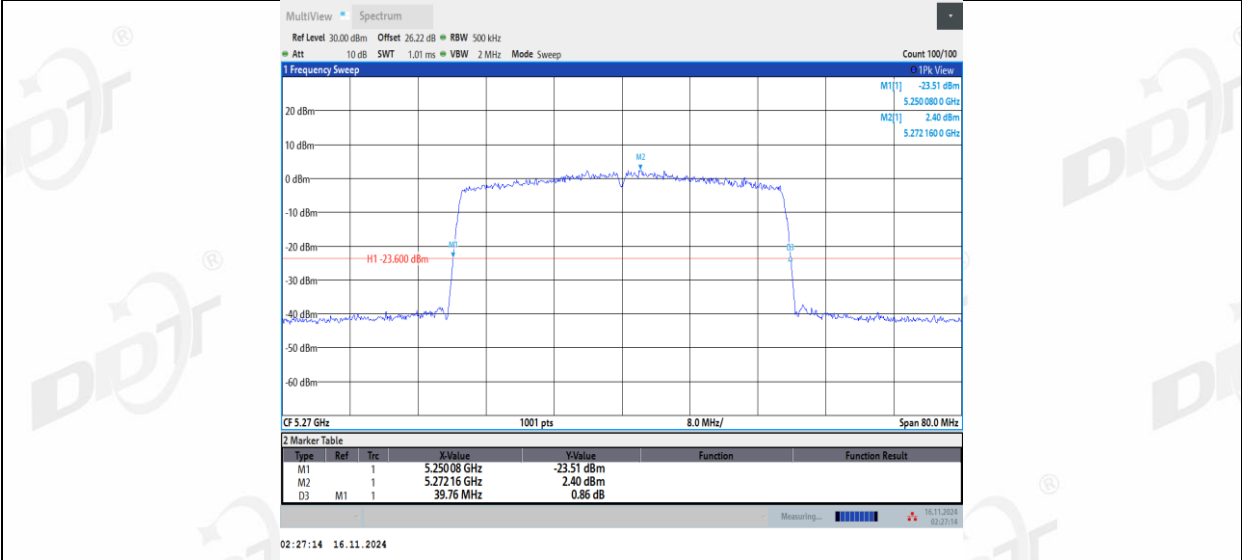


11AX40MIMO_Ant2_5270

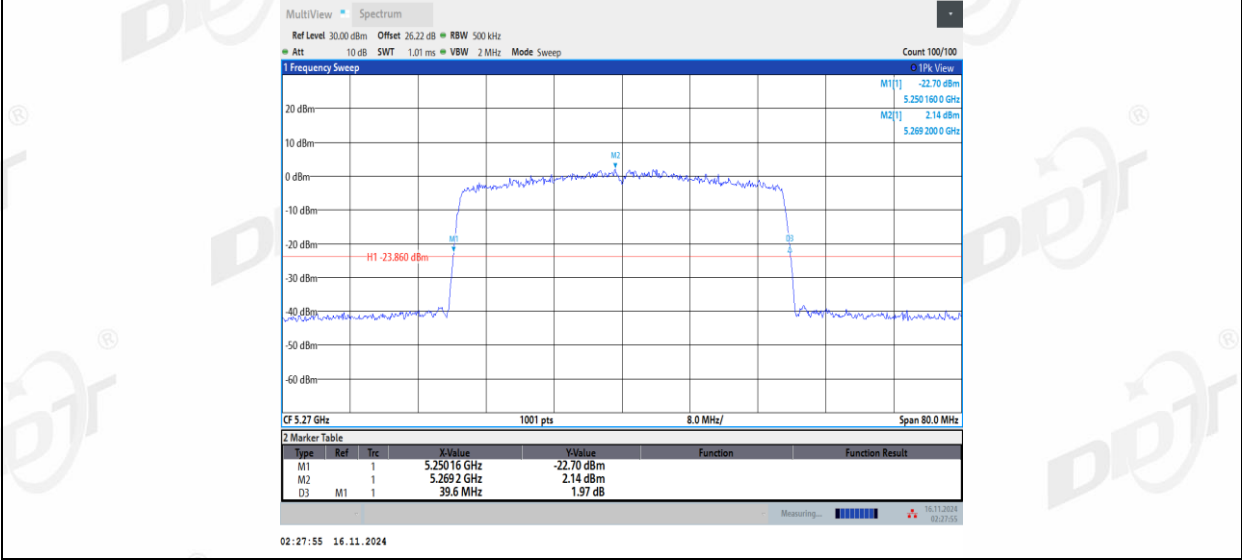


11AX40MIMO_Ant1_5310

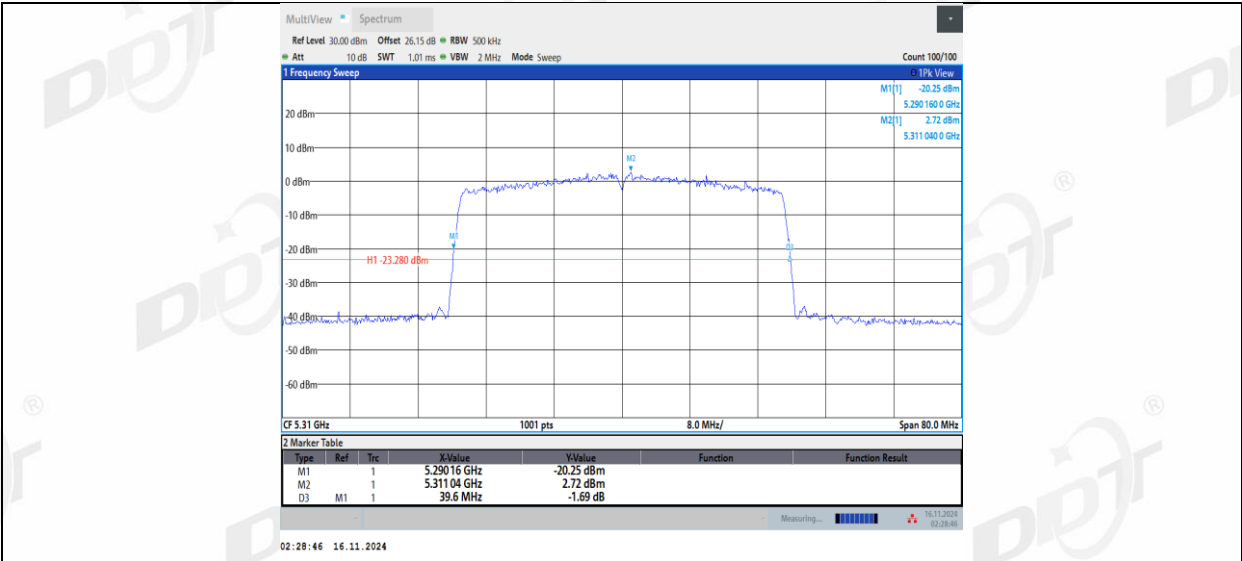


11AX40MIMO_Ant2_5310

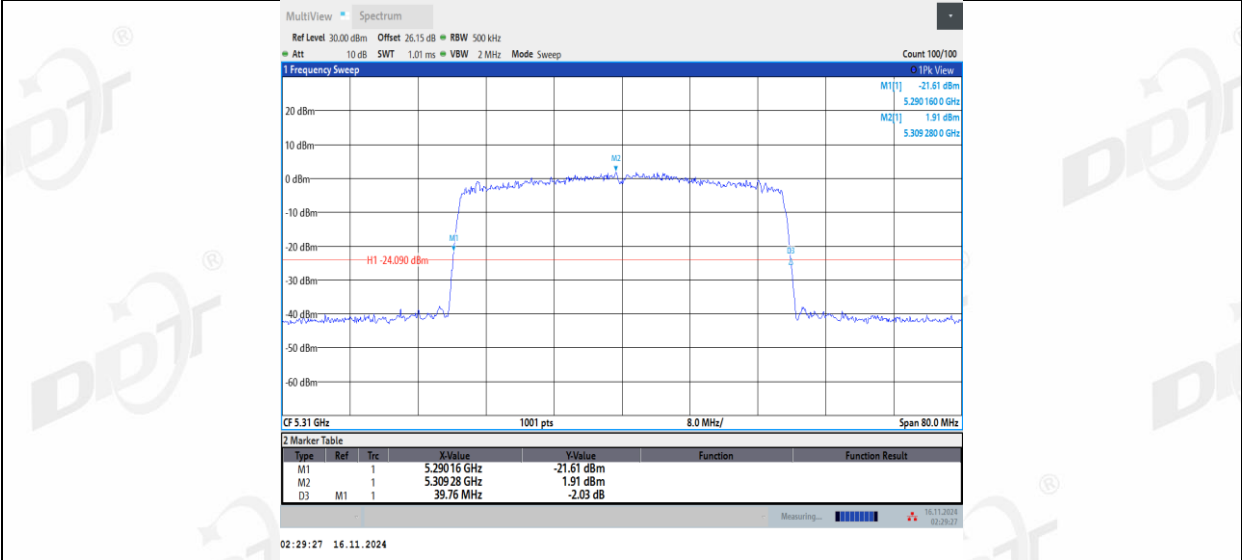


11AX40MIMO_Ant1_5510

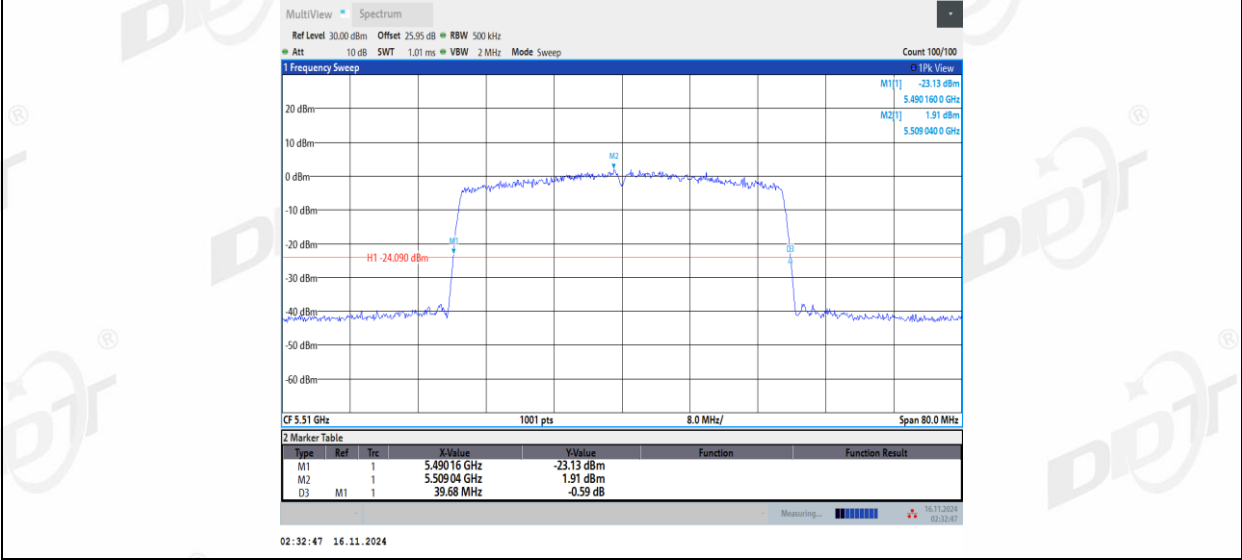


11AX40MIMO_Ant2_5510

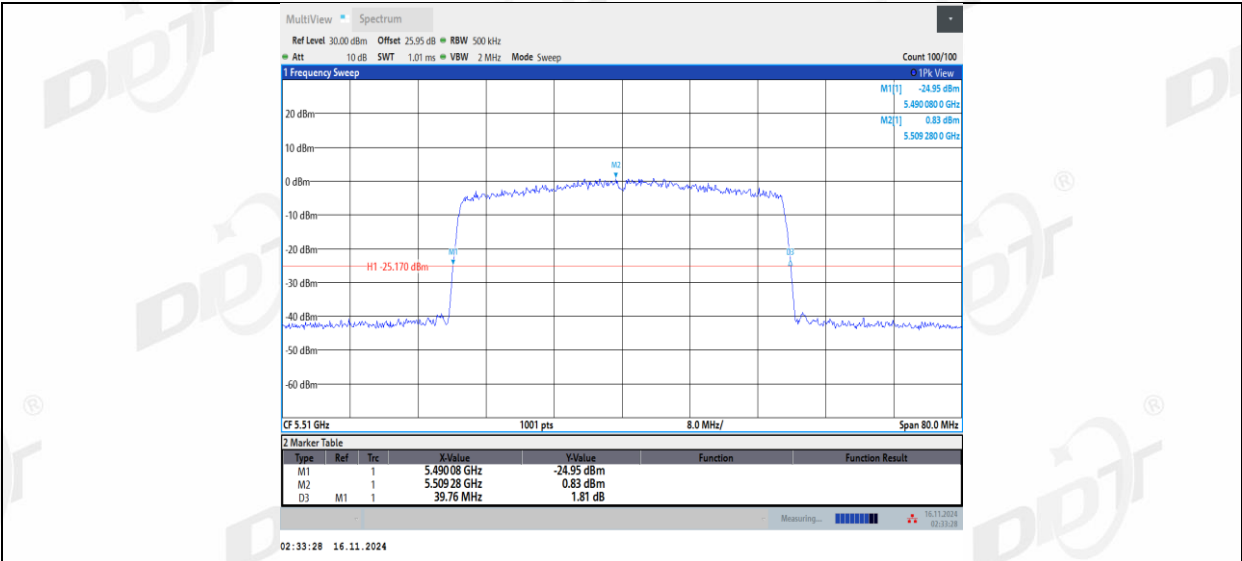


11AX40MIMO_Ant1_5550

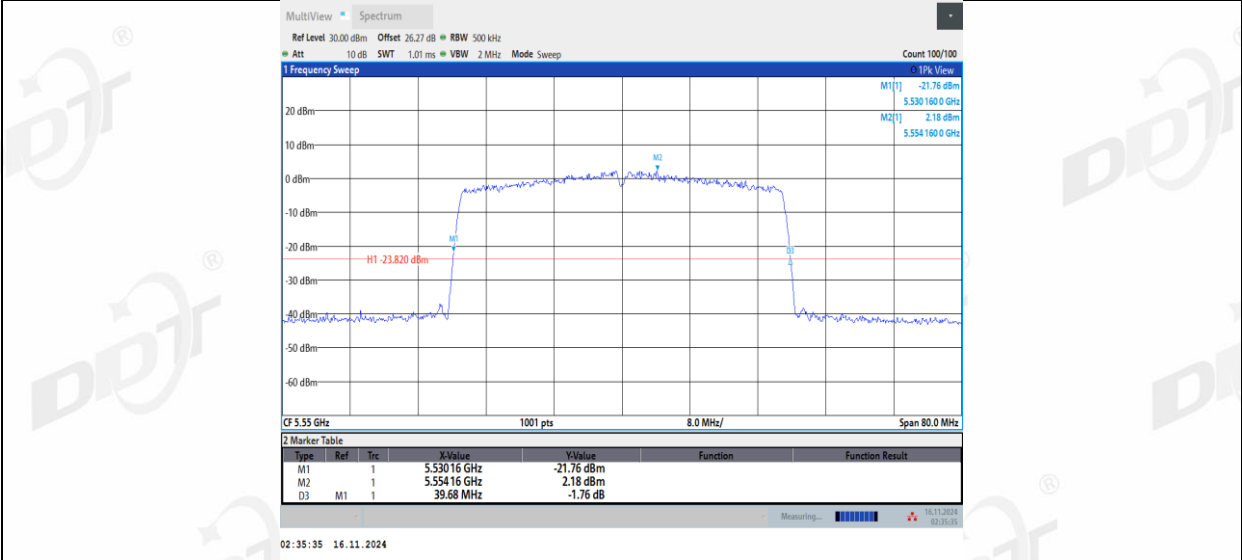


11AX40MIMO_Ant2_5550

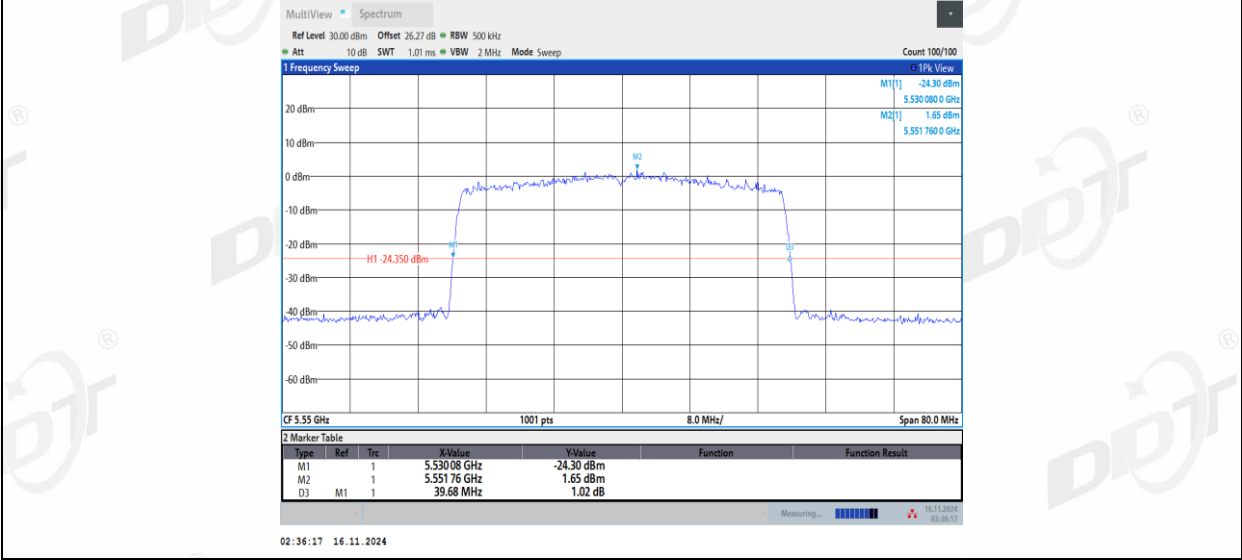


11AX40MIMO_Ant1_5670

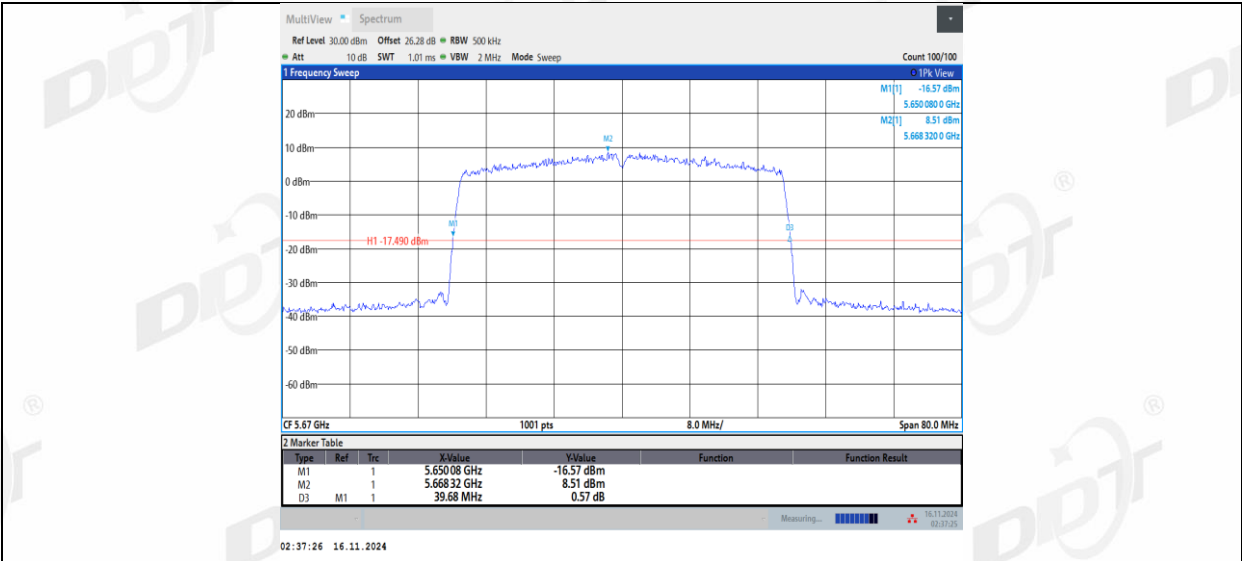


11AX40MIMO_Ant2_5670

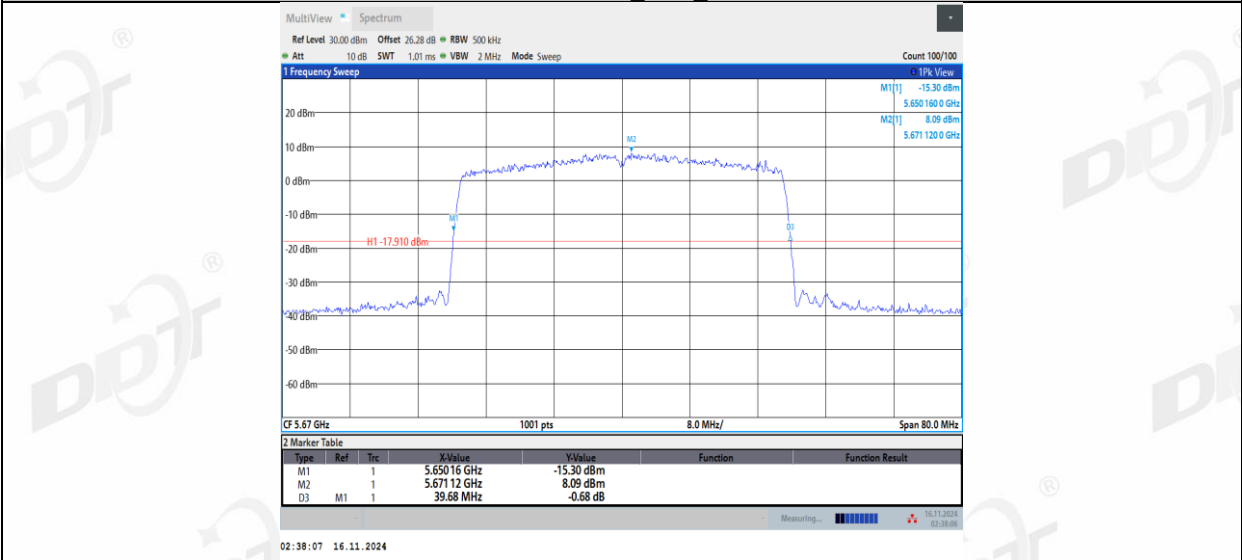


11AX40MIMO_Ant1_5710

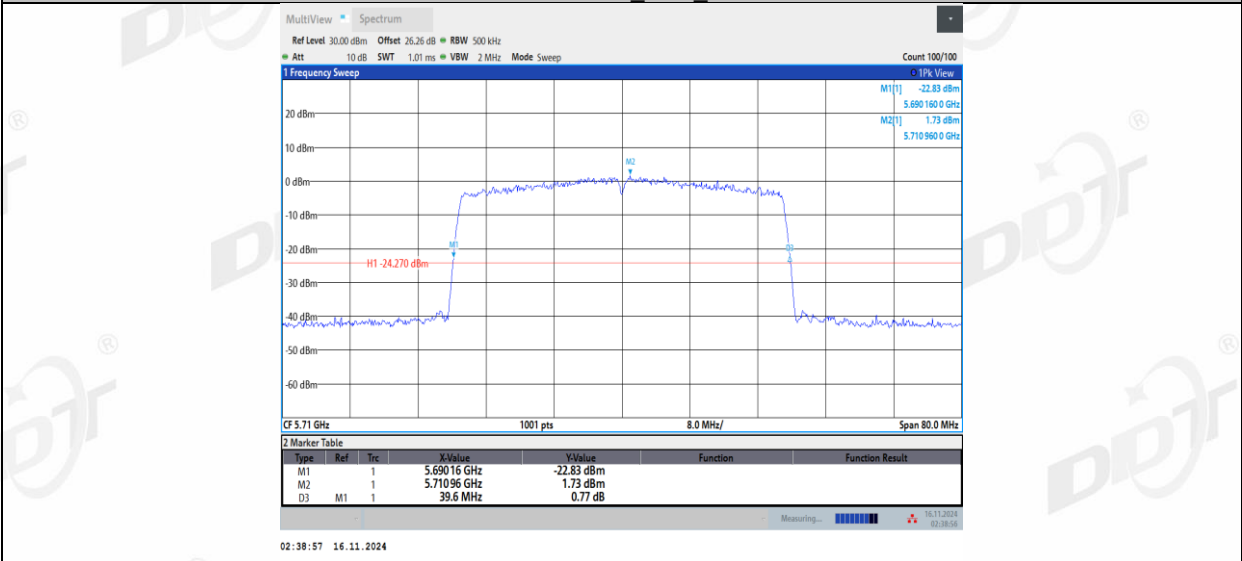


11AX40MIMO_Ant2_5710

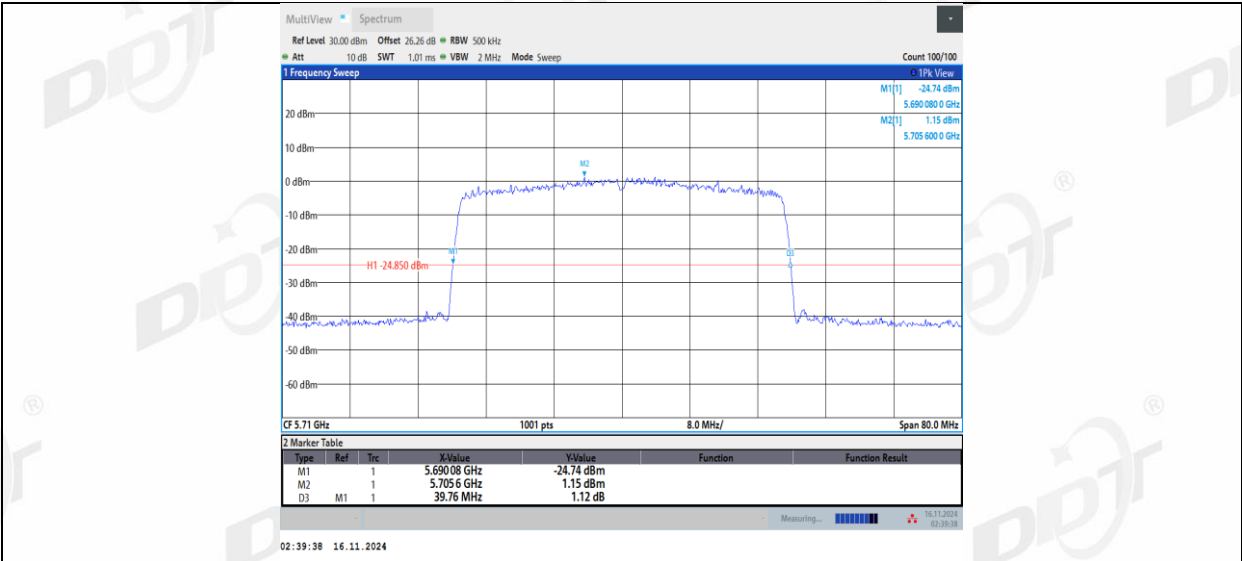


11AX40MIMO_Ant1_5755

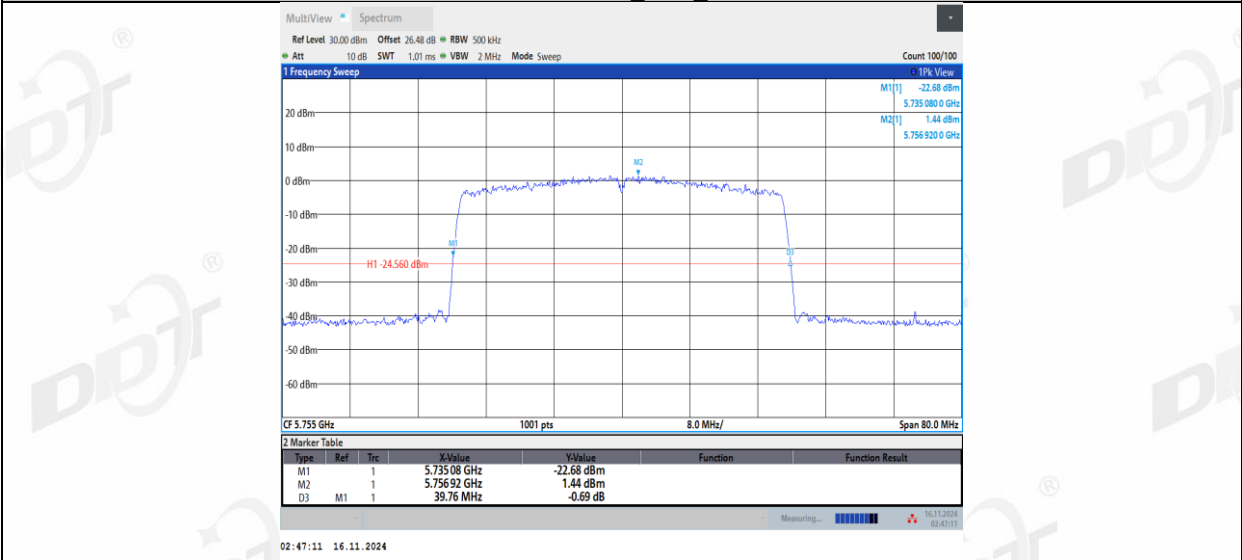


11AX40MIMO_Ant2_5755

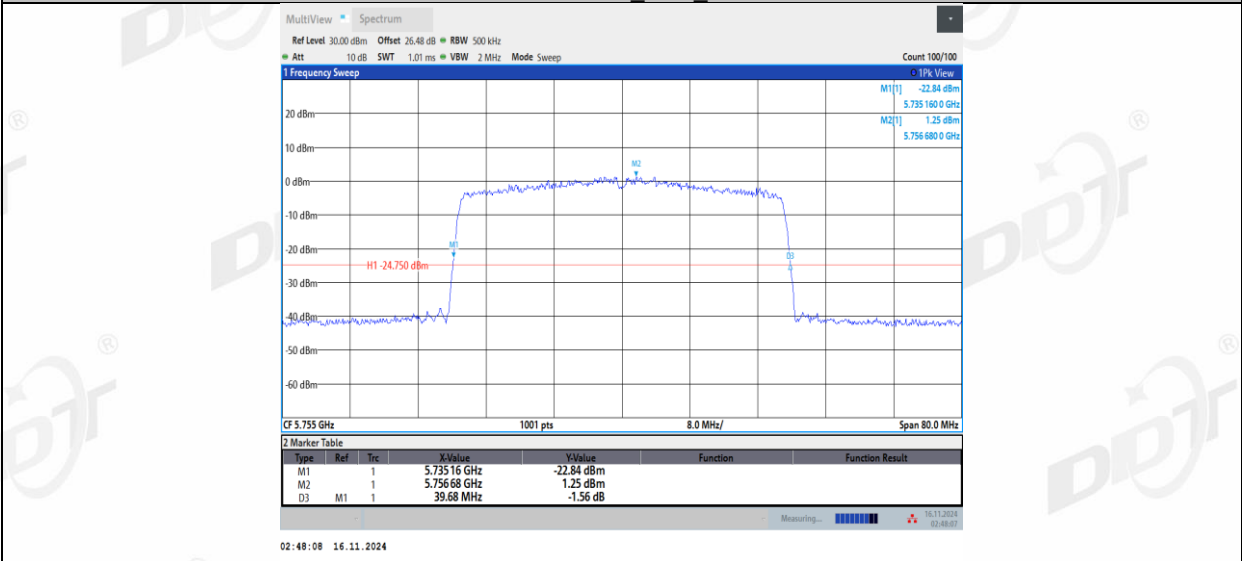


11AX40MIMO_Ant1_5795

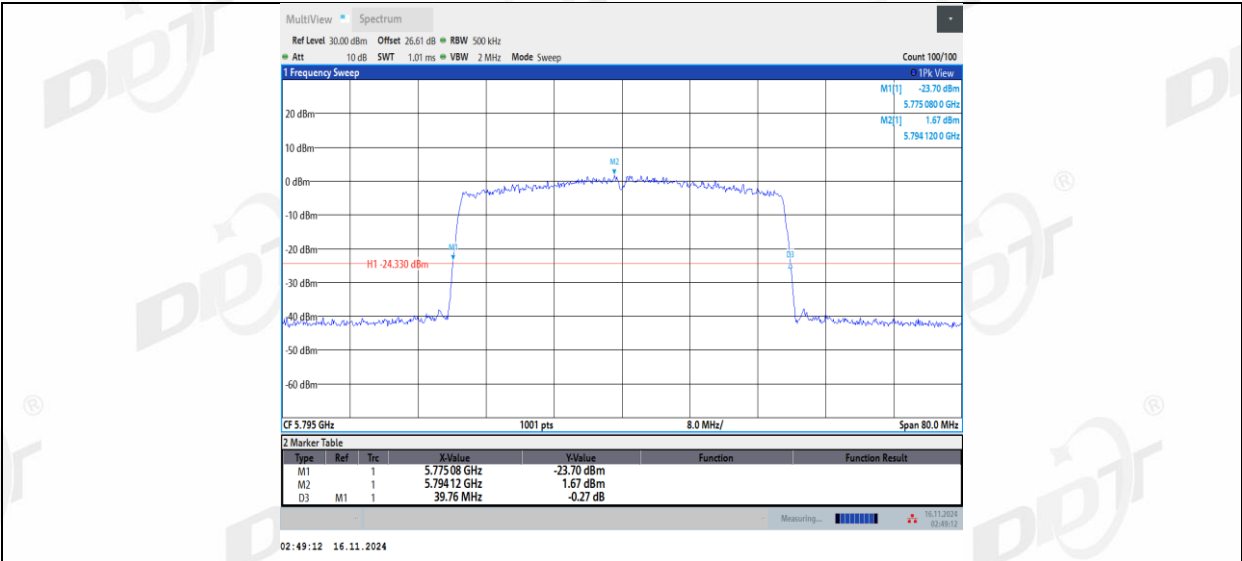


11AX40MIMO_Ant2_5795

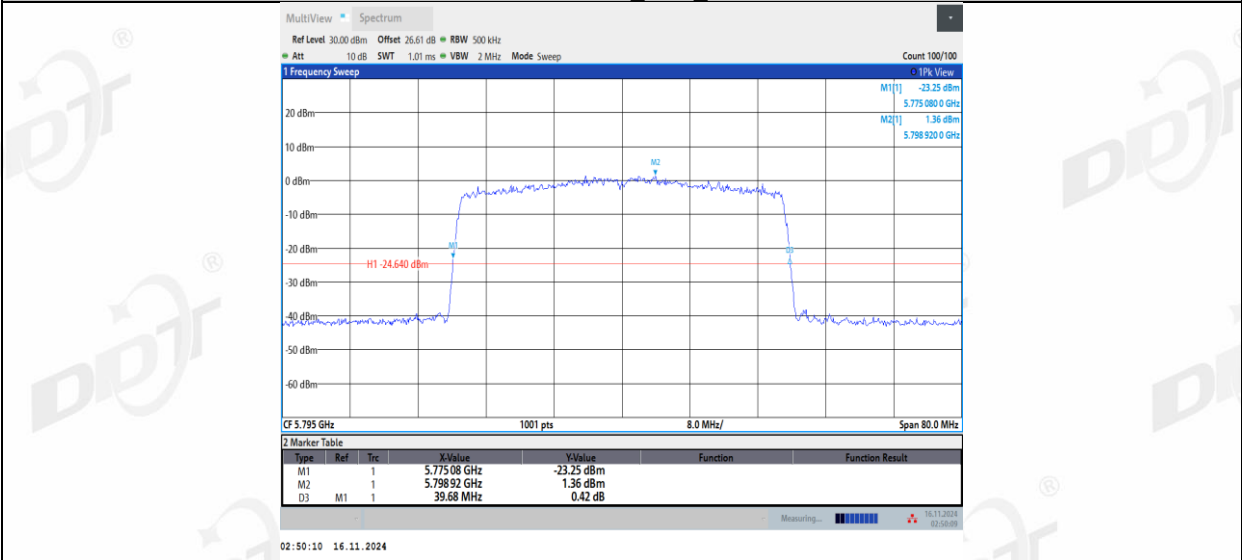


11AX80MIMO_Ant1_5210

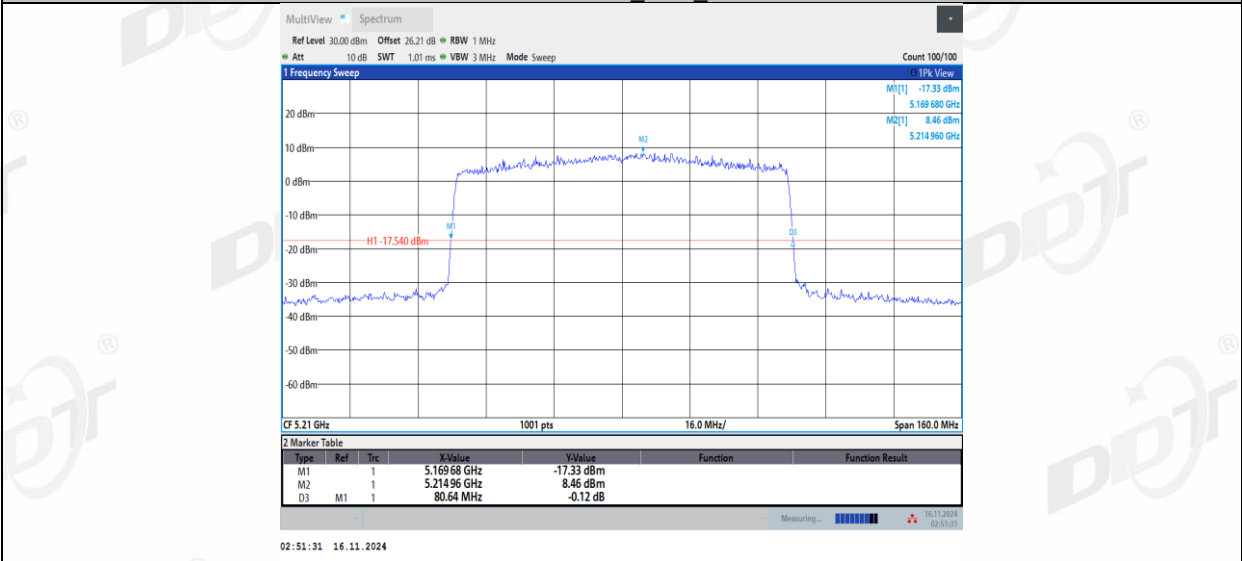


11AX80MIMO_Ant2_5210

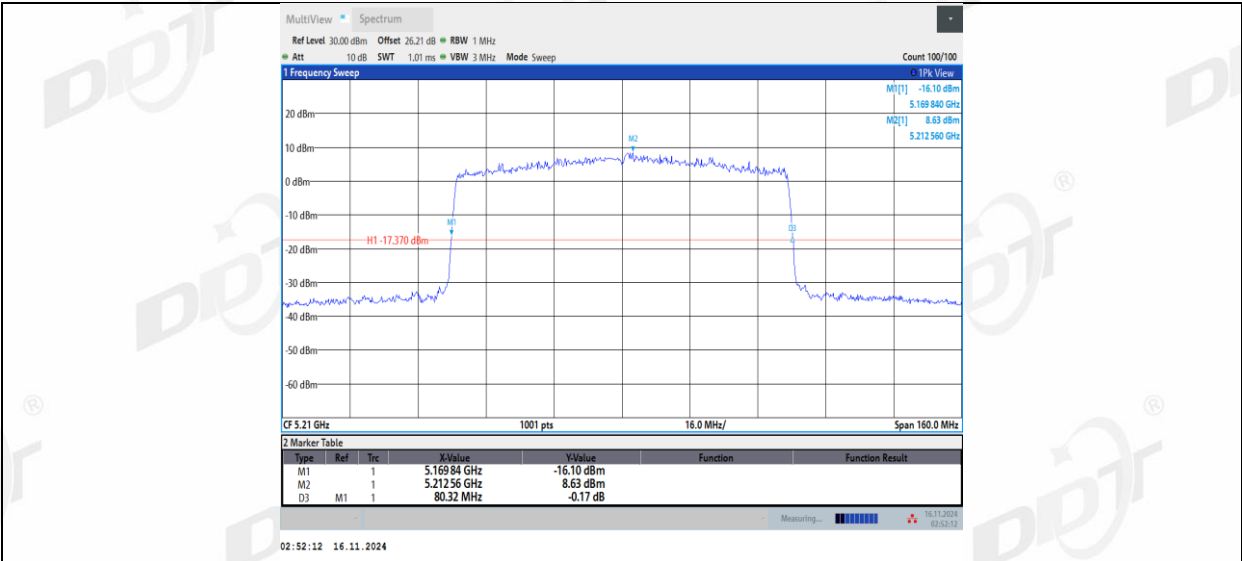


11AX80MIMO_Ant1_5290

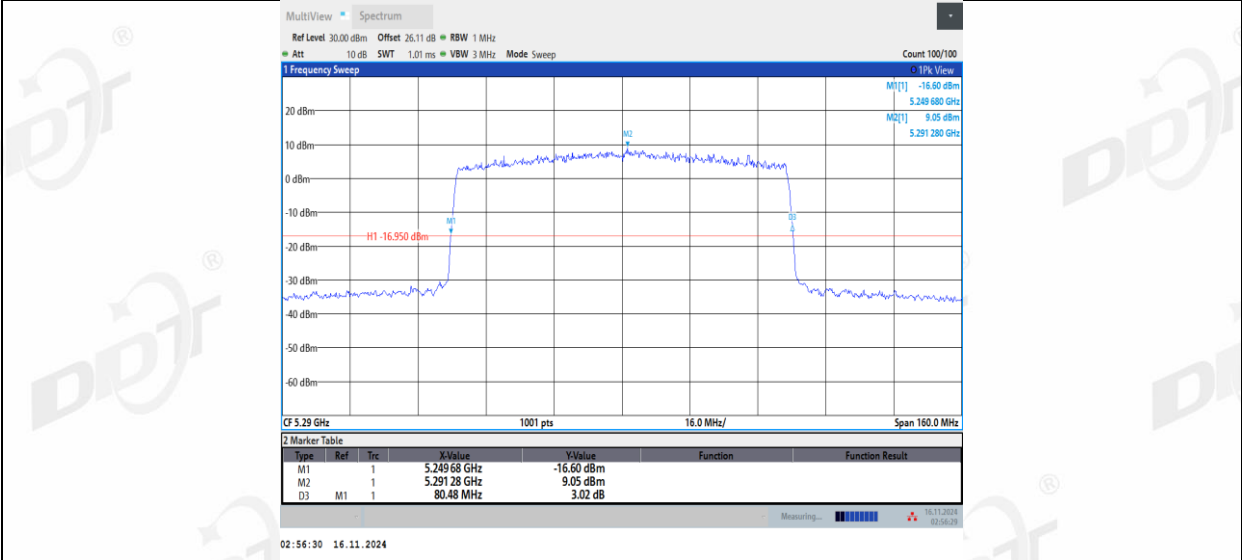


11AX80MIMO_Ant2_5290

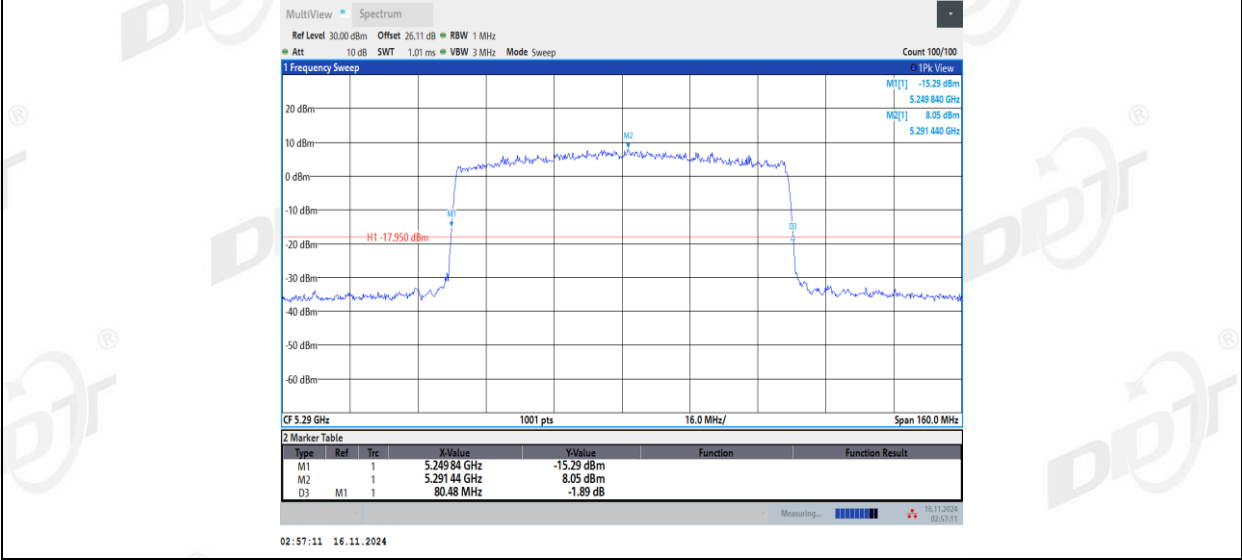


11AX80MIMO_Ant1_5530

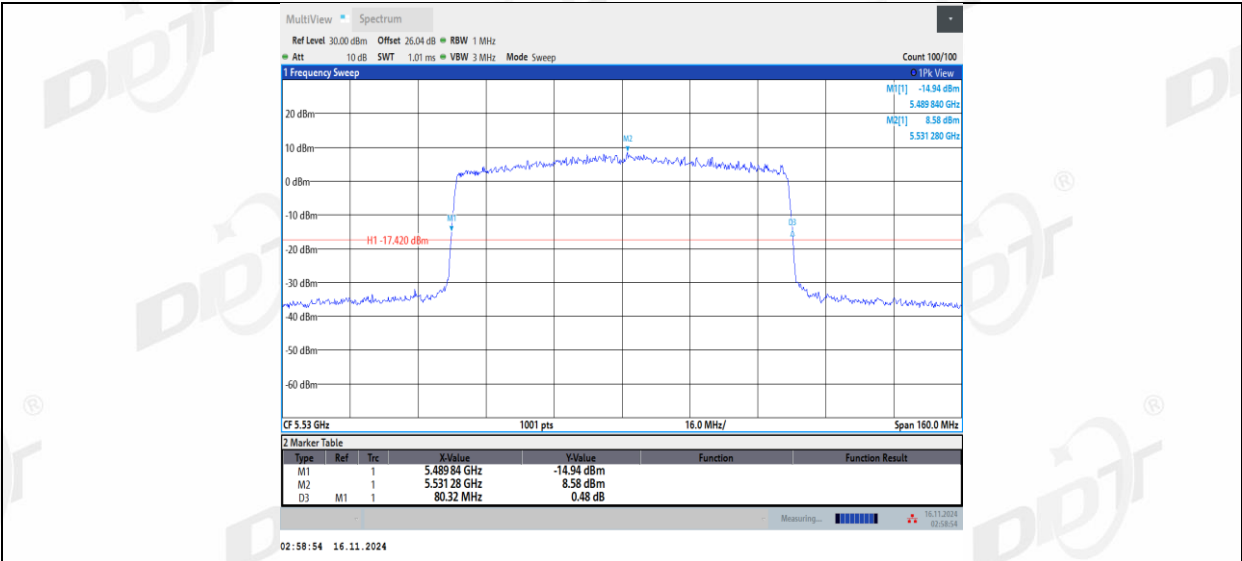


11AX80MIMO_Ant2_5530

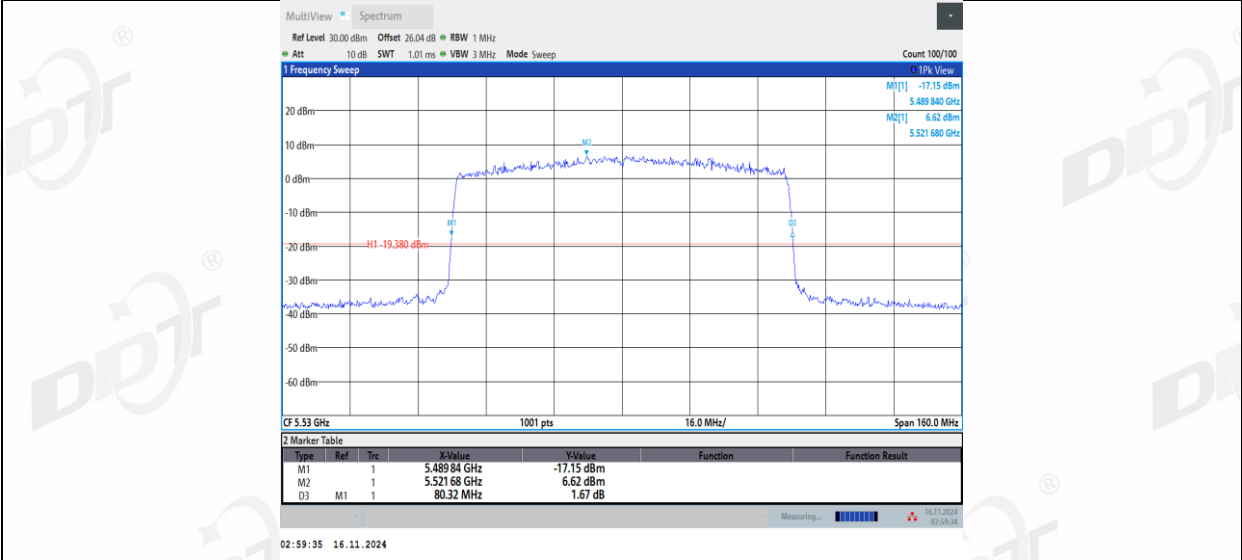


11AX80MIMO_Ant1_5610

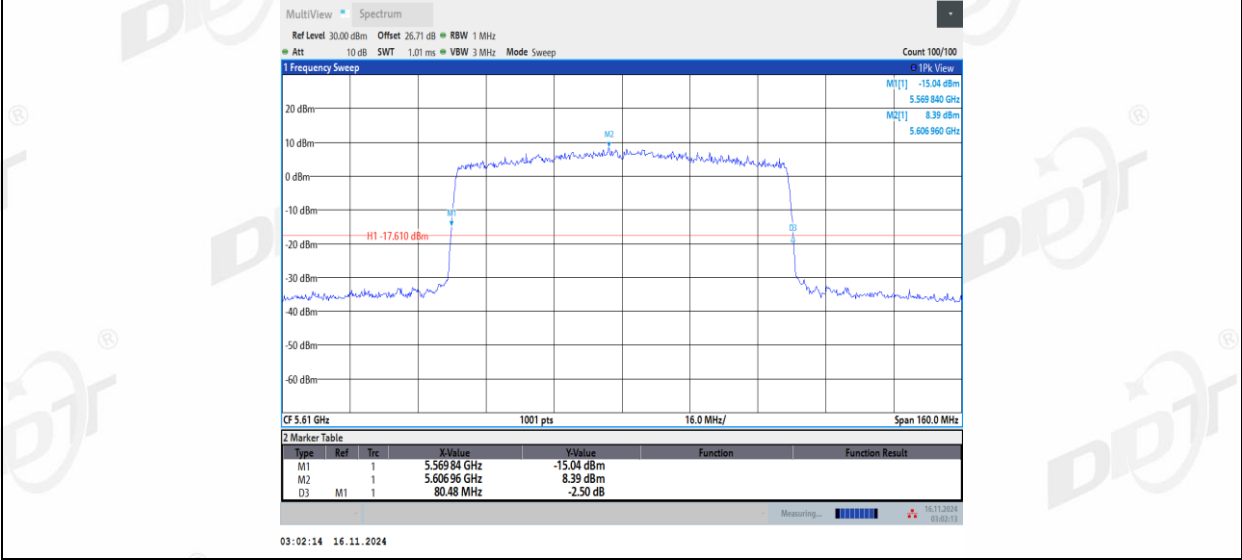


11AX80MIMO_Ant2_5610

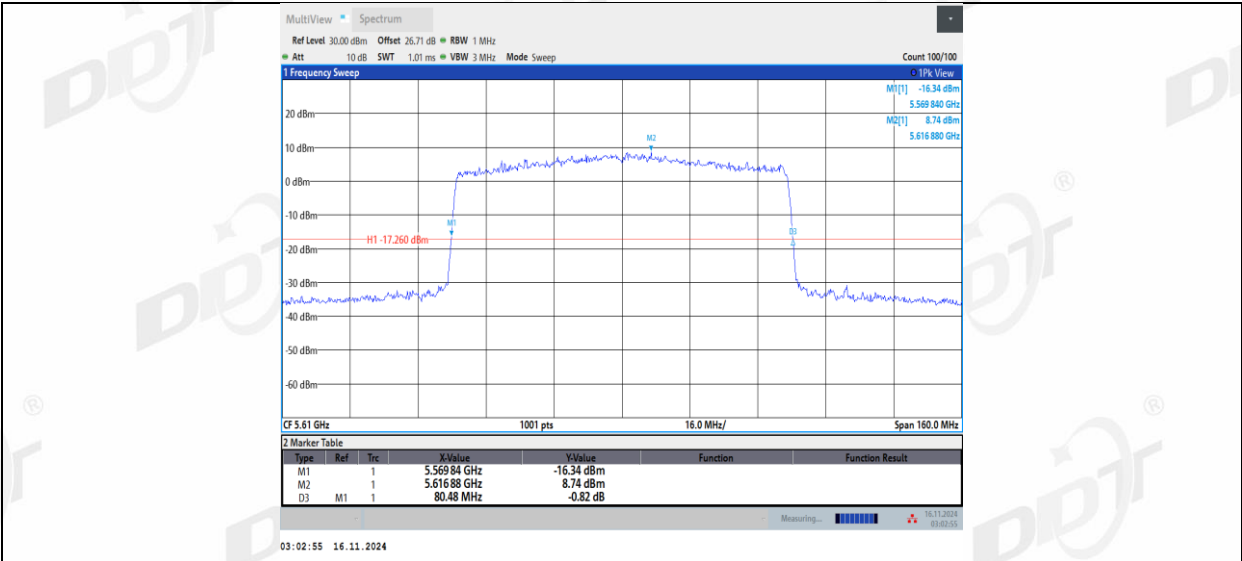


11AX80MIMO_Ant1_5690

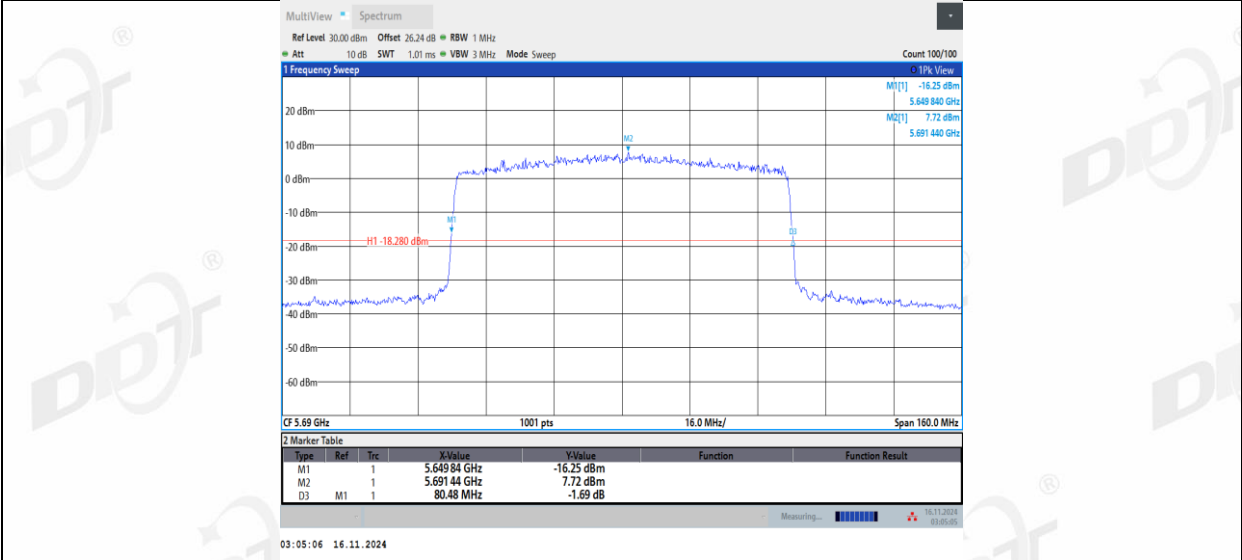


11AX80MIMO_Ant2_5690

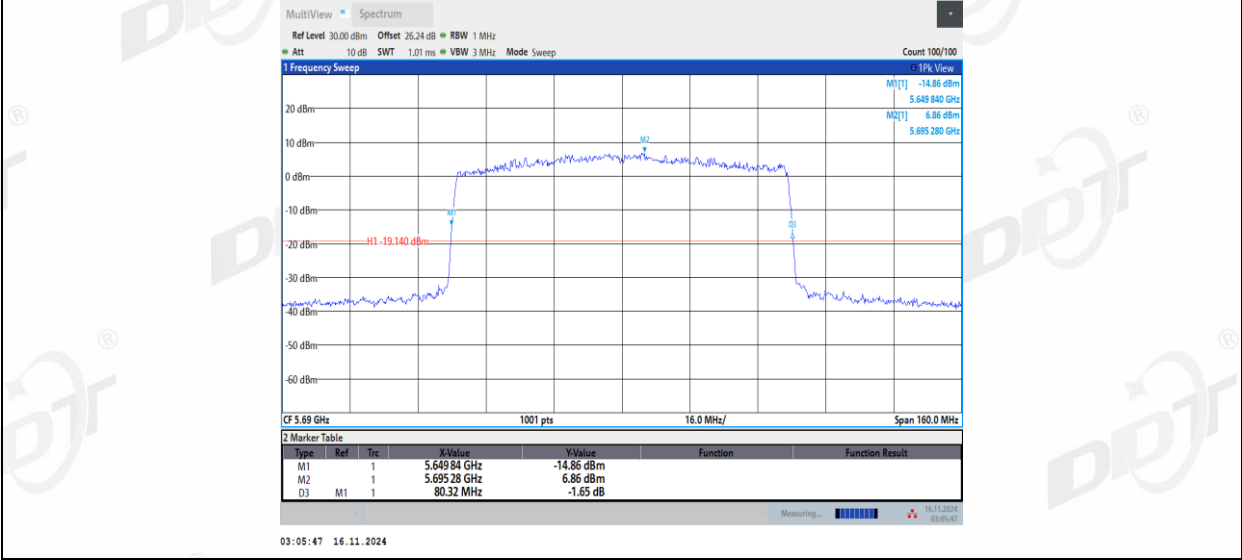

11AX80MIMO_Ant1_5775

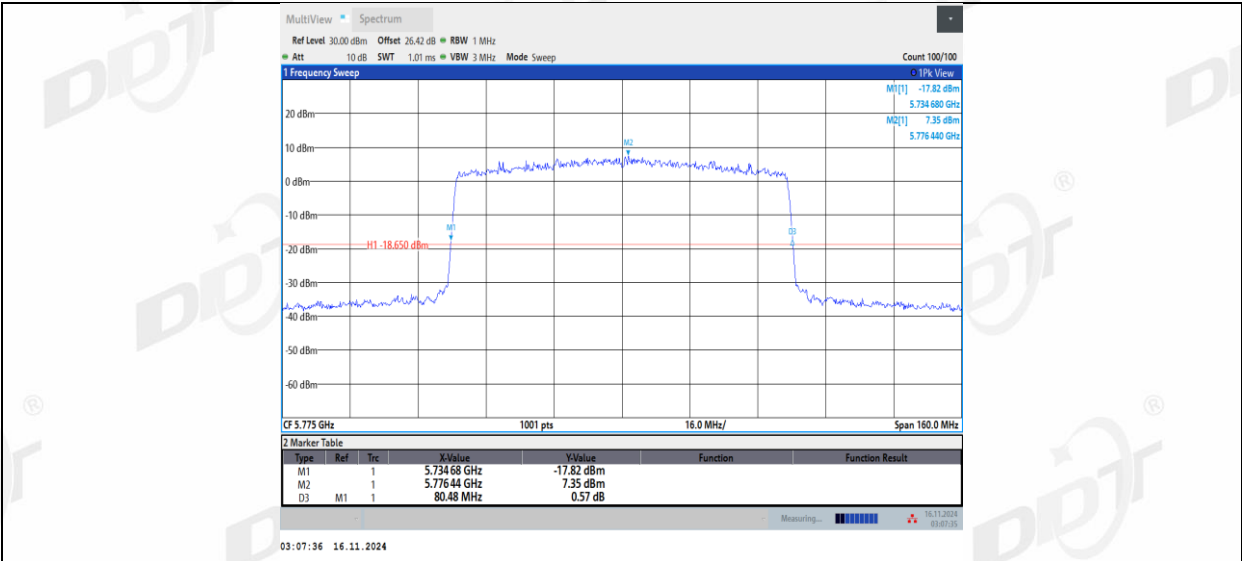


11AX80MIMO_Ant2_5775

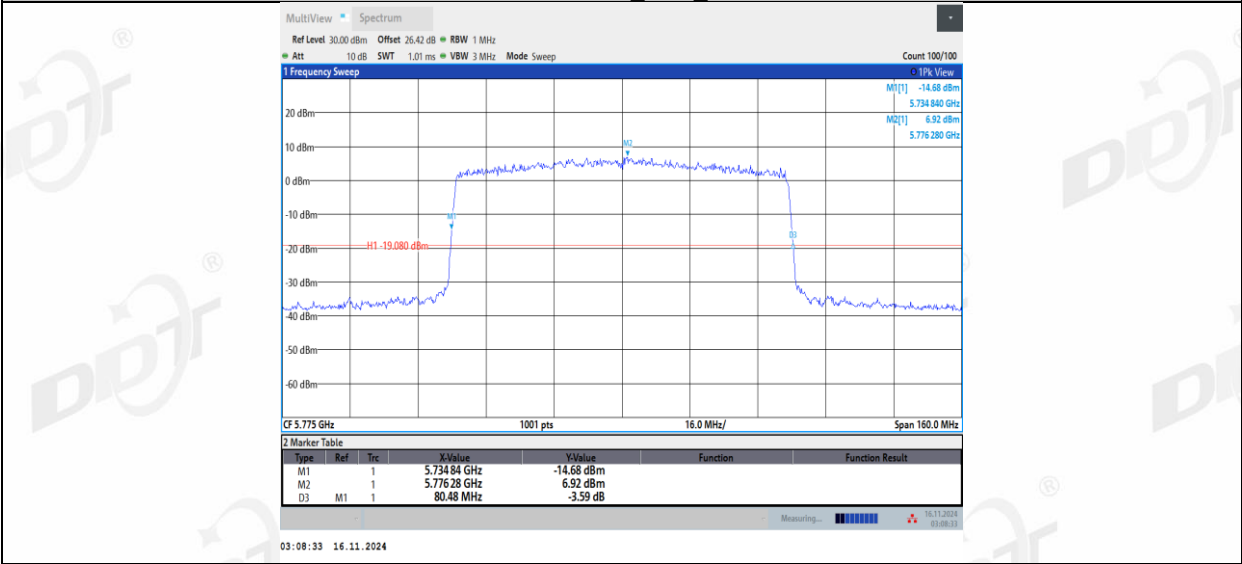

5. 6dB Bandwidth

5.1. Block diagram of test setup

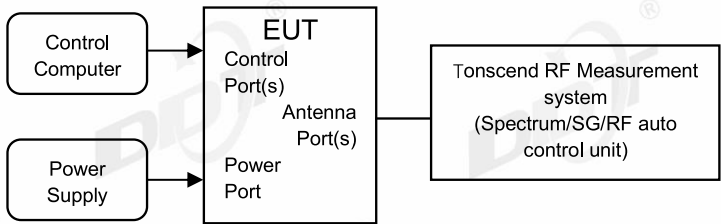

5.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
6 dB Bandwidth	Minimum 500 kHz	5725 - 5850

5.3. Test procedure

Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: RBW=100 kHz For 26 dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6 dB Bandwidth: VBW=300 kHz For 26 dB Bandwidth: >3 RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4. Test result B4


Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.4℃,47.1%RH	Test Date:	2024.11.14-2024.11.16
Test Power Supply:	Battery	Sample Number:	S24121719-005


Test Mode	Antenna	Frequenc y[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.00	5736.80	5752.80	0.5	PASS
	Ant2	5745	16.32	5736.76	5753.08	0.5	PASS
	Ant1	5785	16.28	5776.80	5793.08	0.5	PASS
	Ant2	5785	16.28	5776.80	5793.08	0.5	PASS
	Ant1	5825	16.28	5816.80	5833.08	0.5	PASS
	Ant2	5825	16.28	5816.80	5833.08	0.5	PASS
11N20MIM O	Ant1	5745	16.56	5736.76	5753.32	0.5	PASS
	Ant2	5745	17.60	5736.12	5753.72	0.5	PASS
	Ant1	5785	16.56	5776.76	5793.32	0.5	PASS
	Ant2	5785	17.60	5776.12	5793.72	0.5	PASS
	Ant1	5825	16.92	5816.52	5833.44	0.5	PASS
	Ant2	5825	17.60	5816.12	5833.72	0.5	PASS
11N40MIM O	Ant1	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant2	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant1	5795	35.12	5777.40	5812.52	0.5	PASS
	Ant2	5795	35.04	5777.48	5812.52	0.5	PASS
11AC20MI MO	Ant1	5745	16.44	5736.40	5752.84	0.5	PASS
	Ant2	5745	17.56	5736.16	5753.72	0.5	PASS
	Ant1	5785	17.16	5776.52	5793.68	0.5	PASS
	Ant2	5785	17.56	5776.16	5793.72	0.5	PASS
	Ant1	5825	16.44	5817.00	5833.44	0.5	PASS
	Ant2	5825	17.56	5816.16	5833.72	0.5	PASS
11AC40MI MO	Ant1	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant2	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant1	5795	35.12	5777.40	5812.52	0.5	PASS
	Ant2	5795	35.04	5777.48	5812.52	0.5	PASS
11AC80MI MO	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS
	Ant2	5775	75.20	5737.40	5812.60	0.5	PASS
11AX20MI MO	Ant1	5745	18.76	5735.56	5754.32	0.5	PASS
	Ant2	5745	18.88	5735.52	5754.40	0.5	PASS
	Ant1	5785	18.84	5775.52	5794.36	0.5	PASS
	Ant2	5785	19.00	5775.40	5794.40	0.5	PASS
	Ant1	5825	18.84	5815.48	5834.32	0.5	PASS
	Ant2	5825	19.04	5815.40	5834.44	0.5	PASS
11AX40MI MO	Ant1	5755	36.00	5736.52	5772.52	0.5	PASS
	Ant2	5755	35.12	5737.40	5772.52	0.5	PASS
	Ant1	5795	36.00	5777.40	5813.40	0.5	PASS
	Ant2	5795	35.12	5777.40	5812.52	0.5	PASS
11AX80MI MO	Ant1	5775	75.84	5736.92	5812.76	0.5	PASS
	Ant2	5775	75.68	5736.92	5812.60	0.5	PASS

5.5. Test graphs B4






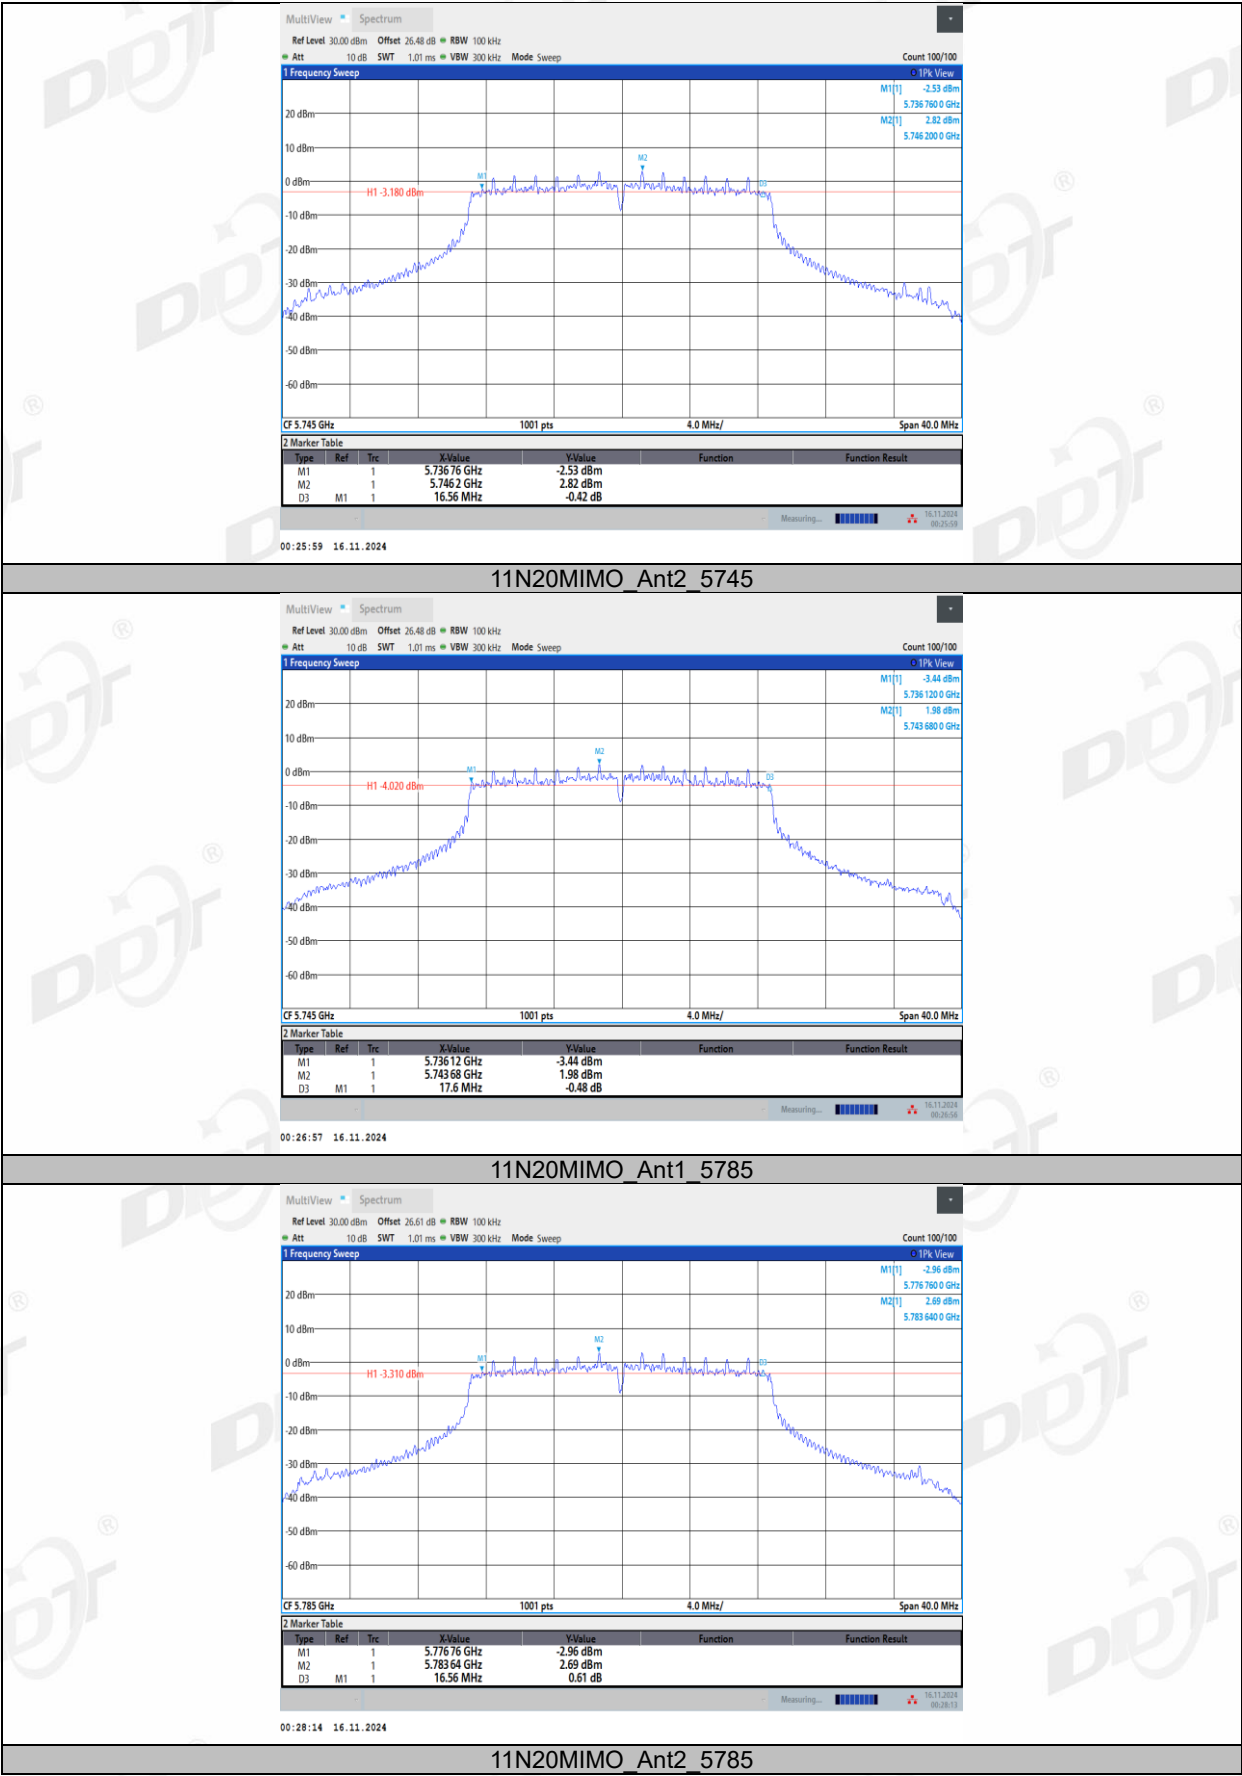


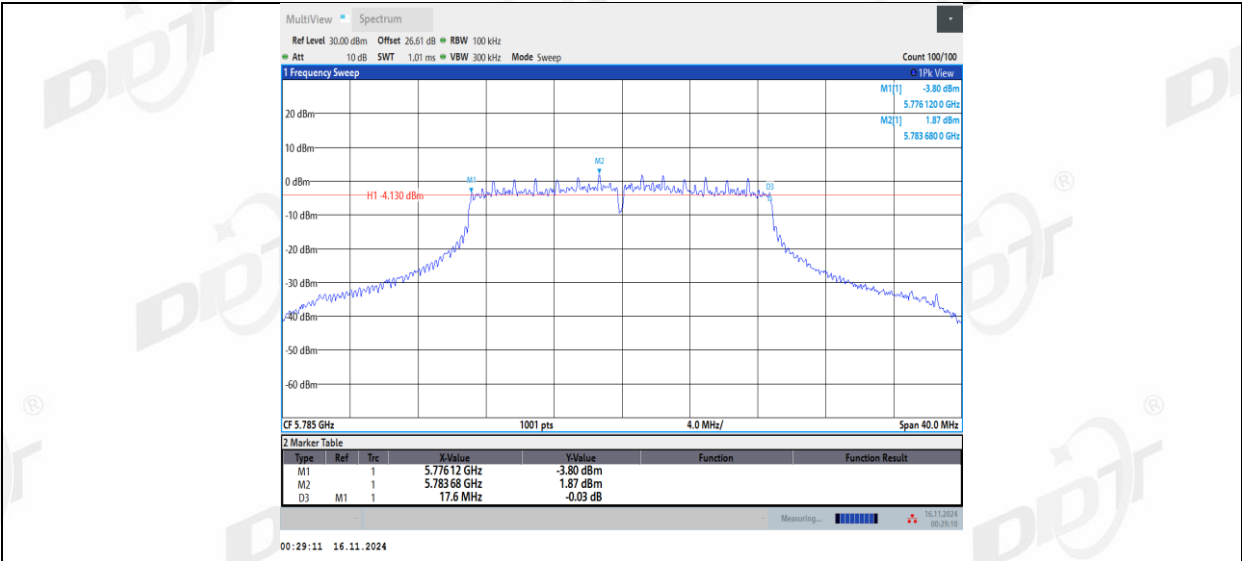


11N20MIMO_Ant1_5825

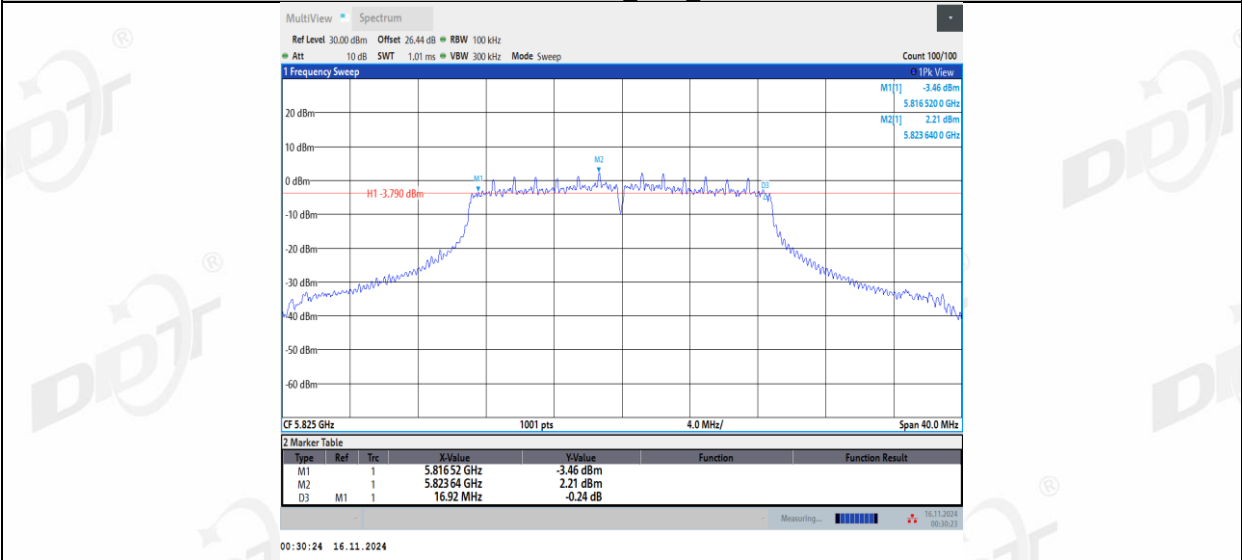


11N20MIMO_Ant2_5825

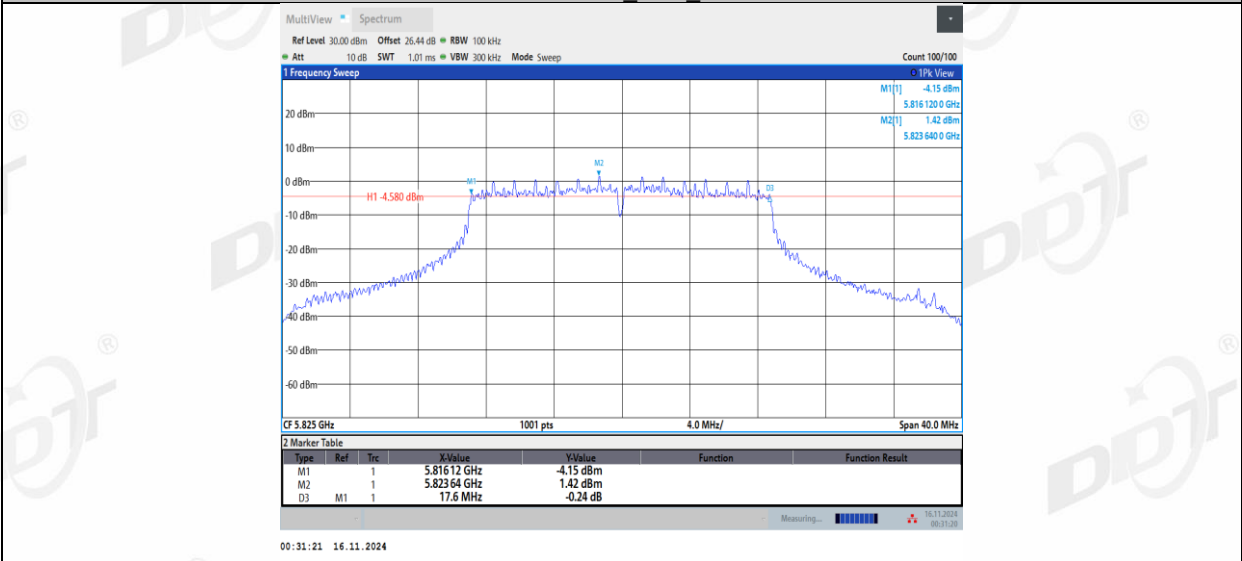


11N40MIMO_Ant1_5755

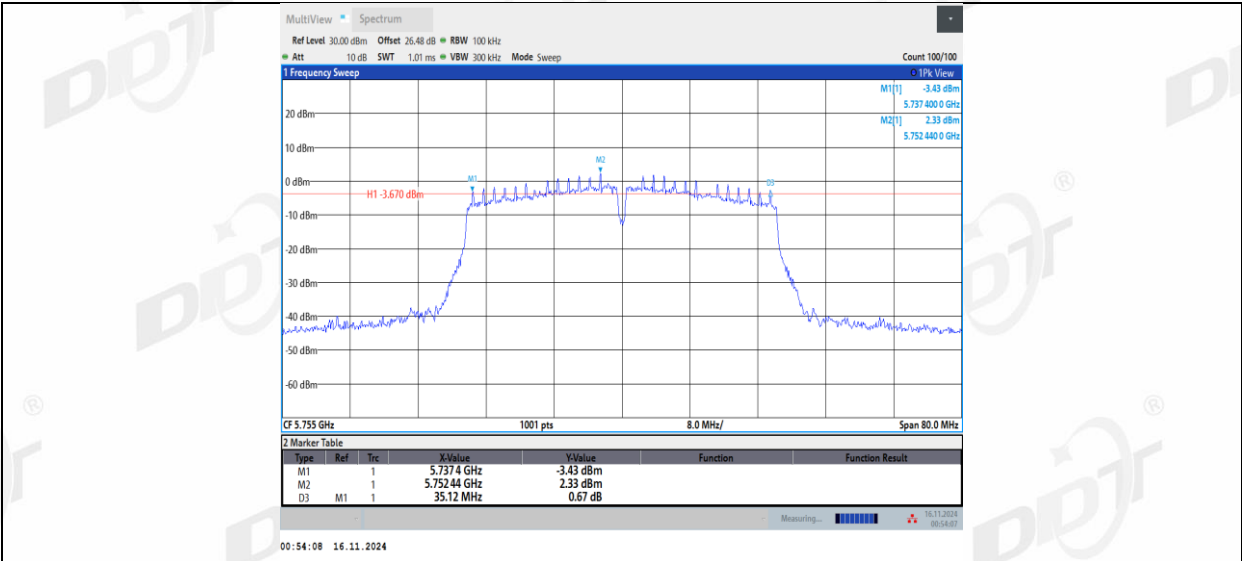


11N40MIMO_Ant2_5755

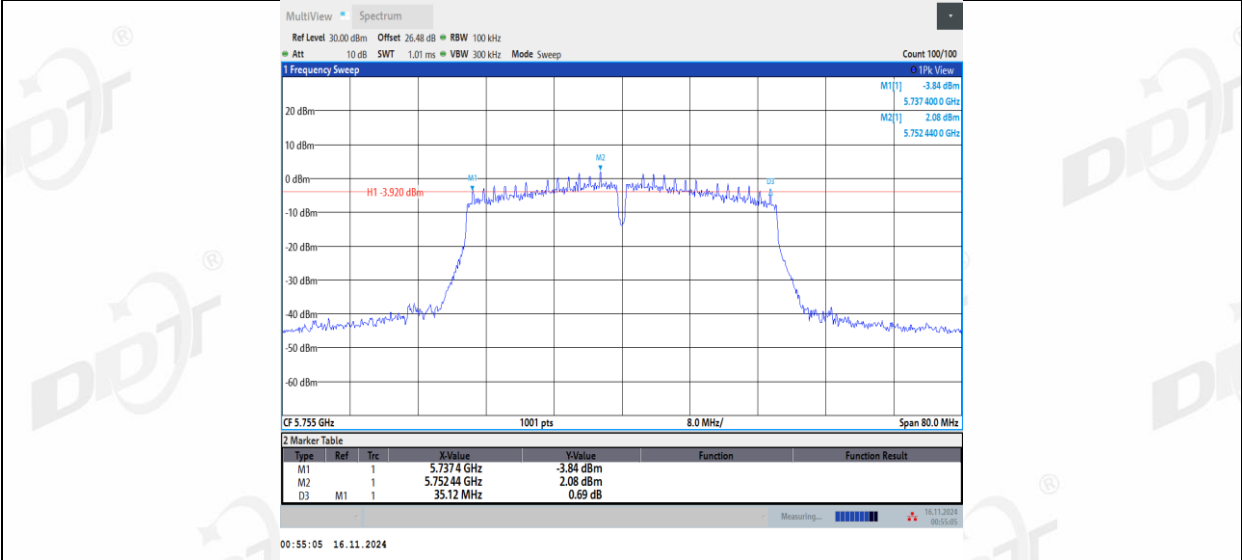


11N40MIMO_Ant1_5795

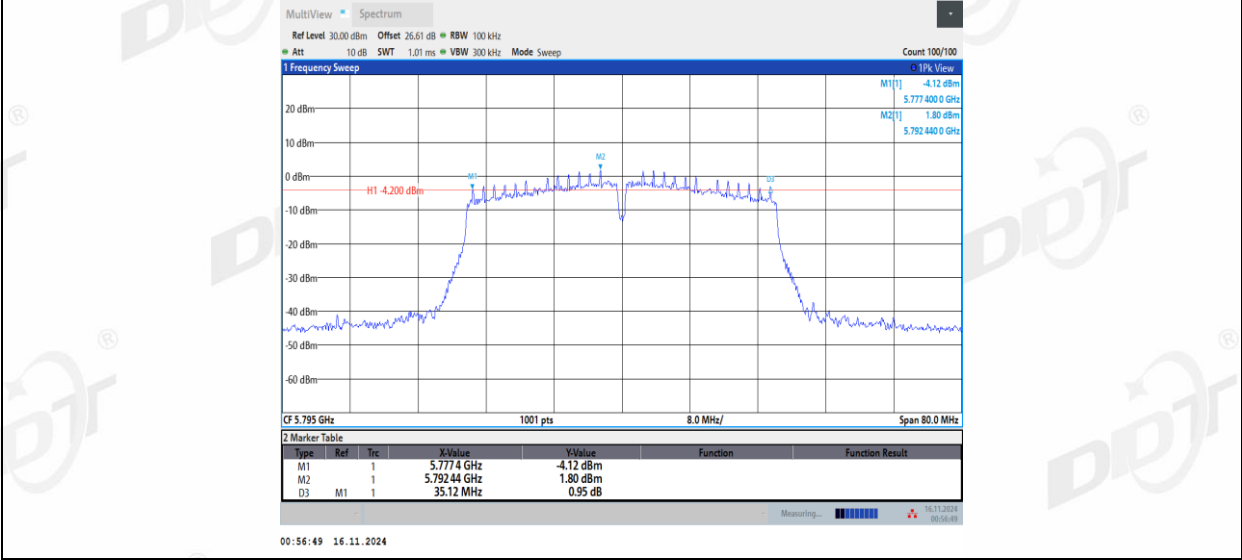


11N40MIMO_Ant2_5795

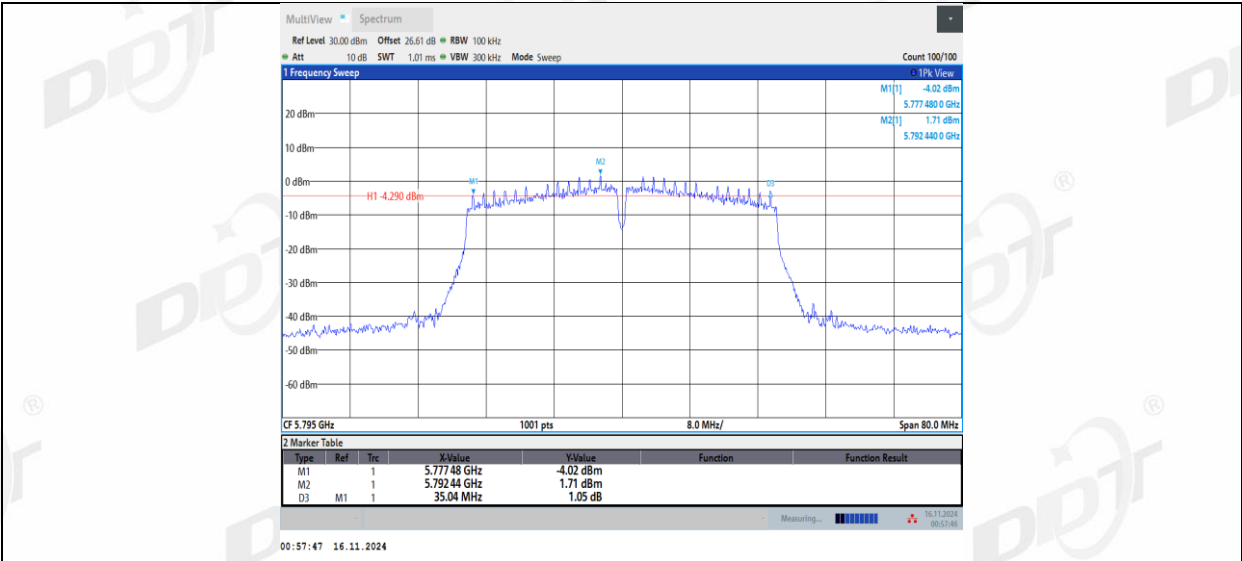


11AC20MIMO_Ant1_5745

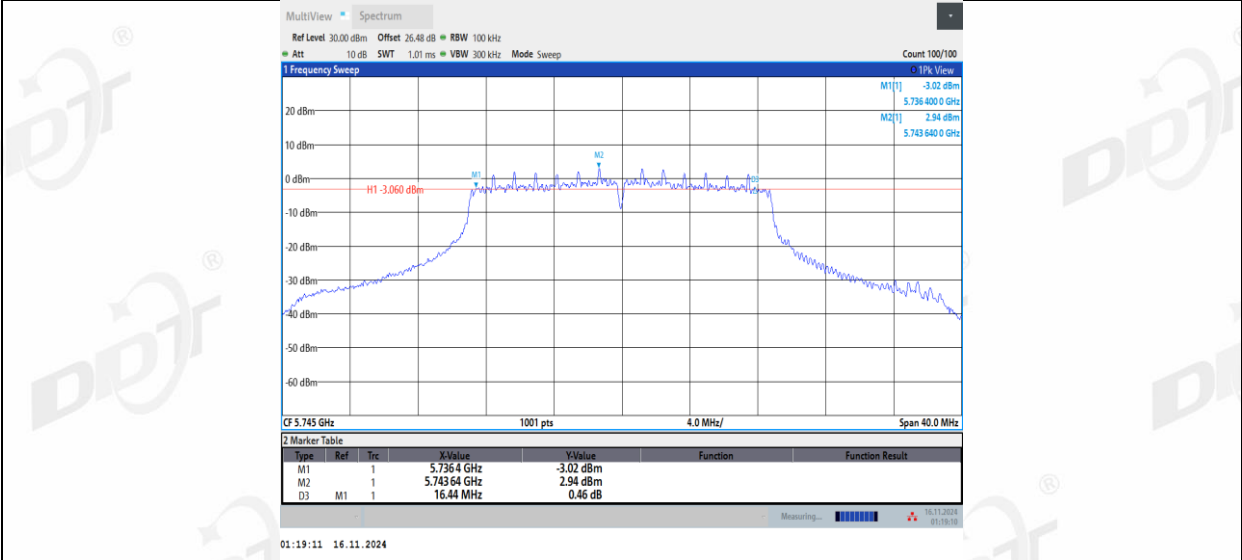


11AC20MIMO_Ant2_5745

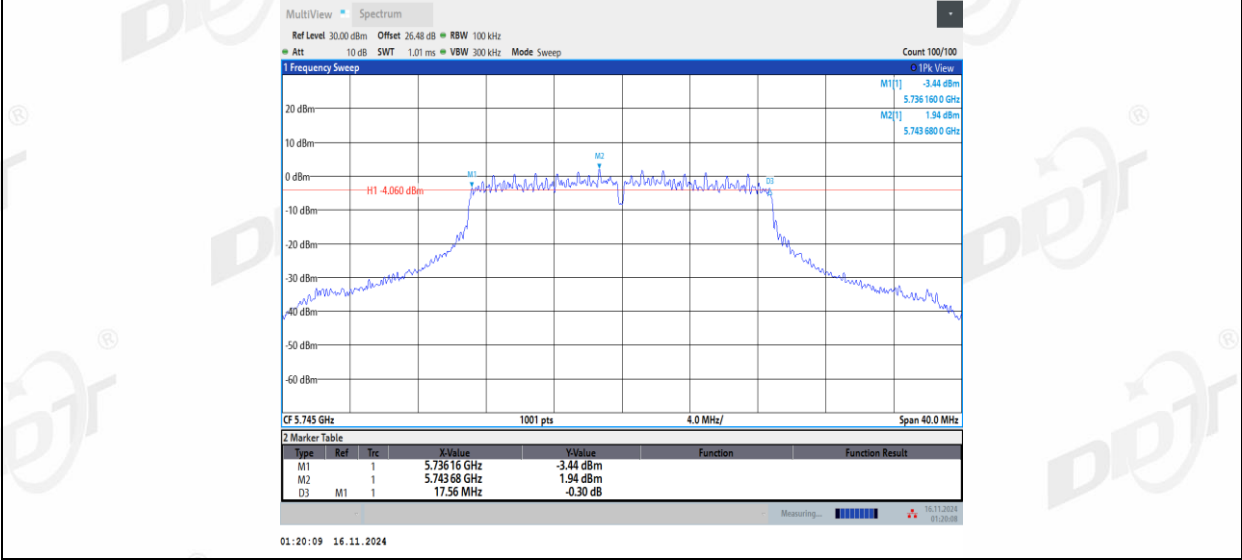


11AC20MIMO_Ant1_5785

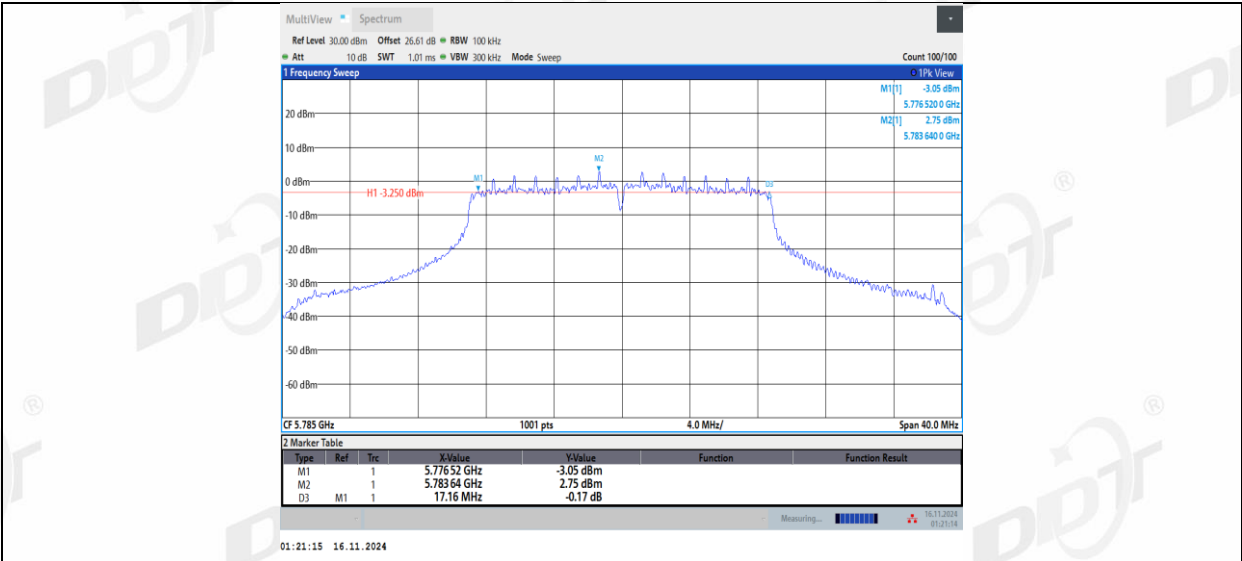


11AC20MIMO_Ant2_5785

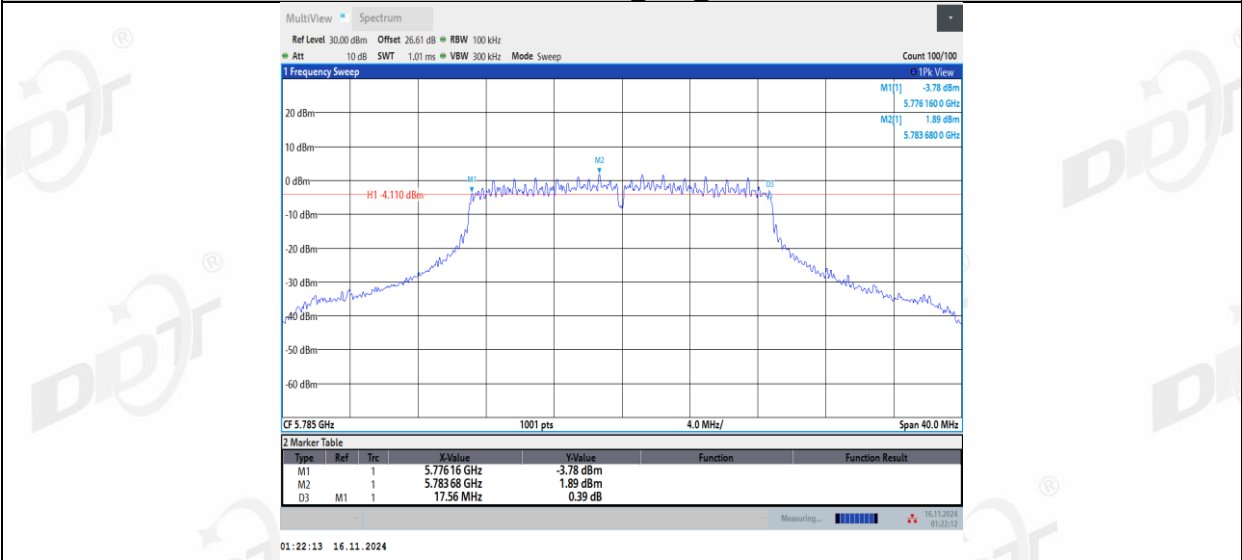


11AC20MIMO_Ant1_5825

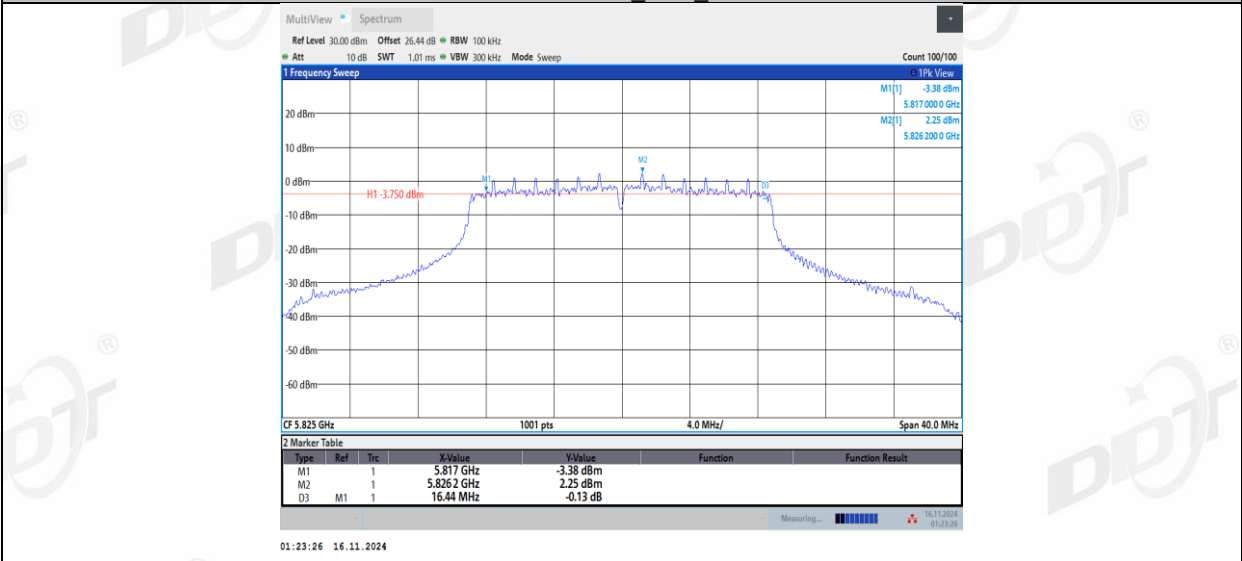


11AC20MIMO_Ant2_5825

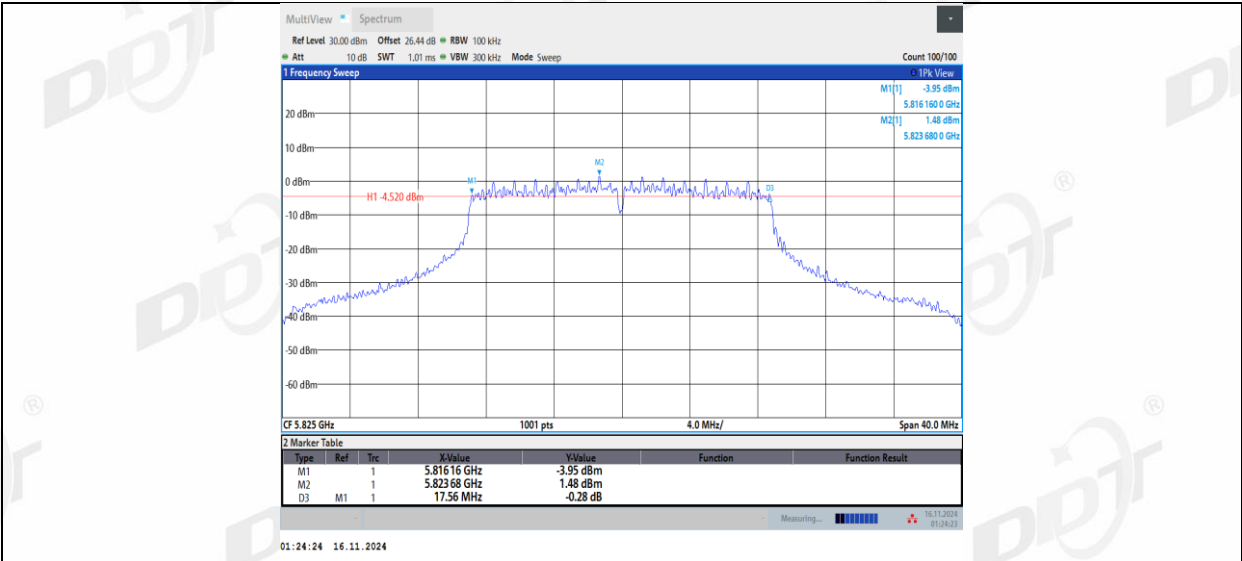


11AC40MIMO_Ant1_5755

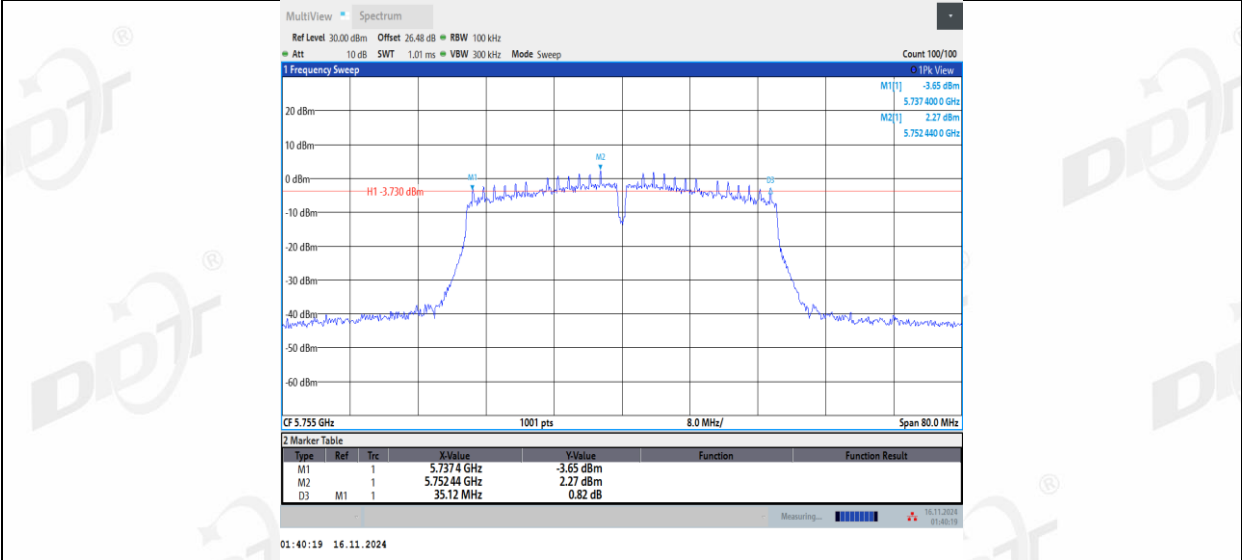


11AC40MIMO_Ant2_5755

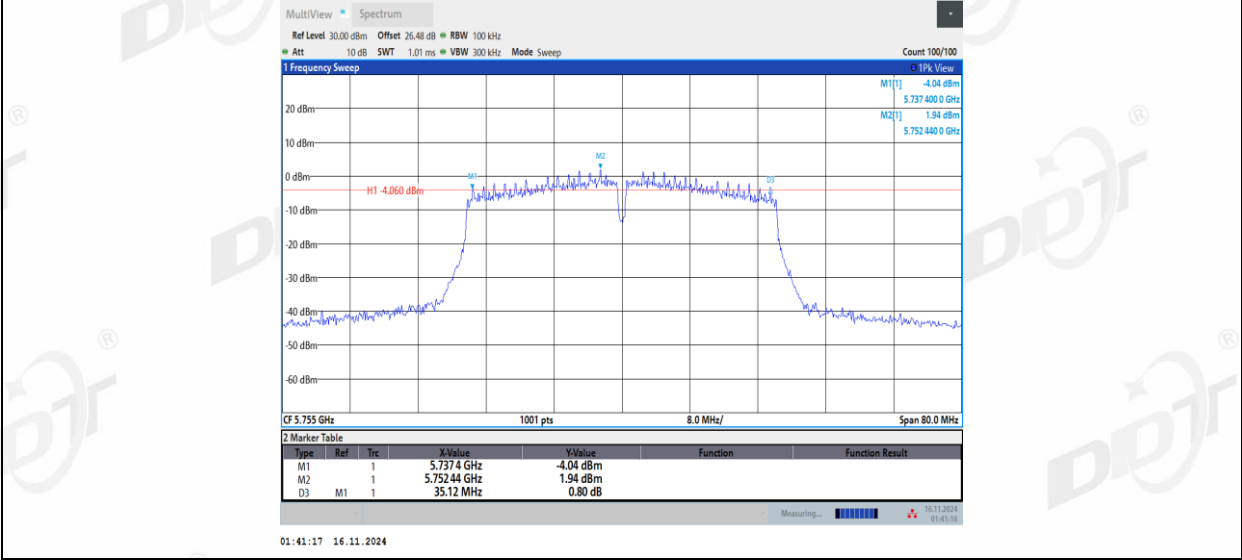


11AC40MIMO_Ant1_5795

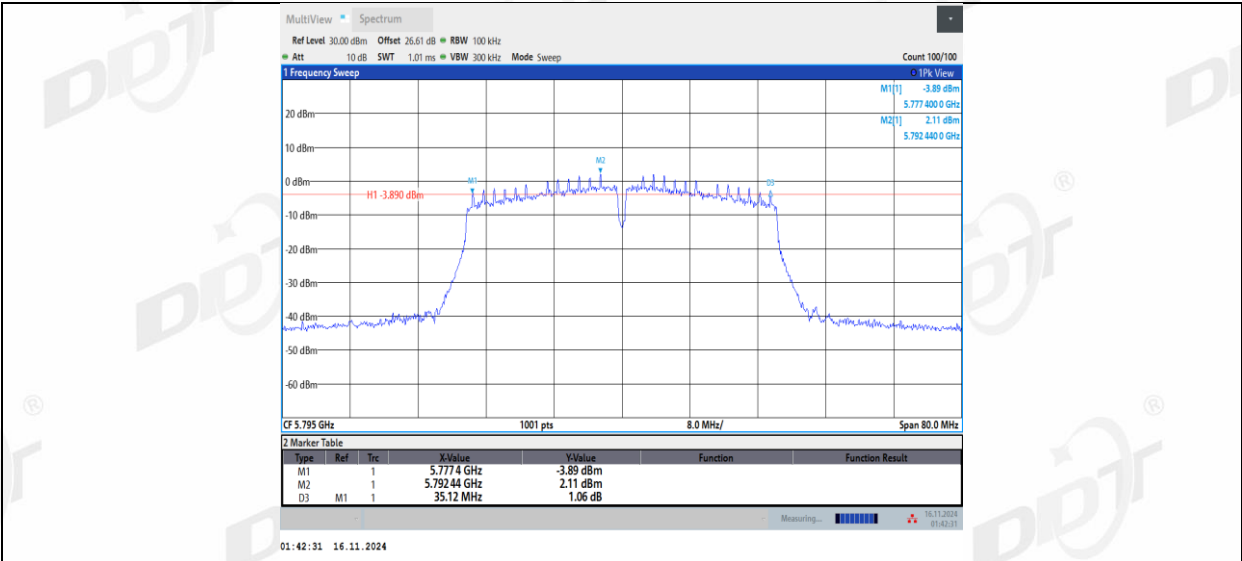


11AC40MIMO_Ant2_5795

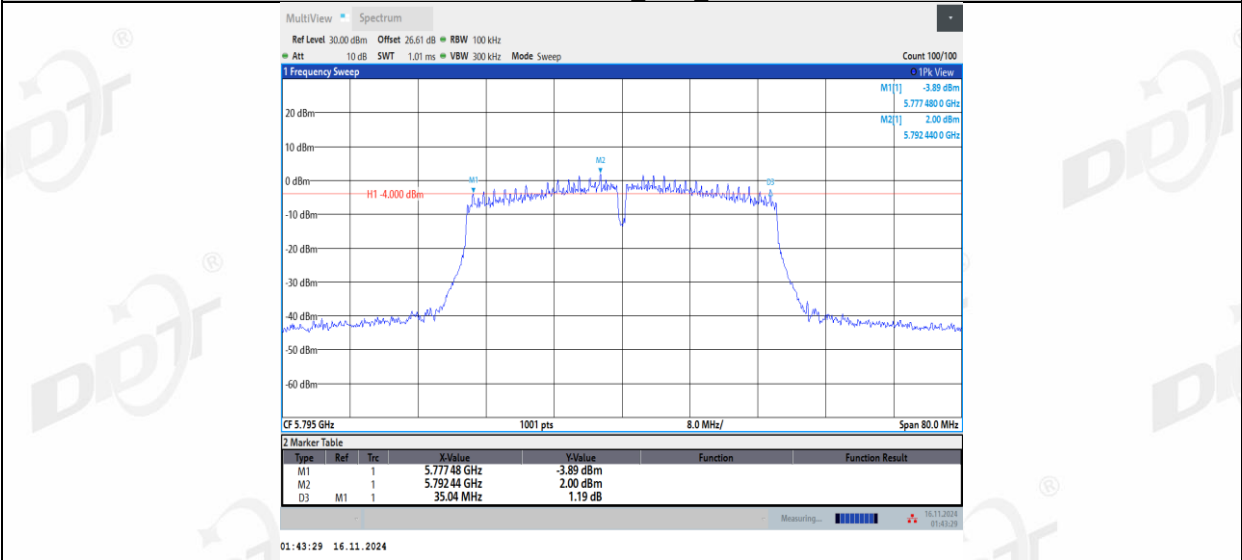


11AC80MIMO_Ant1_5775

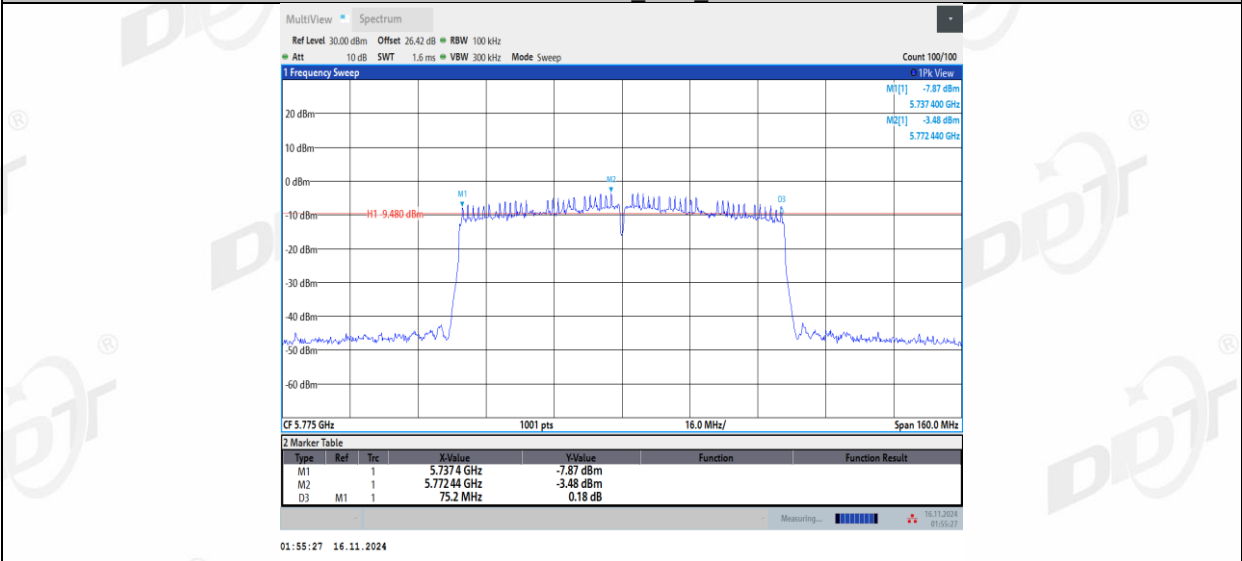


11AC80MIMO_Ant2_5775

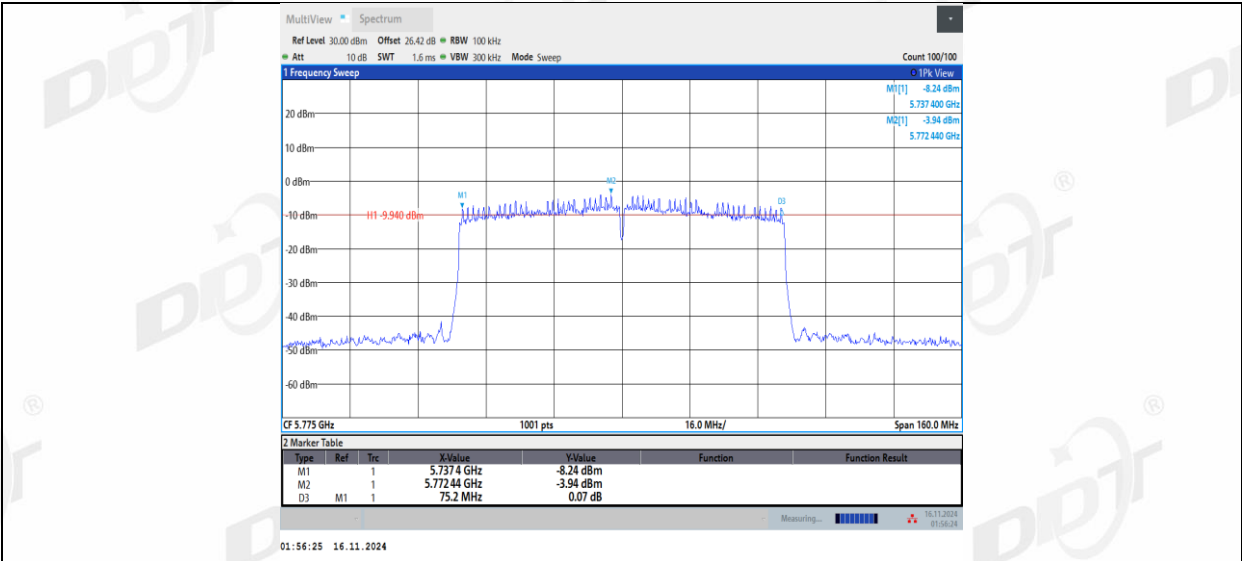


11AX20MIMO_Ant1_5745

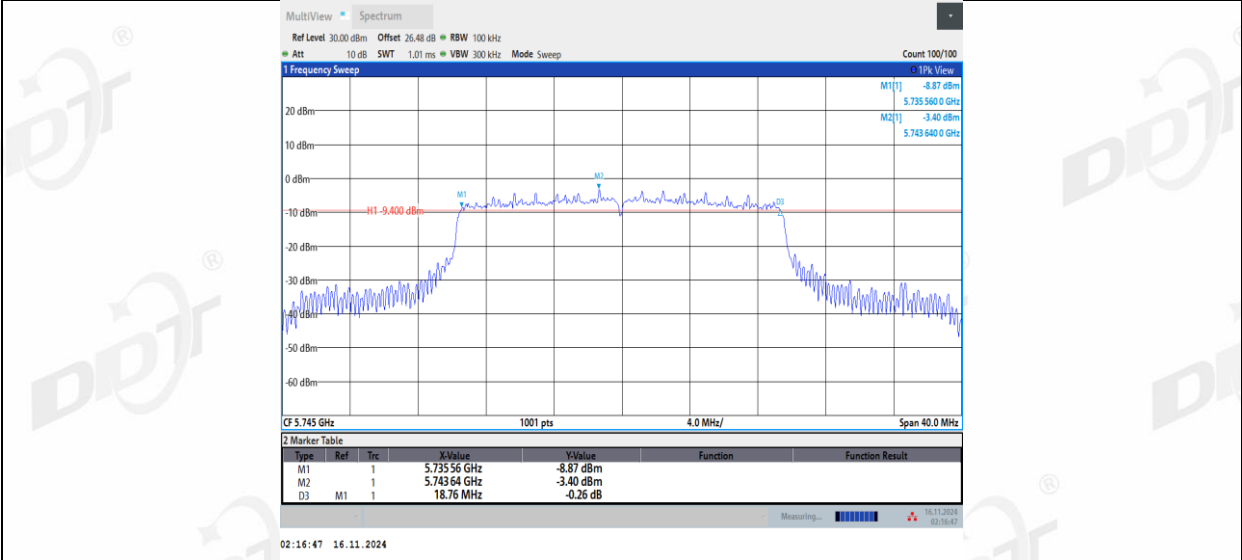


11AX20MIMO_Ant2_5745

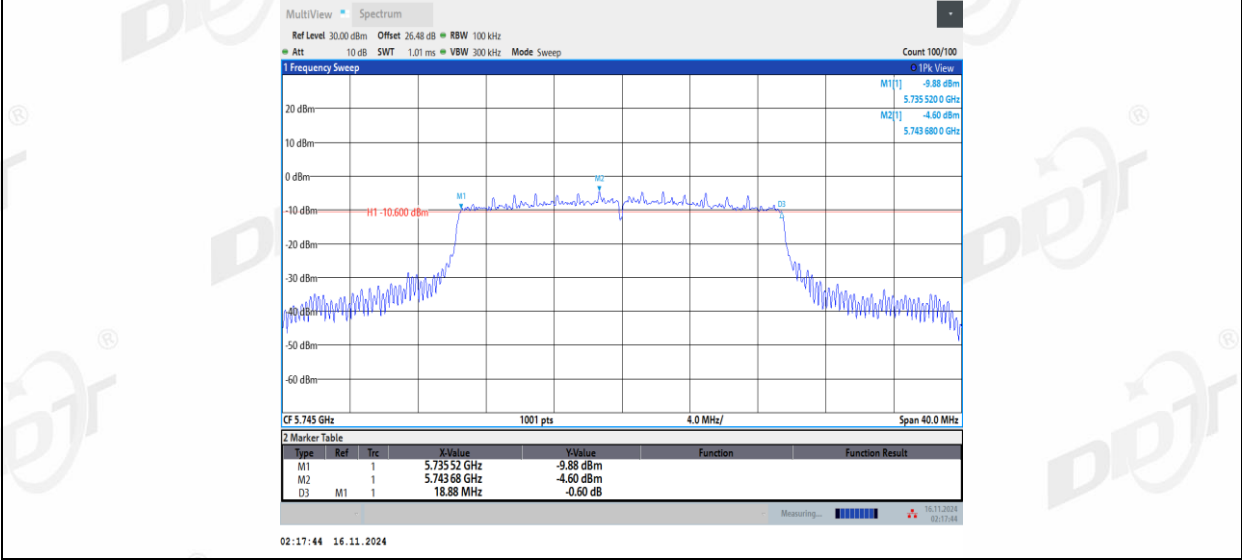


11AX20MIMO_Ant1_5785

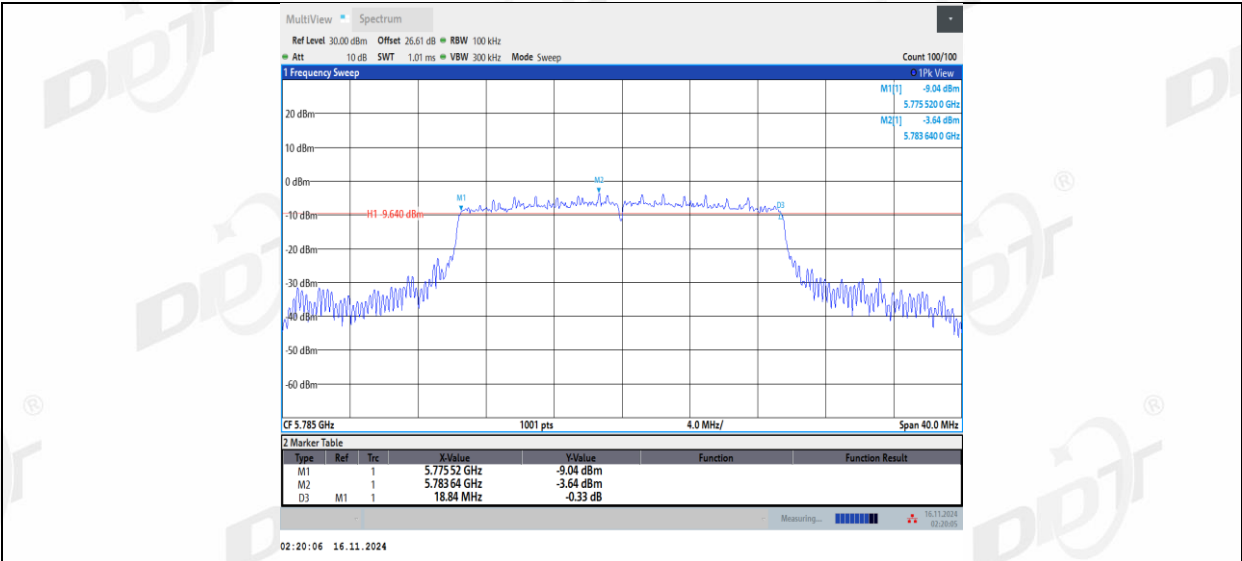


11AX20MIMO_Ant2_5785

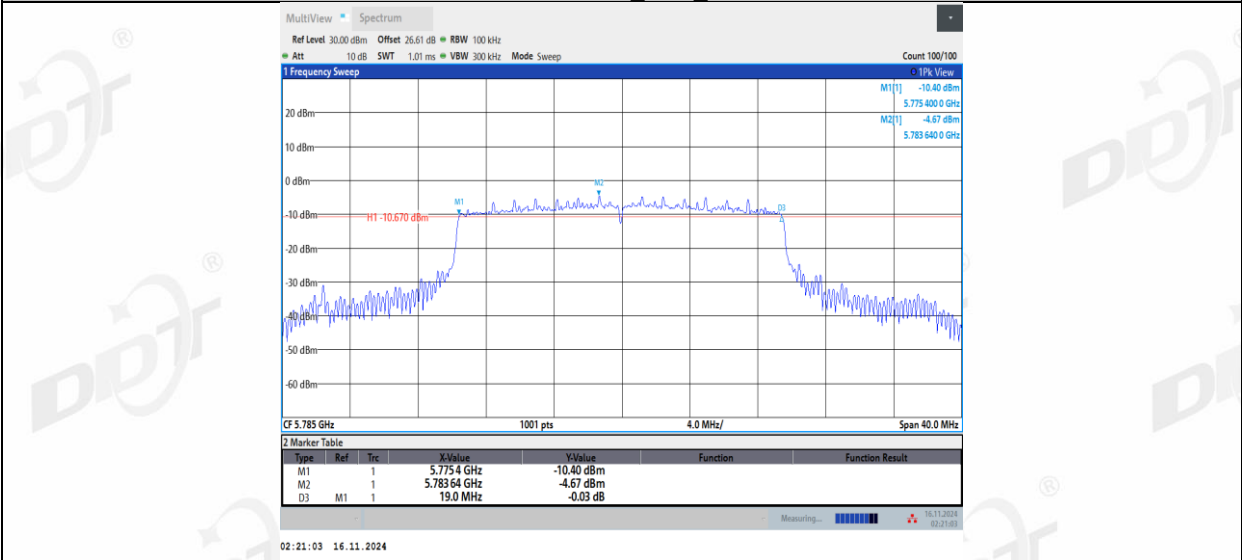


11AX20MIMO_Ant1_5825

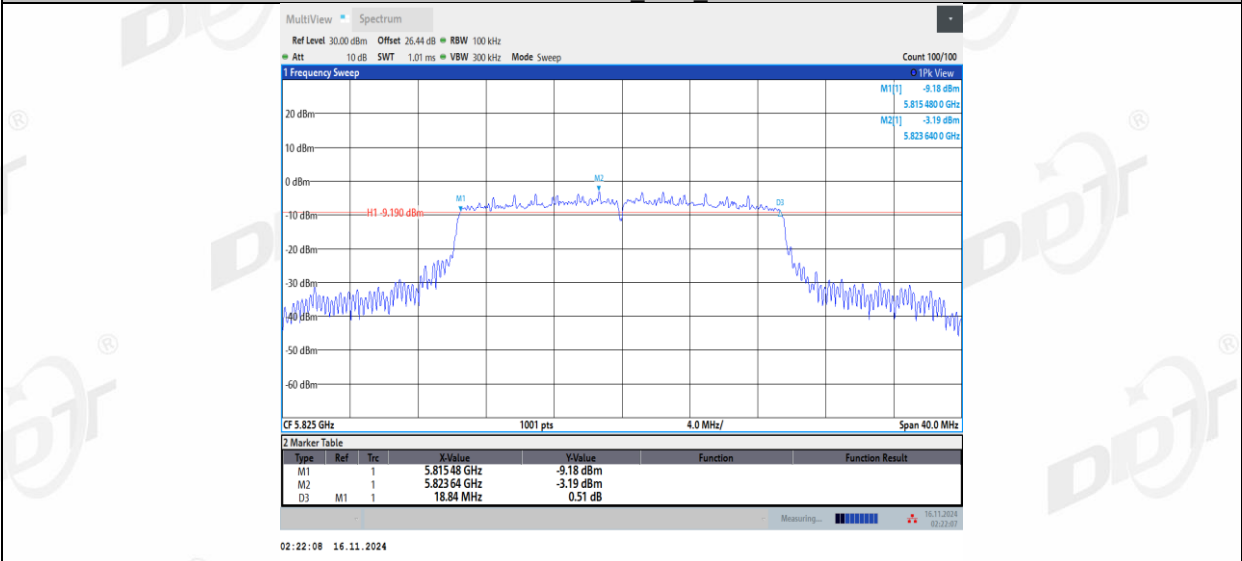


11AX20MIMO_Ant2_5825

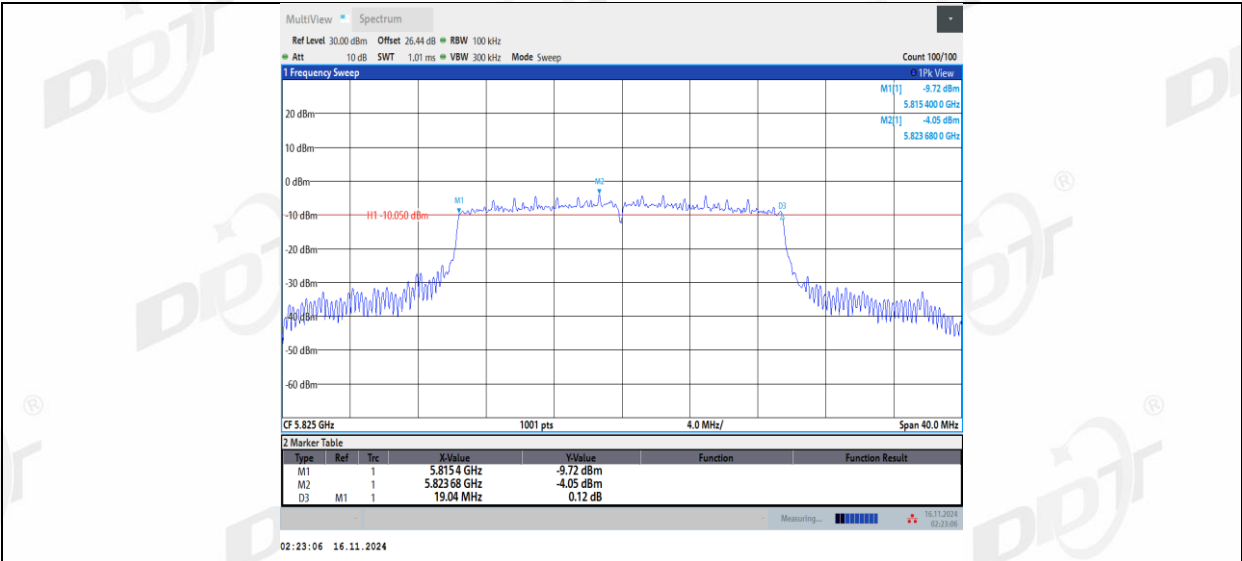


11AX40MIMO_Ant1_5755

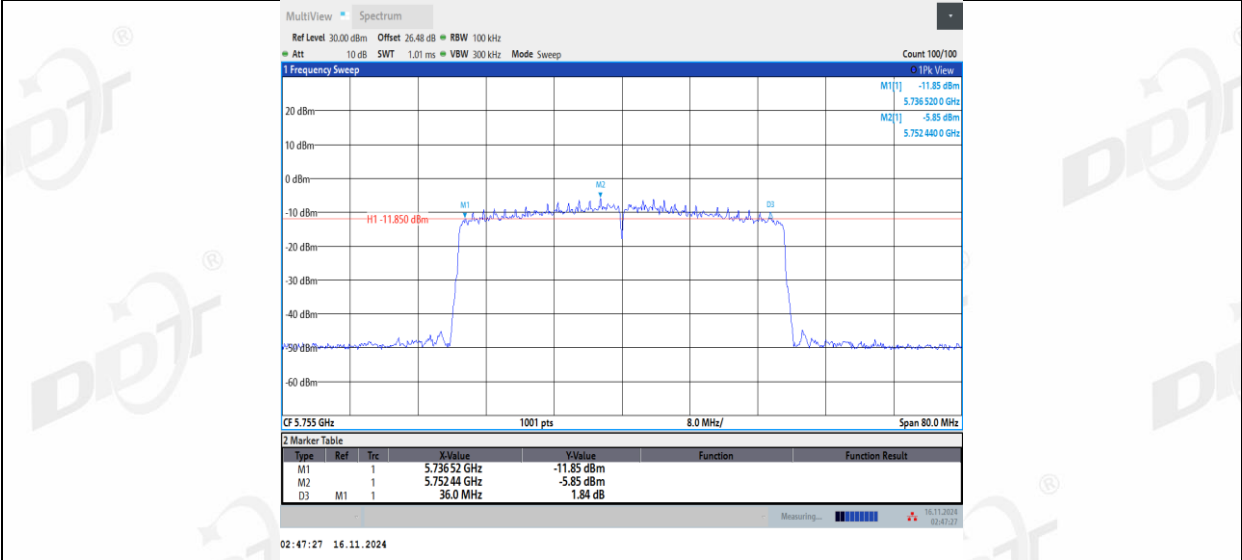


11AX40MIMO_Ant2_5755

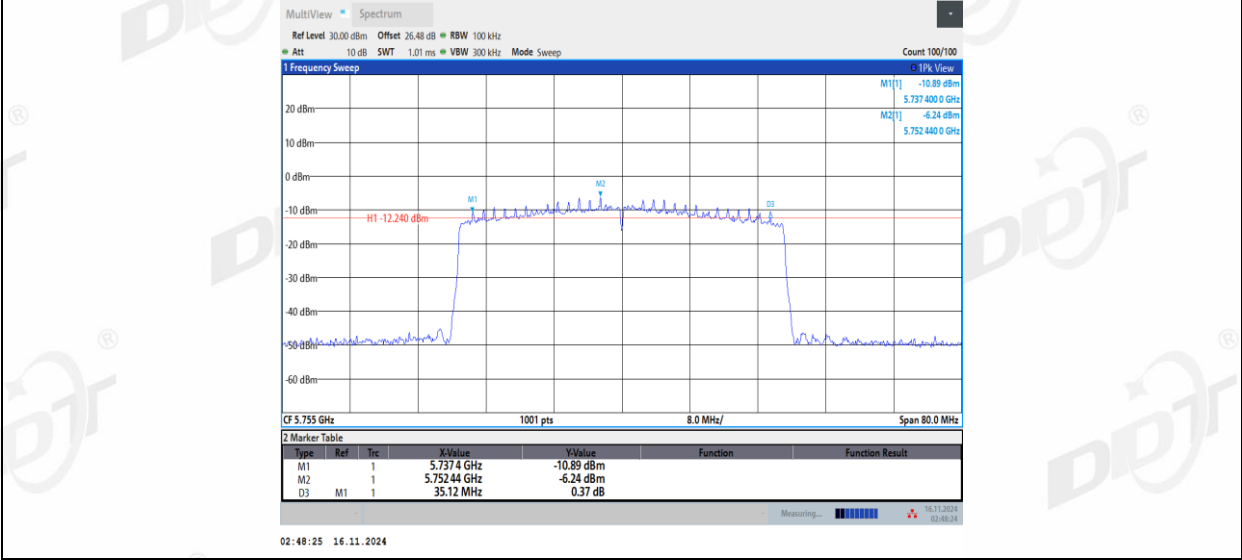


11AX40MIMO_Ant1_5795

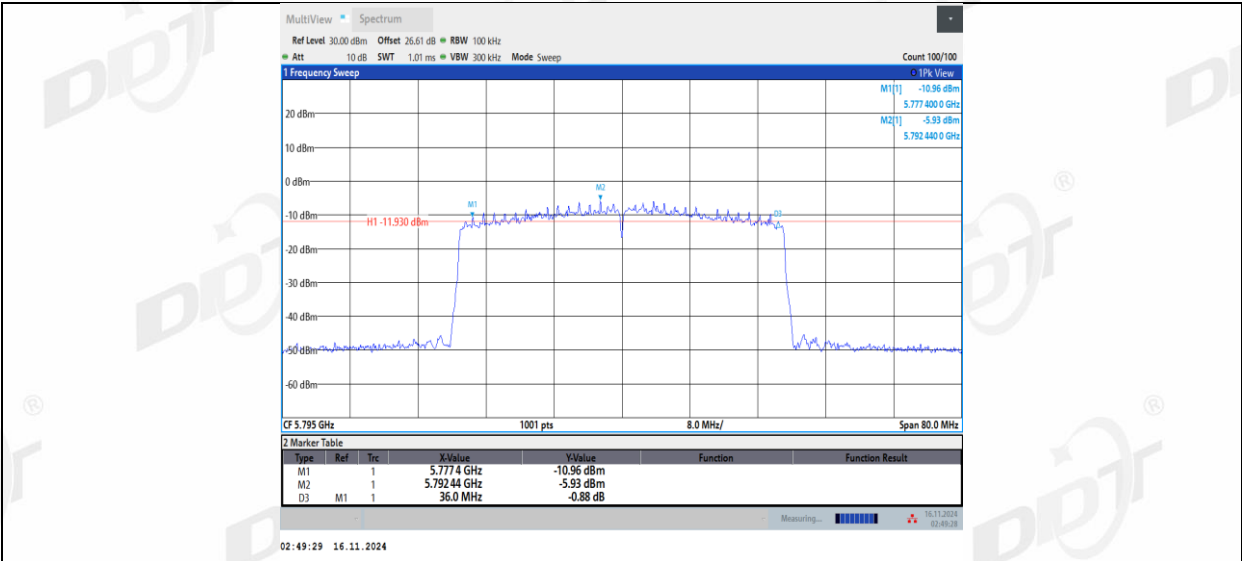


11AX40MIMO_Ant2_5795

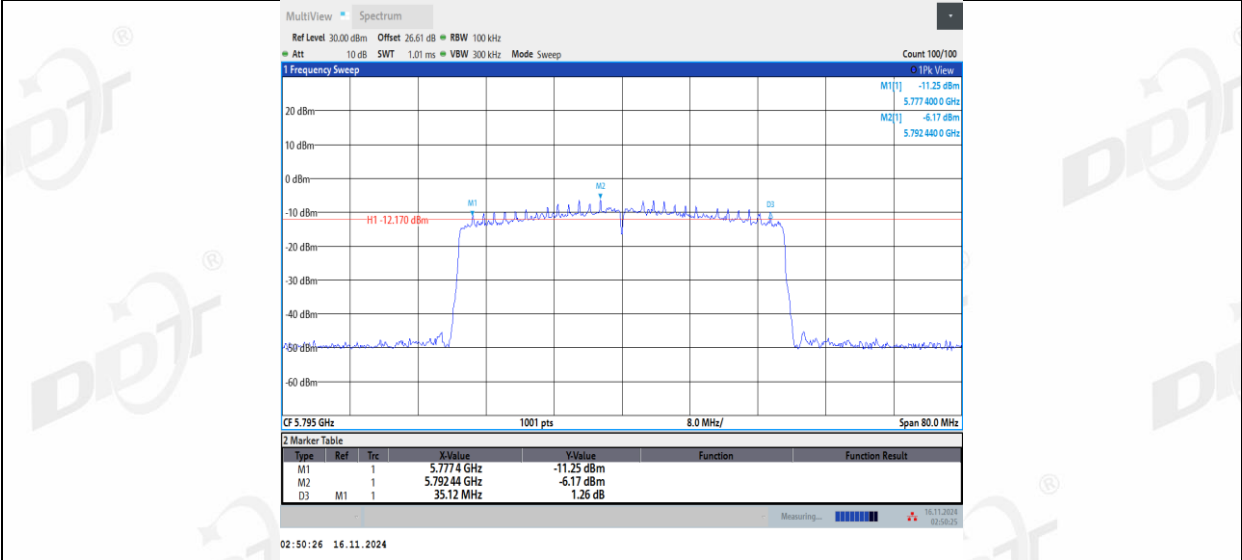

11AX80MIMO_Ant1_5775

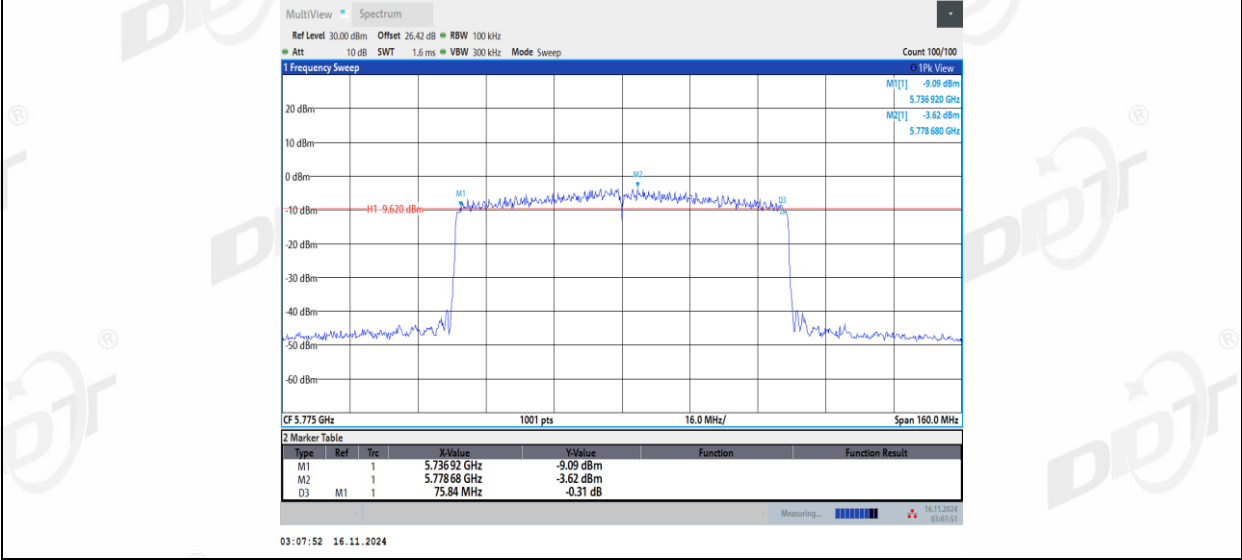


11AX80MIMO_Ant2_5775

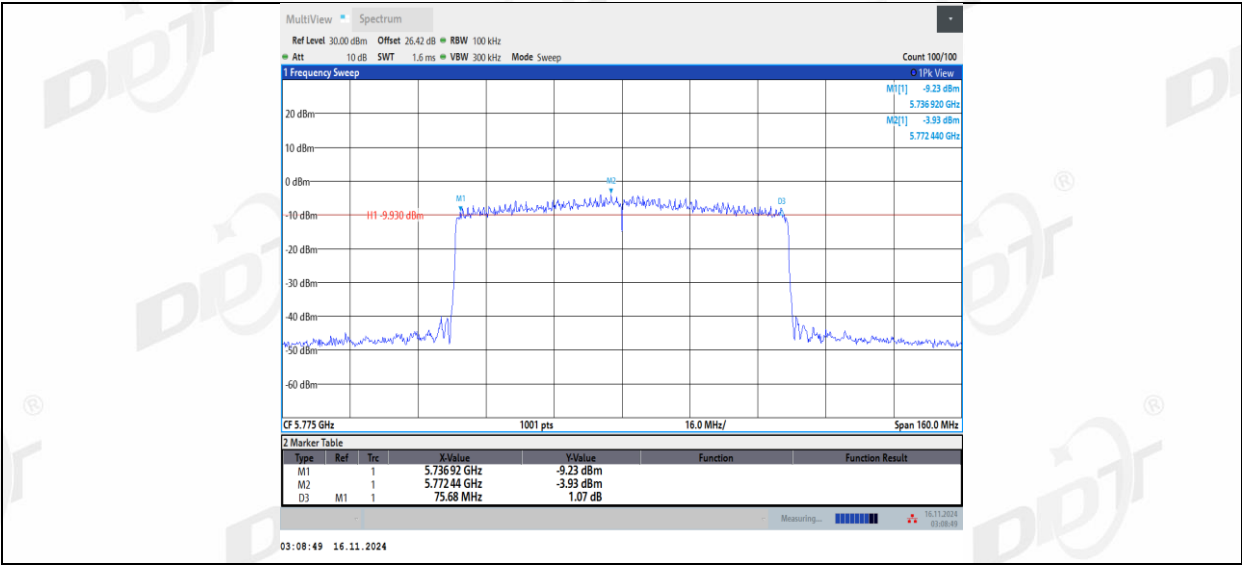

6. 99% Bandwidth

6.1. Block diagram of test setup

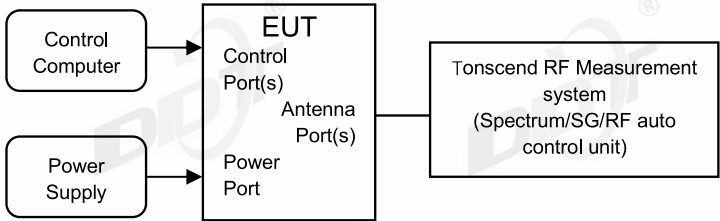

6.2. Limits

Just for Report.

6.3. Test procedure

(1) Connect EUT’s antenna output to spectrum analyzer by RF cable.

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Trace	Max hold

Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

6.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.4℃,47.1%RH	Test Date:	2024.11.14-2024.11.16
Test Power Supply:	Battery	Sample Number:	S24121719-005


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.377	5169.8439	5189.2208	---	---
	Ant2	5180	19.274	5170.2351	5189.5091	---	---
	Ant1	5200	19.332	5190.1853	5209.5177	---	---
	Ant2	5200	19.168	5190.3816	5209.5494	---	---
	Ant1	5240	17.149	5231.3631	5248.5123	---	---
	Ant2	5240	17.207	5231.2988	5248.5063	---	---
	Ant1	5260	19.213	5250.2268	5269.4398	---	---
	Ant2	5260	19.263	5250.2957	5269.5590	---	---
	Ant1	5280	19.222	5270.1581	5289.3803	---	---
	Ant2	5280	19.21	5270.3127	5289.5227	---	---
	Ant1	5320	19.118	5310.3787	5329.4972	---	---
	Ant2	5320	19.178	5310.2451	5329.4233	---	---
	Ant1	5500	19.068	5490.5652	5509.6329	---	---
	Ant2	5500	19.181	5490.3587	5509.5399	---	---
	Ant1	5580	19.253	5570.3076	5589.5602	---	---
	Ant2	5580	19.295	5570.2264	5589.5214	---	---
	Ant1	5700	19.365	5690.3016	5709.6668	---	---
	Ant2	5700	19.242	5690.2165	5709.4583	---	---
	Ant1	5720	19.209	5710.4131	5729.6226	---	---
	Ant2	5720	19.131	5710.3239	5729.4546	---	---
	Ant1	5720 UNII-2C	14.587	5710.4131	5725	---	---
	Ant2	5720 UNII-2C	14.676	5710.3239	5725	---	---
	Ant1	5720 UNII-3	4.623	5725	5729.6226	---	---
	Ant2	5720 UNII-3	4.455	5725	5729.4546	---	---
	Ant1	5745	18.942	5735.2991	5754.2406	---	---
	Ant2	5745	19.175	5735.2490	5754.4243	---	---
	Ant1	5785	19.356	5775.2748	5794.6306	---	---
	Ant2	5785	19.17	5775.3142	5794.4843	---	---
	Ant1	5825	19.048	5815.3348	5834.3827	---	---
	Ant2	5825	19.195	5815.2470	5834.4422	---	---
11N20MIM O	Ant1	5180	20.163	5169.8716	5190.0349	---	---
	Ant2	5180	18.619	5170.5304	5189.1496	---	---
	Ant1	5200	20.062	5190.0105	5210.0723	---	---
	Ant2	5200	18.564	5190.6270	5209.1910	---	---
	Ant1	5240	17.987	5230.9368	5248.9237	---	---
	Ant2	5240	17.729	5231.0564	5248.7850	---	---
	Ant1	5260	20.125	5249.9581	5270.0829	---	---
	Ant2	5260	18.604	5250.5971	5269.2015	---	---
	Ant1	5280	20.106	5269.9600	5290.0662	---	---
	Ant2	5280	18.594	5270.5482	5289.1426	---	---
	Ant1	5320	20.076	5309.8806	5329.9568	---	---
	Ant2	5320	18.594	5310.5743	5329.1684	---	---
	Ant1	5500	20.041	5490.0334	5510.0740	---	---
	Ant2	5500	18.537	5490.6009	5509.1382	---	---
	Ant1	5580	20.193	5569.8774	5590.0700	---	---
	Ant2	5580	18.572	5570.5899	5589.1618	---	---
	Ant1	5700	20.135	5689.8632	5709.9984	---	---
	Ant2	5700	18.57	5690.5179	5709.0878	---	---
	Ant1	5720	20.078	5709.9483	5730.0268	---	---
	Ant2	5720	18.492	5710.6234	5729.1159	---	---
	Ant1	5720 UNII-2C	15.052	5709.9483	5725	---	---
	Ant2	5720 UNII-2C	14.377	5710.6234	5725	---	---
	Ant1	5720 UNII-3	5.027	5725	5730.0268	---	---
	Ant2	5720 UNII-3	4.116	5725	5729.1159	---	---
	Ant1	5745	20.097	5734.8821	5754.9787	---	---


	Ant2	5745	18.502	5735.5777	5754.0792	---	---
	Ant1	5785	20.056	5774.9767	5795.0329	---	---
	Ant2	5785	18.526	5775.6109	5794.1369	---	---
	Ant1	5825	20.173	5814.8691	5835.0423	---	---
	Ant2	5825	18.575	5815.5173	5834.0924	---	---
11N40MIM O	Ant1	5190	35.966	5171.9961	5207.9620	---	---
	Ant2	5190	36.067	5171.9419	5208.0092	---	---
	Ant1	5230	35.934	5211.9855	5247.9191	---	---
	Ant2	5230	36.033	5211.8952	5247.9285	---	---
	Ant1	5270	35.949	5252.0119	5287.9610	---	---
	Ant2	5270	35.969	5251.9663	5287.9355	---	---
	Ant1	5310	35.934	5291.9597	5327.8939	---	---
	Ant2	5310	36.024	5291.9571	5327.9806	---	---
	Ant1	5510	35.924	5492.0190	5527.9435	---	---
	Ant2	5510	36.002	5492.0024	5528.0048	---	---
	Ant1	5550	35.94	5531.9766	5567.9168	---	---
	Ant2	5550	36.028	5531.8989	5567.9268	---	---
	Ant1	5670	35.97	5652.0073	5687.9770	---	---
	Ant2	5670	35.993	5652.0171	5688.0106	---	---
	Ant1	5710	35.982	5691.9514	5727.9329	---	---
	Ant2	5710	36.069	5691.9050	5727.9741	---	---
	Ant1	5710 UNII-2C	33.049	5691.9514	5725	---	---
	Ant2	5710 UNII-2C	33.095	5691.9050	5725	---	---
	Ant1	5710 UNII-3	2.933	5725	5727.9329	---	---
	Ant2	5710 UNII-3	2.974	5725	5727.9741	---	---
	Ant1	5755	35.958	5736.9424	5772.9006	---	---
	Ant2	5755	36.046	5736.8697	5772.9152	---	---
	Ant1	5795	35.899	5776.9992	5812.8987	---	---
	Ant2	5795	36.025	5776.9374	5812.9628	---	---
11AC20MI MO	Ant1	5180	19.879	5170.0222	5189.9011	---	---
	Ant2	5180	18.336	5170.8346	5189.1708	---	---
	Ant1	5200	19.82	5190.1239	5209.9435	---	---
	Ant2	5200	18.306	5190.9044	5209.2107	---	---
	Ant1	5240	17.946	5230.9604	5248.9061	---	---
	Ant2	5240	17.615	5231.1413	5248.7559	---	---
	Ant1	5260	19.721	5250.1313	5269.8525	---	---
	Ant2	5260	18.178	5250.9318	5269.1098	---	---
	Ant1	5280	19.708	5270.1426	5289.8509	---	---
	Ant2	5280	18.201	5270.8988	5289.0999	---	---
	Ant1	5320	19.82	5309.9934	5329.8130	---	---
	Ant2	5320	18.3	5310.8570	5329.1567	---	---
	Ant1	5500	19.755	5490.1329	5509.8883	---	---
	Ant2	5500	18.305	5490.8747	5509.1801	---	---
	Ant1	5580	19.773	5570.0512	5589.8247	---	---
	Ant2	5580	18.199	5570.9231	5589.1220	---	---
	Ant1	5700	19.866	5690.0140	5709.8795	---	---
	Ant2	5700	18.314	5690.8086	5709.1230	---	---
	Ant1	5720	19.74	5710.0714	5729.8113	---	---
	Ant2	5720	18.192	5710.9160	5729.1079	---	---
	Ant1	5720 UNII-2C	14.929	5710.0714	5725	---	---
	Ant2	5720 UNII-2C	14.084	5710.9160	5725	---	---
	Ant1	5720 UNII-3	4.811	5725	5729.8113	---	---
	Ant2	5720 UNII-3	4.108	5725	5729.1079	---	---
	Ant1	5745	19.655	5735.0452	5754.7006	---	---
	Ant2	5745	18.215	5735.8588	5754.0740	---	---
	Ant1	5785	19.695	5775.1195	5794.8141	---	---
	Ant2	5785	18.189	5775.9154	5794.1045	---	---
	Ant1	5825	19.749	5815.0660	5834.8151	---	---
	Ant2	5825	18.228	5815.8542	5834.0821	---	---
11AC40MI MO	Ant1	5190	35.855	5172.0287	5207.8835	---	---
	Ant2	5190	36.149	5171.9346	5208.0839	---	---
	Ant1	5230	35.878	5212.0011	5247.8795	---	---
	Ant2	5230	36.112	5211.9003	5248.0126	---	---
	Ant1	5270	35.85	5252.0315	5287.8816	---	---


	Ant2	5270	36.08	5251.9803	5288.0605	---	---
	Ant1	5310	35.826	5292.0253	5327.8510	---	---
	Ant2	5310	36.157	5291.9054	5328.0623	---	---
	Ant1	5510	35.86	5492.0329	5527.8932	---	---
	Ant2	5510	36.128	5491.9562	5528.0842	---	---
	Ant1	5550	35.844	5532.0181	5567.8621	---	---
	Ant2	5550	36.078	5531.9079	5567.9861	---	---
	Ant1	5670	35.816	5652.0671	5687.8827	---	---
	Ant2	5670	36.066	5651.9922	5688.0583	---	---
	Ant1	5710	35.881	5692.0077	5727.8884	---	---
	Ant2	5710	36.128	5691.9120	5728.0403	---	---
	Ant1	5710 UNII-2C	32.992	5692.0077	5725	---	---
	Ant2	5710 UNII-2C	33.088	5691.9120	5725	---	---
	Ant1	5710 UNII-3	2.888	5725	5727.8884	---	---
	Ant2	5710 UNII-3	3.04	5725	5728.0403	---	---
	Ant1	5755	35.863	5736.9884	5772.8512	---	---
	Ant2	5755	36.147	5736.8541	5773.0006	---	---
	Ant1	5795	35.85	5776.9890	5812.8393	---	---
	Ant2	5795	36.139	5776.9230	5813.0620	---	---
11AC80MI MO	Ant1	5210	75.182	5172.3731	5247.5549	---	---
	Ant2	5210	74.853	5172.5926	5247.4454	---	---
	Ant1	5290	75.161	5252.3530	5327.5136	---	---
	Ant2	5290	74.927	5252.5635	5327.4903	---	---
	Ant1	5530	75.119	5492.3976	5567.5166	---	---
	Ant2	5530	74.878	5492.5660	5567.4442	---	---
	Ant1	5610	75.198	5572.3393	5647.5376	---	---
	Ant2	5610	74.842	5572.5949	5647.4365	---	---
	Ant1	5690	75.112	5652.3875	5727.4991	---	---
	Ant2	5690	74.847	5652.6107	5727.4574	---	---
	Ant1	5690 UNII-2C	72.613	5652.3875	5725	---	---
	Ant2	5690 UNII-2C	72.389	5652.6107	5725	---	---
	Ant1	5690 UNII-3	2.499	5725	5727.4991	---	---
	Ant2	5690 UNII-3	2.457	5725	5727.4574	---	---
11AX20MI MO	Ant1	5775	75.273	5737.1789	5812.4520	---	---
	Ant2	5775	75.039	5737.3597	5812.3990	---	---
	Ant1	5180	19.372	5170.2436	5189.6160	---	---
	Ant2	5180	19.364	5170.2770	5189.6408	---	---
	Ant1	5200	19.383	5190.2835	5209.6669	---	---
	Ant2	5200	19.287	5190.3419	5209.6290	---	---
	Ant1	5240	18.91	5230.4853	5249.3956	---	---
	Ant2	5240	18.912	5230.4856	5249.3972	---	---
	Ant1	5260	19.395	5250.2595	5269.6548	---	---
	Ant2	5260	19.339	5250.2853	5269.6246	---	---
	Ant1	5280	19.319	5270.3066	5289.6256	---	---
	Ant2	5280	19.352	5270.3034	5289.6550	---	---
	Ant1	5320	19.37	5310.2139	5329.5835	---	---
	Ant2	5320	19.311	5310.3089	5329.6197	---	---
	Ant1	5500	19.35	5490.3211	5509.6715	---	---
	Ant2	5500	19.3	5490.2960	5509.5956	---	---
	Ant1	5580	19.417	5570.2185	5589.6354	---	---
	Ant2	5580	19.316	5570.2994	5589.6153	---	---
	Ant1	5700	19.472	5690.1795	5709.6511	---	---
	Ant2	5700	19.275	5690.2738	5709.5485	---	---
	Ant1	5720	19.408	5710.2608	5729.6684	---	---
	Ant2	5720	19.278	5710.3138	5729.5922	---	---
	Ant1	5720 UNII-2C	14.739	5710.2608	5725	---	---
	Ant2	5720 UNII-2C	14.686	5710.3138	5725	---	---
	Ant1	5720 UNII-3	4.668	5725	5729.6684	---	---
	Ant2	5720 UNII-3	4.592	5725	5729.5922	---	---
	Ant1	5745	19.355	5735.2889	5754.6436	---	---
	Ant2	5745	19.291	5735.2941	5754.5850	---	---
	Ant1	5785	19.367	5775.2559	5794.6231	---	---
	Ant2	5785	19.312	5775.3039	5794.6162	---	---
	Ant1	5825	19.439	5815.2537	5834.6931	---	---

11AX40MI MO	Ant2	5825	19.339	5815.2581	5834.5972	---	---
	Ant1	5190	37.636	5171.1451	5208.7816	---	---
	Ant2	5190	37.633	5171.1618	5208.7949	---	---
	Ant1	5230	37.608	5211.1187	5248.7262	---	---
	Ant2	5230	37.674	5211.1215	5248.7958	---	---
	Ant1	5270	37.618	5251.1446	5288.7622	---	---
	Ant2	5270	37.599	5251.1558	5288.7547	---	---
	Ant1	5310	37.521	5291.1814	5328.7026	---	---
	Ant2	5310	37.635	5291.1212	5328.7561	---	---
	Ant1	5510	37.645	5491.1531	5528.7984	---	---
	Ant2	5510	37.556	5491.1762	5528.7323	---	---
	Ant1	5550	37.578	5531.1423	5568.7202	---	---
	Ant2	5550	37.625	5531.1382	5568.7632	---	---
	Ant1	5670	37.59	5651.1884	5688.7786	---	---
	Ant2	5670	37.549	5651.2332	5688.7820	---	---
	Ant1	5710	37.594	5691.1275	5728.7216	---	---
	Ant2	5710	37.648	5691.1222	5728.7702	---	---
	Ant1	5710 UNII-2C	33.873	5691.1275	5725	---	---
	Ant2	5710 UNII-2C	33.878	5691.1222	5725	---	---
	Ant1	5710 UNII-3	3.722	5725	5728.7216	---	---
	Ant2	5710 UNII-3	3.77	5725	5728.7702	---	---
	Ant1	5755	37.653	5736.1042	5773.7568	---	---
	Ant2	5755	37.602	5736.1062	5773.7077	---	---
	Ant1	5795	37.602	5776.1371	5813.7396	---	---
	Ant2	5795	37.634	5776.1335	5813.7671	---	---
11AX80MI MO	Ant1	5210	77.028	5171.4504	5248.4783	---	---
	Ant2	5210	77.024	5171.3953	5248.4192	---	---
	Ant1	5290	76.965	5251.4430	5328.4083	---	---
	Ant2	5290	77.085	5251.4432	5328.5279	---	---
	Ant1	5530	76.977	5491.4828	5568.4602	---	---
	Ant2	5530	77.01	5491.4333	5568.4433	---	---
	Ant1	5610	77.004	5571.4261	5648.4297	---	---
	Ant2	5610	76.964	5571.4627	5648.4265	---	---
	Ant1	5690	76.969	5651.4527	5728.4213	---	---
	Ant2	5690	77.023	5651.4803	5728.5038	---	---
	Ant1	5690 UNII-2C	73.547	5651.4527	5725	---	---
	Ant2	5690 UNII-2C	73.52	5651.4803	5725	---	---
	Ant1	5690 UNII-3	3.421	5725	5728.4213	---	---
	Ant2	5690 UNII-3	3.504	5725	5728.5038	---	---
	Ant1	5775	77.158	5736.2507	5813.4092	---	---
	Ant2	5775	77.256	5736.2350	5813.4912	---	---


6.5. Test graphs

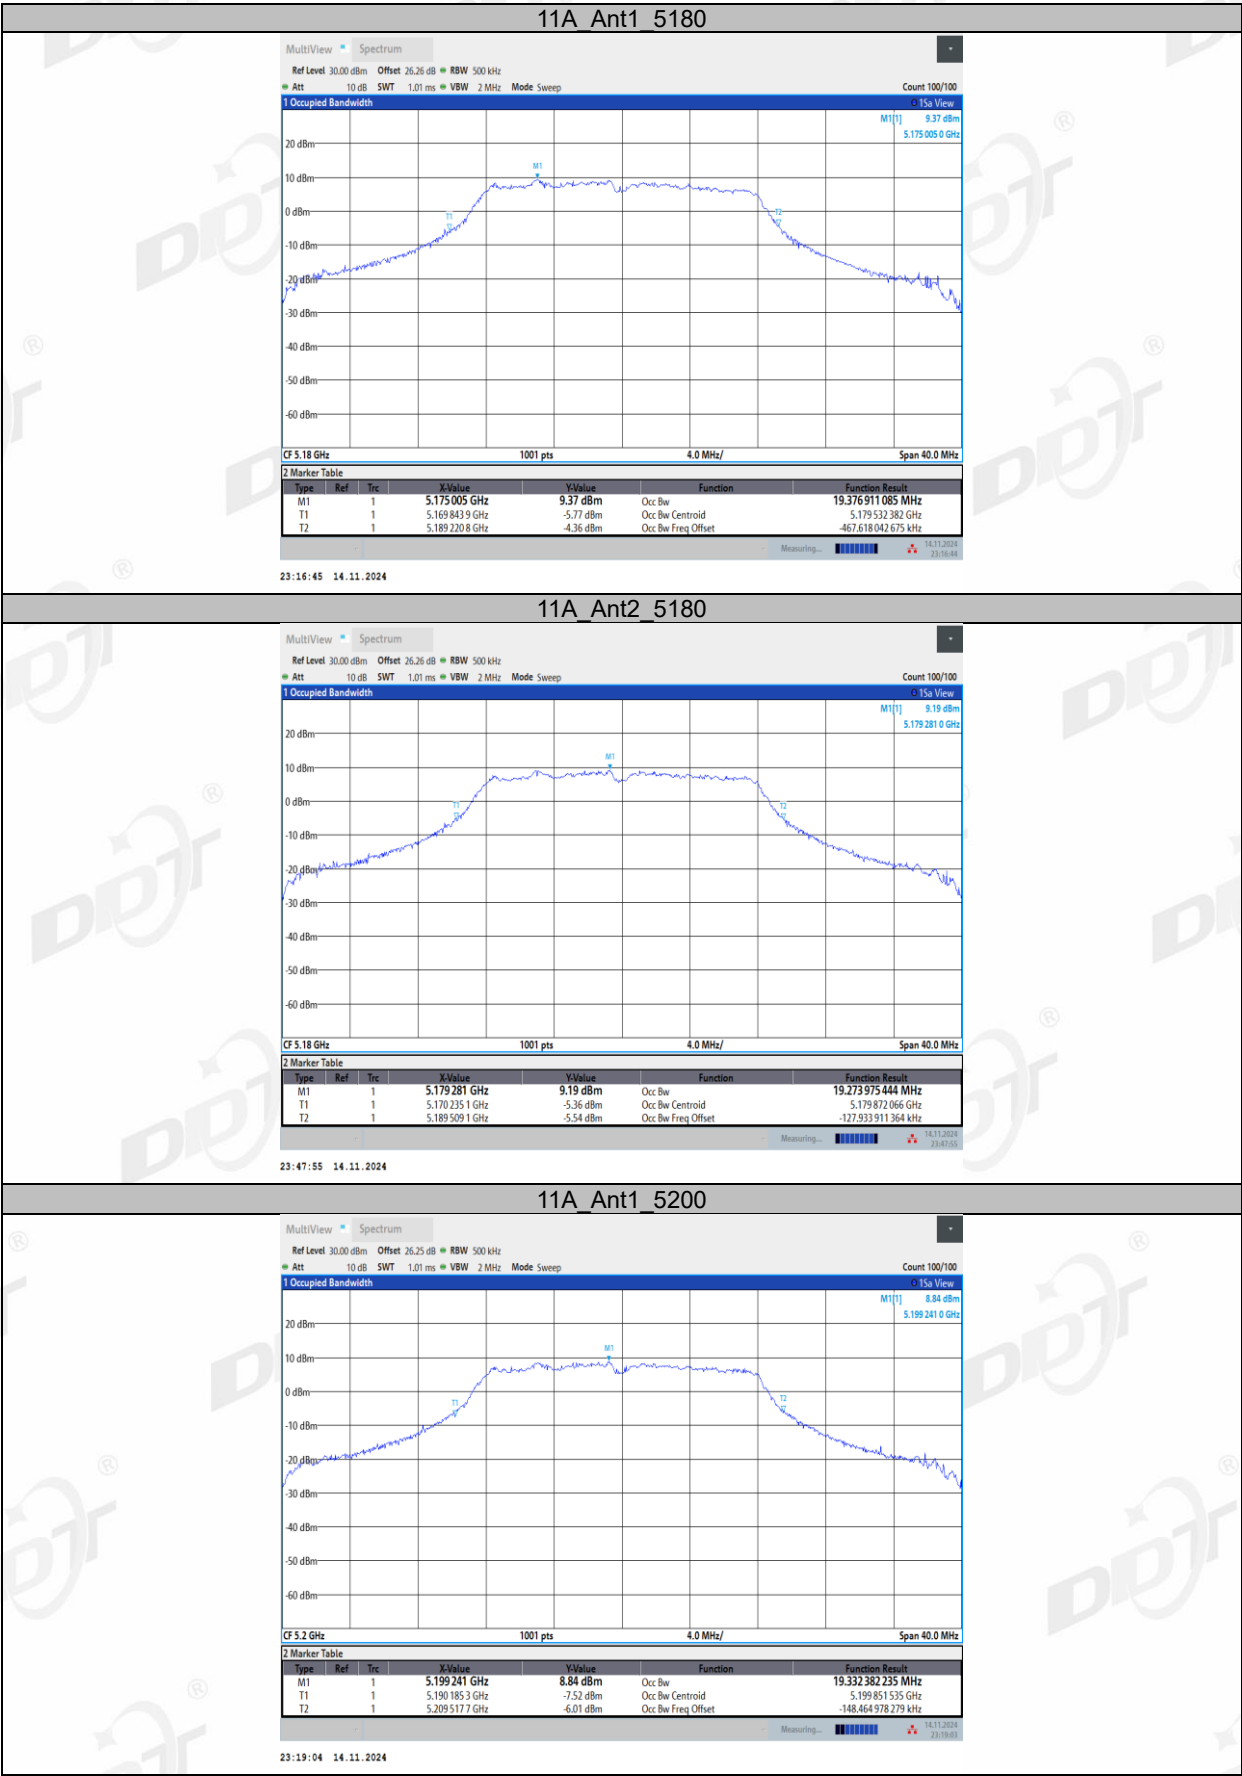

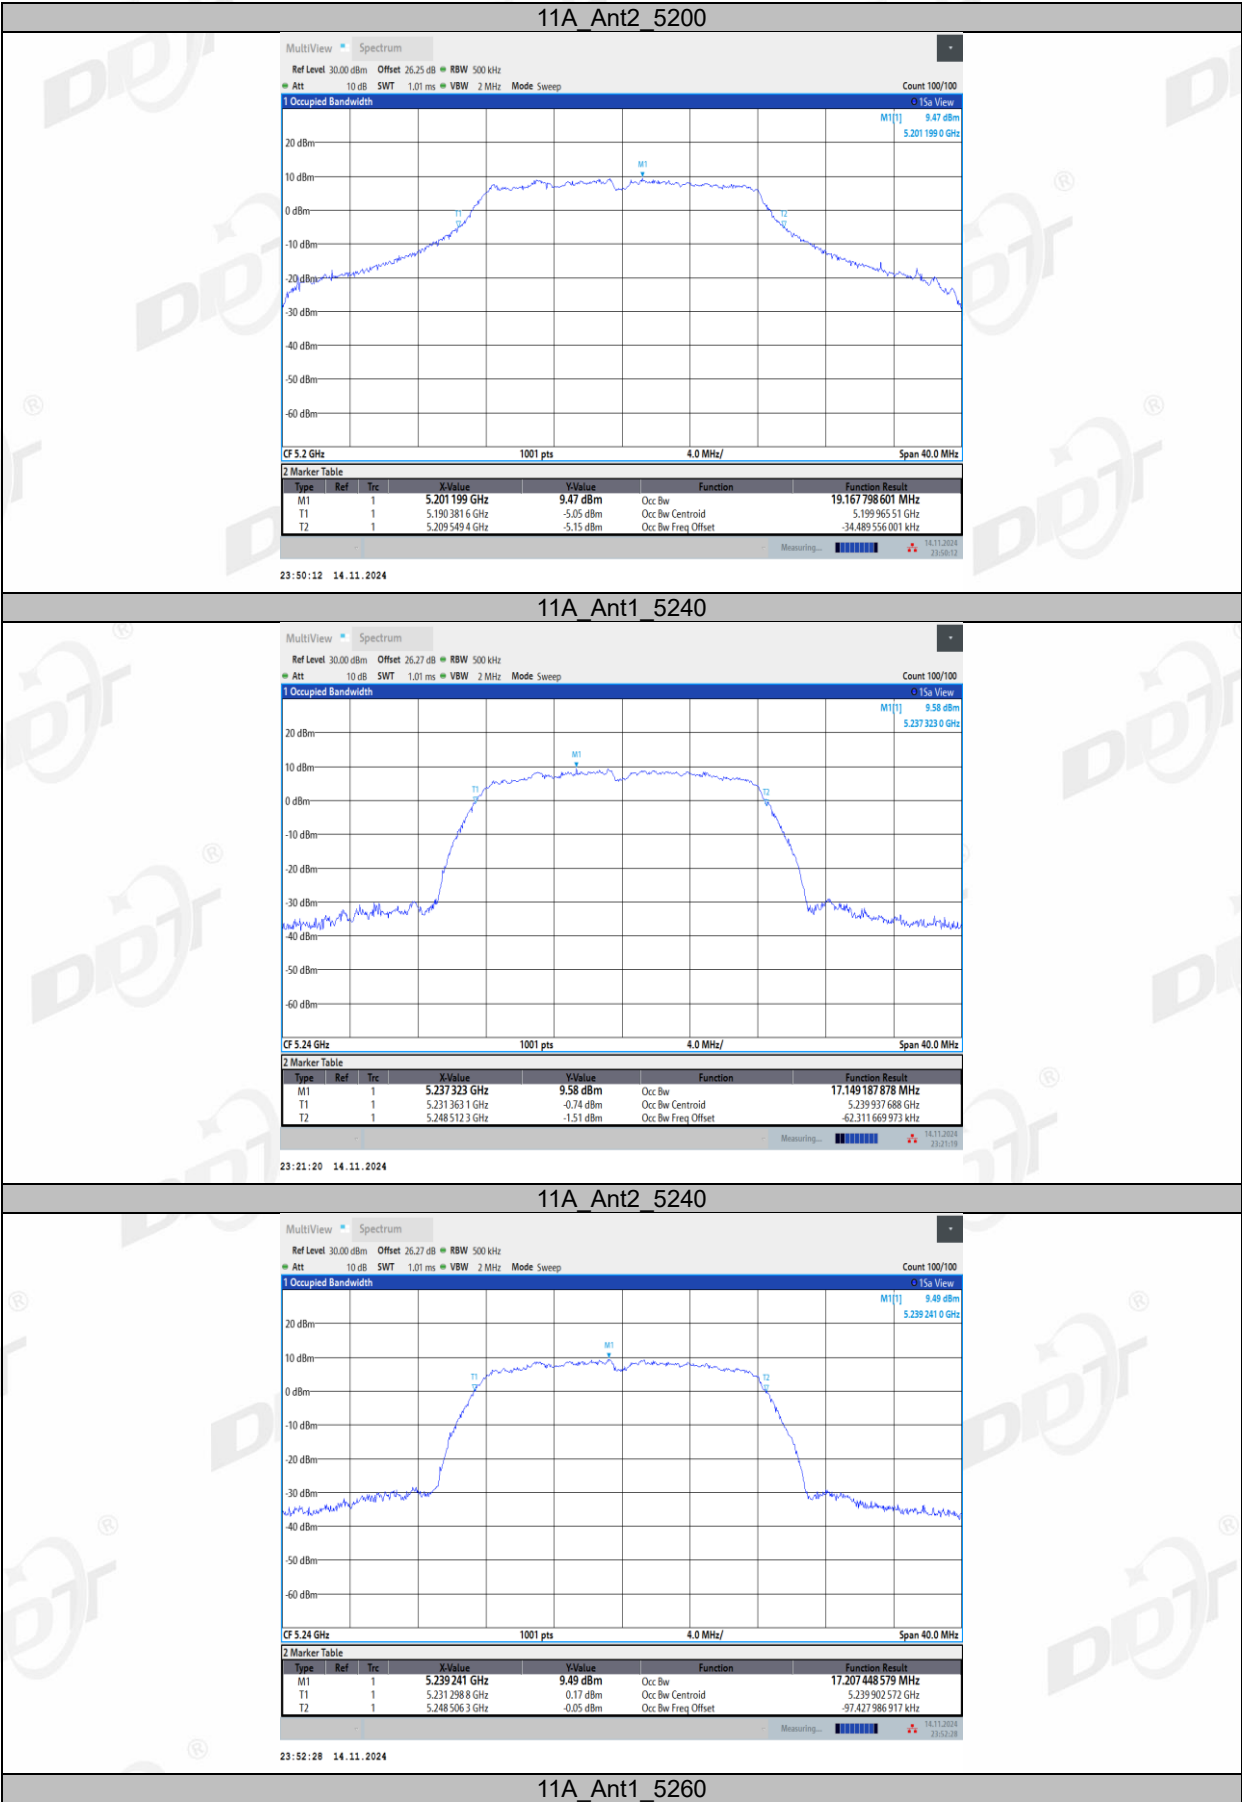


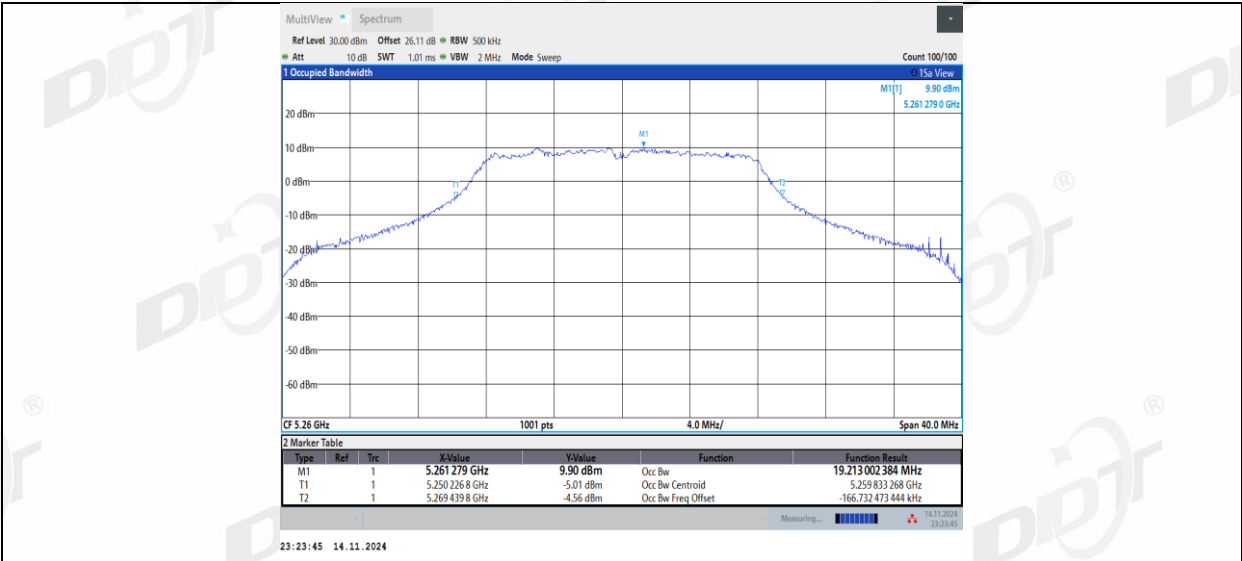


11A_Ant2_5260

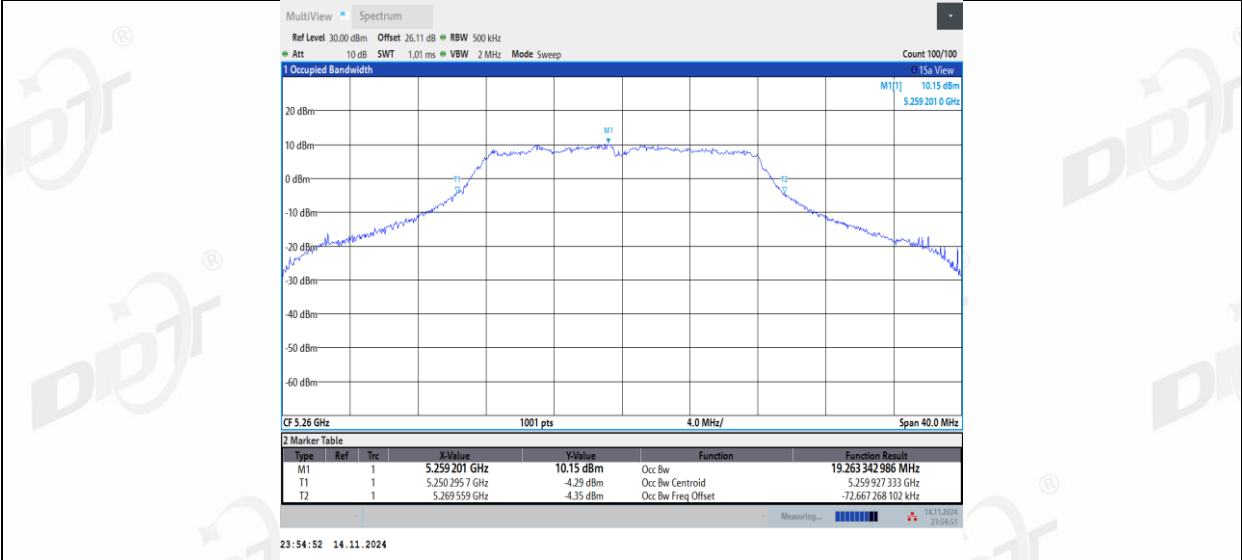


11A_Ant1_5280

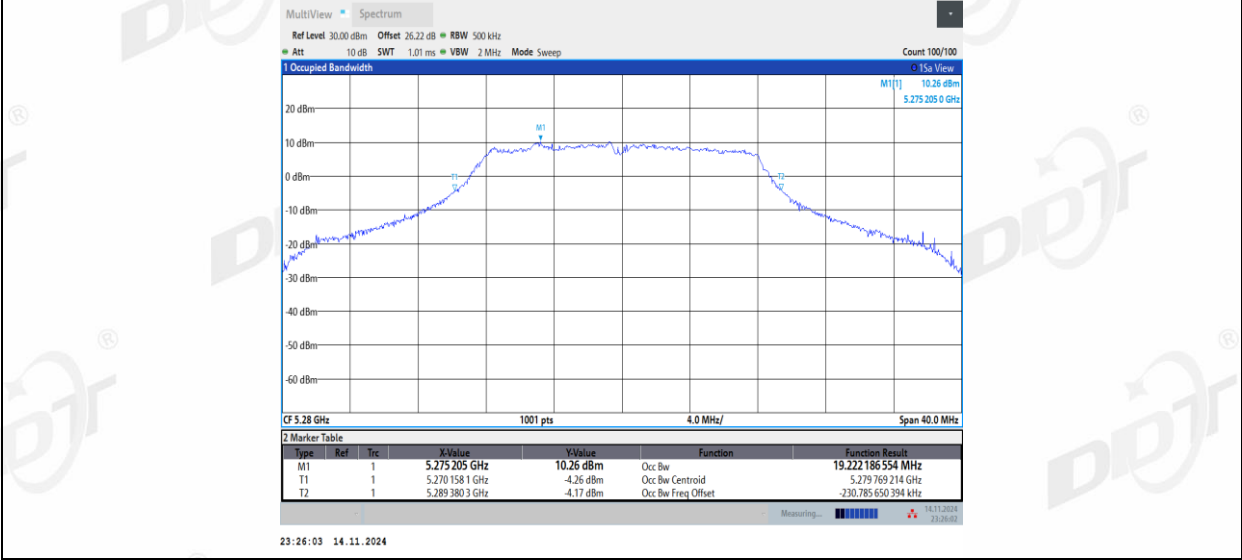


11A_Ant2_5280

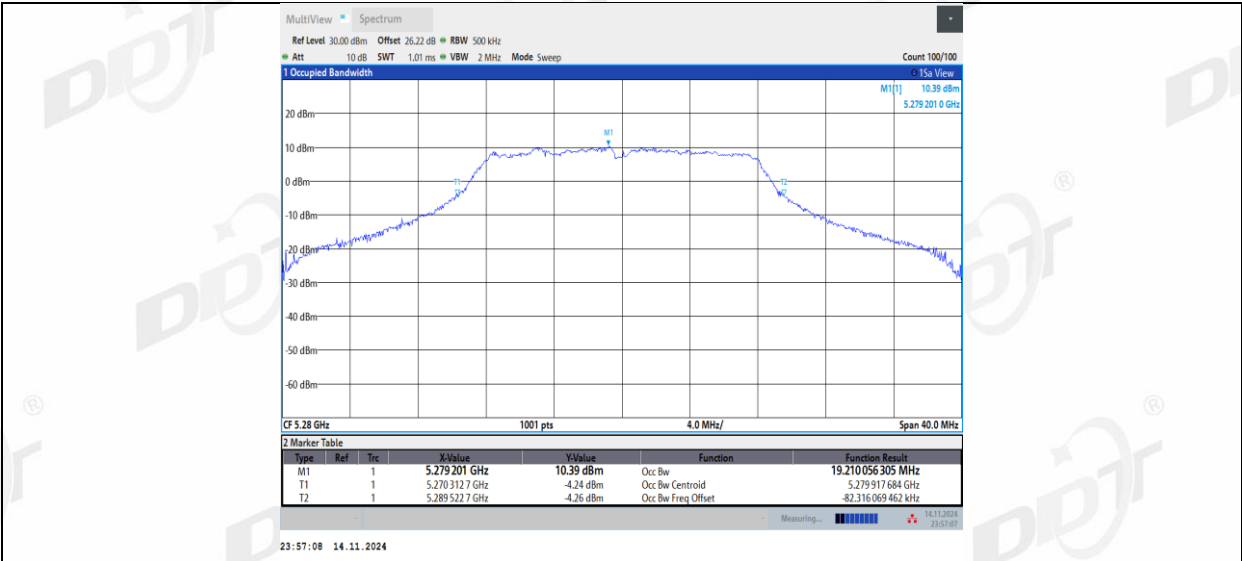

11A_Ant1_5320

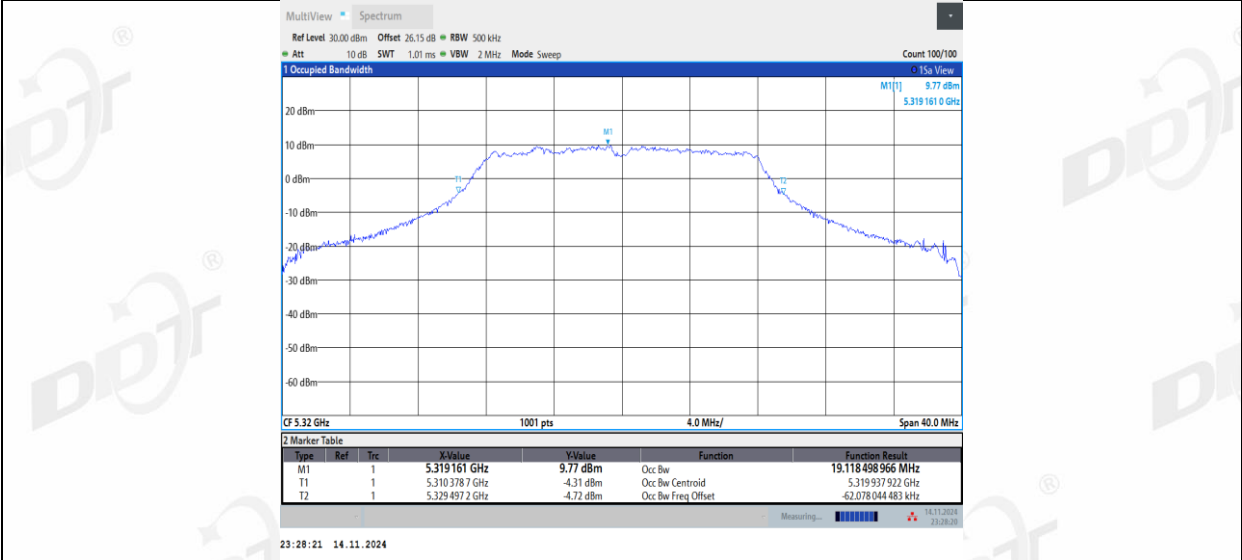

11A_Ant2_5320

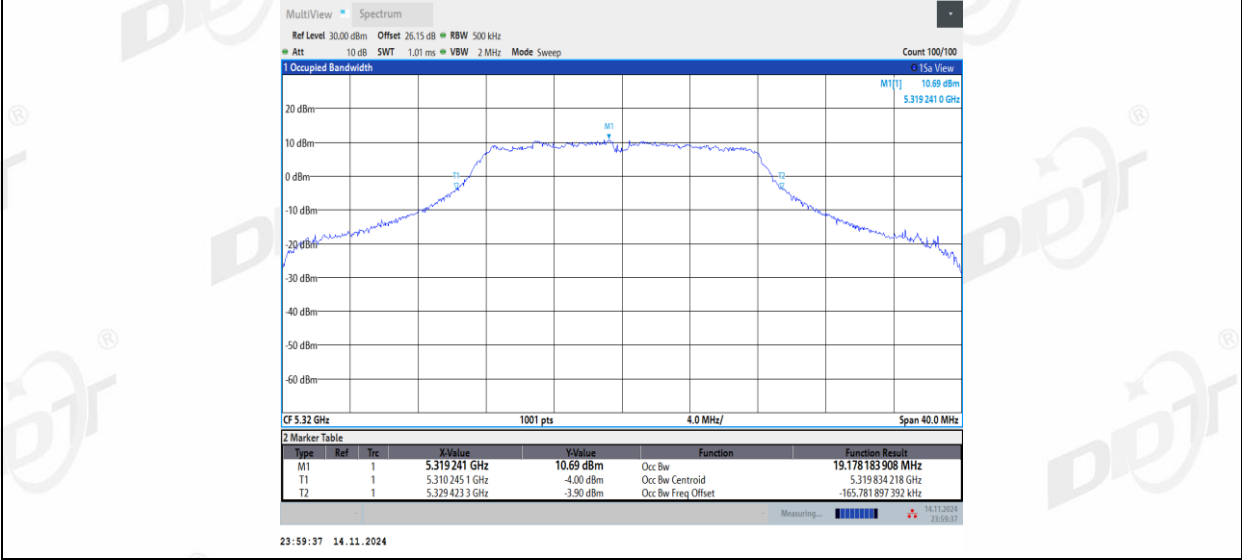

11A_Ant1_5500